Fairwinds 103

RECEIVED SEP 1981

PUT YOUR ZX81 IN CONTROL

Personal Computer World

Canada $2.75/US $2.00/FF 8.80/FL 4.00/SFr 7.20/IR £1.07/
BFr 87/SKr 13.55/DKr 21.00/Lire 3000/DM 5.50

October 1981 75p

BRITAIN'S LARGEST SELLING MICRO MAGAZINE

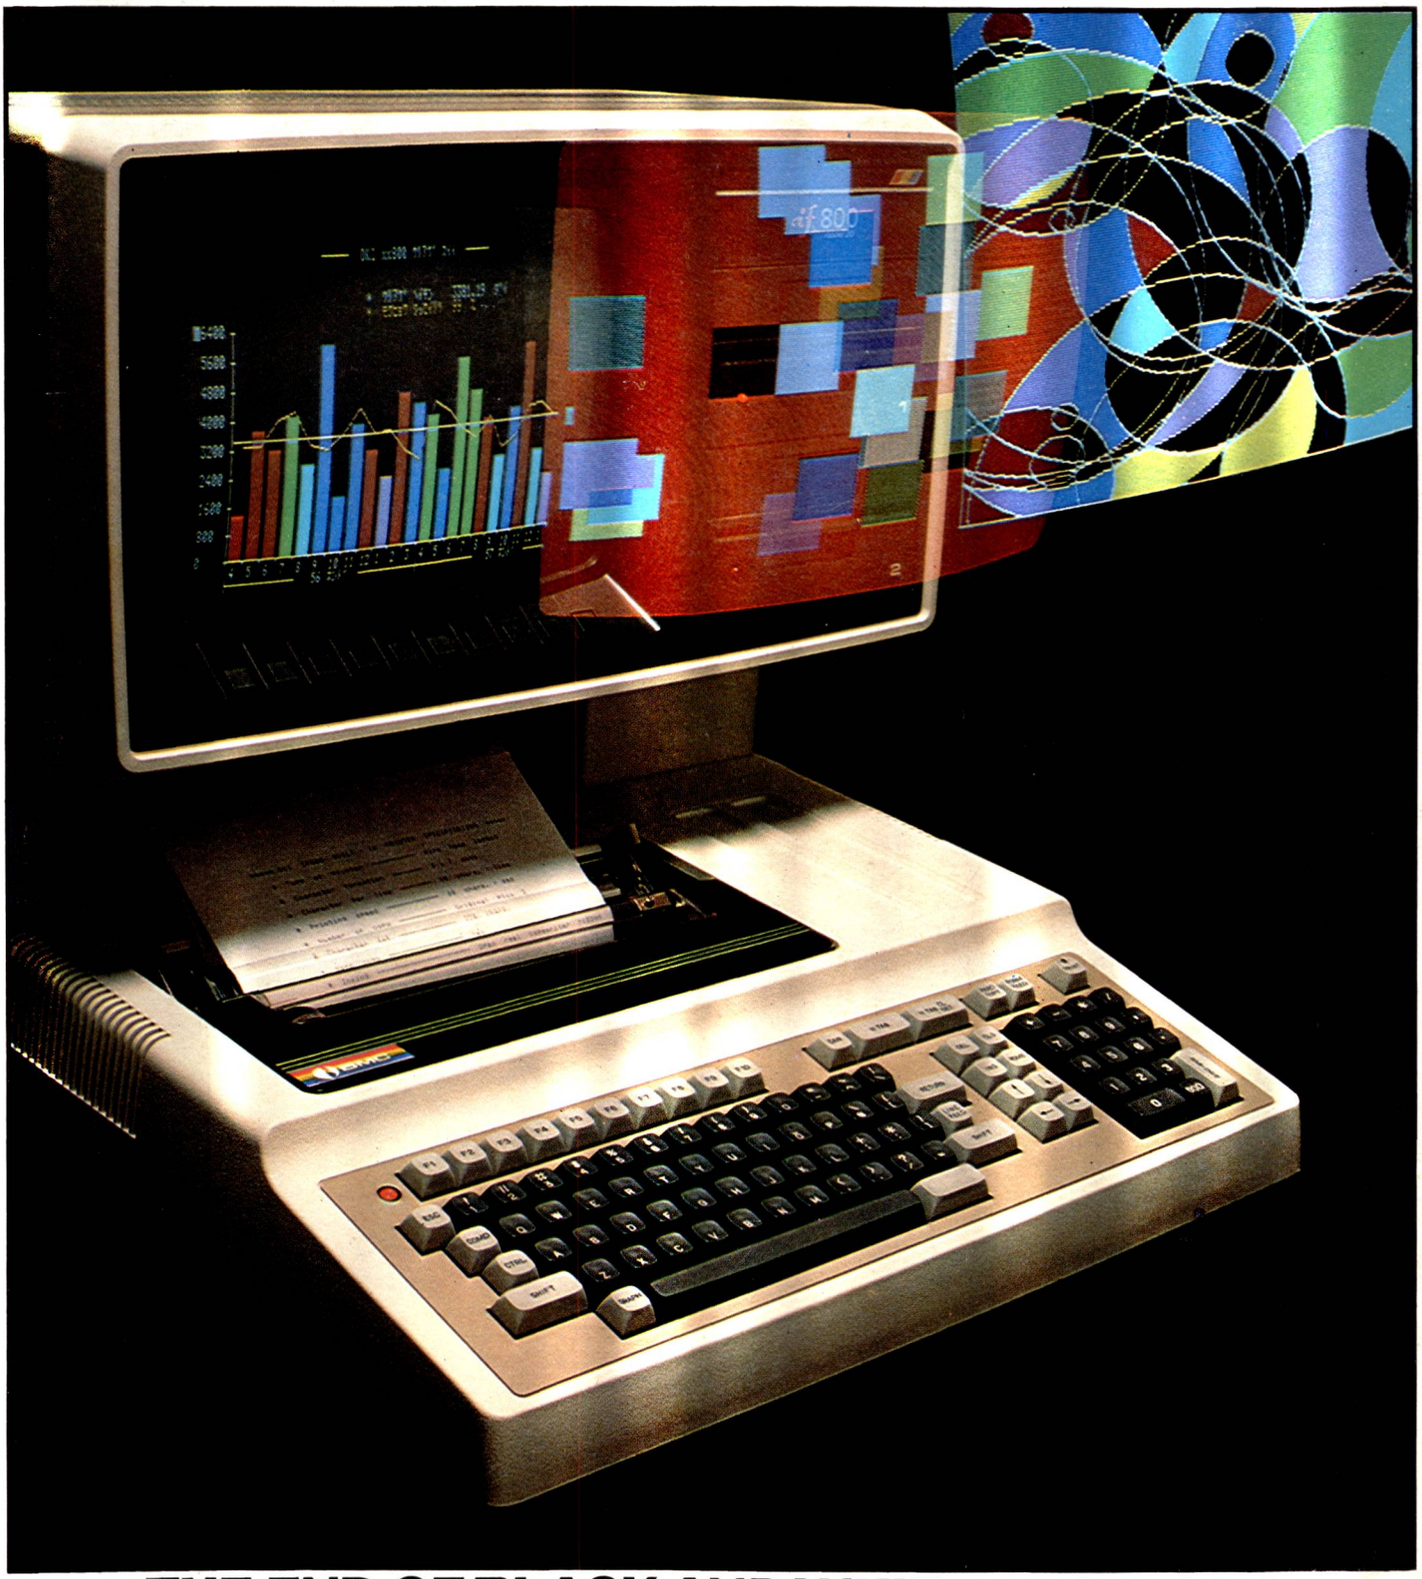

THE END OF BLACK AND WHITE DECISIONS

Benchtest: Oki's all-in-one colour business micro

Cromemco System Three



If you've already recognised the superiority of Cromemco products, or even if you're still evaluating alternative systems, it's worthwhile visiting MicroCentre.

Here's our promise. Ask to see anything in the Cromemco catalogue, and we'll demonstrate it for you. Nobody else in the UK carries a wider range of Cromemco demonstration systems and stock. We'll show you all the Cromemco computers, of course. From System Zero to System Three; the Z-2H Hard Disk system; high performance colour graphics; and the adaptable SCC single card computer.

Then we'll show you quality Cromemco peripherals; a choice of operating systems—single user and multi-user; and a wide range of software, including compilers, data base management, word processing, and Cromemco's integrated business packages.

At MicroCentre we pride ourselves in taking care of all the important details that make up a complete service . . . like stocking the complete library of Cromemco documentation; arranging leasing and maintenance agreements; supplying continuous stationery, ribbons, floppy disks, print thimbles, etc.

So if you're interested in Cromemco systems don't miss out a visit to MicroCentre. We're Cromemco's top dealers in Europe—and proud of it!

For C Cromemco. . .call the experts

MicroCentre
Tel: 031-556 7354

LEADING UK DISTRIBUTORS

Complete Micro Systems Ltd.,
30 Dundas Street
Edinburgh EH3 6JN

SACKCLOTH AND ASHES!

SUBSCRIBE TO PCW



Let's face it, last month he went completely over the top (no pun intended) on this page. There was really no need to publish that revolting 'exploding head' shot. One outraged reader even reported us to the authorities. 'Vengeance!' cried the Editorial Department' 'Atone!' demanded the Advertising Team.

Well, he has. Normally so tight that his head squeaks when he removes his hat, our esteemed publisher has agreed to really and truthfully offer readers something for nothing. So. . . every person or company subscribing to *Personal Computer World* before 30 October 1981 will be sent a free binder. This offer applies only to new or renewal subscriptions accompanied by full payment. Knowing our publisher's behavioural characteristics we can promise you it is an offer which is not likely to be repeated.

For those of you unfamiliar with *PCW* binders, these items are sturdily constructed, lavishly covered in buttercup yellow naughahyde and gold-blocked front and spine with the magazine's logos. They normally set you back £3.25 each and would grace even a bibliophile's shelves. More importantly, they will protect your treasured copies of Britain's largest-selling microcomputing magazine.

Get in now. Kick him while he's penitent. Even if you already have a subscription it could be monetarily worthwhile renewing in advance. This will cause utter confusion in our Subscriptions Department but, then, that's what computers are for, isn't it?

Use the coupon below or the subscription card stuffed somewhere in the magazine which has probably already dropped onto your floor. Include your remittance if you want to claim a free binder. Send to the address indicated; no stamp is required on your envelope. And congratulations on a good deal!

SUBSCRIPTION ORDER FORM

I would like to subscribe to Personal Computer World for one year (12 issues).
Please start my subscription from the _____ issue.
☐ This is a new subscription ☐ This is a renewal
☐ UK:£10.00. ☐ Rest of the world: £17.00.
☐ I enclose my cheque, made payable to Personal Computer World, for £
☐ Please invoice my company (UK only).

Name
Address

10

Please use block capitals.

For Office use only ☐ a ☐☐ b ☐☐ c ☐ d ☐☐☐☐ e

Please send this order form, with your remittance, to Personal Computer World, Subscriptions Dept, Freepost 7, London W1E 4EZ. No stamp is required.

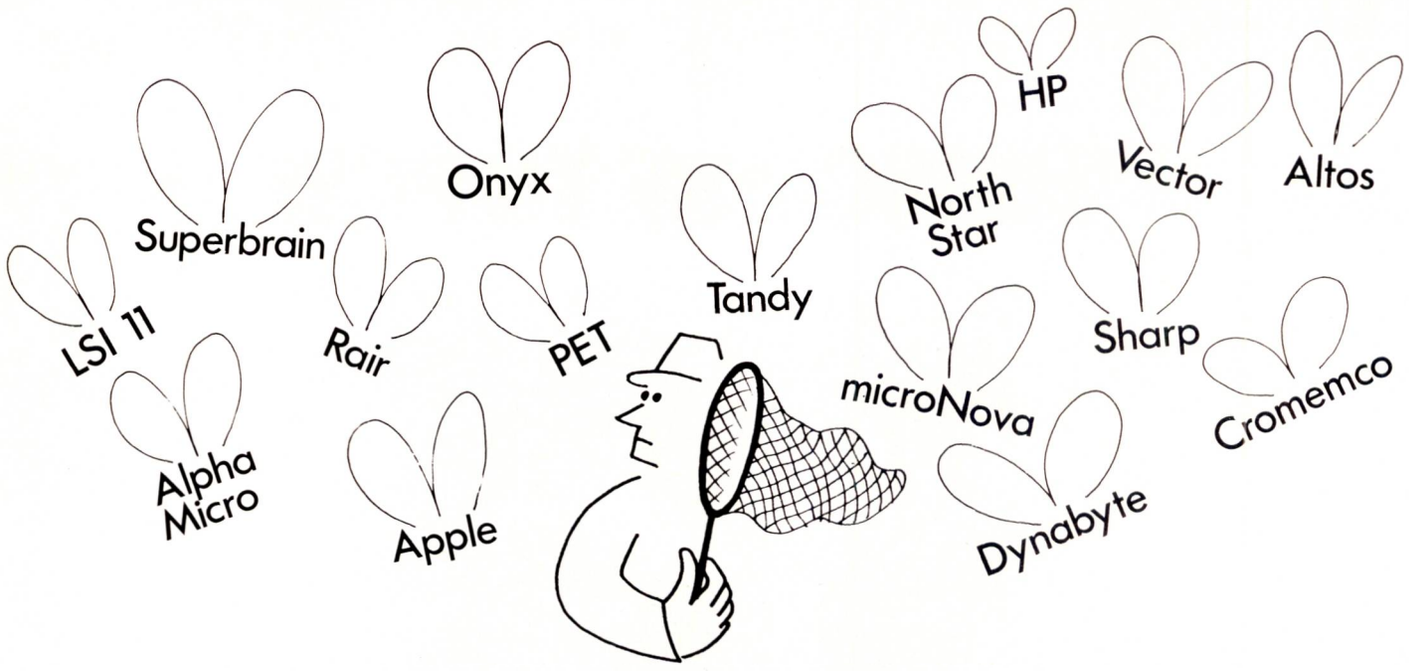

If only choosing a microcomputer was as simple as using one

Just look at the advertisements in this magazine. When can you find time to digest them all?

There are millions of chips, thousands of boards and hundreds of peripherals, software systems and application packages. How do you pick the right ones to meet your requirements?

And put them together? And make them work? And add the specials you want?

Professional Services

At Digitus we have computer professionals working full-time putting systems together. Absorbing information. Testing equipment and software. Writing programs. Training users.

At one stop you can commission a complete system to fit your requirements

Working Systems

In the last two years we have supplied systems for: number processing, word processing, data processing, information management, graphics and many creative applications. Advised accountants, surveyors, archaeologists and engineers. Helped DP departments and small business men. Developed software for personnel, insurance, incomplete records, order processing, business games, linear programming, process control and terminal emulation. And were retained by other computer companies to advise on micros.

Proven Experience

This year we can put over 200 man years computer experience to work so that you can benefit from micro technology . . . in comfort.

Come and see us. Spend a few hours discussing your requirements. Attend a training course. Select a machine. Test some software packages.

Solve the micro puzzle. Buy an operational system that fits your needs.

Call for an appointment or return the slip and we will call you.

Digitus Ltd 10-14 Bedford Street Covent Garden London WC2
Tel 01-379 6968

Digitus

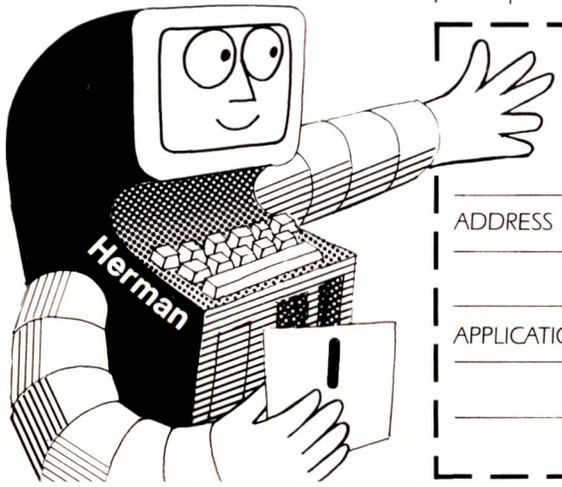

NAME

POSITION

COMPANY

ADDRESS

TELEPHONE

APPLICATION

PCW

INSIDE PCW

Volume 4 No 10 October 1981



Photography by Chris Stevens

54 NEWSPRINT: Guy Kewney reports the latest micro happenings.

67 YANKEE DOODLES: Tom Williams is back with news of the Apple III.

69 CTUK! NEWS: Would you believe 300 people at Computer-Town Worcester's first night?!

71 BANKS' STATEMENT: Martin takes a look at an intriguing family of chips with a big future.

74 CONTROL YOUR OWN SUB-STATION: Well, not quite, but here's how to connect your ZX80/81 to the outside world.

85 COMMUNICATIONS: Your chance to have your say.



88 BENCHTEST: Oki's fully-integrated colour business machine reviewed.

94 CHECKOUT: The Softy2 EPROM programmer.

98 BOOKFARE: Malcolm Peltu gets to grips with this month's titles.

101 PATTERNS: Alan Sutcliffe continues his series.

106 CHECKOUT: An in-depth review of the Heuristics Speech-Link and of speech recognition in general.

111 TJ'S WORKSHOP: Introducing a new, regular feature which brings hardware and software tips for all you Terminal Junkies. (Geddit?)

116 FASTER BASIC: Access your interpreter's subroutines directly in the quest for speed.

122 INTERRUPT: The first of a three-part investigation into computer literacy projects.

126 DESIGNING PROGRAMS THE WARNIER WAY: A neat, quick program design method.

131 YOUNG COMPUTER WORLD: Especially for our younger readers.

132 UP THE SHARP END: A double dose this month: software piracy and getting to grips with the 68000.

139 CALCULATOR CORNER: It mysteriously escaped from our August issue, but we've recaptured it: quirks on the TI51-III.

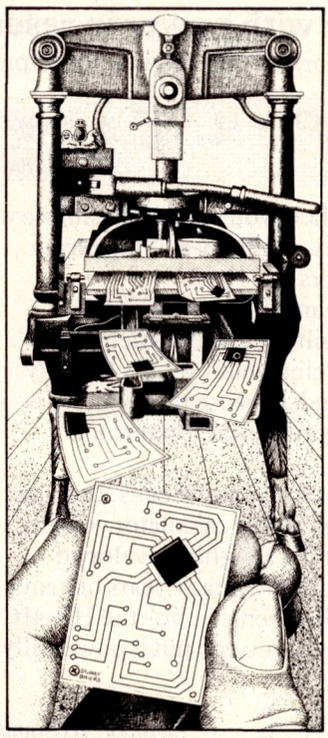

140 NEWCOMERS START HERE: Our quick intro for those new to the micro world.

141 COMPUTER ANSWERS: Got a problem? Sheridan Williams and friends can help.

146 DIRECT ACCESS: With In Store, Transaction File, User Groups, Network News and Diary Data.

154 PCW SUB SET: More useful assembler language subroutines, compiled by Alan Tootill.

158 LEISURE LINES: Put your micro to work and win a prize.

158 PROGRAMS: Our readers' latest listings.

165 BLUNDERS: We knew it couldn't last — a bumper crop this month!

166 BACK ISSUES: What you've missed and how to catch up.

223 CHIP CHAT: All the latest gossip, rumours, facts, even.

Founder
Angelo Zgorelec

Managing Editor
Dick Pountain

Editor
Peter Rodwell

Consultant Editor
David Tebbutt

Sub Editor
Jon Wall

Art Director
Paul Carpenter

Art Assistant
Phoebe Creswell-Evans

Typesetter
Jane Hamnell

Advertisement Director
Stephen England

Advertisement Manager
Patrick Dolan

Advertisement Executive
Marianne McNicholas (Micromart)

Subscriptions Manager
Alexandra James

Subscription rates
UK: £10.00
Overseas: £17.00

Address
14 Rathbone Place, London W1P 1DE

01-631 1433
(10am - 6pm)

Published by Sportscene Publishers (PCW) Ltd, 14 Rathbone Place, London W1P 1DE, England. Tel: 01-631 1433 Telex: 8954139 BUNCH G London

Copyright notice Personal Computer World is published by Sportscene Publishers (PCW) Ltd. ©1981 Felden Productions. No material may be reproduced in whole or part without written consent from the copyright holders

Printed by Riverside Press, Whitstable

Distributed by Seymour Press 334 Brixton Road London SW9 Tel: 01-733 4444

ABC

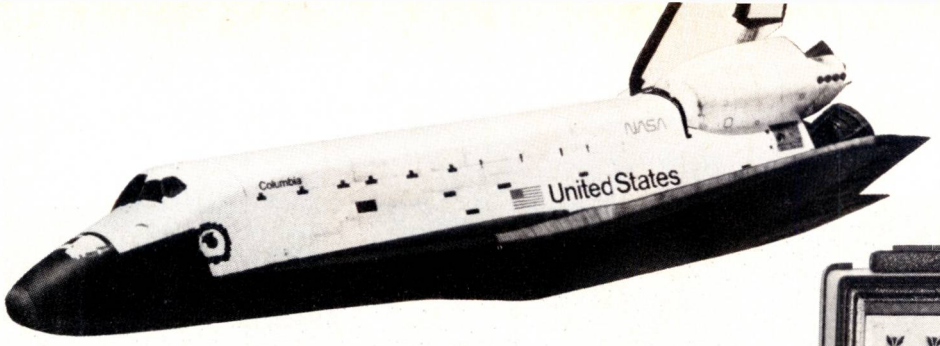

On the edge of the atmosphere, space shuttle Columbia was about to lose all contact with Earth: for 21 agonising minutes, touch-down would be touch-and-go.
As the world held its breath, the £4½ billion project relied on a £165 hand-held calculator, small enough to live in the pocket of Robert Crippen's flight suit.
The Hewlett-Packard HP-41C. Unmodified. Just as you buy it today...

Astronaut quality. Everyday simplicity. The HP-41C. £165 inc VAT*

Sooner or later, a basic calculator is too basic.

Suddenly you need to 'compute' – but with a 'computer' that's as simple and pocketable as a hand-held calculator. And, as NASA found, that means an HP-41C.

Today, a broad-ranging companion to an A-level course. Tomorrow, a fully-fledged, advanced programmable system for the businessman, analyst, researcher, technician, engineer or scientist.

Whatever your job, here's a calculator that will grow with you and your needs step-by-step into a complete calculating system – yet will always stay simple, manageable and portable.

The friendly calculator with power in reserve.

As a straightforward calculator, the HP-41C is a masterpiece of compact power.

It gives you read-out in letters, as well as figures and symbols, so the display can talk to you in an easy, simple way



Yet, inside, it has the effortless, problem-solving power normally associated with computers.

Among other things, that means the HP-41C is fully programmable. You can feed its built-in 400-line memory with ready-made programs or develop your own. Its friendly style makes it surprisingly easy. And, because the memory is continuous, what you put into it stays in – even when you switch off.

But that's not the end of the story by any means. Because, unlike any other advanced programmable calculator you are likely to see, the HP-41C has behind it a highly developed package of software support representing many years of heavy investment by Hewlett-Packard. So when you buy the HP-41C you don't just *own* a powerful system; you can put it powerfully to *work*.

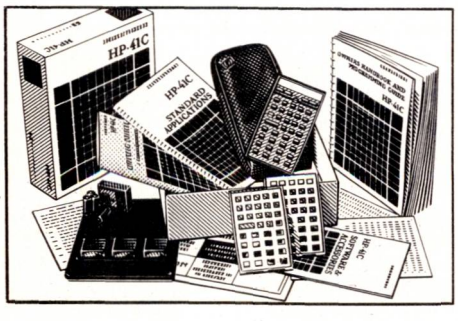

The HP-41C hand-held 'computer' in a box. £165 brings you the calculator, a comprehensive 270-page manual, owner's handbook, and programming guide, a standard applications handbook, customising overlays, HP Users' Library membership reply card, free one year's subscription to HP's User's Newsletter, batteries, carrying pouch and 12 months' full guarantee.

Proven software support – at your fingertips.

Here, the HP-41C really comes into its own with an unrivalled range of software support.

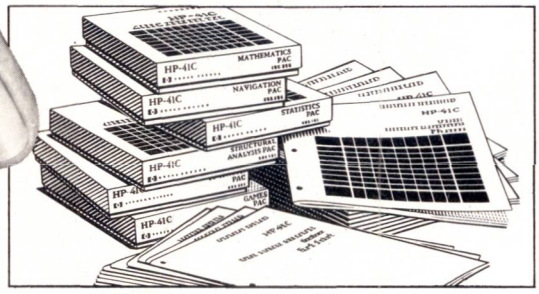

17 Application Modules – miniature plug-in solutions: maths, electrical engineering, financial decisions, games...

29 Solutions Books – each with up to 15 programs drawn from the best of 10,000 user-submitted programs. Each book provided with Bar Codes – for instant program entry with the HP wand.

11 Application Pacs – pre-recorded magnetic cards covering over 2,000 programs, entered through the card reader.

All software and peripherals are optional extras.

***Price correct at time of going to press.**

Two ways to make your system grow...



Snap-in more memory. *A single module will double the memory available. A quad module holds no fewer than 256 registers at once. Suddenly you've over 1800 lines of memory at your command.*

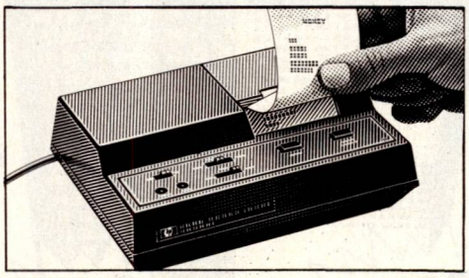

Plug-in a printer. *The HP-41C printer handles upper and lower case, in alpha, numeric and graph-plotting modes. Use it for final hard copy, or to follow program execution.*

Four ways to program your HP-41C...

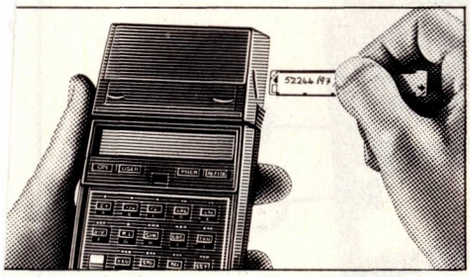

Card reader. *This reads pre-programmed magnetic cards. It can also record and read your own programs and data.*

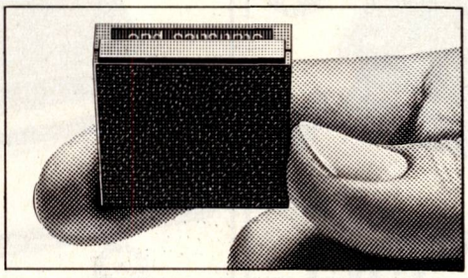

Application modules. *These are plug-in modules each containing a whole range of ready-made programs on your chosen subject.*

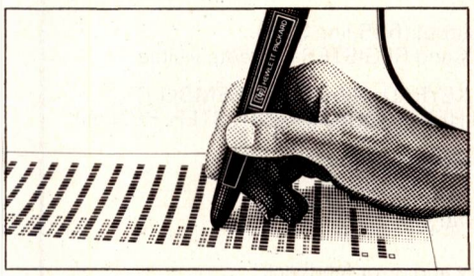

Bar code reader. *A quick and easy way of loading any one of the software packages. The wand simply 'lifts' the coded program straight off the page of your HP-41C solution books.*

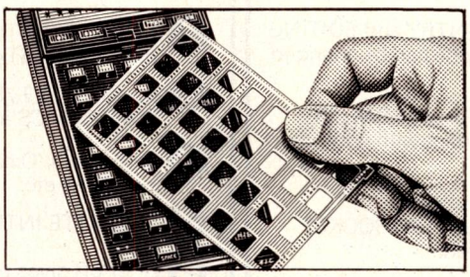

Keyboard customising. *Develop your own programs and enter them through the keyboard. You can assign any function or program to any key and mark them on your own customising overlay.*

Thousands of easy ways to solve problems.

Think of a problem! As an HP-41C owner you won't have far to look for the solution – or long to wait before it's locked in your system's memory. Any of HP's hundreds of pre-programmed solutions can be easily entered in any of the four ways we illustrate above. You'll certainly want to devise your own solutions, too. The guidance manual in your basic pack tells you how. If you develop an original one you could submit it to the HP-41C Users' Library. It already contains thousands of tested programs which 10,000 users world-wide are happy for you to share.

Quality from HP – the big computer manufacturer.

The HP-41C is made from the chip upwards by Hewlett-Packard, a world leader in computers. And you can tell! By the detail like the permanent inlaid key notations, tough ABS case, and gold-plated port contacts. By the elegant simplicity designed into the HP-41C's operating style. By the sort of software support only a computer giant would be capable of. By the utter reliability that is the HP hallmark throughout the world of computers.

HEWLETT PACKARD

See the HP-41C at **Comet, Xerox Stores, Wilding, Sumlock-Bondain, Landau** or these other Appointed Dealers:

Aberdeen Tyseal Office Equipment.
Bath Wilding Office Equipment.
Belfast Cardiac Services Company.
Birmingham John Mabon Associates; Research Micro System.
Bolton Wilding Office Equipment.
Bournemouth South Coast Business Machines.
Brighton Office Machinery Engineering Co.
Bristol Decimal Business Machines; Wilding Office Equipment.
Bromley Wilding Office Equipment.
Cambridge W. Heffer & Sons; Wilding Office Equipment.
Canterbury R. E. Typewriters.
Cardiff Sigma Systems (Calculators).
Carlisle Thos. Hill International.
Colchester Wilding Office Equipment.
Croydon Wilding Office Equipment. **Derby** Office Machines.
Dundee Tayside Office Equipment.
Edinburgh Business & Electronic Machines; Holdene; Robox.
Folkestone R. E. Harding. **Glasgow** Robox.
Gloucester Wilding Office Equipment.
Gravesend Wilding Office Equipment.
Grimsby Teesdale Office Equipment.
High Wycombe Wilding Office Equipment.
Hornchurch Wilding Office Equipment.
Ilford Wilding Office Equipment.
Ipswich Anglia Business Machines; Wilding Office Equipment.
Kingston-upon-Thames Wilding Office Equipment.
Leeds Holdene; Wilding Office Equipment.
Leicester A. C. Barratt & Co.; Sumlock Services.
Lichfield Anglo American Computing.
Liverpool Rockliff Brothers.
London AEC – 2 Shoreditch High Street; City Business Machines – 57 Houndsditch, Bethnal Green Road; Concept Business Systems; Dixons Photographic – 123 Holborn, 64 New Bond Street; Euro-Calc – 128-132 Curtain Road, 224 Tottenham Court Road, 55 High Holborn; Landau Calculators – Bourne's Oxford Street, 227 Tottenham Court Road; McDonald Stores – 78 Oxford Street; Metyclean – 137 The Strand, 92 Victoria Street; Mountaindene – 22 Cowper Street; Sumlock-Bondain – 263-269 City Road, 360 Euston Road, Cannon Street Station; Wallace-Heaton – 127 New Bond Street; Wilding Office Equipment – 7 The Arcade Hoe Street, 21 Thomas Street, 120 The Broadway, Wimbledon; 199 Parrock Street, Gravesend. The Xerox Store Piccadilly – 76 High Holborn, 110 Moorgate.
Luton Wilding Office Equipment.
Maidstone Wilding Office Equipment.
Manchester Automated Business Equipment; Holdene; Wilding Office Equipment. **Matlock** Derby Office Machines.
Middlesbrough Thos. Hill International.
Newcastle Thos. Hill International.
Northampton A. C. Barratt & Co.
Norwich Leamons Office Machines; Sumlock-Bondain.
Nottingham Bennett's (Typewriter & Office Suppliers); Trent Office Equipment. **Oxford** Reid's Office Equipment; Science Studio. **Plymouth** JAD Integrated Services.
Reading Central Southern Equipment; Reid's Office Equipment; Caversham, 38 Market Place, Reading.
Romford Wilding Office Equipment. **Royston** Herts Electroplan.
Sheffield Butlers Office Equipment.
Slough Wilding Office Equipment.
Southampton Leicester Typewriters.
Southend Wilding Office Equipment.
Sunderland Thos. Hill International.
Sutton Landau Calculators.
Swindon Wilding Office Equipment.
Waltham Cross Wilding Office Equipment.
Watford Automatic & Electronic Calculators; Wilding Office Equipment.
Worthing Office Machinery Engineering Co.
CHANNEL ISLANDS: Guernsey A. E. S. Ltd. **Jersey** A. E. S. Ltd. **EIRE: Dublin** Abacus Systems.

All UK Comet branches.

DEVELOPMENT

EPROM-PROGRAMMER
ROMULATOR



1. MONITOR or TV output (625 line UHF). Data contents of memory visible — A WINDOW IN THE CHIP.
2. 28-KEY, 2-LEVEL KEYPAD with HEX ENTRY and EDITING CAPABILITY. (BYTES and BLOCKS of code can be changed, inserted, deleted, shifted around etc.).
3. INPUT and OUTPUT: SERIAL (RS232) and PARALLEL (Centronics) routines provide ready interface with computer or printer.
4. EMULATION of PROGRAM MEMORY in-circuit is performed by plugging SOFTY into the ROM SOCKET. A lead with a 24 pin DIL PLUG is supplied.
5. CASSETTE INTERFACE.
6. EPROM-PROGRAMMER: an EPROM may be copied or reprogrammed at the press of a key.
7. PERSONALITY SWITCH selects 2716, 2532, 2732.

SOFTY is used as an EPROM-PROGRAMMER, a production ROM CHECKER and for the DEVELOPMENT and PRODUCTION of PRODUCTS which contain MICRO-PROCESSORS and use EPROM for program storage.

*Price is for a BUILT and TESTED SOFTY (No kits) including POWER SUPPLY, TV LEAD, ROMULATOR LEAD, 90 DAY WARRANTY and 14 day money-back guarantee.
£169.00 + £25.35 (VAT 15%) = £194.35.

DATAMAN DESIGNS,
Lombard House, Dorchester, Dorset DT1 1RX
Dorchester (0305) 68066 (UK Sales)
Maiden Newton (0300) 20700 (Export)

TEACHING

Z80-ASSEMBLER
MICRO-CONTROLLER

MENTA

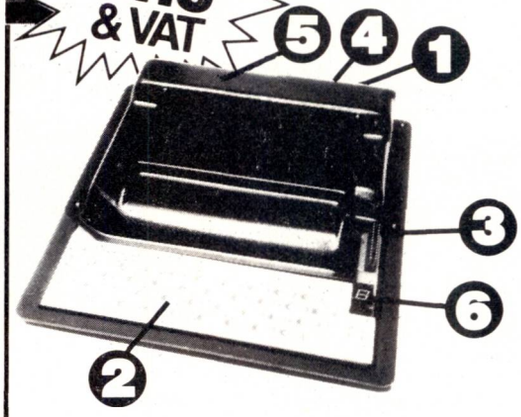

1. MONITOR or TV output (625 line UHF). PROGRAM, STACK and REGISTER contents visible.
2. 40-KEY, 3-LEVEL KEYPAD with Z80 ASSEMBLER MNEMONICS and HEX. PROGRAM-EDIT, STEP, RUN etc.
3. 24 bits of I/O can control external machinery, indicators etc.
4. CASSETTE INTERFACE.
5. BEEPER gives entry and error feedback.
6. LED gives prompt and page number.

MENTA was designed to fulfil request of Schools Council's Modular Courses in Technology Project for "Microelectronics Teaching Devices" for use in a module which is now being tested in schools in Bromley. Inquiries are invited from Companies and Institutions with commitment to train students in SYSTEM DESIGN.
MENTA is from the same stable as the SOFTY development systems.

*Price is for a SAMPLE UNIT with POWER SUPPLY and TV LEAD. £115 + £17.25 (15% VAT) = £132.25.

DATAMAN DESIGNS,
Lombard House, Dorchester, Dorset DT1 1RX
Dorchester (0305) 68066 (UK sales)
Maiden Newton (0300) 20700 (Export)

MICRODIGITAL

PRICES SEPTEMBER/OCTOBER 1981

APPLE ★ Two year guarantee

	NET	V.A.T.	TOTAL
● Apple II + 48K, B & W Modulator	Ring for Latest Price!		
● Disk Drive Plus Controller (3.3)	375.00	56.25	431.25
● Disk Drive	295.00	44.25	339.25
Programmer's Aid	26.00	3.90	29.90
Autostart Rom Pack	33.00	4.95	37.95
Graphics Tablet	485.00	72.75	557.75
Silentype	335.00	50.25	385.25
Apple Tel System	575.00	86.25	661.25
Black and White Modulator	14.00	2.10	16.10
Pascal Language System	245.00	36.75	281.75
Applesoft Firmware Card	95.00	14.25	109.25
Integer Card	95.00	14.25	109.25
● 16K Ram Card (48K→ 64K)	95.00	14.25	109.25
Language Card	97.50	14.63	112.13
Apple Pilot	79.00	11.85	90.85
Apple Fortran	105.00	15.75	120.75
Apple Prototype/Hobby Card	12.00	1.80	13.80
Vero Prototype/Hobby Card	10.00	1.50	11.50
Parallel Printer Interface Card	87.50	13.13	100.63
Communications Card	103.00	15.45	118.45
High Speed Serial Interface Card	94.75	14.21	108.96
Centronics Card	103.00	15.45	118.45
Controller Card	100.00	15.00	115.00
● Eurocolour Card	69.00	10.35	79.35
IEEE -488 Interface	230.00	34.50	264.50
Thermal Paper for Silentype	2.75	.41	3.16
Vinyl Carrying Case	16.00	2.40	18.40
Apple Ties	6.00	.90	6.90
Alf			
MC1 – 9 Voice	99.00	14.85	113.85
MC16 – 3 Voice	123.00	18.45	141.45
10-1-17 Timing Mode Input	11.30	1.70	13.00
Heuristics			
Speech Lab	135.00	20.25	155.25
Controller 70	60.00	9.00	69.00
Speechlink 2000	185.00	27.75	212.75
Mountain Hardware			
Clock/Calander	173.00	25.95	198.95
Supertalker	185.00	27.75	212.75
Rom-Plus Board	127.00	19.05	146.05
Rom Writer	105.00	15.75	120.75
Music System Complete	330.00	49.50	379.50
Copyplus Rom	34.00	5.10	39.10
AD + DA 16 Channel	210.00	31.50	241.50
Other Items			
● Omnivision	150.00	22.50	172.50
Numeric Keypad	85.00	12.75	97.75
Sup 'R' Terminal	195.00	29.25	224.25
Interactive Structures			
AO-03/4 Analog Output 4 Chan	195.00	29.25	224.25
AO-03/8 Analog Output 8 Chan	299.00	44.85	343.85
A1-02 Data Aquisition	210.00	31.50	241.50
D1-09 Digital Interface	235.00	32.25	270.25
● AI-13 Analog Input 16 Chan	395.00	59.25	454.25
March Communications			
Micro-Clock	49.95	7.49	57.44
Micro-Port	49.95	7.49	57.44
Micro-Synth	49.95	7.49	57.44
Micro-Talker 1	85.00	12.75	97.75

APPLESOFTWARE

	NET	V.A.T.	TOTAL
● Micro Modeller	425.00	63.75	488.75
● Visicalc (3.3)	115.00	17.25	132.25
Visidex	110.00	16.50	126.50
Visiplot	98.00	14.70	112.70
Visi Trend/Plot	140.00	21.00	161.00
Visi Term	82.00	12.30	94.30
Desktop Plan II	110.00	16.50	126.50
CCA Datamanagement	56.00	8.40	64.40
Apple Writer	39.00	5.85	44.85
Apple Plot	38.00	5.70	43.70
Data Plot (Muse)	33.00	4.95	37.95
Data Base Management	47.00	7.05	54.05
Data Master	47.00	7.05	54.05
Information Master	67.00	10.05	77.05
● D.B. Master V.2.4	105.00	15.75	120.75
The Address Book	27.00	4.05	31.05
Magic Window Text Editor	49.00	7.35	56.35
Easywriter (80 Col.)	155.00	23.25	178.25
Mailmerge (80 Col.)	68.50	10.28	78.78
Applesoft Basic Compiler	111.00	16.65	127.65
Full Lisa 4-part Package	66.00	9.90	75.90
● Lisa Interactive Assembler	35.00	5.25	40.25
Bill Budge 3D Graf Tutor	21.70	3.26	24.96
E-Z Draw 3.3	22.50	3.38	25.88
Animation Pac	31.00	4.65	35.65
Saturn Navigator	15.00	2.25	17.25
Higher Graphics II	20.50	3.08	23.58
Higher Text	20.50	3.08	23.58
3-D Super Graphics	22.25	3.34	25.59
Apple World	33.00	4.95	37.95
Memory Management System	25.25	3.79	29.04
● Programming Aids 3.3	43.50	6.53	50.03
Applesoft Structured Basic	14.75	2.21	16.96
Apple-DOC	22.50	3.38	25.88
Datestones of Ryn	12.30	1.85	14.15
Hellfire Warrior	22.00	3.30	25.30
Morloc's Tower	12.30	1.85	14.15
Temples of Apshai	22.50	3.38	25.88
Alkalabeth	20.00	3.00	23.00
Tarturian Adventure	14.80	2.22	17.02
Creature Venture	14.80	2.22	17.02
Adventure	14.80	2.22	17.02
Wizard and the Princess	18.90	2.84	21.74
● Zork	21.00	3.15	24.15
Adventure 1 + 2 + 3	21.00	3.15	24.15
Adventure 4 + 5 + 6	21.00	3.15	24.15
Adventure 7 + 8 + 9	21.00	3.15	24.15
Adventure 10	12.95	1.94	14.89
Windfall	12.35	1.85	14.20
Sargon II Chess Game	21.50	3.23	24.73
3 Mile Island	22.50	3.38	25.30
The Best of Muse	22.50	3.38	25.30
Bridge Partner	14.80	2.22	17.02
Checker King	14.80	2.22	17.02
Gammon Gambler	14.80	2.22	17.02
Microchess 2.2	14.80	2.22	17.02
Fastgammon	14.80	2.22	17.02
Fracas	14.80	2.22	17.02
Apple 21	14.80	2.22	17.02
Craps	14.80	2.22	17.02
Microgammon II	14.80	2.22	17.02
Roulette	14.80	2.22	17.02
Cosmo Mission	14.00	2.10	16.10
Anti Balistic Missle	14.80	2.22	17.02
Asteroid Field	14.80	2.22	17.02
Asteroids in Space	12.50	1.88	14.38
Star Cruiser	14.80	2.22	17.02
Alien Typhdon	14.80	2.22	17.02
Apple Galaxian	14.80	2.22	17.02
Hyper Head-On	14.00	2.10	16.10
Puckman	14.80	2.22	17.02

MICRODIGITAL

The Microcomputer Specialists

CRA

Send for free 24 page book brochure



Epson Interfaces

	NETT	V.A.T.	TOTAL
Epson/Sharp Cassette	65.00	9.75	74.75
Epson/Sharp Disk	120.00	18.00	138.00
Epson/RS232	45.00	6.75	51.75
Epson/RS232 + 2K F1F0	98.00	14.70	112.70
Epson/Apple	85.00	12.75	97.75
Epson/TRS 80 Bus	59.00	8.85	67.85
Epson/TRS 80 Expansion	25.00	3.75	28.75
Epson Ribbons	7.00	1.05	8.05
Epson MX100, MX130 Ribbons	8.50	1.28	9.78
Microline 80	295.00	44.25	339.25
Microline 80 Tractor	45.00	6.75	51.75
Diplomat Card (Apple-Microline)	85.00	12.75	97.75
Microline Ribbons	2.25	.34	2.59
Paper Tiger 445	560.00	84.00	644.00
Paper Tiger 460	690.00	103.50	793.50
● Paper Tiger 560	850.00	127.50	977.50
445, 460, 560 Ribbons	8.50	1.28	9.78
Centronics 737	390.00	58.50	448.50
Centronics 739	485.00	72.75	557.75
737/739 Ribbons	6.00	.90	6.90
● Seikosha GP80	195.00	29.25	224.25

Seikosha Interfaces

Seiko/Apple	59.00	8.85	67.85
Seiko/Pet	59.00	8.85	67.85
Seiko/Video Genie (EG3016)	33.00	4.95	37.95
Seiko/RS232	79.00	11.85	90.85
Seiko/TTL Serial	43.00	6.45	49.45
Seiko/IEEE 488	59.00	8.85	67.85
Seiko/Sharp (Disk)	59.00	8.85	67.85
Seiko/Tandy	30.00	4.50	34.50
Seiko Ribbons	4.00	.60	4.60
Seiko Paper 8½" x 11" 2000 Sheets	12.00	1.80	13.80
Paper 9½" x 11" 2000 Sheets	12.00	1.80	13.80
Paper Delivery	3.00	.45	3.45

VIDEO MONITORS

BM12E 12" Green	180.00	27.00	207.00
VM129 12" B/W	183.00	27.45	210.45
VM906 9" HI-RES B/W	150.00	22.50	172.50
VM910 9" B/W	125.00	18.75	143.75
10" B/W Monitor	85.00	12.75	97.75
Cables	5.00	.75	5.75

Colour Monitors 14" New!

● MP 14N (NTSC) TTL, RGB	285.00	42.75	327.75
● MP 14P (PAL) TTL, RGB	285.00	42.75	327.75

SUNDRIES

QED Mains Suppressor 3 amp	12.80	1.92	14.72
QED Mains Suppressor 6 amp	17.30	2.60	19.90
Scotch 7440 Head Cleaning Kit	19.50	2.93	22.43
C15 Cassette	.80	.12	.92
C15 Cassettes Box 10	5.20	.78	5.98
C15 Cassettes Box 50	25.00	3.75	28.75
C15 Cassettes Box 100	45.00	6.75	51.75
● C15 Cassettes Box 1000	370.00	55.50	425.50
Mini Floppy SS/DD	2.50	.38	2.88
Mini Floppy SS/DD x 10	20.00	3.00	23.00
Mini Floppy SS/DD x 50	87.50	13.13	100.63
Mini Floppy SS/DD x 100	150.00	22.50	172.50
Mini Floppy DS/DD	4.00	.60	4.60
Mini Floppy DS/DD x 10	33.00	4.95	37.95
Mini Floppy DS/DD x 50	150.00	22.50	172.50
Mini Floppy DS/DD x 100	275.00	41.25	316.25
● 4116, 200 N.S.	.87	.13	1.00
● 2114, 300 N.S.	1.30	.20	1.50
TI Programmer Calc	45.00	6.75	51.75
Paper 8½" x 11" 2000 Sheets	12.00	1.80	13.80
Paper 9½" x 11" 2000 sheets	12.00	1.80	13.80
Paper Delivery	3.00	.45	3.45

★ **Send for free 24 page book brochure**

Terms & Conditions

Microdigital Limited
Microdigital Limited is part of the retail division of the Ladbroke Group of companies and is registered in England. Registered Number 319646437
Registered Office: Chancel House, Neasden Lane, London NW10
Directors: P. M. George, P. Klein, G. W. Ralph, D. J. Sale, V. C. Gaffin, T. Edmundson
Ultimate Holding Company: Ladbroke Group Limited. VAT Number: 240 1132 31

In addition to cash we accept Access, Barclaycard, Stereo Club, American Express, Diners Club and cheques covered by a bankers card.
Official orders over £50 are welcome, with normal 30 days credit extended to bona-fide commercial and government organisations. All prices, specifications and terms are subject to change without notice at the discretion of the management. Offers subject to availability.
All previous Microdigital Advertisements are superseded by this. Not all stores carry every advertised item. Prices correct at time of going to press. E. & O.E.

Computer Retailers Association
We are founder members of the Computer Retailers Association, a voluntary organisation of leading micro-computer dealers and service organisations.
The purpose of the Association is to maintain and improve standards of trading and customer support within the industry and to present the industry's case to the outside world. The Association also acts as a forum where members can discuss common problems.

A Better Guarantee
Microdigital Ltd., warrants the products it sells against defects in material and workmanship for a period of one year from the date of purchase, two years for Apple and Sharp products.
During the warranty period, the company will repair (or at its own option, replace) at no charge, components that prove defective. This is provided the product is returned, shipping prepaid, or by person, stating when it was bought and enclosing proof of purchase.
This warranty does not apply if, in the opinion of the company, the product has been damaged by accident, misuse or misapplication.

Lasky's Stereoclub
– the handy way to buy, from Microdigital. Multiply your monthly payment to 24 to find out your credit limit. For instance, for the minimum monthly payment of £5 you would get credit up to £120. In some cases you may be able to get instant credit by paying a deposit of 10% of a purchase price. Current Stereoclub interest rate is 2.5% monthly – equivalent to an APR of **34.5%.** Rates may vary.
If you pay by Bankers' Order, apart from the extra convenience, you'll enjoy a LOWER INTEREST RATE – currently 2.2% monthly, equivalent to an APR of **29.8%.**
As a Stereoclub member we'll send you regular news and literature from Lasky's and Microdigital. Lasky's Stereoclub is probably the best thing that's happened to Microcomputers since the invention of the chip!

If you are unable to get to a Microdigital shop then you can buy your requirements from our Mail Order Department at:
Microdigital Limited, FREEPOST (No stamp required), Liverpool, L2 2AB
The Conditions of Business are the same as the shops except:
1. Allow one week for personal cheques to clear.
2. Add £1 p&p to orders under £10
3. Carriage free on orders over £10 within Mainland U.K. Overseas add 15%.

Telephone Orders
Just give your credit card number and requirements on our 24 hour 7 day Ansaphone Service: 051-236 0707 Mail Order Manageress – Lyn Major

Head Office
Accounts, administration and engineering are at:
Microdigital Limited, 14 Castle Street, Liverpool L2 0TA. Telephone 051-227 2535
General Manager: Bruce Everiss, Operations Manager: Graham Jones

6 Shops Nation Wide.....

JUST MOVED

LIVERPOOL MICRODIGITAL
33 Dale Street, Liverpool, L2 2HF. Tel: 051-236 2828
Manager: Tim Best. Between the Town Hall and Magistrates Courts. (within Lasky's).

BIRMINGHAM MICRODIGITAL
19/21 Corporation Street, Birmingham, B2 4LP. Tel: 021-632 6303.
Manager: Peter Stallard. 300 yards from Bullring Centre (within Lasky's).

EDINBURGH MICRODIGITAL
4 St. James Centre, Edinburgh, EH1 3SR. Tel: 031-556 2914.
Manager: Colin Draper. East end of Princes Street, St. James Centre (within Lasky's).

SHEFFIELD MICRODIGITAL
58 Leopold Street, Sheffield, S1 2GZ. Tel: 0742 750971.
Manager: Justin Rowles. Top of the Moor, opposite town hall (within Lasky's).

CHESTER MICRODIGITAL
The Forum, Northgate Street, Chester, CH1 2BZ. Tel: 0244 317667.
Manager: Jeremy Ashcroft. Next to the town hall (within Lasky's).

MANCHESTER MICRODIGITAL
12/14 St. Mary's Gate, Market Street, Manchester, M1 1PX. Tel: 061-832 6087.
Manager: Lesly Jacobs. Corner of Deansgate (within Lasky's).

Microdigital Mail Order Form

Office Use only	Goods required	Price	
-	1		
	2		
	3		
	4		
	5		
	6		
		Add £1 P & P to orders under £10	
		Total	

VAT in this ad has been calculated at the rate of 15% current at the time of writing. Please allow for any changes.

If you require a Stero Club application form tick this box ☐

MAIL TO: Microdigital Limited, Freepost, Liverpool L2 2AB

Name _____ Access 5224 ☐☐☐☐ ☐☐☐☐ ☐☐☐☐

Address _____ Barclaycard 4929 ☐☐☐☐ ☐☐☐☐ ☐☐☐☐

_____ Post Code _____ American Express/Diners Club/ Stereo Club No. .....

Tel (day) _____ Expiry date: PCW10/81

MICRODIGITAL
The Microcomputer Specialists

	NETT	V.A.T.	TOTAL
Bill Budge's Space Album	22.50	3.38	25.88
Trilogy of Games	17.50	2.63	20.13
● Olympic Decathlon	14.80	2.22	17.02
Hi-Res American Football	19.70	2.96	22.66
Autobahn	15.50	2.33	17.83
Orbitron	15.50	2.33	17.83
Phantoms Five	15.50	2.33	17.83
Pulsar II	15.50	2.33	17.83
Space Eggs	15.50	2.33	17.83
Tranquility Base	12.50	1.88	14.38
Flight Simulator	20.50	3.08	23.58
Galactic Revolution	14.00	2.10	16.10
Galactic Trader	14.00	2.10	16.10
Galactic Empire	14.00	2.10	16.10
Tawala's Last Redoubt	15.50	2.33	17.83
● The Prisoner	17.50	2.63	20.13
Operation Apocalypse	33.50	5.03	38.53
Warp Factor	21.00	3.15	24.15
● Gorgon	15.50	2.23	17.83
Apple Panic	17.50	2.63	20.13
Alien Typhoon	15.50	2.33	17.83
Sneakers	15.50	2.33	17.83
Raster Blaster	18.50	2.78	21.28

APPLE BOOKS

Apple II Reference Manual	10.00	–	10.00
6502 Hardware Manual	11.00	–	11.00
Apple II Basic Program Manual	3.00	–	3.00
Applesoft II Reference Manual	5.00	–	5.00
DOS 3.2 Manual	5.00	–	5.00
Apple II Basic Tutorial Manual	5.00	–	5.00
Fortran Reference Manual	14.00	–	14.00
Pascal Reference Manual (1.1)	11.00	–	11.00
Pascal Operating Manual	13.00	–	13.00
Graphics Tablet Manual	5.00	–	5.00
Silentype Manual	1.00	–	1.00
DOS 3.3 Manual	5.00	–	5.00
Pilot Language Reference Manual	10.00	–	10.00
Pilot Editors Manual	8.00	–	8.00
6502 Software Manual	11.00	–	11.00

HEWLETT PACKARD

HP 83 Computer	1340.00	201.00	1541.00
HP 85 Computer	1935.70	290.36	2226.06
16K Memory Module	175.70	26.36	202.06
ROM Drawer	26.80	4.02	30.82
Mass Storage ROM	86.36	12.95	99.31
Plotter/Printer ROM	86.36	12.95	99.31
Input/Output ROM	175.70	26.36	202.06
Matrix ROM	86.36	12.95	99.31
Assembler ROM	175.70	26.36	202.06
HP-IB Interface	235.26	35.29	270.55
Serial Interface Female	235.26	35.29	270.55
Serial Interface Male	235.26	35.29	270.55
Serial Interface No Connector	235.26	35.29	270.55
GP I/O Interface	294.82	44.22	339.04
B.C.D. Interface	294.82	44.22	339.04
Centronics Interface	175.70	26.36	202.06
HP-IB Cable ½M	41.51	6.23	47.74
HP-IB Cable 1M	41.51	6.23	47.74
HP-IB Cable 2M	44.48	6.67	51.15
HP-IB Cable 4M	50.41	7.56	57.97
Plotter	1435.70	215.36	1651.06
Personality Module	439.50	65.93	505.43
O'Head Transp. Kit	58.06	8.71	66.77
Digitising Sight	21.07	3.16	24.23

	NETT	V.A.T.	TOTAL
Plotter Carrying Case	140.64	21.10	161.74
100 Sheets English	4.21	.63	4.84
100 Sheets Metric	4.21	.63	4.84
50 Sheets Blank EF	1.81	.27	2.08
50 Sheets Blank A4	1.81	.27	2.08
4 Colour Pen PAC	3.82	.57	4.39
5 Red Pens	3.82	.57	4.39
5 Blue Pens	3.82	.57	4.39
5 Green Pens	3.82	.57	4.39
5 Black Pens	3.82	.57	4.39
100 Transp. Films	12.97	1.95	14.92
Tansp. Solvent	2.35	.35	2.70
Transp. Pens BRBG	5.00	.75	5.75
Transp. Pens BOBV	5.00	.75	5.75
Transp. Pens BRBG Wide	5.00	.75	5.75
Transp. Pens BOBV Wide	5.00	.75	5.75
● Printer HP 82905A	597.00	89.55	686.55
Printer HP 2631B	2314.70	347.21	2661.91
Printer Stand	169.94	25.49	195.43
Paper Rack	31.06	4.66	35.72
Sound Cover	61.53	9.23	70.76
Wire Paper Basket	31.06	4.66	35.72
Printer Ribbon (Pack of 3)	36.92	5.54	42.46
Tape Cartridge (Pack of 5)	55.67	8.35	64.02
Thermal Paper Blue (Box 2)	18.06	2.71	20.77
Thermal Paper Black (Box 6)	54.17	8.13	62.30
Cartridge Manual Holder	6.02	.90	6.92
HP 83/85 Carrying Case	72.23	10.83	83.06
3 Ring System Binder	6.02	.90	6.92
Dust Cover	9.03	1.35	10.38
Owners Manual HP 83/85	15.05	–	15.05
Pocket Guide	3.01	–	3.01
Mass Storage ROM Manual	6.02	–	6.02
Plotter Printer ROM Manual	6.02	–	6.02
I/O ROM Manual	18.05	–	18.05
Matrix ROM Manual	6.02	–	6.02
Assembler ROM Manual	12.04	–	12.04
Flexible Disk Operating Manual	6.02	–	6.02
HP-IB Manual	6.02	–	6.02
Serial Installation Manual	6.02	–	6.02
GP-I/O Manual	6.02	–	6.02
BCD Manual	6.02	–	6.02
Centronics Manual	6.02	–	6.02
Standard PAC	56.58	8.49	65.07
Basic Training	56.58	8.49	65.07
General Statistics	56.58	8.49	65.07
Finance	56.58	8.49	65.07
Maths	56.58	8.49	65.07
Circuit Analysis	56.58	8.49	65.07
Games	56.58	8.49	65.07
Linear Programming	56.58	8.49	65.07
Text Editing	56.58	8.49	65.07
Wave Form Analysis	56.58	8.49	65.07
Basic Stat and Data	56.58	8.49	65.07
Regression Analysis	56.58	8.49	65.07
Graphics Presentation	119.12	17.87	136.99
Visicalc Plus	119.12	17.87	136.99
Information Management	119.12	17.87	136.99
Surveying	119.12	17.87	136.99
Dual Master 5¼" (540K)	1489.00	223.35	1712.35
Dual Add on 5¼" (540K)	1310.32	196.55	1506.87
Single Master 5¼" (270K)	893.40	134.01	1027.41
Single Add on 5¼" (270K)	774.28	116.14	890.42
Dual Master 8" (2400K)	4002.33	600.35	4602.68
Dual Add on 8" (2400K)	3387.03	508.05	3895.08
Single Master 8" (1200K)	2924.14	438.62	3362.76
Single Add on 8" (1200K)	2308.84	346.33	2655.17
Flexible Disk 5¼" (Pack 10)	43.30	6.50	49.80
Flexible Disk 8" (Pack 10)	61.53	9.23	70.76
Graphics Tablet	1201.30	180.20	1381.50

★ **Send for free 24 page book brochure**

CRA

MICRODIGITAL

The Microcomputer Specialists

SHARP ★ Two year guarantee

	NETT	V.A.T.	TOTAL
● PC1211 Computer	80.00	12.00	92.00
CE121 Cassette Interface	11.00	1.65	12.65
CE122 Printer Interface	60.00	9.00	69.00
CSR 700 Paper Rolls (40)	5.00	.75	5.75
EA 800R Ink Ribbons	1.80	.27	2.07
● MZ80K Computer 20K	395.00	59.25	454.25
● MZ80K Computer 48K	410.00	61.50	471.50
MZ80 I/O Expansion Interface	96.00	14.40	110.40
MZ80 F.D. Dual Disks	560.00	84.00	644.00
MZ80 F I/O Disk Interface	52.00	7.80	59.80
MZ80 FMD Master Disk and Manual	20.00	3.00	23.00
MZ80 F15 Disk Cable	8.00	1.20	9.20
MZ80 FOS Extra Disk Cable	7.00	1.05	8.05
MZ80 P3 Dot Matrix Printer	365.00	54.75	419.75
MZ80 T20C Machine Language	18.00	2.70	20.70
MZ80 TU Assembler	36.00	5.40	41.40
● MZ80 T40E Pascal	40.00	6.00	46.00
MZ80 I/O-1 Universal Interface Card	40.00	6.00	46.00
● MZ80B Computer 64K	1020.00	153.00	1173.00
MZ80 FI Disk Interface	94.00	14.10	108.10
MZ80 MDB Master Disk and Manual	30.00	4.50	34.50
MZ80 BJC Disk Cable Jointer	15.00	2.25	17.25
MZ80 EU Expansion Interface	47.00	7.05	54.05
MZ80 P5 Dot Matrix Printer	387.00	58.05	445.05
MZ80 GMK Graphics Option	112.00	16.80	128.80
MZ80 I/O-2 Universal Interface Card	40.00	6.00	46.00
MZ80 T10C K→B Converter	7.00	1.05	8.05
PC 3201 Computer 64K	1300.00	195.00	1495.00
CE 320C 80 x 25 Monitor	220.00	33.00	253.00
CE 332P Dot Matrix Printer	390.00	58.50	448.50
CE 331M Dual Disks	585.00	87.75	672.75
CE 341M Disk Interface	110.00	16.50	126.50
● Total System	2605.00	390.75	2995.75
CE 350L Extra Disk Cable	30.00	4.50	34.50
CE 330G Direct Generator	105.00	15.75	120.75
CE 332A Extra 48K RAM	130.00	19.50	149.50
CE 340R RS232 Interface	130.00	19.50	149.00
CE 340G GP I/O Card	130.00	19.50	149.50
CE 350R Printer Ribbon	8.00	1.20	9.20
Sharp Cassette Software			
Towering Inferno	5.85	.88	6.73
Block Kuzushai	5.85	.88	6.73
Head-On	5.85	.88	6.73
Asteroids	5.85	.88	6.73
Escape from Colditz	8.45	1.27	9.72

ATARI

400 16K Computer	300.00	45.00	345.00
800 16K Computer	560.87	84.13	645.00
410 Tape Recorder	43.48	6.52	50.00
810 Disk Drive	300.00	45.00	345.00
822 Thermal Printer	230.43	34.57	265.00
825 80 Column Printer	478.26	71.74	550.00
850 RS232 Interface	117.39	17.61	135.00
16K RAM Upgrade	56.52	8.48	65.00
Light Pen	39.13	5.87	45.00
Pair Paddles	10.43	1.57	12.00
Pair Joysticks	10.43	1.57	12.00
I/O Cable	8.26	1.24	9.50
Printer Cable	24.78	3.72	28.50
Interface Cable	20.43	3.07	23.50
RS 232 Cable	20.43	3.07	23.50
Monitor Cable	20.43	3.07	23.50
Thermal Paper	3.48	.52	4.00
Master Disk	13.91	2.09	16.00
5 Blank Disks	13.91	2.09	16.00
Word Processor	73.91	11.09	85.00

	NETT	V.A.T.	TOTAL
Inv. Prog. 1	10.39	1.56	11.95
Conversational French	28.26	4.24	32.50
Conversational German	28.26	4.24	32.50
Conversational Spanish	28.26	4.24	32.50
Conversational Italian	28.26	4.24	32.50
Music Composer ROM	28.26	4.24	32.50
Touchtype	13.00	1.95	14.95
Calc/Tor	14.74	2.21	16.95
Graphit	10.39	1.56	11.95
Statistics	10.39	1.56	11.95
Eng. Czar	7.78	1.17	8.95
Hangman	7.78	1.17	8.95
Kingdom	7.78	1.17	8.95
States and Capitals	7.78	1.17	8.95
States Europe	7.78	1.17	8.95
Scram	11.26	1.69	12.95
Telelink ROM	13.00	1.95	14.95
Asteroids ROM	26.04	3.91	29.95
Bask/Ball ROM	21.30	3.20	24.50
Blackjack	7.78	1.17	8.95
Chess ROM	21.30	3.20	24.50
Miss. Comd ROM	26.04	3.91	29.95
Space Inv. ROM	21.30	3.20	24.50
Space Inv.	11.26	1.69	12.95
Star Raiders ROM	26.04	3.91	29.95
Super Breakout ROM	21.30	3.20	24.50
Assembler Editor ROM	30.00	4.50	34.50
Pilot ROM	43.04	6.46	49.50
Microsoft Basic	43.04	6.46	49.50
Technical Notes	14.74	–	14.74
Operating System Lists	9.52	–	9.52
DOS Lists	2.61	–	2.61
DOS 2 Manual	6.04	–	6.04

VIDEO GENIE

Video Genie Computer	279.00	41.85	320.85
EG3013 Expander	185.00	27.75	212.75
EG3013 Expander + RS232	215.00	32.25	247.25
32K Memory Board S100	105.00	15.75	120.75
Single Disk Drive	215.00	32.25	247.25
Dual Disk Drive (40 Track)	410.00	61.50	471.50
2 Drive Cable	17.00	2.55	19.55
4 Drive Cable	32.00	4.80	36.80
Printer Cable	17.00	2.55	19.55
Parallel Interface EG3016	33.00	4.95	37.95
Sound Kit	10.00	1.50	11.50
Fitting Above	5.00	.75	5.75
Lower Case Kit	33.00	4.95	37.95
Fitting Above	5.00	.75	5.75
Keyboard Update Kit	3.00	.45	3.45
RS232 Interface	52.00	7.80	59.80
Cassette Sofware for Video Genie			
Space Invaders	13.00	1.95	14.95
Asteroids	8.75	1.31	10.06
Golden Baton	8.75	1.31	10.06
Zost in Space	8.75	1.31	10.06
Space Eye	8.75	1.31	10.06

PRINTERS

Epson

MX80 T Newtype 2	415.00	62.26	477.25
MX80 FT/1	399.00	59.85	485.85
● MX80 FT Newtype 2	465.00	69.75	534.75
MX82	389.00	58.35	447.35
MX100	575.00	86.25	661.25
● MX130	Ring for Latest Price!		

MICRODIGITAL (CRA)
The Microcomputer Specialists

★ **Send for free 24 page book brochure**

THE SHARP MZ-80K HAS GOT IT ALL

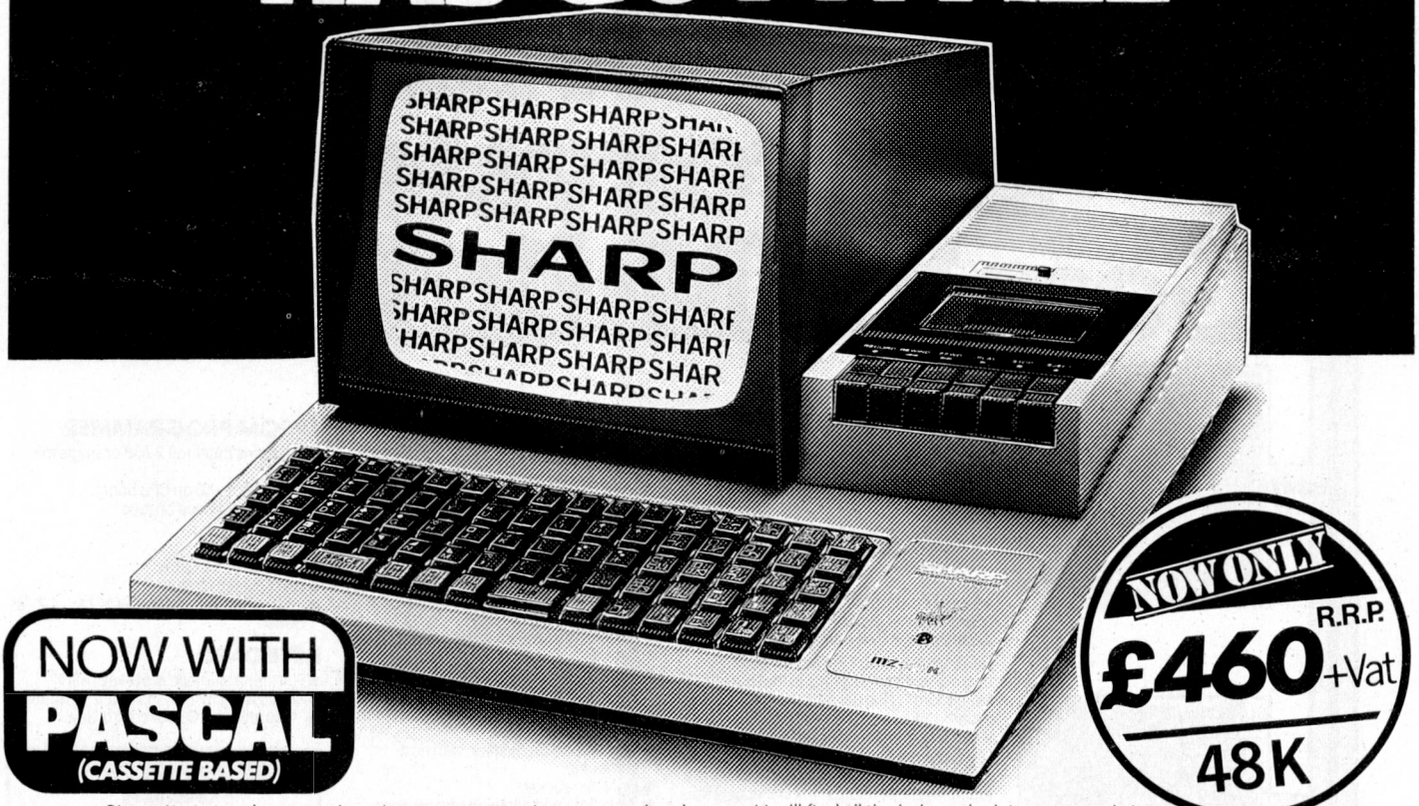

NOW WITH
PASCAL
(CASSETTE BASED)

Since its introduction the Sharp MZ-80K has proved to be one of the most successful and versatile microcomputer systems around. Sharp now have a comprehensive range of products ready to make the powerful MZ-80K with its Printer and Disc Drives even more adaptable.

Products include:- Universal Interface Card, Machine Language and Z-80 Assembler packages, CP/M* plus a comprehensive range of software.

*Trade mark of Digital Research Ltd.

You'll find all the help and advice you need about the MZ-80K at your Specialist Sharp Dealer in the list below.

If there is no dealer in your area, or if you require any further information write to:- Computer Division, Sharp Electronics (UK) Ltd., Sharp House, Thorp Road, Newton Heath, Manchester M10 9BE.

SHARP
First, and foremost

GET IT ALL HERE...

AVON
BCG Shop Equipment Ltd
Bristol, Tel: 0272 425338
Decimal Business M/Cs Ltd
Bristol, Tel: 0272 294591
BEDFORDSHIRE
H.B. Computers (Luton) Ltd
Luton, Tel: 0582 416887
BERKSHIRE
Newbear Computing Store Ltd
Newbury, Tel: 0635 30505
BIRMINGHAM
Camden Electronics
Small Heath, Tel: 021-773 8240
E.B.S. Ltd
Birmingham, 1, Tel: 021-233 3045
Electronic Business Systems Ltd
Birmingham, Tel: 021-384 2513
Jax Rest Ltd
Birmingham, Tel: 021-328 4908
Newbear Computing Store Ltd
Birmingham B26, Tel: 021-707 7170
BUCKINGHAMSHIRE
Interface Components Ltd
Amersham, Tel: 02403 22307
CHESHIRE
Charlesworth of Crewe Ltd
Crewe, Tel: 0270 56342
Cash Register Services
Chester, Tel: 0244 317549
Chandos Products
New Mills, Tel: New Mills 44344
Cheshire Computer Services Ltd
Levenshulme, Tel: 061-225 4763
Fletcher Worthington Ltd
Hale, Tel: 061-928 8928
Newbear Computing Store Ltd
Stockport, Tel: 061-491 2290
Ors Group Ltd
Warrington, Tel: 0925 67411

CLEVELAND
Hunting Computer Services Ltd
Stockton-on-Tees, Tel: 0642 769709
DERBYSHIRE
Lowe Electronics Ltd
Matlock, Tel: 0629 2817
DEVON
Crystal Electronics Ltd
Torquay, Tel: 0803 22699
Plymouth Computers
Plymouth. Tel: 0752 23042
EXETER
Peter Scott (Exeter) Ltd
Exeter, Tel: 0392 73309
DORSET
South Coast Business M/Cs
Ferndown, Tel: 0202 893040
ESSEX
Prorole Ltd
Westcliff-on-Sea, Tel: 0702 335298
GLOUCESTERSHIRE
Gloucestershire Shop Equipment Ltd
Gloucester, Tel: 0452 36012
HAMPSHIRE
Advanced Business Concepts
New Milton, Tel: 0425 618181
Xitan Systems Ltd
Southampton, Tel: 0703 39890
KENT
Video services (Bromley) Ltd
Bromley, Tel: 01-460 8833
LANCASHIRE
H. R. Control Systems Ltd
Chorley, Tel: 02572 75234
Sound Service
Burnley, Tel: 0282 38481
Sumita Electronics Ltd
Preston, Tel: 0772 51686
The Micro Chip Shop
Blackpool, Tel: 0253 403122

LEICESTERSHIRE
Gilbert Computers
Lubenham, Tel: 0858 65894
G.W. Cowling Ltd
Leicester, Tel: 0533 556268
Leicester Computer Centre
Leicester, Tel: 0533 556268
Mayes Hi Fi
Leicestershire, Tel: Leics. 22213
LINCOLNSHIRE
Howes Elect. & Autom. Servs.
Lincoln, Tel: Lincoln 32379
Z. R. Business Consultants
Lincoln, Tel: 0522 680087
LONDON
Bridgewater Accounting
Whetstone, Tel: 01-446 0320
Butel-Comco Ltd
Hendon, Tel: 01-202 0262
Central Calculators Ltd
London EC2, Tel: 01-729 5588
Digital Design & Development
London W1, Tel: 01-387 7388
Euro-Calc Ltd
London WC1, Tel: 01-405 3223
Euro-Calc Ltd
London EC2, Tel: 01-729 4555
Euro-Calc Ltd
London W1, Tel: 01-636 5560
Lion Computer Shops Ltd
London W1, Tel: 01-637 1601
Personal Computers Ltd
London EC2, Tel: 01-626 8121
Scope Ltd
London EC2, Tel: 01-729 3035
Sumlock Bondain Ltd
London EC1, Tel: 01-253 2447

MANCHESTER
Sumlock Electronic Services Ltd
Manchester M3, Tel: 061-834 4233
Sumlock Software Ltd
Manchester M3,
Tel: 061-228 3502
MERSEYSIDE
Microdigital Ltd
Liverpool, Tel: 051-227 2535
Sota Communication Systems
Liverpool L14, Tel: 051-480 5770
NORFOLK
Sumlock Bondain (East Anglia)
Norwich, Tel: 0603 26259
NORTHAMPTONSHIRE
Computer Supermarket
Corby, Tel: 05366 62571
H.B. Computers Ltd
Kettering, Northamptonshire,
Tel: 0536 520910
NORTHERN IRELAND
Bromac (U.K.)
Co. Antrim, Tel: 023831 3394
O & M Systems
Belfast, Tel: 0232 49440
The Microcomputer Centre (N.1.)
Belfast, Tel: Belfast 682277
NOTTINGHAMSHIRE
Mansfield Business M/C Ltd
Mansfield, Tel: 0623 26610
OXFORDSHIRE
Oxford Computer Centre
Oxford, Tel: 0865 45172
or 0865 49349
REPUBLIC OF IRELAND
O'Connor Computers Ltd
Galway, Tel: 0009 61173
Tomorrows World Ltd
Dublin 2, Tel: 0001 776861

SALOP
Computer Corner
Shrewsbury, Tel: 0743 59788
SCOTLAND
A & G Knight
Aberdeen, Tel: 0224 630526
Business and Electronics M/Cs
Edinburgh, Tel: 031-226 5454
Micro Centre
Edinburgh, Tel: 031-556 7354
Microforth
Dunfermline, Tel: 0383 34954
Moray Instruments Ltd
Elgin, Tel: 0343 3747
Pointer Business Equipt Ltd
Glasgow, Tel: 041-332 3621
Tyseal Computers Ltd
Aberdeen, Tel: 0224 573111
SOMERSET
Norsett Office Supplies Ltd
Cheddar, Tel: 0934 742184
SOUTH HUMBERSIDE
Silicon Chip Centre
Grimsby, Tel: 0472 45353
STAFFORDSHIRE
W. B. Computer Services
Cannock, Tel: 0543 75555
SUFFOLK
C. J. R. Microtek Co. Ltd
Ipswich, Tel: 0473 50152
SURREY
R.M.B. Ltd
Croydon, Tel: 01-684 1134
Saradan Electronic Services
Wallington, Tel: 01-669 9483
T & V Johnson (Microcomputers)
Camberley, Tel: 0276 20446

SUSSEX
Gamer
Brighton, Tel: 0273 698424
Jax Rest Ltd
Brighton, Tel: 0273 687667
M & H Office Equipment
Brighton, Tel: 0273 697231
Oval Automation
Worthing, Tel: 0903 501355
WALES
Limrose Electronics Ltd
Wrexham, Tel: 097 883 5555
Morriston Computer Centre
Swansea, Tel: 0792 795817
Sigma Systems Ltd
Cardiff, Tel: 0222 21515
WARWICKSHIRE
Business & Leisure Microcomputers
Kenilworth, Tel: 0926 512127
WORCESTERSHIRE
Capricorn Computer Systems
Worcester, Tel: 0905 21541
YORKSHIRE
Bits & P.C.'s
Wetherby, Tel: 0937 63744
Datron Micro-Centre Ltd
Sheffield, Tel: 0742 585490
Huddersfield Computer Centre
Huddersfield, Tel: 0484 20774
Superior Systems Ltd
Sheffield, Tel: 0742 755005
Ram Computer Services Ltd
Bradford, Tel: 0274 391166

MicroValue

New British Microsystem. Gemini MultiBoard





● Eight boards available NOW ● 8" x 8" board modules ● Z80A CPU board ● Z80A Video board ● 64K RAM ● Built and tested

Developed by one of the most experienced micro board design teams in the UK, Gemini MultiBoard* is the ultimate modular board system. Unlike most systems of its kind, virtually nothing is made redundant when you expand it. And for those who want expansion this can be immediate, for we are launching eight boards simultaneously. No other system has offered so much so soon.

All MultiBoard modules are Nasbus† and Gemini 80-BUS* compatible and can be used in a wide spectrum of application, e.g. educational, personal, business, system development and process/production control.

MultiBoard modules are built and tested to the highest standards. And offer enormous computing power and potential at astonishingly low cost.





MultiBoard Modules available now

Z80A CPU

Processor: Z80A CPU at 4MHz. Optional wait-states. Reset jump to any 4K boundary.

Parallel I/O: 8 bit ASCII keyboard socket. Uncommitted Z80A PIO giving two 8 bit bi-directional ports with handshake.

Serial I/O: 8250 UART with programmable baud rates and software selectable between RS232 or 1200 baud CUTS cassette interfaces.

Memory: 4 'Bytewyde' sockets to accept EPROM/ROM/RAM. Memory switched in/out of memory map under software control.





Software: Comprehensive monitor. Optional 12K Microsoft BASIC (ROM). Standard configuration PROM provides decodes for 4 x 2732 (4K x 8) EPROMs.

The CPU Board is fully buffered to the Gemini 80-BUS standard.

INTELLIGENT VIDEO

- Z80A microprocessor controlled.
- 80 x 25 display controlled by 6845 CRTC chip.
- Adjustable dot clock for alternative screen formats.
- Character set: 128 in EPROM + 128 in RAM which can be defined as the video inverse of the main set or as block graphics with 160 x 75 resolution.
- I/O port communication with host computer.
- Light pen socket.
- 8-bit input port allowing several video boards (each with its own keyboard) to be connected to a single CPU board.

FLOPPY DISK CONTROLLER

- Controls: Pertec FD250 5.25in 48 TPI, Micropolis 1015 5.25in 96 TPI, Pertec FD650 8in.
- Controls up to 4 drives of same type.
- Single/double density software selectable.
- Single or double sided.
- Western Digital FD1797 controller.
- Up to 8 drives (2 boards) can be used in the same system.

64K RAM

- Runs at 4MHz with no wait-states.
- 4 banks of 16K dynamic RAM, each bank locatable on any 4K address boundary.
- Page Mode supplied as standard allowing up to 4 memory boards to be addressed.
- All the memory can be used by switching out on-board CPU memory, e.g. in disk environment.

EPROM/ROM BOARD

- Accepts up to 40K of firmware.
- 4 banks of 4 sockets.
- Banks can be mixed between 2708 or 2716.
- 24-pin ROM socket.
- Wait-state generator.
- Supports Page Mode scheme.





EPROM PROGRAMMER

- Programs multi-rail 2708 or single rail 2716.
- Connects to PIO on CPU board.
- Software provided on tape.

3A PSU

- Supplies 4/5 boards.
- LED on each output.
- +5V at 3A; +12 at 1A; −5V at 1A; −12V at 80mA.

KEYBOARD

- Full alpha-numeric ● 59-keys ASCII encoded ● Exclusively designed for Gemini
- Auto repeat ● Cursor control keys

MULTIBOARD PRICES

(excl VAT)

(All built and tested except where marked)

CPU (G811)	**£125.00**
Video (G812)	**£140.00**
64K RAM (G802)	**£140.00**
FDC (G809)	**£140.00**
EPROM/ROM (G803)	**£ 70.00**
EPROM PROG. (G808) Kit	**£ 29.50**
3A PSU (G807)	**£ 40.00**
Keyboard (G613)	**£ 57.50**

FLOPPY DISK UNIT

Gemini unit suitable for MultiBoard. Holds one or two 5¼in double sided, double density Pertec drives. Intergral power supply. Price £375 plus VAT for one drive, £575 plus VAT for two drives. CP/M2.2 and documentation £90 plus VAT.

KENILWORTH CASE for MultiBoard	**£49.50 + VAT**
5-Card Support Kit	**£19.50 + VAT**
VERO Frame (also suitable for Nascom)	**£32.50 + VAT**
PSU Enclosure Kit	**£24.50 + VAT**

KEYBOARD enclosures available soon.

MultiBoard Modules are available from the MicroValue dealers listed on facing page.

*Trademarks of Gemini Microcomputers Limited
†Trademarks of Nascom Microcomputers Division of Lucas Logic
††Trademarks of Digital Research Inc.

MicroValue

COMPATIBLE

Nasbus products from your MicroValue Dealers

GEMINI G805 FLOPPY DISK SYSTEM FOR NASCOM-1 & 2

It's here at last. A floppy disk system and CP/M

CP/M SYSTEM. The disk unit comes fully assembled complete with one or two 5¼" drives (FD250 double sided, single density) giving 160K per drive, controller card, power supply, interconnects from Nascom-1 or 2 to the FDC card and a second interconnect from the FDC card to two drives, CP/M 1.4 on diskette plus manual, a BIOS EPROM and a new N2MD PROM. All in a stylish enclosure.

Single drive system ..... **£450 + VAT**
Double drive system ..... **£640 + VAT**
Additional FD250 drives ..... **£205 + VAT**

D-DOS SYSTEM. The disk unit is also available without CP/M to enable existing Nas-Sys software to be used. Simple read, write routines are supplied in EPROM. The unit plugs straight into the Nascom PIO. Single drive system **£395 + VAT**

DCS-DOS A greatly enhanced version of D-DOS, running under Nas-Sys. Gives named files in BASIC, ZEAP, NAS-PEN and machine code programs ..... **£50 + VAT**

DISKPEN

The powerful text editor written for the Nascom is now available on a 5¼ inch floppy disk with a number of new features. **Price £43.25 + VAT.**

NASCOM COMPUTERS

NASCOM-2 Microcomputer Kit
£225 + VAT
NASCOM-1 Microcomputer Kit
£125 + VAT
Built and tested **£140 + VAT**

16K RAM KIT ..... £100 + VAT
3A PSU KIT ..... £32.50 + VAT

KENILWORTH CASE FOR NASCOM-2

The Kenilworth case is a professional case designed specifically for the Nascom-2 and up to four additional 8" x 8" cards. It has hardwood side panels and a plastic coated steel base and cover. A fully cut back panel will accept a fan, UHF and video connectors and up to 8 D-type connectors. The basic case accepts the N2 board, PSU and keyboard. Optional support kits are available for 2 and 5 card expansion.

Kenilworth case ..... **£49.50 + VAT**
2-card support kit ..... **£7.50 + VAT**
5-card support kit ..... **£19.50 + VAT**

CASSETTE ENHANCING UNIT

The Castle interface is a built and tested add-on unit which lifts the Nascom-2 into the class of the fully professional computer. It mutes spurious output from cassette recorder switching, adds motor control facilities, automatically switches output between cassette and printer, simplifies 2400 baud cassette operating and provides true RS232 handshake.

Castle Interface Unit ..... **£17.50 + VAT**

A NASCOM-2 BASED SYSTEM FOR LESS THAN £1500 + VAT

The proven Nascom-2 microcomputer can now be bought as a complete system from under £1500 + VAT. For this price you get the Nascom-2 kit, 16K RAM board kit, Kenilworth case with 2 card frame, Centronics 737 printer—10 inch monitor, and the Gemini Dual Drive Floppy Disk System. The CPU and RAM boards are also available built – the additional cost is available on application.



A-D CONVERTER

For really interesting and useful interactions with the 'outside world' the Milham analogue to digital converter is a must. This 8-bit converter is multiplexed between four channels – all software selectable. Sampling rate is 4KHz. Sensitivity is adjustable. Typical applications include temperature measurement, voice analysis, joystick tracking and voltage measurement. It is supplied built and tested with extensive software and easy connection to the Nascom PIO.

Milham A-D Converter (built and tested) ..... **£49.50 + VAT**

PROGRAMMER'S AID

For Nascom ROM BASIC running under Nas-Sys. Supplied in 2 x 2708 EPROMs. Features include: auto line numbering; intelligent renumbering; program appending; line deletion; hexadecimal conversion; recompression of reserved words; auto repeat; and printer handshake routines. When ordering please state whether this is to used with Nas-Sys 1 or 3. **Price £28 + VAT.**

GEMINI 'SUPERMUM'

12 x 8 piggy-back board for Nascom-1 offering five-slot motherboard, quality 5A power supply and reliable buffering with reset jump facility. **Kit Price £85 + VAT.**

CENTRONICS 737 MICRO PRINTER

A high performance, low price, dot-matrix printer that runs at 80cps (proportional) and 50cps (monospaced). This new printer gives text processing quality print. And can print subscripts and superscripts. It has 3-way paper handling and parallel interface as standard. Serial interface is optional. **Price £375 + VAT.** Fanfold paper (2000 sheets) **£18 + VAT.**

BITS & PC's PCG

5 x 4 board which plugs straight into Nascom-2. Operates on cell structure of 128 dots, producing 64 different cells. Once defined, each cell may be placed anywhere, any number of times on screen simultaneously. Max screen capacity: 768 cells. Dot resolution: 384 x 256 98304. Many other features including intermixing of alpha-numeric characters and pixels. **Price (kit) £60 + VAT.**

PORT PROBE

Allows monitoring of input and output of Nascom PIO. This board can generate interrupts and simulate handshake control. **Price (kit) £17.50 + VAT.**

All prices are correct at time of going to press and are effective 1st July 1981.

HEX & CONTROL KEYPADS

Hexadecimal scratchpad keyboard kit for N1/2; **Price £34 + VAT.**

As above but including (on the same board) a control keypad kit to add N2 control keys to N1. **Price £40.50 + VAT.**

BASIC PROGRAMMER'S AID

Supplied on tape for N1/2 running Nas-Sys and Nascom ROM BASIC. Features include auto line number, full cross-reference listing, delete lines, find, compacting command, plus a comprehensive line re-numbering facility. **Price £13 + VAT.**

'SCREENPLUS'

Screenplus enables a programmer to blank or display in reverse video, selected words, letters or areas of the screen under program control. Suitable for use with either Nascom 1 or 2. 'Screenplus' (built and tested) .... **£40.00 + VAT.**

DUAL MONITOR BOARD

A piggy-back board that allows N1 users to switch rapidly between two separate operating systems. **Price (kit) £6.50 + VAT.**

YOUR LOCAL MICROVALUE DEALER

All the products on these two pages are available while stocks last from the MicroValue dealers listed below.
(Mail order enquiries should telephone for delivery dates and post and packing costs.) Access and Barclaycard welcome.

BARCLAYCARD VISA

BITS & PC'S
4 Westgate, Wetherby, W. Yorks.
Tel: (0937) 63774.

BUSINESS & LEISURE MICROCOMPUTERS
16 The Square, Kenilworth, Warks.
Tel: (0926) 512127.

ELECTROVALUE LTD.
680 Burnage Lane, Burnage, Manchester M19 1NA.
Tel: (061) 432 4945.

28 St Judes, Englefield Green, Egham, Surrey TW20 0HB.
Tel: (0784) 33603. Tlx: 264475.

TARGET ELECTRONICS
16 Cherry Lane, Bristol BS1 3NG.
Tel: (0272) 421196.

INTERFACE COMPONENTS LTD.
Oakfield Corner, Sycamore Road, Amersham, Bucks.
Tel: (02403) 22307. Tlx: 837788.

HENRY'S RADIO
404 Edgware Road, London W2.
Tel: (01) 402 6822.
Tlx: 262284 (quote ref: 1400).

5¼" WINCHESTER

Available NOW!
The long-awaited 5Mb and 10Mb mini-Winchester drives are available now from Hotel Microsystems. The greatly improved speed and storage capacity made available by the mini-Winchesters now make realistic many applications, especially business and multi-user systems, for which floppy drives were too small, too unreliable or too slow.

XCOMP S100 controller
The XCOMP ST/S Winchester controller is a custom-designed microprogrammable controller which consists of two S100 bus printed circuit boards. The ST/S controller is compatible with the 5 and 10Mb disk drives. These drives are formatted with 32 256byte sectors per track. With four heads and 153 cylinders the drives provide a formatted capacity of 5.0 megabytes.

Software: HMSOS or CP/M
Users have a choice of software; either the high-performance HMSOS single/multi-user operating system or CP/M.

Complete upgrade for Horizon
An upgrade kit for existing North Star Horizon owners contains all the hardware required – three S100 cards and the drive itself. Fitting to the Horizon is straightforward – no soldering is required and the Winchester is held by the same screws as the floppy drive it replaces.

HMS S100 power card
The mini-Winchester drives require higher supply currents than floppy drives. We have had an S100 card designed which provides the necessary supplies to connect to the Winchester.

69 Loudon Road London NW8 0DQ Telephone 01-328 8737/8 Telex 266828 H M S-G

Hotel MicroSystems Ltd

Team 4

VIDEO GENIE/TRS-80 level II.

GP3001 LUNAR LANDER/3D MAZE/DOMINOES – tackle these three 'classic' programs on your micro. Hours of enjoyment/ frustration guaranteed **£7.95**

UP301 XBAS
Add eleven new commands in Video Genie/TRS-80 level II non-disc BASIC. Commands include:

KILL – inverts all graphics on screen.
PUT – slows speed of screen listing.
RSET – toggles keyboard and speeds up execution of program.

and eight other commands + BREAKOUT program to demonstrate the commands **£7.95**

ZX81
NEW ROM
ZX80

Your ZX80 programs are no longer redundant!

UP101 ZX80-ZX81/NEWROM ZX80 CONVERTER.
This program will allow you to load ZX80 (old ROM) programs onto ZX81/new ROM ZX80. Full instructions are included **£7.95**

UP10Z DATA-BAS – allows you to write data to and read data from cassette – up to 14K of data. + REMKILL – removes all unwanted REM statements **£4.95**

GP101 TREK '81 – exciting new version of the classic Star Trek game with full display and computer-assisted attacks **£7.95**

GP1002 BATTLECHESS (New) – 2-player version of Star Chess with full screen graphics **£5.95**

ACORN ATOM

UP201 SHAPEMAKER/SCREEN-SWAP – allows you to draw shapes of your choice and store them for graphics use in your programs. Demo program also included. 2K RAM needed **£7.95**

GP2001 INVADERS/HEDGEHOG
'fast' version of the old favourite 'Invaders' plus the totally new game of Hedgehog. Both games are highly addictive. 12K RAM needed **£6.95**

NEW **ATARI**

GP4001 MICROMAZE – a 3D labyrinth to test your frustration limits. Escape if you can! For 16K RAM **£4.95**

All programs supplied on high quality microcomputer approved cassettes. Orders to:

TEAM 4
12 TAUNTON HOUSE
REDCAR ROAD
HAROLD HILL
ROMFORD ESSEX



THE AM SPEECH BOARD

Make your inputs and many of your outputs audible as well as visible. Hearing the question and answer will speed up your acceptance and enhance your usage. With words as well as display the use of any computer system is greatly expanded.

The initial ROM set will be expanded and future ROMs will add to your direct library. Your own expansion using the fragmented sections of the words provided to create new words will be as complex as you wish.

The speech is generated by a National Digitalker chip together with two 64 K ROMs. The first ROM set gives you a vocabulary of 256 words and sub-sounds.

The on-board power amplifier and 2½" speaker will give you immediate speech from your software instructions. The instructions are simple and



demand no extensive re-write or patching, in fact, speech is as easy as display.

A socket is provided to allow external use of a tape recorder or for the use of external speakers.

The product is supplied in a custom built case which incorporates the speech board, interface board and its own power supply. A plug to the mains and a simple connection to your computer and you can start discussion.

£120 + £2.99 p&p + Vat
(Nascom + Apple Boards only
£85 + £2.99 p&P + VAT

Both products are boxed with their own power supply.

So far compatable with Pet, Apple, Tandy, Video Genie, Nascom, UK 101, Gemini & RS232*

* these are trade names

& AM LIGHT PEN

At last a true light pen in the UK at a low cost! Its interactive flexibility and simplicity of use allows even the totally untrained user to liase with the computer.

The uses are as varied as the applications however some of the more obvious areas could be: answer selection, editing, menu selection, identification of block or specific areas, movement of displayed data blocks and X Y plotting. The ramification of uses in these areas alone are tremendous.

All applications depend on software and the light pen is supplied with straight forward operational software which is easily interfaced into your own programs.

The pen uses a high speed photo diode which works directly with the normally illuminated pixcels. The outputs it provides are debounced microswitch and



gated strobe. The pen's speed is typically 500nS.

The pen itself is professionally presented in anodised aluminium and is supplied with an interface board for your computer and a power supply, both of which are housed in our custom designed case.

£80.00 + £2.99 p&P + VAT
Arfon Microelectronics Ltd.,
Cibyn Industrial Estate,
Caernarfon, Gwynedd, Wales
— Telephone: (0286) 5005. —
Reg. No 1553140

AM AM AM

to: Arfon Microelectronics Ltd., Cibyn Industrial Estate, Caernarfon, Gwynedd, Wales — Telephone: (0286) 5005. —

Please send me the following:

☐ AM Light Pen & Interface — £95.44 (inc p&P + VAT)
☐ AM Speech Board Nas & Apple — £101.19 (inc p&P + VAT)
☐ AM Speech Board Interface £141.44 (inc p&p + VAT)

(Sales also by 'phone with Access and Barclaycard)

I enclose Cheque/P.O. for £.....or

Please debit my Access/Barclaycard No.....

Signature .....

Name .....

Address .....

.....

.....

Existing Computer System .....

Type of user: ☐Home ☐Commercial ☐Industrial ☐Educational

Cheques, P.O. Access & Barclaycard are not banked more than seven days before despatch — All goods are carefully packed and sent within 21 days of receipt. Reg. No 1553140

ICHIBAN

NUMBER ONE IN JAPANESE

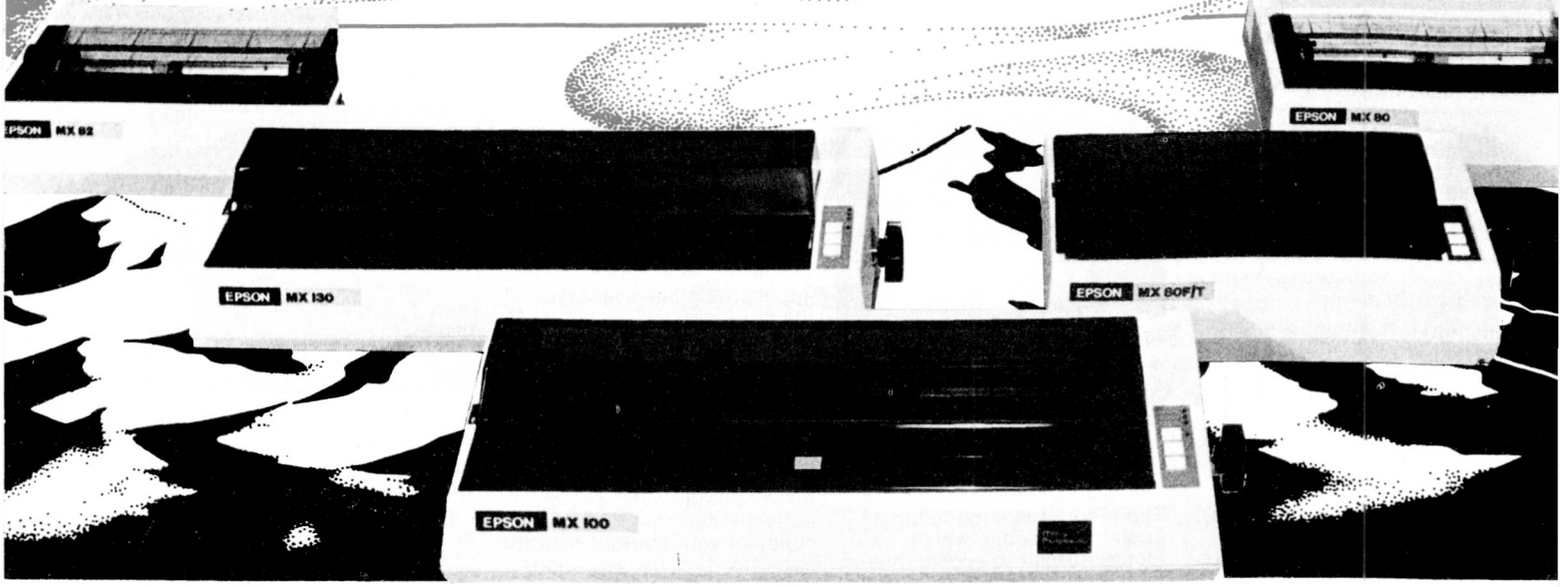

Highest possible quality + lowest possible cost = EPSON +MICRO PERIPHERALS
for the best of both worlds.

	Matrix			*Paper Handling*		*Speed*		*Max. Paper Width*		*High Res. Graphics & Italics*
	7 x 5	*9 x 7*	*9 x 9*	*Friction*	*Tractor*	*80 CPS*	*135 CPS*	*10"*	*15½"*	
MX80 T			●		●	●		●		
MX80 FT/1			●	●	●	●		●		
MX80 FT/New Type 2			●	●	●	●		●		●
MX82			●		●	●		●		●
MX100			●	●	●	●			●	●
MX130		●		●	●		●		●	●

The above machines have many more features including interfaces for Apple, PET (with PET Graphics), TRS80, Sharp, NEC, Hitachi, Nacom, Acorn, Super Brain, Video Genie, BBC Micro etc, some have correspondence quality printing and multiple character sets including international languages. Ring Ian today for full details and specifications and printout samples. All machines usually ex-stock with next day delivery plus 12 months no-quibble guarantee.

Wholesalers and Distributors of quality Japanese Micro Products.

Micro Peripherals ltd

61 NEW MARKET SQUARE, BASINGSTOKE, HANTS. Telephone: 0256 56468

Europe's leading Epson Distributor and Supplier. *Trade Sales - 0256 56469*

JAPANESE OFFICE: 101 Abe Bldg. 4F, 2-42 Kanda Jinbocho, Chiyado-ku, Tokyo, Japan.

RX8000

CHECK THE FEATURES:
80, 96, 132 characters per line.
80 cps, bidirectional,logic seeking
100 million character life head
Double width characters
3 - 10 inch wide paper for Tractor versions
8 - 10 inch wide paper for Friction versions
1/6, 1/8, or 1/12 inch line spacing selectable
256 characters including graphics
Centronics interface version available now
RS232C, IEEE488, and many others coming.



FROM

£199

ROXBURGH
PRINTERS LIMITED

22 WINCHELSEA ROAD, RYE, EAST SUSSEX TN31 7BR Telephone: Rye (07973) 3777 Telex: 957066

INNOVATIVE
TRS-80 SOFTWARE
FROM THE PROFESSIONALS

SHUTTLE

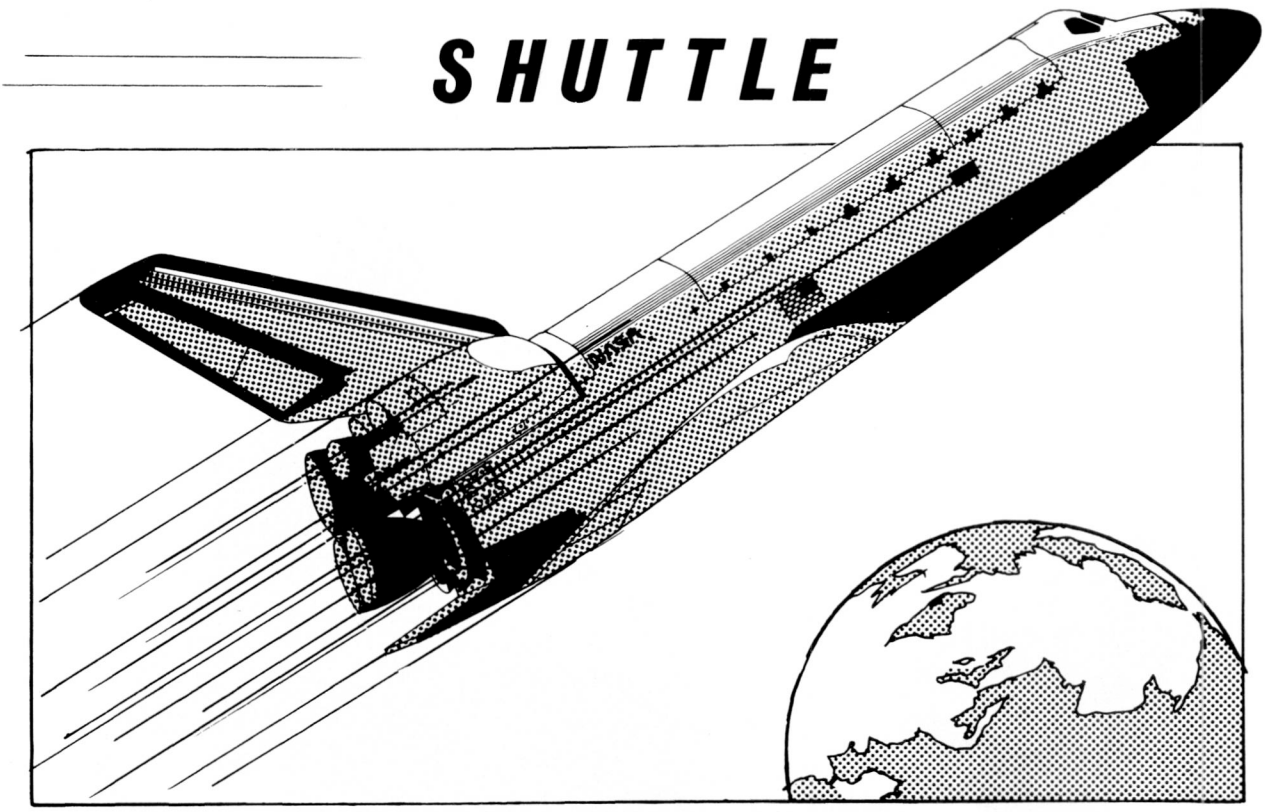

This program is a highly accurate computer simulation of the flight of the Space Shuttle Columbia from the initial countdown through the launch period, the launch itself and into a stable orbit. The craft may be manoeuvred within the orbit and then dropped out to finally fly through the atmosphere to a safe touchdown.

The attraction of this simulation is its authenticity. So far as is possible, it follows the actual parameters of the first Columbia flight with only one or two minor exceptions. The shuttle, of course, starts its flight pointed vertically into the sky and carries a huge fuel tank to provide the fuel for its three main engines in addition to the solid fuel rockets which provide the major thrust to lift it off the ground. Two minutes into the flight the rockets are jettisoned, having burned all their fuel. The count-down for take off starts at T-20 seconds. At T-10 seconds the shuttle motors start firing, but the shuttle remains tethered until T = 0. When the shuttle blasts off, the pilot must guide the craft into its orbit by controlling its attitude and track. A number of guidance controls are supplied, together, of course, with control of the shuttle motors' thrust.

The simulation may be started at one of three points in time: either at take off, at a point where the Columbia is in a stable orbit round the earth, or finally, prior to landing. Measurements of speed, fuel and so on may be selected for either Metric or Imperial measurements. All of the physical forces which acted upon the actual flight are taken into account. One departure from fact has been included in that the two solid fuel rockets have had their thrusts increased from 26 to 36 million Newtons so as to give the pilot an increased latitude for error. In other words to make the take off easier.

A fascinating program, the more so because it follows fact so closely. Available for the Model I and Model III TRS 80, Model I and Model II Genie and on tape or disk. The tape version will run in 16K, the disk in 32K.

Tape version.....**£14.95** Disk version.....**£17.95**

Both inclusive of V.A.T. but plus 50p P & P (if ordered alone).

TRS-80 & VIDEO GENIE SOFTWARE CATALOGUE £1.00 [**refundable**] plus 50p postage.

MOLIMERX LTD.

A. J. HARDING (MOLIMERX)

1 BUCKHURST ROAD, TOWN HALL SQUARE,
BEXHILL-ON-SEA, EAST SUSSEX.

TEL: [0424] 220391/223636 **TELEX 86736 SOTEX G**

BARCLAYCARD VISA

INNOVATIVE

TRS-80 SOFTWARE

FROM THE PROFESSIONALS

LDOS

First there were the TRSDOS's, 2.0, 2.1, 2.2 and 2.3. Then came Newdos+, essentially a patched version of the TRSDOS's but with a number of very useful commands and utilities added. Then VTOS 3.0 and VTOS 4.0. These constituted a departure from the earlier DOS's and featured Device Independence so that devices such as the keyboard, printer, VDU and disk drives could interact directly together. Then came Newdos80 which is a rewrite of Newdos+, adding new utilities and new Basic commands, its main features being the ability to mix different capacity drives on the same cable and the ability to use variable length records. Now from LOBO International comes LDOS, the fifth generation disk operating system for the TRS-80 microcomputer. It combines most of the advantages of the preceding disk operating systems and unlike some of them, is accompanied by a complete and readable set of documentation, which includes a Technical Section containing relevant addresses.

It is impossible to describe all of the features of LDOS in an advertisement. For instance it includes no less than 35 library commands as follows:—

APPEND	COPY	DEVICE	DIR	DO	FILTER	KILL
LIB	LINK	LIST	LOAD	MEMORY	RENAME	RESET
ROUTE	RUN	SET	SPOOL	ATRIB	AUTO	BOOT
BUILD	CLOCK	CREATE	DATE	DEBUG	DUMP	FREE
PROT	PURGE	SYSTEM	TIME	TRACE	VERIFY	XFER

All of the useful abbreviations in Newdos are included and the System Commands in Basic (CMD) now number eleven. A program called LBASIC/FIX is included, with which the normal TRSDOS Disk Basic may be patched to include a number of new commands and features. A Job Control Language is included and in fact is one of the most powerful features of LDOS. It allows the user to compile a sequence of commands or key strokes for later execution as a chain, with or without user intervention. There are too many new features to list them herein, but examples are: The ability to provide an audible signal, output through the cassette port. To flash or blink a one line message on the video display. A WAIT feature is included so that the machine can be put into a "sleep" state until such time as the system clock matches the time specified. And so on!

Hard disks in addition to single/double density, single/double sided, 8" and 5¼" floppies are supported although they may, of course, require hardware modifications. Utilities included in the package are:

BACKUP	COMMAND FILE	FORMAT	LCOMM
PATCH	RS232	KEY STROKE/MULTIPLIER	PRINTER FILTER

A Basic Renumber facility is included, as is a Basic Cross Reference function. Both are similar to the ones in Newdos+ and Newdos80. Most of the utilities are library commands which were existent in the previous DOS's, have been improved with the addition of new functions or facilities.

The prime development team of LDOS consisted of no less than 8 first rank programmers and they had the support and advice of six other well known programmers. They have done an excellent job to bring to the user what must be the best disk operating system so far produced for a microcomputer, which is destined to become the Standard DOS.

LDOS is totally upward compatible with TRSDOS, that is to say LDOS will be able to copy files and programs from TRSDOS disks onto LDOS formatted disks. As they are competitive disk operating systems, it is not suprising that the manual states that disks created under Newdos are not guaranteed to be compatible with LDOS, but we have not experienced any difficulty. We have done some work on investigating the compatibility of LDOS and the Video Genie and at the time of going to press we have found no incompatibilities. LDOS appears to run on the Video Genie without any problems at all. LDOS is compatible with either the Tandy or Electric Pencil lowercase modifications and Scripsit. LDOS is available for the Model I and Model III. A Model II version will be available shortly.

LDOS .....£85.00 **plus** VAT and £1.50 P&P.

TRS-80 & VIDEO GENIE SOFTWARE CATALOGUE £1.00 [**refundable**] plus 50p postage.



MOLIMERX LTD.

A. J. HARDING (MOLIMERX)



1 BUCKHURST ROAD, TOWN HALL SQUARE,
BEXHILL-ON-SEA, EAST SUSSEX.

TEL: [0424] 220391/223636 **TELEX 86736 SOTEX G**

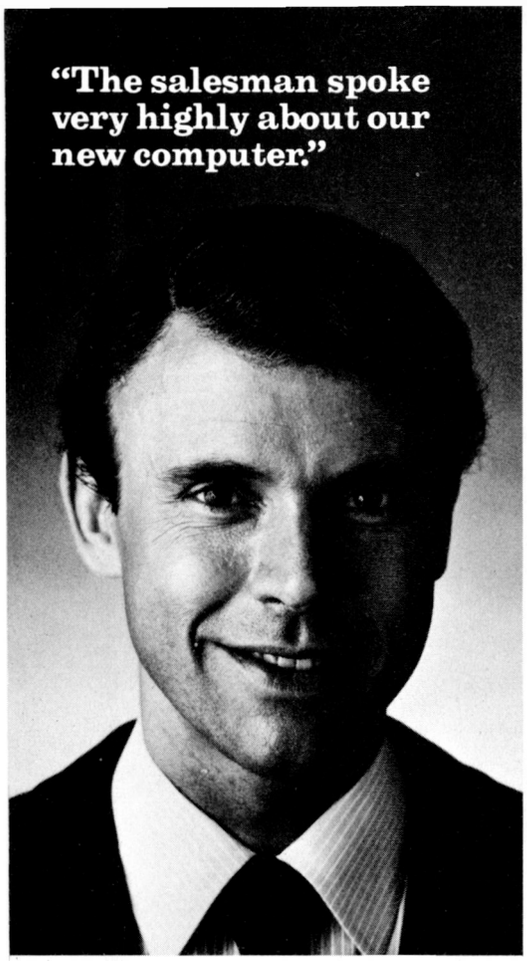

At Micro-C we'll give you unbiased, honest advice about micro-computers. Not a sales pitch.

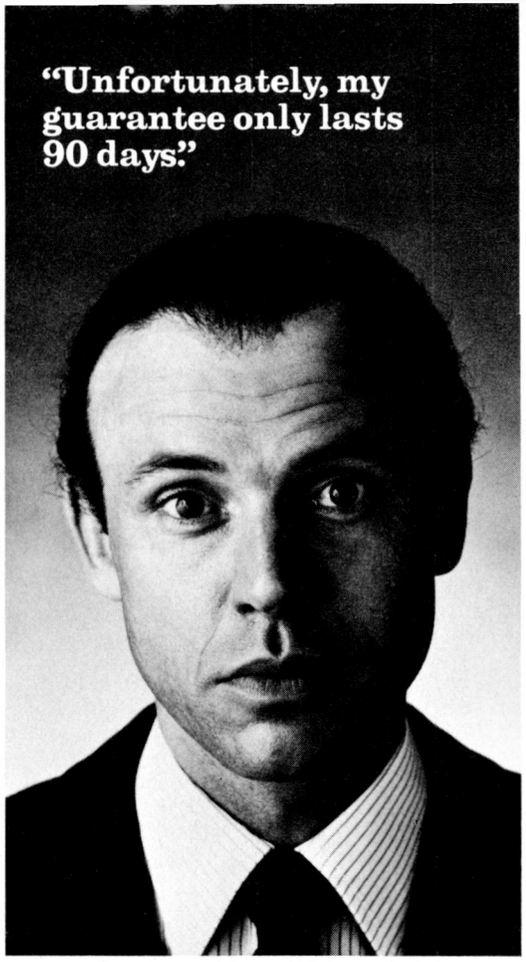

At Micro-C, we guarantee micro-computers for one full year.

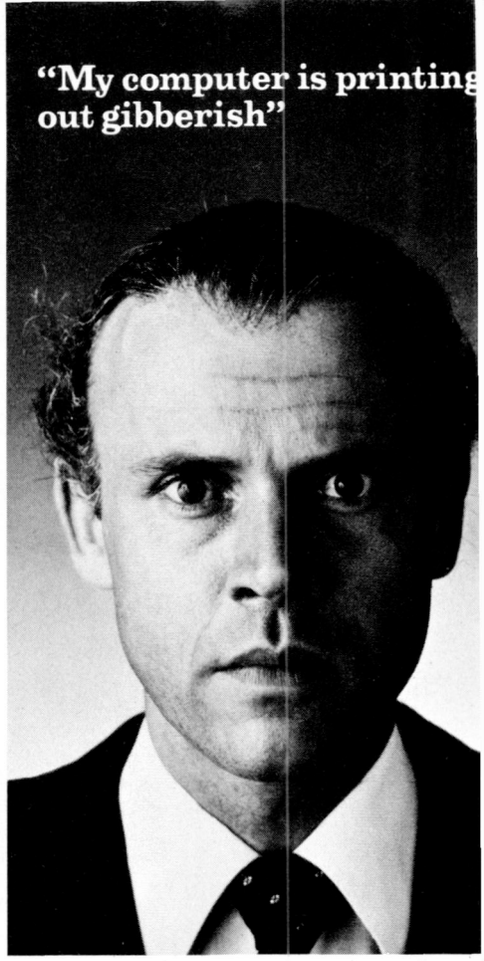

At Micro-C, we test all software. If it isn't easy to understand or free from errors, we won't stock it.

"Unfortunately, I didn't buy my computer from Currys."

At Currys' Micro-C, before we talk about hardware or software, we'll talk about your business, or practice.

(It's the only way we know to make sure the micro you choose is the micro you want.)

Next, we'll demonstrate how one or more of our micro systems can tackle your needs.

Maybe it'll be the ITT 20 20 or the Apple II with which you can keep books, tackle incomplete accounts and through Visicalc, work on financial planning and modelling.

On the other hand, for a little less, the Commodore Pet might do the job for you.

Again, it'll handle book-keeping, word processing, and incomplete records.

If your business is more complex

CURRY'S MICRO SYSTEMS LTD., A MEMBER OF THE CURRYS GROUP OF COMPANIES
OUR TERMS AND CONDITIONS OF SALE ARE DIFFERENT FROM THOSE SET OUT IN CURRYS LTD., STATEMENT OF TRADING STANDARDS BUT THEY EMBODY THE SAME PRINCIPLE.
MORE PROTECTION FOR YOU. OUR CUSTOMER, YOU WILL FIND FULL DETAILS OF TERMS OF BUSINESS ON THE REVERSE SIDE OF OUR INVOICES AND AGREEMENTS.

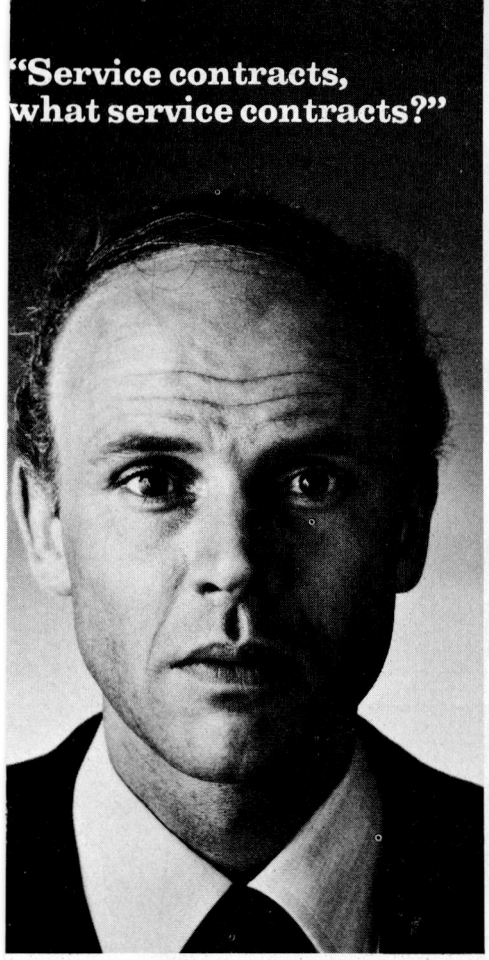

At Micro-C, we can maintain machines regularly. For a little extra, we'll guarantee to be there within one working day.

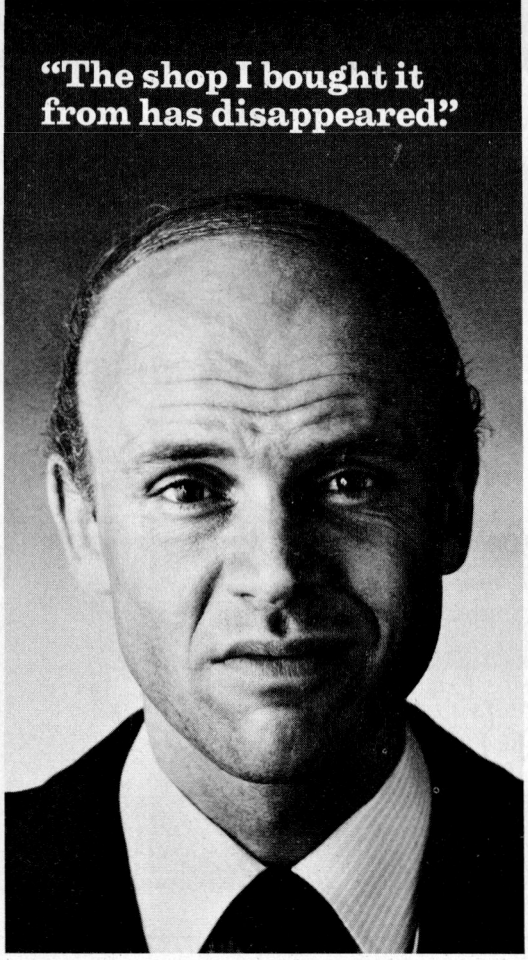

At Micro-C, we're part of the Currys Electrical Group. When you need us we'll be there.

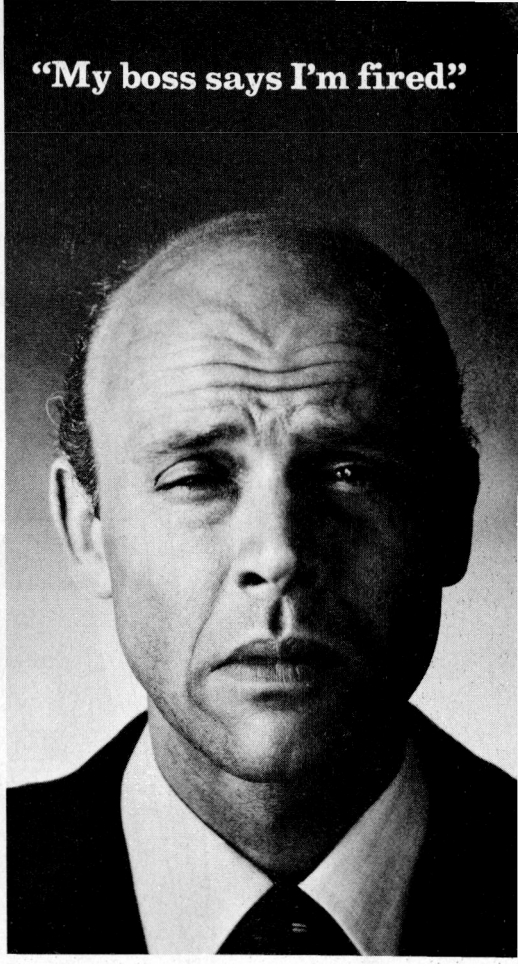

we might talk about the National Panasonic JD800, or JD840, or our new Micro-C 2000. They do all that the others do and offer fully integrated accounting, stock control and management information facilities.

We'll back them all with the guarantees and promises you can read above, together with one or two you can't.

For example, we help with staff-training so that the change-over is smooth and easy.

At the same time, we'll offer any numbers of ways to buy or lease, starting at around £35 a week.

Come and see us for a free demonstration. Before our cautionary tale turns into a True Life story.

The new Micro-C shops.
At Birmingham, Bristol, Leicester, Leeds, New Malden, Nottingham, Luton, Manchester, Southampton.

To Currys Micro-Systems Limited, 653 London Road, High Wycombe, Bucks HP11 1EZ
☐ Please send me an information pack on your service and products

☐ Please telephone to make an appointment

Name_____

Company_____

Address_____

Telephone_____

micro-C

COMPUTERS EXPLAINED BY HUMAN BEINGS.

MICRO-C INSIDE CURRYS SHOPS AT: **BIRMINGHAM** TEL: 233 1105 **LEEDS** ALBION STREET TEL: 446601 **LUTON** TEL: 425079
NOTTINGHAM TEL: 412455 **SOUTHAMPTON** BARGATE TEL: 29676 INSIDE BRIDGERS SHOWROOMS AT: **BRISTOL** TEL: 650501 **NEW MALDEN** TEL: 01-949 2091
BY ITSELF IN **LEICESTER**: 127 CHARLES STREET, TEL: 546224 **MANCHESTER**: 19 BROWN STREET, TEL: 834 8156

Video Genie...

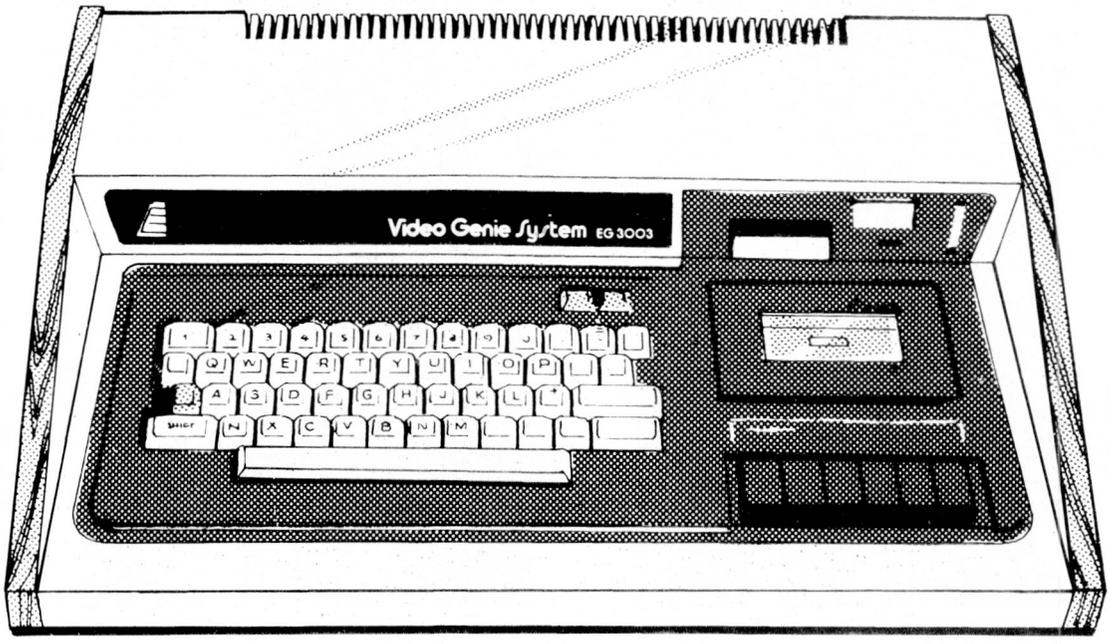

Are you a home enthusiast taking your first tentative steps into the enthralling world of micro-computers? If so, the Video Genie is the ideal complete system for you!

It's a real micro-computer, not a pocket one, yet it only needs connecting to a domestic T.V. set to produce superb results.

The Genie is compatible with the popular TRS 80 16K level 2, the best selling computer of all time. As well as its lower price, the Genie offers an in built cassette deck, 16K RAM, 12K ROM with BASIC interpreter, full size keyboard and a stylish carrying case. So it is not only excellent value for money, but an ideal "First computer" on which to learn programming.

There are literally 1000's of pre-recorded programs available, including educational, leisure and small-business applications, and simple BASIC language means you can write your own programs with ease.

Extended BASIC.

The Microsoft extended BASIC has many powerful features, including double precision variables, scientific functions, formatted printing, extended editing sub-commands, automatic line numbering, multiple dimensional arrays, complete string manipulation, direct access to graphics and machine language sub-routines.

Memory.

The Genie EG 3003 model has 16K of internal RAM expandable externally to 48K using the special Expansion unit. 12K of ROM contains the Microsoft BASIC.

Cassette.

Two cassette interfaces are provided for both the internal and an external cassette unit.

CPU.

The machine uses the industry Standard Z80 micro-processor.

Display.

64 or 32 characters × 16 lines are available on the full display.

LOWE electronics

one giant step for micro-computer systems

12" Monitor.

The additional purchase of the EG 100 Monitor offers 3 distinct advantages

- It gives a considerably better quality display.
- It does not interfere with domestic T.V. viewing.
- It comes in an attractive matching style.

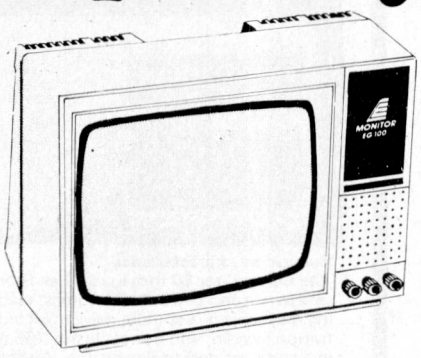

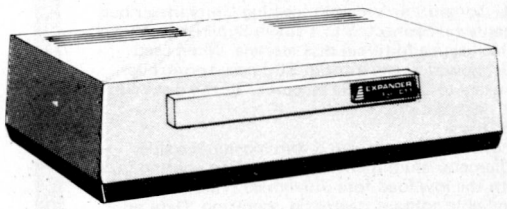

Expander.

The expansion box unleashes the full possibilities of the Genie. It contains a selection of interfaces, allowing the connection of up to 48K RAM, 4 disk drives, printers and S100 cards.

Disk Drive.

As well as the obvious advantage of mass-storage, the addition of the disk system to the Genie means much faster access to other languages and full random access file handling. Up to 4 drives can be used on a system.



. . . and introducing Genie II

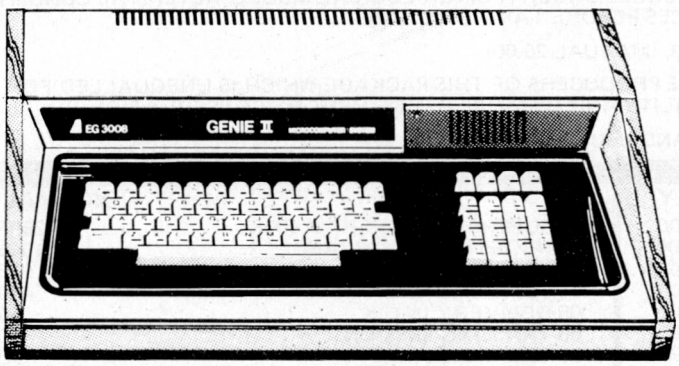

. . . one giant leap for micro, business systems!

New and exclusive! The Genie II is a breakthrough for small business computers. Harnessing all the advantages of the Genie, including low price, Genie II adapts perfectly to commercial functions with the following features.

- Numeric keyboard
- Four usable, definable function keys.
- Extension to BASIC
- Basic business commands
- Fully expandable for same peripherals.

For full details and demonstrations of the Video Genie system or Genie II contact your local dealer, or write directly to the sole importers at the address below.

Video Genie Approved Dealers

AVON Microstyle, Bath, 0225 334659/319705. **BEDFORD** Computopia, Leighton Buzzard, 0525 376600. Comserve, Bedford, 0234 216749. Cavern Electronics, Milton Keynes, 0908 314925. **BERKSHIRE** P.C.P. Reading, 0734 589249. **BUCKS** Interface Components Ltd, Amersham, 02403 22307. Photo Acoustics, Newport Pagnell, 0908 610625. **CAMBS** Cambridge Micro Computers, Cambridge, 0223 314666 **CHESHIRE** Hewart Electronics, Macclesfield, 0625 22030. **CUMBRIA** Kendal Computer Centre, Kendal, 0539 22559. **DERBYS** Kays Electronics, Chesterfield, 0246 31696. T. Crossley, Chesterfield, 0246 850357. Lowe Electronics, Matlock, 0629 4995. **DORSET** Blandford Computers, Blandford Forum, 0258 53737. **ESSEX** Emprise, Colchester, 0206 865926. Compuskill, Romford, 0708 751906. Infolab, Chelmsford, 0245 357111. CSSC, Ilford, 01-554 3344. **GLOS** MPL Computers, Cheltenham, 0242 582090. Petrie Systems, Cheltenham, 0242 584060. **HERTS** Photo Acoustics, Watford, 0923 40698. Watford Electronics, Watford, 0923 40588/37774. Q Tek Systems, Stevenage, 0438 65385. Comp Shop, New Barnet, 01 4412922. **KENT** Matrix Computer Systems, Beckenham, 01 658 7508/7551. Business Systems, Hempstead, 0635 362652. Thanet Electronics, Herne Bay, 02273 63859. The Computer Room, Tunbridge Wells, 0892 41645. SMG Microcomputers, Gravesend, 0474 55813. **LANCS** Computer Business Systems, Lytham St. Annes, 0253 730033. Microdigital, Liverpool, 051 227 2535. Mighty Micro, Burnley, 0282 32209/53629. Leisuronics, Blackpool, 0253 27091. Harden Microsystems, Blackpool, 0253 27590. ABC Supplies, Levenshulme, 061 431 9265. HR Control Systems, Chorley, 02572 75234/5. Computercat, Leigh, 0942 601818. Micro Chip Shop, Fleetwood, 03917 79480. Micro Chip Shop, Preston, 0722 22669 79511. Micro Chip Shop, Blackpool, 0253 403 122. Sound Service, Burnley, 0282 38481. **LEICS** Eley Electronics, Leicester, 0533 871522. Arden Data Processing, Leicester, 0533 22255. Kram Electronics, Anstey, 053721 3575. **LONDON (CENTRAL)** City Microsystems Ltd, London, 01 588 7272. Sumlock Bondain, EC1, London, 01 250 0505. **LONDON (NORTH)** Henry's Radio, London, 01 402 6822. Radio Shack, NW6, London, 01 624 7174. Comp Shop, 311 Edgware Rd, London, 01 262 0387. Chromasonic Electronics, N19, London, 01 833 3705. Davinci Computers, Edgware, London, 01 952 0526. Comp Shop, New Barnet, London, 01 441 2922. NIC, Tottenham, London, 01 808 0377. **LONDON (WEST)** Ecobits, Shepperton, 09322 20826. **NORTH EAST** H.C.C.S. Associates, Gateshead, 0632 821924. 3-Line Computing, Hull, 0482 859169. Derwent Radio, Scarborough, 0723 65996. Briers Computer Services, Middlesbrough, 0642 242017. General Northern Microcomputers, Hartlepool, 0783 863871. **NORTHANTS** Arden Data Processing, Peterborough, 0733 49577. **NOTTS** Electronic Servicing Co, Lenton, 0602 783938. University Radio Stores, Nottingham, 0602 45466. Midland Microcomputers, Nottingham, 0602 298281. East Midland Comp. Services, Arnold, 0602 267079. Mansfield Computer & Electronics, Mansfield, 0623 31202. **NORFOLK** Anglia Computer Centre, Norwich, 0603 29652. **OXFORD** Micro Business Systems, Witney, 0993 73145. Magnus Microcomputers, Kidlington, 08675 6703. **SALOP** Tarrant Electronics, Newport, 0952 812134. **SCOTLAND** Computer and Chips, St. Andrews, 0334 72569. Scotbyte Computers, Edinburgh, 031 343 1005. Esco Computing, Glasgow, 041 204 1811. Silicon Centre, Edinburgh, 031 332 5277. **SOUTH** Catronics, Wallington, 01 669 6700/1. Gemsoft, Woking, 04862 22881. Castle Electronics, Hastings, 0424 437875. Gamer, Brighton, 0273 698424. **SOUTH WEST** Diskwise Ltd, Callington, 05793 3780. Electrosure, Exeter, 0392 56280 56687. West Devon Electronics, Yolverton, 082 285 3434. **SUFFOLK** Rebvale Computers, Bury St. Edmunds, 095 381 316. Marshion Electronics, Ipswich, 0473 75476. Microtek, Ipswich, 0473 50152. **SURREY** Croydon Computer Centre, Thornton Heath, 689 1280. **SUSSEX** Nestra Electronics, Chichester, 0243 512861. **WALES** MRS Communications, Cardiff, 0222 616936/7. Morriston Computer Centre, Swansea, 0792 795817. Tryfan Computers, Bangor, 0248 52042. **WEST MIDLANDS** Ward Electronics, Birmingham, 021 554 0708. Allen TV Services, Stoke on Trent, 0782 616929. Microprint, Stoke on Trent, 0782 48348. **YORKS** Advance TV Services, Shipley, 0274 585333. Amateur Radio Shop, Huddersfield, 0484 20774. Thomas Wright, Bradford, 0274 663471. Photo Electrics, Sheffield, 0742 53865. Allan M. Plainer Ltd, Leeds, 0532 688397. Quadraphenia, Sheffield, 0742 77824. Scene and Heard, Halifax, 0422 59116. Spot Computer Systems, Doncaster, 0302 25159. **EIRE** Compshop, Dublin, 74933. D.B. Microcomputers, Limerick, 061 42733. **NORTHERN IRELAND** Business Electronic Equipment, Belfast, 0232 46161. Brittain Laboratories Ltd., Belfast, 0232 28374. **JERSEY** G.B. Organs, St. Saviour, 0534 26788/23564.

Chesterfield Road, Matlock, Derbyshire DE4 5LE
Telephone: 0629 4995. Telex: 377482 Lowlec G.

GW Computers Ltd

CALLERS BY APPOINTMENT ONLY
LONDON WC1. TEL NO. 636 8210/631 4818

SUPERBRAIN™

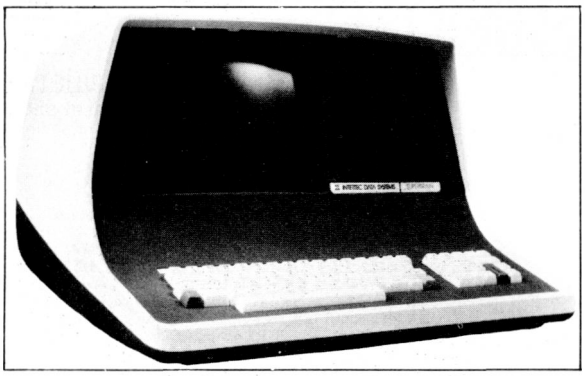

Intelligent Video Terminal Systems
350K or 700K of Disk Storage
SuperBrain's CP/M operating system boasts an overwhelming amount of available software in BASIC, FORTRAN, COBAL and APL. Whatever your application' ... General Ledger, Accounts Receivable, Payroll, Inventory or Word Processing, SuperBrain is top in its class. And the SuperBrain QD boasts the same powerful performance but also features a double-sided drive system to render more than 700K bytes of disk storage and a full 64K or RAM. All standard!

COMPUSTAR™

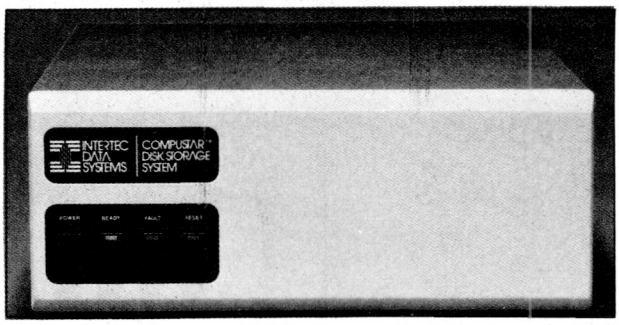

Functional characteristics
The CompuStar 10 megabyte Disk Storage System (DSS) consists of read/write and control electronics, read/write heads, a track positioning mechanism, a spindle drive mechanism, dual disks, an air filtration system, and our exclusive 255 user controller — all packaged in a compact desktop enclosure. Although designed primarily to accommodate multiple CompuStar Video Processing Units (described at left), the unit can easily be connected to a single SuperBrain Video Computer System to facilitate additional disk storage. When used with CompuStar VDUs, however, the integral Z80 based controller will permit up to 255 users to "share" the resources of the disk with minimal CPU response degradation.

Read/Write Heads and Disks
The recording media consists of a lubricated thin magnetic oxide coating on a 200mm diameter aluminium substrate. This coating formulation, together with the low load force/low mass Winchester type flying heads, permits reliable contact start/stop operation. Data on each disk surface is read by one read/write head, each of which accesses 256 tracks.

*** D/SIM ***
(DETERMINISTIC SIMULATOR)

01=FILE RELATED TASKS	06=VOCABULARY SECTION
02=FUNCTION TABLES	07=SET RECORD FORMS
03=MATHEMATICS	08=FIELD ATTRIBUTES
04=COMPUTE FUNCTIONS	09=PRINT FORMAT
05=AUTOMATIC PROCESSES	10=DISK SWAP
SELECT ?	

A NEW MODELLING PROGRAM. TOTALLY IN CORE. PROVIDES THE ABILITY TO TABULATE FINANCIAL (AS WELL AS OTHER) DATA AND THEN PROCESS THE DATA UNDER CERTAIN ALTERNATIVE CONDITIONS. SET-UP INITIAL CONDITIONS OF A GIVEN SITUATION AND EVALUATE THE CONSEQUENCES UNDER A GIVEN LOGICAL MODEL. ALTER THE CONDITIONS AND EVALUATE POSSIBLE ALTERNATIVE CONSEQUENCES BEFORE TAKING ACTION.

PRICE (195.00) MAIL ORDER OR 250.00 WITH TRAINING. (MANUAL 20.00)

GRAMA (WINTER) LTD/G.W. COMPUTERS LTD. ARE THE PRODUCERS OF THIS PACKAGE WHICH IS UNEQUALLED FOR ITS LEVEL OF TOTAL INTEGRATION, LINGUISTIC FLEXIBILITY AND MAXIMISED DISK/MEMORY CONSERVATION.

AUTHOR TONY WINTER (M.D.;B.A.LIT;B.A. HON. PHIL;AND LECTURER)

TWO TYPICAL PACKAGE DEALS.	NORMALLY
01-SUPERBRAIN 64K RAM 320 K	1950.00
02-EPSON MX80 FT (OR SIMILAR)	450.00
03-CABLE	25.00
04-12 MONTH WARRANTY	235.00
05-DELIVERY IN U.K.	40.00
06-TRAINING SESSION	50.00
07-CPM HANDBOOK	8.75
08-50 BASIC EXERCISES	8.75
09-BOX PAPER (2000 SHEETS)	20.00
10-DBMS (DATABASE)	475.00
11-WORD-STAR (ELSEWHERE 250)	190.00
12-MBASIC-80	150.00
13-40 MEMOREX DISKETTES	114.00
14-DOS+ AND DIAGNOSTICS	125.00
15-AUTO/CLOCK/CLICK/KEY AHEAD	50.00
16-MSORT & DSORT	75.00
17-RECOVER (ERASED FILES)	25.00
18-INSTANT BASIC	9.00
(NOT INC VAT)	4000.50
OUR PRICE ***	2950.00

	NORMALLY
01-SUPERBRAIN 64K RAM 700K	2395.00
02-NEC 5510 (OR SIMILAR)	1695.00
03-CABLE ADAPTER	25.00
04-12 MONTH WARRANTY	410.00
05-DELIVERY IN U.K.	50.00
06-TRAINING SESSION	50.00
07-CPM HANDBOOK	8.75
08-50 BASIS EXERCISES	8.75
09-BOX PAPER (2000 SHEETS)	20.00
10-DBMS (DATABASE)	195.00
11-WORD STAR (ELSEWHERE 250)	190.00
12-MBASIC-80	150.00
13-25 DYSAN D/SIDE DISKETTES	150.00
14-DOS+ AND DIAGNOSTICS	125.00
15-AUTO/CLOCK/CLICK/KEY AHEAD	50.00
16-MSORT & DSORT	75.00
17-RECOVER (ERASED FILES)	25.00
18-INSTANT BASIC	9.00
(NOT INC VAT)	5910.50
OUR PRICE ***	4850.00

WARRANTY NOTE: WE HANDLE ALL REPAIRS OURSELVES. WARRANTY COVERS FREE REPLACEMENT EQUIPMENT IF DEFECTIVE IN FIRST THREE WEEKS. THEREAFTER UP TO 12 MONTHS THE COVER PROVIDES INSURANCE ON ALL SPARE PARTS AND LABOUR COSTS (EXCLUDING CARRIAGE). CALL OUT MAINTAINANCE IS ALSO AVAILABLE AT 25.00 MINIMUM (LONDON) 50.00 MINIMUM ELSEWHERE IN U.K. PLUS MILEAGE.

CORRESPONDENCE ADDRESS ONLY: 55 BEDFORD
COURT MANSIONS, BEDFORD AVENUE, LONDON WC1.

MPI MICROCOMPUTER PRODUCTS INTERNATIONAL LTD.

ROOM PCW 8 CAMBRIDGE HOUSE, CAMBRIDGE ROAD, BARKING, ESSEX IG11 8NT, ENGLAND
Telephone: 01-591 6511 Telex: 892395

EUROPE'S LARGEST SELECTION OF MICROCOMPUTER SOFTWARE, BOOKS AND MAGAZINES FOR THE HOBBYIST, EDUCATIONALIST, PROFESSIONAL AND RETAILER

Retailer and OEM terms available

MAIL ORDER TELE-PHONE CREDIT CARD ORDER ★ VISIT ★

Full descriptive Catalogue: available £1 — deductable from first purchase

Trade Enquiries Welcome

BOOKS

BY OSBORNE

Introduction to Microcomputer Series	
Vol 0: Beginners Book	£6.50
Vol 1: BASIC Concepts	£9.00
Vol 2: Some Real Microprocessors	£20.85
Vol 2: Updating supplement set Nos. 1 - 6	£20.85
Vol 3: Some Real Support Devices	£13.00
Vol 3: Updating supplement set Nos. 1 - 6	£20.85
1 Updating supplement (Specify for Vol 2 or 3)	£4.50
PET and the IEEE 488 (GPIB) Bus	£10.95
6800 Programming for Logic Design	£6.30
8080 Programming for Logic Design	£6.30
Z80 Programming for Logic Design	£6.30
Z80 Assembly Language Programming	£11.85
Z8000 Assembly Language Programming	£14.85
6502 Assembly Language Programming	£11.85
8080A/8085 Assembly Language Programming	£7.95
6800 Assembly Language Programming	£7.95
6809 Assembly Language Programming	£13.50
Accounts Payable and Accounts Receivable	£14.85
Payroll with Cost Accounting	£14.85
General Ledger	£14.85
Some Common BASIC Programs	£9.85
Practical BASIC Programs	£10.25
80891/O Processor Handbook	£4.95
The CRT Controller Handbook	£4.95
The 68000 Microprocessor Handbook	£4.50
Apple User's Guide	£11.50
CP/M User's Guide	TBA
16 Bit Microprocessor Handbook	£15.95
4 and 8 Bit Microprocessor Handbook	£15.95
8086 Book	£13.50

GENERAL

See Magazines and Subscriptions!	See Osborne Books!
Microprocessors from Chips to Systems	£9.00
Microprocessor Interfacing Techniques	£12.10
IC OP-AMP Cookbook	£9.85
RTL Cookbook	£4.25
Ciarcias Circuit Cellar	£6.00
Buyers Guide to Microsoftware	£2.40
Calculating with BASIC	£4.95
Computer Programs that Work (in BASIC)	£3.95
Dr Dobbs Journal Volume 1	£15.50
Dr Dobbs Journal Volume 2	£15.50
Dr Dobbs Journal Volume 3	£15.50
Best of Byte	£8.95
Scelbi BYTE Primer	£8.95
Best of Creative Computing, Vol. 1	**£6.95**
Best of Creative Computing, Vol. 2	**£6.95**
Program Design	£4.75
Programming Techniques: Simulation	£4.75
Numbers in Theory and Practice	£6.00
PIMS—A Database Management System	£6.50
Best of Interface Age—Software	£9.95
Programming the Z8000	£11.60
CPM Handbook	£12.10
CP/M Primer	£ 8.45
K2 FDOS	£15.50
Microsoft BASIC University Software Inc., Listings:	
Home and Economics Programs	£16.50
Education and Scientific Programs	23.00

FOR THE Z80

See Osborne Books!	
Z80 Instruction Handbook (Wadsworth)	
Programming the Z80 (Zacs)	£11.50
Z80 Software Gourmet Guide and Cookbook	£10.25
32 BASIC Programs for the TRS-80 (Level II) 16K	£11.10
Introduction to the T-Bug (Guide to TRS-80 Machine Language Monitor)	
30 Programs for the Sinclair ZX80	£6.95
Z80 Microcomputer handbook	£7.50

CONCERNING LANGUAGE

A Practical Introduction to PASCAL	£4.95
The PASCAL Handbook	£11.50
Beginners guide to UCSD PASCAL	£8.25
Introduction of PASCAL (Including UCSD PASCAL)	£9.10
BYTE Book of PASCAL	£17.85
SCELBAL—BASIC Language Interpreter (Source Code)	£10.00
Instant Basic	£7.65
BASIC BASIC	£7.15
Advanced BASIC	£6.60
Users Guide to North Star BASIC	£10.00
Microsoft BASIC (a guide)	£7.15
Secret Guide to Computers	£4.00
Fifty BASIC Exercises	£10.25

FOR THE 6502

See Magazines and Subscriptions!!	
Best of Micro, Vol 2	£5.50
Programming the 6502 (Zacs)	£10.25
6502 Applications	£10.25
6502 Instruction Handbook	£2.75
The PET Revealed	£10.00
Library of PET Subroutines	£10.00
32 BASIC Programs for the PET	£11.10
First Book of KIM	£7.00
PET/CBM Personal Computer Guide (2nd edition)	£11.00

FOR THE 8080

See Osborne Books!	
8080 Hex Code Card	£1.95
8080 Octal Code Card	£1.95
8080 Software Gourmet Guide and Cookbook	£7.15
8080/8085 Software Design	£6.75
8080 Standard Monitor	£8.95
8080 Standard Assembler	£8.95
8080 Standard Editor	£8.95
8080 Special Package: Monitor, Editor, Assembler	£20.00
BASEX: A Simple Language and Compiler for the 8080	£6.00

FOR THE 6800

See Magazines and Subscriptions!	See Osborne Books!
6800 Software Gourmet Guide and Cookbook	£7.85
6800 Tracer—An aid to 6800 Program Debugging	£4.50
Tiny Assembler	£6.30
RA 6800 ML—An M6800 Relocatable Macro Assembler	£17.50
Link 68—An M6800 Linking Loader	£6.00
MONDEB—An Advanced M6800 Monitor Debugger	£3.85

FOR FUN

More BASIC Computer Games	£6.00
8080 Galaxy Game	£6.95
SUPER-WUMPUS—A Game in 6800 Assembler Code & BASIC	£4.25
Computer Music Book	£6.75
Computer Rage (a Board Game)	£6.95
Introduction to TRS-80 Graphics	£6.30
Take My Computer Please . . . (Fiction)	£3.25
Introduction to Low Resolution Graphics for PET, Apple TRS-80	£6.00
Starship Simulation	£4.50
Microsoft BASIC: University Software Inc., Listings:	
Fun and Games Programs 1	£10.45
Fun and Games Programs 2	£10.45
6502 Games	£10.25
Inside BASIC Games	£9.45

FOR THE NOVICE

See Magazines and Subscriptions!	See Osborne Books!
Getting Down to Business with Your Microcomputer	£5.50
Getting Involved with Your Own Computer	£5.50
How to Profit from Your Personal Computer	£6.50
Microcomputer Potpourri	£1.95
Hobby Computers are Here	£3.00
New Hobby Computers	£3.00
Understanding Microcomputers and Small Computer Systems	£6.95
Understanding Microcomputers and Small Computer Systems and Audio Cassette	£8.75
From the Counter to the Bottom Line	£10.00
Buying a Business Computer	£9.75
You Just Bought a Personal What?	£8.75

MAGAZINES

MAGAZINE SUBSCRIPTIONS (all processed within 3 weeks)

Micro 6502 Journal (12 issues)	£17.00
68 Micro (12 issues)	£21.00
Personal Computing (12 issues)	£21.00
Interface Age (12 issues)	£30.00
Dr Dobbs Journal (12 issues)	£19.00
Recreational Computing (6 issues)	£13.50
BYTE (12 issues)	£40.00
Creative Computing (12 issues)	£25.50
Kilobaud Microcomputing (12 issues)	£31.00
Compute for the 6502 (12 issues)	£25.50
80 Microcomputing (12 issues)	£29.00
S-100 Microsystems (for CPM users) (6 issues)	£12.50

MAGAZINE BACK ISSUES

Micro 6502 Journal	£1.95
Personal Computing	£2.15
Interface Age	£3.25
Dr Dobbs Journal	£2.15
Computer Music Journal	£3.75
Recreational Computing	£2.15
BYTE	£3.60
Creative Computing	£2.15
Calculators and Computers	£1.95
Kilobaud Microcomputing	£3.60
Compute—for the 6502	£2.50
68 Micro	£2.15
80-Microcomputing	£3.60
On Computing	£1.95
S-100 Microsystems	£2.15
Magazine Storage Box (holds 12)	£2.15

BYTE NIBBLE REPRINTS:

a) A TMS-9900 Monitor	£3.50
b) BASIC Cross-Reference Generator	£1.25
c) A Micro Word Processor	£4.50
d) 'Tiny' PASCAL in 8080 Assembly Language ('e needed to use this)	£13.00
e) A 'Tiny' PASCAL Compiler	£13.50
f) An APL Interpreter in PASCAL	£13.00
g) Computer Assisted Flight Planning	£2.35
h) Computerized Wine Cellar	£2.00
i) The Design of an M6800 Lisp Interpreter	£13.00

ORDER INFORMATION

MAGAZINES/SUBSCRIPTIONS: Magazine back issues that are not currently in stock are often difficult to obtain. For unavailable back issues there is a photocopying service of £0.15 per page plus p·p plus VAT. Subscriptions are processed to start with the next current issue after the date of order.

BOOKS: Most books are published in the USA and stocked in Britain by L.P. Enterprises: MPI Ltd.
We aim to keep all of these books in stock and as a result of this, most prepaid orders are despatched by return of post.
Please add £0.75 (plus 15% VAT) towards postage for EACH book purchased. If purchasing more than 5 books at any one time, please add £0.15 for each extra title (over the 5).

PAYMENT: All payment must be in sterling and drawn against a UK Bank. Send cash, cheques, postal orders, IMO, Access or Barclaycard No. to: Microcomputer Products International Ltd., Room PCW, 8 Cambridge House, Cambridge Road, Barking, Essex IG11 8NT. Prices subject to change due to fluctuations in the dollar rate.

Three good reasons why professionals pick Apples

1. In research

Apple desk top computer systems help you collect, store and analyse data as fast as you can load and execute a program. There are many software programs for Apple which enable you to manipulate your data in the computing world. If you need special programs you can now use any of Apple's development languages – Basic, Fortran, Pascal, Cobol and Pilot.

2. In engineering

Apple desk top computer systems let you define models and refine prototypes. Do you want to study cause and effect of several variables? Apple can compute new results instantly and display them in colourful, easy-to-read graphs, charts or plots on a video monitor.

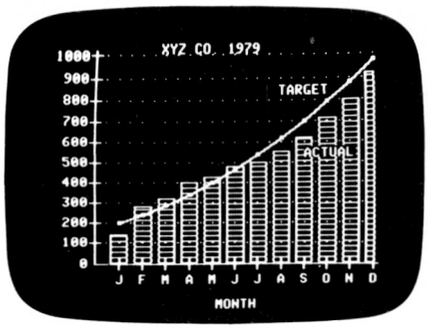

3. In production management

Apple desk top computer systems make it simple to gather data, analyse productivity, measure yields and facilitate all phases of production control. Do you want to speed up repetitive tasks? You can rely on Apple's word processing capabilities to write, edit and print your reports and data.

Apples grow with you

Whichever system you choose, Apple never locks you into a single configuration. You can use up to eight I/0 accessory expansion slots to add an IEEE bus, Apple's Silentype™ printer, a modem or a Graphics Tablet. You can add up to 64K bytes and 5¼in. disc drives without adding any overhead. For support, service and the best extended warranty in the industry – Apple is the answer. If you have any other questions about why Apple is chosen by professionals in engineering and science, see your nearest Apple Computer Dealer.

Apple II	
Maximum Memory Size	64K bytes
Screen Display	40 column (80 column with peripheral card) 24 Lines Upper Case
Screen Resolution (B & W)	280 × 192
Screen Resolution (Colour)	140 × 192 (6 colours)
Keyboard	Fixed
Numeric Key Pad	Accessory
Input/Output	8 expansion slots
Disc Drives	Add-on one to six drives
Languages	BASIC Fortran 77 Pascal Assembly Pilot Cobol
Typical Configuration	48K RAM Apple with BASIC, single disc drive, B & W Monitor (9''), Silentype™ printer.

For details of the numerous programs available for Apple and the name and address of your nearest Apple Computer Dealer, please complete the coupon below and return it to Microsense Computers Limited, Finway Road, Hemel Hempstead, Herts HP2 7PS. FREEPOST.

SOLE UK DISTRIBUTOR

microsense computers limited

Finway Road, Hemel Hempstead, Herts HP2 7PS
Hemel Hempstead (0442) 41191 and 48151
24 hour answering service, Telex: 825554 DATEFF G

* Price exclusive of VAT and correct at time of going to press.

* *Apple is a trademark of Apple Computer Inc, Cupertino, California, USA.*

apple®



Please send me full information on the Apple computer, the Apple software booklet and my nearest Dealer. I am interested in how Apple can help me in:
☐ Science ☐ Research ☐ Engineering
☐ Production Management ☐ Business

Name: _____

Position: _____

Company: _____

Address: _____

_____

_____

Post Code: _____

Telephone Number: _____

Profession: _____

PCW10

DATALINK

MICROCOMPUTER SYSTEMS LIMITED

Announce

MICRO PLANNER

– the program that gives microcomputer users a mainframe capability – at a fraction of the cost.

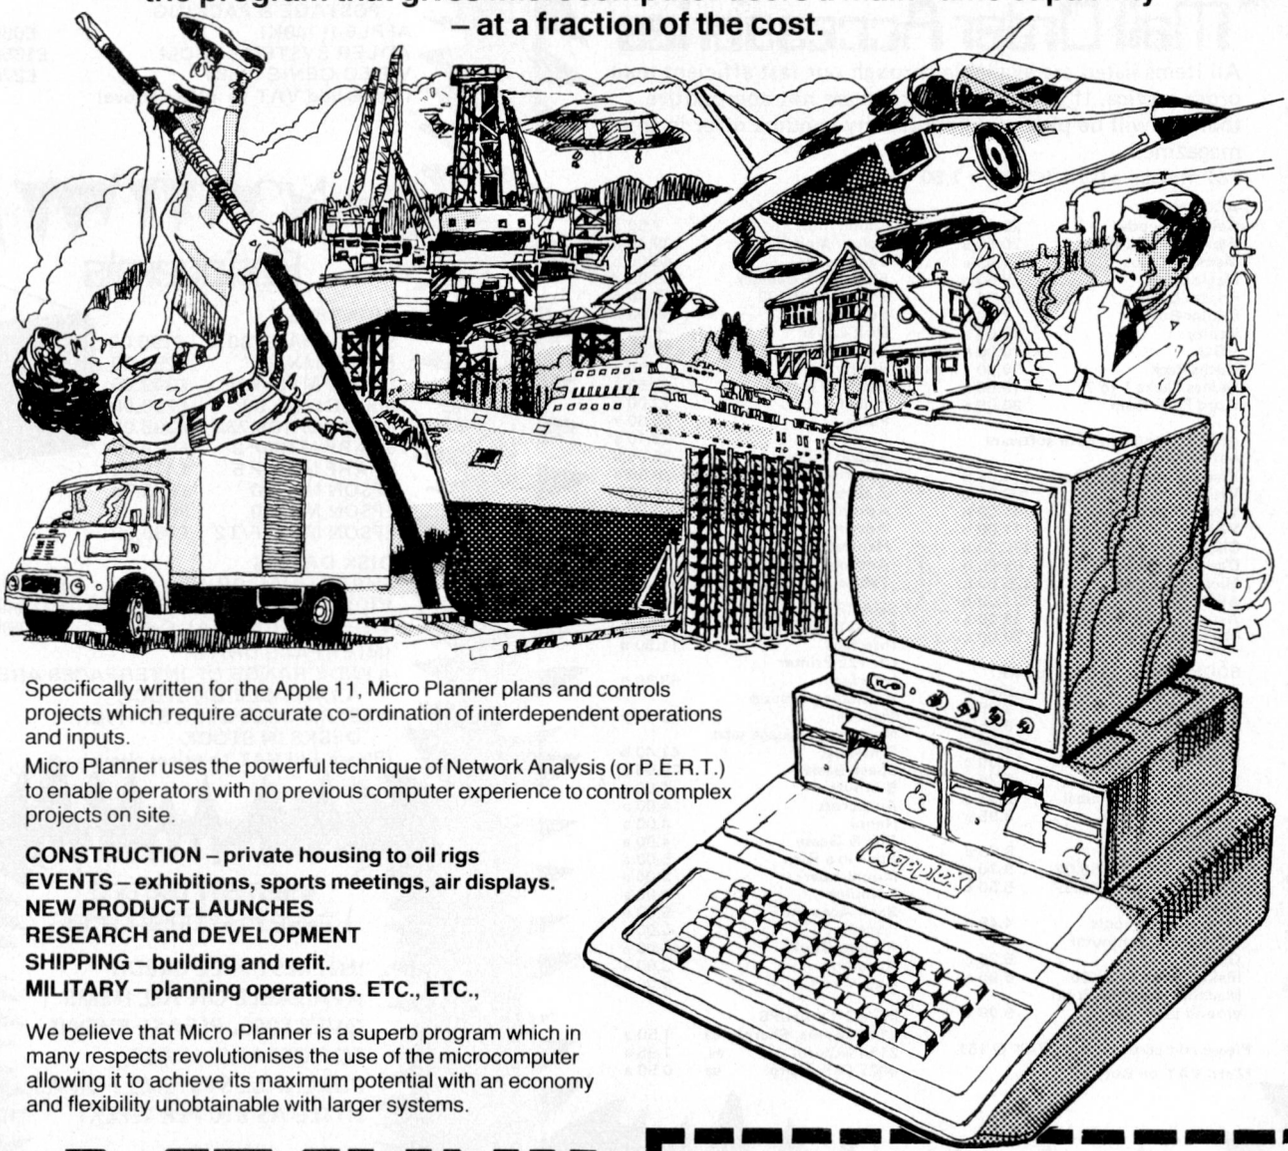

Specifically written for the Apple 11, Micro Planner plans and controls projects which require accurate co-ordination of interdependent operations and inputs.

Micro Planner uses the powerful technique of Network Analysis (or P.E.R.T.) to enable operators with no previous computer experience to control complex projects on site.

CONSTRUCTION – private housing to oil rigs
EVENTS – exhibitions, sports meetings, air displays.
NEW PRODUCT LAUNCHES
RESEARCH and DEVELOPMENT
SHIPPING – building and refit.
MILITARY – planning operations. ETC., ETC.,

We believe that Micro Planner is a superb program which in many respects revolutionises the use of the microcomputer allowing it to achieve its maximum potential with an economy and flexibility unobtainable with larger systems.

DATALINK

Microcomputer Systems Limited
10, Waring House, Redcliffe Hill,
Bristol BS1 6TB. Tel: Bristol (0272) 213427

To: Datalink Microcomputer Systems Limited
Please send me detailed information about Micro Planner

Name .....

Address .....

.....

Tel No. .....

... Monitors & TV's ...



COLOUR TV's by
FERGUSON, J.V.C.
MITSUBISHI
PANASONIC
TOSHIBA

PANASONIC TC402 Colour TV 12"	£199.00
SHARP B/W 12" TV	£54.90
MONITORS	
9" OPC GREEN	£95.00
9" APF B/W	£85.00
9" HITACHI B/W	£112.17
12" BMC	£180.00

(Please add VAT to prices above)

..... Hardware .



SYSTEMS BY
ADLER, APPLE, ACORN,
PANASONIC, SHARP,
VIDEO GENIE.

SHARP	
PC1211 POCKET	£79.00
SHARP MZ80K (20K)	£400.00
SHARP MZ80K (48K)	£425.00
SHARP MZ80K (64K)	£999.00
ACORN	
ATOM KIT 8K ROM + 2K RAM	£123.00
ATOM ASSEMBLED 8K ROM + 2K RAM	£153.00
ATOM KIT 12K ROM + 12K RAM	£223.00
ATOM ASSEMBLED 12K ROM + 12K RAM	£253.00
POWER SUPPLY	£11.00
ALL PRICES INCLUSIVE OF POSTAGE & PACKING	
APPLE II (48K)	£695.00
ADLER SYSTEMS FROM	£1550.00
VIDEO GENIE (16K)	£275.00

(Please add VAT to prices above)

Mail Order Accessories

All items listed are available through our fast efficient mail order service. If you find our prices are not competitive than we will be pleased to match any genuine offer in this magazine.

P&P Rates: a 0.75 b 1.00 c 1.50 d 2.50

ACORN	
Colour Encoder	20.00 a
Floating Point Rom	20.00 a
Memory Chips ea	1.95 a
Magic Book	5.50 c
Printer Drive	9.00 a
Printer Buffer	2.50 a
Utility	10.00 a
VDU	10.00 a
Maths Pack	10.00 a
Games Packs 1 to 7	10.00 a
Word Pack Rom	26.00 a
APPLE (Please ring for software not listed)	
Visicalc (new 16 sector)	111.00 b
Visiplot	100.00 b
Visitrend/Visiplot	144.00 b
Visidex	111.00 b
Cisobol	475.00 b
Desk Top Plan	65.00 b
Micro Modeller	425.00 b
APM	121.00 b
Writer	39.00 b
Magic Window	79.00 b
BOOKS (Send SAE for full list)	
Acorn Magic	5.50 c
Microsoft Basic	8.95 c
Basic Basic	8.25 c
Learning Level II	11.00 c
Basic Handbook	11.00 c
Introduction to Pascal	8.75 c
Programming in Pascal	6.95 c
CP/M Handbook	8.95 c
Programming & Interfacing 65 02	8.95 c
Programming the 65 02	9.10 c
Basic Computer Games	5.50 c
Basic A Unit for Secondary Schools	4.45 c
More Basic Computer Games	6.25 c
Making Most of ZX80	6.95 c
Machine Language from ground up	9.00 c

Please add p&p and then VAT @ 15%
(Zero VAT on Books)

VIDEO GENIE	
Sound Mod	7.50 a
Colour Mod	39.46 b
Synthesiser	45.00 b
EG 3013 Expander	185.00 d
EG 3013/RS232	215.00 d
Lower Case	35.00 b
Dust Cover	5.55 a
Invaders	13.00 a
Biorhythm	7.50 a
Battle of Britain	13.50 a
Pinball	13.00 a
Pools	13.50 a
Imon	23.10 a
Sargon II chess	25.00 a
Startrek	9.50 a
Z chess 3	14.50 a
Adventure Sampler	6.50 a
Adventure 1 to 9	8.75 a
Haniball	13.50 a
Android Nim	8.75 a
Tables	6.50 a
SHARP	
CE 121 Cassette Interface	11.50 b
CE 122 Printer Interface	63.90 b
Assembler Tapes & Manual	20.44 b
Machine Language tape & Manual	41.40 b
Speed Basic	10.00 a
Biorhythm	4.00 a
Autocross	4.00 a
Hanoi	4.00 a
Fox & Geese	4.00 a
Four in a Row	5.00 a
Moonlander	5.00 a
Composer	4.00 a
Bank Account	5.00 a
Posiedon	5.00 a
Address Book	44.00 a
Anagrams	3.00 a
Dust Cover	5.00 a
MEMORY CHIPS	
4116 (Apple, Sharp) ea	1.50 a
2114 (Acorn) ea	1.95 a
4027 (½K Sharp) ea	0 50 a

Peripherals



PRINTERS	
SEIKOSHA GP80	£195.00
EPSON MX70	£259.00
EPSON MX80F/T	£399.00
MICROLINE 83	£799.00
CENTRONICS 737	£395.00
SHARP MZ80P 3	£379.00
SHARP MZ80P 5	£415.00
EPSON MX100	£575.00
EPSON MX130	POA
EPSON MX80F/T2	£480.00
DISK DRIVES	
SHARP DUAL DRIVE	£580.00
VIDEO GENIE SINGLE DRIVE	£215.00
VIDEO GENIE DUAL DRIVE	£410.00

INTERFACE UNITS
A WIDE RANGE OF INTERFACES ARE AVAILABLE EX-STOCK
WESTRA COMPUTER STATION DESKS IN STOCK
(Please add VAT to prices above)

Interest Free and Lease Purchasing Plan

INTEREST FREE CREDIT AVAILABLE ON ALL ITEMS OVER £300. PLEASE PHONE FOR DETAILS. LEASE PURCHASE SYSTEMS FOR AS LITTLE AS £10 PER WEEK!

Superior Systems Ltd.

BARCLAY VISA

178, WEST STREET, SHEFFIELD S1 4ET TEL: 0742 755005
ALSO AT: QUADRAPHENIA, 19 BRADFORD ROW, (HALLGATE) DONCASTE
DN1 3NF TEL: 0302 21215
Business Hours: Sheffield Mon-Sat 9am-5.15pm Doncaster Mon-Sat 10am-5.00pm

Your prayers have been answered.

If you own or use a micro-computer, then chances are that from time to time, you've wished that someone could simplify programming.

Because as useful as micro-computers are, they can only ever be as good as the programs they run.

Well then, how does this sound?

No more program-coding. No more debugging. And no more time wasting.

Arguably more comprehensive and advanced than anything else of its kind, The Last One is a computer program that writes computer programs. Programs that work first time, every time.

By asking you questions in plain English about what you want your program to do, The Last One uses your answers to generate a ready-to-use program in BASIC.

What's more, with The Last One, you can change or modify your program as often as you wish. Without effort, fuss or any additional cost. So as your requirements change, your programs can too.

And if, because of the difficulties and costs of buying, writing and customising software, you've put off purchasing a computer system up to now, you need delay no longer.

Available now.

The Last One costs £260 + £39 VAT and is now available from better computer stores.

For further information, write to D.J. 'AI' Systems Ltd.,
Station Road,
Ilminster,
Somerset TA19 9BQ.
Tel: 04605 4117.

THE LAST ONE™

The low-cost answer for both character and graphic display...

NEW



...the KAGA 12" lightweight monitor with green character display – ideal for your Apple microcomputer

nationwide availability through over 400 dealers

OTHER ACCESSORIES INCLUDE:-

- Communications
- Data Storage
- Desks
- Display Accessories
- Entertainment
- General Apple Accessories
- Graphics
- Input Devices
- Interface Cards
- Languages
- Printers
- Scientific/Industrial
- Speech
- Video Monitors

SPECIFICATIONS

Picture Tube	310KMB31
Phosphor	P31
Video Input Signal	
Polarity	Negative sync.
Level	1.0Vp-p
Impedance	75Ω
Active Display Area	235(W) x 185(H) m
Scanning Frequency	
Horizontal	15.75 kHz (63.5 μs)
Vertical	60 Hz (16.67 ms)

Active Video Period	
Horizontal	54.5 μs max.
Vertical	15.57 ms max.
Video Band Width	More than 18 MHz (–3 dB)
Display Characters	80 characters with 25 lines
Operating Ambient Temperature	0~+40°C
Power Supply	230V AC ±10%
Power Consumption	26W
Dimensions	310(W) x 286(H) x 308(D) mm
Weight (Net)	7kg

NOTE: The above specifications are subject to change without notice for further improvement.

Ring for details of your nearest stockist

Tel Hemel Hempstead

(0442) 63561

or write to us at this address

Data Efficiency Limited
Minicomputer Accessories Division
Finway Road Hemel Hempstead
Hertfordshire HP2 7PS

Prices exclusive of carriage and VAT.
Prices are correct at time of going to press.

DE
Data Efficiency

COMPUTECH for apple ITT

COMPEC '81 17-20 NOV OLYMPIA

Come and see us on Stand 1230 Ground Floor Grand Hall
NEW! A Mailing, Merging Document Processor
CHAIN MAIL - only £45

COMPUTECH SOFTWARE & HARDWARE IS WIDELY ACCLAIMED - WHY?

Companies like Shell UK Oil, Grindlays Bank, W.H. Smith, government departments and hundreds of firms from multinational corporations to sole traders and small businesses have licensed Computech software. Why?

Thirty years experience of business fifteen years experience of computing and dedication to serving the users' interests economically must be major contributions. By the time this advertisement appears about 1000 business software packages will have been installed and supported by us. Note other features which appeal to our customers - no special equipment, all configurations of Apple systems supported, no extra charge for lifetime support, hot-line service, economical use of hardware resources, program code supplied, modifications allowed, full validation, all accountancy requirements satisfied, all data written to disk and recoverable on demand, very simple operation, emulation of traditional manual methods, comprehensive manuals with sample reports, reliable operation, advisory bulletins and free fixing of bugs, (which is fortunately rare). Reduced licence fee for new versions with extra features. As approved dealers of Apple products and actual manufacturers of compatible hardware we combine the knowledge of hardware and software so essential for the application of microcomputers.

COMPUTECH SOFTWARE AND HARDWARE INCLUDES:

Payroll for 350 employees, 100 departments, all pay periods, printed payslips, approved year end documents, very quick and easy to use, **£375. Sales, Purchases** and **General Ledgers £295** each, detailed statements. **Job Costing** and **Group Consolidation** are amongst many and various applications of the **General Ledger** package, which supports values to totals of one thousand million accurate to a penny! Our **Utilities Disk** available like other packages in 13 sector or 16 sector format, is widely used for reliable, error checking, copying, including single drive, and the renowned **DPATCH** program beloved of programmers for **£20.** We have developed a **Terminal Utilities** package which enables Apple to Apple and Apple to mainframe communications with local processing and storage as well as Apple to host communications from the amazingly low price of **£130.** Our **Graphics Utilities** program for use with the **Microline** and **Epson** families of printers enable the plain paper production on low cost printers of high resolution screen pictures, graphs etc. - free with **Microlines** or **£30** separately. **Keyboard Driver** enables the use of our **Lower Case** adaptor with BASIC programs and **Applewriter Patches** supplied **FREE** with our character generator package (total cost **£50**) is separately available on disk with documents for **£10.** At the same price **CAI** (convert Apple pictures for ITT) makes binary high resolution picture files display properly on the ITT 2020. We sell the famous **Visicalc** for **£125** and have delivered systems using it to do amazing things like production control, shipping accounts and stocks and shares valuations! The versatile **Applewriter** word-processing package at only **£42**, especially employed with our **Lower Case Character Generator** is widely used by people who cannot type to produce word-perfect copy! Experience with Apple systems has led to the design and manufacture of compatible products with enhanced features at very favourable prices to satisfy users' needs. These include the **Diplomat Serial Interface** which has handshaking capability and switchable options (**£80**), the **Diplomat Parallel Interface** which enables the direct use of text and graphics with the **Microline** and **Epson** printers and is a complete 'plug in and go' item with gold-plated edge-connector at **£80** and has optional direct connection for **Centronics 730/737** printers. Our new **Diplomat Communications Card** at **£95** is a sophisticated peripheral especially suitable for Apple to mainframe communications at high speeds in full duplex mode with switch selectable bit rates and other options. The **Lower Case** adaptor is available for Apples (revision 7 and earlier) as well as ITT 2020, complete with diskette software for **£50**. It offers true descenders on screen and the £ sign. We also have an **Optional Character Generator** for the ever popular **Microline M80** at **£15**. This provides £ sign and improved digits and lower case characters with USASCII special symbols. Our price for the **Microline M80**, with graphics, 40, 80 and 132 characters per line, friction, sprocket and teleprinter feed, is only **£345**, amazing for this small, quiet reliable 'look alike' printer. Tractor option is **£40** and **Serial Adaptor £80**. The **Microline M82**, bidirectional printer with both parallel and serial input is only **£525**, it can have an optional 2K buffer, while the **Microline M83** full width adjustable tractor 120 cps printer with similar specification is only **£775**. Then for all computer users there is the unique **Micromux** which from **£800** provides up to 16 ports for simultaneous independent serial asynchronous communications! Telephone for data sheets or to arrange a demonstration or for the address of our nearest dealer. Please hurry - the demand for our products has been such that some have been temporarily out of stock. We offer the effective low cost solutions you need. **Prices exclude V.A.T., carriage and packing.**

COMPUTECH SYSTEMS

168, Finchley Road, London NW3 6HP. Tel: 01-794 0202

AGENTS THROUGHOUT THE UK AND OVERSEAS

THE MEMORABLE 64k STATIC BOARD

Exported, not imported. The ultimate in reliability.

A new high technology product from Transam, the ME3 64K static S100 memory board is the first standard S100 card to hold a full 64K of static RAM (low power CMOS 200nS parts). It has the added advantage of doubling as an EPROM card for 2516 EPROMs, and is suitable for all S100 computers.
Designed and manufactured in the UK and available now.

- Expandable from 0-64k of RAM or EPROM in 2k blocks, one chip at a time.
- Maskable in 8k boundaries and selectable in 8k blocks (FFFF to E000 selectable in 2k blocks).
- Phantom disable implemented.
- RAM and EPROM can be resident on the same card.

ME3 assembled with 16k RAM

£162 excl. VAT

Dealer and OEM enquiries welcome. For further details please contact:

TRANSAM

TRANSAM COMPONENTS LIMITED
59/61 THEOBALD'S ROAD
LONDON WC1
Tel: 01-405 5240/2113
Telex: 24224 (Ref. 1422)

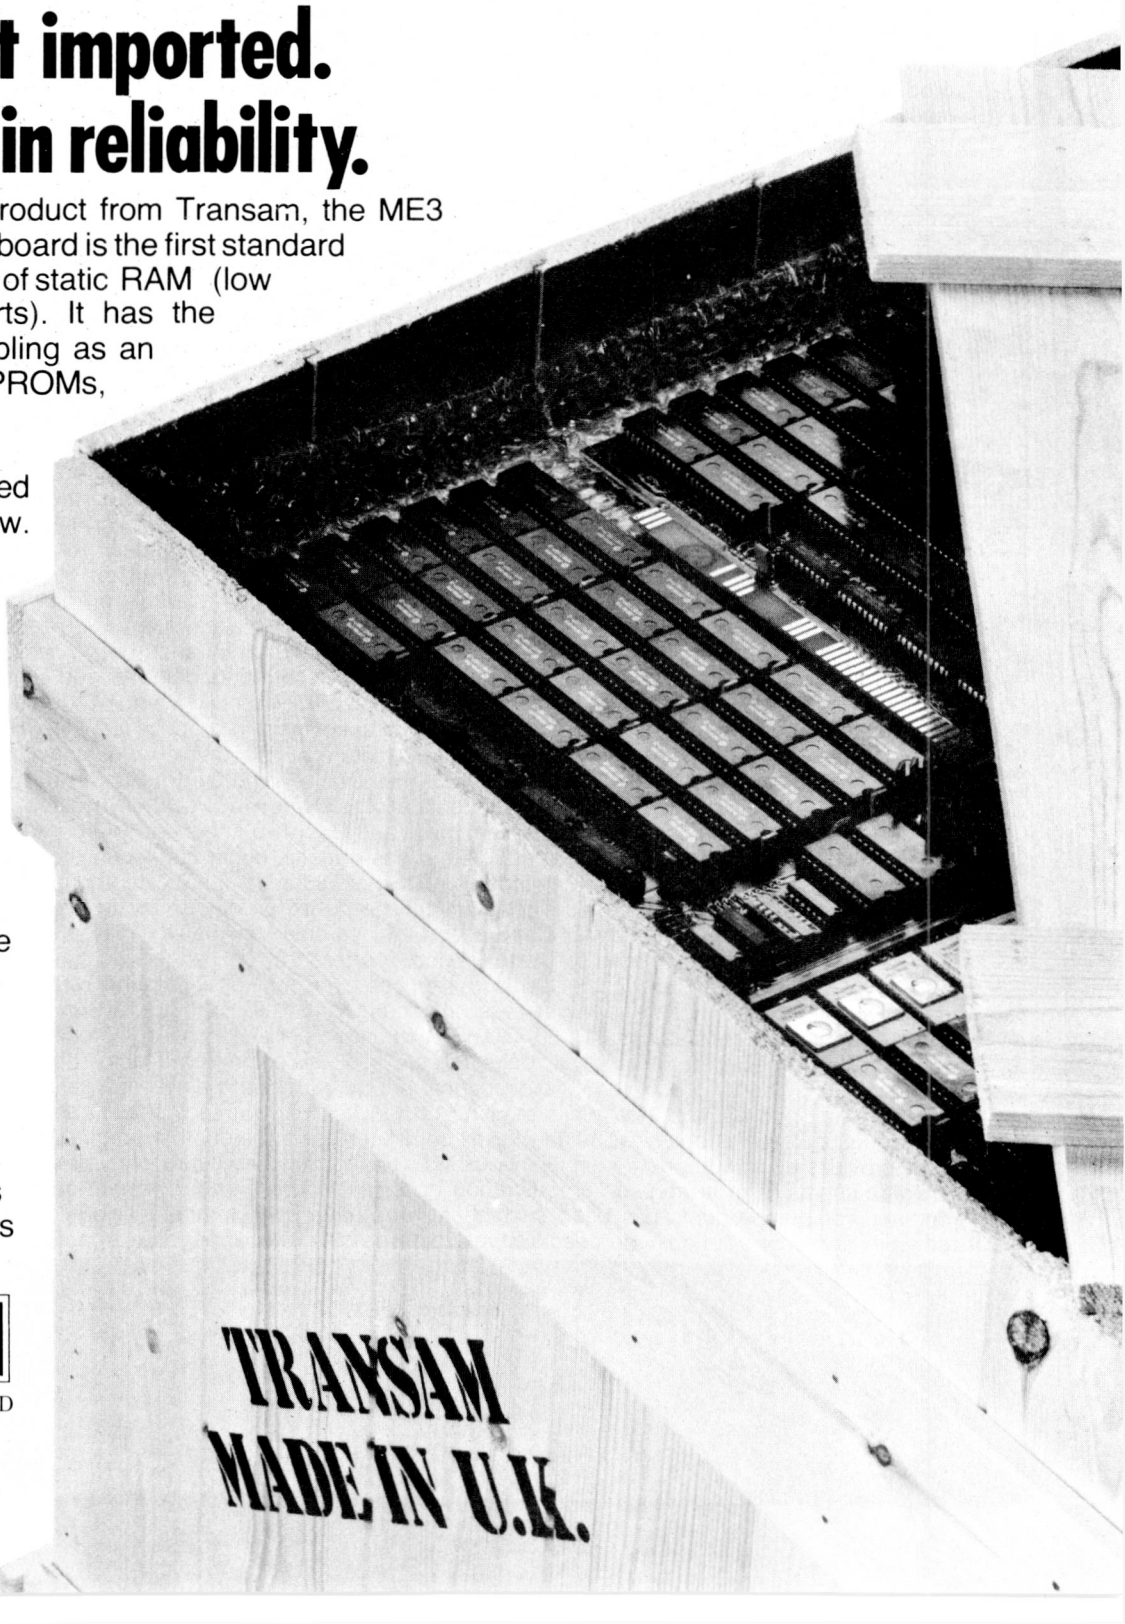

TRS 80 MODEL III
DUAL DENSITY DISK DRIVE
UPGRADE KITS

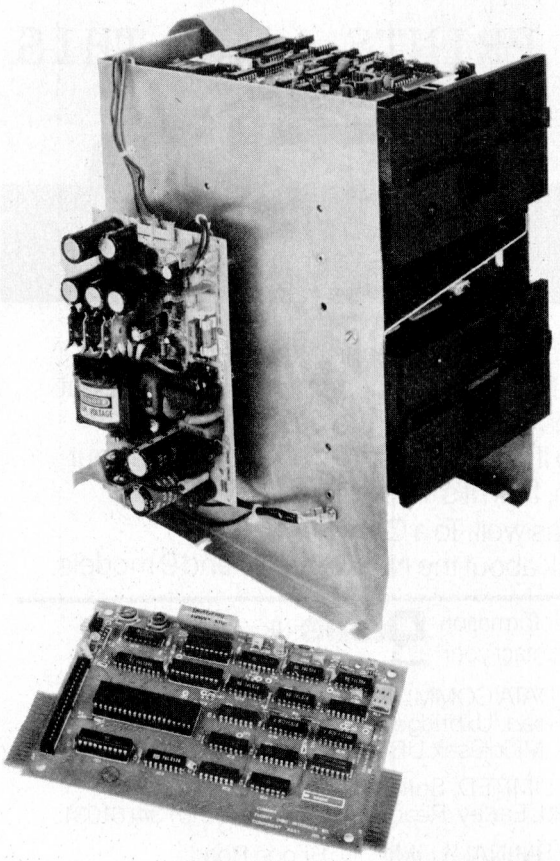

Kit comes assembled and tested as illustrated. Full installation instructions given. Kit includes:—

2 x 40 TRACK DUAL DENSITY DRIVES

OR 2 x 80 TRACK DUAL DENSITY DRIVES

DISK CONTROLLER BOARD

240 VOLTS AC SWITCHED MODE POWER SUPPLY

ALL CONNECTORS AND CABLES

PRICES

KIT WITH 2 x 40 TRACK DRIVES **£599**

KIT WITH 2 x 80 TRACK DRIVES **£729**

Call your nearest dealer for a demonstration:

RADIO SHACK LTD.,
188, Broadhurst Gardens,
London NW6
Tel: 01-624-7174

COMPSHOP LTD.,
14, Station Road,
New Barnet, Herts.
Tel: 01-441-2922

COMPSHOP LTD.,
311, Edgware Road,
London W2.
Tel: 01-262-0387

COMPSHOP LTD.,
19, Herbert Street,
Dublin 2
Tel: 604165

LONDON COMPUTER CENTRE, 43, Grafton Way, London W1.
Tel: 01-388-5721

N.I.C.
61, Broad Lane,
London N15.
Tel: 01-808-0377

CROYDON COMPUTER CENTRE, 29a, Brigstock Road, Thornton Heath, Surrey.
Tel: 01-689-1280

P J EQUIPMENT LTD.,
3, Bridge Sgreet,
Guildford.
Tel: 0483-504801

R.D.S. ELECTRICAL LTD., 157-161, Kingston Road, Portsmouth
Tel: 0705-812478

TANDY HASTINGS LTD., 48, Queens Road, Hastings.
Tel: 0424-431849

MICROWARE COMPUTING SERVICES, 57, Queen Charlotte Street, Bristol
Tel: 0272-279560

BLANDFORD COMPUTERS, Higher Shaftsbury Road, Blandford Forum
Tel: 0258-53737

TAPE SHOP
32i Viaduct Road,
Brighton.
Tel: 0273-609099

PARWEST LTD.,
18 St. Mary Street,
Chippenham.
Tel: 0249-2131

COMPUTER SHACK LTD., 14, Pittville Street, Cheltenham.
Tel: 0242-584343

ENSIGN,
13-19, Milford Street,
Swindon, Wilts.
Tel: 0793-42615

COMSERVE,
98, Tavistock Street,
Bedford.
Tel: 0234-216749

CLEARTONE COMPUTERS, Prince of Wales Ind. Estate, Abercarn, Gwent.
Tel: 0495-244555

EMPRISE LTD.,
58, East Street,
Colchester.
Tel: 0206-865926

MAGNUS MICRO-COMPUTERS,
139 The Moors,
Kidlington, Oxford.
Tel: 08675-6703

CAMBRIDGE COMPUTER STORE,
1, Emmanuel Street,
Cambridge.
Tel: 0223-65334

I.C. ELECTRONICS,
Flagstones,
Stede Quarter,
Biddenden, Kent.
Tel: 0580-291816

MICRO CHIP SHOP,
190, Lord Street,
Fleetwood, Lancs.
Tel: 03917-79511

MICRO CHIP SHOP,
197, Waterloo Road,
Blackpool.
Tel: 0253-403122

MICRO CHIP SHOP,
93, Friargate,
Preston, Lancs.
Tel: 0772-22669

HARDEN MICRO-SYSTEMS, 28-30, Back Lord Street, Blackpool,
Tel: 0253-27590

NORTH WEST COMPUTER CONSULTANTS LTD.,
2i4 Market Street,
Hyde, Cheshire
Tel: 061-366-8624

HEWART MICRO-ELECTRONICS,
95, Blakelow Road,
Macclesfield.
Tel: 0625-22030

KARADAWN LTD.,
2 Forest Way,
Great Sankey,
Warrington.
Tel: 0925-572668

PHOTO-ELECTRICS,
459 London Road,
Sheffield.
Tel: 0742-53865

BRIARWOOD COMPUTER SERVICES,
Briarwood House,
Preston Street,
Bradford.
Tel: 0274-306018

THOMAS WRIGHT LTD.,
Thorite House,
Laisterdyke,
Bradford.
Tel: 0274-663471

GNOMIC LTD.,
46, Middle Street,
Blackhall,
Hartlepool.
Tel: 0783-863871

BRIERS COMPUTER SERVICES, 1, King Edward Square, Middlesborough, Cleveland.
Tel: 0642-242017

3 LINE COMPUTING,
36, Clough Road. Hull.
Tel: 0482-445496

H.C. COMPUTER SALES LTD., 182, Earlsway. Team Valley Trading Estate, Gateshead.
Tel: 0632-874811

EWL COMPUTERS LTD.,
8, Royal Crescent,
Glasgow.
Tel: 041-332-7642

CUMANA LTD 35 Walnut Tree Close, Guildford, Surrey, GU1 4UN.
Telephone: (0483) 503121.

Please add VAT to all prices.
Delivery at cost will be advised at time of order.

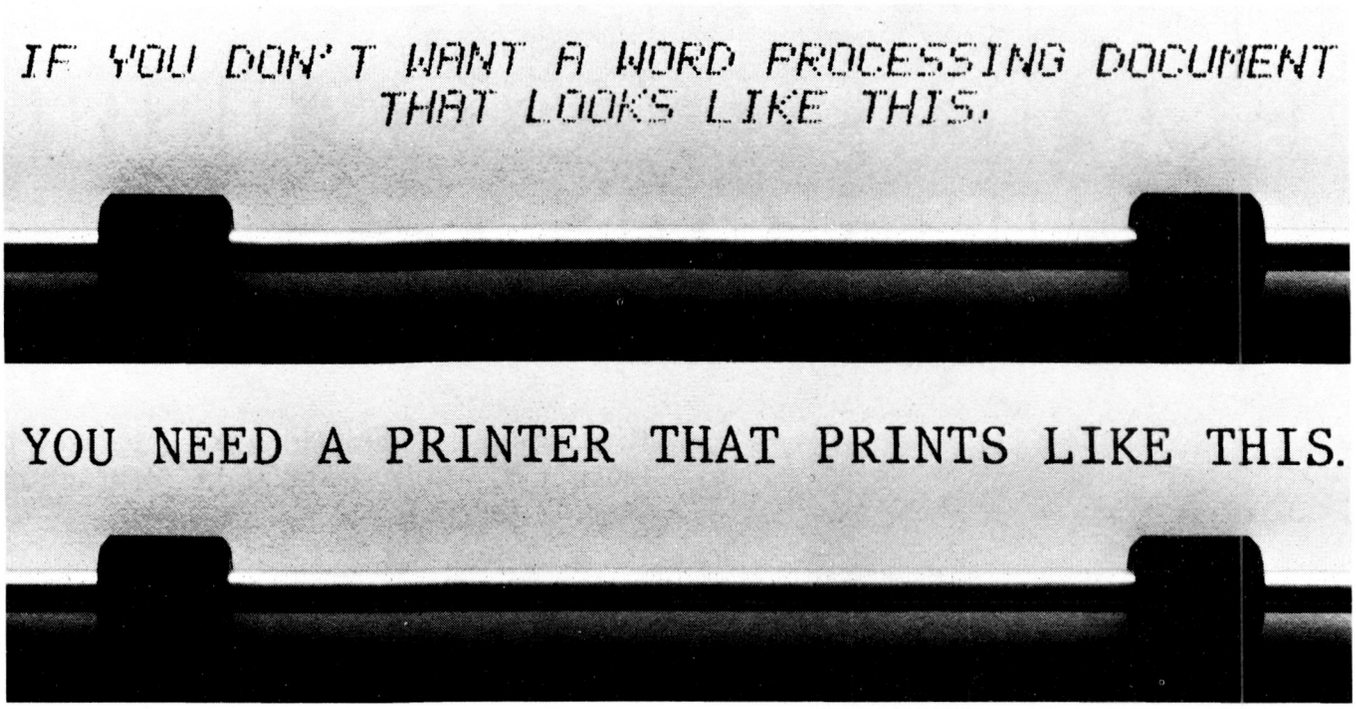

YOU NEED A PRINTER THAT PRINTS LIKE THIS.

The more your system can do, the better your terminal should be. That's why, if you're adding text editing capability to your data processing system, you should also think about adding a quality daisywheel terminal to replace the matrix terminal you're using now. And the best-quality terminal you can buy is one by Qume.

A printer for every application.

No matter what application you choose, Qume makes a printer to fit it.

Like our Sprint 5® KSR and RO, which have achieved the reputation for being the easy-to-use leader in letter-perfect terminals. You can have 50 different typestyles to use with it, including APL, scientific symbols and international character sets.

And there's the Sprint 5 Wide-Track™ with RS-232C interface. The first character printer data terminal in the world capable of handling paper up to 28 inches wide. That's a full 264-column printing area. Sprint 5 Wide-Track adds an entirely new dimension to the printed word.

The best backup in the business.

Not only do we make the best printers, but we also provide the best support to back up what we sell. That means excellent service to the OEM and the end user, and one of the best supplies programs in the business.

So if you're getting ready to upgrade your system, then it's time you upgraded your printer as well. To a Qume.

Ask about the NEW Sprint 7 and 9 models.

For more information contact your Qume [UK] AUTHORISED DISTRIBUTOR

ACCESS DATA COMMUNICATIONS LTD.,
Eskdale Road, Uxbridge Industrial Estate,
Uxbridge, Middlesex UB8 2RT. Tel: (0895) 30831.

BYTECH LIMITED, Suttons Industrial Park,
London Rd, Earley, Reading RG6 1AZ. Tel: (0734) 61031.

DAISY TERMINALS LIMITED, Bridge Road,
Haywards Heath, West Sussex. Tel: (0444) 57546.

FACIT, Maidstone Road, Rochester, Kent.
Tel: (0634) 401721.

ISG DATA SALES LIMITED, Unit 9, Fairacres Ind. Estate,
Dedworth Road, Windsor, Berkshire. Tel: (07535) 57955.

ROHAN COMPUTING LIMITED, 52 Coventry Street,
Southam, Warwickshire. Tel: (092681) 4045.

Qume®

Qume (UK) Limited Tel: (0734) 584646. Telex: 849706.

A British Company of ITT



The NEW Sprint 9





*** BUS ***
(BUSINESS EFFICIENCY)

WIDELY USED IN UK/FRANCE/USA AND ENGLISH SPEAKING COUNTRIES FOR ITS OVERALL FLEXIBILITY AS A COMPLETE BUSINESS PACKAGE.

Includes Inventory, Database, Management, Invoicing, Mailing Addresses, Statements, Sales/Purchase Ledger with or without Auto Stock Update and Double Entry Journals including Nominal Ledger; plus A'C Receivable and Payable making Auto Bank entries.

01=ADDRESS SECTION	07=BANK UPDATE	13=PRINT CUSTOMER STATEMENTS	19=PRINT YEAR AUDIT (9.00)
02=STOCK CONTROL	08=USER DATABASE AREA	14=PRINT SUPPLIER STATEMENTS	20=PRINT PROFIT/LOSS A'C (9.00)
03=A/C RECEIVABLES	09=INVOICE CREATION	15=PRINT AGENT STATEMENTS	21=DISK DIRECTORIES
04=SALES LEDGER	10=ORDER FILES	16=PRINT TAX STATEMENTS	22=CASHFLOW FORECAST (9.00)
05=A/C PAYABLES	11=30/60/90 DAY AGE ANALYSIS	17=RUN SEPARATE PROGRAMS	23=PAYROLL (N/AVAILABLE) (9.00)
06=PURCHASE LEDGERS	12=ARITHMETIC SECTION	18=CHANGE VOCABULARY	24=DISK SWAP/EXIT SYSTEM

WHICH OPTION

SUB-MENU EXAMPLES:
)Quit or .Random or .Sequential or .Key sorted field or .Other functions
)Quit or .All or .Part or .Specific
)Quit or .Fast screen or .Slow screen or .Rapid print or .Pausing print
)Quit or .Continue or .Amend or .Delete or .Print
)Quit or .Double entry or .Alter filename or .Echo input or .Print options
)Quit or .Mail ticket or .Columnated or .Raw data line
)Quit or .Add or .Subtract or .Multiply or .Divide
)Quit or .Greater or .Smaller or .Cross refer two files

(LEVEL 8.00 @ 975.00)
(LEVEL 9.00 @ 1075.00)

+++++++ SUPER – BUS +++++++ A NEW HIGHER LEVEL OF THE ABOVE PACKAGE. . . . HAS BEEN REDUCED IN SIZE BY 50 PER CENT TO A SINGLE 15K BASIC PROGRAM, MAKING ALL FILE RETRIEVALS A MATTER OF NANOSECONDS. WORKS UNDER M/PM AND COMPUSTAR FOR COMMON DATA RETRIEVAL LEVEL 10.00 . . . . ***** 1475.00 *****

DBMS (DATABASE) HAS 01=;02=;04=;06=;07=;08=;17=;18=;21=;24=. PRICE 475.00

DATABASE FEATURES ARE: . . . . . FOR ANY SIZE RECORD UP TO TWENTY FOUR FIELDS FILE ARCHITECTURES CAN BE DESIGNED WITH COMPLETE FREEDOM OVER THE LINGUISTIC CONVENTIONS ASSIGNED TO EACH FIELD. THE FILE THEN CAN STORE 32000 RECORDS WHICH CAN BE SEARCHED BY THE RANDOM ACCESS NUMBER (RETRIEVED IN LESS THAN ONE SECOND) OR 'KEY' RANDOM ACCESS ON SPECIFIED FIELD OR SEQUENTIALLY COMPARING FOR LEFT FIELD PARTS, FIELD-INKEYS, OR PARTS OF RECORD, AND THEN CHANGED, PRINTED, DELETED, SKIPPED.

GRAMA (WINTER) LTD/G.W. COMPUTERS LTD. ARE THE PRODUCERS OF THIS PACKAGE WHICH IS UNEQUALLED FOR ITS LEVEL OF TOTAL INTEGRATION, LINGUISTIC FLEXIBILITY AND MAXIMISED DISK/MEMORY CONSERVATION.
AUTHOR TONY WINTER (M.D.;B.A.LIT;B.A.HON.PHIL;AND LECTURER)

DUE TO LONG TERM CONTRACTUAL COMMITMENTS, WE ARE ONLY GIVING RESTRICTED DEMONSTRATIONS BY APPOINTMENT AT ONE OF OUR LONDON OFFICES. WE EXPORT TO ALL COUNTRIES, TAKE AMEXCO, ACCESS AND BARCLAYCARD.
CONTACT TONY WINTER ON 01.636.8210 OR 01.631.4818 AND IF UNAVAILABLE THEN LEAVE A CALL-BACK MESSAGE (CLEARLY STATING YOUR TELEPHONE NUMBER AND NAME) ON THE 24-HOUR ANSWER-PHONE, WE CALL BACK ANYWHERE IN THE WORLD.

IMPORTANT!!! No hardware is any value without the software, and our software is unequalled. We give you a discount to set you going. Just decide on the system you intend purchasing, and take 10% of its value off the price you would have to pay for the software. You could get the software free with the hardware if you choose the best system we sell.

SUPERBRAIN * SUPERBRAIN		COMPUSTAR * COMPUSTAR		PRINTER * PRINTER	
64K + 320 K DISK	1950.00	64K MDL 10 VPU	1695.00	OKI MICRO-80	425.00
64K + 700 K DISK	2395.00	64K MDL 15 PRNT	1595.00	OKI MICRO-83	795.00
64K + 1.5 M DISK	2995.00	64K MDL 20 VPU	2495.00	EPSON MX80F/T	450.00
EMULATOR TERML	495.00	64K MDL 30 VPU	2695.00	TEXAS 810	1395.00
INTERTUBE III TML	495.00	64K MDL 40 VPU	2995.00	DIABLO 630	1595.00
5 MEG CORVUS. DISK	2250.00	10 MEG INTERTEC	2950.00	NEC 5530	1595.00
11 MEG CORVUS	2955.00	32 MED INTERTEC	7950.00	NEC 5510	1695.00
CORDLESS PHONES	135.00	96 MEG INTERTEC	8500.00	NEC 5525	1895.00
SHUGART DRIVES	95.00	BUS PROGRAM	975.00	QUME 5/55	1950.00
TRACTORS	150.00	BUS MANUAL	9.00	SHEET FEED	FREE.00
SHUGART 5 MEG DSK	1500.00	S100 CONTROLLER	750.00	CP.M (TM)	FREE.00
SYSTEM 1	3750.00	SYSTEM 2	4195.00	SYSTEM 3	4195.00
64K+750 K DISK		64K+5.3 M DISK		60K+2.4 MEG	.
CRT AND S100 BUS		CRT AND CORVUS		CRT AND TWIN 8"	.
IN 1 'ARCHIVES' UNIT		IN 1 SUPERBRAIN UNIT		IN 1 ABC-26 UNIT	.
MBASIC 80	150.00	FORTRAN-80	200.00	COBOL-80	320.00
CIS COBOL	420.00	PASCAL UCSD	275.00	WORD-STAR	195.00
MAIL MERGE	55.00	SUPER SORT	120.00	CBASIC	75.00
DATASTAR	190.00	BASCOMPILER	190.00	TEXTWRITER	75.00
DBMS (DATABASE)	195.00	SUPER CALC (CPM)	125.00	T/MAKER	150.00
DBMS (EXTENDED)	475.00	BUS VER 8.00	975.00	BUS VER 9.00	1075.00
MSORT & DSORT	75.00	DOS + AND DIAGS	125.00	UTILITIES	75.00

OUR PRICE INCLUDES FREE:	10% ALLOWANCES AGAINST	ANY SOFTWARE ABOVE
TRAINING SESSION	DELIVERY	5-50 DISKS *******
CABLES	6/12 MTH WARRANTY	24/48 HOUR REPAIR
EXTENDED WARRANTY IF REQD	RIBBONS & THIMBLES	MANUALS
CPM HANDBOOK	BASIC MANUAL	2000 SHEETS PAPER

IF YOU WISH TO MAKE THE WARRANTY TO 1 YEAR THEN ADD 5% OF HARDWARE COST. OTHERWISE NO MAINTENANCE SCHEDULE. SIMPLY AD-HOC CHARGES AFTER WARRANTY EXPIRATION, SAME QUALITY SERVICE.

DOS + AND DIAGNOSTICS FOR SUPERBRAIN SPECIAL . . . . 125.00 . . . . . REPEAT KEY AUTO-LOAD, RAM CHIP TEST, FAST FORMAT BOTH DRIVES, FAST COPY TRACK TO TRACK TPU TEST, RS232 TEST, SCREEN TEST, DISK TEST (VARIOUS), DISK I/O TEST.

MAIL ADDRESS G.W. COMPUTERS LTD. 55 BEDFORD COURT MANS. BEDFORD AVENUE. W.C.1.

DUE TO LONG TERM CONTRACTUAL COMMITMENTS WE ARE ONLY ABLE TO GIVE RESTRICTED APPOINTMENTS AT ONE OF OUR LONDON OFFICES. CONTACT TONY WINTER ON TELS 01.636.8210 AND 01.631.4818. ALSO 24 HOUR ANSWERPHONE. IF YOU JUST WANT LITERATURE THEN CLEARLY STATE YOUR NAME AND ADDRESS, WE WILL MAIL YOU A STANDARD INFORMATION PACK.

Which Computer?

Businessmen and professional people alike can rid themselves of day–to–day problems and increased workload with a microcomputer.

- **Accountants**
- **Estate Agents**
- **Retailers**
- **Insurance Brokers**
- **Doctors**
- **Dentists**
- **Solicitors**
- **Architects**
- **Engineers**
- **Chemists**
- **Farmers**
- **Bankers**
- **Teachers**

to name but a few

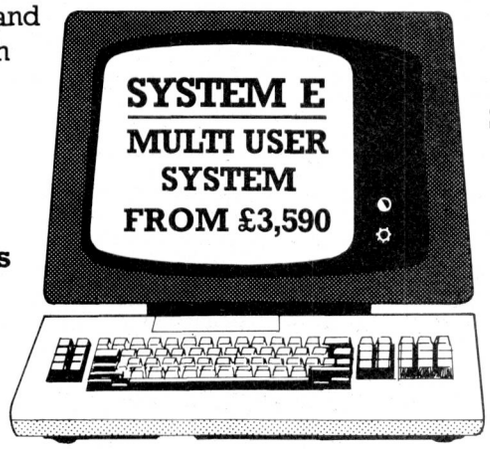

Just a few tasks a microcomputer could be organising for your company, division or department:–

- **Integrated Accounts**
- **Sales Ledger**
- **Purchase Ledger**
- **Nominal Ledger**
- **Sales Forecasting**
- **Stock Control**
- **Job Costing**
- **Estimating**
- **Payroll**
- **Word Processing**

(automatic compilation, editing and production of repetitive letters and documents).

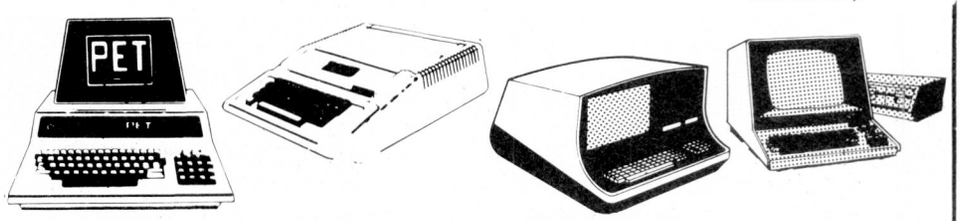

	PET	APPLE II	SUPERBRAIN	RAIR
SYSTEM A Basic computer including screen & keyboard	£399	£755	–	–
SYSTEM B As 'A', plus floppy disk drive(s) and matrix printer for small business user.	£1700	£1579	£2380	£2400
SYSTEM C As 'B', but quality printer for word processing instead.	£2150	£2050	£2830	£2850
SYSTEM D As 'B', plus hard disk for up to 5,000,000 bytes on line.	–	–	£4380	£4335

Prices exclude V.A.T. Rental, Leasing, and/or Maintenance Contracts plus System Software Consultancy available.

Johnson microcomputers

Johnson House, 75–79 Park Street, Camberley Surrey. Telephone 0276 20446

48 Gloucester Road, Bristol. Telephone 0272 422061

148 Cowley Road, Oxford. Telephone 0865 721461

SIRTON COMPUTERS

We have moved to: 29 Willow Lane, Mitcham
Surrey CR4 4NA
Tel: 01-640 6931/2/3

NOW WITH MP/M

MIDAS S100 SYSTEMS

MIDAS 1 : From £750
MIDAS 2 : From £1580
MIDAS 3 : From £2150
MIDAS 3HD : From £4750

ITHACA-DPS 1 : From £1075

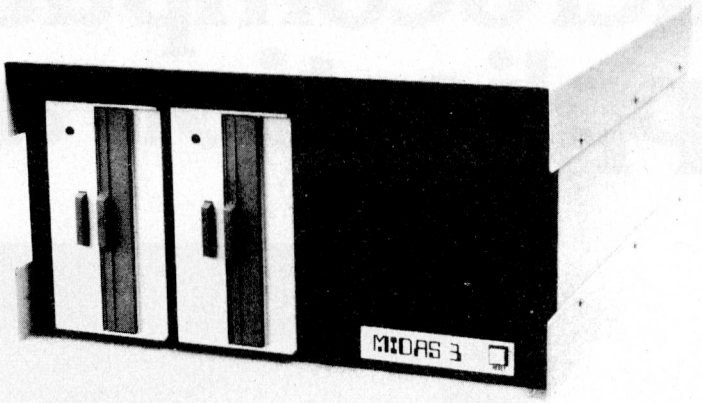

- Our versatile Z80 Microcomputers are available as standard units or custom configured to your exact specification from a comprehensive range of stocked S100 boards.
- Disc storage capacity of the MIDAS 3 can be 2M Bytes, expandable to over 80M Bytes with a Winchester Hard Disc Unit in our MIDAS 3HD range.
- MIDAS runs CP/M and MP/M Other Software includes M-BASIC, C-BASIC, FORTRAN, COBOL, CIS-COBOL, PASCAL and Word Processing.
- **A MIDAS 3, with 64K RAM and 2M Bytes storage on two 8" drives with two Serial I/O Ports and CP/M 2 only £2835**
  Multi-User System (four users) – MIDAS 3 with 112K RAM, 1 MByte disc storage on two 8" drives 8" drives and four Serial I/O Ports, and CP/M 2 + MP/M – £3850.
  Multi-user Hard Disc System (three users) – MIDAS 3HD with 160K of RAM, 1M Byte Floppy Disc and 10M Byte Winchester Disc; Four Serial I/O Ports and CP/M 2.2 + MP/M – £6300.
- Printers, VDUs and other peripherals stocked to give complete package systems at keen prices.
- Business Packages include Accounts, Stock Control, Purchase Ledger etc etc.

Boards stocked from Ithaca, Godbout, SSM, S D Systems, Vector, Micromation Mullen, Mountain Hardware, Hi-Tech, Video Vector, Pickles & Trout, Central Data, Cromemco, Thinker Toys – Send for full Price List (many available in kit form).

PROCESSOR

Z80 Starter Kit	£251
SBC100	£265
Z80 CPU's 4 MHz	from £150

EPROM

2708 EPROM (16K)	£70
2708/2716 Programmers from	£143

VIDEO

16 lines, 32/64 ch	from £104
24 lines, 84 ch	from £265

DISC CONTROLLERS

Versafloppy S/D	£215
Doubler D/D	£336
Goolbout D/D – DMA	£282

RAM

Dynamic RAM 16K – 64K	from £683
Static RAM 16K – 64K	from £205
Memory Manager	£60

I/O

2S/4P prov 4K RAM/4K ROM	£190
2S/2P or 2S/4P or 3P/1S or 4S/2P	from £154
Analogue 8 or 12 bit	from £287
Optically isolated I/O	£129
IEEE 488 Interface	£360

MISCELLANEOUS

Real Time Clock	£180
High Dens Graph/8K RAM	£333
Hi-Tech Colour	£295
Motherboards – various from	£34
Extender Board/logic probe	£39
Maths Board AMD 9511	£330

SOFTWARE

CP/M 1 & 2, MP/M, PL/1, C-BASIC 2, M-BASIC V5, XYBASIC, FORTRAN 80, COBOL 80, CIS-COBAL, PASCAL/Z, PASCAL (UCSD), PASCAL M/T, Forth, MAC, ZSID, Disassembler, Wordstar, Datastar, Magic Wand, Wordmaster, Supersort etc etc.

MAINFRAMES

We are the sole UK Distributor for Integrand Mainframes and Disc Enclosures, available in nine models including Desk Top and Rack Mounting, with or without provision for Disc Drives. All units totally enclosed, painted on all external surfaces and complete with power supply etc.

WRITE OR PHONE FOR CATALOGUE PRICES EXCLUSIVE OF VAT

Xitan
South Coast Leaders in Microcomputer Support Application and Service



Xitan – First for Business & Commercial Systems

Xitan's specialised Administrative and Operational Microcomputer Systems provide cost effective computer support for wide ranging business organisations; from low entry level, stand alone systems for the smaller business, to integrated multiuser/multitasking systems to meet the more specific needs of the larger business enterprise.

Xitan – First in Science and Research

Xitan support the more personalised requirements of the scientific and research users universities and colleges, and in government and independent research establishments with comprehensive practical experience embracing hardware, system, and applicational software.

Xitan – First in Industry

Xitan's depth in microcomputer experience is playing an increasing role in the rapidly developing industrial applications for production and process control, and in product and production development operations.

Xitan – First for Service

Xitan's local reputation is founded securely on Service– both in system development– software and hardware support, and service in the field.

XITAN SYSTEMS

Xitan Systems Ltd 23 Cumberland Place Southampton SO1 2BB Tel: 0703 38740

Cromemco SHARP North Star Horizon comart

the vic centre

Adda Computers Ltd., a major supplier of computer systems to industry and business, have opened the Vic Centre in West London. Here you can see, discuss and buy everything to do with the new VIC 20 personal computer—in person or by mail. Hardware, software, technical advice and information is available from an experienced staff of experts. Even if you already own a VIC 20, get on our mailing list to know about new developments. Remember—everything has the backing of Adda's reputation, and there's a full 12-month warranty on all hardware. The Vic Centre is easy to reach— Just off the A40, close to North Acton tube station.

VIC 20



Not just a computer but a whole expandable system

AT ONLY £189·95 inc.VAT.
special cassette deck £44·95 inc.VAT.

The VIC 20 is a fully-fledged, easy-to-use computer. It's the core of a great expandable system, with full-size keyboard operation. First-time users can work it immediately with plug-in program cartridges, using your own colour TV to get up to 24 colours on screen, and three different sound tones. Or write your own programs in BASIC. The VIC 20 lets you build a system as needs and budget dictate. You can expand its memory to 32k Byte with Plug-in modules, and transfer data to external storage units. So the VIC 20 is more than just a personal computer—and its system will expand to put it even further ahead.

SHOP ADDRESS: Adda Computers Limited, 154, Victoria Road, Acton, London, W3. Telephone No. 01-992 9904.
OPEN: 10 am—6 pm (Tuesday—Friday), 10 am—5 pm (Saturday)

MAIL ORDER to: Adda Computers Limited, FREEPOST, London, W13 0BR or telephone your order (24 hours a day) to 01-992 9904 quoting your BARCLAYCARD OR ACCESS number.

TERMS AND CONDITIONS: All goods sold subject to Adda' terms and conditions of sale. Full details available on request, but include: 7 day money back guarantee. Adda 12 month hardware warranty. Please allow 14 days for delivery. Allow 7 days for personal cheques to be cleared. Quoted prices are inclusive of VAT.

MAIL ORDER FORM to: Adda Computers Limited, FREEPOST, London, W13 0BR (No stamp needed).

Goods Required _____ Price _____

_____

_____

_____

Add £2.00 p. & p. for orders under £50.00

Total £ _____

Signature: _____

Name: _____ (BLOCK CAPITALS PLEASE)

Address: _____

_____

_____

_____ Postcode _____

* I enclose a cheque, made payable to Adda Computers Limited for

£.....

* Please charge my Barclay/Access account. My account number is

.....

* Please add my name to your mailing list

* Delete as applicable

Date:.....

adda

micronetworks

SOLVE THE STORAGE SHORTAGE

with ten multi-user megabytes

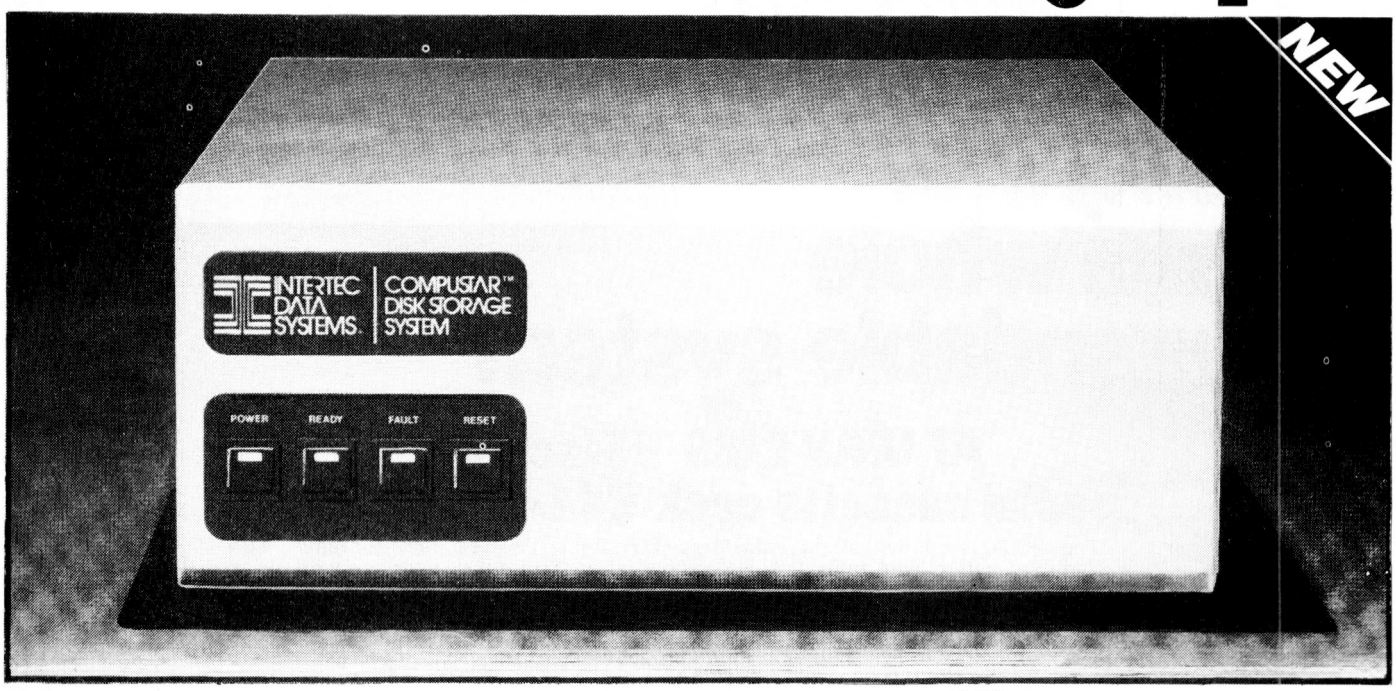

COMPUSTAR™

Our New CompuStar™ 10 Megabyte Disk Storage System (called a DSS) features an 8 inch Winchester drive packaged in an attractive, compact desktop enclosure. Complete with disk, controller and power supply. Just plug it into the Z80 adaptor of your SuperBrain and turn it on. It's so quiet, you'll hardly know it's there. But, you'll quickly be astounded with its awesome power and amazing speed.

The secret behind our CompuStar DSS is its unique controller/multiplexor. It allows many terminals to "share" the resources of a single disk. So, not only can you use the DSS with your SuperBrain, you can configure multiple user stations using our new series of CompuStar™ terminals, called Video Processing Units or VPU's™.

Whether you need an extra 10 megabytes for your SuperBrain or an enormous multi-user network, the CompuStar™ DSS solves your storage shortage problems. Sensibly. And economically. Plus, your investment is protected by a nationwide service

Providing efficient on-site or depot maintenance.

Get a demonstration of this extraordinary new system today. Call or write:

MICRO NETWORKS LTD.
60 PALL MALL, LONDON
Tel. 01-839 3701

DISK STORAGE SYSTEMS

10 MB Winchester **£2,945**

- Shugart 8 inch mechanism
- Quiet, table-top operation
- Can be used with CompuStar or SuperBrain Video Terminals

VIDEO PROCESSING UNITS

Model 10 VPU **£1,595**

- 64K Internal Memory
- Integral CRT, CPU, & Keyboard
- Download programmable

Model 20 VPU **£2,195**

- 64K Internal Memory
- 350K Dual Disk Capacity
- Integral CPU, Disks, CRT & Keyboard

Model 30 VPU **£2,595**

- 64K Internal Memory
- 750K Dual Disk Capacity
- Integral CPU, Disks, CRT & Keyboard

Model 40 VPU **£2,895**

- 64K Internal Memory
- 1½ MB Dual Disk Capacity
- Integral CPU, Disks, CRT & Keyboard

ALSO

SUPERBRAINS

Model DD **£1,845**

- 64K RAM Memory
- 320K Dual Disk Capacity
- Dual Serial Ports
- Integral CPU, Disks & Keyboard

Model QD **£2,195**

- 64K RAM Memory
- 670K Dual Disk Capacity
- Dual Serial Ports
- Integral CPU, Disks & Keyboard

Model DT **£2,595**

- 64K RAM Memory
- 1·52 MB Dual Disk Capacity
- Dual Serial Ports
- Integral CPU, Disks & Keyboard

FULL RANGE OF SOFTWARE AND PRINTERS ALSO AVAILABLE.

Visit our Showroom at:
60 PALL MALL
and see the Complete Range

DEALERS' ENQUIRIES INVITED

ONLY FROM CPS

CBM 8024 WITH IEEE, RS 232C, OR CENTRONICS COMPATIBILITY

FROM £925.00

CPS ARE THE SOLE SUPPLIERS OF THIS UNIQUE PRINTER which has our own factory-fitted adaptations for RS232C, or Centronics compatibility. The CBM8024 operates at 160cps, with ASC11 96 character set on tractor-fed continuous fan paper giving an original and up to 4 copies on paper from 4 to 15"wide. Ideally suited to accounting, mailing lists, address labelling etc.



IEEE COMPATIBLE £925 +VAT

CENTRONICS COMPATIBLE £945 +VAT

RS232C COMPATIBLE £965 +VAT

OLYMPIA SCRIPTA



The Olympia Scripta daisywheel printers have a wide selection of super-sharp typestyles and are renowned for lasting reliability.

Scripta RO
£826 +VAT

Scripta KSR
£990 +VAT

Free Interface of your choice when you buy a Scripta!

IEEE→Centronics
IEEE→RS232C
RS232C→Centronics
including Apple, Serial and Parallel cards.

RUTISHAUSER

Cutsheet feed→Qume
£525 +VAT

Tractor feed→Qume
£145 +VAT

OKI Microline 83



RS232 interface or Centronics compatible. Friction and pin feed, 120 cps with 4 character sizes. 96 character set with 64 block graphics.

£695 +VAT

RICOH 1600S



Available with IEEE, RS232C or Centronics compatibility.

£1450 +VAT

WABASH Floppy Discs

5¼SSDD including plastic library case £19.95 +VAT

QUANTITY DISCOUNTS

Phone us for the latest discounts on all 5¼ and 8" Discettes, including special formats!

CPS "CUSTOM"



80 column screen*Basic 4*DOS 2.0*Upper & lower case on screen*Graphics*Ideal for word processing*Supports the full range of Commodore software*.....and yes, this price is true!

£645 +VAT

CBM 32K4000 Series



£555 +VAT

CPS ARE DISTRIBUTORS FOR
Panasonic:Cifer:Apple:Commodore
DEALER ENQUIRIES WELCOME FOR ALL LISTED ITEMS
For all information and sales phone Nick Ashburner

CPS (DATA SYSTEMS) LTD
Third Floor, Arden House, 1102 Warwick Road,
Acocks Green, Birmingham B27 6BH.
Telephone: 021-707 3866
Telex: 312280 CPS G
A member of the CPS Group

SIX TOUGH QUESTIONS YOU SHOULD ASK BEFORE BUYING A MICRO.

1. Is it easy to use?
2. Are the programs versatile?
3. Is it absolutely reliable?
4. Does it have a national network of distributors and dealers offering full service and support?
5. Is it competitively priced?
6. Can you see proof of performance?

With the new Adler Alphatronic the answer is 'yes' to all these questions. Because Alphatronic is the micro that was specially designed for the small businessman. To cut paperwork, cope with accounts, payroll, stock control, VAT — and generally make business, and cash, flow more smoothly. When it comes to versatility, price, reliability and performance, Alphatronic is outstanding value.

The Alphatronic P1 costs £1600* and includes a 2000 character screen, keyboard and integral double density floppy disk unit. Alphatronic P2 complete includes 2000 character screen, keyboard, two integral double density floppy disk units together with a dot-matrix printer, CP/M† disk and manual and costs £2345.*

* Prices exclusive of VAT. † Trade mark of Digital Research Corp.



Printer not included on P1 model at £1600.

FREE

With model P1: a two disk basic teach-in course worth £85.
With model P2: a two disk data retrieval program worth £120.

Send back the coupon and we'll tell you how Alphatronic could be the answer — your answer.

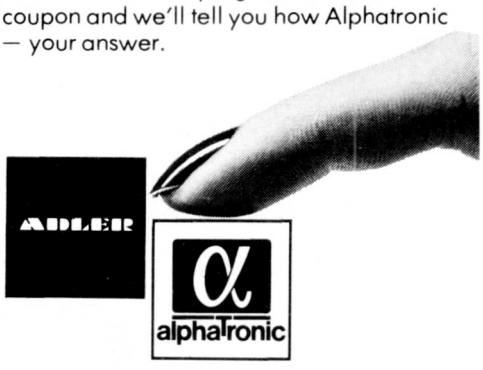

ADLER's NEW £1600 MICRO. BRILLIANTLY SIMPLE ALPHATRONIC.

Alphatronic Division, **TRIUMPH ADLER (UK) LTD.**
(formerly Adler Business Systems Ltd.)
27 Goswell Road, London EC1M 7AJ. Tel: 01-250 1717.

Please send me further details on the Adler Alphatronic.

Name.....
Company.....
Address.....
.....
Telephone.....

IBS 81 October 20-29. Hall 4 Stand 321.

INTELLIGENT ARTEFACTS LTD

WIDEBAND SPEAKEASY



- Speech output for any Micro can be used with the Acorn, Pet, ZX81, Apple, NSH etc.
- Uses Phoneme Access to produce clear and true speech
- Has INFINITE Vocabulary
- Comes complete with PSU and speaker
- Software and Manual included

only **£89** + VAT
Cable £9.50 + VAT
Extra Dictionary £2.50 + VAT P+P £4.50 + VAT

WIDEBAND CARTALKER

This is an intelligent speech unit which can be used to give programmed speech output in response to warning signals generated by your car, i.e. choke, handbrake, seatbelts etc. Can be used on industrial machinery, household appliances etc. Z80 Based.

Only **£149** + VAT P + P £4.50

IA SMALL ARM ROBOT



- Low cost Robot Arm
- Wrist, hand, elbow, shoulder movement
- Can be used with any micro
- Parallel input
- Suitable for Pet User Port etc.
- Ideal for Education, Industrial Training, developing robot control software etc.

Only **£349** + VAT
Cable **£9.50** P + P £15 + VAT

WIDEBAND CONTROLLER

Controller Card capable of driving six stepping motors and 3 solenoids

- Parallel input
- Suitable for Pet user port etc
- Six 16-volt outputs
- 3, 1 amp solenoid outputs
- own integral power supply

Only **£148** + VAT Cable £9.50

Intelligent Artefacts Limited
Cambridge Road, Orwell, Royston, Herts. SG8 5QD
Tel: CAMBRIDGE (0223) 207689



TODAY'S BEST PRICE/PERFORMANCE RATIO FROM A MICRO COMPUTER

ALTERNATIVE MODELS
'QD' 700K DISK **£1995**
'S' 800K DISK plus Function Keys etc **£2095**

£1695

Standard Model 64K RAM/320 DISK

SUPERBRAIN

PACKAGES

The efficient business system consists of standard Superbrain Microline 80 Printer

£2045



Individual Price: **£395** (inc. serial interface)



Microline 80

Complete word processing system – including 'Word Star' and 'Mailmerge', standard Superbrain, Diablo 630 printer and training.

£3495



Individual Price: **£1595**



Diablo 630

Software Options: we market a full supporting range of standard languages, including, BASIC @ £175, FORTRAN @ £225, PASCAL @ £225, and CIS COBOL @ £425. We have a growing and comprehensive library of software programmes available:

Incomplete Records for Practising Accountants @ £750

Graphics – Hardware @ £435 with Software from £80

Integrated Accounting System – Stock Control @ £350, Order Entry and Invoicing @ £350, Sales Ledger @ £450, Purchase Ledger @ £450, General/Nominal @ £400, Name & Address @ £250, Complete Package so far @ £1650 plus Payroll @ £500.

Financial Modelling – T/Maker @ £155 and Micromodeller @ £645.
Data Base Management –DMS @ £400
Word Processing – Wordstar @ £250 and Mailmerge @ £75.
Also available – Form Creation, Debugging etc., Alternatively we will design and implement software packages to suit your specific needs.

KGB

MICROS LIMITED

KGB Micros Ltd., 14 Windsor Road, Slough, Berks. SL1 2EJ Tel: Slough 38581

Prices exclude V A T and are subject to fluctuation, please phone for an up-to-the-minute quote

ATOM-PET-UK 101 USERS

(and other 6502/680X Motorola users)

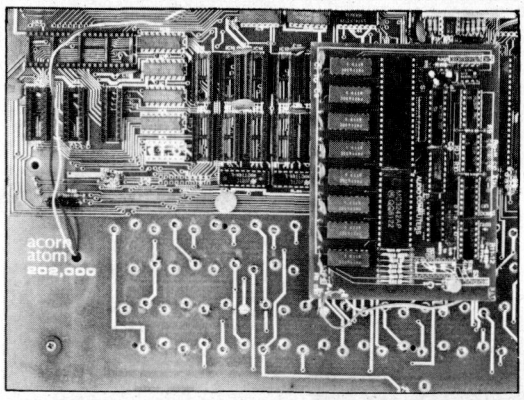

BEFORE YOU BUY ANY STATIC RAM EXPANSION

CONSIDER THE FACTS

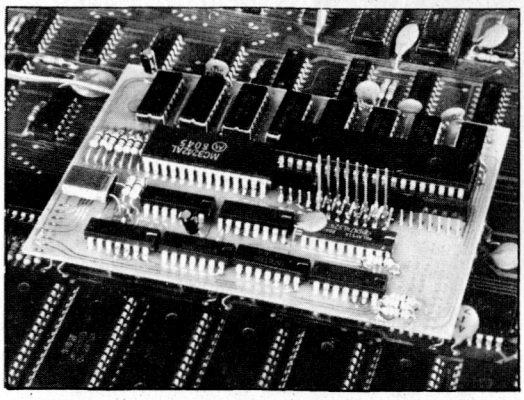

Besides the price, which is nearly half that of the equivalent product equipped with static Ram, DRC modules offer the following important advantages over other Ram expansions:

1) **SAVING ON EXPANSION PORT:** since most microcomputers have only one, the expansion port is precious. The DRC module is microprocessor attached and therefore saves you the port for other uses.

2) **EASY ASSEMBLY AND INSTALLATION:** you obviously need to know a little about basic electronics to install the DRC module, but you should have no difficulty with the instructions provided. The most powerful 64K requires you only to recognize the MPU chip (6502 or 6802), remove it, insert it into the reserved socket on the module and plug the module into the now empty MPU socket on the computer board, with no wires to connect.

3) **POSSIBILITIES:** the basic module offers 16K Ram. Further expansion is simply a matter of inserting 8 more D Ram chips (around £10.00). The 64K is implemented with the 'secondary memory' concept. It extends the basic program storage and working space to 96K bytes. In the case of Pet, the operating system (SMOS) consists of a set of subroutines residing in $A000 – AFFF. We hope to extend the results to other Micros very soon; its immediate application is to extend the basic Atom to 32K, the 8K Pet to 40K and the UK 101 (8K) to 40K. The extra memory can be used for machine code routines.

4) **PRICE:**

6502	Kit	Ready built
16K expansion	£39	£47
32K expansion	£52	£67
64K expansion	£87	£95

SINCLAIR ZX81 RAM EXPANSION

The clever ZX81 has got a new friend:

We have designed a new RAM expansion especially to fit inside the Sinclair ZX81 – under the keyboard, with a capacity of 32K bytes. This is a little inconvenient in that you have to solder the connector between the logic board and the Sinclair computer board, but it offers you saving on the expansion port to use a wide range of interface cards – parallel, IEEE, opti-isolator card for domestic appliances, etc (available October).

In any case, we offer the RAM pack with 16K or 32K bytes and the super pack with 64K bytes for the advanced programmer which simply plugs into the expansion port of the ZX81.

ZX81	Kit	Ready built
16K expansion	£33	£40
32K expansion	£45	£53
16K Ram pack	£38	£43
32K Ram pack	£50	£58
Power supply	£6	£8
Super 64K pack	£87	£95

Audio Computers 87 Bournemouth Park Road Southend on Sea Essex
Telephone (0702) 613081

KSD in association with Kent Barlow Information Associates present



Eagle Eye®

The Database Management and Information Retrieval System For CP/M* Microsystems

- Mainframe retrieval power at micro cost using internationally accepted EURONET Command Language.

- Sets new standards in clarity of instructions. Entire system is menu driven to make it really friendly to users, experienced or otherwise.

- Design and update your own database with over 50 searchable terms and relocate any record by any combination of terms.

- Each record can be up to 472 characters. Each database up to 8 megabytes. Typical retrieval time is 6 seconds using any term in 10,000 records.

Search results can be viewed, printed or filed for subsequent processing into any format which makes Eagle Eye ideal for custom built information systems, mailing lists, personnel records, cataloguing, market research, sales management, medical and veterinary records, correspondence filing, customer profiles, product lists, price lists, project research, insurance client records, legal research, enquiry services for libraries, museums, sales promotion, recruitment etc., etc., etc.

Eagle Eye is available from Leading Software Dealers or direct from

SOLE UK DISTRIBUTOR
KATOTEK SYSTEMS DESIGN LTD
21/25 GOLDHAWK RD LONDON W12

Recommended Retail Price £310 (excluding VAT)
Dealer enquiries welcome.

*CP/M is a trademark of Digital Research.

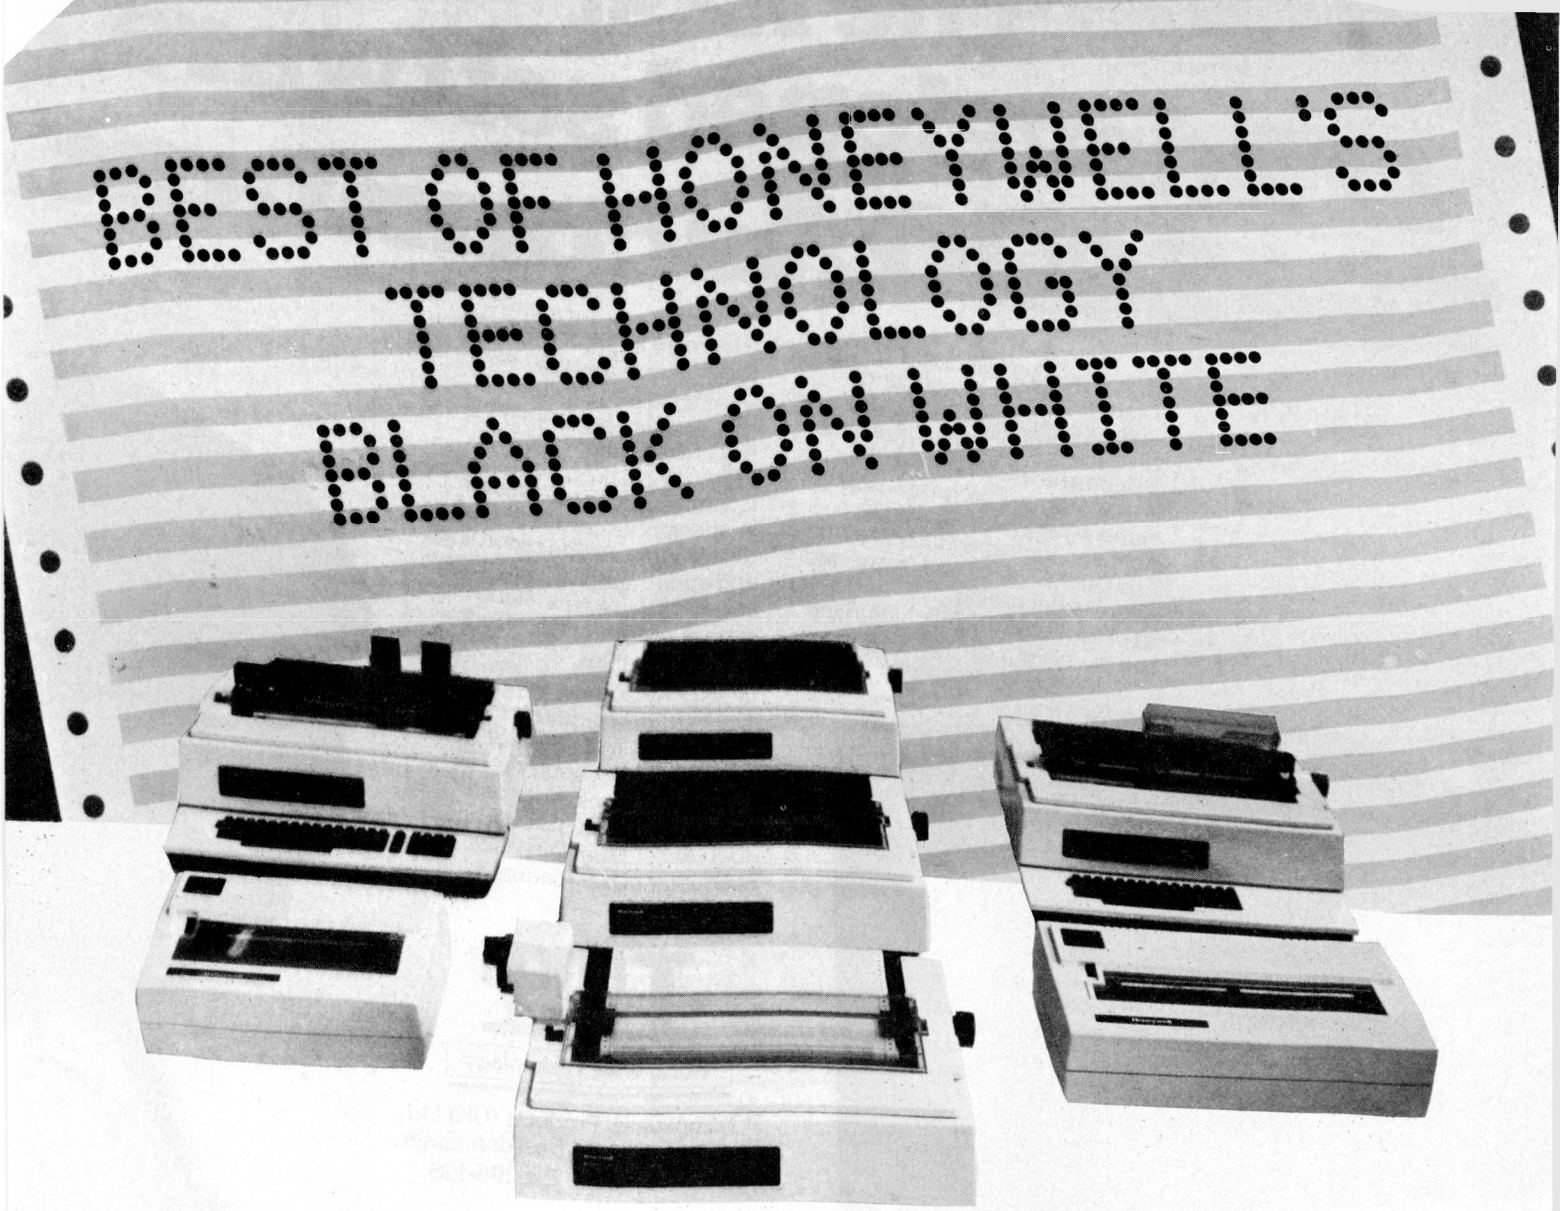

Honeywell printers

Honeywell printers: the logical landfall of a sophisticated information technology. Depending on application, there are models with up to 180 cps optimized bidirectional printing with serial or parallel interface for optimal use of the computer.
Honeywell's printers are backed by an advanced technology acquired through many years' experience in data processing. The printers' simple, linear design and inherent product quality guarantee maximum reliability and immediate machine utilization. Being modular and flexible, Honeywell's printers can easily be adapted to all specific application requirements.

Honeywell

Honeywell Information Systems Italia

If your are interested in receiving further information on Honeywell's products, fill in the coupon and mail it to:

HONEYWELL HISI - Via Tazzoli, 6 - 20154 - MILANO

Name .....

Surname .....

Company .....

Address .....

The first ITT developed software The 2020 Accountant

The 2020 Accountant is a comprehensive Accounting software package designed to run on the ITT 2020 Micro computer. It performs the functions of:– Sales Ledger, Purchase Ledger, General Ledger, VAT, Sales Analysis, Transaction Recording, Age Debt Analysis and Name and Address Recording.
All of the items are fully integrated and the system can run a set of up to 10 ledgers concurrently.

The main application areas for this software are seen as:– Small Businesses, Practising Accountants, Incomplete Records, Managing Estate Agents, Time Recording/Job Control and Contract Control.
In addition, its comprehensive detailed transaction recording and audit capability will make it suitable for use as a 'stand alone' system within the Cost Centres of large companies.

HARDWARE

The hardware requirement for the system is as follows:– 48K ITT 2020 Micro Computer, 3 ITT 2020 Disc Drives, Monitor, Printer, 16K Memory Extension Card, 2020 Accountant Diskettes, 2020 Accountant User Manual.

ITT

World-wide Technology

ITT Consumer Products (UK) Ltd.,
Chester Hall Lane, Basildon, Essex.
Tel: Basildon 3040 Ext. 196-198



CHROMASONIC electronics

48 JUNCTION ROAD, ARCHWAY, LONDON N19 5RD 100 yds from Archway Station & 9 bus routes
TELEPHONE 01-263 9493 01-263 9495

YOUR SOUNDEST CONNECTION IN THE WORLD OF COMPONENTS AND COMPUTERS

PET



NEW 12" Green Screen with end of line bleep

4016 16K RAM
4032 32K RAM
4040 Dual Drive Disk

402280 column tracks feed. as 4008 8k RAM etc.

4022 80 column tracks feed.
3023 80 column friction feed.
C2N Cassett Unit.

For the business man we stock the **8000** range inc. **8032** and **8050** with daisy wheel printers coming soon.

PHONE FOR MOST COMPETITIVE PRICES
WORD PROCESSING AND 32K SYSTEMS
PHONE FOR DETAILS

VIDEO GENIE

£279 EG3003



Utilises Z80, 12 K level II Basic, Integral Cassette Deck, UHFO/P, 16K RAM, all TRS80 features. Simply plugs into monitor or UHF TV, With V.U. Meter.

PARALLEL PRINTER INTERFACE INC CABLE. . .	33.00
CHROMASONICS PROGRAMABLE SOUND KIT. . .	24.95
SOUND KIT (FITTING EXTRA).	7.00
LOWER CASE KIT (FITTING EXTRA).	27.50
COLOUR KIT (FIT)	
COLOUR KIT (FITTING EXTRA).	34.95
EXPANSION BOX WITH/WITHOUT RS232	215/185
16K/32K RAM CARD	94/129

APPLE

APPLE II PLUS
Complete Systems

48K Machines £595.00



DISK DRIVE WITH CONTROLLER £349.00

DISK DRIVE WITHOUT CONTROLLER £299.00

ACCESSORY CARDS, SOFTWARE ALL AVAILABLE – PHONE FOR DETAILS

PRINTERS



EPSONMX80 £359
Dot-matrix printer with Pet graphics interface. Centronics parallel and serial. Pet and Apple compatible. True bidirectional, 80 cps.

EPSON MX80 FT/1 £399
Dual single sheet friction and tractor, 9 wire head, true descenders.

INTERFACES AND CABLES FOR APPLE II, PET, TRS80, RS232, UK101, SHARP SUPERBOARD ALL AVAILABLE

EPSON MX80 FT/2 £449
An FT/1 with high resolution graphics.

EPSON MX70 £259
Tractor feed, 7 wire head high resolution graphics.

SEIKOSHA GP80A £199
Dot matrix 5 x 7, 80 columns 30 cps. graphics, double width characters.

JUST PHONE FOR FURTHER DETAILS

MONITORS



Green monitor 9" (illust)	£95.00
MONI 9" (illust.) B & W	£82.00
Hitachi professional monitors	
9" Black & White	£99.95
12" Black & White	£149.00

UK 101

UK101 Kit inc 8K memory	£125
Ready Built inc 8K memory	£175
Complete in case	£199
4K Expansion 8x2114	£14
New Memory Expansion kit 32k	

PRICE ON APPLICATION

Printer Interface	
Sound generator plus PIO kit	£29.95
Cases	£24.50
NEW	
Chromasonics Sound	£24.95
Colour Kit	£84.95

Inc. Demo Tape & Full Documentation Send for details

VIC 20

VIC20 - £165

CASSETTE DECK £34.95

Colours
24 total. 8 for characters, 8 for border, 16 for screen mixed as you wish. Basic colours on program keys are black, white, red, blue, light blue, green, yellow, and purple.

Sound
3 Tone Generator for music
"White Noise" Generator for language and sound effects
Each Generator gives 3 octaves.
Reproduction is through tv speaker.

Character/Line Display
22 Characters by 23 lines
64 ASCII characters, pet-type graphic character set

Keyboard
DIN typewriter keyboard with 8 programmable function possibilities via 4 special function keys. Colours are directly addressable from the keyboard.

Peripherals/Accessories
VIC Datacassette with special interface to guarantee high reliability read/write quality (PET/CBM compatible).
VIC 1515 - Low cost VIC DOT Matrix printer (July Release)
VIC 1540 - Single disk unit with 170k Byte capacity (July Release)



£165

TANTEL

PRESTEL BY TANTEL

COMMUNICATION AT YOUR FINGER TIPS FOR BUSINESS & HOME. UP TO DATE INFO

180,000 pages of information on Travel, News, Investment, Holidays, Hotels Etc., Etc.,

£170

TANTEL IS POST OFFICE APPROVED. SEND FOR DETAILS.
DEMONSTRATION AVAILABLE AT OUR SHOWROOM

BARCLAYCARD VISA

Please add VAT 15% to all prices. Postage on computers, printers and cassette decks charged at cost, all other items, P&P 30p. Place your order using your Access or Barclaycard (Min. tel order, £5). Trade and export enquiries welcome. Official orders welcome.

We welcome Access

No experience required to shop here!

We fully understand that to the uninitiated the first look at the Micro Computer world can be somewhat confusing, to say the least. But of course, to the experienced operator or programmer it's all plain—Kilobyte! Well, you don't have to be experienced to shop at SRS, we try to keep things as simple as possible and cater for everyone's needs. The businessman thinking about a small computer for the office or the advanced hobbiest requiring all the extra accessories for the micro system at home. We'll be pleased to give you all the help you need, advising you, in plain English, and plan the system that's just right for your needs—not one 32K RAM Module more! And at the end of the day, with our LOW PRICES and all the bits you were advised NOT to buy, we'll have almost certainly have saved you a great deal of money too! Call in and see us soon.



ATARI
for the HOME & OFFICE

The advanced electronics of the ATARI 400 and 800 systems make them simple to use, even if you've never used a computer before. Yet, for the sophisticated user, they offer full user-programmability. In BASIC or Assembly Language. Connects to any TV. You simply attach them to any home television set, causing no interference to TV reception. And entertainment programs turn your television set into an entertainment centre for the whole family. Call in and find out more about these exciting new Micro Computers.

Model 400



16K RAM £300

Cassette recorder.....**£43.48**
Disc drive.....**£300.00**
Thermal printer.....**£230.43**

Model 800



16K RAM £560

Plain paper printer....**£478.00**
Printer Interface **£117.39**
16 Plug-in RAM.....**£56.50**



NASCOM II

This excellent single board Micro Computer is supplied ready built and tested with keyboard but no memory

£265

Power supply **£32.50**
4 x 4118 Memory chips (4K).....**£20.00**
48K RAM Board.....**P.O.A.**

apple® computer
Sales and Service

APPLE II 48K..... £807
Disc Drive with controller.. £383
Additional Disc Drive £299
Video Monitor £127

Call in and see us for:
Printers, video monitors, software, discs, tapes etc. Many new items coming along soon.

ACCESS & BARCLAYCARD WELCOME — HIRE PURCHASE AVAILABLE
FREE SECURICOR DEL. ON ORDER OVER £100
All prices shown are excluding V.A.T. E. & O.E.

SRS MICROSYSTEMS

161 Bramley Road,
Oakwood, London N14 4XA

Telephone: 01-363 8060
(Closed Monday)



LONDON COMPUTER CENTRE

RADIO SHACK DAISYWHEEL PRINTER II £950

60 CHARACTERS PER SECOND — THE FASTEST DAISYWHEEL PRINTER

*** EXCELLENT PRINT QUALITY — SUPERIOR TO MOST FAMOUS MAKES * BUILT IN PROPORTIONAL SPACING * LOOK AHEAD LOGIC * USES RICOH RP-1600 DAISYWHEELS**

Heavy duty commercial daisywheel printer, with high quality printout, coupled with low noise necessary for office environment * 124 chrs * upper/lower case * 10/12 chrs per inch giving 126 & 163 columns * 15 inch wide friction platten * bolding * underline and a hjost of other features.
* Centronics type Parallel interface as standard. * Options: Series interface **£60**, PET Interface **£65**, **APPLE** interface £75.

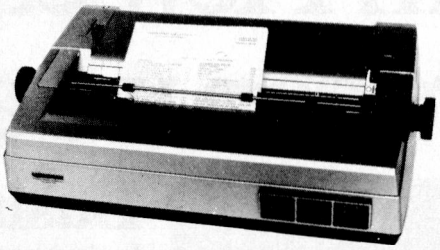

OPTIONAL BI-DIRECTIONAL TRACTOR FOR RICOH RP-1600

RADIO SHACK DAISYWHEEL II £95

Other Daisywheel Printers

QUME RO	**£1550**
QUME KSR	**£1795**
NEC RO	**£1795**
RP-1600S	**£1500**

SUPERBRAIN WITH NEW EXTRA FEATURES FROM £1795*



- *** 16% Greater Disc Capacity**
- *** Faster disc Access**
- *** Auto Repeat on all Keys**
- *** 18 Programmable Keys**

Now with multi-coloured dedicated keys for Magic Wand and Wordstar; the ultimate word processors.

* £ = $1.80

EPSON DUAL MODE PRINTERS

LETTER QUALITY & STANDARD DOT MATRIX IN ONE LOW COST UNIT

MX-80 F/T £375
LETTER LIKE PRINT QUALITY
3 WAY PAPER HANDLING
1. Leterheads or A4
2. Fanfold
3. Paper Rolls
LOW NOISE
132 COLUMNS PER LINE
JAPANESE RELIABILITY
MX-80 F/T2 £399
MX-100 F/T £495



The only full 15" width platten printer with dual print modes & built in dot matrix & built in hi-res. graphics.

Full specification as the MX-80 F/T.

AUTHORISED TANDY DEALERS

COMPLETE MODEL I 48K SYSTEM

SPECIAL OFFER: LIMITED PERIOD 48K System — 16K keyboard, 32K Expansion Interface, dual Disc Drives, Green VDU, complete with all cables. **£999**

16K keyboard with UHF Modulator	**£375**
16K System with VDU & Cassette	**£475**
32K Expansion Interface	**£289**
Dual Disc Drives	**£399**

MODEL II
from £1999 including CP/M

State-of-the-art generation computer. Over 10,000 already sold in USA. 8 slot bus ensures expansion to hard discs and other peripherals. 76 key professional keyboard. Self test on power up. CP/M 2.2, TRSDOS & Level III BASIC are standard.
CP/M 2.2 enables a vast range of CP/M software to be used on the MODEL II.



MODEL III

From £550

16K without disc drives	**£550**
48K without disc drives	**£599**
48K with disc drives	**£1399**
With Epson MX-80 and Scripsit for Wordprocessing	**£1799**

CP/M SOFTWARE WORD PROCESSORS

WORDSTAR	**£275**
WORDSTAR WITH DEDICATED KEYS	**£340**
WORDSTAR MAIL-MERGE	**£65**
MAGIC WAND	**£185**
MAGIC WAND WITH DEDICATED KEYS	**£250**
SPELLBINDER	**£185**
SPELLBINDER WITH DEDICATED KEYS	**£250**

DATA BASE SYSTEMS

DBASE II RELATIONAL DATA BASE	**£375**
CONDOR	**£250**
TIM	**£75**

CRITICAL PATH ANALYSIS

MILESTONE	**£250**

TRS-80 MODEL I SOFTWARE

ELECTRIC PENCIL (DISC)	**£60**
SCRIPSIT (DISC)	**£61**
SCRIPSIT (CASSETTE)	**£25**
MAIL-MERGE FOR PENCIL & SCRIPSIT	**£45**
VAT AID PROGRAMME	**£45**
CCA DATA MANAGEMENT SYSTEM	**£125**

FINANCIAL PLANNER/ MODELLING

T/MAKER	**£175**
TARGET	**£250**
MINI-MODELLER	**£350**

THE SPECIAL LCC APPLE SYSTEM

48K Apple, Dual 40 Track Disc Drives & 12 Green Screen Monitor	**£1395**
Double Vision 80x24 Card	**£170**
CP/M Softcard	**£175**
16K RAM (Integer) Card	**£95**
Centronics Parallel Card	**£75**
Serial Printer/Communications Card	**£85**

ALL PRICES ARE EXCLUSIVE OF VAT AND DELIVERY
DEALER ENQUIRIES INVITED ON ALL PRODUCTS

43 GRAFTON WAY, LONDON W1P 5LA (Opposite Maples)
OPENING HOURS: 11-7 MON-FRI 12-4 SA1 Tel: 388 6991/2
24 hour answer phone: 01-388 5721

A complete, portable computer system from Hewlett-Packard. What more can we add?

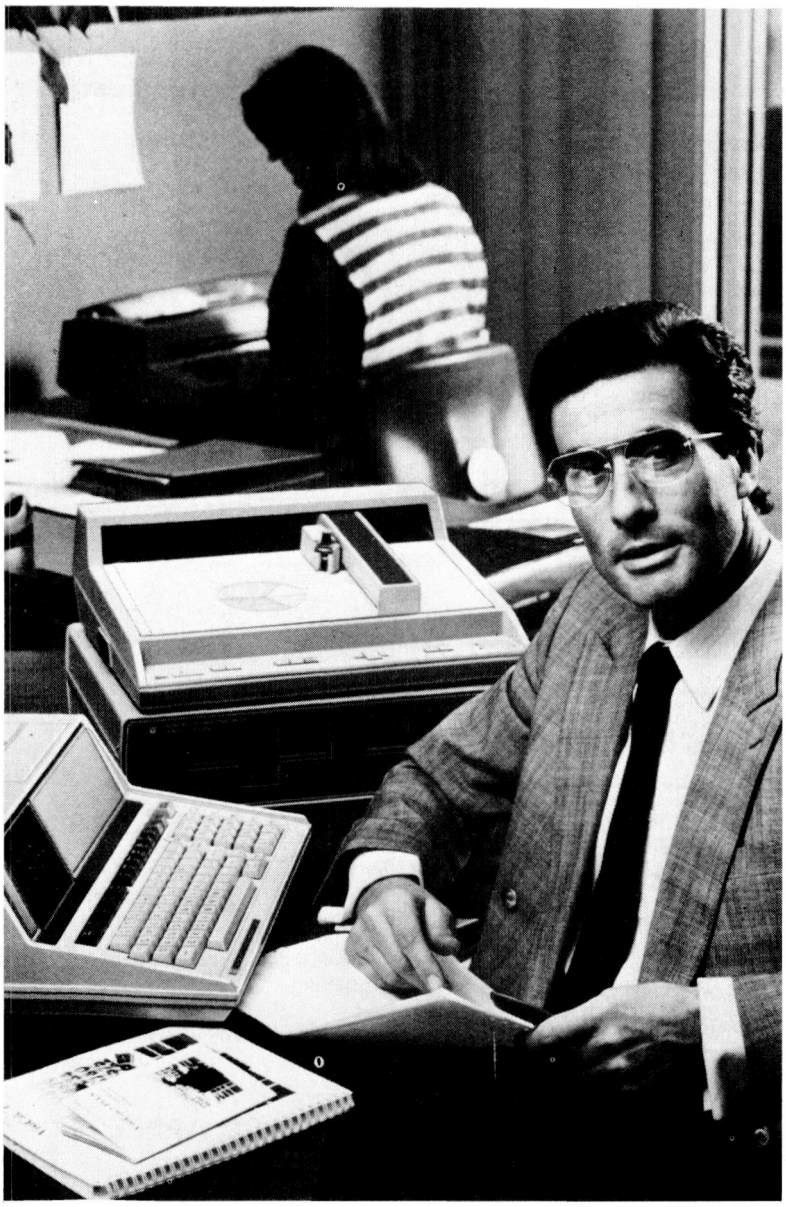

Business sense!

You'll recognise the unmistakably compact lines of the HP-85 – the friendly, typewriter-sized personal computer with built-in printer, VDU and tape drive. And you'd be excused for thinking you're looking at an exceptionally comprehensive, but ultimately limited, standalone computer. You'd be wrong! For even more remarkable than the capability Hewlett-Packard have built *into* the HP-85 is the business system they've built *around* it.

Here's the HP personal computer system with the business sense you need to help you to a better-informed management control and a higher personal productivity.

First, choose your personal computer – either the well established HP-85 or the new low-cost HP-83. Both form the ideal nucleus of an affordable, expandable personal business system.

Next, start building your system – Add HP's full-scale, compatible peripherals: flexible disc drives to provide you with fast access into large volumes of data; an impact printer, a full-colour graphics plotter... And, if you ever need more power, simply plug it in with add-on ROMs and modules.

Now, give your system the business sense you need – by selecting from Hewlett-Packard's comprehensive and still growing range of professional software. For planning budgets, creating forecasts, modifying projections, financial planning, organising data and even generating mailing lists. Software packages such as VisiCalc® PLUS allow dynamic and immediate analysis of data and projections using the "what if" facility as well as automatic and fast recalculation capabilities... Like the Series 80 Graphics Presentation Pac, which lets you prepare professional, presentation-standard graphs, charts and overhead transparencies straight off the computer... Like the HP Information Management Pac, a complete, powerful and flexible system for managing your data files.

When you build your complete personal business system around an HP computer, you can promise yourself not only the long-term reliability for which Hewlett-Packard are renowned, but the assurance that your entire system can be serviced and cared for on site by the same business computer professionals who designed it.

HP personal computers, and the business sense that goes with them, are available now from your HP dealer. Ask him for a demonstration.

*VisiCalc is a trademark of Personal Software Inc.

HEWLETT PACKARD

Contact your nearest dealer for a demonstration:

Aberdeen Tyseal Office Equipment Ltd, Tel: 29019. **Belfast** Cardiac Services, Tel: 625566. **Birmingham** John Mabon Assoc., Tel: 643 6351. Microdigital, Tel: 632 6303.
Bournemouth South Coast Computers, Tel: Wimborne 893040. **Brighton** Office Machinery Engineering, Tel: 689682. **Bristol** Decimal Business Machines, Tel: 214093.
Cambridge Cambridge Computer Store, Tel: 65334. Hi-Tek Distribution Ltd, Tel: 81996. **Chester** Microdigital, Tel: 317667. **Dublin** Abacus Systems, Tel: 711966.
Edinburgh Business & Electronic Machines, Tel: 226 4294. Robox Office Equipment Ltd, Tel: 225 3871. Holdene, Tel: 668 2727. **Glasgow** Robox, Tel: 221 8413/4.
Leeds Holdene, Tel: 459459. **Leicester** Sumlock Services, Tel: 29673. **Leighton Buzzard** Co-ordinated Computer Systems, Tel: Heath & Reach 581/2. **Lichfield** Anglo-American, Tel: 481042.
Liverpool Microdigital, Tel: 227 2535/6/7. Rockliff Brothers, Tel: 521 5830. **London** Euro-Calc, Tel: 739 6484, 636 8161, 405 3113; Sumlock-Bondain, Tel: 250 0505, 626 0487, 388 5702; The Xerox Store, Tel: 405 5659, 629 0694, 588 1531. **Manchester** Automated Business Equipment, Tel: 432 0708. Holdene, Tel: Wilmslow 529486. Microdigital, Tel: 832 6087.
Newcastle Thos Hill International, Tel: 739261. **Newport** Micromedia Systems, Tel: 59276. **Reading** CSE Computers, Tel: 61492; Sintrom Electronics, Tel: 85464.
Royston (Herts) Electroplan, Tel: 41171. **Sheffield** Microdigital, Tel: 750977. **Slough** Crellon Electronics Ltd, Tel: Burnham 4300. **Southampton** South Coast Business Machines, Tel: 22958.
Sunderland Thos Hill International, Tel: 42447. **Tunbridge Wells** D. J. Herriott, Tel: 22443/4. **Wallingford** Midas Advisory Services, Tel: 36773.
Watford Automatic & Electronic Calculators, Tel: 31571. **Woking** Petalect Electronic Services, Tel: 69032. **Worthing** Office Machinery Engineering, Tel: 207292.
CHANNEL ISLANDS: Absolute Electronic Systems, Tel: Jersey 77070.

HOW A LITTLE BUSINESS GOT THE HOMEWORK DONE.



Whether you want to enjoy a little mental gymnastics or teach yourself to program we're probably in a prime position to advise you on your choice of Computer.

We've been installing and programming complex business systems for a year now, and we apply the same degree of experience to our personal software.

A sample of our wide range of hardware is detailed below; and of course we've got all the software, peripherals and stock to go with them. So why not come along and see for yourself — we'll be pleased to discuss and advise.

				CHOICE OF MONTHLY PAYMENTS			
				MONTHS	24	30	36
	NET	VAT	Total	Deposit APR	34.2%	33.8%	33.2%
48K Apple II	725.00	108.75	833.75	83.37	41.87	35.62	31.42
48K Sharp MZ80K	450.00	67.50	517.50	51.75	25.99	22.12	19.51
64K Sharp MZ80B	1095.00	164.25	1259.25	125.92	63.24	53.83	47.48
5K Commodore VIC20	169.57	25.43	195.00	19.50	10.48	9.09	8.13
16K Commodore Pet	460.00	69.00	529.00	52.90	28.42	24.66	22.04







SHARP MZ-80K





COMMODORE PET

South West Technical Products
S109 Computer System including 128K RAM, 2 Megahertz processor with full uniflex operating system and 2½ megabytes disc storage on 8" disc drives.
Special Offer Price
£3995 + VAT

INSTANT CREDIT UP TO £750
QUANTITY DISCOUNTS



RAM COMPUTER SERVICES LTD

RAM Computer Services Ltd.,
15-17 North Parade,
BRADFORD BD1 3JL.
Telephone: (0274) 391166.



NEWSPRINT

Guy Kewney, editor of Datalink, *brings his latest compilation of news, gossip, rumours and hard micro-facts.*

At last - The Last One

The Last One — the program which writes programs — was given its first British showing at a crowded press conference last month. And by the time you read this (or at least fairly soon afterwards), it should be on sale and available on half a dozen machines.

Since The Last One was featured exclusively in February's *PCW*, two things have happened: DJ 'AI' Systems, the company set up to develop and market TLO, has launched a reputed $1 million advertising campaign and hired a team of ace programmers to develop marketable versions of TLO for various micros; and the computing world has split into two camps: those who've been to see TLO and realised its potential, even if the development versions have been rather ragged at the edges, and those who've said — in print, sometimes — that it wasn't anything special/couldn't be done/didn't exist/was a con.

The attitude of the latter group was considerably strengthened by TLO adverts, which claimed it would provide 'all the programs you'll ever need for £260', a claim considered wildly optimistic by TLO critics. And those who thought it was a con were beside themselves when the end of July — the promised delivery date — rolled round and copies of TLO still weren't leaving the DJ 'AI' offices in Ilminster, Somerset.

Now it's by no means unusual in the microworld for a product to miss its launch date — in fact, it seems almost mandatory. But when you've made yourself as public as DJ 'AI' has, and when you've aroused considerable controversy in the process, it's scarcely surprising that missing your release date should provoke deafening cries of 'I told you so' from your critics.

So what's the situation with TLO? Will it write all the programs you'll ever need? Is it really different from other micro packages that write programs? And when will it be on sale?

To answer the last one first, DJ 'AI' managing director Michael Falter was hoping that TLO would be on sale at the *PCW* show (this was written three weeks before the show). 'We thought we could get it right and ready by the end of July but, because we're such perfectionists, we're not prepared to let it go while there's still something not quite right with it,' he said. 'It's to everybody's benefit in the long run.'

What this means is that work on tidying up TLO and preparing versions to run on various machines has taken longer than anticipated. To understand how this situation has arisen, it's necessary to look at the background to our story in February's issue (which itself explains the background to how TLO came into existence).

When we received our first phone call from TLO author David James last November, The Last One didn't even have a name. It was an interesting development project which had 'spun off' from David's work on artificial intelligence and David had, in fact, become quite bored with it. In fact, the way he felt then, *PCW* could have published the program's listing and that would have been the end of it. David had spent so long immersed in the program that he couldn't see any end to it; Scotty Bambury, his backer, could see a light at the end of the tunnel, though.

Scotty had had some considerable trouble with the minicomputer system which he'd installed in his tyre company. He wanted a way of enabling himself, an ordinary businessman with no previous computing experience, to get the system to do what he wanted it to do without the time, expense and hassle involved in getting a software house to write special packages. If computers were so damned clever, he reasoned, why shouldn't they write their own programs after being told the requirements in plain, non-technical English? And, if his computer could be made to do this, why shouldn't other businessmen be able to obtain the same service?

David's program-writing routines seemed to be just what Scotty needed and he thus backed David's development work, which involved a lot of tidying up to make the system user-friendly, and the production of versions to run on different machines.

At this point, Scotty then had several options. He could have sold the program listing to *PCW* — but this wouldn't nearly have compensated for the considerable time and money invested by him and David.

He could have set up a time-sharing bureau, allowing access to the program-writing routines for those willing to pay. This, though, would tend to restrict access to DP people and wouldn't — in Scotty's view — liberate users from the DP industry's 'tyranny'.

The third option would have been to sell it at a high price to those who could afford it, but this would similarly prevent end users from benefiting.

Thus, Scotty chose a fourth course of action, to his mind the only one possible, and decided to make the routines available as widely as possible at a reasonable price.

By the time the *PCW* article was written (mid-December last year), Scotty had christened the product 'The Last One' and at this time we realised that Scotty's ideas on marketing tactics were far, far removed from traditional computer industry techniques. He has, in fact, adopted the sort of 'cavalier' attitude towards selling TLO that he has used successfully for years in selling tyres.

The first the outside world heard of The Last One was in our February article, which came out in mid-January. We sent copies to a number of papers and magazines — both computer trade press and more general publications — as we figured that any follow-up stories would mention *PCW* (one trade rag did, in a storm of childish abuse, as they clearly didn't believe in TLO).

Reactions to TLO varied from 'I want one' to 'Nonsense'; the story spread around the world and we had a few hectic weeks handling a deluge of phone calls. Before Scotty & Co made their final decision to market TLO as a commercial product, David James and David Tebbutt had promised to present a paper on TLO at a conference session at the West Coast Faire in San Francisco.

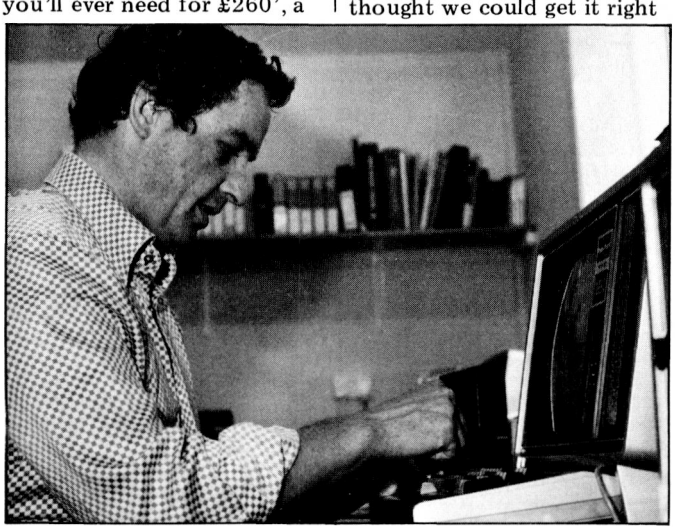

TLO author David James in his element.

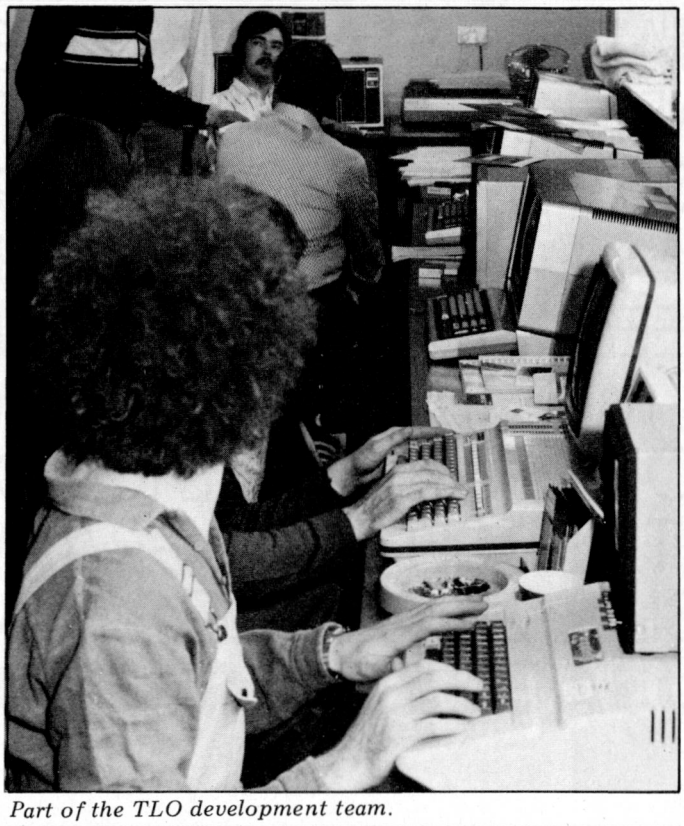

Part of the TLO development team.

made, things really started to hot up. Machines were borrowed, someone was appointed to prepare the documentation and a software house was contacted to help in 'tidying up' TLO and preparing versions for other machines. Now at this point we start to dip our toes into hot water, for it appears that there was some disagreement between DJ 'AI' Systems and the software house; as this disagreement may, by the time you read this, be subject to legal proceedings, we can't elaborate. All we *can* say is that, as a result, DJ 'AI' had to hire a team of programmers to carry on with the conversion work and this appears to have been the cause of TLO missing its launch date.

On a visit to Ilminster towards the end of July, we were able to see a 'pre-production' version of TLO in action. Yes, it works. Yes, it had been considerably tidied up since we had first seen it and yes, it'll probably be a reasonable product when it appears — watch this space!

by David Tebbutt and Peter Rodwell

'81 bug-sorting

Users of the Sinclair ZX81 must be a very uncomplaining bunch. Uncle Clive has cheerfully admitted that there is a bug in the new ROM of the ZX81, the chip that gives the machine a lot more power than the ZX80.

The bug comes in the form, he says, of a dud memory bit. 'Four or five people have been in touch about it,' he added, blandly. The way to tell if your own ZX81 has the bug in is to ask it to PRINT SQR(1/2) and see if the answer makes sense. He also admitted to a problem with the add-on memory box, which, he says, he has cured. The problem, says Sinclair, was caused by dirt on the copper contacts between computer and memory and has been cured by putting a special lubricant on the memory socket at the factory.

Now the strange thing about these two faults is that everybody I've met who has a Sinclair machine with the new ROM has the arithmetic bug, and everybody who has the add-on memory says you have to be careful using it. And the 'dud bit' problem has impressed Sinclair as serious enough to develop an add-on fix circuit, which he will add to any faulty machine sent in. That isn't the sort of thing I'd do for only five complaints, but then I'm not as meticulous as Uncle Clive.

The problem with the memory expansion isn't quite as easily cured as the Sinclair Lubrication Service seems to think. It is true that before the cure, a ZX81 (or ZX80) with this add-on box used to just go mad for no apparent reason and start moving text up and down the screen, flickety-flicker; now, it doesn't.

But that doesn't mean you can pick up the machine and move it around. The memory block hangs onto the printed circuit board itself and flaps about. This occasionally causes the signal lines to flicker and introduces untraceable errors.

Now it is one of the great strengths of the Sinclair design that it is impossible to enter a faulty instruction, because the Basic won't accept it. However, on older designs, where fault checking only occurs when you type RUN, you do at least pick up faults that have crept in later. On the Sinclair, you're stuck with them and occasionally, you can't pick them up.

On the Sinclair, they are assumed to have been purged before digestion. Just occasionally, they completely poison the machine.

So far, I've received rather fewer complaints about the ZX machines than I expected given human frailty and the very large number made and sold in a very short time.

Most complaints involve late delivery, where I can sympathise with the frustration. But I do find it a bit hard to understand why only four or five people have bothered to complain about a software bug.

IBM micro launched

IBM has deeply infuriated me by launching a cheap micro earlier than I expected and by producing an impressive design which should last for many years.

The key to the new micro is the processor chip, ostensibly an ordinary 8-bit processor (if a fast one) like the chips that power the Petappletandy machines, but one which can be turned into a much more flexible one without changing any of the software written for it.

The system itself, however, is obviously not intending to sweep the world in the first month. At a price of $3000 for a system with one disk and only 16 kbytes of user memory, the IBM Personal Computer undercuts none of the top-sellers. And with one standard program (Visicalc) it is obviously very useful, but without CP/M or any language but Basic (yet) it seems that IBM is going to get into the water carefully, no splashing until they know how deep it is.

Once the depth is plumbed, however, the machine looks to have amazing scope. The Intel 8088 processor will run the same machine code instructions, direct from memory to processor, as the bigger Intel 8086. More to the point, perhaps, it will run the more advanced, but similarly compatible versions of the 16-bit 8086 that Intel is planning over the next few years.

As things stand, in the micro world it isn't possible to close down one program (say a word processor) and start up another (say a stock control program) with any guarantee of being able to restart the first where you left off.

A proper multi-tasking system on a cheap micro, if it is intended to allow two users to run two programs on the same processor, is silly. However, its value in allowing one user to run two programs, switching from one to the other, could be enormous.

Enthusiasts who complain that there already is a multi-tasking operating system (MP/M) are assured that it isn't up to the job. That's no criticism of Digital Research, who wrote it: the normal 8-bit 8080 family micro just isn't able to run a safe operating system. Normally, multi-tasking executives run in sections of memory that users can't get at and use machine instructions that users can't use. On today's primitive micros, even the Intel 8088 and 8086, there are no such privileged instructions or areas of memory. But on the future descendents of the 8086, there will be.

At that stage, IBM will suddenly find itself in a very strong position. At the moment, there is almost no software for its machine beyond what it has prepared for the launch — but in four years' time, it will have a 16-bit micro with a mass of software, and a workable multi-task executive.

Minimakers in microwar

Apparently a 'horse before the cart computer' is one where the manuals were produced first, then the software written, and then the hardware was developed.

The machine in question is an American micro which British minicomputer builder CTL hopes will let it catch up with its home rival, Digico. Digico recently produced a rather nice little micro of its own design, and its Prince (as the company called it in Wedding Year) is building up a dealer list. When it is widely available, it should sell well, since the price is nice for what you get. And it must have made near neighbours CTL in Hemel Hempstead a bit jealous.

The CTL machine is in a very different league. It is a powerful machine, using a 16-bit processor, and you have to be fairly wealthy to buy one because the smallest model in the series costs £10,000.

By 1983, CTL hopes to be selling at least 100 of these machines a year — two per week — estimating the market for 'desk-top minis' at £100 million annually now and wanting a tenth of this.

IF ANY OF THE FOLLOWING WORDS GIVE YOU A BUZZ . . . ANALYSIS STATISTICS DE SIGN PLOTTING GRAPHICS REPORT WRIT ING SPECIFICATIONS SCHEDULES COSTING PLANT MAINTENANCE PRODUCTION CON TROL SIMULATIONS IEEE INTERFACING IN STRUMENT CONTROL MONITORING TERM INAL COMMUNICATIONS PAPERTAPE READ ING PUNCHING & EDITING SELF PROGRAM MING BASIC ASSEMBLER LANGUAGE MA CHINECODE . . . GIVE US A BUZZ (OR SEND BACK THE COUPON)

The micro comes of age. The PET has come a long way since micros were regarded as toys. It's designed and built for demanding work and this shows in the 32K memory and 80 column screen as well as in its impressive disk capacity. When it comes to languages, you'll find the PET fluent in BASIC, PASCAL, FORTH, COMAL, LISP, PILOT and ASSEMBLER.

It can be used as a complete system in itself, or can be linked to other PETs or a mainframe.

Who needs PET? And why? The list above speaks for itself, but that's only part of the story as the PET now has over 600 applications. It's good news for any engineer who's tried to get even a modest budget approved – the PET is very acceptable to the most sceptical of money people.

It's an attractive proposition, too, to DP professionals who need their fingers on the pulse and are fed up with waiting for their turn on the company computer.

In fact, it's the nearest thing to the all-purpose computer for everyone. An extravagent claim? A demonstration can prove it to be true.

The PET has track record. We've been involved with electronics for over 20 years and there are now over 40,000 PET installations in the UK. We manufacture our own microchip which is happily accepted and used by makers of other well-known microcomputers.

You get nationwide dealer back-up with Commodore. What's more, many of our dealers have specific expertise – which means they can advise on anything from business systems to specialist technical applications. So, if your particular problem is of a highly specialised nature, it may be best to contact our Information Department direct. They will then recommend the dealers who understand – and who speak your kind of language.

What does all this cost? Not a lot. In fact, our computers start at £200 and go through to £3,000 – and that will buy you a complete system.

Which is just one more reason why any professional worth his salt would be interested in a microcomputer that's made its name in the business world . . . but is far more than just an efficient business brain.



Send to: Commodore Information Services, P.O. Box 109, Baker Street, High Wycombe. Tel: Slough 79292.
I'd like to know how a Commodore PET could give me a buzz.

Name .....

Company .....

Address .....

Tel: ..... 39 PCI

COMMODORE PET
Quite simply, Britain's biggest selling microcomputer

LONDON AREA
Adda Computers Ltd
W13, 01-579 5845
Byteshop Computerland
NW1, 01-387 0505
Capital Computer Systems Ltd
W1, 01-636 3863 & 637 5551
Centralex – London Ltd
SE13, 01-318 4213-7
Chromasonic Electronics
N19, 01-263 9493/9495
Healey Management Services Ltd
E1, 01-247 2858/3149
Home and Business Computers
E12, 01-472 5107
Logic Box Ltd
SW1, 01-222 1122/5492
Merchant Systems Limited
EC4, 01-583 6774
Metyclean Ltd
EC4, 01-236 2000
Micro Computation
N14, 01-882 5104
Micro Computer Centre
SW14, 01-878 7044-7
Sumlock Bondain Ltd
EC1, 01-250 0505
The Computer Shop (City) Ltd
EC1, 01-628 3531

HOME COUNTIES
Millhouse Designs Ltd
ALTON, 84517
The Computer Shop (Banbury) Ltd
BANBURY, 3477
H.S.V. Ltd
BASINGSTOKE, 62444
M.M.S. Limited
BEDFORD, 40601/2
Bracknell Computers
BRACKNELL, 52929
D.D.M. Direct Data Marketing Ltd
BRENTWOOD, 229379 & 230480
Amplicon Micro Systems Limited
BRIGHTON, 562163 & 608331
T & V Johnson (Microcomputers Etc) Ltd
CAMBERLEY, 20446
Wego Computers Ltd
CATERHAM, 49235
The Computer Shop (Caversham) Ltd
CAVERSHAM, 481555
Dataview Ltd
COLCHESTER, 865835
DaVinci Computers Ltd
EDGWARE, 01-952 0526
Micro-Facilities Ltd
HAMPTON HILL, 01-979 4546
Cream Computer Shop
HARROW, 01-863 0833
L & J Computers
HARROW, 01-204 7525
South East Computers Ltd
HASTINGS, 426844
Bromwall Data Services Ltd
HATFIELD, 60980/67111
Alpha Business Systems
HERTFORD, 57425
Commonsense Business Systems Ltd
HIGH WYCOMBE, 40116
Kingsley Computers Ltd
HIGH WYCOMBE, 449749
Computer Sales & Software Centre Ltd
ILFORD, 01-554 3344
H.B. Computers Ltd
KETTERING, 520910
H.B. Computers (Luton) Ltd
LUTON, 426887/416892
South East Computers Ltd
MAIDSTONE, 681263
Photo Acoustics Ltd
NEWPORT PAGNELL, 610625
WATFORD, 32006 & 40698
Sumlock Bondain (East Anglia) Ltd
NORWICH, 26259 & 614302
The Computer Shop (Oxford) Ltd
OXFORD, 722872
T & V Johnson (Microcomputers Etc) Ltd
OXFORD, 721461
Arden Data Processing
PETERBOROUGH, 49577 & 67831
H.S.V. Ltd
SOUTHAMPTON, 331422
Sumlock Tabdown Ltd
SOUTHAMPTON, 26647
D.D.M. Direct Data Marketing Ltd
SOUTHEND-ON-SEA, 65787 & 64589
Scan Computers Ltd
STORRINGTON, (09066) 5432
The Computer Room
TONBRIDGE, 355962
Orchard Computer Services
WALLINGFORD, 35529
Microchips
WINCHESTER, 68085
P.P.M. Ltd
WOKING, (04867) 80111
Petalect Limited
WOKING, (04862) 69032 & 21776

MIDLANDS
Byteshop Computerland
BIRMINGHAM, 021-622 7149
C.P.S. (Data Systems) Limited
BIRMINGHAM, 021-707 3866
Camden Electronics Limited
BIRMINGHAM, 021-773 8240
Joseph Ware Associates Ltd
BIRMINGHAM, 021-643 8033
Marchant Business Systems Ltd
BIRMINGHAM, 021-706 8232
Micro Associates
BIRMINGHAM, 021-328 4574
Peach Data Services
BURTON-ON-TRENT, 44968
Catlands Information Systems
CHESTER, 46327
PEG Associates (Computer Systems) Ltd
COVENTRY, 20246
Davidson-Richards Ltd
DERBY, 366803
Taylor Wilson Systems Ltd
DORRIDGE, (056 45) 6192
Caddis Computer Systems Ltd
HINCKLEY, 613544
Arden Data Processing
LEICESTER, 22255
Roger Clark Business Systems Ltd
LEICESTER, 20455
Betos (Systems) Ltd
NOTTINGHAM, 48108
Byteshop Computerland
NOTTINGHAM, 40576
PEG Associates (Computer Systems) Ltd
RUGBY, 65756
Synchro Computing Ltd
STOKE-ON-TRENT, 825391
Walters Computer Systems Ltd
STOURBRIDGE, 70811
The Computer Shop (Swindon) Ltd
SWINDON, 69406!
McDowell, Knaggs & Associates Limited
WORCESTER, 28466

YORKS AND HUMBERSIDE
Ackroyd Typewriter & Adding Machine Co. Ltd
BRADFORD, 31835 & 32243
Allen Computers
GRIMSBY, 40568
Microprocessor Services
HULL, 23146
Microware Computers Ltd
HULL, 562107
Holdene Ltd
LEEDS, 459459
Yorkshire Electronics Services Ltd
MORLEY, 522181
Computer Centre (Sheffield) Ltd
SHEFFIELD, 53519/588731
Holbrook Business Systems Ltd
SHEFFIELD, 484466
Estate Computer Systems
SLEAFORD, 305637
Mitrefinch Ltd
YORK, 52995

NORTH EAST
Currie & Maughan
GATESHEAD, 774540
Dyson Instruments
HETTON, 260452
Key Computer Services Ltd
NEWCASTLE-UPON-TYNE, 815157
Intex Datalog Ltd
STOCKTON-ON-TEES, (0642) 781193

MANCHESTER AREA
Byteshop Computerland
MANCHESTER, 061-236 4737
Computastore Limited
MANCHESTER, 061-832 4761
Cytek (UK) Limited
MANCHESTER, 061-872 4682
Executive Reprographic Ltd
MANCHESTER, 061-228 1637
Professional Computer Services Ltd
OLDHAM, 061-624 4065
Catlands Information Systems Ltd
STOCKPORT, 061-477 6699
Catlands Information Systems Ltd
WILMSLOW, 527166

LIVERPOOL
Stack Computer Services Ltd
BOOTLE, 051-933 5511
Aughton Microsystems
KIRKBY, 051-548 7788
Rockcliff Micro Computers
LIVERPOOL, 051-521 5830
The Computer Shop (Southport) Ltd
SOUTHPORT, 77783

NORTH WEST
B & B (Computers) Limited
BOLTON, 26644
Tharstern Limited
BURNLEY, 38481
Preston Computer Centre
PRESTON, 57684

WEST COUNTRY
Radan Computational Ltd
BATH, 318483
Calculator Services & Sales (Bristol) Ltd
BRISTOL, 779452/3
Sumlock Tabdown Ltd
BRISTOL, 276685
T & V Johnson (Microcomputers Etc) Ltd
BRISTOL, 422061
A.C. Systems
EXETER, 71718
South Coast Business Machines Ltd
FERNDOWN, 893040
Milequip Ltd
GLOUCESTER, 411010
Devon Computers
PAIGNTON, 526303
A.C. Systems
PLYMOUTH, 260861
JAD Integrated Services (Plymouth) Ltd
PLYMOUTH, 662616 & 29038
J.M. Computer Services Ltd
TRURO, 71626

WALES
Sumlock Tabdown Ltd
CARDIFF, 41361
Sigma Systems Ltd
CARDIFF, 34869 & 21515
Reeves Computers Limited
CARMARTHEN, 32441/2
Computer Supplies (Swansea)
SWANSEA, 290047

SCOTLAND
MacMicro Ltd
BEAULY, 046-371 2774
Holdene Microsystems Ltd
EDINBURGH, 031-668 2727
Byteshop Computerland
GLASGOW, 041-221 7409
Gate Microsystems Limited
GLASGOW, 041-221 9372-4
Robox Ltd
GLASGOW, 041-221 8413/4
Ayrshire Office Computers
KILMARNOCK, 42972

NORTHERN IRELAND
Northern Ireland Computer Centre Limited
HOLYWOOD, (02317) 6548

NEWSPRINT

Sources in America say that the machine sells well under the name of Convergent Technologies there, but even with a free method of linking up to 16 machines plus communications software to let them talk to conventional mainframes, it's hard to see what it does for UK users that a Digital Equipment mini with proper user partitioning can't do. The price and the network alone aren't enough. What would make it really attractive would be a single-user, screen-plus-floppies-only version for £1500 or so, to get a few trial machines in and get users hooked. But that would look like the wrong sort of market to CTL and Convergent. Details on (0442) 3272.

Red faces at BMA

Much to the embarrassment of the British Medical Association, two weeks after publishing a stern call for improvements to 'data protection for personal medical information,' it was caught with its files open; an insurance company was found to be accessing names and addresses from the BMA computers.

The BMA described this as an administrative mix-up. I suppose you could say it proves the Association's point: 'The BMA is concerned that proposals for standardisation of names and addresses and other information to facilities transfer between Government computers may seriously compromise the principle that information gathered from a person for one purpose should not be used out of context or for any other purpose without consent.'

Micro makers v government

British micro maker Transam is lobbying hard to erase the Government decision which says that Civil Servants can buy Apples made in America, but not Tuscans made in Britain. Its agitation has finally provided an unofficial explanation of how the strange situation arose, and the scent of a promise that it will be changed in less than a year's time.

Behind Transam are several other British micro builders, in the shape of the new British Micro Manufacturers' Group (BMMG).

The explanation does concede the point that the decision was deliberate, I spoke to the senior Civil Servant whose name was given and pointed out that the Central Computer Agency had run two very small ads, which merely asked for tenders for 'a contract' and pointed out that this would lead to follow-up orders.

First, I said, did he realise that some manufacturers hadn't noticed the ad? And second, did he not think it was daft to leave out the rather important corollary of the contract — that if you didn't get this one, nobody in Government departments would be *allowed* to buy your machine?

No to mince words, he admitted that the choice of tactics was deliberate. The logic was simple: some people had machines just off the drawing board, not yet in production, or in short supply. If a grand announcement were made saying 'This Is The Great Race For Government Approval' then all these paper machines would have been tendered.

And he made the point that every machine on the approved list has to be supported by trained engineers. Yes, in the event it appeared that the ruling was unfair to Transam, but did I not realise (he asked me) that the list was only in force for a year, and did I realise what it would cost to set up support for every possible UK built machine? 'Our job is to protect the users inside the Civil Service,' he ended, not to support British Industry — we aren't the Department of Industry.'

He's right, of course, but I wish the Americans took the same approach to UK hardware as he does to American.

Anyway, the group of British manufacturers (which does include some that are approved) has decided to step up its campaign by including those insignificant people such as Acorn and Sinclair, who make the odd machine but charge less than £2000 for them.

Details from Julie Hamilton, BMMG, PO Box 2, St Neots, Huntingdon, Cambs.

The evaluators

The almost impossible task of finding a useful piece of cheap software has been tackled head on by a new team, set up inside the micro distributor Digitus to evaluate software. This is no leg-pull; it is an attempt to set up standards by which software can be judged, and to publish a catalogue showing how various packages measure up.

In charge of the project is Peter Wolfdenden. (He's the guy with the glasses in the pic, sitting down.) His Software Products Group will select cheap software packages (some of which will not be cheap, of course, by



The Digitus team — see 'The evaluators'.

our micro standards) and test them on the following points: whether they use plain English commands; whether the product is of real practical use; whether the documentation is clear; whether it is easy to use; and whether it can be crashed — that is, if pressing the wrong button at the wrong moment can destroy all the hard work of the previous half hour.

If a product comes through this checkout okay, then give it a trial at some genuine user's office. And if they stand up to this, says Digitus, they go into the approved list, providing the supplier helps properly with any problems.

It sounds great to me, or I wouldn't have given it so much space, but I have to admit that I can see a further step that is needed in this exercise. Once the list is available, it will be of great help to a lot of people but it can hardly be exhaustive. For a start, the first two machines to be listed are Apple and those running under CP/M — which makes it so much waste paper for PET, Tandy, Acorn (etc, etc) machines.

Second, and more important, the list will effectively be a catalogue of Digitus software. Unless a miracle occurs, there will be other software suppliers, some producing their own stuff, some importing or distributing overseas stuff, and some produced on a publishing basis by people such as AJ Harding (Molimerx) or The Software House, or SBD. It's a fair bet that not everybody will have all programs at their command, and someone without Wordstar will speak well about Easywriter without necessarily proving that Easywriter is 'better'.

And if Digitus writes its own PERT package and says it is the best, nobody will know whether that is unbiased pride or partial praise.

We will have to wait until somebody with enough money and sense comes forward to offer a suitable independent expert a platform from which to launch a Catalogue of Catalogues, to work with all the software wholesalers and publishers and to compile a compendium.

BBC micro builders named

The BBC has selected the builders of its micro. At least, the designers have selected them.

The machine is to star as the workbench of a series of programs on How To Microcompute early next year and the Acorn design has been attacked most powerfully as 'unbuildable in the time' — on the fairly solid grounds that Acorn doesn't have a big enough factory.

Now it has selected two mass-producers of electronics: audio company Cleartone and computer assembler ICL (yes, *that* ICL, International Computers Limited) who thus get into micros on the navvy level. Surprise. Cleartone starts first, hoping to get 1000 machines built in September. By November, ICL Logiclayer hopes to have built a further 2000 machines. Good luck to you all; I'm certainly not going to make any rash guesses or predictions on how it'll go, except for the certain fact that luck will be needed.

Not to worry: the BBC is showing it three times a week (each episode, that is) but is carefully arranging times when as few people as possible are looking. This way, they hope to keep demand for the machines in reasonable limits the first time round, and hopefully this way they'll find out what is wrong with the hardware and software in the hands of relatively few people. Then they can repeat it in more populous slots a few months later.

By then, maybe, I'll have got the answer to a simple question: if I record a BBC TV program about micros on my common-or-garden home video, will I record the Ceefax lines that contain the software and pick them up later on playback?

And will my BBC computer not interfere with the video machine the way my Acorn and Sinclair machines do?

Watch these spaces for answers.

New micro from HP

Hewlett-Packard has asked the world for an astonishing £4400 for its latest microsystem, including processor, two small disks, the CP/M operating system, and a thermal printer.

At the time of writing, I've still not sat down in front of the HP-125, but to be worth this price it must be truly phenomenally easy to use. And users must be very sophisticated to appreciate the need for ease of use and probably won't realise how much they need it, so I'm lost by the logic.

On the face of it, you get a wonderful system for the money. Always, Hewlett-Packard computers prove to be much nicer and easier to use than any others, and I see no reason to doubt this one's strong points.

For instance, control of the system is by special keys, which print their own labels on the screen. These 'prompt and guide the operator', says HP, and on all the other HP machines I've seen, they certainly do. But that's controlled by software.

The screen displays the contents of not just one but five pages of memory, and you can look up or down into pages that have gone long past or pages you scrolled off the bottom of the screen. It's absolutely great for testing out a program, or looking through text. But apart from the little memory, which is cheap, the feature is provided purely in software.

The list of things provided by software (some running on an extra Z80 micro which works with the main Z80) is delightful, including Visicalc at an extra £118. But software is a once-and-for-all cost.

In other words, once you have your software done, no matter how good or how bad it is, and no matter how much or how little you spend it, that is the end of the software cost.

So if you sell twice as many machines, then you can charge half the price for the software. And the machine itself just can't cost that much to build; yes, it's a nice screen and a nice keyboard, but *that* nice? So why charge the earth? To persuade the few that it is wonderful? Or to give some Japanese competitor a blueprint from which to work? Details on 0734 61022.

Where are the Silver Apples?

Details of ITT's new microsystem not having been received by press time, you will have to wait until next month to read about the replacement for the Silver Apple. The question of 'what happened to the Silver Apple' is even harder to answer.

Originally, ITT very kindly condescended to help little Apple launch its little machine into Europe by taking on a distributorship. Plainly, it wouldn't sell as it stood, so ITT generously made one or two improvements — slowed the system clock a bit, adjusted the power supply, and put an extra bit of memory in to give proper British colour, among other things.

A year or two later, it became clear that the ITT version was the minority one and that one or two Apples had been sold, here and in America, to people who had thoughtlessly written software which didn't run properly on the ITT 2020. Exactly how many Silver Apples are lying around still is a tricky question to answer since ITT is loath to talk about them. Understandably, it feels that if it admits that it

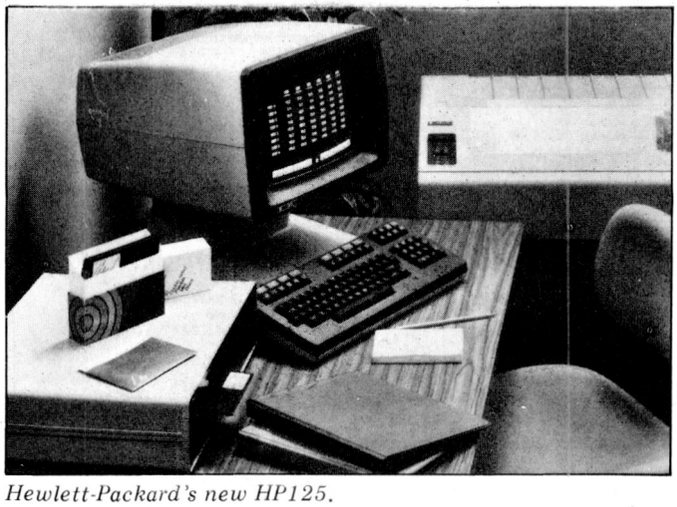

Hewlett-Packard's new HP125.

SURVIVAL KIT



If you service or maintain a range of computer peripherals OASIS 820 is the cost-effective and logical solution to your control and exercising problems.

OASIS 820 uses firmware application Peripheral ALgorithm Modules (PALMs) to configure the keyboard to control various computer peripherals. To test a printer, plug in a printer PALM — for a floppy disc drive, a floppy disc drive PALM. The same principle applies to terminals, accessories such as front feeds, hard discs, cartridge tape drives, etc. As and when different new peripherals have to be supported more PALMs can be added to the library.

OASIS 820
TECHNOLOGY LIMITED

the revolutionary multiperipheral exerciser in a briefcase
-tests virtually any computer peripheral

Each PALM comes with a set of instructions so that various drive routines within the PALM can be selected from the "soft" keys on the keyboard. The operator is prompted through the tests by a display panel so that progression through each test can be constantly monitored.

OASIS 820 is not only low-cost in its basic form, but is also flexible and expandable. Each briefcase will hold several PALMs and interface cables so that an engineer can carry, in one hand, all of the peripheral driving equipment which he needs. Because OASIS 820 replaces any number of test boxes, the cost per function is minimal so that a Service Engineering Department can plan ultimately to have one briefcase for each engineer. *In the field of peripheral testing this gives OASIS 820 the lowest cost per function in the industry.*

For more information on this revolutionary new product contact us at the address below.

OASIS 820 is designed and built completely in Britain and patents are applied for.

HAL Computers Limited
57 Woodham Lane New Haw
Weybridge Surrey KT15 3ND
Telephone: Weybridge 48346/7

HAL

LOOKING FOR 5¼

EP4000 EPROM Programmer/Emulator — Not just a programmer.

Programs a wide range of EPROMs without personality cards. Video output for editing and LED display for stand alone operation. Standard interfaces include RS232C, 20mA, TTL, cassette, printer and DMA. In EMULATION MODE EP4000 replaces your in-circuit PROMs for program development and makes changes, entries, edits simple. Accessories include Bipolar programming modules, multi EPROM simulator adaptors, buffer pods, ERASERS, Monitors, 2764/2564 programming satellite, printer and production gang programmers.

EP4000 programmer/simulator £545.00 P4000 production programmer £545.00 (9 sockets) Eraser £78.00 Monitor £88.00 Printer £395.00

Microtek MT80

Probably the most reliable small matrix printer. To coincide with the move into our new factory we are offering these at clearance prices. 9 × 7 matrix, upper and lower case — one only ARABIC — , extended print, 40,80,132 column, 125 CHARACTERS PER SECOND.

Parallel MT80P £395.00 Serial MT80S £445.00

Cables available for all of the popular micros.

DYSAN DISKETTES. Indisputably the best you can buy.

30,000 diskettes in stock. *As well as the standard range of diskettes for Apple, PET, TRS-80, etc, we also supply pre-formatted for: CPT 8000, Micom/P5002, all IBM, AES/Lanier, Atari, Nexos 2200, Wang, Zenith and P2000. For immediate delivery call our HOTLINE... Weybridge 48346/7*

The Revolutionary New 8" Thinline

Tandon's revolutionary new 8 inch floppy disc drive is only half the thickness of earlier drives so that you can pack twice the storage into the same space. In addition a new method of construction allows the drive to constantly compensate for changes in temperature and humidity so that real capacities of up to 4.M.bytes are now achievable in the usual 8 inch floppy disc drive envelope size. The TM800 series drives require only D.C. power (5v and 24v) so that they run cool and no changing of pulleys and belts is needed for manufacturers who want to ship products abroad.

Our new low profile packaging, designed and built in the U.K., complete with power supplies makes incorporation into, or addition to, existing systems simple.

APPLE II & TRS-80 COMPATIBLE MINI FLOPPIES

This is our popular TM 100 series mini floppy...
Tandon make 40,000 of these a month. Available as bare drives and packaged in single and dual cabinets with power supplies. Capacities from 100K.bytes to 1 Mbyte per drive! Compatible with TRS-80, Video Genie, SUPERBRAIN, Horizon, Zenith, SWTP, Heathkit etc., and supplied as the standard drive with many of these systems.

TRS-80 compatible (in cabinet with power supply)	*DUAL UNITS*	*40 track*	*£399.00*
		80 track	*£549.00*
	SINGLE UNITS	*40 track*	*£219.00*
		80 track	*£289.00*
APPLE II Compatible	*Single disc*	*£249.00*	
	Dual disc	*£488.00*	
APPLE Controller board DOS 3.3		*£POA*	

Prices exclude VAT and delivery charges.

SPARE PARTS SERVICE AND TRAINING

We carry a complete stock of emergency spare parts for Tandon disc drives and we can fix any drive on a short turn-round. All final testing is carried out on an in-house ATE drive testing system which can run 73 separate diagnostic programs to ensure that your drive leaves us in absolutely first class condition. A less complex calibration service is also available. Full product support exists for genuine OEM customers and we run single day training courses at regular intervals. Call our service engineering department for further information.

We carry the full range of Dysan alignment diskettes and a staff of Sales Engineers will be pleased to help you with any queries.



HAL Computers Limited
57 Woodham Lane New Haw
Weybridge Surrey KT15 3ND
Telephone: Weybridge 48346/7

WINCHESTERS?

I've got just what you're looking for....

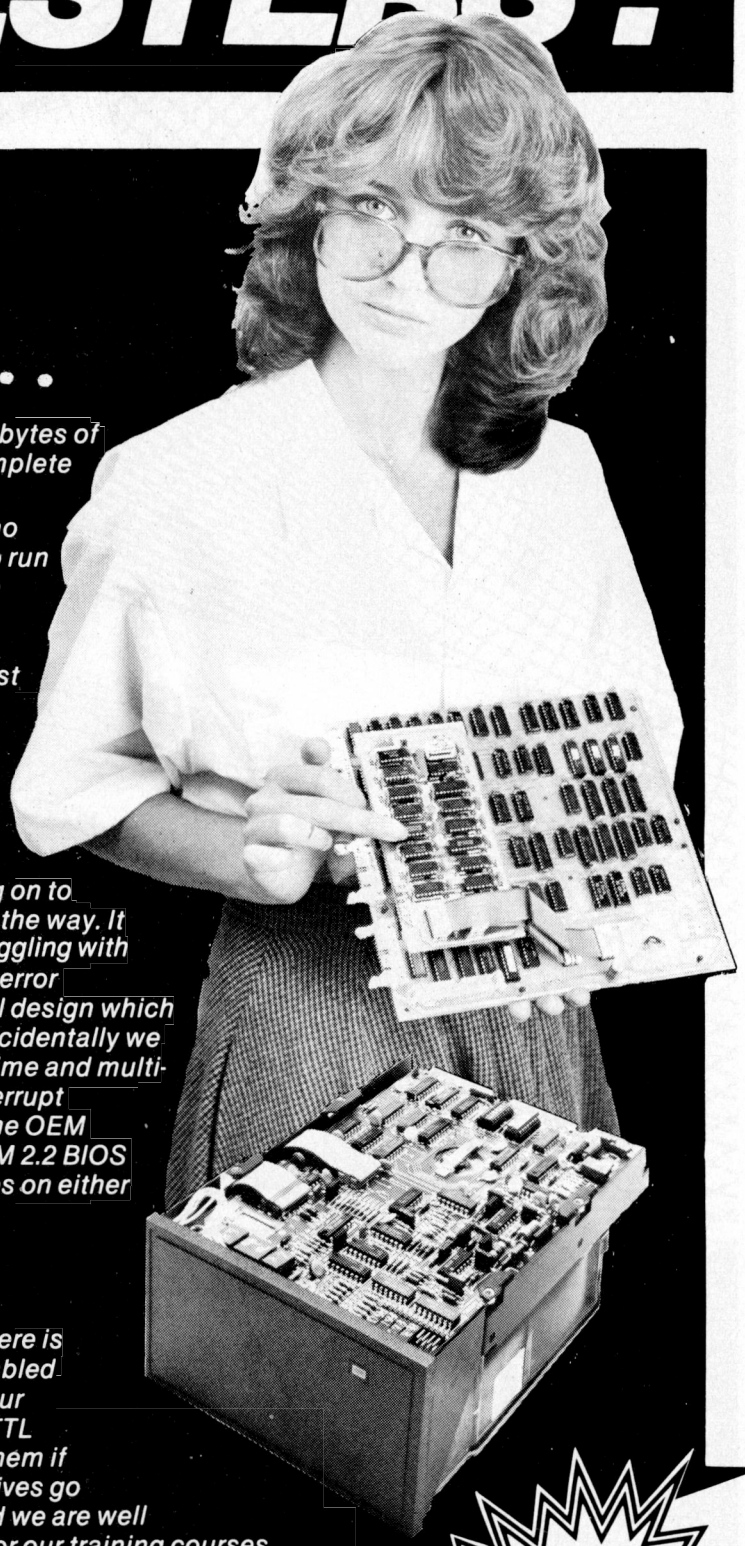

Our new Micro Winchester gives you from 5 to 20 M.bytes of hard disc storage from as little as £1425.00 for a complete ready-to-go, plug-in system with software.

Floppies and larger more expensive hard discs are no match for our new drives which pack enough data to run serious business or technical applications software into a mini-floppy size 5¼" unit. Your data is protected in the sealed enclosure making diskette handling problems a thing of the past. The disc is fast — 40 times faster transfer rate than a mini-floppy — yet fits into the same space and so can be used as a replacement or an enhancement.

Controllerbility

Our controller comes with a range of adaptors to plug on to most popular micros and there are more adaptors on the way. It supports two discs with ease and while others are struggling with less stable analog data separators and speed-eating error correction circuits, we use a high performance digital design which literally locks into the data stream and stays there. Incidentally we also sell digital data separator cards to OEMs. Real time and multi-tasking applications benefit from the controller's interrupt capability and macro level command structure and the OEM version features a simple software interface and CP/M 2.2 BIOS with extensive development aids. The software comes on either 5¼" or 8" diskettes together with Boot PROMs.

Service and Support

If you are impressed with the specifications so far, there is more to come. Our packaged sub-systems are assembled in-house and they carry a full one year parts and labour warranty. Our controllers are built completely from TTL logic — there are no fancy chips — so we can fix them if they ever break down. Dozens of floppy disc drives go through our workshops every month and we are well known within the industry both for our training courses and our heavy investment in computer based disc test equipment. If your Winchester ever stops working you can depend on us to fix it.

For: SUPERBRAIN, S-100, APPLE II, HEATH H89, TRS-80.

DEALER ENQUIRIES INVITED



VECTOR PLOTTING, MICRO PRICE

The new Strobe Model 100 drum-type plotter gives you real vector plotting, interfacing to your computer hardware and system software, from only £690*

** High resolution — 0.1mm at 7.6cm/sec. * A4 paper capacity. * Will plot in most colours, uses off-the-shelf felt tip pens. * Precise operator control. * Interactive input of coordinates.*

The Strobe Model 100 can be interfaced to any computer through two parallel 8-bit output ports and one 8-bit input port. Optional interfaces for TRS-80, Apple II*, PET*, and S-100 bus computers are currently available.*

Driver Routines *Source listings of the assembly language motor drivers and vector plot routines for use on 8080, Z80, and 6502 microprocessors are supplied with Model 100. Flow charts of these routines simplify modifications of drivers for custom machine level software.*

*** Unit price for plotter ex-delivery and ex-VAT**
*** TRS-80, APPLE II, and PET are trademarks of Tandy Corp., Apple Computer Co., and Commodore Business Machines Inc., respectively.**

HAL Computers Limited
57 Woodham Lane New Haw
Weybridge Surrey KT15 3ND
Telephone: Weybridge 48346/7

DEALER ENQUIRIES INVITED

got fired by Apple as a distributor, people won't want the Silver Apples and, also understandably, feels that if people know that nobody wants the things, then even more people won't want the things.

I would have thought that the announcement that ITT had a thousand or so in storage would be a good idea. At half price, they could suddenly become very attractive, and could all shift in a month. Instead, I think we will see interesting deals. Templeman Software's integrated stock control and reordering system may be one of these. For less than £4000 plus VAT (ie over £4000), you get a processor (Silver Apple) plus display and disks and printer — and Templeman Software's software. My guess is that the markup on the software is higher than you think, even with a reasonable printer. But nonetheless, it's probably a good deal providing you don't think you've bought an Apple. Details on (0789) 66237.

New characters

There are a whole new set of characters which any PET user can display by buying the Avon Computer Rentals Alpha Pluscharacter generator. This, Avon Rentals assures me 'is not a hoax. This is a plain straightforward fact with no catches.'

The fact may have no catches, but I'm afraid you'll have to get their little leaflet to be sure about the plain and straightforward part. For around £70, you get (I think) four character sets in addition to the normal letters and numbers and shapes displayed on a PET screen. And now, in addition, the device can now be programmed to make all four sets of characters appear on the screen at the same instant, line-by-line.

You can even play snakes and ladders race cars, it says, but for the life of me, I can't see how you can do both together, *line by line* (see photo below)?

Details on (0454) 415460.



Not so EEEsy

It should not be mistakenly assumed that, because the Apple II now has its own (optional) IEEE bus connection and because the IEEE bus is most used to connect computers to instruments, that this makes it easy to connect the Apple to instruments.

The point about the IEEE 488 standard is not that it is easy but that it is standard. This means that if an instrument already has the interface, you know exactly what is coming down it. On this basis many a Commodore PET has been sold to laboratory technicians, since the PET had the interface (with a slight omission) from early on. However the IEEE 488 bus is horribly complex and many people involved in connecting the PET to other electronics have chosen to use the ordinary user port instead of the IEEE interface. It is simpler to add just one device that way.

The new product (the interface) comes at £276 including VAT from any of Microsense's 400-odd Apple dealers. Details on 0442 40574.

Future phone fun?

To me, the most important thing about the computer-controlled telephone exchange recently installed in Woodbridge, Suffolk, is the fact that it can handle computer communications without turning them into squeaks and sqwarks first. . . but there is another angle.

The big thing about computers is that they use software. And software must be testable. So it's a pretty good bet that somebody clever could, if they were irresponsible enough, try to find a way of phoning up the exchange and testing the software. . . and maybe changing it?

Sharp notes

Music lovers can draw some comfort from the information that if the Commodore VIC's notes are out of tune, it is not the fault of mathematics. Despite my claim that an octave was not an exact doubling of frequency, the truth will out: it is. According to John Aldred, a computer musician of some, er, note, I may be confusing a natural scale with an even-tempered one.

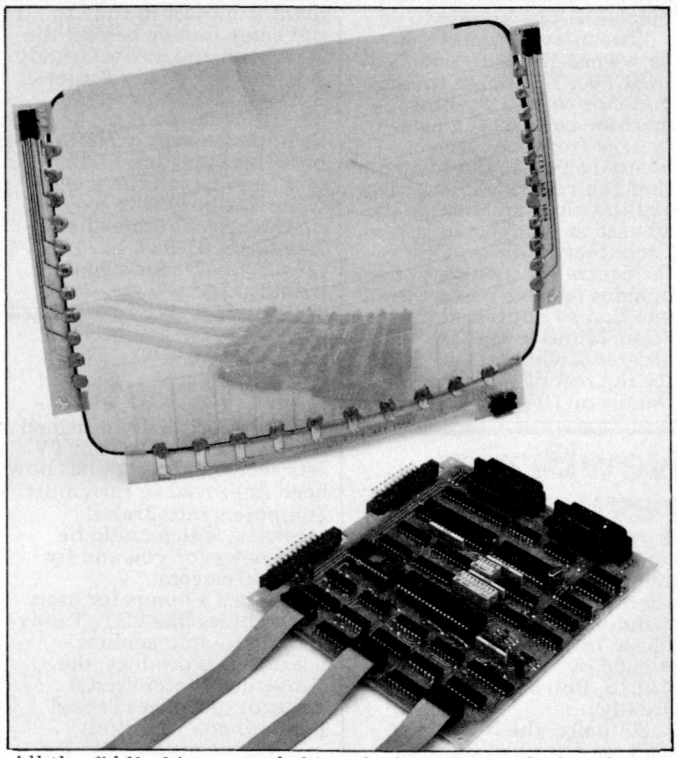

All the fiddly bits around this naked screen are designed to see if a finger is touching the glass. The idea is that a computer can detect where on the screen someone is pointing and then check what it has displayed at that spot.

All the programmer has to do is display something like 'Touch this square to hear the National Anthem' and then wait for the finger to be detected before playing the Muppets theme, through the system speaker. To use it, you need the kit as provided for the Lear Siegler ADM 32 intermediate terminal.

The kit is available through the maker, Interaction System Systems Inc of 24 Munroe St Newtonville, Mass 02160 (tel 617 964 5300) or through Lear Siegler agents.

To help composers use a Sharp MZ-80K to write music, Aldred has submitted the following table of numbers which show how to make it play in tune. It shows differences between the two scales, plus details of the MZ-80K tuning as used by Aldred in his MZ-80K program announced two issues ago.

'Contained in the monitor of the MZ-80K,' Aldred adds, 'is a table of pitch values which are directly related to the reciprocal of the frequency of the note produced. As the information in the monitor is copyright I can't give it in the table, but it can be found on page 8 of the Newbear monitor listing.'

So now you know.

	Interval between successive notes (Natural scale)	Interval above C Natural	Equal tempered	MZ-80K	MZ-80K frequency (Hz)
C		1.000	1.000	1.000	261.64
	9/8 = 1.125				
D		1.125	1.122	1.122	293.60
	10/9 = 1.111				
E		1.250	1.260	1.260	329.60
	16/15 = 1.067				
F		1.333	1.335	1.334	349.16
	9/9 = 1.125				
G		1.500	1.498	1.498	391.85
	10/9 = 1.111				
A		1.667	1.682	1.681	439.75
	9/8 = 1.125				
B		1.875	1.888	1.886	493.58
	16/15 = 1.067				
C		2.000	2.000	2.000	523.28

Control your washing machine

Using computers for calculating, game playing or business data manipulation, observes a British electronics company, 'doesn't require any knowledge of how a computer monitors and controls other outside equipment. But now, the new generation of technologists is required to understand and use microcomputers to control all kinds of things.'

So the firm has started out with a washing machine. The firm, Feedback Instruments, showed several of its tutorial devices at the PET Show ealier in the year. It provides several 'projects' including control of a stepping motor, of a temperature monitoring system, of a traffic light, of binary input and output, and something called a Project Board — plus a washing machine.

The projects use one of several machines. If a plug is the interface between the CEGB and an electric motor, then Feedback has plugs for PET, Apple, Aim 65, ABC80 and planned plugs for Tandy TRS-80, Research Machines RML 380Z and even the

Sinclair ZX81 'soon'.

The interfaces cost between £45 (Aim) and £107 (ABC80). The board that pretends to be a washing machine costs £74, a nice average from the 'project board' at £45 to the temperature control system at £132, and the plugs and boards are all used at the Nottingdale Technology Centre. That is the centre for training young humans in electronics, the one that so impressed the Prime Minister that she ordered a whole set of them for the rest of the country. Details on (08926) 3322.

NewBrain revived

Britain's own portable (handheld) computer is not going to die after all, as was feared when Newbury Laboratories abandoned its NewBrain micro. Instead it is to be rescued by the man who gave it birth, Bob Smith of Grundy.

Actually, the NewBrain can't be described quite so simply. It was originally designed (in outline at least) by Clive Sinclair before he split away from the National Enterprise Board and Sinclair Radionics. Then it was adopted by NEB company Newbury, where Smith was managing director, and developed over a year or more, to last summer, when it was announced. It was then selected as the BBC microcomputer, and when Smith left Newbury for Grundy, looked set for success. Nobody who knows will say what actually happened to delay and eventually cancel production plans at Newbury, but delay and then cancellation is what happened. Eventually Newbury looked around for someone to rid them of this turbulent micro and Smith, now doing exciting things with Grundy, got together with the NEB and NRDC. Both these Government bodies sponsor new ideas in British industry, and they were merged by the Government itself just in time to put some money behind the NewBrain and a new Grundy subsidiary, Grundy Business Systems. Smith is very pleased with the deal, because he hopes to supply Newbrains between £200 and £300 this year, and has all the people from Newbury who worked on the project originally. Details on 01-977 1171 (*Dealers only*, for a while, I would suggest)'

Boost for Prestel

A device, originally designed to give owners of cheap TV sets access to Prestel, has now been improved to turn most computers into Prestel receivers, which could be good news for you and for British Telecom.

There's a bonus for users of machines like PET, Tandy and Microtan machines, because this product, the Tangerine Tantel Prestel Adaptor, produces Prestel standard colour output.

That means that for the Tantel cost of £170 + VAT (around £195) you get colour graphics as well as Prestel.

This may be the sneakiest move yet in a race, that still hasn't yet started, to become the UK's dominant micro supplier. Tangerine has been a long underated range of micros, with a very loyal following but without the glamour and big headlines that Sinclair and Acorn have generated.

The Tantel, it should be remembered, also attaches your computer (or TV) to the phone lines. As of today, it can only talk directly to Prestel, but the chip that controls the phone line is quite capable of doing more than that; with a little alteration to the supporting software and addition of some special circuitry.

At the same time as the Tantel offer, Tangerine has put together a rather more detailed-output graphics card for users of its own range of systems. This provides 256 by 256 pixels, using 8 kbytes of memory (included on the board) and allowing mixed text and graphics.

Cost around £92 including postage and VAT; full details on 0353 3633.

Fast words

It is possible to send six pages of text from London to Boston in two minutes, for four pence. The trick, according to Rostronics, who has done it, is to use Prestel.

The product which, Rostronics says, makes it all possible is one it picked up through former director John Barton, who is marketing several products abandoned by Cherry Leisure when its old viewdata subsidiary, Sparrow, went under earlier this year.

The device isn't actually designed to send messages to Boston, but to give ordinary people the power to edit Prestel pages. Working with the Government's own Prestel service, Rostronics launched a device which could disguise itself as the Government editing terminal. Built into it is the Laser editing code and software which will take a page, and input a new version according to changes which the user enters at the keyboard.

The obvious application is Barton's Hotel Information Services notion of putting a whole series of hotel chain bookings on the system. Booking agencies will use this special viewdata terminal to check for vacant rooms around the country, and when they find a suitable one, will instruct local software to book it. The editor will find the appropriate Prestel page, will delete the vacancy shown, and then transmit the new version to replace the old.

However, there is the new Mailbox facility on Prestel pages, where users with proper terminals can enter a letter and have it sent to all Prestel computers around the country.

Rostronics has packaged most of this into a £400 board that fits on most Z80-based processors, including the S100 machine, the Z-Plus, which the company imports from America. Details on 01-874 1171

Nascom link-up

A new chain of micro retailers has been formed by the six individual shops which claim to have kept one of Britain's earliest microcomputers (the Nascom) alive while the manufacturer went bust.

The six dealers are already known in the trade for their joint advertising campaign, aimed at users of the Nascom machines and offering various add-ons and replacement boards.

Now they have banded together a bit more formally, which explains the name MicroValue Group. It isn't a new company: it is a group containing Bits and PCs of Wetherby, Electrovalue of Manchester, Business and Leisure of Kenilworth, Henry's Radio of London, Target Electronics of Bristol, and of course, the Nascom originator himself, John Marshall's company Interface Components in Amersham. Details from Brian Wingfield at Wetherby 0937 63774.

New Editor

Peter Rodwell has been appointed Editor of *PCW* to replace David Tebbutt, who has left to get his hands dirty again in the computer business, running a newly established software publishing house. Peter has been Deputy Editor for the last 18 months and before joining *PCW* worked for more years than he cares to remember in journalism and public relations before getting into micros six years ago. Joining Peter will be calculator expert and computer freak Dick Pountain, who becomes Managing Editor.

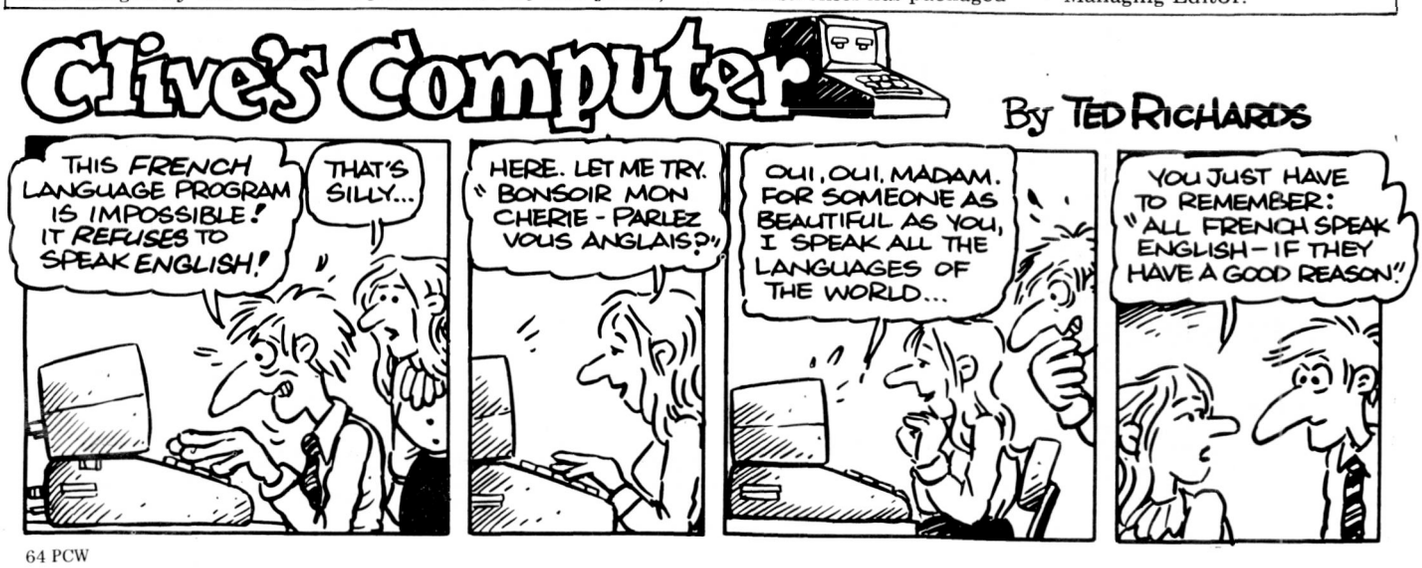

MICROLINE 82A

We've raised the standard but not the price.

The new Microline 82A raises X-Data's price/performance standard higher than ever. At no extra cost.

Based on Oki's superb engineering tradition, the Microline 82A is the result of a continuous development program aimed at providing highest performance at lowest cost.

Unbelievably at the same price as its best-selling predecessor, the Microline 82, it offers:

- ☐ Speed – 120cps
- ☐ Clarity – 9 x 9 matrix
- ☐ Throughput – enhanced logic seeking
- ☐ Style – true descenders
- ☐ Convenience – rear and bottom paper feed

The Microline 82A will challenge any other printer available in this price range. With Oki engineering to give total reliability.

And it has a sister — the wide-carriage Microline 83A — which offers all the facilities of the Microline 82A with a full 136-column carriage.

Plus lower cost. We've reduced the price by 15 per cent compared with the Microline 83.

Price/performance is X-Data's winning theme. Ring Jane Lindsay at Slough (0753) 49117 for further details and prices or the name of your nearest dealer.

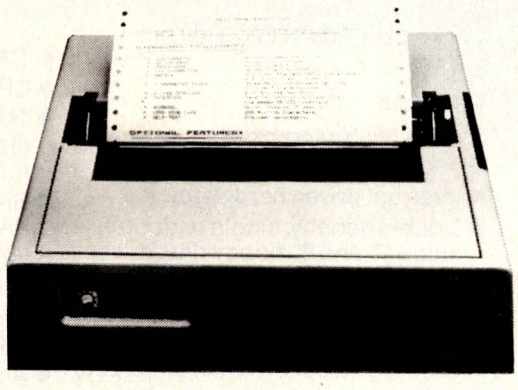

X-Data Limited, Marish Wharf, St Mary's Road
Langley, Slough, Berks SL4 1HE
Tel: Slough 49117. Telex: 847728.

X-DATA
Equipment Wholesalers

WEIGH US UP

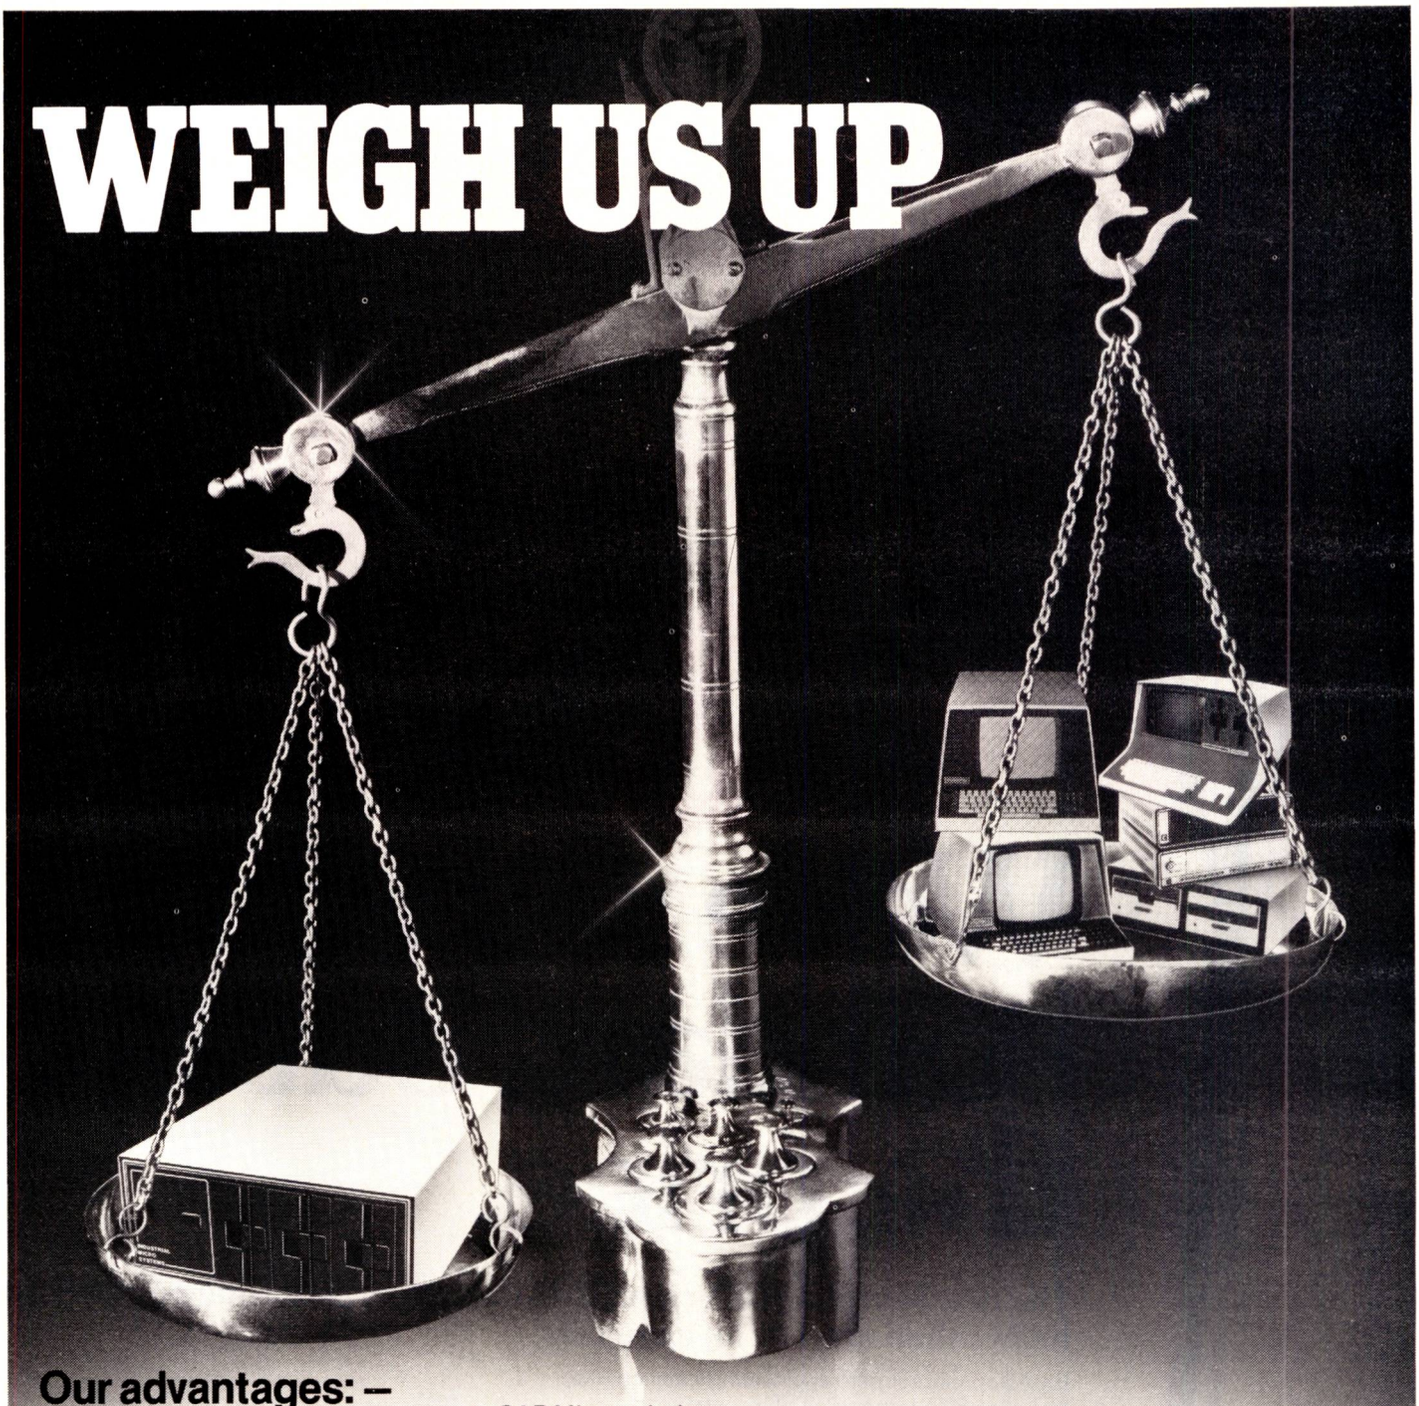

Our advantages: –

- S-100
- 12 slots
- Z80A Microprocessor
- Real time clock
- Interrupt driven hardware
- Double density, single or double sided 5″ and 8″ floppy disc drives
- 5″ and 8″ Winchester drives (option)
- Tape back-up (option)
- Cartridge disc drives (Equinox 200)
- 64KB Dynamic RAM with parity
- Static RAM (option)
- Up to 384KB RAM (option)
- Two serial ports
- Additional serial and parallel ports (option)
- CAP Microcobol
- CP/M, CP/NET, MP/M
- TURBOCHARGER II for greater disc capacity and performance for your CP/M software
- BASIC, COBOL, FORTRAN, PASCAL, C, LISP, APL, FORTH
- Word Processing
- Information Management
- Powerful Utilities-Z80 Assembler, Editor, Debugger and linker
- Analog/Digital and Digital/ Analog interfaces
- Prestel/Viewdata
- Mainframe/Micro Communication
- Networking
- CCTA Approved Systems

Built to high quality standards by IMS International

And consider the price – from £1750

EQUINOX

COMPUTER SYSTEMS LIMITED

Specialists in Multi-user Microsystems

Kleeman House, 16 Anning Street, New Inn Yard.
London EC2A 3HB. Tel: 01-739 2387 & 01-729 4460
Telex: 27341



YANKEE DOODLES

Tom Williams reports on the American side of the microscene

APPLE III ON ITS WAY

There seems to be a few rumblings from Apple Land, which are possibly more upsetting to folks in Europe who are being kept in official darkness than to Americans who still see a very strong company here. The two sources of unease are worries over the status of the Apple III and over some of Apple's tactics in marketing, particularly in regard to Microsense, the British distributor.

The 'official word' is that an agreement for purchase has indeed been signed with Microsense and that the deal is going ahead, but on a low key. The (again official) reason is that Apple wants to avoid drastic changes that might affect the goodwill that Microsense has established. Knowing nothing about Microsense's goodwill, I leave judgement of that remark up to my British readers. At any rate, the go-slow policy is also tied up with problems surrounding the Apple III.

Shortly after the Apple III was introduced over a year ago, there were

"Software sells hardware"

delays in the projected availability here in the US which were supposedly due to design flaws. One source even claimed that the Apple III's DMA simply didn't work. I cornered some of Apple's technical people at a reception at last May's National Computer Conference in Chicago and asked about that. They told me that there had indeed been problems, but that they were not fundamental design flaws, rather minor electrical and mechanical mistakes and problems that compromised the overall operation of the system — things like flaky connectors and IC sockets. They (once again officially) assured me that the problems had been identified and had now been solved. And it is true that you can now go into a store here in the US and buy an Apple III and complaints about reliability have largely ceased.

The reason that people in Europe have not been able to get their hands on an Apple III or heard much about it is that Apple has been trying to isolate the problems to the US with the intention of reintroducing, or 'repositioning' the machine before making a big push in Europe. One of the big problems with Apple III was that there was little if any software to run on the machine other than that which would also run on Apple II. Why buy a $4000 computer when you can get one for around $2000 that will run the same programs? Apparently this elementary subtraction equation sunk in with the marketing people and they have been keeping a low profile on Apple III while frantically pushing a hardware and software program that will be able to sell it

Steve Jobs of Apple: "We're going to bury you"

effectively.

In the meantime, Apple has gotten into agreements with Seagate Technology to supply 5¼in Winchester drives and has been pursuing a vigorous software effort. Software soon to be available will come from sources external to Apple as well as from within the company. When all this is ready and orchestrated there will presumably be a great convocation of the heavenly host and the new image will be announced with silver trumpet fanfares in Europe and America. There is, however, no truth in the rumour that every Apple executive has had branded on his backside the motto: 'Software sells hardware'.

Apple has managed to get into another lawsuit with one of its dealers, charging it with unfair trade practices. Computer Words, Inc has accused Apple of encouraging its dealers to pursue the educational market and then circumventing the dealers by selling to schools through a consortium run by the state of North Carolina. The dealer's claim that the burden of service and support placed on them by their contracts with Apple makes it impossible for them to compete with the kind of volume and pricing possible with direct sales from Apple.

The big boys are coming

As competition in the personal computer world, look for IBM (that's not really news any more) and DEC. DEC's entry may well be the result of a grudge. The minicomputer pioneer is rumoured to be working on a personal computer code-named the Falcon. The project is said to have originated from a remark by Steve Jobs of Apple, who, while sitting in the office of DEC's president, in blue jeans with his feet on the table, reportedly said, 'We're going to bury you.' This so incensed the president, Mr Ohlson, that he called in his engineers and ordered them on pain of joblessness to develop an answer to that piece of Californian impudence. Time will tell.

Another big-name entrant into the personal computer arena that has announced a product is Hewlett-Packard. HP recently introduced a Z80, CP/M-based desktop computer called the HP-125. The computer is — with the exception of the disk drives — contained in one of those pedestal-type terminal cabinets so characteristic of HP, and has a detached keyboard. The terminal portion, which is controlled by another Z80, supports dot resolution graphics, communications and remote terminal functions, and user-programmable softkeys.

The machine has an optional thermal printer that is contained in the top of the terminal housing. Hewlett-Packard supports the CP/M operating system as well as Visicalc, Microsoft Basic, and an intelligent terminal communication program that allows it to access databases on HP-3000 computers.

The interesting thing about the introduction of the HP-125 is the price — $7460 for the computer with 5¼ in dual disk drive and thermal printer. Compare this with the Osborne 0-1 at $1750 which is also a 64k, Z80, CP/M computer with 5¼in drives and extensive software. The intriguing question is how will two fairly similar

Compare the HP-125 at $7460 with the Osbourne 0-1 at $1750

computers with such divergent prices fare on the open market? Admittedly, the 0-1 doesn't have the office styling, the softkeys, the printer and the graphics of the HP-125, but is that really covered by the $5710 difference in price? Once again, time will tell.

On another quick note, the San Francisco area is experiencing a blossoming of Conference Trees. These miniature teleconferences can now take place on an Apple which has an auto-answer modem and the Communitree software. Dialing in can get you into running conferences on all sorts of futuristic topics from space, alternative communities and political/privacy issues to magic and Tarot readings. I've been particularly intrigued by a conference in which the users leave messages with voice comments on publishers.

"OLYMPIA HELPED TO SAVE MY MARRIAGE."



If you find yourself working later and later, you must be seeing less and less of your wife. Hardly the ideal recipe for a happy marriage.

However the solution is a simple one.

Enlist the help of the remarkable BOSS. The new desk-top computer from Olympia.

It's been specially designed with your needs in mind so you can make fast accurate decisions today and plan ahead for tomorrow.

The BOSS stores your information. Up to date. Ready for instant access.

For instance, sales by product group or territory to monitor targets.

It speeds up order processing to give your customers a better service.

It optimizes your stock levels and improves your cash flow by identifying slow-moving items.

And all this costs less than a company car.

You don't need specialist training.

Just plug in the BOSS and see how easy it is to operate.

Maintenance is not a problem.

Olympia have a nationwide service network just a telephone call away.

Quite simply, the Olympia BOSS desk-top computer will help you stay on top and get you home on time.

To find out more, fill in the coupon below. If you don't, chances are your wife will.

Olympia International
Microcomputers to help you mind your own business

Write to Phil Fencott, Olympia International, FREEPOST, Olympia House, 199/205 Old Marylebone Road, London NW1 5QS or ring 01-262 6788. Please send me details on how the Olympia BOSS can help me in:

☐ Business ☐ Educational, Scientific, Technical applications

Name Business Address

Tel. No. PCW5

PCW 68



NEWS

David Tebbutt brings you the latest update.

FIRST NIGHT FUN!

ComputerTown UK! is an ever-growing network of computer literacy centres, where members of the public are given free access to microcomputers, courtesy of those willing to volunteer their time and equipment. ComputerTowns might be found anywhere: in a church hall, a library or maybe in a school after hours. The emphasis is on making computing enjoyable and non-threatening and, because Computer Town is entirely non-commercial, overt axe-grinding of any sort is banned. Guidelines are available for those interested in setting up their own 'Towns: Write to CTUK!, 7 Collins Drive, Eastcote, Middlesex HA4 9EL and remember to enclose a large SAE (A4 would be fine) for your reply. Please don't try to telephone *PCW* for information because this project is entirely a spare-time activity.

This month's big news is that ComputerTown Worcester is up and running and, wow, what a start — over 300 kids turned up! 'They were like lemmings!' said Tony Cartmell, the man who started it all. Tony was aided and abetted by among others, the local Tandy store and the Worcester Computer Club. Tony didn't say where the event was held but he's now been offered a room by the local library and there's even a strong chance of a machine being donated to the project. We'll tell you all about that when it happens. The local 'freebie' paper picked up the story, spent over three hours interviewing the organisers and then splashed the story across the front page. Incidentally, it should be mentioned that the reporter did an excellent job — not always the case as you may know. It looks as if special meetings are going to be organised for local teachers since they are very enthusiastic about the scheme and, presumably, don't want to be left behind by their pupils! What an excellent start. Well done all of you.

Lyn Antill tells us that she's been running an occasional ComputerTown for residents in the Barbican. If you're a resident and you're interested in helping/joining then contact Lyn at 1 Defoe House or ring 01-638 3225.

Let's have a look now at a 'Town that's on the verge of starting in Dorchester. Chris Donaldson and Derek Moody are the men behind this one. They're trying to attract attention by putting leaflets in copies of *PCW* at their local newsagents. The leaflets have the CTUK logo on them and (neatly) ask for computers, programs and help. If anyone else is thinking of taking the same approach, all we ask is that you do things tidily (Letraset, typing or professional artwork, please) and obtain the newsagent's permission before doing it. We'd also appreciate your dropping us a line at *PCW* to say what you're planning to do. To contact ComputerTown, Dorchester write to Derek Moody at 2 Victoria Terrace, Dorchester, Dorset DT1 1LS.

Incidentally, we must thank Henry Budgett of *Computing Today*. Henry kindly gave permission to Dorchester to slip their leaflets into his own esteemed periodical and, what's more, he also gave ComputerTown a mention in his magazine. Thanks a lot, Henry, you'll be pleased to hear that we're getting enquiries as a result.

Every month we receive a substantial document from ComputerTown Enfield full of interesting information about its own project. The gem I'm selecting from it this month is the idea of 'twinning' with ComputerTowns in America. What a neat idea. Next time I write to CTUSA! I'll ask to be sent regular lists of active 'Towns over there. When, and if, they arrive I'll let you know.

Quite a few people wrote this month to express a very keen desire to start their own ComputerTowns. I think the best thing to do is to list their names and addresses and leave you to make contact. Here they are: J V Flynn, 30 Hermitage Way, Kenilworth, Warks CV8 2DW; John Kilburn, 6 Milford Gardens, Appleton Park, Warrington, Cheshire; Trevor Jordan, Eardley House, 84 Market Street, Ashby de la Zouch, Leics; Len Wood of 41 Goddington Road, Bourne End, Bucks SL8 5TU is interested in getting something going in the Great Marlow area. I hope we hear from you all again soon.

Malcolm Part wrote again from Witham in Essex. He'd tried once already to get a ComputerTown going but without too many people coming forward to help out. He'd like to try again, so here's his address once more: 35 Town End Field, Witham, Essex, CM8 1EU.

Bob Brittain wrote from Twickenham to say that he'd like to run some 'fun evenings' at all Saint's Hall in Twickenham. Anyone willing to take along their machines and demonstrate their programs would be most welcome. Write to Bob at All Saints Hall, Cambbell Road, Twickenham, Middlesex or, better still, ring him on 01-979 4970. Good luck, Bob.

Visitors to Acton ComputerTown may be astonished to find it gone. The fact is that Mike Baker has moved it to Southall. He'd love some help there, so if you're interested give him a ring on 01-840 0030. Incidentally, Mike very kindly took the lion's share of the work involved in organising the ComputerTown stand at the show. Thanks a lot Mike.

If anyone has been having trouble contacting Kevin Stock of Coventry and Belfast, it's because he goofed with one address and we goofed with a postcode. Coventry-based people should write to him at the Department of Computer Science, University of Warwick, Coventry, CV4 7AL. The Belfast address should have read 44 Park Avenue, Belfast, BT4 1JJ. Let's hope we got it right this time.

The Beeb has written to us twice in the last month — once for a set of guidelines and again to see if ComputerTowns would be good places to refer viewers interested in computing. We'll be meeting the people concerned very soon and will let you know the outcome as soon as possible.

Other enquiries received this month came from: London NW2 and SE12, Ilford, Birmingham, Portsmouth, Glasgow, Peterborough, Swindon and Hemel Hempstead.

Finally, thank you all once again for your news and your excellent support for ComputerTown. Keep up the good work — we've now got 23 'Towns running, and more starting up all the time. Mind you, we've no cause to be complacent — when you consider the number of communities in Britain, we've got a fair way to go before the country is covered. Still, keep those letters rolling in with your news and, if you're seriously considering having a go yourself, ask for a set of guidelines. We look forward to hearing from you.

Finally, Here's a complete list of ComputerTowns up and running. If you want to contact one in your area, drop us a line (with an SAE, please) and we'll put you in touch: Southall, Jesmond, Romford, Street, Colchester, Worcester, Leeds, Enfield, Croydon, Caversham Park Village, Wokingham, New Addington, Gateshead, Retford, Horsham, Sutton in Ashfield, Newcastle upon Tyne, South Shields, Eastcote, Renold Ltd, Gloucester, Norbury, Barbican.

"Every PET owner should read it"

Chuck Peddle, Inventor of the PET

"The PET Companion" is a fascinating collection of essential PET information from the pages of *Microcomputer Printout*. It contains **all** of the editorial from the 1979 & 1980 issues, including 105 PET programming hints and tips, 116 news reports, reviews of 54 peripherals ranging from light pens to printers and 27 major articles on PET programming. All of it written in straightforward English.

Some of the topics covered:

PROGRAMMING THE PET

Double Density Plotting
Modular Programming
Programming Style
Graphics
Subroutines
Sorting Out Sorts
Tokens
The Game of LIFE
Tommy's Tips
ROM Addresses

HARDWARE REPORTS

The New ROM Set
CBM 8032 SuperPET
CompuThink Disk Drives
Hardware Repeat Key
High Resolution Graphics
The Commodore Printer
How the Keyboard Works
AIM161 A to D Convertor
Commodore's 3040 Disk Drive
PET's Video Logic
Colour for PET: The Chromadaptor

THE SOFTWARE

Business Software Survey
Cosmic Invaders
Superchip
PETAID Do-It-Yourself Database
What's Wrong with WORDPRO?
Screen Display Aids
Keyboard Tutor
Photography Course
Who Do You Want To Be?: Fantasy Games
Commodore's Assembler Development System
Programming Aids & Utilities Survey
PET Games

THE SPECIAL REPORTS

PET in Education
PET Show Report
The Jim Butterfield Seminar
Hanover Fair Report
PET In Public Relations
Local User Groups
High Resolution Graphics
Commodore's New Technology
Future Shock: Forecasting The Future
Speech Synthesis
PET As Secret Agent
A Visit to the Commodore

plus news, letters, gossip and regular columns by leading PET experts.

To: Printout Publications, P.O. Box 48, Newbury RG16 0BD. Tel: 0635-201131

Please rush me a copy of the PET Companion

[ ] I enclose cheque/postal order/money order

[ ] Please charge my Access/Eurocard/Mastercharge or Barclaycard/Visa No:.....

[ ] UK £9.50 plus 45p postage [ ] USA $25 [ ] Overseas £12

(Credit card orders accepted by telephone on 0635-201131)

NAME: .....

ADDRESS: .....

.....

Postcode: PCW1181



BANKS' STATEMENT

THE GATES ARE WIDE OPEN

Martin Banks examines an upcoming generation of chips which promise to change hardware design concepts radically.

'Once upon a time,' Daddy said, as he tucked Junior gently into bed, 'there were a lot of big companies that made a great deal of money making very, very clever things called integrated circuits.

'These were used by other companies that made a great deal of money putting them together into little boxes. Now these did clever things as well and were called microcomputers. The people who worked for these companies were all extremely clever and were able to do things that ordinary people, like you and me, just couldn't do for love nor money.

'Then, there were the people and companies who were just as clever, but in a different way. They were able to sit down and work out all the detailed instructions that were needed to make those microcomputers do what other people wanted them to. It was all terribly involved, and there weren't many people who could do it well. In fact, there weren't that many who could do it at all.'

'Oh, Daddy,' said Junior turning over and closing his eyes, 'I don't believe your boring rotten old story. No-one ever did it like that. Look, I can build a system easy, and I'm only six It's not quite as boring as Lego.'

How far into the future this particular fairy story has to be set is hard to tell. Probably it will never actually occur in the words as set down. There is a good chance, however, that the idea — that the way in which the semiconductor companies produce chips that others engineer into systems that others provide complex programs for will drift off into antiquity — is quite valid.

What's more, the trends and developments in the design and manufacture of integrated circuits that will cause that drift are starting now.

The first, and possibly most important, is gate array design. The second is the development of firmware modules, which will have a more long-term impact.

The idea of gate array design in integrated circuits has been around for some time. Patents were taken out by Texas Instruments in the early seventies. That company's initial work had been aimed at a technique it called discretionary wiring, where each silicon wafer would hold a variety of different circuit types rather than the normal practice of a large number of circuits that were all the same. The Texas idea was that, instead of breaking up the wafer into individual circuits, it would be used intact and that a system function would be produced by wiring together the needed individual circuits. Because of yield problems (where one defective circuit could mean the complete wafer was useless) the technique never caught on. The idea, however, stuck.

It was translated to the individual chips instead of wafer, and instead of attempting individual circuits the idea became that of putting a range of logic functions onto a single chip.

One of the first companies to pioneer this approach was Ferranti with its Uncommitted Logic Array. By 1974 it was producing devices with about 100 uncommitted gates on each and started to corner what was then a very small market.

That market is now set to take off, for the idea of the gate array device is now taking off, and for some very sound reasons.

Gordon Moore, one of the three founders of Intel, is also famous among the semiconductor fraternity as a 'law' maker. One of his laws states, in essence, that as device complexity increases, the number and diversity of potential functions that can be incorporated into a circuit also increases. Extrapolate this and a point is reached at which the users of the circuits can legitimately expect to see devices that contain exactly the functions they alone require. But from the industry's point of view there can be nothing worse, for it means that it becomes impossible to manufacture the devices the market wants at any thing like the volume required to make them economically. QED, increasing complexity and high volume manufacture are mutually incompatible.

The game array neatly sidesteps this problem. By using it, the semiconductor companies can maintain volume manufacture of the basic uncommitted arrays and even gain the inherent advantages of better product yield. The final product will also be able to meet the majority of applications and functional requirements of the majority of users.

This is how it is done. The gate array chip consists of a circuit that is partially manufactured. Each chip contains an array of logic gates and other circuit functions found in every device ever made. They are, however, unconnected. It is therefore possible for a circuit designer to carry out the specific task of matching the logic functions to a user's requirements with relative ease. With the design complete, the final masks which define the pattern of interconnections are produced and the circuit completed.

The major disadvantage of this approach is that only the majority of applications can be tackled. It should be noted, however, that with the general increase in circuit complexity, that majority is getting ever bigger.

The advantages are that customer specific circuits can be produced quickly, easily and cheaply. It also means that the semiconductor industry can maximise production and process skills and make the best use of the complexity available to it (and the users).

When Gordon Moore first put forward his law, he noted that many of the large systems houses (especially large computer companies) had internal semiconductor fabrication operations making the devices they specifically required. He suggested that the trend would continue.

With the gate array it certainly will and the ability for small systems companies to follow the trend will have some interesting results. Ferranti, for example, states that for many applications the design work is simple enough for the user to do — no more semiconductor 'black art'. This ability of small systems companies to design the circuits they require for the systems products they plan — rather than 'make do' with the devices the semiconductor companies care to manufacture — opens up a whole new growth arena in microcomputer capability.

Specific products advantages (more power, more flexibility, greater communication capability, lower cost and easier manufacture) can now be engineered into new systems as and when required. Just look at what Uncle Clive has achieved with the Sinclair ZX81, which uses a Ferranti gate array, compared to the ZX80. A better computer is also cheaper.

A natural extrapolation of the small microcomputer manufacturer being able to make use of gate array circuits to economically produce exactly what is required is that the user (or more specifically the local distributor/dealer/systems house) will also be able to do it. Why shouldn't such people, who in theory at least know what their

GOTO page 165

Now With 9x9 Matrix and True Descenders

NEW from OKI



RRP £425 +VAT

Serial Dot Matrix printer

** 120 cps **

Bidirectional

The Microline 82A

CHARACTER DENSITIES:
10 CPI
ABCDEFGHIJKLMNOPQRSTUVWXYZ abcdefghijklmnopqrstuvwxyz
5 CPI
ABCDEFGHIJKLMNOPQRSTUVWXYZ
8.3 CPI
ABCDEFGHIJKLMNOPQRSTUVWXYZ

Microline printers are again setting the quality standard for the entire industry. Built on a cast aluminium base and driven by two motors, these rugged units will run all day with no duty cycle limitations. The head warranty, equivalent to 200,000,000 characters, is unmatched in the industry.

We don't need to offer a replacement print head!

The Microline 82A prints bidirectionally at 120 characters per second and includes a short line seeking logic that can increase throughput by 80% over equivalent unidirectional printers. A dense 9 x 9 dot pattern is used to produce crisp, clean copies, first copy to last.

In addition to normal upper and lower case, ten character per inch printing, the 82A prints both double width and condensed characters at six or eight lines per inch. Font selection, character pitch and line spacing are all standard and program-controlled.

Graphics
Microline users can generate charts, graphs and illustrations and explain them with captions of double width characters. The Microline 82A prints 64 block shapes in addition to the full character ASCII set.

Three Printers in One
Microline 82A users do not have to purchase different models for different forms. The standard platen accommodates friction and pin feed forms and optional tractors snap in place and adjust to suit form width. The Microline 82A provides versatile forms controls including vertical tab, top of form and a vertical format unit that provides switch and program selection for up to ten form lengths.

Interfaces
The Microline 82A is offered with both Centronics-compatible parallel and RS232C serial interfaces as standard equipment and TRS-80™, APPLE® and other popular small computers.

IEEE 488 parallel and current loop interfaces are also available.

Standard Features
- ☐ 120 cps
- ☐ 9 x 9 matrix
- ☐ Bidirectional
- ☐ Short line seeking
- ☐ 80 columns with standard characters
- ☐ 132 columns with condensed characters
- ☐ Graphics
- ☐ Dual interfaces
- ☐ Operates with TRS-80™, APPLE®, PET and others
- ☐ Plain paper – up to 4 parts
- ☐ Full 96 character ASCII set
- ☐ Double width characters
- ☐ 6 and 8 lines per inch
- ☐ Paper tear bar

NORTHAMBER LIMITED

Phone 0372 62071

Great Oak House, Esher Surrey KT10 9JR.
Importers Distributors & Wholesalers of quality computer products.

The Printer People
If you want a Printer tomorrow call us today

Full details on request.

Phone 0372 62071

For your nearest stockist



QANTEX

- Series 6000/6010 printers
- X on/X off
- Parallel or serial interfaces
- 150 characters per second

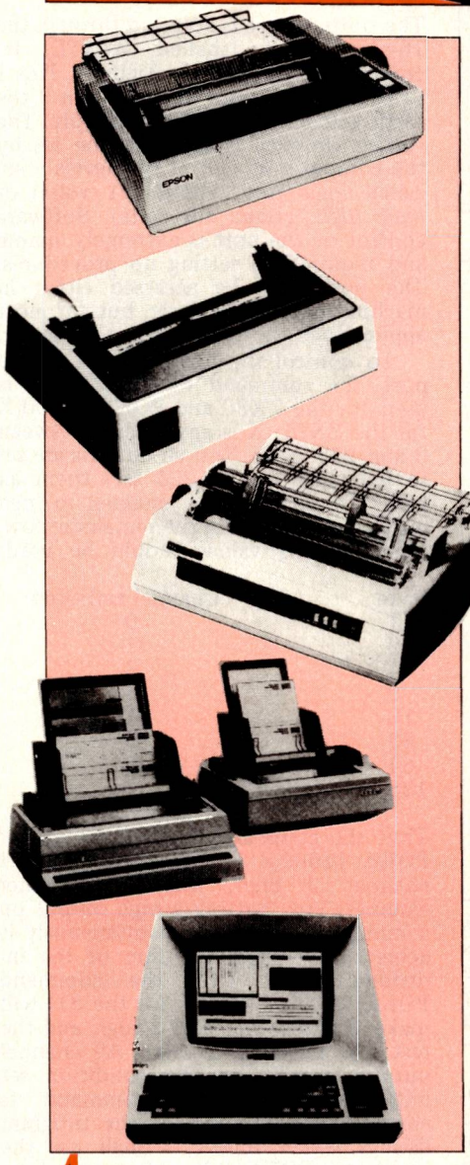

EPSON MX 80T, MX 80FT, MX 100.

- ☐ Built in dependability with an extensive range of features.
- ☐ Unbelievable quality from the world's largest print head manufacturer.

OKI MICROLINE 80, 82A, 83A.

- ☐ Small, light, quiet matrix printer.
- ☐ 40, 80 or 132 columns.
- ☐ 6 or 8 lines per inch.

NEC SPINWRITER 5510-RS232, 5530 Centronics 8 bit par.

- ☐ 5 copies
- ☐ Friction or Tractor Fed
- ☐ 55 characters per second

ASF 160 and 560 SERIES AUTOMATIC SHEET FEEDERS

- ☐ Feeds up to 250 single sheets or letterheads automatically – no more hand-feeding!
- ☐ Easily attached or removed in seconds.

TVI 910, 912C, 920C, 950.

- ☐ Fully intelligent Terminal with 24 x 80 display and dual intensity, blinking, reversed, underline & protect fields
- ☐ ASCII characters etc.

Unbeatable Dealer Discounts From Your Ex-stock Wholesaler

Wholesale, Education and OEM enquiries welcome

Delivery by Securicor (24 hours)

If you want a Printer tomorrow- call us today

Full details on request.

NORTHAMBER LIMITED

Great Oak House, Esher, Surrey KT10 9JR
Phone: Esher (0372) 62071
Importers, Distributors & Wholesalers of quality computer products

CONTROL YOUR OWN SUBSTATION!

Well, maybe not quite a substation, but a new add-on for the Sinclair ZX80 and '81 will let you connect up to the outside world, as D E Graham describes.

Early adverts for the Sinclair XZ80 promised that the machine could do 'anything from playing chess to running a power station'. This, of course, was wildly optimistic; chess on the basic ZX80 then available would have been laughable and as to controlling a power station — well, apart from anything else, for a computer to control anything in the outside world, it has to be connected up by one or more *ports*, or interfaces, which allow signals to be passed between the computer and the device under control. The '80 and '81 both came with just one port, the cassette port, which is patently unsuitable for control purposes.

This article describes the use of a two-way data port on the ZX80 and 81; and, while not allowing complete control over all power station functions, it does offer a wide range of applications from push button data input, proximity detectors and joysticks, to light sensors, seven-segment displays, relay operation and sound output.

The 80/81 port to be described here comes in two versions — one for the ZX80 and one for the 81. Each plugs into the rear of the machine — see photograph — and runs from the computer's internal power supply. Unfortunately, it isn't possible to plug in both the RAM expansion pack and the port board at the same time, which means that unless your machine has extra internal memory, you'll be rather limited in what you can do. Don't despair, though; firstly, you can still do quite a few interesting things even with 1k of RAM; and secondly, when the printer becomes available, there will presumably be an adaptor to allow its use with the RAM pack in place — and this should also allow the board to be used with the memory extension. The 80/81 port is available in kit form from Technomatic Ltd, tel 01-452 1500, at £11.50p excluding VAT & PP.

In the first of two articles, we will cover how the port is used and what it can do, and will look at some simple applications. Next month will treat more complex applications — including sound output.

What's a port?

A port is simply a channel or series of channels through which information can pass either to or from a computer. On the 80/81 port to be described here, there is one *input port* for data to be received (or *read*) by the ZX80 or 81, from the outside world, and one *output port* for data to be sent (or written) to the outside world. Both

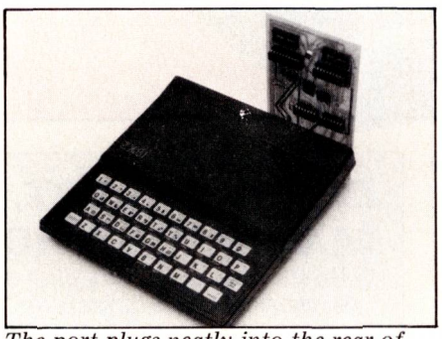

The port plugs neatly into the rear of the '80/81.

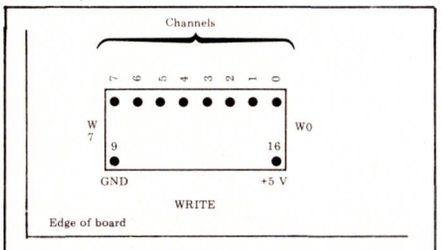

Fig 1 Connections to output socket

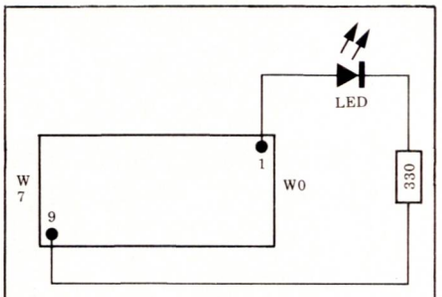

Fig 2 Output port with LED on channel zero

ports have a total of eight channels (as is usual in 8-bit computers). This means that there are eight separate lines whose signal levels the ZX80/81 can test or read in, and eight other lines whose voltage level the ZX80/81 can individually control.

Each of the input lines could be connected to a different device. Line zero could be wired to a light sensor, line one to a push button, lines two and three to a joystick, and so on, and the computer could be programmed to respond differently to each different combination of input data.

Each of the output lines could be connected to a different device. Line zero could cause a lamp to flash, line one could activate a loudspeaker to give sound output of varying tones, line two could cause a relay contact to close, which may in turn be used to switch on pretty well any imaginable device. As may be seen, such an input/output facility offers a very wide range of data collecting and control capabilities.

Output port

The output port is accessed through the 16-pin socket labelled WRITE. Its connections are given in Figure 1. Pins 1 to 8 carry the eight channels, pin 9 the earth and pin 16 the 5-volt supply. The voltage on each channel can be set by the computer at one of two levels — so-called *logic low* (about 0.1 volts) or *logic high* (about 4.5 volts). Software control of the port is extremely simple and requires no setting up procedures. The port may be accessed either in machine code or in Basic, but for most applications we shall be using the latter.

To control the output levels of the port, the command POKE 25000,X is used for the ZX80 and POKE 11000,X for the ZX81. X is any integer between 0 and 255. With X=0 all outputs are set to logic low, while 255 sets them all high. To set any one channel to high output, while leaving the remainder low, the following values should be used:

Poke	Channel activated
1	0
2	1
4	2
8	3
16	4
32	5
64	6
128	7

Thus the command POKE 25000,8 (or POKE 11000,8 on the ZX81) will set channel 3 high, leaving all other channels low. Setting a high output on a number of channels simultaneously is achieved by using the sum of the individual data. Thus the command POKE 25000,7 (11000 for the 81) will make channels 0,1 and 2 high and the rest low (since 7=1+2+4). All channel outputs remain in the condition set until another POKE command is encountered. In most of the program listings which follow, I shall use the command POKE P,X. When you type in the programs, type 25000 instead of P if you have a ZX80, or 11000 instead of P if you have an '81.

LED indicator

The light emitting diode (or LED) is a low power (and low cost) indicator lamp that may be driven directly from any channel of the output port, using only a single series resistor. Figure 2 shows the connections for a single LED lamp on channel zero. Note

that LEDs are polarised and will only give off light when placed the correct way around — but that placing them the wrong way will not harm either them or the port. To light the LED in channel zero, execute POKE P,1. POKEing the value zero will extinguish it. The programs below will cause the LED to flash on and off indefinitely.

```
10 REM ZX80 FLASHER
20 POKE 25000,1
30 FOR A=1 TO 100
40 NEXT A
50 POKE 25000,0
60 FOR A=1 TO 100
70 NEXT A
80 GO TO 20
```

```
10 REM ZX81 FLASHER
20 POKE 11000,1
30 FOR A=1 TO 10
40 NEXT A
50 POKE 11000,0
60 FOR A=1 TO 10
70 NEXT A
80 GO TO 20
```

The ZX81 program assumes the slow mode. In the fast mode, a longer waiting loop at lines 30 and 60 could be used to slow the speed of the flashes. Either program could be used as part of a subroutine of a larger program but some means of escaping from it at the required point would have to be incorporated — eg, by counting the number of flashes.

It is possible to connect up to eight LED indicators to the output port (see Figure 3 for wiring). Each one may be turned on and off separately and a number of effects may be produced with very simple software. For example, the program below ripples through the outputs from zero to 255, and then repeats:

```
10 REM RIPPLE COUNTER
20 FOR A=0 TO 255
30 POKE P,A
40 NEXT A
50 GOTO 20
```

This causes each lamp to flash at a different rate. That on channel zero flashes most rapidly, channel one follows at half the rate, and so on up to channel seven. A waiting loop could be inserted between lines 30 and 40 to slow things up if desired.

It is also easy to produce a light chaser effect in which a lighted LED appears to run repeatedly across the eight lamps. The following program produces this effect. When used with the ZX81, the fast mode must be used in order to achieve any useful speed.

```
10 REM LIGHT CHASER
20 FOR F=0 TO 7
30 POKE P,2**F
40 NEXT F
50 GOTO 20
```

The program works by taking powers of two and POKEing them to the port (since the values that set each of the individual channels are the sequence of powers of two — ie, 2^0 (=1) sets channel zero, 2^1 (=0) sets channel one, 2^2 (=4) sets channel two, and so on). In the first cycle of the FOR loop, F=0 so that 2 to the power zero is sent to the port, illuminating channel zero. The second cycle sends 2 to the power one, and so on up to 2 to the power seven, (=128) which lights channel seven. The sequence then repeats by returning to line 20.

Alternatively, random combinations may be displayed on the eight lamps, using the RND function. Note that on the ZX80 the three letters must be typed in full since there is no key for RND.

```
10 REM RANDOM DISPLAY - ZX80
20 LET X=RND(255)
30 POKE 25000,X
40 FOR A=1 TO 100
50 NEXT A
60 GO TO 20
```

```
10 REM RANDOM DISPLAY ZX81
20 POKE 11000,255*RND
30 GO TO 20
```

The relative shortness of the XZ81 program arises because, in the slow mode, no delay loop is required since the natural calculating speed is really very slow.

One or more LEDs may also be used as readout indicators — for indicating useful scores, program position, etc. This is particularly useful on the ZX80, where the screen blanks during computation. A single LED could be made to flash to indicate that a certain point in the program had been reached. This is easily achieved with a modification of the software already given. Alternatively all eight LEDs could be used for data output to give a score, or other result. One way to achieve this would simply be to POKE the data (assuming that it is an integer between 0 and 255) directly to the port. This will produce a combination of ons and offs which uniquely represents any one of the 256 possible integers from 0 to 255. In fact the readout produced is the *binary* representation of the number POKEd to the port, with a one being represented by a lighted LED, and a zero by an extinguished one. For example, the binary representation of the number 131 is 10000011; and if you POKE the value 131 to the output port, you should see its binary representation on the LEDs — provided you have W0 on the right hand side. One could even use this to write a games program that output a random number on the LEDs and required the correct decimal equivalent to be entered through the keyboard by the players.

If the eight lamps are being used for readout purposes, and you do not automatically think in binary, you may prefer a simpler method of readout. The following is much easier to read, but allows only nine possible levels of output. It produces a line of lights whose length is the number to be output. Zero is thus represented by all lamps off, the number 8 by all lamps illuminated, and so on. The following routine achieves this effect where X is the value to be displayed and is assigned to any integer value from 0 to 8 before entering the routine.

```
300 REM ROW OF LEDS READOUT
310 LET B=0
320 FOR A=0 TO X-1
330 LET B=B+2**A
340 NEXT A
350 IF X<2 THEN LET B=X
360 POKE P,B
```

Relay output

Each one of the eight output channels may be used to activate a relay. The relay may in turn be used to switch on and off almost any device imaginable. A set of eight relays, for example, could be used with the light chaser program, or the random display program to reproduce the effect on a much large scale. Relays cannot generally be connected directly to the output port in the way that LEDs can and a so-called buffer or driver amplifier will be needed in each channel used for relay driving. Also, very few relays will operate satisfactorily from supplies as low as 5 volts. A single uncommitted buffer amplifier has been included on the 80/81 port board for such purposes as relay driving; and Figure 4 shows it connected up to drive an Omron type LZNZ 03 6-volt relay from channel zero. In this case the relay is powered by the ZX 9/10 volt DC supply taken to pin 11 of the WRITE socket and this should satisfactorily drive two or three such relays. If more are to be used, then a separate 9-volt supply should be used. Note the use of the diode across the relay coil. This is necessary to protect the buffer from voltage spikes caused by the relay. Note also that if it is intended to use the relay contacts to drive mains voltages, extreme care should be taken

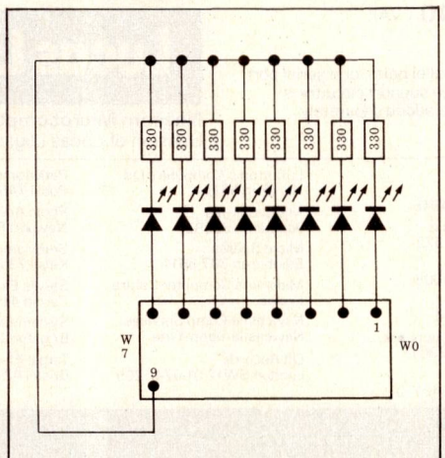

Fig 3 Output port with eight LEDs

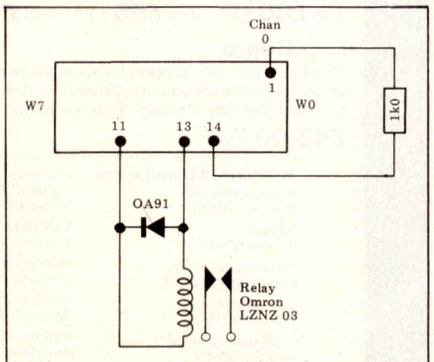

Fig 4 Output port with relay on chan 0, driven by on-board transistor driver. Relay is powered by 9 V supply at pin 11. The resistor connects chan 0 to the transistor's base; the transistor's collector is connected to the relay.

nascom

.... Computing for everyone

Nascom products, designed and built in Britain, are now backed by Lucas one of Britain's foremost industrial companies. This is a vindication of the innovative design of the Nascom computer and an assurance of its future.

NASCOM-1

Kit Price **£125** + VAT

Built Price **£140** + VAT

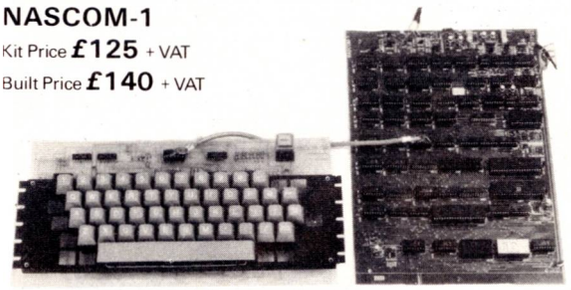

12" x 8" PCB carrying 5LS IMOS packages 16.1K MOS memory packages and 33 TTL packages. There is on board interface for UHF or unmodulated video and cassette or teletype. The 4K memory block is assigned to the operating system and video display, leaving a 1K user RAM Complete with keyboard.

NASCOM 2

Kit Price **£225** + VAT

Built Price **£265** + VAT

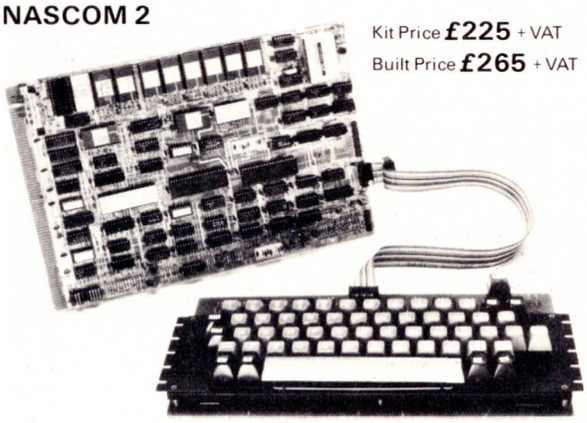

Kit includes all parts to build CPU board which has resident 8K Microsoft BASIC and 2K NAS-SYS 1 monitor for machine code programming. Included with kit is a fully assembled LICON QWERTY SOLID STATE KEYBOARD specially designed to exploit the potential of the NAS-SYS monitor. Other interfaces include video to monitor or domestic TV, Kansas City standard cassette interface (300/1200 baud) or RS232/20mA teletype interface and two uncommitted parallel ports.

RAMBOARD

SERIES B ramboard gives user option of 16K-48K DYNAMIC RAM. This board can be arranged in page mode to allow use of up to 4 with NASCOM 2. Boards are fully buffered but PAGE MODE facility is an optional extra. This card can be used at 4MHz without wait state.

16K **£80** + VAT. 32K **£95** + VAT. 48K **£110** + VAT.

I/O Board

This board provides support for six eight-bit parallel ports, one serial port and a sophisticated counter/timer unit. Only the support circuitry is provided, the main devices, from one to five, are added separately.

£45.00 + VAT.

Optional Packs for I/O Board

PIO Pack	Contains one MK3881 PIO.	£12.00 + VAT
UART Pack	Contains one 6402/8017 UART and the components for a crystal controlled V24/RS232C Interface.	£16.00 + VAT
CTC	Contains one MK3882 Counter timer circuit.	£14.00 + VAT

NASCOM IMP PLAIN PAPER PRINTER

The Nascom IMP (Impact Matrix Printer) features:
● 60 lines per minute ● 80 characters per line ● Bi-directional printing ● 10 line print buffer ● Automatic CR/LF ● 96 characters ASCII set (includes upper/lower case, $, £) ● Accepts 8½" paper (pressure feed) ● Accepts 9½" paper (tractor feed) ● Tractor/pressure feed ● Baud rate from 110 to 9600 ● External signal for optional synchronisation of baud rate ● Serial RS232 interface.

£325 + VAT.

NASCOM FIRMWARE

CPU card can accommodate either 8K of static memory or 82708 EPROMS. This allows for inclusion of standard firmware on board **ASSEMBLER** Version 2.1 of ZEAP (Z80 Editor Assembler Package). A comprehensive line editor is provided in addition to an assembler operating in standard Z80 mnemonics. ZEAP can take advantage of special features of NAS-SYS, which was itself developed on this assembler. Supplied on tape **£30.00** plus VAT or in 4 x 2708 EPROMs at **£37.50** plus VAT.

DISASSEMBLER The NAS-DIS 3K disassembler reverses the effect of assemblers such as ZEAP by turning machine code into assembler program, automatically labelling and cross-referencing to produce a complete program listing. Supplied in 3 x 2708 EPROMs at **£30.00** plus VAT.

NASPEN
Naspen is a 2K word processor supplied in two EPROM's. It provides facilities for text entry modification and is capable of finding specified words or characters in the text block and of operating a printer remotely. **£25.00** plus VAT.

NAS-SYS 3. THE NEW OPERATING SYSTEM FOR NASCOM 2.
Supplied in 1 x 2716 EPROM.
NAS-SYS 3 is the latest in the current series of Nascom monitors and includes features such as adjustable keyboard repeat and cursor speed, full interrupt handling and a number of powerful routines and commands making this probably the most comprehensive 2K monitor ever written for a microcomputer **£20.00** plus VAT.

New A moulded case for the Nascom computer

New Twin floppy disks

Lucas Logic

Nascom Microcomputers
Division of Lucas Logic Limited, Warwick

Authorised Distributors:

Anglia Computer
Norwich 29652

Bits & P C s
Wetherby 63774

Business & Leisure
Kenilworth 512127

C J R Microtek
Ipswich 50152

Crystal Electronics
Torquay 22699

Datron Micro Ctr
Sheffield 585490

Electrovalue
Egham 3603
Manchester 4945

Eley Electronics
Leicester 871522

Henrys Radio
London 723 1008

Holtain Ltd
Crymych 9656

Interface Components
Amersham 23307

JPS
Huntingdon 840710

Lunatronic Computers Ltd
Hereford 66174

Micro Comms
Aberdeen 63385

Micro Spares
Edinburgh 337 5611

Midshires Computer Centre
Crewe

Newcastle Comp Services
Newcastle-upon-Tyne

Off Records
London SW12 01 674 1205

Parkstone Electric
Poole 746555

Photo Acoustics
Newport Pagnell 610625

Semicomps Northern
Kelso 73 2366

Steves Electronic
Cardiff 41905

System Electronics
Brighton 26081

Target Electronics
Bristol 421196

Trading Post
Hastings 437875

Zeta Computers
Stonehouse 2444

CONTROL YOUR OWN SUBSTATION!

to isolate all live leads, and to ensure that the current and voltage ratings of the relay contacts are not exceeded. It may also be necessary to prevent pick up from the relay contacts by screening, etc.

If more than one relay is to be used with the 80/81 Port, a convenient way to buffer each channel is to use a hex (ie, six-channel) driver integrated circuit. Figure 5 gives a circuit showing the use of the 7416 integrated circuit to drive relays on channels 0 and 1. With this configuration, POKEing 0 to the port will turn off both relays, 1 will turn on the first, 2 the second, and 3 will activate them both.

Sound output

Sound output will be dealt with in some detail next month, but for now there are two simple ways to produce noises at the output port. The first is, rather obviously, to use a relay to switch on a device such as an electric bell or buzzer. The second utilises a so-called solid state buzzer. These devices work at low voltages — typically 6 volts — and very low currents — perhaps 10 or 20 milliamps, and can produce a good deal of noise. It is possible to wire one of these directly to a channel of the output port as in Figure 6, which shows it connected to channel zero. To make it buzz, POKE zero to the port and to stop it, POKE 1. The inversion effect (ie, 0 TURNS it on not off) arises because the buzzer is taken to the positive supply rather than to earth as were the LEDs.

The programs above for the single flashing LED may be used with the buzzer without modification and will cause it to bleep on and off. The buzzer obviously has quite a range of uses on the 80/81 port, from telling you that the ZX thinks that your egg is cooked, to sending morse code from letters entered via the keyboard.

Seven-segment displays

The 80/81 Port will support one or more seven-segment displays. These are illuminated readouts capable of displaying the digits zero to nine. Such a display has many uses, allowing data to be read out while keeping the screen clear for other purposes, for example. And with the ZX80 (and ZX81 in the fast mode) it offers the possibility of reading out data without stopping (or slowing) the program.

The easiest way to run such a display is to use a so-called decoder-driver integrated circuit such as the 7447. What this does is to arrange for the correct segments of the display to be lit for any given number from 0 to 9 sent to the IC. It also contains a set of buffer amplifiers to enable the display to be lit to full brightness. Figure 7 shows the circuit for driving an FND 507 single-digit display from the 80/81 port. Note that a separate supply has been used to drive the display so as not to put too much strain on the ZX internal power supply. The external supply may be a 5 volt regulated power supply but, failing this, a single 4½ volt torch battery (Ever Ready type 1289) will work perfectly adequately.

To display any number from 0 to 9, simply POKE that number to the output port. Thus POKE P,6 will display a 6, and so on. The displayed digit will remain until another value is POKEd to the port. The program below may be used to test the display:

```
10 REM SEVEN SEG DISPLAY TEST
20 INPUT A
30 POKE P,A
40 GO TO 20
```

Using this you will see that values of A between 10 and 16 are also uniquely represented on the display by a set of symbols — and these can obviously be used to extend the range of the display to 16.

Two-digit readout

Since this display uses only four of the eight channels available at the 80/81 output port, a second may be added by duplicating the circuitry of the first, on channels 4 to 7. This will give a representational capability of 0-99 decimal, or 0-255 if the symbolic representation of 10-16 is made use of.

If the double display is being used for a decimal representation of the numbers 0-99, it is necessary to filter out the unwanted symbols using software. The following program uses such a routine in order to achieve a repeating count from 0-99.

```
10 REM 0-99 COUNTER
20 FOR C=0 TO 99
30 LET N=C
40 GO SUB 200
50 POKE P,N
60 NEXT C
70 GO TO 20
200 REM CONVERSION ROUTINE
210 LET A= N/10
(for ZX82 this must be changed to:
LET A= INT (N/10).)
220 LET B=N-A*10
230 LET N=16*A+B
240 RETURN
```

Waiting loops may be added in each case to vary the count rate. The subroutine at 200 may be used in other similar applications. It takes a variable N equal to any integer from 0 to 99, and

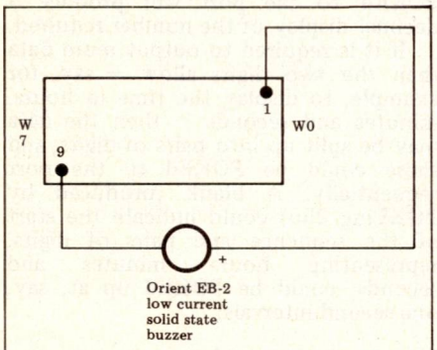

Fig 6 Output port driving solid state buzzer on chan 0.

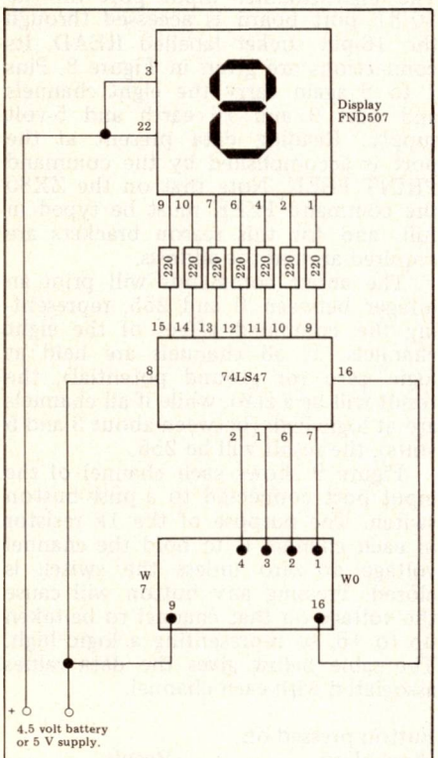

Fig 7 Output port driving single seven-segment display on channels 0-3

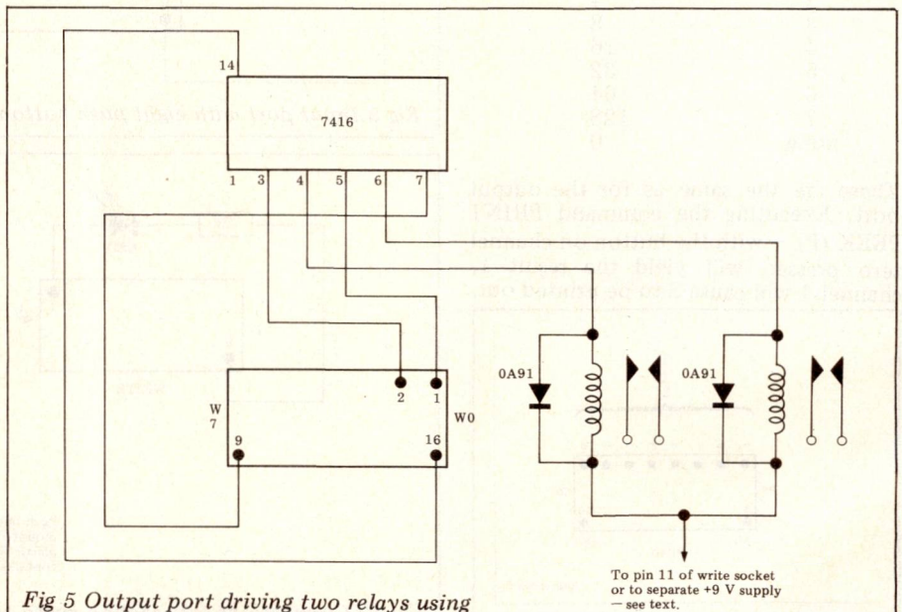

Fig 5 Output port driving two relays using 7416 inverting driver.

CONTROL YOUR OWN SUBSTATION!

converts it to an integer which when POKEd to the port will produce a decimal display of the number required.

If it is required to output more data than the two digits allow — say, for example, to display the time in hours, minutes and seconds — then the data may be split up into pairs of digits, and these could be POKEd to the port sequentially. A blank (produced by POKEing 255) could indicate the start of the sequence and pairs of digits, representing hours, minutes and seconds, could be POKEd up at, say, one-second intervals.

Input port

The eight-channel input port on the 80/81 port board is accessed through the 16-pin socket labelled READ. Its connections are given in Figure 8. Pins 1 to 8 again carry the eight channels and pins 9 and 16 earth and 5-volt supply. Reading data present at the port is accomplished by the command PRINT PEEK. Note that on the ZX80 the command PEEK must be typed in full, and for this reason brackets are required around the address.

The above commands will print an integer between 0 and 255, representing the combined effect of the eight channels. If all channels are held at logic zero (or ground potential), the result will be a zero, while if all channels are at logic high (between about 3 and 5 volts), the result will be 255.

Figure 9 shows each channel of the input port connected to a push-button switch. The purpose of the 1k resistor in each channel is to hold the channel voltage at zero unless the switch is closed. Pressing any button will cause the voltage on that channel to be taken up to +5, so representing a logic high. The table below gives the data values associated with each channel.

Button pressed on channel no.	Result
0	1
1	2
2	4
3	8
4	16
5	32
6	64
7	128
none	0

These are the same as for the output port. Executing the command PRINT PEEK (P) — with the button on channel zero pressed will yield the result 1, channel 1 will cause 2 to be printed out, and so on up to the button on channel 7 which will yield the result 128. Combinations of the various buttons will give values found by adding the associated button values; again, in a similar manner to that for the output port. Thus PEEKing with the buttons pressed on channels 2 and 4 will give a result of 20 (=4+16) and so on. Pressing all buttons simultaneously will give the result 255; this being the numerical addition of the eight values in the table. Note that with nothing connected to any particular channel, it will be read in as a logic high. This may cause some confusion, and it is probably easiest to short to earth (either directly or via a 1k resistor) any channel not in use.

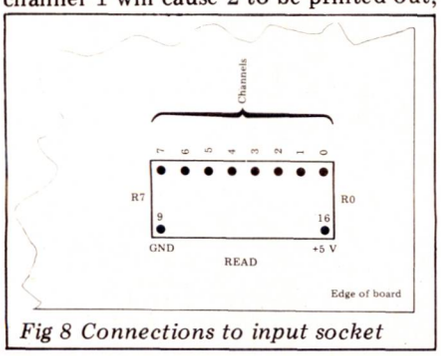

Fig 8 Connections to input socket

Data input

One or more push-buttons or switches, wired as in Figure 9, may be used to make decisions during the running of a program. For example, a switch could be placed in channel 8 of the input port (ie, on pin 8 of the READ socket) and a program could read the state of the switch from time to time in order to determine, say, the degree of difficulty of a game, or even which game or game variation was to be played next time around. A routine to effect this is given below:

```
100 REM CHAN 7 DECISION
110 IF PEEK (P)> 127 THEN GO
    TO 1000
120 REM FIRST COURSE OF ACTION
    ⋮
999 END
1000 REM SECOND COURSE OF
    ACTION
    ⋮
```

Note: brackets not required around the PEEK address on the ZX81.

Note that channel 7 has been used here so that by testing the PEEK value to see if it is greater than 127 we can determine whether the button has been pushed, *irrespective* of the states of the other channels. To accomplish this using any of the other channels requires more detailed software.

A similar basic polling technique could be used with one or more push-buttons to be activated at a given point during a program. The cue for this data input could be the flashing of a LED and in this way it is possible to input data during the running of a Basic program on the XZ80 without stopping the program with an INPUT statement. The routine below causes a LED (or buzzer) connected to channel zero of the output port (pin 1 of the WRITE socket) to flash/buzz on and off as a cue that data is required and the program will loop around until an input from the push button is received. If the button on channel 7 is pressed the program branches to line 200, while if any other button is pressed it branches to 300. It should be noted in this case that if the program is to work satisfactorily, all unused inputs must be taken to ground as described above.

```
10 REM FLASHING LED INPUT CUE
20 POKE P,1
```

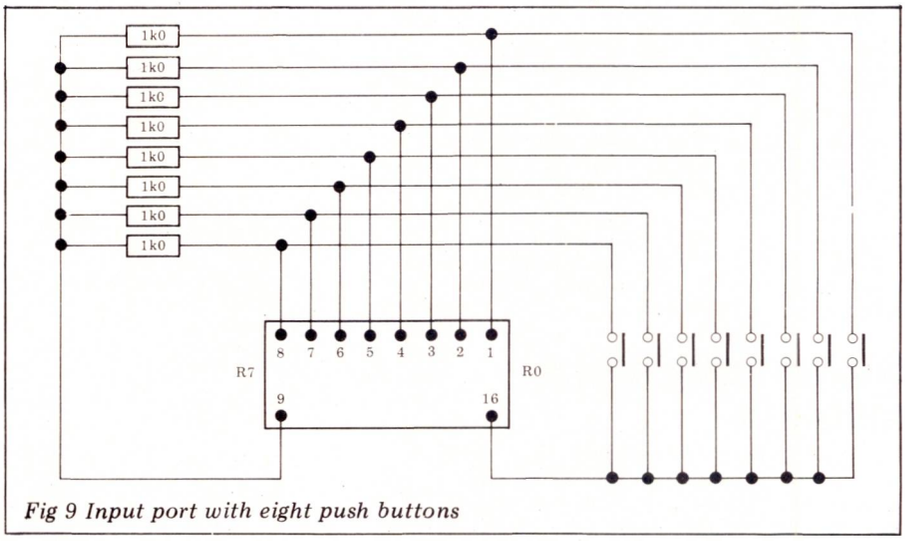

Fig 9 Input port with eight push buttons

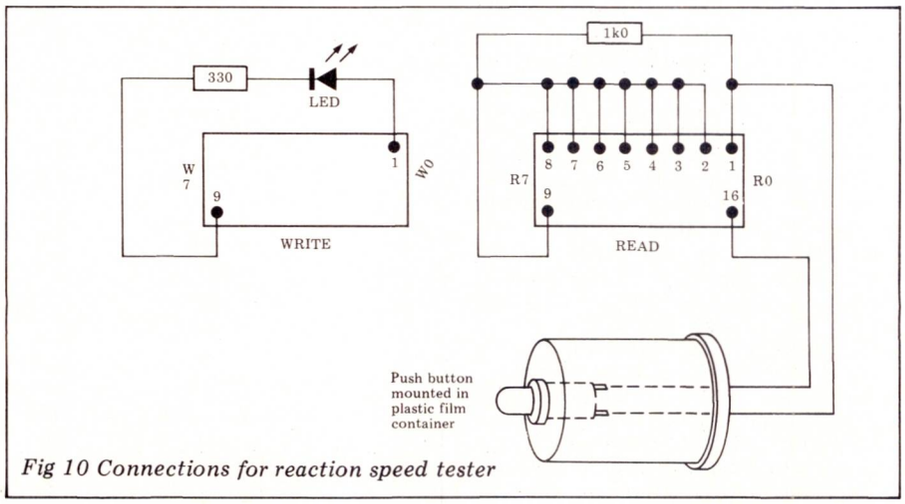

Fig 10 Connections for reaction speed tester

```
30 FOR A=1 TO 100
40 NEXT A
50 POKE P,O
60 FOR A=1 TO 100
70 NEXT A
80 LET X= PEEK (P)
90 IF X>127 THEN GO TO 200
100 IF X>0 THEN GO TO 300
110 GO TO 20
```

Reaction timer

Using a push-button on the input port in combination with a LED or buzzer on the output port allows the implementation of a reaction timer. The idea here is that the LED is lit after a random length of time; as soon as it comes on, the player must press the button and the ZX counts and prints out the time that elapsed between lamp and response. The circuit for the set up is given in Figure 10. For ease of use the push-button should be mounted on something solid. A good mounting may be made from a plastic 35 mm film container. The ZX80 and '81 differ a little in that with the '81 it is possible to switch over to the slow mode during the running of the program to display the result of each test.

The 81 program is written so that subsequent release of the button causes a second round of the game. This is not possible on the ZX80 and an INPUT statement is used to allow the result to be printed out. As the programs stand, both may be run until the screen has been filled but a routine could be added to average the results of the first ten attempts and to print this out as a game ending. The reaction times printed out are only relative and it is left to the reader to convert these, either by software or by brainpower to fractions of a second.

```
10 REM ZX80 REACTION TIMER
20 REM USES PUSH BUTTON ON
   ANY CHANNEL
30 REM AND LAMP ON CHANNEL
   ZERO
40 LET N=0
50 POKE 25000,0
60 LET A= RND(2000)+500
70 FOR S=1 TO A
80 NEXT S
90 POKE 25000,1
100 IF PEEK(25000)>0 THEN GO TO
   130
110 LET N=N+1
120 GO TO 100
140 PRINT N
150 PRINT "AGAIN — Y OR N"
160 INPUT Ys
170 IF Ys="Y" THEN GO TO 40
```

```
10 REM ZX81 REACTION TIMER
20 REM PUSH BUTTON ON ANY
   CHAN, LAMP ON CHAN O
30 FAST
40 LET N=0
50 POKE 11000,0
60 LET A=2000*RND+500
70 FOR S=1 TO A
80 NEXT S
90 POKE 11000,1
100 IF PEEK 11000>0 THEN GO TO
   130
110 LET N=N+1
120 GOTO 100
130 SLOW
140 PRINT N
150 PRINT "RELEASE BUTTON TO
   RESTART"
160 IF PEEK 11000=0 THEN GO TO
   30
170 GO TO 160
```

Combination lock

Another application of the 80/81 port using push-button data entry is an electronic combination lock. Up to eight buttons can be mounted remotely from the ZX close to the doorway concerned, with the ZX programmed to monitor their state and to respond in different ways to different codes input at the door. Some codes could automatically unlock the door using a relay to switch on a door release mechanism, while others could cause an alarm to be sounded, or to flash the owner's name on the screen, awaiting some response from the controller.

Figure 11 gives the circuit for such a system. It uses all eight channels for data input but channel 7 is used to indicate that the correct data has been set up on the other 7 buttons, so that all valid codes require button 7 to be pressed. The relay operating the door is connected to channel zero of the output port, and channel 1 operates a buzzer to indicate an invalid code. Below is a simple program for operating the system on the ZX81:

```
90 REM ZX81 COMBINATION LOCK
100 REM CODE DETECTING
   ROUTINE
110 POKE 11000,2
```


SUPERBRAIN® SERVICES

IN ALL THE RIGHT PLACES

FROM HELISTAR SYSTEMS

Repair and Maintenance

Your SuperBrain® repaired and maintained on-site through the Helistar contract maintenance service - our own engineers cover Central, North and West London, Bucks, Berks, Oxon, Herts, Northants, Beds, Glos, Warwicks. and Middx. Also repairs carried out at our workshop on a time and materials or contract basis.

Upgrades and Modifications

Have your SuperBrain disk system upgraded to QD (700Kb) or DQD (1.5Mb). Benefit from faster disk accessing and 40-track capacity with our FASTROM. Improve the character display with true descenders.

Add on Hardware

GRAPHICS - 512 x 256 high-resolution graphics with the Micronex PIXELPLOTTER®. PORT-BUFFER® - allows the connection of external devices to the internal Z80 address and data bus.

Software

Memory-mapped WORDSTAR. This version of WordStar is specially tailored to take advantage of the SuperBrain's memory-mapped video giving faster screen display and smoother scrolling.

Contact us today! Telephone Aylesbury (0296) 630364

Helistar Systems Ltd. 150 Weston Road, Aston Clinton, Aylesbury, Bucks. HP22 5EP

YOU DESERVE AN EASIER WAY TO STAY ON TOP OF YOUR RECORDS.

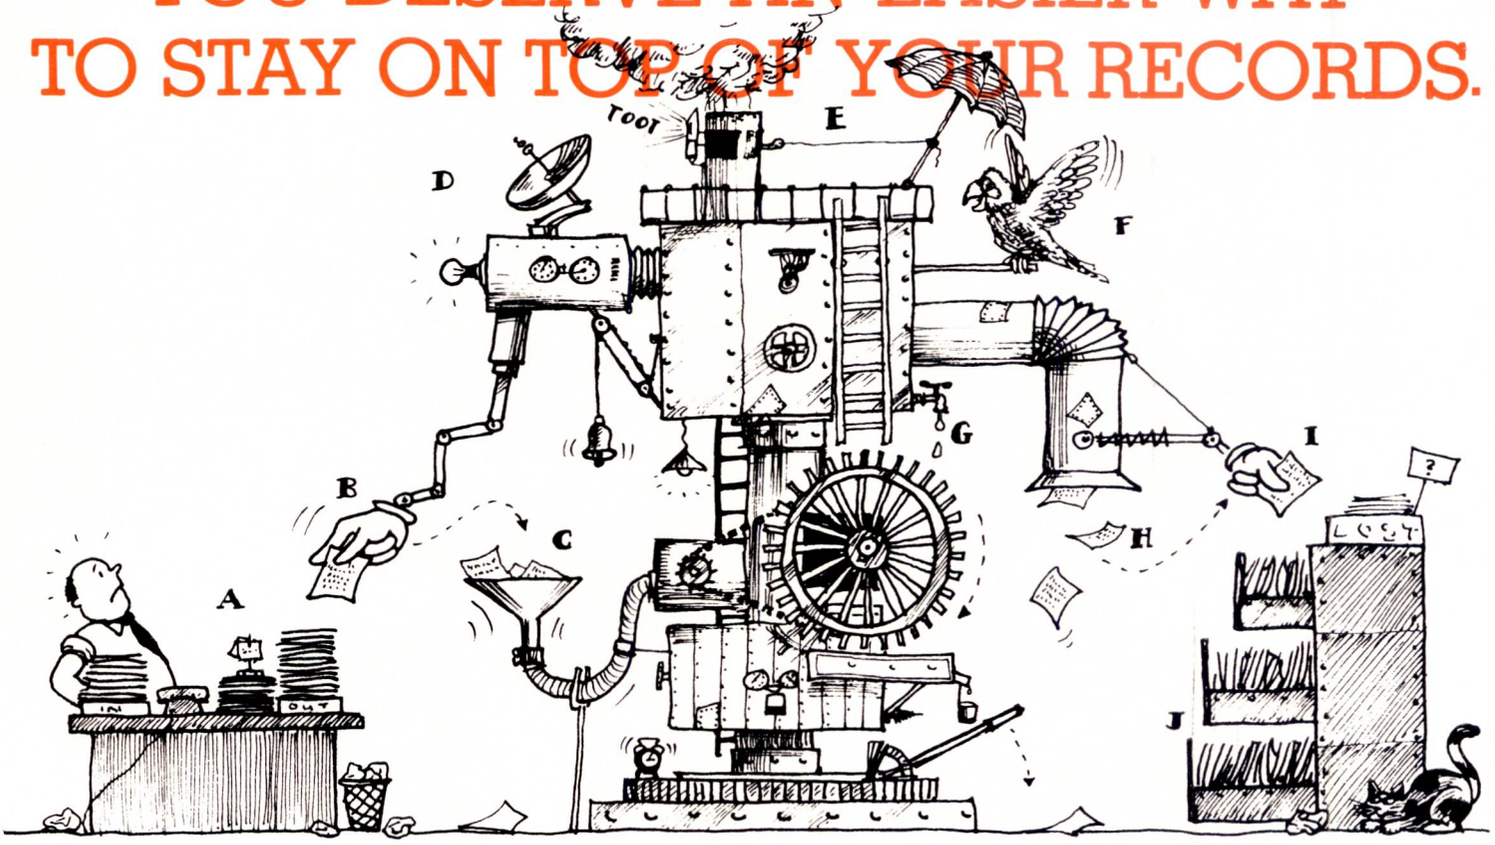

DataStar is an easy to learn, yet professionally powerful, comprehensive data entry, retrieval and update system for microcomputer systems. **DataStar** handles record keeping applications from initial design through updating, addition/deletion, and search/ retrieval of records – quickly and easily, even for complex operations. **DataStar** is a powerful program that can be used for an extremely wide range of possible applications by experienced programmers or systems analysts as well as inexperienced first-time users. The **DataStar** package consists of two parts: FormGen and DataStar. Formgen is used to prepare forms for entering data, then DataStar handles the data entry and verification process according to the form requirements defined by FormGen. **DataStar** features include: data entry verification by sight, list and retype; arithmetic operations on fields; record search/ retrieval and edit/updating; comprehensive help messages and instructions displayed on screen; compatibility with CP/M supported languages e.g. BASIC, FORTRAN etc; automatic documenting of field and form layouts detailing verification etc., horizontal and vertical scrolling allows design of forms exceeding screen width and depth. Application examples: Order entry and invoicing, name and address lists etc.

WordStar is a powerful, screen-oriented, integrated word processing package for CP/M systems. Advanced features include: simultaneous printing and editing, multiple levels of user-selectable help messages, word-wrap, page break display, hyphen help, and extensive print enhancements, including boldface, underline, sub and super script, variable line height and character pitch. Comprehensive screen prompts allow for easy insertion and deletion of words, lines, paragraphs and pages. Gives true screen image of what your printout will look like, before you print. Use in conjunction with **MailMerge** to automatically insert variable text either from console or data files into standard forms, such as circulars etc.

MailMerge is a powerful file merging tool permitting up to eight levels of nested file references as well as chaining. As variable data is merged with text **MailMerge** automatically reforms paragraphs as required to conform to the margin settings and justification used in the original document resulting in accurately formed and marginated documents that look as though each received special attention, all without special intervention, consideration or calculation required by the operator.

SuperSort combines performance and flexibility in sorting, merging and selecting information from data files. It can sort and merge up to 32 files into a single file, at the rate of 560 records per minute. And new records can be integrated into a master file in one simple and efficient operation. **SuperSort** is a star at sorting. It will accept just about any kind of record you can imagine. The data can be justified, or include floating decimals, exponential notation, or upper and lower case letters; it can even be in several standard formats, such as binary, bcd, ASCII, etc. You won't have to waste time and money translating your records for the computer. And you can have fixed or variable length records and fields. In fact, you can have a different number of fields in each record.

DataStar	–	**Software*/Manual****,	**£160/£25**
WordStar	–	**Software*/Manual****,	**£205/£25**
MailMerge	–	**Software*/Manual****,	**£60/£15**
SuperSort 1	–	**Software*/Manual****,	**£110/£20**

*Price of software includes manual
**100% credit if software is purchased later

VISA

ACCESS

TRADE ENQUIRIES WELCOME

Prices and specifications subject to change without prior notice.

CP/M is a trademark of Digital Research Wordstar, DataStar, SuperSort and MailMerge are trademarks of MicroPro Inc.

Please write or phone for free 16-page brochures and flyers.

MAIN UK DISTRIBUTOR:

INTERAM COMPUTER SYSTEMS LTD.,
46 BALHAM HIGH RD., LONDON SW12 9AQ
Tel: 01 - 675 5325/6/7 Telex: 925859

THIS IS THE ONE YOU'VE ALL BEEN WAITING FOR!!

YOU WOULDN'T BELIEVE IT WAS POSSIBLE

64K RAM, DUAL 5¼ DRIVES, CP/M 2.2 FOR ONLY £1299



SIG/NET 202S – Z80A CPU, 64K RAM, 2 FAST STEPPING 5¼" DRIVES (400K, Superbrain compatible format), 2 SERIAL RS232 PORTS, CP/M 2.2
EPSON MX80 F/T PRINTER – BIDIRECTIONAL, LOGIC SEEKING, GRAPHICS, SERIAL INTERFACE
TELEVIDEO TVI–910 VDU
ALL THE ABOVE SYSTEM AS ILLUSTRATED FOR JUST £2145 !!!

The SHELTON SIG/NET 200 series computer is a high performance stand alone computer system using the Z80A microprocessor. The system is based on a new revolutionary design concept which achieves low cost flexibility through the simple interconnection of functional modules via the SIG/NET "ring".
The CPU–RAM module houses the Z80A processor, 64K RAM, 2K ROM, a Z80 counter/timer circuit and the SIG/NET ring interface. The FDC–5 disk controller module which interfaces up to four mini-floppy disk drives to the SIG/NET ring can be modified to support eight inch drives. The design of this module incorporates the latest suite of disk controller chips which provide advanced features such as phase locked loop data separation and write precompensation – essential for reliable disk performance. The third module which completes the basic 200 series configuration is the 2SER dual serial interface. This provides two independant RS232 serial channels – one for the VDU and one for a serial printer. Baud rate and serial line parameters are fully software controllable for maximum flexibility in use.
The SIG/NET Resident Operating System (ROS) resides in 2K EPROM, and includes a bootstrap loader and a simple system monitor.
The SIG/NET 200 series uses the popular Tandon Magnetics disk drives (either single or double-sided) with a storage capacity of 200K per side.

The modular design of the SIG/NET provides a low cost system, yet offers a greater expansion potential than bus-based systems. Multi-user and network configurations are possible and together with the addition of a hard disk make the SIG/NET range extremely powerful.

SYSTEMS

SIG/NET 202S – 2 Single sided drives (400K)	£1299.00
SIG/NET 202D – 2 Double sided drives (800K)	£1649.00
SIG/NET 202Q – 2 Double sided 96tpi drives (1920K)	£1999.00

MODULES

CPU–RAM (Z80 + 64K)	£299.50
FDC–5 (Floppy disk controller)	£159.50
2SER (2 RS232 serial ports)	£89.50
3PAR (3 parallel ports)	£59.50
RING-RING (Interface module)	£69.50

SOFTWARE

Microsoft MBASIC-80 Interpreter	£155/£18
Microsoft MBASIC-80 Compiler	£195/£18
Microsoft FORTRAN-80 Compiler	£205/£18
MMike's BaZic (Z80 North Star BASIC compatible)	£95/£25

MICROPRO SOFTWARE

WordStar – Word-processing Package	£205/£25
SpellStar – Dictionary Program for above	£125/£25
DataStar – Database Management System	£160/£25
SuperSort 1 – CP/M File Sort Utility	£110/£20
MailMerge – Mailing list for WordStar	£60/£15

PERIPHERALS

Televideo TVI–910 VDU	£460.00
Televideo TVI–920 VDU	£595.00
Televideo TVI–920 Customised for WordStar	£695.00
Televideo TVI–950 Detachable Keyboard, Many Features	£750.00
Epson MX80 Printer	£350.00
Anadex DP9500L Printer 150cps	£795.00
Anadex DP9500 Printer 150cps. Graphics	£895.00
TEC Starwriter Daisy Wheel Printer	£995.00
NEC Spinwriter RO Letter Quality Printer	£1695.00

SIG/NET is a trademark of Shelton Instruments Ltd.
CP/M is a trademark of Digital Research Corp.

TRADE AND OEM ENQUIRIES WELCOME

All prices exclude VAT and are subject to change without notice
All specifications are approximate only

Sole Distributor for South/S. East

INTERAM COMPUTER SYSTEMS LTD.
46 Balham High Rd
London SW12 9AQ
Tel: 01-675 5325/6/7 Telex: 925859

Make the most of your Sinclair ZX Computer...

Sinclair ZX software on cassette.

£3.95 per cassette.



The unprecedented popularity of the ZX Series of Sinclair Personal Computers has generated a large volume of programs written by users.

Sinclair has undertaken to publish the most elegant of these on pre-recorded cassettes. Each program is carefully vetted for interest and quality, and then grouped with other programs to form a single-subject cassette.

Each cassette costs £3.95 (including VAT and p&p) and comes complete with full instructions.

Although primarily designed for the Sinclair ZX81, many of the cassettes are suitable for running on a Sinclair ZX80 – if fitted with a replacement 8K BASIC ROM.

Some of the more elaborate programs can be run only on a Sinclair ZX Personal Computer augmented by a 16K-byte add-on RAM pack.

This RAM pack and the replacement ROM are described below. And the description of each cassette makes it clear what hardware is required.

8K BASIC ROM

The 8K BASIC ROM used in the ZX81 is available to ZX80 owners as a drop-in replacement chip. With the exception of animated graphics, all the advanced features of the ZX81 are now available on a ZX80 – including the ability to run much of the Sinclair ZX Software.

The ROM chip comes with a new keyboard template, which can be overlaid on the existing keyboard in minutes, and a new operating manual.

16K-BYTE RAM pack

The 16K-byte RAM pack provides 16-times more memory in one complete module. Compatible with the ZX81 *and* the ZX80, it can be used for program storage or as a database.

The RAM pack simply plugs into the existing expansion port on the rear of a Sinclair ZX Personal Computer.



Cassette 1 – Games

For ZX81 (and ZX80 with 8K BASIC ROM)

ORBIT – your space craft's mission is to pick up a very valuable cargo that's in orbit around a star.

SNIPER – you're surrounded by 40 of the enemy. How quickly can you spot and shoot them when they appear?

METEORS – your starship is cruising through space when you meet a meteor storm. How long can you dodge the deadly danger?

LIFE – J. H. Conway's 'Game of Life' has achieved tremendous popularity in the computing world. Study the life, death and evolution patterns of cells.

WOLFPACK – your naval destroyer is on a submarine hunt. The depth charges are armed, but must be fired with precision.

GOLF – what's your handicap? It's a tricky course but you control the strength of your shots.

Cassette 2 – Junior Education: 7-11-year-olds

For ZX81 with 16K RAM pack

CRASH – simple addition – with the added attraction of a car crash if you get it wrong.

MULTIPLY – long multiplication with five levels of difficulty. If the answer's wrong – the solution is explained.

TRAIN – multiplication tests against the computer. The winner's train reaches the station first.

FRACTIONS – fractions explained at three levels of difficulty. A ten-question test completes the program.

ADDSUB – addition and subtraction with three levels of difficulty. Again, wrong answers are followed by an explanation.

DIVISION – with five levels of difficulty. Mistakes are explained graphically, and a running score is displayed.

SPELLING – up to 500 words over five levels of difficulty. You can even change the words yourself.

Cassette 3 – Business and Household

For ZX81 (and ZX80 with 8K BASIC ROM) with 16K RAM pack

TELEPHONE – set up your own computerised telephone directory and address book. Changes, additions and deletions of up to 50 entries are easy.

NOTE PAD – a powerful, easy-to-run system for storing and retrieving everyday information. Use it as a diary, a catalogue, a reminder system, or a directory.

BANK ACCOUNT – a sophisticated financial recording system with comprehensive documentation. Use it at home to keep track of 'where the money goes,' and at work for expenses, departmental budgets, etc.

Cassette 4 – Games

For ZX81 (and ZX80 with 8K BASIC ROM) and 16K RAM pack

LUNAR LANDING – bring the lunar module down from orbit to a soft landing. You control attitude and orbital direction – but watch the fuel gauge! The screen displays your flight status – digitally and graphically.

TWENTYONE – a dice version of Blackjack.

COMBAT – you're on a suicide space mission. You have only 12 missiles but the aliens have unlimited strength. Can you take 12 of them with you?

SUBSTRIKE – on patrol, your frigate detects a pack of 10 enemy subs. Can you depth-charge them before they torpedo you?

CODEBREAKER – the computer thinks of a 4-digit number which you have to guess in up to 10 tries. The logical approach is best!

MAYDAY – in answer to a distress call, you've narrowed down the search area to 343 cubic kilometers of deep space. Can you find the astronaut before his life-support system fails in 10 hours time?

Cassette 5 – Junior Education: 9-11-year-olds

For ZX81 (and ZX80 with 8K BASIC ROM)

MATHS – tests arithmetic with three levels of difficulty, and gives your score out of 10.

BALANCE – tests understanding of levers/fulcrum theory with a series of graphic examples.

VOLUMES – 'yes' or 'no' answers from the computer to a series of cube volume calculations.

AVERAGES – what's the average height of your class? The average shoe size of your family? The average pocket money of your friends? The computer plots a bar chart, and distinguishes MEAN from MEDIAN.

BASES – convert from decimal (base 10) to other bases of your choice in the range 2 to 9.

TEMP – Volumes, temperatures – and their combinations.

How to order

Simply use the order form below, and either enclose a cheque or give us the number of your Access, Barclaycard or Trustcard account. Please allow 28 days for delivery. 14-day money-back option.

sinclair
ZX SOFTWARE

Sinclair Research Ltd,
6 Kings Parade, Cambridge,
Cambs., CB2 1SN. Tel: 0276 66104.

To: Sinclair Research, FREEPOST 7, Cambridge, CB2 1YY *Please print*

Please send me the items I have indicated below.

Qty	Code	Item	Item price	Total
	21	Cassette 1 – Games	£3.95	
	22	Cassette 2 – Junior Education	£3.95	
	23	Cassette 3 – Business and Household	£3.95	
	24	Cassette 4 – Games	£3.95	
	25	Cassette 5 – Junior Education	£3.95	
	17	*8K BASIC ROM for ZX80	£19.95	
	18	*16K RAM pack for ZX81 and ZX80	£49.95	
		*Post and packing (if applicable)	£2.95	
			Total £	

*Please add £2.95 to total order value **only** if ordering ROM and/or RAM.

I enclose a cheque/PO to Sinclair Research Ltd for £_____

Please charge my Access*/Barclaycard/Trustcard no.

*Please delete as applicable.

Name: Mr/Mrs/Miss _____

Address: _____

SOF 12

CONTROL YOUR OWN SUBSTATION!

```
120 LET X=PEEK11000
130 IF X<128 THEN GO TO 120
140 IF X=143 OR X=152 THEN GO
    TO 600
150 IF X=131 THEN GO TO 500
160 GO SUB 700
170 GO TO 120
500 REM IDENTIFICATION ROUTINE
510 PRINT "SMITH IS AT THE
    DOOR"
520 PRINT "ADMIT — Y OR N"
530 INPUT Ss
540 IF Ss="Y" THEN GO TO 600
550 GO TO 120
600 REM OPEN THE DOOR
610 POKE 11000,3
620 PRINT X: "ADMITTED"
630 POKE 11000,2
640 GO TO 120
700 REM BUZZER
710 POKE 11000,0
720 RETURN
```

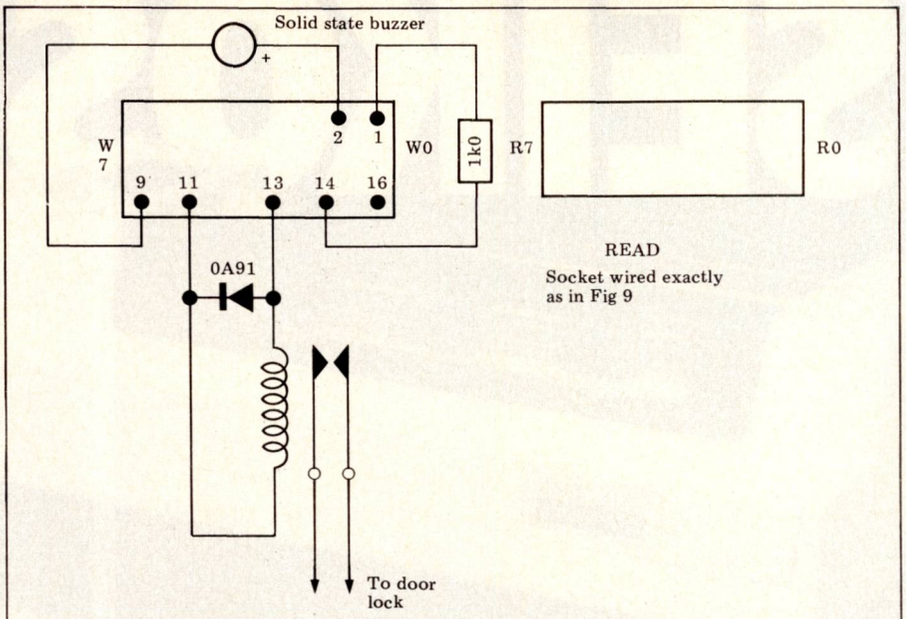

Fig 11 Connections for door combination lock

The program allows holders of the code 10011000 and code 10010001 direct entry, opening the lock and printing their code number (in decimal) to the screen, while with code 10000011 it prints the holder's name and at the same time waits for a response from the controller as to whether he should be admitted or not. All wrong codes that are keyed in with channel 7 pressed will cause the buzzer to sound (by sending a *low* to channel 1) until a correct code is entered. I leave it to you to add subtleties like shutting down for a few seconds after more than one incorrect entry, etc. To run the program on the ZX80, the PEEK and POKE commands should be readdressed to 25000, the PEEK addresses bracketed and an INPUT statement should be inserted after line 620 if an immediate readout is required of the codes of those admitted.

The basic circuit of Figure 9 using a 1k resistor on any channel will operate with any form of switch to allow data input through the port. Ordinary switches, micro-switches, magnetic reed switches and relay contacts will all perform in the same way.

Using a very similar circuit it is possible to connect a light sensor to one or more of the input channels. The so-called light dependent resistor, or LDR, is particularly well suited for use with the port, and with the circuit of Figure 12, an ORP12 LDR will give a reading which changes from high to low as the light level decreases. That is to say, executing the command PRINT PEEK (P) will yield a zero in dark conditions and 128 when illuminated. With such a simple set up it is, of course, only possible to detect whether the light level is above or below a given arbitrary value. To be able to *measure* that level using the computer requires a device called an analogue-to-digital converter — but this is beyond the scope of this article. There is, however, much that can be done with the simple two-state (ie, light or dark) detection facility. For example, the LDR allows the detection of moving objects, using a light beam which is interrupted by the object to be detected. Suppose, for example, that the ZX was being used to control a conveyor belt and was required to stop the belt when a certain article arrived at a given point. The set up shown in Figure 13 achieves this when used with the program below.

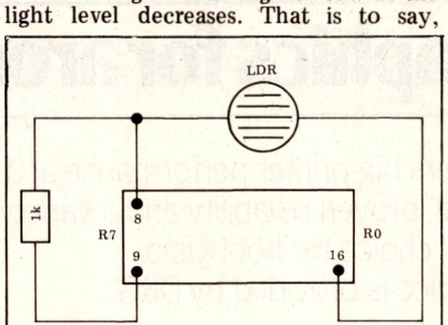

Fig 12 Input port with light dependent resistor on channel zero

```
10 REM CONVEYOR BELT
20 POKE P,1
30 LET X=PEEK(P)
40 IF X<128 THEN GO TO 30
50 POKE P,0
60 REM REST OF PROG TO DEAL
   WITH
70 REM ITEM ON THE BELT
```

The program first turns on the belt (via a relay in channel 0 of the output port) and then monitors the input port (channel 7) until it detects that the cell is in the dark. It then stops the belt and routines from line 60 onwards can be used for dealing with the article detected — eg, testing its size with more light beams, drilling a hole in it, spraying it with paint, or whatever.

Sometimes pairs of photocells are used in timing and speed determining operations. Here the LDRs would be arranged some distance apart, so that the object to be measured passes first one beam and then the next; the computer is programmed to calculate the time between crossings. Of course, since the photocell is sensitive to any light source, best results will be obtained in situations of low background illumination; in brighter environments it will be necessary to place the photocell at the end of a long darkened tube.

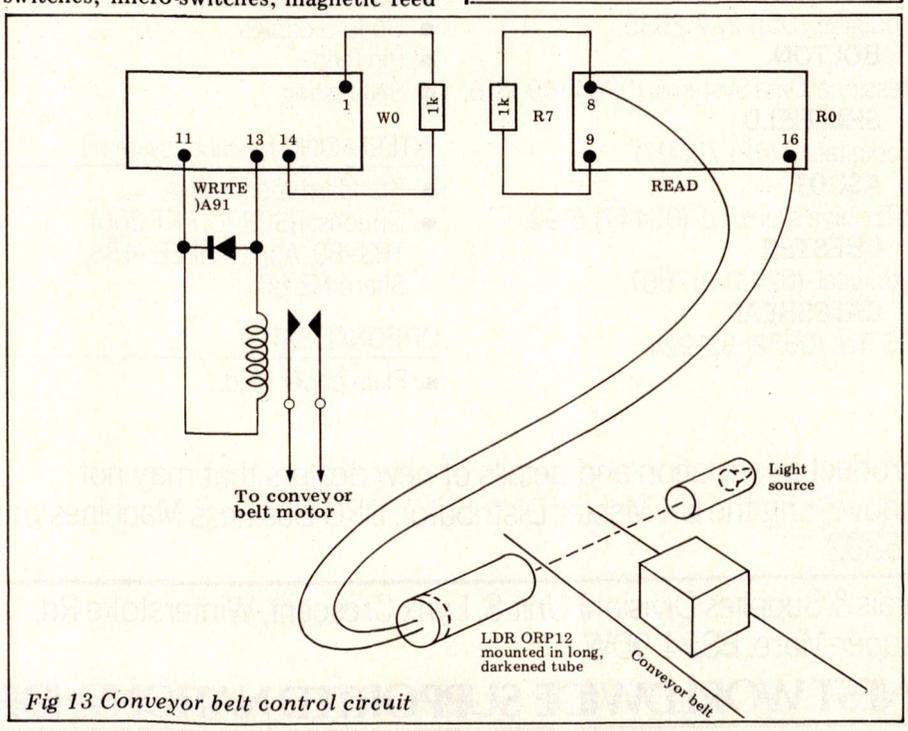

Fig 13 Conveyor belt control circuit

SEIKOSHA



The Seikosha GP80A
Manufactured by the Seiko Company, Japan.

The micropriced microprinter

80 col dot graphics for around £200 EX. VAT.

Seiko's new Seikosha GP80A offers big printer performance at a fraction of the cost. High quality output, proven reliability and a variety of interfaces make the GP80A an ideal choice for hobbyists, educationalists and businessmen. Service is provided by DRG's nationwide distributor network.

Available with full dealer support from:

LONDON
Electronic Brokers. (01) 278 3461.
Chromasonic. (01) 263 9493.

WATFORD
Watford Electronics. (0923) 40588.

LEICESTER
Kram Electronics Ltd. (0533) 27556.

BIRMINGHAM
Westwood Computers Ltd.
(021) 632 5824.
Microdigital. (021) 632 6303.

LIVERPOOL
Microdigital. (051) 227 2535.

BOLTON
Professional Data Systems. (0204) 493816.

SHEFFIELD
Microdigital. (0742) 750971.

ASCOT
Riva Terminals Limited. (03447) 5193.

CHESTER
Microdigital. (0244) 317667.

GATESHEAD
HCCS. Tel: (0632) 821924.

FEATURES INCLUDE

- 80 col. 30 cps.
- Dot Matrix unihammer action
- 96 ASCII + 32 European characters
- Full graphics
- Upper and lower case
- Double width printing
- Up to 8" paper width
- Up to 3 copies
- Pin feed
- Self testing

INTERFACING for most systems

- Standard: Centronics
- Options: RS232C, PET 2001 TRS–80, Apple II, IEEE–488, Sharp MZ 80.

OPTIONAL EXTRA

- Plain paper feed

DRG BUSINESS MACHINES

For full product information and details of new dealers that may not appear above, ring the UK Master Distributor, DRG Business Machines on 0934 416392.

Peripherals & Supplies Division) Unit 8, Lynx Crescent, Winterstoke Rd, Weston-super-Mare, BS24 9DW.

THE FINEST WORLDWIDE SUPPORTED NATIONWIDE.

COMMUNICATIONS

PCW welcomes corespondence from its readers but we must warn that it tends to be one way! Please be as brief as possible and add 'not for publication' if your letter is to be kept private. Please note that we are unable to give advice about the purchase of computers or other hardware/software – these questions must be addressed to Sheridan Williams (see 'Computer Answers' page). Address letters to: **'Communications',** *Personal Computer World,* **14 Rathbone Place, London W1P 1DE.**

The BBC micro

There were some rather cool references in August's 'Newsprint' to the forthcoming BBC micro: both Guy Kewney's own doubts about Acorn's ability to produce enough of the machines by January 1982 and the Amateur Computer Club's objection to the machine's use of the 6502 CPU.

There was further critical comment from Derrick Daines in 'Young Computer World', complaining of the BBC loosing its moral authority in promoting a *de facto* standard Basic by choosing a particular manufacturer, Acorn, to produce its microcomputer. I admit there was a certain redressing of the balance in Adrian Stokes' enthusiasm for the 'telesoftware' add-on which will provide the BBC machine with the ability to down-load software directly from the air. However, the general critical tone of the August issue has prompted me to write to you.

I have no connection with Acorn at all, save, I must admit, being the owner of an Atom, with which I am well pleased. I am, however, responsible for co-ordinating microcomputer development in the Management Services Division of a major public authority in the West Midlands. We have a great deal of experience with both the hardware and software aspects of microcomputers and it is our view that the whole BBC computer literacy project, including the BBC microcomputer and BBC Basic, are, by far, the most significant and exciting developments on the UK microcomputing scene to date.

Just consider what the computer literacy project involves besides the computer itself: there will be a series of ten TV programmes, large amounts of ready-written educational and consumer-type software, books, and a '30-hour Basic' course available for private study, in the form of a correspondence course or via so-called 'flexi-study' at local colleges of further education.

What of the hardware itself? For £335, you will get a 6502 running at 2 MHz, accessing 32k of dynamic RAM and 32k of ROM, with options to extend the ROM further to include, for example, Pascal. There are eight graphics modes, RGB and UHF colour outputs, a two-speed cassette interface, RS232 output, four-channel 12-bit A/D converter, sound generator, light pen input, parallel printer output and so on.

The ACC's unhappiness with the 6502 is irrelevant when you consider that a second microprocessor can be added, leaving the original 6502 to handle just the I/O. This second processor can be a second 6502 running at 3 MHz, a Z80A (opening up the world of CP/M) or a 16-bit micro, likely to be the 68000.

BBC Basic is very close to Microsoft Basic but with very worthwhile additions, such as multi-line procedures and functions, REPEAT...UNTIL loops and very versatile graphics commands. It will also have an interactive assembler.

My point is that you ought to be supporting the BBC initiative as hard as you can, because of the tremendous impetus it will give to widening the understanding of, and interest in, microcomputing in the general public. The BBC machine has a very good specification, is competitively priced and will be made by ICL. So let's hear it for the BBC!

I G Nicholls, Kidderminster, Worcs

Mods help wanted

I intend to modify the Basic interpreter for the school's RML 380Z. This is an attempt to undermine the maths department's claim on the machine and alert the aforementioned to the fact that we scientists want a look-in.

'Rabid' for 'Ready' and 'Total Cockup' for 'Syntax Error' are two replacements which spring go mind. Your readers can help fire the first salvo in this interdepartmental war by suggesting changes of this nature to fox the mathematicians. The major constraint is that the new commands and responses should have the same number of characters as the words they replace.

Sean Morgan, London NW10

Howler?

I have spotted the most terrible howler on page 39 of the ZX81 Basic programming manual: 'At its most elementary level, "A**B" means "A multiplied by itself B times . . ."

In practice, this means that if A=2 and B=3, then A**B = 2x2x2x2 = 16. Surely the statement should read: '"A**B" means "A multiplied by itself (B—1) times"'. Thus if A=2 and B=3 then A**B = 2x2x2=8, which is correct.

G Sutherland, Farnham, Surrey

*What you have discovered isn't a howler by the manual's author but a semantic irregularity in arithmetic. In your example, the correct answer for A**B with A=2 and B=3 is, as you say, 2x2x2=9; to put it crudely, you count the occurrences of A — two in this case — not the multiply signs — Ed.*

SuperBrain reliability

I noticed a comment in the August issue regarding SuperBrain.

Clearly it is courting disaster to say that one's machine is utterly reliable — as soon as this letter is despatched, no doubt it will give me trouble. However, as a SuperBrain QD user, can I say that I am delighted with my machine and that it has proved extremely reliable. To date, we have put on it some 5000 company addresses for the *Flight International Directory of European Aviation* and printed, using Mailmerge and a Diablo 1650 daisywheel printer, name and address labels for all these companies.

With regard to the failure rate, can I suggest that this might be something to do with the conversion to 240 volts (the brochure says 115 volts) by some of the importers. If this problem is not tackled thoroughly and professionally, obviously the machine is not going to give its best.

My SuperBrain was purchased through KGB Micros at Slough.

Malcolm Ginsberg, New Barnet, Herts

One-liner 1

Here's a Superboard single-line program:

```
0 X=INT(256*RND(1))
:POKE 53383+3* (X AND
192)+2*(X AND 48) +
(X AND 15), 161:RUN
```

Enter and run the program after a cold start. Four rectangles will be displayed. Find someone willing to bet that the second rectangle from the top will be the first to be completed in the next run. Do a warm start, enter RUN and win the bet. This can be done any number of times after a warm start but don't accept bets immediately after a cold start.

Len Wood, Bourne End, Bucks

One-liner 2

After the two one-line programs for the Superboard/UK101 caught my interest, I wrote the following one for the Nascom 2:

```
0 FOR D=1 TO 127 :
FOR C=D TO 255—D :
FOR A=2058 TO 3065
STEP C:
POKE A,C:
NEXT:NEXT:
NEXT:CLS
```

Note that, this can only be fitted on to the Nascom's limited line length by typing in the key character for each command. A list of these is to be found in appendix J of the programming manual.

A Alexander, Stamford, Lincs

Kentucky Fried error

Delighted though we were to note the inclusion in your August issue of a short piece on page 43 about one of our clients, I'm afraid it was not without errors.

The piece, and accompanying photograph referred to a Kentucky Fried Chicken Store using one of our systems. The errors were:

1. Tom Allen is in fact Tim Allen
2. Our phone number is 6792 not 6795

I hope you will be able to correct the above in your next issue. Sorry to ruin the 'Bludners' record set in August!

R F Honeyman, Chess Consultancies Ltd, Manchester

Name game

Couldn't resist picking up Guy Kewney on his 'Name Game' piece in *PCW*. Microsoft Basic (Basic-80), in all but the 8k version, supports variable names of any length with the first 40 characters being significant. They can also contain embedded commands, ie:

```
GOTO.IF.PUT.ON.FOR.
NEXT.GOSUB
```

is a valid variable name and will not be confused with a command. The only restric-

tions are that the first character must be a letter of the alphabet and the first two characters must not be FN (then a user defined function call is assumed).
Brian S Crank,
Southborough, Kent

Unbeatable?

So, Bob Chappell's Gomoku program (August *PCW*) is unbeatable, is it? Unless I have made some silly typing errors in copying the listing and adapting it for a Tandy, the following short sequence is a winning game:
(You move first)
1 5,4 : 5,5
2. 4,5 : 4,4
3. 3,3,: 6,3
4. 3,4 : 3,5
5. 2,3 : 5,6
6. 4,3 : 5,3
7. 2,6 : 6,5 (!!!)
8. 2,5 : 2,4
9. 5,2 : 6,1
10.1,6 : "You Win"
I would be grateful for his (or anyone else's!) comments on this.
B E Newsam, Sheffield

Speakeasy

I have just read your 'Check-out' review of the Hi-Tech Speakeasy card. I thought your readers would wish to know that our company Wideband Products has been manufacturing a Speech Output device called Speakeasy for quite some time and in fact we have registered the name Speakeasy, which means that Hi-Tech are not allowed to use the name. Furthermore, our Speakeasy is available for any make of computer, is self-powered and costs only £69. It is programmed by the Phoneme access method and so has a virtually infinite vocabulary compared with Hi-Tech's words. We also use a superior high flux loudspeaker which makes a world of difference to speech quality.

The Phoneme access method of speech synthesis opens the door to real computed speech without being limited to the equivalent of a semiconductor tape recorder, which is what the Digitalker system is.
D N Sands, Intelligent Artefacts Ltd, Royston, Herts

ZX80 mountain?

I was amused to see in this week's *Paris Match* that lucky French punters are being tempted with the very wonderful offer by mail-order of the latest thing in microcomputers, the Sinclair ZX80, for the bargain price of 1250 francs, around £125! For another £25 or so they can buy an 8k ROM for it, thus enabling them to have a machine only slightly inferior to the ZX81 for a paltry £150.

Serves them right, I say, for dumping their lousy Golden Delicious on us! Mind you, delivery is promised within 15 days, while I had to wait two months for my ZX81. And goodness knows when I'll get the 16k RAM I ordered last week.

Congratulations on your excellent magazine! I know you've got to strike the right balance but couldn't we have a little section of ZX81 programs each month? After all, it's likely to be the best-selling micro!
Charles Jannaud, Teddington, Middx

We'll certainly print ZX81 programs as and when we receive ones which fulfil our original/interesting criteria — Ed.



'And all the cleaning information you need is at your toe tips!'

PIG IN A POKE GOING CHEAP!

Look at it this way: No-one in their right mind would go out and spend £5000 on a motor car without first satisfying himself of it's reliability, and overall value for money. Likewise with hi-fi. Whether you're planning to invest several thousand pounds, or you simply need a cheap set of headphones, some products are bound to be superior to others, and mistakes can be expensive. The *Hi-Fi Choice* range is specifically designed to eliminate this element of chance. We can't make your mind up for you. But we can provide the type of information that will help you decide for yourself. Alternatively, you could always buy a pig in a poke... The Choice is yours.

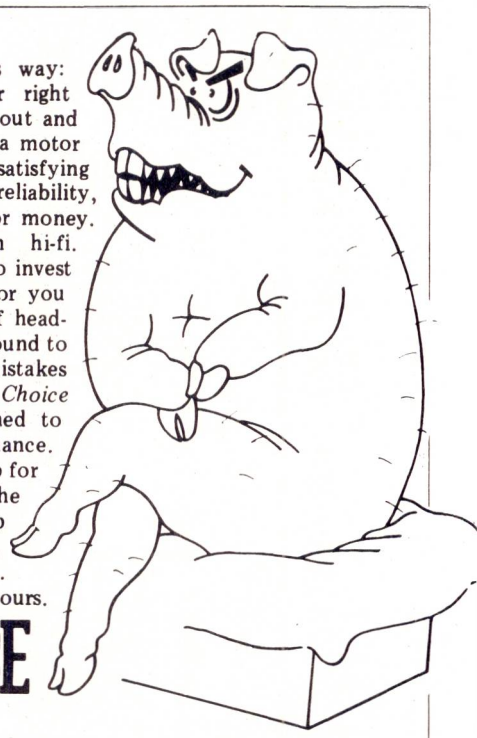

HI-FI CHOICE
Simply a better way of buying hi-fi.



Please send me the following copies of Hi-Fi Choice. Add 40p p&p for each issue. (Overseas postage 60p)
___copies of Loudspeakers @ £2.00 ___copies of Turntables and Tone Arms @ £2.00
___copies of Systems @ £2.00 ___copies of Cartridges & Headphones @ £2.00
___copies of Cassette Decks & Tapes @ £2.00 ___copies of Receivers Tuners & Amplifiers @ £2.00
___Hi-Fi Choice Binders (holds a complete set) @ £1.95 (incl p&p)

Name_____ Address_____

PCW4

I enclose a cheque/P.O. for £_____ payable to Sportscene Publishers Ltd. Allow 3 weeks for delivery. Mail coupon to Hi-Fi Choice Offer, 14 Rathbone Place, London W1P 1DE. If you do not wish to clip this coupon please send your order, clearly printed, together with your remittance to the above address.

The world's first pocket computer.



The last word in compact power.

The Sharp PC1211 pocket computer packs high-performance functions into a slim, compact body–bringing you a huge range of applications through 1424 steps of computing power, with 26 memories protected by safe-guard circuits.

A rolling dot display of letters and numerals allows for instant communications, and 18 reservable and 18 definable keys make operation simplicity itself.

All commands you make are in the widely-accepted, simple-to-use BASIC language.

MATCHING PRINTER

The Sharp pocket computer has its own clip-on printer, too. The CE-122 combines a 16-digit mini-dot printer with a cassette interface–in a neat, compact design.

It will give you clearly-typed, hard copies of calculation records, programmes and performance at the touch of a button, and comes complete with its own battery charger which plugs directly into the normal mains supply.

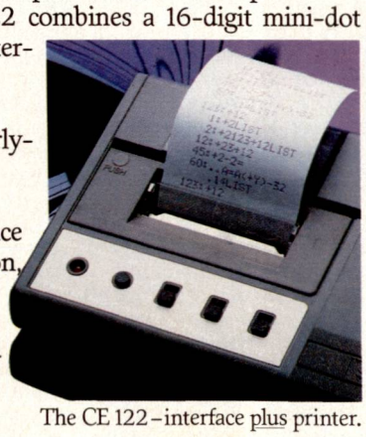

The CE 122–interface plus printer.

PROGRAMME STORAGE

You may well want to store programmes from your Sharp pocket computer–easily done with the CE-121, a simple cassette interface which allows programmes to be stored on a normal cassette tape.

The CE-121 simply clips onto your pocket computer and plugs into a separate cassette recorder–giving you the means to build a comprehensive programme library.



The CE 121–interface only.

SHARP

First, and foremost

Sharp Electronics (UK) Ltd., Computer Division, Sharp House, Thorp Road, Newton Heath, Manchester M10 9BE. Tel: 061-205 2333.

BENCH TEST

OKI if-800 MODEL 20

Chris Sadler and Sue Eisenbach examine a new business micro from Japan.

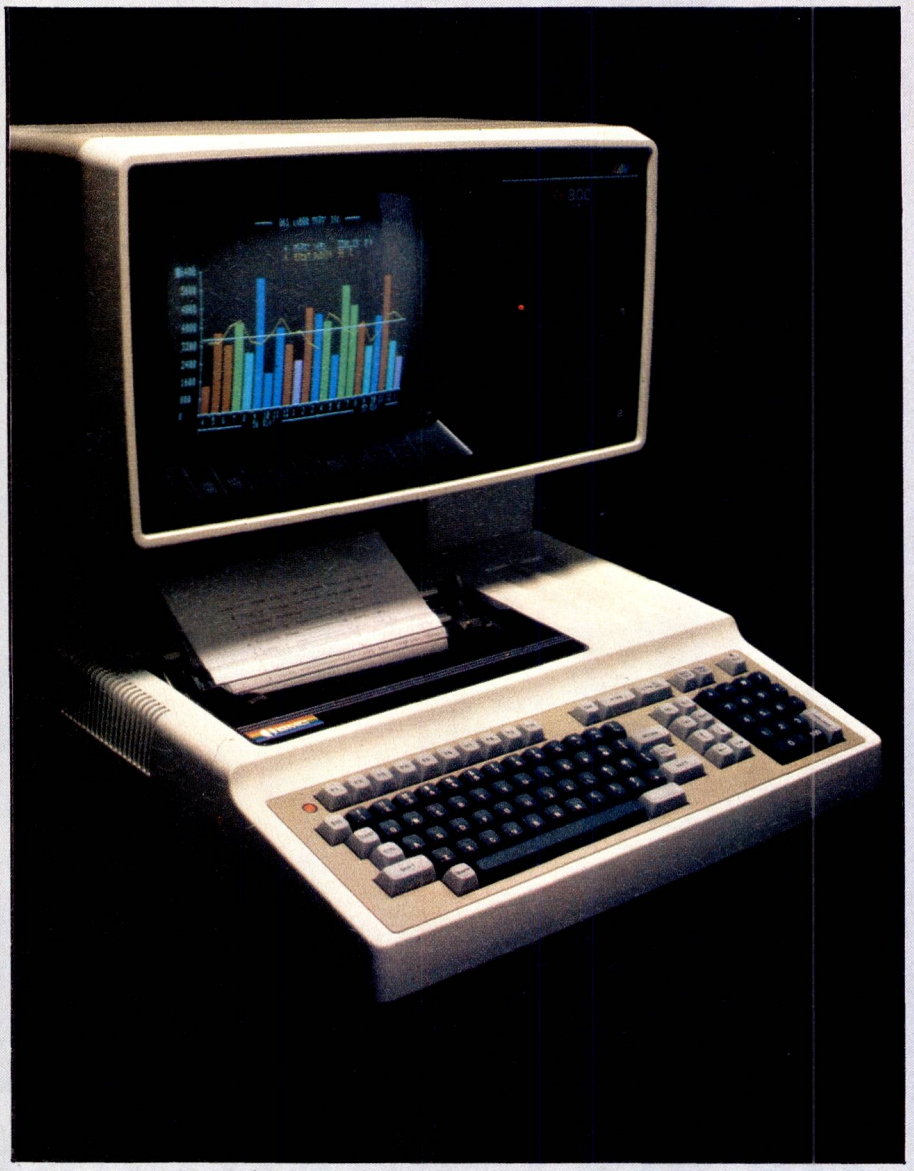

What springs to mind when you hear the term 'all-in-one micro'? Typically this will be a VDU cabinet incorporated into which is a CPU board, some RAM and a couple of floppy-disk drives — the SuperBrain is probably the most familiar example. All you need for 'the complete business system' is to plug in a printer in the back — and what more could you ask? Well, you could have an integral printer, which brings to mind the range of 'desk-top' computers (between £15,000 and £30,000) which slightly pre-date micros as we know them and of which the Hewlett-Packard 9845 is probably the most prominent example. These tend to be very easy to use as processing tools for executive applications but are not really accessible for development programming, which is why the Oki if800 seems to be an interesting machine, combining the classy desk-top features (integral everything, powerful key functions, colour screen) with the flexibility we expect from a micro system (Z80A, 64k, Microsoft Basic, CP/M).

Hardware

Getting a microcomputer to review can be rather like receiving a package in the post in a plain brown wrapper — you have to get it up the stairs before you open it up. In the case of the if800, weighing in at 40 kg divided between two bulky boxes, it was touch-and-go what was going to get opened up first — the cartons or your intrepid reviewers.

Since it was supposed to be an 'integral system', we were a bit puzzled by the two boxes. The smaller one revealed a keyboard/printer/CPU unit which takes the main power cable. The big box had a screen/twin floppy disk unit, mounted on a plinth which notches very neatly into the keyboard unit, giving the 'all-in-one' effect. Power and data lines are passed up one leg of the plinth so there is no messy wiring and with a mostly metal casing (apart from the keyboard surface and the video frame) and measuring 51 cm high by 68 cm deep by 51 cm across, the assembled system is a most presentable sight.

The keyboard unit contains the only power switch on the system, together with RESET (IPL) and BREAK (NMI) buttons, well down the left hand side of the unit and out of reach from the keyboard. (The initials in brackets are Oki's equivalent titles for these functions.) The front edge of the unit contains a slot for a ROM cartridge, while at the side there are DIN-plug connections for an audio-cassette, a light-pen and a TV monitor, together with a 25-way RS232 port, all fully software-supported (eg, baud rate software selectable, according to the documentation). The top cover pops off (without recourse to screwdriver, Phillips or otherwise) revealing a very tightly-packed interior, starting with the keyboard which is firmly clipped in place (no screws again) followed by the printer mechanism (a Microline 80 — no lower case descenders) behind which, under an aluminium cover, is the slim power supply. The review machine had a 110 V power rating and we were supplied with a transformer. This was a shame as it spoiled the 'all-in-one' effect but there didn't seem to be room in the power-supply case for 240 V type components, so Oki might be stuck with an external unit. To the right of the printer there is a five-slot backplane (on Oki's own bus) which contains a video card and a disk controller card (on the standard system), and the remaining three slots can hold any combination of the following options: a Centronics-type parallel interface card, another RS232 card, a IEEE 488 card, A/D or D/A cards or an additional 8in floppy disk controller card. Beneath all these elements, and covering the whole of the bottom of the unit, is a large printed-circuit board containing all the remaining electronics for the system including the CPU and support logic, 64k of main memory plus 16k of memory for the video system (VRAM). The board looked cleanly designed if fairly tight-packed but it was distressing to see that there wasn't a single socket on the board — this is definitely the type of system one takes out a maintenance contract on!

On switch-on, the 2k bootstrap ROM does a very cunning thing which we have not previously seen on micros — without being told, it inter-

rogates any device which it could possibly find on a system, starting with the ROM cartridge, then each of the disk-drives and finally the audio-cassette. As soon as it finds a system it boots it in with much flashing of colours on the screen, while if it doesn't find a system on any of the devices it exists with a long beep on the speaker and an error message on the screen. We found the boot-up times relatively slow (working off the top floppy drive), clocking 12s to boot CP/M and 16s for the Oki Basic System. Under CP/M, the time and date are displayed on boot-up. There is a real time clock which is maintained by a NiCad battery. The first time we booted up, having just extracted the system from its cardboard boxes, we got a really eerie feeling when it came up with the *correct* date, day and time!

The one thing the Japanese have really had to come to terms with is character sets. Apparently the 'formal' alphabet has several hundreds of characters while the modern, simplified version (Kana) has roughly twice as many symbols as our own alphabet. In computing terms, all character-oriented devices (screens, printers, keyboards) must be able to cope with 7-bit ASCII (128 symbols) but with Kana the Japanese are forced to go to an 8-bit code, thus allowing 256 symbols. As a result one would expect quite a good range of graphics and other characters to make up the numbers, quite apart from screen-addressable graphics. In addition, this flexibility has been built into the matrix-head of the if800 printer which offers a hardcopy facility where the contents of the screen will (at the touch of the key) be faithfully translated onto the printed page (colour excluded). In addition, at the touch of another key the screen can be translated to the printed page reduced to half-size in the vertical or horizontal directions.

However, it is the keyboard which most dramatically demonstrates the fact that the Japanese are happier handling a larger quantity of symbols than we are. In addition to the standard qwerty, numeric pad, editing pad and ten function keys (about which more later) there are a surprising number of SHIFT/CTRL type keys. Firstly, the default is upper case and SHIFT must be depressed to get lower case (this is sensible for programming and useless for word processing; however, pressing CTRL and SHIFT reverses this arrangement). Secondly, there is a Kana toggle key which, if depressed, will give a whole set of Kana characters. Then there is a Graphics key which, when depressed, gives a set of graphics symbols. Finally there is the COMD key which, when depressed and used in conjunction with alphabetic keys, will initiate full Basic keywords, thus:
COMD + I → IF on screen
COMD + T → THEN on screen, etc.

The function keys are preset on boot-up so that, when depressed, they will introduce onto the screen up to 15 characters from a buffer (eg, F3 → 'SAVE', after which the user types 'filename' CR). Since the CR can be inserted in this buffer, it is possible to execute complete commands with one key stroke (eg, F9 → 'LIST' CR). It is a simple matter to alter the values in these buffers and hence create an application-specific set of function keys. Incidentally, these function keys are duplicated by a set of keys along the bottom edge of the screen. This is so that a user does not need to back off from the screen and hunt for the keyboard when using the light-pen -- a *very* superior feature. The repeat function can be generated by holding the key down, at which point a clicking sound is heard, one click for each repetition.

The review system offered the colour video option although there is a cheaper 'green screen' option available. This exploits the 16k of VRAM to give a 640 x 200 dot resolution picture which, for micros, is high-resolution. With the colour card in, the on-board VRAM becomes the blue picture while a further 32k on the colour card itself provides the red and green pictures at the same 640x000 (slightly lopsided resolution to program) dot resolution. This arrangement gives the standard TV colour mix of eight colours: black, blue, red, violet, green, cyan, yellow and white.

In character mode, the screen may (under software control) be used to hold 40 or 80 characters across, 20 or 25 lines down, and similar controls exist over the printer.

Finally, the loudspeaker can be programmed to play over five octaves (not particularly melodiously); the ROM cartridge is a sequential access device which holds 20k (and a set of these cartridges may be used in sequence up to 1Mb); and the diskettes are soft-sectored, double density, double-sided with 280k/disk (two additional 5.05in drives can be connected using the same controller). However, although it is easy to be enthusiastic about the features which this system offers, it would be misleading to be anything but tentative about the availability of any options or technical support as, at the time of this review, only one British dealer had been selected.

Software

The floppy disks supplied with the review system were of two types: those that would boot-up CP/M and those that came up in Oki-Basic. This latter is really Microsoft Basic (version 5), which seems to have been pretty successfully

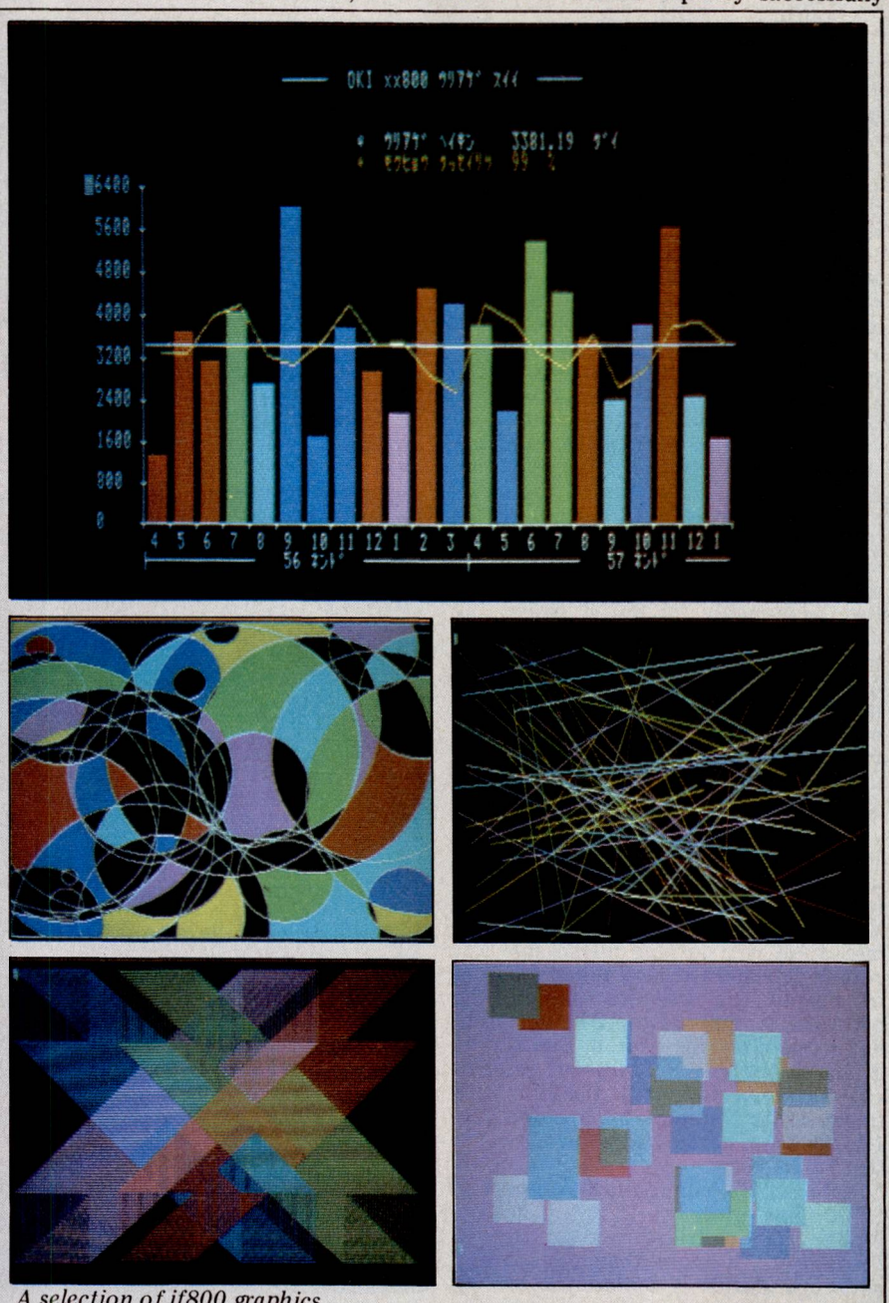

A selection of if800 graphics

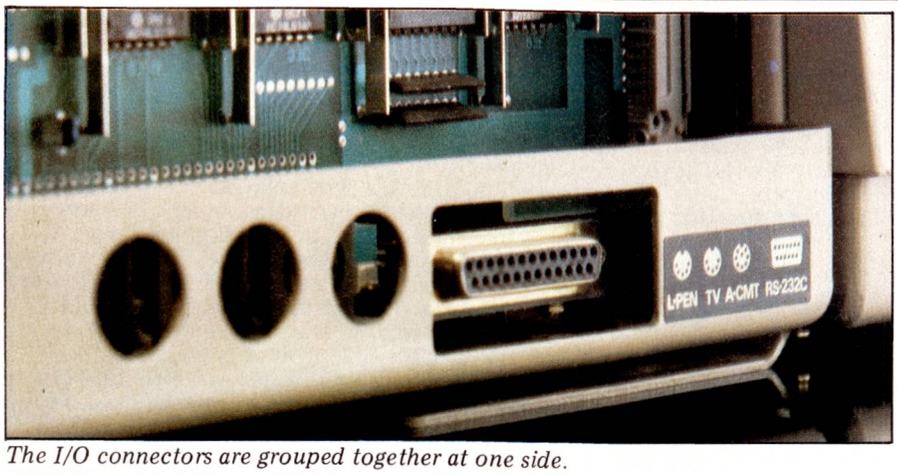

The I/O connectors are grouped together at one side.

Key Code	Buffer Contents	
F1	LOAD	
F2	FILES CR	(Microsoft's directory listing)
F3	SAVE	
F4	END CR	
F5	COLOR	(see later)
F6	DATE$, TIME$ CR	(real- time clock)
F7	CONT CR	
F8	KEY	
F9	LIST CR	
F10	RUN CR	

implemented, given the hardware configuration and is, in fact, the standard supplied software — (the CP/M being very much an optional extra). On boot-up, the query HOW MANY DISK DRIVES (1—4)? appears followed by HOW MANY FILES (0—15)?

Once these questions have been answered, the system displays a copyright notice followed by the date of the creation of the disk, the current date and time, and the amount of user-available memory, on the basis of the answers given to the two questions. On the review system, the exact figure varied from disk to disk (presumably reflecting configuration changes during development), but we found the maximum to lie between 18 and 20 kbytes (on a 64 kbyte system) with reductions of the order of 150 bytes per disk drive specified, and 250 bytes per file specified, presumably for buffer space. The default settings (ie, RETURN in answer to both questions) are for one file and one drive. This sort of interrogation is not very user-friendly and it might have been preferable (if not easier to do) to boot up on the defaults and allow the user to set up the buffer space in a different way.

Microsoft Basic has been described in sufficient detail both in earlier Benchtests and elsewhere so it is unnecessary to devote much space to it here. Suffice it to say that it seems to be a full implementation (ie, nothing memorable left out) to which have been added facilities to enable the user to exploit the hardware features of the Oki, as described in the previous section. Firstly, the different peripheral devices are referenced fairly conventionally; the disks with single digits followed by a colon (eg, 1:); the other devices as follows:

CAS1: cassette
COM1: RS232 (communication) port
LPY1: line printer
PAC1: ROM cartridge

Presumably, if more than one of any particular device is online, the trailing digit can be changed accordingly.

Secondly, the function keys have been primed, on boot-up, such that each key will, on being pressed, discharge a 15 byte buffer onto the screen. This can take the place of a word command or, since CR can be embedded in the buffer, an entire command can be performed by one keystroke. At boot-up, the keys are initialised as in Table 1. Use of the F8 key allows the user to overwrite any of these and insert other commands, for instance, to run a specific applications program or to perform certain editing tasks. Incidentally, F8 followed by F9 (ie, KEY, LIST) will list the current settings of the function keys. We never worked out how to get the system to *boot-up* with user-defined commands in these buffers, but it is obviously possible since one of the applications disks provided with the review system allowed one to insert the disk, boot up and simply press F10 (to initiate the application).

The editing keypad includes the four arrows together with DEL, which deletes the character to the left of the cursor; INS, which inserts after the character to the left of the cursor. Basic programs are edited (much like the PET) by manipulating these keys and pressing RETURN when a particular line of editing has been completed. Initial program creation can be speeded up by means of a single-keystroke 'shorthand' (like Sinclair), the following keywords being available (and inserted in the text) when their initial letters are typed, while the COMD (command) key is depressed: AUTO, BSAVE, CONSOLE, DELETE, ELSE, FOR, GOTO, HEX$, INPUT, KEY, LPRINT, MOD, NEXT, OPEN, PRINT, RETURN, STOP, THEN, USING, VAL, WIDTH, XOR. Not all of these are standard Microsoft keywords, which will be described in due course. As a final word on the keyboard, there is a CAN (for cancel) key which has the effect of a BREAK (ie, returns control to the Basic interpreter), while the ESC key can be used to cause execution to pause, and resume again when any other key is pressed.

The first of the special Oki keywords is CONSOLE which can be used to define some of the display characteristics. It takes four parameters as follows: CONSOLE a,b,c,d, where 'a' defines the top line of a scrolling window (line 0 is the top of the screen); 'b' defines the length of the window (in lines), 'd' defines the 'scroll type' which is basically very jerky (the text jumps up a line at a time as it does on most systems) when d=0 and gets smoother (the text moves incrementally up the

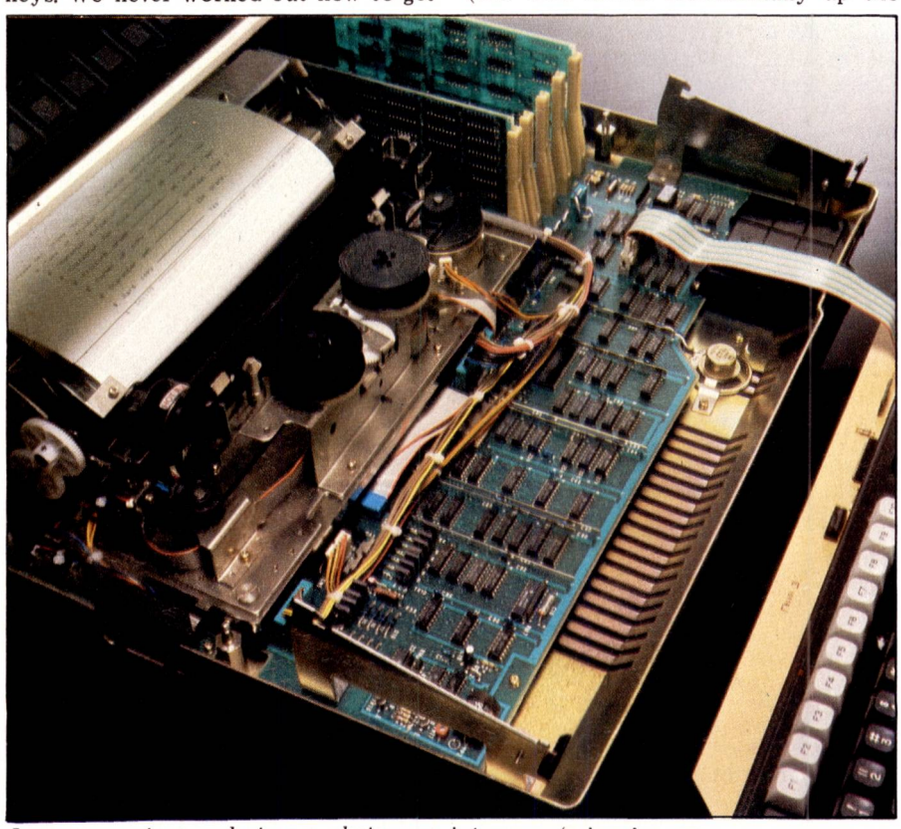

Japanese neatness — but no sockets: a maintenance 'minus'.

screen) as d goes higher (similar to a Digital VT100). We found d=15 to be a comfortable setting and thought that this was the nice ergonomic type of feature which one should expect on an up-market system. Unfortunately, d defaults to zero (ie, ordinary jumpy mode) as soon as a window is set up so smooth scrolling only works on the full screen. Finally, the parameter 'c' is a switch which, when set (ie, c=1), will display the current setting of the function keys in reverse video along the bottom line of the screen — in fact, just above the subsidiary set of function keys installed along the lower edge of the screen frame. To all intents and purposes, this is uncannily similar to the Hewlett Packard 'softkey' scheme.

The second keyword is WIDTH, which takes two parameters as follows: WIDTH a,b. Here 'a' represents the number of characters per line (the only meaningful values are 80 or 40, although other input will be accepted and converted to the nearer of these two); likewise, 'b' defines the number of lines to be displayed on the screen (20 or 25). The characters displayed at the different settings will vary according to these parameters, so WIDTH 40,20 turns the system into a Noddy machine with big friendly letters marching across the screen. The final touch can be brought about by the use of COLOR which takes four parameters in the range 0-7 where: 0 means Black, 1 is Blue, 2 is Red, 3 is Violet, 4 is Green, 5 is Cyan, 6 is Yellow, 7 is White. So COLOR a,b,c,d will cause the characters to be written in colour 'a' against background of colour 'b' with the display area framed by colour 'c'. Colour 'd' defines the 'colour mask' which has the effect of eliminating from the display all objects which do not contain some components of this colour. By this device some wondrous effects are possible — for instance, a picture can be drawn in red, say, (against a black background) and then the command COLOR , , , 1 will cause it to vanish from sight (although still preserved in the RED 16k of video RAM), while a blue picture is drawn. The command COLOR ,,, 4 will cause that to disappear and a third, green picture can be drawn. Then, by selecting different masks, different combinations of these can be superimposed on one another. The default setting for COLOR is 7,0,0,7

The printer can be configured in a similar fashion to the screen by WIDTH LPRINT a,b,c, where 'a' is the number of characters per line (80 or 40 again), 'b' is the number of lines per page (default 66) and 'c' is the printer pitch (default 24). Obviously, both scrolling and colour have no relevance to a printer of this type. However, output can frequently be directed to the printer by prefixing an 'L' to a command which normally produces output on the screen. Thus LPRINT as above, and also LLIST and even LFILES.

Oki-Basic does more than enable colours to be specified on the screen. Firstly, there is a cursor addressing via LOCATE a,b,c where 'a' is the horizontal screen position, 'b' is the vertical screen position and 'c' is a switch which, when off, causes the cursor to disappear from view altogether. Beyond that, there are the graphics capabilities of the 640x200 screen, which include CIRCLE, whose purpose is obvious, and DRAW, which passes a character string coded to enable:

1. Absolute horizontal and vertical movement;
2. Relative horizontal and vertical movement;
3. Colour definition;
4. Scale definition;
5. Angle definition.

In addition, LINE will connect point to point, while PAINT can be used to colour the inside of a figure. Finally, GET@ and PUT@ will enable entire areas of the screen to be saved in named arrays, or accessed from them. Taken together, these constitute pretty powerful graphics facilities. The next step would be to provide more sophisticated, high level graphics capabilities so that pie charts and graphs could be produced with real data with the minimum of programming effort.

All the facilities on the Oki seem fairly accessible from within Basic. A fairly sophisticated, interactive screen-based application, for instance, might require input both from a light-pen and from one of more of the function keys. Such input would normally make itself known to the programmer via an interrupt, generated by the pen or key in question and the routine would deal with it via an interrupt processing routine. Alternatively, another application may require communication with a remote machine and this would also be interrupt driven. Commands exist within Basic (ie, OPEN, ON COM GOSUB, COM ON, COM STOP, COM OFF) for incorporating interrupt processing routines, enabling and disabling them as well as disabling the interrupts themselves.

Only a few items remain — the command COPY produces a screen image on the printer from within a Basic program, just as pressing the HARD COPY key does from the keyboard. The loudspeaker is available via two commands, BEEP, which accepts a character string coded for tempo, pitch, scale, length, rests and relative rises and falls in the scale. Finally, the real-time clock is available via TIME$ and DATE$ which are used both to reference and set these values.

CP/M

After all that, CP/M on the Oki is a bit of a let-down. It boots up all right with a jazzy '52k CP/M' in different coloured, double height characters, but it soon becomes apparent that few of the special features on the Oki are implemented or at least fully implemented under CP/M. For instance, instead of COLOR, it is possible to change the foreground colours or to get reverse video by fiddling with an escape sequence, but that is all. Similarly, we could find no way of programming the function keys and the only one that worked on boot-up (F10 — which gave the time and date) immediately crashed CP/M and converted the whole system into a very expensive digital clock. On the other hand, the width and scrolling functions work (also with escape sequences) as does the hard copy facility, with the added bonus that one can produce a printout of the screen reduced by half, both horizontally and vertically. For those of us who do not rank Basic as our favourite language, full implementation of a high-level graphics package ('turtle' or Gino-F like calls) would allow the user to exploit the hardware.

On the software side, Oki offers two extra utilities under CP/M. These are COPY, which does a track-by-track copy of either the whole disk, or just the system bit, or just the non-system bit; and PRINT, which produces fancy listing (ie, with a heading and the date on each page). On the whole, it looked to us as though CP/M was crammed onto the system in a great hurry and the quality of the documentation bears this out. If Oki could start the project all over again, integrating all the clever bits and pieces into the CP/M environment (and it probably has the low level interface — what else could take up all the space between the 64k of RAM that's sitting in the system and the 52k boot-up message?) and then carefully implementing some of the classic CP/M packages, like Wordstar, etc, then it would have a product to reckon with. As it is, the user is better off sticking to the Basic environment where the system software matches the hardware.

Enough on operating systems! The application software offered with the review system was conspicuously thin on the ground. Apart from some entertaining graphics demonstration programs which were well put together and quite entertaining to watch, there was a troubleshooting sort of utility which offered to test different bits of the system for you and a share analysis program. We had a great deal of trouble with the tester program, particularly the memory test during which it came up with problems and faults and the occasional crash. Our own memory testing program — which admittedly didn't attempt to test the memory it occupied itself — did not show up memory faults. Other options were not always reliable so we gave up on this utility and tried the shares program. This had overall a more impressive feel to it, with a polished user-interface (when you chose an option from the menu, your selection *changed colour* in confirmation) and some nice-looking features. Unfortunately, it crashed when we tried to write some data to a write-protected disk and, having unprotected the disk, we succeeded in destroying the entire data file on the next attempt.

At this point the inquisitive reader may be asking why people who don't back up their disks first (would you believe they didn't supply blank disks? *Excuses, excuses — Ed*) are allowed to be machine users in the first place; but application software should be sufficiently robust that when we answer questions to the best of our abilities the disk doesn't get destroyed.

Benchmarks	
1	2.2
2	6.4
3	16.8
4	16.8
5	17.9
6	31.8
7	50.7
8	5.7

All times in seconds.

Potential

From the user's point of view, the if800 hardware offers a comprehensive set of very up-market features. Unfortunately, the people who can afford

NOW YOU CAN PLAY SUPER INVASION ON YOUR ZX80 & ZX81

IK



SUPER INVASION

SUPER INVASION is the machine language game you and your Sinclair have been waiting for. Cruel and crafty invaders have been spotted in battle formation ready to attack with your ship just below them! Quickly and skilfully you shift right and left as you carefully fire your lasers at them. But watch out – they are accurate! 3 levels from easy to almost impossible to beat

- **TOTALLY FLICKER FREE**

  Absolutely no flicker. You don't need to press anything for the display to move!

- **3 LEVELS OF PLAY IN EACH GAME**

  From easy to dangerously difficult – you'll find it hard to resist the challenge time after time!

- **MOVING GRAPHICS**

  No hardware modifications are necessary to get moving graphics. Just follow the instructions for cassette loading and off you go; no extra memory needed,

- **MACHINE LANGUAGE**

  These programs are written in the computer's own language – only this way is it possible for continuous, flicker free action to occur.

- **ALL PROGRAMS ON CASSETTE**

  Loads just like any other program on cassette. Each tape contains instructions on how best to load the cassette.

- **FITS IK BASIC MACHINE**

  Amazing as it is, all these moving graphics programs fit into your basic IK Sinclair!

3 LEVELS OF PLAY



DOUBLE BREAKOUT

You'll be amazed to see how difficult it is for you to break through the ZX80 DOUBLE BREAKOUT – and even more astonished to see this exciting game fit into your IK Sinclair Try your skill on the easiest level because even with the most skilfull bat control you'll find it hard; to catch at the fastest level! Breaking through the first barricade is easy but don't be fooled for the second – it's much harder than you think! Two ball angles and curved bat will keep the excitement going for hours!

Now only £6 each

Access accepted for Mail Order
or phone 01-837 3154

FROM THE PUBLISHERS OF THE BEST SELLING BOOKS FOR THE SINCLAIR COMES:

NOT ONLY BUT ALSO... PROGRAME FOR THE SINCLAIR ZX81...IK

NOT ONLY...does this book contain over 30 fully debugged and exciting programs, every one of which will fit into the basic IK memory of your **Sinclair ZX81** – including programs such as **STAR WARS, LUNAR LANDER, BLACKJACK, MINI ADVENTURE, DRAUGHTS, BREAKOUT.**

BUT ALSO ...

* Detailed explanation of how these programs were written.
* Lots of hints on how you can write exciting programs for your **ZX81.**
* Numerous space saving techniques – obviously invaluable to the **ZX81** owner.
* **PEEKS and POKES** and all the other 'complicated' functions are clearly explained.
* **MUCH, MUCH MORE...£6.95**

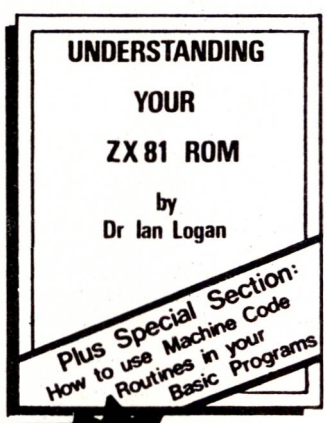

NOT ONLY

NEW

30 PROGRAMS FOR THE SINCLAIR

ZX81...

1K



UNDERSTANDING YOUR ZX81 ROM –

Plus special section: How to use machine code routines in your BASIC programs. by DR. I. LOGAN.

Dr Logan was the first person to dissassemble the Sinclair ZX80 Monitor and was the co-author of the ZX80 COMPANION.

In UNDERSTANDING YOUR ZX81 ROM Dr. Logan illustrates all the facilities of the ZX81 Monitor, how it works and how you can use it in your own programs. A special section shows you how you can squeeze more power into your ZX81, by using machine language and machine language subroutines.

An essential book for those who really want to understand the full working of the SINCLAIR ZX81. **£8.95**

Published by MELBOURNE HOUSE PUBLISHERS LTD.
Send Stamped, self-addressed envelope for FREE catalogue.

THE ESSENTIAL SOFTWARE COMPANY (Visconti Ltd)
47 Brunswick Centre, London W1CN 1AF (01-837 3154)

We welcome Access

☐ Please rush me NOT ONLY 30 PROGRAMS FOR THE SINCLAIR ZX81 1K: at £6.95 each

☐ Please also rush UNDERSTANDING YOUR ZX81 ROM by Dr. I. Logan at £8.95

I enclose a cheque/postal order for £..... +50p post and pack.

Name .....

Address .....

these accessories tend not to be the average microcomputer enthusiast, still less the dreaded 14-year old junkies whose programming prowess upstages their elders. Instead, we find this sector populated by lab scientists (in both industry and higher education) and (perhaps) status-conscious and undoubtedly busy executives and managers who are interested in a micro in the same way that they are interested in a wristwatch — something to be consulted for the results it can produce rather than for the pleasure afforded by the consultation.

Such users probably resent the amount of time spent keying in their data, let alone the time wasted in learning to program and programming their problems on a machine. Instead they require high quality software, either packages or produced in-house. For people in this market, who would probably be willing to pay for function keys, light pen and fancy colour graphics, there is a gaping hole in the complete Oki picture — substantial quantities of reliable, high quality application software that uses the Oki's hardware potential. The if800 is a machine begging for a good software house to take it in. And they have to be willing to program in Basic (or to do a lot of systems level work).

For the lab scientist who is used to programming a single-user mini (say a PDP11 running RT11) the if800 may offer an inexpensive alternative. Assuming all the interface boards mentioned in the documentation exist, both control and programming should be straightforward, with the colour graphics an added bonus.

Documentation

The documentation supplied with the review machine consisted of a variety of flashy sales brochures and a thick, more serious-looking manila folder. On inspection, this turned out to contain five slimmer manuals covering CP/M, Basic, Installation and Operation, the I/O interface and the disk operating software. There were frequent tables and nicely labelled diagrams and it was only on closer inspection that the poor standard of the English translation emerged. On several counts, the worst one was the CP/M manual which begins, enigmatically and ambiguously: 'No better CP/M could be found than the if-CP/M Digital Research will be surprised to find it.' There follows a brief description of the if800 features which aren't available under standard CP/M, with nothing on standard CP/M, so a user will need a separate manual for these features. Brief and unsatisfactory references are made to tantalisingly important facilities, eg: 'Files such as if-BIOS, RS-232C handling and DISPACH are resident on diskette and they are useful for the changes of BIOS'. At only seven pages long, the CP/M document is clearly inadequate as a user manual. It looks like a rush-job and its shortcomings may have obscured some of the features of the CP/M implementation as we reported in an earlier section.

Fortunately, none of the other manuals appears to have been produced by the writer responsible for translating the CP/M manual and one is seldom unable to extract meaning from the fairly frequent grammatical contortions. The Operations Manual (52 pages) describes how to connect up the system and get it started. There are sections describing the operation of all the special keys; the operation of the commands required to set the size and colour parameters of the display; and a section on Troubleshooting. The next manual is entitled 'I/O Interface for Basic Unit' and it describes every line and signal for every I/O route into the system. As a brief reminder, these include the ROM cartridge, the light pen, the RS232 port, the audio-cassette, colour or mono video, the disk controller and the little motherboard tucked in at the back of the cabinet.

The next manual deals with the disk operating system utilities which are gathered together in a menu-driven program called 'IFUTY'. This covers the usual maintenance and housekeeping chores like formatting and backing up disks. Some of the options are a bit obscure and it's hard to see (and it's certainly not explained) why one would use them.

Finally, the Basic manual consists of a list of all commands, instructions and functions fairly tersely described. This is well below Microsoft's standard of documentation — at worst the descriptions are brief to the point of obscurity. Consider:

'ERROR
Syntax: ERROR error code
Explanation: Makes an error simulated
Example: ERROR 5'

with no listing in any manual of the error codes.

Our overall impression of the manuals was that they were sufficiently detailed to be quite strong on hardware but on software were too sketchy to be much use at all. A rewrite is called for.

Expansion

The review system was nearly fully expanded. From the documentation it appears that a minimal system would have neither CRT nor disk drives. Instead, it would look somewhat like a Teletype 43 but with 64k RAM, the RS232 port, loudspeaker and an attached cassette for backing store. The next step up would be to hook up a domestic TV set, using the 40 characters per line option. After that is the review machine with monochrome display and dual minifloppies, and then the colour display. Moving beyond the review machine and after installing the light pen, perhaps a ROM cartridge full of useful application software would be the next step (although nothing in the documentation suggests that these actually exist in any quantity or that it would be straightforward for a software house to program them). Two more minifloppy drives can be added without using up extra slots on the backplane, but after that all expansion must occur from the three vacant slots. Projected options include a controller for dual 8in double-density double-sided (ie, 1Mbyte per disk) disks and a variety of interfaces including parallel (Centronics), IEEE 488, A to D and D to A converters. The software can recognise only four drives so the 8in drives would be instead of 5in external drives. The bus is Oki's own, so all future options are likely to come only from them, and this is a disadvantage.

On the software side, the if800 comes standard only with Microsoft Basic so it is necessary to look to CP/M to provide the means for a range of software options. It was not clear to us how one went about exploiting all the nice Oki features through CP/M, so there may not be much incentive to undertake this kind of enhancement in the first place.

Prices

At the time of this review the Oki if800 had one distributor, Encotel, in this country. Encotel had not firmly set a price but when pressed thought 'around £4000' for the review machine, with no ideas on what any add-ons would cost. We then asked about maintenance for the machine. The reply to this question was that Encotel would do its best. No arrangements had yet been made with a maintenance company.

In conversation with the Oki representative in Germany, we found that he expected the machine to retail for about $7500.

Conclusion

The Oki if800 is a rather classy looking machine. It comes crammed full of hardware features (integral printer, high resolution colour graphics, function keys, light pen) which are supported in a variant of Microsoft Basic.

If the machine sounds appealing, a word of caution — this is a machine that needs a good dealer network. There are no sockets anywhere and so any hardware failure could be quite expensive to repair. Also currently notable for its absence is a solid software base. There are programmers in this world who would like to be able to access the hardware (especially the graphics) in a language other than Basic in a straightforward manner. An implementation of the UCSD p system with turtle graphics would be a big step forward. And, of course, a few tailor-made application packages would not go amiss.

For any manufacturer worrying about how close the Japanese are to producing machines that will take over the market, the answer must be — very close.

Technical specification

CPU:	Z80A
Memory:	64k dynamic RAM, 48k video RAM, 2k ROM
Keyboard:	100 keys including numeric, editing and function keys 20 or 24 lines of 40 or 80 lines, 640x200, 8 colours, 12inch diagonal
Printer:	Microline 80, 5x7 dot matrix, 80 or 40 chars per line.
Cassette:	43 kbytes per second.
Disk drives:	Double density double sided 5in, 280 kbytes per unit, up to 4 drives.
Ports:	1 RS232 port standard, 1 RS232 port, 1 Centronics port optional.
System software:	CP/M optional
Languages:	Basic 80, Assembler, Bascom

SOFTY 2

CHECKOUT

Neil Cryer reviews the new, British-made EPROM programmer.

Softy2 is an EPROM programmer and ROM emulator for single rail EPROMs of type 2516/2716 and 2532/2732. (Type 2708 requires Softy1.) It is advertised as a complete development system which means that the user can create and modify programs in RAM and then, when satisfied, save them in EPROM. This is achieved by plugging Softy2 into the socket of the host system that will eventually be occupied by the required EPROM, working out the hex code program, typing it in and testing it using Softy to display it, section by section, on a TV screen. Softy has facilities for putting parts of the program onto cassette tape as they are deemed satisfactory and then, once the program is complete, burning it into the EPROM. It can also copy EPROMs.

Softy1, reviewed in *PCW* Vol 3 No 6, June 1980, is still available, by the way.

Construction

Softy2 is about 7in by 9in by 2in and is protected by a rather flimsy plastic case. The majority of ICs are soldered rather than plugged into the the printed circuit board, which might be inconvenient if any had to be replaced. The advertising literature, which states 'no hidden extras', shows a plug and flying lead connected to the output ports. No plug is supplied and soldering it into place would involve completely dismantling the machine from its case and backing. The keyboard is of the flat, plastic, touch-sensitive type and is an integral part of the printed circuit board. A zero insertion force socket is provided for the EPROM to be copied or programmed.

Documentation

Two manuals were supplied with the review machine, both with the name Softy on the front cover. Closer inspection suggested that one was for Softy2 and the other for Softy1, which performs different tasks. I had to read these manuals several times to get the best out of them. The task was made no easier since both had illustrations of the Softy1 model and because general instructions on use were interspersed with information on SC/MP programming. I would recommend that these functions be clearly separated and that illustrations of Softy2 be used for the Softy2 manual.

The documentation assumes a competent programmer who is comfortable with hex code as distinct from assembler language.

Operation

I set up the review machine with three separate televisions which had performed satisfactorily with other computer systems. Two required an adjustment of the horizontal hold which upset normal reception. The third gave a steady picture with the display shifted somewhat to the left.

Softy2's keyboard is touch-sensitive and requires firm pressure from a correctly located finger. It thus shares the disadvantage of all such cheap keyboards in that the action can be very hit and miss. The only way the user can be certain that he has made contact is by seeing if the display has changed. This perpetual switching of attention between the screen and the keyboard can be slow and tiring.

The Softy2 display shows the hex contents of memory in lines of 16 bytes. Each block of eight lines is alternately light and dark to make it easier to see how much memory has been used and to judge where relative jumps — so often used in hex code programming — are in order. A cursor, in the form of a highlighted area, can be moved left, right, up and down.

Hex code may be entered at the cursor position merely by pressing the appropriate hex keys. Typing in the two hex digits necessary to fill the current memory location causes the cursor to move onto the next position. There is an alternative cursor for helping with the calculation of relative jumps. The separation between the two cursors is displayed in hex on the top line of the screen.

Softy2's routines are designed in a logical and useful fashion for the programmer who is comfortable thinking in hex. For example: INSERT allows a new block of hex code to be entered in the middle of a previous program. Although the insertion may corrupt some addressing of jumps or calls, there are other routines to help with the correction. DELETE allows a block of code to be removed and the resulting gap to be closed up — which is the inverse of the INSERT routine. MOVE allows a block of up to 110 hex

GOTO page 164

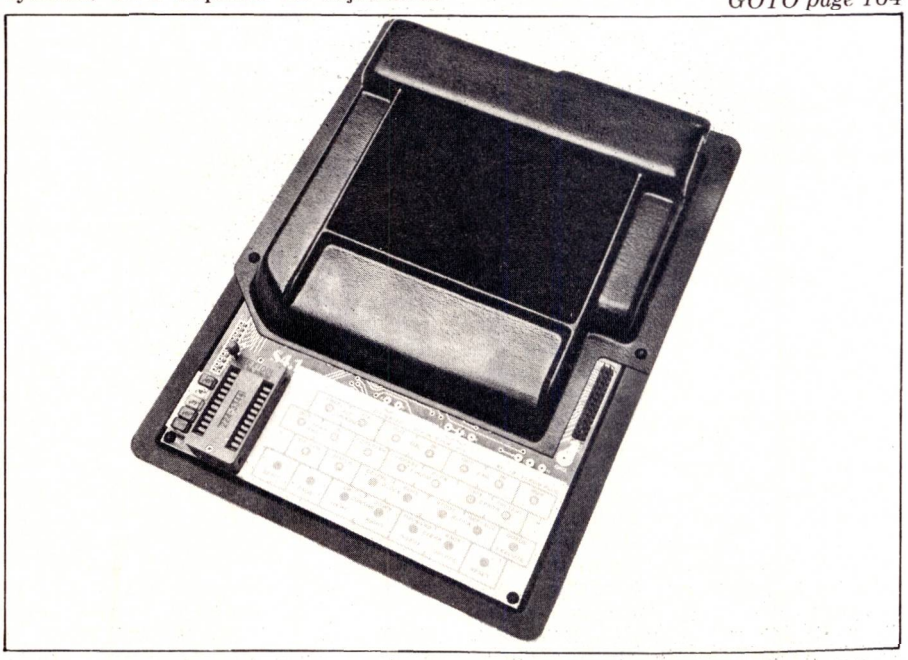

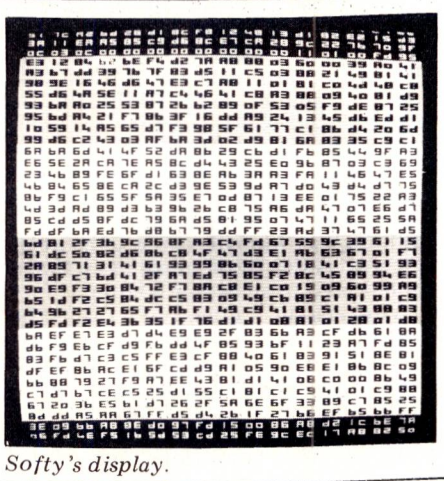

Softy's display.

Cash price
ONLY £595 + VAT
BEAT THAT FOR VALUE

The DAI Personal Computer is H
High Performance
High Value











Standard Features

- **24k Resident High-Speed Basic**
- **16 Colour High-Resolution Graphics (255 × 335)**
- **Scrolling Screen Editor**
- **Sound Commands for Music Generation**
- **Very High Speed Hardware Maths Option**
- **Resident Monitor for Machine Language Programming**
- **3 Programmable Parallel Ports**
- **Standard TV Interface via Aerial Socket**
- **RS232 Serial Port and Dual Cassette Interfaces**

Manufactured by:

DAI

THE MICROCOMPUTER ENGINEERING COMPANY
Brussels, Belgium.

Available from:

Data Applications (UK) Ltd.

Personal Computer Division
16b Dyer Street
Cirencester
Gloucestershire
GL7 2PF
Tel: Cirencester (0285) 61902

For further information please complete and post to: Data Applications (UK) Ltd, 16b Dyer Street, Cirencester, Glos GL7 2PF

CT2

NAME.

ADDRESS.

MY INTEREST IS:

GUESS WHAT ?

THE MONTHLY COMPETITION FROM GUESTEL



Two items in the above photograph have changed from the last issue.

There is no prize for noticing we've changed the printer, thats already a give away at **£275.**

It's the other item that you can win if your entry is the first to be drawn on November 14th at our Brighton office.

Send your entry to Dept. PCW at the Brighton office.

GUESTEL

EXPANSION THROUGH EFFICIENCY

For mail order and free advice on your systems requirements contact:

BRIGHTON OFFICE

15 GRAND PARADE BRIGHTON
EAST SUSSEX BN2 2QB
TELEPHONE 0273 695264

OPEN ALL DAY SATURDAY

LONDON OFFICE

8-12 NEW BRIDGE STREET
LONDON EC4V 6AL
TELEPHONE 01-583 2255

NEW OFFICE

24 HOUR CALL-OUT SERVICE NOW EXTENDED

AUTHORISED APPLE DEALER
AND LEVEL 1 SERVICE CENTRE

apple®

All prices ex VAT and P&P

All items subject to availability

® Apple is a trade mark of Apple Computer Inc., Cupertino, CA. USA.

Whatever you want! Whenever you need!

BMC will be there!!



KG-12C (GREEN)



BM-12CL (COLOUR)



BM-12EY (YELLOW)

Using scope of Monitor

For Account/Statics, Telecommunication, Education, Medical, Amusement
For Any purpose of Data & Video Display

BMC INTERNATIONAL
Tanimachi 5-27, Higashi-Ku, Osaka, Japan

Phone: OSAKA 768—7791
Telex : 64930 NISEMIC J, 527—8636 BMCINT J
Cable : BMCINT OSAKA

BMC ELEKTRONIK GMBH
Capimcenter, Ross Markt 15 6000 Frankfurt am Main 1
F. R. of Germany(West Germany)

Phone: 0611—20516
Telex: 412889 CAPI D
Cable: CAPIM FRA



BOOKFARE

Malcolm Peltu gets his teeth into the latest printed words.

A prescription for solutions

One of the golden oldies of computer marketing runs: 'We are not in the computer business. We are in the problem-solving business.' Never was a truer word spoken in zest.

Programs should exist primarily to solve problems (or exploit opportunities, depending on your frame of mind). Too many books on programming and too many programmers, however, seem to regard producing code as an end in itself. *Problem Solving Principles for Basic Programmers* by William E Lewis is therefore a welcome contribution to the ongoing computer literacy situation scenario. And *Brain of the Firm* by Stafford Beer takes the whole concept of problem solving onto a higher conceptual level of complexity by examining the nature of how organisations and information systems behave, using insights based on the study of the human nervous system.

Beer's book is far more important on a global scale and includes the first detailed description of how he tried to use a computing network to assist President Allende's ill-fated regime in Chile. Although Beer's theories are of relevance to managers and computer specialists, it is Lewis's book which is of the most immediate interest to the practical computerist. Lewis's subtitle is 'Applied logic, psychology and grit' which gives a feel for what he is trying to do. He approaches the programming task from the point of view of problem solving, not coding. He examines the logical processes needed, human attitudes to tackling computing and provides some true grit bits of advice.

The book is available in four different flavours. The version I have gives all examples in Basic. Other editions have examples in Fortran, Pascal or a generalised 'interlingua' version for all programmers.

Lewis structures the book around 40 'prescriptions', things like: Make Sure There Is Method In Your Madness and He Who Digs A Pit Will Fall Into It. He admits that at first glance, 'some of the prescriptions may seem trivial or trite and not appear to justify a detailed analysis. However, it is believed that past experience shows that they do indeed provide commonsense panaceas to many of the programming errors constantly repeated every day.' These prescriptions may be something of a gimmick, but they are an effective gimmick because they crystalise programming home truths that are easily forgotten into some memorable 'silver bullets'.

The bulk of the book relates to problem definition, analysis and paths to solution. For each description, there is generally an overview of the ailment the prescription is designed to cure, followed by non-computer and computer examples of what the effects of using the prescription can be. This approach is an excellent one because it shows that programming is just one aspect of general problem solving techniques.

My main criticism is that the computer examples are taken at too rushed a pace, with insufficient description and discussion of the example, either in the text or as comments within the coding. The fault may be due to the format of the book. The nature of the material is ideally suited to a step-by-step approach frequently used in educational texts, particularly in self-instruction courses. It would be helpful, for example, to have the computer problem stated, then the reader asked to consider a solution. The key aspects of the coding could then be analysed on their own before the completed program is shown. As it is, Lewis tends to leap in with coding boots first, presenting the complete programmed solution immediately. His discussion of the program assumes the reader is sufficiently *au fait* with the programming language to appreciate full gist of his message.

This is a pity. The book has greatest value, I believe, to newcomers to programming who might be slightly intimidated by the writer's approach.

For me, the most useful part of the book is on debugging. This is probably the hardest aspect of programming to learn in any formal way. *Why Do You Need A Personal Computer?* by Lance Leventhal and Irving Stafford (which I reviewed in the August 'Bookfare') made a useful stab at discussing debugging, but Lewis does it in a more considered way. He provides 16 debugging prescriptions. Here are just a few to give you the taste of Lewis's style. Debugging Prescription 3 is: Courage Is Grace Under Pressure. Lewis explains: 'This prescription states we must momentarily set aside our ego in the debugging process, for debugging requires the utmost of our logical abilities. When finding a bug proves difficult, we often start blaming the hardware... and other common "whipping boys" like the compiler, assembler, operating system, or the fact the program is someone else's.' He concludes: 'It is essential to concentrate solely on the problem at hand, disdaining facile excuses. It is sometimes helpful to make a game of the process and pretend that you are a detective in search of a suspect.'

In both debugging and general problem solving, Lewis emphasises the crucial role of psychological factors and 'tricks', like game playing, which can help the programmer. But psychological forces, he says, can both aid and inhibit our ability to design and debug programs. Inhibitive psychological forces, according to Lewis, include having a defensive ego, imagining unnecessary constraints, lack of imagination and ignoring known symptoms. Two other psychological factors are covered by Debugging prescriptions 7 and 12. Prescription 7 states: Incubate When Stuck On Bug. Whenever you experience a mental block, incubate the problem by putting it aside, advises Lewis. 'Have a drink, play tennis, watch TV. Sometimes incubation can occur on the way to the coffee machine; it often takes no more than a momentary distraction to make the bug pop out.'

Prescription 12 is Misery Enjoys Company — Brainstorm. 'If our imagination fails, nothing could be wiser than to discuss our problem with others, especially colleagues working on the same project who have a general understanding of the goals of the program. Even if you are the sole programmer, it may be a good idea to seek advice from others. Free of your mistakes, they may have a positive contribution to make. Merely describing the characteristic of the bug will help you to gain a new perspective on the problem.'

Some of Lewis's prescriptions are good advice but probably impractical in a commercial environment because he argues against trying to force solutions against a deadline. One of his advanced problem solving prescriptions, for example, is Beware of Anxiety — It's Heavy. 'A cause of mental blocks is placing too much importance on obtaining a solution as quickly as possible. Such an attitude can only create additional stress in the problem-solving process.' This may be fine for a personal programmer with no external deadlines. But pressure, deadlines and anxiety are an integral part of the business environment in which so much programming is done.

Despite my reservations about the unreality of some prescriptions and the way in which programming examples are dealt with, I would recommend this book to all programmers and potential programmers. At times it may seem to be stating the obvious, but it provides a chance to carry out one of Lewis's prescriptions: Step Back and View The Forest. 'Often we become so involved with a programming problem that we cannot see the overall picture no matter how hard we try.' This is a valuable reminder to programmers that, whatever language you prefer, whatever size computer you use, the main aim in the overall picture is to solve problems.

Beer refreshes untouched parts

Brain of the Firm by Stafford Beer is a classic work in management sciences, computing, cybernetics, physiology. It is also a tragic book.

Tragic because Beer attempted to implement his computing blueprint to assist left-wing Chilean President Allende between 1971 to 1973. Although he only had two small computers at his disposal, Beer had established a nationwide information network to help monitor and plan the economy. But the best laid plans of mice and men can be gnawed away by rats, the CIA, *et al.* On 11 September 1973 Beer was in London, talking to the Liberal Party in the City. He was due to return to



Chile. As he walked out of the meeting, he saw a newspaper placard stating 'Allende Assassinated'.

Brain of the Firm was first published in 1972 and translations produced in many languages. The latest edition is an update on that first version. As well as a description of the Allende experiment, it includes Beer's retrospective comments on his original work. What is remarkable, however, is not so much the changes he makes to update the work but the fact that the bulk of Beer's ideas remain unchanged, despite the incredible micro revolution in technology which has taken place in the last ten years. In fact, the availability of cheap computing power reinforces Beer's analysis because it makes the technology capable of matching his concept of how organisations behave and should be managed — as a group of interacting autonomous units under central co-ordination.

The title of the book really says it all. Beer regards a company as one example of a large and complicated system. Other examples are animals and national economic systems. He is interested in applying general theories of organisation control (the main thrust of cybernetics) to practical management. In particular, he sees a close analogy between the way the human brain behaves and the role of management in an organisation. As he puts it: 'The fact is that the firm is very like an animal (let us say a human) body. It has a head, where top direction resides. It has a trunk, housing the vital organs. It has limbs, or branches, services, inputs and outputs of energy linked by a metabolic process, and so on indefinitely.' This analogy is used more than just as a literary metaphor but explores the comparison in scientific detail, in terms of biological, computing and management sciences.

Beer writes from experience. He worked in management for 20 years, has been a managing director and chairman and a consultant to many companies and governments. He writes particularly sharply about the way managers have wasted their greatest ally in trying to come to grips with the increasingly complex task of managing modern organisations — the computer. Computing technology, he says, offers management something which could 'make the managerial world utterly different.' But he believes that managements have used computers merely to improve or 'soup-up' traditional managerial methods and have precluded the emergence of a new management order based on exploiting the technology.

'There is a rather widespread use of computers in the role of new lamps for old,' he says. 'Routine office work is done by machines; sometimes staff have been saved, sometimes not. More and better output has been obtained; sometimes people have known how to make use of it, and sometimes not. A variety of benefits have been sought; sometimes money has been saved but all too often the pay-off has been negligible.'

One of the main problems, he argues, has been the way in which organisation behaviour has been described via conventional organisation charts which bear little relation to the real world. The origins of most large enterprises, he points out, were frequently in small operations under autocratic entrepreneurs. As the firm grew, the boss had to delegate responsibilities. The way these responsibilities were developed depended on the experiences and the whims of the boss rather than an objective analysis of organisational behaviour and requirements. At one time, Beer explains, the control of a firm was a function of the different types of people interacting with each other. The problem he pinpoints is that these natural developments were then described via ad hoc organisation charts which at first related to what actual people were doing but then became abstracted into a generalised organisation structure. 'It would be disastrous if some neurotically disposed chairman or consultant tried to insist that everyone behave like the organisation chart.' He highlights the particular difficulties that the generalised concepts of organisation charts can bring when applied to key functions which do not fit neatly into any particular box and come under the category of 'general management'. Production control and management accounting, for example, are often taken as general management tasks. But as the General Manager cannot be expected to have too many different managers of this ilk reporting to him, these general management functions have usually been squeezed into some existing organisation box.

But when Beer looks at the brain analogy, he identifies these general management activities as analogous to the role played by the part of the anatomy that links the cerebral cortex (the overall control part of the brain) with the brain stem, which is linked to the spinal chord and through that to the rest of the body. All information received by the cortex is filtered through what are called the basal ganglia and diencephalon. The cortex (which Beer compares to top management) makes its decision based on evidence not so much of the facts but the *facts as presented* to it by the level below. Similarly, he insists that staff functions that are often dismissed as general management play the crucial function of filtering information between the 'real' world and the world as perceived by top management.

At a broader system level, he draws a crucial analogy between the 'autonomic' behaviour of an animal and what might very superficially be called 'distributed computing systems'. A body and a firm consists of autonomous units interlinked with each other in a variety of ways but with a central hierarchy leading to the managing director. Beer explains: 'diagnostically, for instance, this means that a pain in the arm is not necessarily to be treated with embrocation; it may well be a symptom of heart disease. And in industry, heavy costs in an office may result in a roomful of people being replaced by a computer while the informational links used by the human beings are cut off because they were not understood.' He then develops his thesis of how a new management order can be involved, using computers, which allow for automatic actions and interactions between parts of the organisation's 'body' but without creating central overboard; or general breakdowns when the brain (or management team) try to make coordinated sense out of the automatic behaviour.

In a review of this length, I do not attempt to reveal anything other than the briefest tip of a significant intellectual iceberg. Although Beer writes lucidly, it isn't an easy book to read. It requires concentration and time to consider and reconsider the implications.

In today's facile world of instant mass media communications and attempts to package complex ideas in easily digested but bland and meaningless packages, asking for such an effort may be too much for some people. But I hope that Beer's work is taken seriously by many *PCW* readers. Most published works leave the mind untouched and unrefreshed; this Beer really does refresh the parts other authors never reach.

Future Kidology

Thames TV's 'Living In The Future' series for young children is one of the gentler attempts to describe the 'micro revolution'. If you missed it, you can get the book of the film by Alan Radnor.

Perhaps 'Tiswas's' plumptious supergirl Sally James misted my eyes but I much preferred the TV film. Or perhaps it is that I saw the TV film before the riots in Toxteth, Brixton, etc, brought home the reality of today and made the picture of a sanitised middle class future difficult to take seriously.

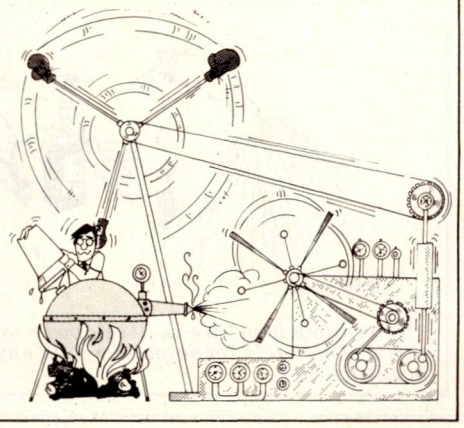

Firstly, let me praise the book for what it is good at. It is attractively produced, with lots of illustrations and relatively little text. It is good at explaining chips in kid's terms (but is not very good at software). Radnor also gives refreshing emphasis to non-computer technologies, particularly energy, which is often forgotten in 'impact of micro' scenarios. As in the TV series, the main emphasis, quite rightly, is on the application of the technology at home, school, work, the doctor, etc, rather than on the technology itself.

But, as in most pro-technology propaganda, there is little hint of the problems of implementing the technology or of any of the likely negative effects. The accent is definitely on the positive. All the drawings of likely future scenes contain white, middle class families and are worthy of an advert for washing powder or mashed potatoes. The images are of spacious, well designed houses, well cut lawns outside, fitted kitchens, etc; of computers in your own home to take your temperature and give you a medical diagnosis; of schools with advanced computers and cinemascope video screens.

This is matched with a fulsome acceptance and oversell of computing potential. For example, it is said that word processors 'not only type letters but make sure there are no mistakes'. In the future, Radnor says, international communications will be easier. 'There will be fewer problems with understanding and speaking different languages because you will have a pocket electronic dictionary which will speak for you.'

Now I don't expect a book for children to provide a negative critique of the technology. But I do expect it to be practical and realistic. When many children are living in appalling housing condition, where the National Health Service is on the verge of collapse, with the prospect of work for school leavers is poor; and the education system short of money, educational material has duty to avoid blue skies predictions. For most children reading the book, the future is darkened by thunder clouds. New technology may offer a ray of hope but it should not be allowed to artifically dazzle or to alienate.

Provided book is placed in context, *Living In The Future* does offer a reasonable introduction to the use of information technology. But I think that parents, teachers, uncles, big brothers and others should explain that it is a very partial picture of the future.

Book shorts

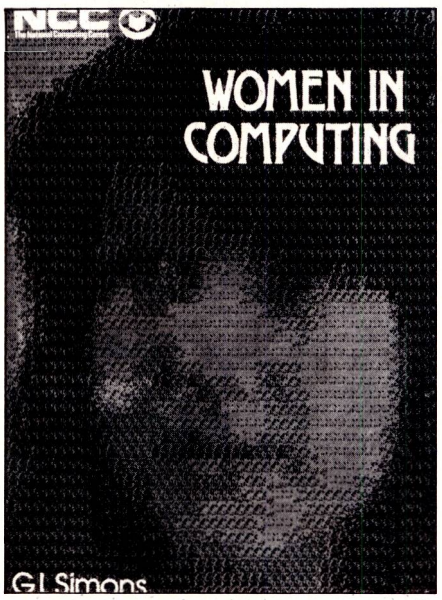

Women in Computing by G L Simons: 'The new consciousness of the rights of women in society has yielded legislation, changed attitudes and pressures for further improvements. There is a need for change in industry and elsewhere. The data processing industry is no exception. There is evidence here of anti-women discrimination and prejudice.'

That is the publisher's description of the background to this interesting book (although it may, unfortunately, seem to be interesting only to those already interested in the subject). It provides historical, legal and international perspectives around the core of the book, which offers statistics on what has happened to women in computing.

There are chapters on women in management, in the office environment and home-based freelance programmers. It is a useful reference work and should be particularly valuable to union officials, personnel officers and those involved in employing computing staff or planning education or vocational development policies or courses.

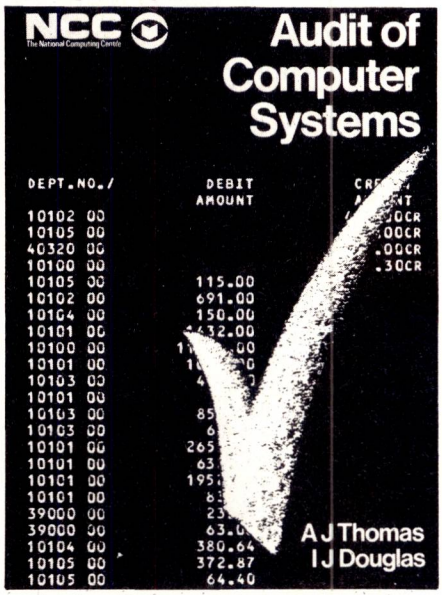

Audit of Computer Systems by Fred Thomas and Ian Douglas is a practical aid to managers, accountants, computer staff and auditors on how to apply basic audit objectives to companies with a computer.

Both authors have experience of computing and accounting and describe clearly any computing or accounting jargon. They pack into less than 200 pages a wealth of practical advice and guideliness covering topics such as auditing implications for systems development, data control, file interrogation, online and distributed systems. Other chapters cover control and standards, organisational and procedural audits, statutory computer audits, risks, losses and frauds.

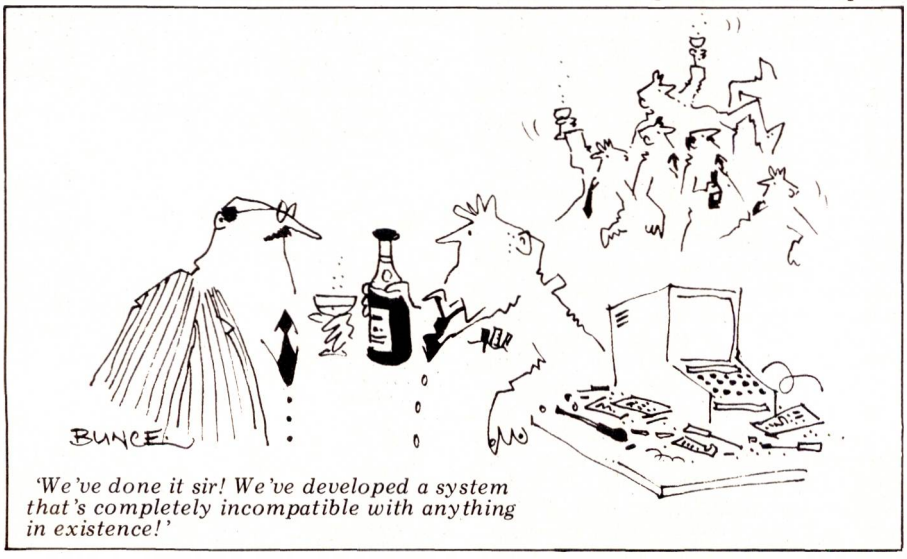

'We've done it sir! We've developed a system that's completely incompatible with anything in existence!'

This month's Bookfare included:
Problem Solving Principles for Basic Programmers by William E Lewis (Hayden, £7.35);
Brain of the Firm by Stafford Beer (Wiley, £11.50);
Living in the Future by Alan Radnor (ITV Books/MacDonald Phoebus, £3.50);
Women in Computing by G L Simons (National Computing Centre, £6.50);
Audit of Computer Systems by A J Thomas and I J Douglas (National Computing Centre, £9.50).

PATTERNS

Alan Sutcliffe continues his series.

First of all this month, I am continuing my notes on generating sequences of integers with the minimum amount of computing. Laziness is as useful an attribute in programmers as it is in mathematicians; I often spend hours looking for a way just to save a few seconds with a shorter program or a simpler proof. It's partly an obsession with economy, mother of elegance, and it may not be so silly if the program is used often enough.

I then return to the ever-fascinating topic of Knight's tours on a chessboard, and a new problem proposed by a reader. (Which reminds me to say that I would like to get more feedback and, whether it's a comment, question, development, pattern or a downright contradiction of what I've said, let me hear from you.) As well as its inherent interest, I hope that the discussion of Knight's tours throws some useful light on methods of problem-solving with computers. In particular, the balance between analysis on paper, mathematics if you like, and getting results with the aid of a program.

More Fibonacci

Last month I wrote about using the Fibonacci series to generate patterns of integers in an economical way. To recap, the series is: 0 1 1 2 3 5 8 13 21 34. . . defined by

$F_{n+1} = F_n + F_{n-1}$

with

$F_0 = 0$ and $F_1 = 1$.

This clearly increases without limit so the trick is to use the remainder on division by some value M, called the modulus. M will be chosen to suit the application: the length of a list from which words are to be chosen, for example, or the size of the plotting area in graphics. It is not necessary to carry out a division – since the values to be added are always less than M, at most one subtraction of M is all that is needed.

This is shown in Program A, which produces two values for each call. This is handy if you can use values two at a time, but even if one of them is discarded, the routine will be much quicker than a call to the RND function on most machines. If you insist on producing only one value at a time, a version of this method is given later, in Program D.

A major drawback of this method, however, is the fairly short cycle of repeating values that it gives. The longest possible cycle is M^2-1. F_{n-1} and F_n define the next value, and each of these is in the range 0 to M−1. So there are M^2 different possible pairs of values for F_{n-1} and F_n. But the series beginning 0 0 will simply repeat itself to give zeros for ever. The remaining M^2-1 pairs of values may or may not form a single cycle — usually they do not. Here is the series for M=3: 0 1 1 2 0 2 2 1 0 1 1. . . This repeats after eight terms = 3^2-1, the maximum possible. To confirm this, note that within the sequence every possible pair of values occurs just once: 01, 02, 10, 11, 12, 20, 21, 22, except for 00.

For M=4 the cycle could be up to 15 terms but it is much shorter: 0 1 1 2 3 1 0 1 1. . . Only six terms. The remaining pairs of values appear in two other sequences having different starting values: 0 2 2 0 2 2. . . and 0 3 3 2 1 3 0 3 3. . .

This situation, where the values break up into several cycles, is the normal one. It is as well, therefore, before using this method with a particular value of M, to check on the cycle length. Program B does this.

So the problem is how to extend the cycle length without too much extra computing. My first thought was simply to increase the number of terms to be added together to 3, 4 or 5, instead of 2. But there is a slightly more economical way than this which has much the same effect. Take the sum of two terms, but not those immediately preceding the new term to be defined. There are two ways we have not yet used of choosing two terms from the last three. In each case it is now necessary to define the first three terms of the series.

$G_0 = G_1 = 0, G_2 = 1$

(a) $G_{n+1} = G_n + G_{n-2}$

0 0 1 1 1 2 3 4 6 9 13 19 28 41 60 88 129. . .

(b) $G_{n+1} = G_{n-1} + G_{n-2}$

0 0 1 0 1 1 1 2 2 3 4 5 7 9 12 16 21 28. . .

Another advantage of using only two terms is that the remainder can be produced with, at most, one subtraction, rather than by repeated subtraction or by division.

Now it does not follow that the cycle of these series for a particular M is going to be longer than for the plain Fibonacci series. But it does have the chance to be longer, for the maximum is now M^3-1, the number of possible triplets, excluding 0 0 0. If it is acceptable to produce these values three at a time, Program C is the way to do it. However, if you insist on producing only one value at a time, look at Program D. The values here have to be shifted down each time, which entails three extra assignment statements and an extra variable. So you can have three values almost for the price of one.

This technique can easily be extended by using two values from earlier still in the series. But notice that not every such pair of values will give rise to a new series. For example, in series (b) above, the next term can also be defined by

$G_{n+1} = G_n + G_{n-4}$

This can be proved by a bit of algebra, but it is easy enough to spot duplications like this by inspection. As before, variants of the series can be got by starting with different initial values for the variables.

Another easy way to introduce

```
100 M=10
110 F=0
120 G=1
890 REM SUBROUTINE
900 F=F+G
910 IF F<M THEN 930
920 F=F-M
930 G=F+G
940 IF G<M THEN 960
950 G=G-M
960 RETURN
```

Program A. Simple Fibonacci series (mod M).

```
100 DIM F(2)
110 PRINT "  M","CYCLE","MAX=M*M-1"
120 FOR M=50 TO 60
130 F(1)=0
140 F(2)=1
150 K=2
160 I=1
170 G=F(1)+F(2)
180 IF G<M THEN 200
190 G=G-M
200 IF G=0 THEN 250
210 F(I)=G
220 I=3-I
230 K=K+1
240 GO TO 170
250 G=F(3-I)
260 L=1
270 T=1
280 T=T*G
290 T=T-M*INT(T/M)
300 IF T=1 THEN 330
310 L=L+1
320 GO TO 280
330 PRINT M,K*L,M*M-1
340 NEXT M
350 STOP
```

M	CYCLE	MAX=M*M-1
50	300	2499
51	72	2600
52	84	2703
53	108	2808
54	72	2915
55	20	3024
56	48	3135
57	72	3248
58	42	3363
59	58	3480
60	120	3599

Program B with sample output.

```
100 M=10
110 F=0
120 G=0
130 H=1
890 REM SUBROUTINE
900 F=F+G
910 IF F<M THEN 930
920 F=F-M
930 G=G+H
940 IF G<M THEN 960
950 G=G-M
960 H=H+F
970 IF H<M THEN 990
980 H=H-M
990 RETURN
```

Program C. 3 new values at each call.

variety is to vary the value of M. This can always be increased without danger but if M is decreased then the sum of the two terms can be greater than 2M, and the values may increase out of control. There is no guarantee that a longer sequence will result and a check should always be made that the cycle length is not unacceptably small.

To sum up, Program E combines some of these methods to make a pattern of squares. The result is shown in Figure 1. I do hope that next time you need some fairly random integers you will try one of these series. How Fibonacci would have loved to have a small computer to experiment with, like this — but, sadly, he never knew what he was missing.

```
100 M=10
110 F=0
120 G=0
130 H=1
890 REM SUBROUTINE
900 I=F+G
910 IF I<M THEN 930
920 I=I-M
930 F=G
940 G=H
950 H=I
960 RETURN
```

Program D. One new value at each call.

```
100 PAGE
110 P=1
120 F=0
130 G=0
140 H=1
150 M=51
160 FOR I=1 TO 99
170 GOSUB 900
180 MOVE @P:F,G
190 RDRAW @P:0,H
200 RDRAW @P:H,0
210 RDRAW @P:0,-H
220 RDRAW @P:-H,0
230 NEXT I
240 STOP
900 F=F+H
910 IF F<M THEN 930
920 F=F-M
930 G=G+F
940 IF G<M THEN 960
950 G=G-M
960 H=H+G
970 IF H<M THEN 990
980 H=H-M
990 RETURN
```

Program E: Draws 99 squares.

More Knight's tours

In the April and May issues of *PCW* I considered chessboard tours by a Knight in which every possible path between two cells is traversed just once in a single tour. Geoffrey Silver of Mill Hill, London has sent me a list of a complete set of Knight's tours, on an 8x8 board of the more conventional kind, in which each cell is visited just once in a tour. The list is complete in the sense that there is a tour for each different possible pair of starting and ending cells.

The problem is in two distinct parts. First, enumerate all possible different pairs of starting and finishing cells. I shall call such a pair of cells a journey, while a tour from one to the other is a route. On an 8x8 board there are 136 journeys. Those which differ only by reflection or rotation are not counted separately. Direction of travel is also ignored: a route and its reverse count as one.

The second part of the problem is to find a route for each journey or, alternatively, to show that no route exists for a particular journey — that is, 'you can't get there from here', not if you're a Knight, anyway. What Silver has done is to show that there is a route for every journey on an ordinary chessboard.

To illustrate the first stage, consider the 4x4 board shown in Figure 2(a). There are three kinds of starting cell: A, a corner; B, an inner; and C, a side.

On such an even-squared board a journey must begin and end on squares of opposite colours, so it is only necessary to look at those starting, say, on a black cell and ending on a white. Figure 2(b) shows the four different ending cells, starting from a corner. The journey can only end on a white cell and there is symmetry about the diagonal through the start. Starting from an inner cell, Figure 2(c) shows the three journeys. As well as the conditions above, corner cells are now ruled out since all journeys starting at a corner have already been counted. Starting from a side cell, Figure 2(d) shows the three remaining distinct journeys. There is no longer diagonal symmetry, but both corner and inner cells are now ruled out. In addition, the journeys to the two side cells marked 2 are identical but for rotation. This gives a total of ten different journeys.

I have worked out the general formula for the number of journeys on a square board, and there are three different cases. On an NxN board:

N even = 2n, giving:
$\frac{1}{2}n^2(n^2+1)$

N odd = 2n + 1, n even, giving:
$n/8(2n^3 + 4n^2 + 13n + 6)$

N odd = 2n+1, n odd, giving:
$1/8(2n^4 + 4n^3 + 13n^2 + 4n + 1)$

Don't ask me how I found this, it's just too complicated to explain here, but I always was good at sums. You are welcome to try to disprove it. It does show that sometimes mathematics is better than computing. A program to enumerate journeys would certainly have taken me longer to produce and that would only have given specific values, not a general formula. The number of journeys for the first few values of N are given in Table 1.

When N is odd there are proportionately fewer journeys. This is because on an odd square, a journey must begin and end on cells of the same colour as the centre and corner cells, say black, since there is always one more black cell than white on such boards.

Figure 3 shows the number of journeys for a 5x5 board. Starting with a corner cell there are 8 cases, then starting with the next cell on the diagonal there are five cases, ending on any black cell except a corner. Starting from the centre there is only one journey, to the centre of a side. Finally, starting from a side there are two further journeys, to an adjacent side and to the opposite side. Thus there are 16 journeys in all.

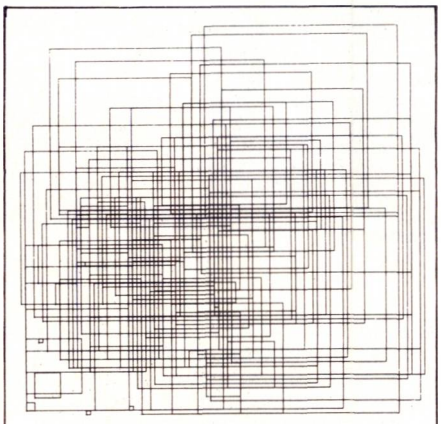

Fig 1 Pattern from Program E, with M=50.

N	No of journeys	Journeys with a route
1	0	0
2	1	0
3	3	0
4	10	0
5	16	8
6	45	?
7	50	?
8	136	136
9	125	?
10	325	?

Table 1

The second part of the problem is to find a route for each of these journeys, or show that none is possible. Geoffrey Silver did this for all 136 journeys on a standard board, using only a small number of basic routes: one for each kind of starting cell. He then developed different endings that reached all the required cells by reversing the route from some point on.

Suppose the cells along a route are numbered 1 to 64. At some point, say cell 45, the route will be a Knight's move away from the existing final cell, 64. Re-route from 45 directly to 64 and trace the rest of the route in reverse: 1. . . 45 64. . . 46. Sometimes more than one such switch was needed to form a particular solution.

The last column in Table 1 shows the number of journeys for which there are routes for some values of N. For N=8 this is Silver's result. Clearly there are no routes at all when N=1 or 2. For N=3 no route is possible because the centre cell cannot be reached. It is not difficult to show that there are no routes either when N=4. On a 5x5 just half the journeys have a route, as the following arguments show. For a route to be possible, either the start or the finish, or both, must be corner cells. Suppose this is not so. Then the four corner cells must be somewhere along the route. Each corner has only two possible links, and these must then be joined as in Figure 4 to form a closed

loop, which makes a complete route impossible.

This leaves eight journeys which have one or both ends at a corner. I have shown simply by constructing them that there is a route for each of these. I have not studied the cases for other values of N: 6, 7 and > 8. It seems likely that there are routes for all the journeys on the larger boards.

All this has been done without benefit of computer. But it is natural to ask how easy it would be to find routes for particular journeys by program. To help answer this, a little look into history is useful. In 1823, H C Warnsdorff published a method of finding Knight's tours. Today we would call it a heuristic algorithm.

1. Suppose that X is the last cell reached on a partial path: initially it will be the start cell.
2. For each cell that can be reached in one step from X, compute the number of cells that can be reached in one further step, excluding any which have already been used.
3. Move to the cell with the fewest such exits, but ignoring any with no exit at all. If there are several with the same minimum, choose one at random. This defines the new X.
4. Repeat steps 2 and 3 until the route is complete.

In 1942 that great man of recreational mathematics, Maurice Kraitchik, wrote of this method: 'Although it is laborious to compute every time the number of possible exits, this inconvenience is counterbalanced by the advantage of a surprising property that is very difficult to analyse, namely: the many mistakes that it is difficult to avoid do not prevent one from finishing the tour, except in certain cases.'

A resilient algorithm. Clearly it is based on the sensible idea of using up the scarce options first and leaving multiple options open as long as possible. Using a computer removes the laboriousness and, hopefully, the many mistakes. It also allows a small refinement. In step 3, instead of choosing a cell at random from those with an equal minimum score, each of these can be tested further to see which has the least number of exits at the next step and so on. Either the end of the route will be reached, or a best cell will emerge, or a dead end will be reached. This last hardly ever happens. The method is said to work on boards of any shape or size. An example of its application on a 5x5 board is shown in Figure 5.

What Warnsdorff's method by itself does not do is allow for us to aim for a particular final cell. There are at least two ways of using it to obtain such results. The first is simply to use it for generating lots of solutions, from all possible starting cells, and then use Silver's method of switching the tail to make up any journeys that are still needed.

In the second method, the program is extended to mark as used the final cell until the last move is made. To ensure that it can be reached, a check should also be kept on all the cells one step away from the last cell, so that one of them is kept free until the penultimate move. And similarly for the cells leading directly to this one, until the route is completed or an impasse is reached. It is not clear that this method will always produce a solution: I suspect that it will not. Its chances can be improved by using it repeatedly with random choices put back in step 3, or by formal backtracking — that is, when a dead end is reached go back to the next best minimum in step 3 in the most recent move where there is such a next best possibility. This method will produce all possible routes.

Among the things I have not studied is the number of different routes for a particular journey. Kraitchik states that there are 1728 (=12^3) routes on a 5x5 board, but he counts symmetrical cases as distinct. Even so, there must be well over 200 different routes for the eight journeys that have at least one route. Amazing what computations were done without computers: he also says there are 1,213,112 routes on a 4x10 board!

If you get bored with square boards, you can turn to rectangular ones and more fancy shapes. The only other board I have looked at is 3x4. On this there are 13 possible journeys but routes for only three of them. According to Kraitchik, there are no routes at all on the 3x5 and 3x6 boards, just in case you thought of looking.

I will be very glad to receive any further original contributions to this subject, c/o *PCW*, 14 Rathbone Place, London W1P 1DE.

	+		+
+		+	
	B		+
A		C	

Fig 2(a)
Three possible start cells.

	+		+
+		+	3
	+	2	+
A	1		4

Fig 2(b)
Start at A: 4 end cells.

X	+		+
+		+	3
	B	2	+
+	1	+	X

Fig 2(c)
Start at B: 3 end cells.

X	+	3	+
+	X	+	2
2	+	X	+
+	1	C	X

Fig 2(d)
Start at C: 3 end cells.

+		+		+
	+		+	
+		1		+
	5		+	
8		2		+

Fig 3
16 routes by start cell.

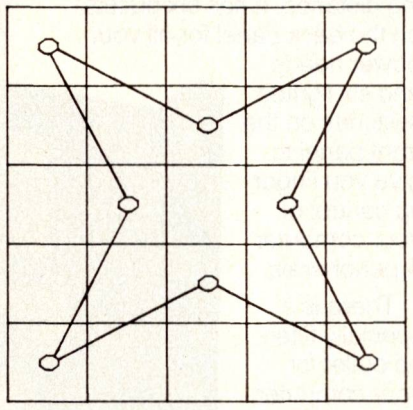

Fig 4
Closed path of corner cells.

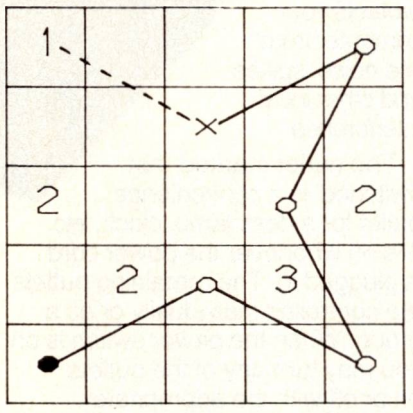

Fig 5
Application of Warnsdorff's rule.

The Work Station

Transforms your micro into a business machine

The Work Station is designed for your convenience, allowing you to set your monitor back to a comfortable viewing and working distance. It has six outlets on the back panel for all your power needs and six lighted switches on the front panel to give you finger-tip control of your computer & peripherals.

There is a specially filtered outlet for your computer, controlled by the 'CPU' switch. This filter protects your computer from line noise, spikes and other local interference.

The outlet marked 'not switched' is a convenience outlet for a desk lamp, clock, etc. It is on whenever the power cord is plugged in. The remaining outlets are controlled individually or as a group. When the power switch is on you may turn any of the outlets on or off with the appropriate switch, or you may turn them all off with the power switch.

The Work Station is designed for a total load of 1875 watts.

- Advanced in-line filtered supply eliminates mains spikes and lost data
- Metal-chassis mounted: completely enclosed.
- Solid silver switch contracts. Long life and reliability.
- Twin fuse protection.
- Heavy duty power cable for extra peripherals.



Photo, Hutchins Photography Inc. Belmont

A control centre

- Finger-tip switches for instant control.
- Lights show which units are on.
- Rugged construction protects your equipment.
- A stable support for your monitor and disk storage.
- No more fumbling round the back for switches.
- Quality wood veneer finish to complement your office.

A professional installation

- Transform your office desk into a work station.
- Save space and increase storage by removing clutter.
- Bring your monitor to comfortable eye level.
- Power only the units you require.
- Full-width back panel hides those vulnerable trailing cables.

Industrial standard electronics

- Six backlit push button switches

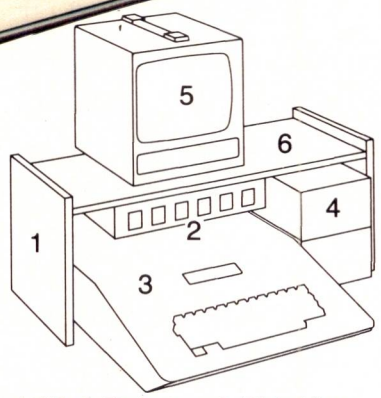

1 Work Station 4 Disk drives
2 Switches 5 Monitor
3 Micro computer 6 Storage area
Overall size 24¾" x 10" x 10"

See The Work Station at your local computer dealer, or send a cheque for £200 (Inc. VAT and P.&P.) to:–

EMKAY SYSTEMS
"The Business House",
37 St Michael's Square,
Gloucester GL1 1HX
Telephone: (0452) 424411

apple computer

Just the Graphics could turn an apple green.



The OKI 800 Model 20 offers outstandingly high definition colour graphics for the price of Monochrome.

But that is just the start.

Fitted with double density 280K floppy drives and a high resolution 640 x 200 dot colour CRT, the OKI offers the kind of extras as standard which other manufacturers charge for. Like the 80 character/line plain paper printer which can copy dot-for-dot from the screen. Or the 64K of workspace RAM. Or the world famous Microsoft BASIC, specially extended to do justice to the graphics.

Furthermore, the CP/M operating System can be used to give access to the most extensive and fastest growing range of professionally written software.

Perhaps already the most complete around, the OKI is still highly expandable. For instance, the optional light pen enables truly interactive displays while a range of add-in cards ensures its ability to meet not only a variety of current, but also future needs.

At **£4,299** the new OKI machine will impress to the core!



High Resolution Graphics

IF800 model 20 Specifications *CP/M or OKI BASIC*

Video Display
12 inch
80ch x 25 line
80ch x 20 line
40ch x 25 line
40ch x 20 line
} Selectable by Programming
Color (8 colors)/Green
Smooth Scrolling

Printer
Dot impact
80 ch/sec.
80 ch/line, 40 ch/line
Graphic Mode (screen dump)
Alphabets (capital/small), Numerics.
Roll Paper/Sproket Paper
3 Copies

Programmable Function Keys
10 keys available both on the keyboard and under the screen

From the people who believe in Quality, Reliability and Support.

ESI

Encotel Systems Limited,
530-539 Purley Way,
CROYDON, Surrey.
Tel: 01-686 9687/8 Telex: 265605

CHECKOUT



HEURISTICS SPEECH LINK

T R G Green and Gunnel Clark examine the problems of microtechnology speech recognition and test the Heuristics system.

All the best science fiction computers can not only talk in fluent and idiomatic English, but can also understand spoken English with remarkable accuracy. The signs are that this dream, like so many other s-f dreams, is already becoming partially true. Full comprehension is still some way off, but limited speech generation reached children's toys not long ago in the Speak and Spell device from Texas Instruments, and it has been suggested that a limited degree of speech recognition might be seen in the toy shops by Christmas 1981 or 1982.

What we can expect to see is not, however, the unerring comprehension of rapid speech in such adverse circumstances as attacks by klingons, but a rather faltering ability to recognise carefully spoken, pre-trained, isolated utterances. There is a significant difference between 'comprehension' and 'recognition'. Humans deploy massive resources in their comprehension of speech, using their knowledge of the grammar and sound patterns of the language, and their observation of facial expressions and (even in ordinary untrained people) some lipreading. None of that is likely to be seen in near future practical devices. Instead, the computer simply recognises that a given utterance matches tolerably well with one that was previously stored. No attempt is made to decode the sounds received into their phonetic components. A tolerable analogy would be with a machine that 'read' printed text by holding two superimposed pages up to the light: it could recognise that two pages were the same, and therefore that a test page corresponded with a stored page, but the method used would have nothing to do with the linguistic content of the page.

Thus, rather than decomposing 'Polly put the kettle on' into individual words and then parsing the words as a sentence more or less equivalent to 'Please start

the process of boiling the water, Polly', near-future practical devices will only be able to match sounds they hear against a number of prerecorded sounds and determine which is the best match. So the vocabularies will be both finite and small.

Recognising isolated utterances looks like a parlour trick at first, a gimmick good for nothing but children's toys and arcade games. But the military are putting considerable research effort into it, it is said, presumably because anyone flying a modern plane already has their hands full of things to twiddle and cannot possibly poke buttons as well. This is called in the jargon a 'hands-busy situation'. In an absorbing article in the IEEE's magazine *Computing*, May, 1980, John R Welch describes at length the pros and cons of entering data by voice in industrial contexts. Although Welch concludes that at present the technology needs further improvement, he cites a wide variety of possible applications. The blind, too, would benefit from being able to give spoken commands to devices — not merely to computers as we usually meet them, but to washing machines and other domestic devices, many of which will soon be available with significant computing power. And it is possible that word processors would be significantly improved if commands could be spoken, especially the word processing packages for use on ordinary micros which often require a multitude of two-key or three-key commands.

In fact, what about robots? Once your computer becomes mobile you cannot possibly expect to run alongside it poking buttons. At Queen Mary College, London, a project in collaboration with ICL is attempting to produce a robot for underwater salvage operations and other hostile environment work. Advanced techniques for voice control are being investigated, based on the recognition of isolated utterances.

Hardware off the shelf

Although research developments naturally enough frequently employ costly and advanced equipment, aiming at very high recognition rates, commercial exploitation (in children's toys, for instance) would need something simpler. A number of devices are now on the market for those wishing to explore this field, selling at present for prices between £45 and £200. For this you get a plug-in device with its own microphone ready to attach to your micro. Of the various devices available, we are closely acquainted with only one, the Heuristics H2000 SpeechLink for the Apple, but many of the questions raised by this one can be applied to all similar devices.

No word sounds exactly the same on two different occasions, and the methods of recognition have to take account of this, looking for those features that remain fairly constant. The SpeechLink operates by identifying the first two formants of the frequency spectrum. Formants are amplified bands in the frequency resonance of the voice as produced by the larynx, and all vowels and some consonants have clearly defined formants. For instance, the vowel 'ee', as in 'see' (written (i:) by phoneticians), is characterised by one low formant and a second very high formant, with not much energy in the frequencies in between, but in the vowel [u:] (as in 'cool') the first two formants are both low. Working from formants helps to reduce the device's sensitivity to the pitch of the voice — obviously one wants to recognise words without forcing the speaker to produce exactly the same pitch each time — and makes it more likely that the device will cope with differences between speakers; nevertheless, at present most devices need to be 'trained' afresh by each different speaker if they are to perform adequately.

The vocabulary sizes are small — 64 words for the SpeechLink 2000, 32 or 128 in other cases — but it must be appreciated that the recognition accuracy falls as the vocabulary increases. The central difficulty is, therefore, to find enough words that are sufficiently different in a reproducible way. This is quite a serious problem, and one needs to consider the characteristics of the particular system used. We shall explain below how to make the most of the SpeechLink recognition system. One may have the option of matching an incoming utterance against a partial vocabulary rather than a complete vocabulary, so that if some utterances seem completely inappropriate in a particular context they can be temporarily left out of account, giving improved chances of recognition with the remaining utterances — whether that is possible depends on the particular device; if it is, one can manage rather ingenious techniques.

Reproducibility presents a subsidiary problem. During a long session, the voice is bound to change from start to finish, especially at moments when the entire galaxy is about to be destroyed by the klingons, and a phrase uttered in the calm of the training session may be totally unrecognisable to the machine later on. Something has to be done about this drift problem if possible.

The H2000

The kit contains a plug-in board with filters, ROM, and logic, a microphone designed to pre-emphasise certain parts of the signal in compensation for the characteristics of the human vocal tract, and a demonstration floppy. The microphone plugs into the board on a socket mounted inside the Apple, as other Apple gear does, but we have found that bringing sockets outside makes the machine far more portable.

The demonstration disk is not well documented but the programs it contains are quite effective. There are some difficulties, though, and the first one arises right away. When you first bring up the main demonstration program (by RUN DEMO INIT) you are asked for identifying initials, so that your voice samples can be taken once for training and then be re-used for subsequent runs. True to American custom you are invited to supply *exactly* three initials. If you only supply two you will be unable to clear off that user to reclaim the space for later ones. (About five users can coexist on one disk.) In case any such gremlins catch you, you should take care to copy the master disk before trying it.

The most useful of the demonstration programs is Voiceplot, which displays a graph of the speech sample as registered by the H2000 using the low-resolution graphics. Unfortunately, the lines and axes are not labelled, a surprising oversight. However, the bottom two lines in Figure 1 can be identified as the first two formants, as registered by SpeechLink. With the help of Voiceplot, it is possible to work out which features of words the SpeechLink can best discriminate and so to construct vocabularies of words that are not easily confused.

The remaining demonstrations are mostly games (Blackjack, Othello, and an enjoyable maze game called Dragon), telephone number finders, etc, relying heavily on the digits or other ensembles of words chosen for their meaning rather than for their discriminability. This does not display the Speechlink to its best advantage. For instance, the Dragon game relies on monosyllabic commands, among which 'left' and 'right' are easily confused, as are 'down' and 'no'; and in all numerical entries the digit 'six' gives trouble. Nor have the programs taken advantage of the full possible sophistication of the equipment they demonstrate. In the Othello game it is quite possible to get trapped, finding that the device refuses to recognise any of the legal moves and refuses to play any of the illegal moves or to let you pass your turn; you can sometimes find yourself frustratedly repeating your chosen move again and again. The program sometimes has to be aborted in the end. However, the equipment is perfectly capable of supporting a better interface.

You will certainly find Dragon more fun if you improve the program a bit. For a minimal start, change the vocabulary to something more recognisable — eg, rising/falling for up/down, raw/lee for right/left (better to have unexpected commands than unrecognisable ones!). You can either simply remember to use these words or others that you devise, or else make simple changes to lines 380-410 of TRAIN DRAGON and lines 1525-1560 of DRAGON. Rather than miss a turn when a word is unrecognised, put in a repetition request; and instead of terminating the game without appeal if the SpeechLink thinks it has heard 'finished', either give the user a second chance or, more drastically, delete line 26080. Numerous other small improvements could be made, such as catching the bug that crashes the program if you try to drive through the ceiling and suppressing 'yes' and 'no' from the vocabulary after they have served their purpose (thereby reducing potential confusions).

It should be noted that all the demonstration programs except one run under Integer Basic, not Applesoft. The same is true of the test program to verify the SpeechLink ROMs. They are also very poorly commented, making them less useful than they might have otherwise been in showing how to program the device. The Applesoft program, FPDEMO, is the most useful for study purposes.

Fortunately the user manual is well written and in most cases the examples work perfectly as long as you make all

HEURISTICS SPEECH LINK

the corrections shown on the errata sheet. It would be useful to have more detail on the operation of the algorithm and on how the data are stored.

Training

The device is controlled mainly by PRINT and INPUT commands with a handful of special signals. To 'train' it, ie, to store a sample against which subsequent utterances will be matched, the command PRINT J$ is used, after using the PR command to address the slot where the board is mounted. The effect of PRINT J$ is to make the device wait until it registers a sound, then to store data about what it heard and also to store the value of J$. After training whatever sounds you want, you can then recognise them by using INPUT J$, this time using the IN command to address the slot, and now the device waits for a sound and training sample. There is no need whatever for the sound to correspond to J$ in any real way: if you tell it to print (ie, train on) 'Hamlet' and then sneeze into the mike, you will need to sneeze again whenever you want it to think it's hearing 'Hamlet'.

If the device finds that no previously stored samples are adequate matches to the sound it hears during an INPUT, it returns the empty string "" so that you can do something about it. The demonstration programs do nothing whatever about it as a rule, which is certainly not the best approach — at the very least the program ought to print a polite request to say it again. Alternatively, after one failure, or maybe two failures, the rejection level could be relaxed inside the device by poking new values into locations specified in the user manual. The rejection level is a criterion of how closely a sound must match one of the training samples before it is 'recognised'; set very low, anything goes, and the device returns the best match regardless of how bad the match might be; set very high, the opposite happens. In visual terms, if the device is trained on a cat, a cow, and an elephant, then it would refuse to recognise an ant if the rejection level were set midway. With the rejection level set very low it might 'recognise' an ant as the cat, that being the best match of a poor lot. With the rejection level set very high it might refuse to recognise a cat unless it was the same colour as the one used for training.

Certain words can be turned off if desired during a recognition trial to eliminate potential mistakes. This is done very simply by writing a zero into a 'suppression vector'. Although the manual uses that term it, is not strictly accurate; the vector actually stores the number of training samples given for each word. Zeroes mean that a word has not been trained at all and is therefore to be ignored during the recognition process. It is also possible to switch vocabularies quite straightforwardly, by changing a pointer in the workspace. This means that at one time the user can be talking to a vocabulary concerned with one topic, and later can be talking to a second vocabulary concerned with another topic, a useful logical extension of the idea of suppressing certain words in certain contexts.

The SpeechLink also has a feature which is invaluable if you hope to set up a friendly system. After hearing a word, it can be used more than once. So if it cannot be matched in one vocabulary, you can set a flag to say 'reprocess that same word', change the workspace pointers to point to a second vocabulary, issue another INPUT command, and then the device will use what it previously heard against the newly-selected vocabulary. Unfortunately neither the manual nor the demonstration programs give a lot of help here.

There are some features that are rather irritating. If working in Applesoft DOS, should you find that a bug in the program makes it necessary to break in when the device is awaiting speech, your program is lost. Unless already saved on disk you will have to retype it. Second, the manual does not tell you how to find out how successful the best match was, which means that fiddling with the rejection level is whistling in the dark.

Vocabulary design

Because the SpeechLink makes extensive use of the first two formants it is advisable to choose words containing long vowels, (as in 'heat' as opposed to 'hit'), which have more distinctive formant structures. The long vowels in English are [i:] (as in 'see'), [a:] (as in 'far), [ɔ:] (as in 'saw'), [ə:] (as in 'fir'), and [u:] (as in 'cool'). The SpeechLink seems to have difficulties with this last vowel, however, possibly because both the first and the second formant will fall within the lower band filter, causing a third, fairly weak formant to be picked up by the upper frequency filter. Turning to diphthongs, [ai] (as in 'fine') and [au] (as in 'cow') are generally identified correctly, whereas [ɛə] (as in 'bear') and [iə] (as in 'beer') are often mistaken for [ə:] (as in 'fir').

Thus, good vowel elements to include are the ones that occur in the words see, far, saw, fir, fine and cow.

The sound produced must be of certain intensity for the SpeechLink to take notice of it. It is therefore important that the beginning of the word is loud enough. On this account, words with non-initial stress (eg, 'impair') should be avoided. For the same reason it may be useful to have a plosive (p, t, k, b, d or g) at the beginning of a word, to ensure that the beginning of the vowel element has enough intensity to register.

Plosive consonants cannot, however, be counted on to distinguish words such as 'it', 'pit' and 'kit'. Their manifestation stretches over too short a time for the SpeechLink to catch them reliably, and although plosives do influence the formant structure, that also generally happens over too short a time to be a reliable feature.

The fricative consonants (s, sh, f, v, th) are often not immediately registered by the SpeechLink at the beginning of words. Sometimes they are not registered at all. Also the duration of an initial 's' seems to be very variable in unpractised speakers, which means that a word like 'six' is not an easy target. Initial fricatives should therefore be avoided. Inside words the presence of a fricative can be useful for recognition, and 's' can generally be identified correctly, since its characteristic high-frequency noise is within the range of the upper filter. Thus 'rising' and 'riding' are reliably distinguished (see Figure 2).

The nasals (m, n, ng) and l and r have low intensity and display fairly similar formant structures. They cannot therefore be relied upon to distinguish words.

Although the instruction manual recommends using multi-syllabic words, because they 'have more information than one syllable words', our experience suggests that two syllables (preferably stressed on the first) is about right. Stuffing the utterance with consonants cuts down the vowels, which are the SpeechLink's best feature.

As a rule-of-thumb summary of vocabulary design, try to choose two-syllable words with stress on the first syllable or else one-syllable words; rely on long vowels or contrasts between the presence or absence of fricative

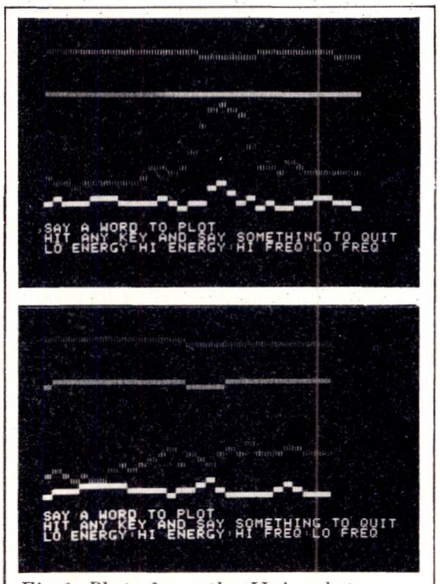

Fig 1. Plots from the Voiceplot demonstration program. The lower two lines are formants — concentrations of energy, in particular frequency bands characterising human speech; the Speech-Link analyses the first two formants, which it regards as lying in the bands 150 to 900 Hz and 900-5000 Hz. These are the most useful for distinguishing between vowels, so vocabulary design should pay particular attention to vowel contrasts. The plots show which frequency (y-axis) contained most energy at each sampling interval (x-axis) for the utterances (a) 'rising' and (b) 'riding'. The fricative 's' shows clearly as a hump in the second formant in (a) while the corresponding 'd' in plot (b) is much less visible, showing that the SpeechLink can easily distinguish between presence or absence of internal fricatives, but would find it hard to tell a 'd' from, say, a 'b'. The slow rise of the second formant before it humps in (a) or dips in (b) characterises the long 'i' diphthong, , and the SpeechLink can readily distinguish this pattern from those of other long vowels.

consonants inside the word to distinguish one word from another; and try to choose words starting with a consonant, especially a plosive. It makes good sense to try out your vocabulary first with the Voiceplot program. Any words that give very similar pictures are likely to be confused with each other.

Vocabulary size and rejection level

The SpeechLink allows the user to control two important parameters, the amount of training and the rejection level, or the minimum acceptable value for accepting a word as recognisable. We made use of the feature that allows a word to be reprocessed to help us investigate these parameters. (Dave Morrison, a student working with Dr Green, did much of the work involved.)

Our program was trained on a vocabulary of whatever size was desired. The list was read a few times by the speaker, usually three or five times. During the first reading, the program stored each word twice in separate tables; during the subsequent readings, one of the tables was left alone, while the other was used to form a merged record of the words. Thus we finished with one table recording singly trained words, and another recording multiply trained words including the very same utterances that had been used for the singly trained table. During the recognition phase, words were uttered by the speaker and were processed six times by the machine: each utterance was recognised against both tables, using three different values for the rejection level.

The first difficulty was that reading a list of words for training the machines produces in most people a flat monotonous diction which differs sharply from normal speech. When a list of 20 words was read five times the effect was very severe. To counteract it, try to arrange the training period so that the machine surprises the reader, waiting a random length of time before asking for another word to be read and then asking for a random word.

The user needs as much training as the computer! As the manual says, you need to hold the mike close and be very consistent with its positioning. Speak firmly, and do pronounce the words correctly: 'move' must not be allowed to degenerate into something almost the same as 'moo', and the diphthongal quality of 'down' should not get lost. Such points will usually have to be explained to first-time users.

Having got past that hurdle, we found that multiple training contributed less than would be expected after reading the manual. A list read five times produced little more accuracy than one read once only. One might well limit oneself to three or even two training trials.

When a word is uttered for recognition, it may or may not be a known part of the previously trained vocabulary. The SpeechLink may correctly recognise a known word (a hit), incorrectly 'recognise' a known word, incorrectly 'recognise' an unknown word, reject a known word (a miss), or correctly reject an unknown word. Ideally one would like to achieve 100 per cent hits and correct rejections. Stiffening the rejection level will certainly decrease the number of incorrect recognitions but it will increase the misses; relaxing the rejection level will increase the hits and decrease the misses, but it will also cause more incorrect recognitions. Especially, relaxing the rejection level will risk more misrecognitions of known words, if the utterance happens to have been poorly enunciated so that it doesn't sound like anything much but happens to sound more like something else than itself.

To our surprise, relaxing the rejection level had a side effect of making the device more likely to recognise an incoming utterance as the last word in its list, whether it was really that one or not. A stiff rejection level meant that the word might quite well not be recognised at all, but was more likely to be correct if it was recognised. One would have expected that the same utterance processed twice through the system with the rejection level changed would be rejected at some levels and recognised at others, but would always have been recognised as the same thing, if it was recognised at all, regardless of the rejection level. It was not clear why this happened. A bit more information in the manual on how the recognition algorithm operates would have been useful here.

Given all this, it is obviously best to work in a quiet room and with well-practised speakers who are unlikely to stumble or to offer invalid words; most of what the device hears will then be what it was meant to, and the rejection level can be tightened up. We found that setting it to −100 was too tight, but −50 seemed about right (more negative numbers give tighter rejection). Under these conditions, most recognitions claimed by the device will be hits, and not many incorrect rejections will occur.

The dynamic interface

Since no amount of tweaking will produce perfect performance, something must be done to make the failures tolerable to users. After all, the whole purpose of speech recognition is to help make computers easier and friendlier to use; how stupid it would be to set out on such an endeavour and then to spoil it at this point! Here are some possible schemes.

1. Do nothing when the word cannot be recognised. That is what the Dragon demonstration program does — or rather, it makes you miss a turn if your move was unrecognisable. Not recommended;

2. After an unrecognised utterance, have the Apple ask for a repetition. This is less helpful than it might seem, because the user is unlikely to recapture the sound of the original training: one can find oneself getting steadily more irritable, saying the word, whispering it, shouting it, wheedling it . . . The Othello demonstration program uses this method. So does our modified Dragon program, which gives a rising tone on the speaker and displays the word 'PARDON?' as shown in Figure 3;

3. Try recognising first against a tight rejection level. If that succeeds, you probably have a hit, but it increases the chance of not getting a recognition. In that case, now relax the rejection level, and try again, reprocessing the same utterance. If you get a recognition you can no longer be so sure of it, so ask the user to confirm. ('Did you say "COWCATCHER"?' — and the user gives Yes or No.) Continue to relax the rejection level until some sort of recognition is achieved. Unfortunately, as we have noted, when the rejection level is looser than about 100, the last word in the training list is generally 'recognised'; this should therefore be a dummy that is never spoken, and if the SpeechLink 'recognises' it that should be taken as a failure to find a recognition;

4. In some cases, only certain words are valid. All others can be suppressed by poking a bit in the memory table for each unwanted word, and the utterance can be matched to those remaining. If successful, well and good; if not, bring in the suppressed words again and try once more. This scheme is like no 3 in its philosophy, and can indeed be combined with it;

5. If the user fails in the first two attempts, or maybe three, something is obviously wrong; the intonation has drifted away from what it was during training. In even slight stress that is bound to happen. You might just as well give up gracefully and display all words (starting, if possible, with the most likely) asking the user to respond Yes or No. When the Yes is found, ask for it to be said again and keep that as another entry in the vocabulary tied to the same stored string. This may be irritating, but it is better than sitting there bellowing again and again at the

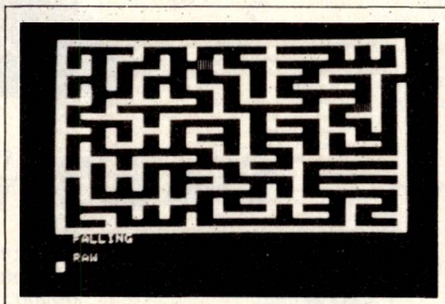

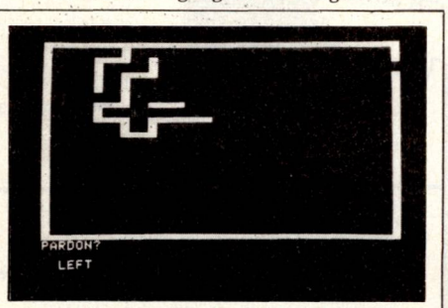

Fig 2. The Dragon demonstration program. (a) As supplied, the walls become visible only when the player bumps into them. (b) A version modified to leave the maze in view. The player steers towards the exit by spoken commands up/down/left/right, trying to evade the dragon. The last two commands spoken remain in view. Our versions have also been modified to print 'pardon?' and give an audible cue when an utterance is unrecognised. The (b) version uses a vocabulary chosen for discriminability, rising/falling/raw/lee instead of up/down/right/left, a revision that dramatically improves recognition accuracy.

HEURISTICS SPEECH LINK

machine and getting 'Please say it again' each time;

6. To avoid the indignity of admitting defeat in the previous approach, the problem of drift ought to be tackled. Each time a word is recognised, the voice sample can be blended in with the previously stored version. This will of course go hopelessly wrong if there is a substantial number of misrecognitions. The snag is that the SpeechLink does not provide any way to form a weighted average of samples, and moreover it objects to receiving more than eight training samples on any one word. Do not despair. The 'suppression vector', as we noted above, contains the number of training samples received by each word. It is therefore quite easy to cheat the device. After training, every entry in the vector is set to, say, 2. Thereafter, each word recognised is also used for retraining, which will give an average weighted 2:1 in favour of the past and against the word just heard, and the entry in the vector will be incremented to 3. Reset the entry to 2, ready for next time, and there it is: the device's stored samples will automatically keep up to date with drifting enunciation.

So a friendly interface would perhaps work like this. After training three or four times on each word, the main task is started, in which the device tries to identify the user's utterances. Each utterance is first tried against a vocabulary of only appropriate words, with a tight rejection level. If no recognition is achieved, it is tried against all possible words, still with a tight level, and now if a recognition is made the response is probably to say that that word is inappropriate. If there is still no recognition, the rejection level is relaxed, and if a match is now found, the user is asked for confirmation before acting on it. If, however, no match is found even with the lowered level, or if the dummy last word of section 3 is 'recognised', the user will have to be asked for a repetition, and the entire process is repeated. Should it once again fail to produce a recognition, there seems nothing for it but to use the desperate measure of 5. But to reduce the likelihood of that, recognised utterances will be blended in with the previously stored versions, in the manner of section 6.

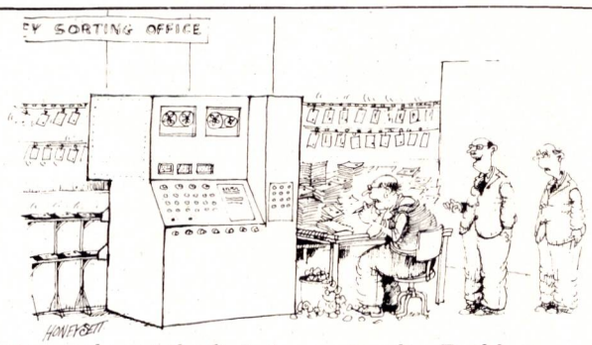

'The computer works out the first class post codes, Fred here works out the second class ones.'

Interface development and the small user

Speech recognition devices are evidently here to stay. The big firms, however, are putting their massive resources into pushing the accuracy of recognition as high as possible. It is up to the rest of the world to find good ways of coping with the inevitable failures of recognition and to create friendly interfaces. The history of micros to date has shown that their great popularity and their appeal to a quite different market from the mainframe has resulted in a new and most welcome concern for friendly, usable systems aimed at the relatively inexperienced user. Quite often these have been developed by small users, and we look forward to the same happening with speech recognition now that the hardware is so cheap. Who will come up with 'Audio-calc'?

COMPUTING CAN BE FUN

QUALITY PROGRAMS CHOSEN FOR THEIR SUPERB GRAPHICS AND SMOOTH ACTION

TRS 80

COSMIC FIGHTER WITH SOUND

Your fighter appears Below a convoy of aliens! If you destroy them another set appears who seem to be slightly cleverer than before! Soon your space station nears but before you can dock the station comes under attack! Survival is up to you! The excitement is just beginning!!

TRS80 Levels I & II 16K Tape £10
Video Genie 16K Tape £10

ATTACK FORCE WITH SOUND

Dodge the alien Ramships and fire missiles to destroy them before they get you. The alien Flagship uses his deadly laser bolt to transform a Ramship into another Flagship or into your ship's double. Look out! Destroy your double and you could destroy yourself!

TRS 80 Level 1 or 11.16K Tape £10
Video Genie EG3003 16K Tape £10

Video Genie

GALAXY INVASION WITH SOUND

The newest and most exciting invaders type game yet! Cruel and crafty aliens attack Earth. You are the sole defender. As you fire your laser at the aliens they swoop down and bomb you. Exciting use of graphics! Must be seen.

TRS 80 Level 1 or 11.16K Tape £10
Video Genie 16K Tape £10

ASTEROID NOVA

Now the amazing ASTEROIDS arcade game for your TRS80! Your Ship is floating in the middle of an asteroid belt! Your only escape is to destroy them and the crafty alien spacecraft! Blast them with your laser, thrust, rotate or hit hyperspace to survive!

TRS80 Levels 1 & 11.16K Tape £10
Video Genie 16K Tape £10

THE ESSENTIAL SOFTWARE COMPANY
(Viscounti Ltd.) 01-837 3154
47 Brunswick Centre, London WC1N 1AF

I have a ..... microcomputer
☐ Please send me your software catalogue. I enclose a stamped self addressed envelope.
☐ Please send me .....
I enclose a cheque/postal order for £ .....
(plus 50p post & packing)

Signature .....
Name .....
Address .....
Postcode .....
My ACCESS No. is .....

3-D ADVENTURES

NEW for TRS80 LEVEL II 16K

A must for all adventure addicts! Walk down corridors depicted in full 3-D graphics. Look around to find the objects you need to survive. But beware! Monsters and Incredible Obstacles can lurk round every corner!

LABYRINTH TAPE £10 DEATHMAZE TAPE £10

LABYRINTH

DEATHMAZE

TJ's WORKSHOP

This month we introduce a new regular feature to PCW, *designed to cater for everyone who really enjoys getting to grips with their micros — all you 'terminal junkies' in fact. From now on we'll be publishing a wealth of hardware fixes and software tricks for all the popular machines. But we depend on your help in sending us your favourite tips — we'll even pay you for them and* PCW *pays its contributors very well! Send your input to:* **'TJ's Workshop',** *PCW*, **14 Rathbone Place, London W1P 1DE**

ZX81 SPACE SAVING

If you own a 1k ZX81 and you've been trying to use programs written for the 1k ZX80, you may have found that some won't fit into RAM, let alone run!

There are two main reasons why programs take up more RAM in the ZX81 than in the '80. First, numbers are stored as five-byte floating point format, rather than two-point integers, which is particularly significant when arrays are used; and second, ZX81 system variables take up 125 bytes, 80 more than in the ZX80, leaving only 899 bytes free for the program, display file, variables, work areas and stack!

Fortunately, it's possible to reduce the size of most programs, using the following tricks. Of course, you can still use these if you have more than 1k to play with — with 16k, you should be able to squeeze in some pretty impressive programs!

1. Common numeric constants may be replaced by variables, each having been assigned the value of a constant. Generally, at least four occurrences of the same constant makes this worthwhile, since each numeric constant takes six bytes of the program area. Other less common numeric constants may be expressed in terms of the common constants, wherever possible. Use may also be made of 0=NOT n (n≠0) and 1=NOT 0.

2. Common statements, which may be adjacent, may be merged into one statement, particularly LET, PRINT and IF, often using conditional terms in expressions. Often this device promotes structured programming as it removes the need for many GOTOs. Examples are shown in Listing 1.

3. Arrays of small valued integers (<256), as are often required for graphic programs, particularly using positions in the display, may be replaced by arrays of characters, thus saving four bytes per element. This requires the use of CODE and CHAR$ when setting and accessing the values, but with any significant size array there can be a considerable saving.

4. Indicators may be stored in string rather than numeric variables; also, saving the numeric constants with which they are tested.

5. Codes in POKE statements and PEEK comparisons may be replaced by CODE 'character', saving four to six bytes as well as making the program more readable.

6. Temporary variables used to evaluate expressions used later only once or twice may be avoided; often saving both the variable and the LET statement.

7. Headings and graphics may often be printed explicitly, rather than in a loop — see Listing 2.
This device saves space for up to at least 24 identical or related characters.

8. There is no need to have superfluous LET statements to pre-declare all variables, as with the ZX80, to fix the start of the display file.
In fact, since the start of display file is fixed once the program is running, the address of the display file may be embedded in a particular program, having extracted it after inputting the program, instead of using in the program: PEEK 16396+256*PEEK 16397, giving a saving of 24 bytes. Extreme care must be taken to alter this address whenever the program is changed.

Colin Clayman

```
100 PRINT ("WIN" AND NOT L) + ("LOSE" AND L)
saves six bytes over

100 IF L = 0 THEN PRINT "WIN"        0 = Ø
110 IF L <> THEN PRINT "LOSE"
and
100 LET P = P + (P < M)
saves 10 bytes over
100 LET P = P + I                    I = 1
110 IF P > M THEN LET P = M
```

Listing 1

```
100 PRINT "0123456789"
saves 14 bytes on
100 FOR N = 0 TO X                   0 = Ø, X = 9
110 PRINT N;
120 NEXT N
130 PRINT
```

Listing 2

ZX81 TIPS

Here are a few tips for those ZX81 owners who have gotten rather behind in the Rampack race:

1. Use only single letter variable names. As you would expect, the name 'EGGS' takes up four bytes and 'E' only one every time it is referred to in the program.

2. Instead of a row of LET statements at the beginning of a program, store the variables with the program (not forgetting, of course, to GOTO instead of RUNning!).

3. Restricting the amount of screen being used at any time for output by the use of CLS will often prevent that annoying report 4, halfway through a run.

4. Surprisingly, the statement LET A=VAL '1' takes up three bytes less than LET A=1! This is because the ZX81, in order to speed up execution, writes every numerical constant twice; once in decimal and once in binary.

5. If a constant is used fairly often in a program, it may be worth assigning it to a variable. Quite a few of my programs begin with:
10 LET A=VAL '0'
20 LET B=VAL '1'

6. For those masochists who will do anything for a byte, it is possible to write a program leaving every numerical variable 0 and then POKEing the appropriate value into the binary. This is, however, not worth doing if you wish your program to be readable or if the number is less than five characters long.

Daran Gill

Europe's four leading computer magazines (Bit, Chip, Databus *and* Micro Systèmes) *have joined hands. Together they now introduce the first international microcomputer magazine for European traders:* Micro Digest.

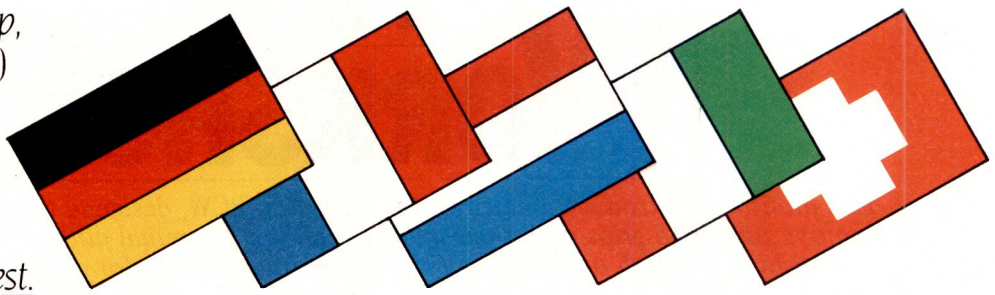

FINA

ALLY

The first European magazine about microcomputer trade, Micro Digest, will be published monthly in four languages: English, French, German and Italian.
It's the essential complement to your own national computer magazine: In Micro Digest you'll find everything a microcomputer trader needs to know.

Have a look at the contents and see for yourself: topical events of international importance, market research, interviews, the latest product information, editorial news . . .

Your advantage is obvious. Micro Digest gives you all the important information about microcomputer technology. There's no need any more to subscribe to different magazines from many countries. No need to have to translate from foreign languages.

From now on all you have to know about your trade is available in your own language. In Micro Digest.
The magazine that gives you a better insight in your own profession.



MICRO-digest
Monthly magazine for traders

MICRO DIGEST IS PUBLISHED BY THE EUROPEAN MICRO PUBLISHERS ASSOCIATION (EMPA).

Write for more information to:
Micro Digest, Kluwer Technische Tijdschriften, P.O. Box 23, 7400 GA Deventer, The Netherlands. Tel. 05700-91487.

TJ's WORKSHOP

UK101 SCREEN HANDLING

Here's a collection of very handy screen handling subroutines from Robin Freeman of Tilburg, Holland. They're designed for an 8k UK101. The routines allow you to clear the screen, using a section of code borrowed from the 'old' monitor; before you clear the screen, though, you may want to preserve its contents, so Robin has included a subroutine which does that. Naturally, as there's no point in saving stuff unless you can get it back again, Robin's routine does exactly that.

The routines are in a Basic program which you put onto the front of your program; your program then starts at line 1000 and the routines are used through GOSUBs, as follows:

Clear screen	GOSUB 200
Save screen	GOSUB 300
Restore screen	GOSUB 400

Here's Robin's listing:

```
  10 REM CLEAR SCREEN CODE
  20 POKE 133,63:POKE 134,31:POKE 8026,96
  30 FOR I=65036 TO 65061:J=PEEK(I)
     :POKE I-57036,J:NEXT
  35 REM
  40 REM MOVE SCREEN CODE
  50 READ D:IF D=999 THEN 1000
  60 POKE 7681+C,D
  70 C=C+1:GOTO 50
  75 REM
 100 DATA 169,0,133,225,133,227,168,169
 110 DATA 208,133,226,169,26,133,228
 120 DATA 177,225,145,227,200,192
 130 DATA 0,208,247,166,226,224,211
 140 DATA 240,8,232,134,226,230
 150 DATA 228,24,144,233,96,999
 155 REM
 190 REM CLEAR SCREEN SUBROUTINE
 200 POKE 11,64:POKE 12,31:X=USR(X):RETURN
 205 REM
 290 REM SAVE SCREEN SUBROUTINE
 300 POKE 11,1:POKE 12,30
 310 POKE 7708,211:POKE 7689,208
 320 POKE 7693,26:X=USR(X):RETURN
 325 REM
 390 REM RESTORE SCREEN SUBROUTINE
 400 POKE 11,1:POKE 12,30
 410 POKE 7708,29:POKE 7689,26
 420 POKE 7693,208:X=USR(X):RETURN
 425 REM
1000 REM MAIN PROGRAM STARTS HERE...
```

ZX80 TIPS

POKEing location 16421 with a value over 10 will prevent an error code being printed by the ZX80. This is desirable because the ZX80 will print an error code for the quite legitimate operation of a stop statement and the appearance of a strange number at the bottom of the screen will confuse the inexperienced user.

A radio tuned to long wave at around 200 kHz will play a tone when placed near the ZX80, but don't place it too near the television set. Thus, the ZX80 can be used to play tunes with simple programs.

Dominic Stocqueler

TRS-80 INVERSE VIDEO

Inverse video on the TRS-80 and probably most micros may be accomplished with minimum effort and expense. The following modification may be done in approximately one hour. You will need no more than a switch and some wire.

Carefully unscrew the bottom of your keyboard while noting the screw lengths and locations for reassembly. Remove the top cover. Lift the keyboard to separate it from the main board below. Take care not to twist the short length of ribbon cable that connects the two boards. Remove the small white cushions from the pegs that supported the keyboard, again noting their locations. Lift the lower main board and the keyboard out of the case. It is advisable that you have an extra pair of hands available for the next operation. Carefully separate the two boards and lay them flat so that the keyboard faces upward. Locate the DIN socket end of the main printed board, Z41 and Z24, the former being an eight pin chip, the latter a 16 pin. When you are satisfied that you have found the correct two chips, invert the two boards and try to pinpoint the soldered connections for both chips on the reverse side of the board. When you have located the correct ones, mark both areas with a felt pen.

Now stand facing the board with the power, video and tape sockets nearest to you. Z41 and Z24 should be on the left side of the board. Look closely at Z41 and compare the right middle two pins with the diagram. You should see that the two pins are soldered together and a track leads off away from you. If you are in any doubt about which pins you should be looking at, count clockwise from the bottom left-hand pin, pin one, until you reach pins six and seven, the two in question.

Check once more that you have the correct chip and then cut the track leading away from pins six and seven with a modelling knife. Now locate Z24 and cut the track leading away from the two pins four and five, as shown on the diagram. That's the difficult part over with.

The switch may be mounted anywhere on the cabinet, but if you have a very small switch handy you will find

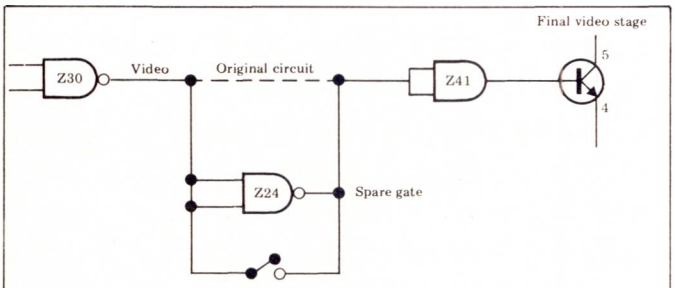

Fig 1 Logic diagram for TRS-80 reverse video mod.

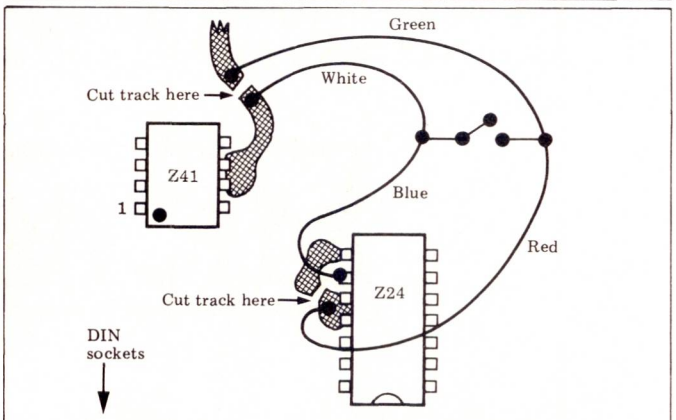

Fig 2 The modifications to the Tandy board. Note that this is a view of the underside.

TJ's WORKSHOP

room to mount it between two of the DIN sockets.

Now for the wiring. The ideal wire to use would be a four-cored screened cable, with the screening earthed to prevent pickup and hence patterning on the display. Whether you are using screened cable or not, wire as per the diagram. You will find it less confusing if you use wire of four different colours. If you have used screened cable then pin seven of Z24 will provide a suitable earth for your screen.

When you have finished, check again the diagram against your work and when you are satisfied that it is correct, reassemble and give it a try.

If you don't own a TRS-80, you might still be able to modify your machine for reverse video. Locate on the circuit diagram the video output stage. You will probably see leading into the circuit two signal lines. One of these lines should be labelled 'sync' and the other 'video'. It is the video line we are interested in. To invert the video to the screen all you need to do is to invert the signal at this position. There will probably be a spare NAND gate somewhere on your micro which you can use. Break the video line and wire your gate in series with the two open lines. To enable switching between normal and inverted video, simply connect your switch across the input and output terminals of the gate.

This modification works perfectly well on the Tandy monitors, but if you are using a standard television receiver, you may find that it suffers a loss of sync when displaying large areas of black.

Note: the ribbon cable joining the keyboard to the main printed board is of very poor quality and the copper track inside is easily broken. The symptoms of a break vary depending on which particular track is broken. If one is broken, you will probably find it impossible to make an entry via the keyboard as random characters will be printed on the screen when you press a key.

C Bolton-Heaton

CUSTOMISING NASCOM BASIC

Nascom's ROM Basic contains the non-standard reserved words POINT, SET and RESET. Since these are an addition to the 'standard' Microsoft Basic, they are accessed via reflections in the RAM workspace at 1051H, 1054H and 1057H respectively. It is therefore possible to substitute user-defined Basic commands at these reflections and to call them through a Basic program.

A good example is the use of SET+ and SET— to turn a parallel printer on and off. Below is a source listing of just such a program. The new SET routine (SETT) is activated by DOKE 4181,3500 (ie, replacing the Basic reflection of FF40H at 1055H with 0DACH, the address of SETT — chosen to be an easy decimal number!). Normal SET (X,Y) commands may be used without any special precautions and spaces between, for example, SET and '+' are disregarded by Basic. Obviously, any identifying symbol or symbols, other than '(', may be used to distinguish a user-defined command. The pointer to the next character in a Basic program is in HL. Hence HL must be incremented for each special SET character before returning to Basic. It is sufficient to terminate the user-defined command with RET in order to move onto the next statement of the program. This replaces the RET at the end of the Basic SET subroutine at FF4FH. This routine makes Nascom Basic even more flexible and useful.

Leslie Pettit

```
0DAC   7E          SETT:   LD      A,(HL)   ;Character immediately
                   ;                          after SET in Basic
                   ;                          program (spaces ignored)
0DAD   FEAC                CP      £AC      ;Is it '+'?
0DAF   CAnnNN              JP      Z,PRTON  ;Yes - turn printer on
0DB2   FEAD                CP      £AD      ;Is it '-'?
0DB4   CAmmMM              JP      Z,PRTOFF;Yes - turn printer off
                   ;
NNnn   E5          PRTON:  PUSH    HL       ;Save pointer
                   ;
                   ;  Insert routine here
                   ;
       E1                  POP     HL       ;Restore pointer
       23                  INC     HL       ; and increment it
       C9                  RET              ;Back to Basic for
                   ;                          next statement
                   ;
MMmm   E5          PRTOFF: PUSH    HL       ;Save pointer
                   ;
                   ;  Insert routine here
                   ;
       E1                  POP     HL       ;Restore pointer
       23                  INC     HL       ; and increment it
       C9                  RET              ;Back to Basic for
                   ;                          next statement
```

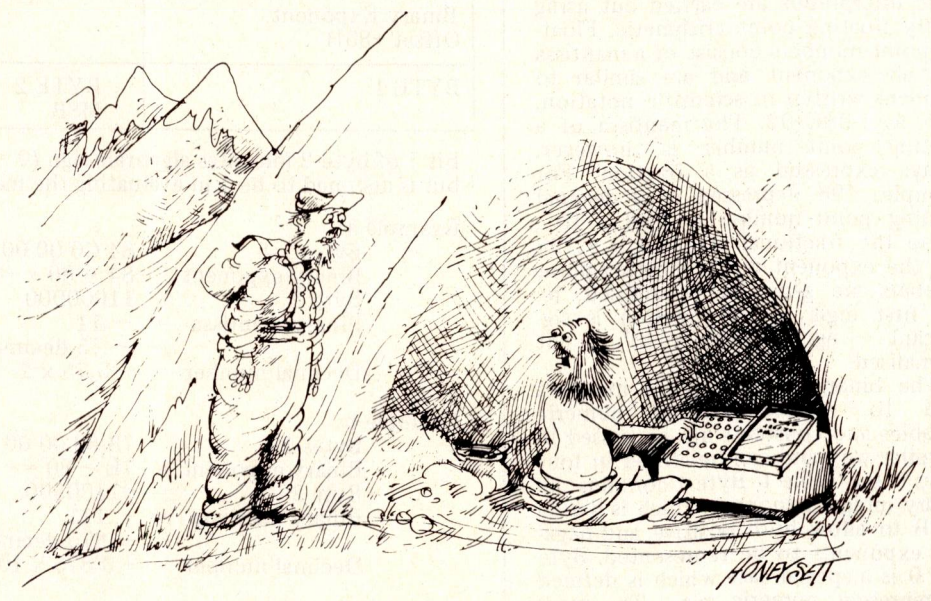

'I used to meditate for hours over a question, now I can do it in seconds'.

FASTER BASIC

Alastair Cairns and Maurice Shepherd show how to speed up your Basic programs by directly accessing the interpreter's subroutines.

Basic interpreters have the reputation of being very slow in comparison with the execution of specifically written machine code. In some respects this reputation is deserved; for example, PEEK and POKE statements appear to be executed very slowly by some interpreters. Obviously, the interpretative process is inherently slower than the direct execution of machine code but how much does a Basic interpreter slow down purely arithmetic computations in number-crunching applications? We shall look at some of the number handling aspects of Basic interpreters in this article, taking specific examples from the 8k Nascom Basic. This Basic interpreter is written in 8080 code and is fairly representative of many of the smaller Microsoft Basic interpreters currently in use. Directly accessing subroutines in the interpreter is one way to increase processing speed in some applications, as we shall show. Although this article is restricted to arithmetic applications, there is obviously considerable scope for increasing the speed of string handling operations using a similar approach.

Floating point numbers

The arithmetic operations in many Basic interpreters are carried out using binary floating point arithmetic. Floating point numbers consist of a mantissa and an exponent and are similar to numbers written in scientific notation, such as 1.98E+02. The mantissa of a floating point number is, however, always expressed as a fraction. For example, 198 expressed as a decimal floating point number is $.198 \times 10^3$, where the fractional mantissa is +.198 and the exponent is +3. Floating point numbers are generally normalised, ie, the first digit of the fraction is significant — eg, 0.00198×10^5 is not normalised.

The binary floating point numbers used to represent Basic numeric variables and constants are expressed in a similar way and can be stored in four bytes — see Table 1. Byte 1 contains the binary integer exponent which is biased +80H to allow both positive and negative exponents to be represented. Byte 1 = 0 is a special case which is defined to represent numeric zero. The most significant digit of the mantissa (bit 7 of byte 2) is always assumed to be 1 in evaluating the mantissa, ensuring that the floating point number is normalised; the actual value of this bit is used to indicate the algebraic sign of the number (0 = positive, 1 = negative). The four bytes can thus represent zero and signed decimal numbers in the range 0.5×2^{-127} to almost 2^{127} (ie, 2.9×10^{-39} to 1.7×10^{38}) with an accuracy of at least six significant decimal numbers. The examples shown in Table 1 illustrate the conversion of binary floating point to decimal.

In principle, floating point numbers can be added by equalising the exponents (making the necessary shifts in the mantissas) and then adding the mantissas. Multiplication involves multiplying the mantissas and adding the exponents. A little thought shows that these apparently simple operations require quite complex software and will have relatively long execution times, in comparison with integer addition and multiplication. There is also an inherent lack of precision in operations with floating point numbers which causes rounding errors. These two limitations of floating point arithmetic, speed and precision, can be minimised by good software — generally by trading one off against another — but they cannot be eliminated.

Arithmetic subroutines

The Basic interpreter contains the necessary subroutines to perform addition, subtraction, multiplication, division and the evaluation of various functions using floating point arithmetic. These subroutines are called whenever the interpreter encounters a byte corresponding to +, —, SIN, LOG, etc, in the stored program. Without resorting to detective work on disassembled listings, there is usually no direct means of finding the call addresses of these subroutines.

The Nascom interpreter uses four bytes in RAM (10E4H — 10E7H) as a floating point accumulator (FPA) and also makes use of the two Z80 16-bit registers BC and DE to hold floating point numbers. Table 2 shows the format of FPN in these two pseudo 32-bit registers. Note that, following Z80 convention, the four bytes are stored in reverse order in memory.

The call addresses of the subroutines for addition, subtraction, multiplication and division of the contents of these two registers are:

F5CDH	BCDE + FPA
F5CAH	BCDE — FPA
F708H	BCDE * FPA
F769H	BCDE / FPA

The results are returned in the FPA. The call addresses of other subroutines are given below; in each of these cases the argument is entered in the FPA and the result is returned in the FPA.

ABS	F838H
ATN	FC7CH
COS	FC00H
EXP	FAFAH
INT	F8E6H
LOG	F6C7H
SIN	FC06H
SQR	FAACH
TAN	FC67H

There are also interpreter subroutines for conversion between FPN and 16-bit complementary two's binary integers. A subroutine call to E98BH returns the integer value of the FPA in the DE register pair — the FPN must be in range or an error is flagged. The converse may

Binary Exponent. Offset +80H	24 bit Binary Mantissa		
BYTE 1	BYTE 2 MSB	BYTE 3	BYTE 4 LSB

Bit 7 of byte 2 indicates algebraic sign (0 = +, 1 = —) but is assumed to be 1 in evaluating the mantissa.

Example a:

Bytes 1-4		84 C0 00 00	
Binary exponent	=	84 — 80 = +4	
Byte 2	=	11000000	ie Negative sign
Binary mantissa	=	— .11	
	=	— .75 decimal	
Decimal number	=	— 0.75 x 2 =	— 12.0 decimal.

Example b:

Bytes 1-4		78 60 00 00	
Binary exponent	=	7E — 80 = — 2	
Byte 2	=	01100000	ie Positive sign
Binary mantissa	=	+ .111	
	=	+ .875 decimal	
Decimal number	=	+ 0.875 x 10 =	+ 0.21875 decimal.

Table 1 Binary floating point numbers

be achieved, in a rather more complicated way, by zeroing the A register, loading 98H into the B register and calling F82AH; the complementary two's number initially in DE is returned as a floating point number in the FPA.

The conversions between ASCII coded decimal and FPN are discussed after the section on variable and array tables.

How fast?

The execution times, T(sub), of some of these subroutines are given in Table 3 and exclude the slight looping overheads involved in making the measurements. The execution times of the add, subtract, multiply and divide subroutines are very dependent on the relationship between the numbers in the FPA and BCDE registers. For example, special cases arise if one of the numbers is zero or if the exponents are very different; multiplication by zero is much more rapid than the example given in Table 4. These subroutine execution times may be compared with the times required for the same operations within a Basic program, T(Basic). The values of T(Basic) were determined using the program,

A=9.2:FOR N=1 TO 5000
B= (relevant function) : NEXT : END

and include the time required (0.98ms) for the FOR. . . NEXT loop. It is worth noting that this is an optimised Basic program in the sense that the interpreter does not have to search a large variable table. In a long Basic program, the corresponding times could be significantly higher, especially if array elements have to be accessed.

The ratios t(Basic)/t(sub) give a useful indication of the Basic interpreter overheads in carrying out these operations and are independent of the microprocessor clock rate. In the evaluation of square roots and the transcendental and trigonometric functions, the interpreter overhead is relatively small since these routines have relatively long execution times. There would therefore be no real advantage in directly calling these subroutines.

The ratios for add, subtract, multiply and divide do, however, indicate that significant decreases in processing time could be achieved by calling these subroutines directly. This, of course, is because these subroutines have relatively short execution times in comparison with the corresponding interpreter overheads. It can also be seen from Table 3 that SQR and TAN have particularly long execution times and the run time of a Basic program can obviously be optimised by omitting such functions whenever possible.

F P Number	Byte 1	Byte 2	Byte 3	Byte 4
	< LSB	— Mantissa —	MSB >	< Exponent >
FPA	10E4	10E5	10E6	10E7
Register	E	D	C	B

Table 2 The storage of floating point numbers in the floating point accumulator and the registers BC and DE.

SUBROUTINE	T (sub)	T (Basic)	T (Basic)/T (sub)
ADD	0.21	2.85	13.6
SUBTRACT	0.23	2.86	12.4
MULTIPLY	1.11	3.75	3.38
DIVIDE	2.40	5.03	2.10
(The above figures refer to A+A, A—A, A*A and A/A)			
LOG	10.9	13.3	1.22
SIN	14.0	16.3	1.16
COS	14.5	16.7	1.15
EXP	15.4	17.8	1.16
ATN	18.9	21.3	1.13
SQR	28.3	30.5	1.08
TAN	31.2	33.2	1.06
4 MHz Z80 clock with wait states added.			

Table 3 Execution times of Nascom Basic subroutines.

Variable table format. For example, the variable AB = 12.75 is stored as:

	BYTE 1	BYTE 2	BYTE 3	BYTE 4	BYTE 5	BYTE 6
	Variable name		Mantissa LSB - - - - - - - MSB			Offset exponent
Hex	42	41	00	00	4C	84
	< ASCII >		< FLOATING POINT >			

Array table format. For example, the array AR(1,2,3) is stored as:

	BYTE 1	BYTE 2	BYTE 3	BYTE 4	BYTE 5
	Array name		Displacement to next array		Number of dimensions
Hex	52	41	67	00	03

This is followed by 04 00 03 00 02 00, the numbers of elements in each dimension (in reverse order), and then by 24 floating point numbers giving the array element values (see Table 5) starting with AR(0,0,0)

Table 4

Variable and array tables

The Nascom interpreter stores the values of numeric variables and arrays in two contiguous tables in RAM and maintains pointers to (i) the start of the variable table (10D6H), (ii) the start of the array table (10D8H) and (iii) the end of the array table (10DAH). Each numeric variable occupies six bytes (Table 4) — the first two bytes contain the two initial characters of the variable name (in ASCII) and the following four bytes the value in floating point.

The format of the array table is rather more complicated. Two bytes are used for the array name and the two following bytes give the displacement to the next array or to the end of the array table if no further arrays exist in the table. This is followed by a byte giving the number of dimensions of the array, say N, and then 2N bytes indicating the number of elements (including the zeroth element) in each dimension, as 16-bit integers. This is shown in Table 4 for the array AR(1,2,3), which occupies 107 bytes of RAM. The elements of the array are stored in a logical sequence which is illustrated for AR(1,2,3) in Table 5. A DIM statement sets up the relevant entry in the array table and initialises all the array elements to zero.

Every time that the interpreter encounters a variable in the program it searches the variable table to find the value using a subroutine which we shall call FIND. If the variable is being declared for the first time and therefore is not already in the variable table, a new entry is made; this involves shifting the entire array table six bytes higher in memory to make space.

The interpreter can therefore spend a considerable time searching tables; this can be minimised by ensuring that commonly used variables are declared early in a Basic program so that they are located near the beginning of the table.

Finding variables

The variable/array search subroutine, FIND, is called at EF2D. Its use can

DESK TOP COMPUTING

A COMPREHENSIVE GUIDE TO SUCCESSFUL BUSINESS AND PROFESSIONAL MICROCOMPUTING

We live in an age of cheap computing power. For the first time the cost of a computer is within the reach of the small businessman, the professional person or the private citizen. And in the present economic climate the pressure is on to increase productivity and efficiency using these electronic aids.



Also included are several case studies covering the installation of desk top computers in small businesses and for professional use together with a comprehensive listing of virtually every hardware and software system currently available in the UK.

But will your desk top computer be a boon or a curse? Will it increase your profits or disrupt your workplace? Will you be misled by salesmen's patter, baffled by programmers' jargon and find yourself the unhappy owner of a totally unsuitable system?

Success in computer installation depends on taking a logical approach to your task — the *Systems Approach*; the side of the microcomputing revolution they didn't tell you about. This book, from the publishers of PERSONAL COMPUTER WORLD, Britain's largest-selling micro magazine, tells you.

Lyn Antill explains, in language plain enough for the most non-technical user, the secrets of Systems Analysis, the key to obtaining the computer system you need. Step by step, this book tells you how to:-

- Define exactly what tasks you wish your computer to undertake.
- Interpret those tasks in a way the computer can handle.
- Choose the right machine for present and future needs.
- Buy off-the-peg software.
- Hire and supervise a programmer when necessary.
- Write program specifications tailored to *your* staff and working methods.
- Test programs and introduce them into your business smoothly with minimal disruption.
- Maintain and modify programs.

AVAILABLE NOW PRICE £1·95 FROM YOUR PCW NEWSAGENTS, THE PCW BACK ISSUES CENTRE OR BY MAIL ORDER (SEE PAGE 167).

Personal Computer World SPECIAL ISSUE

FASTER BASIC

best be illustrated by an example which would normally form part of a USR-called subroutine.

```
START:   LD HL, STRING   ; HL points to
         CALL FIND       ; variable name
         RET
STRING:  DEFB AB         ; variable name
```

Assume that one requires the value of the variable AB or, if it is not in the variable table, to make an entry for it. The HL register pair is loaded with a pointer to memory location where an ASCII string of the variable name is stored. This string is terminated with, for example, a colon. The subroutine FIND will return with DE pointing to the least significant byte of the value. If AB was not already in the variable table, then an entry will have been made and the value set to zero. The array table may be searched in a similar way but the ASCII string (eg, AR(1,1,1):) must specify the array element required and the array must have been previously dimensioned. The interpreter has to call FIND every time that it encounters a variable even though the location of that variable remains fixed throughout the execution of a particular program. Similarly, provided that all the variables have been declared, the array entries remain in fixed locations. Obviously a more intelligent use could be made of FIND from a USR added subroutine, ie, by calling FIND once to locate a numeric variable or array and then storing the relevant pointer for further use.

Direct access

We now have the necessary information to access certain Basic subroutines directly rather than through the interpreter. The only good reason for doing this is to increase speed since it involves writing additional machine code routines. The most effective way to do it is via USR routines from a Basic program. This gives a hybrid system in which one retains the capability of the interpreter but can accelerate specific sections of the program.

Provided that the variables that will be used in the USR routines have been previously declared in the main Basic program, their values are available in the tables in floating point. Their locations may be obtained using FIND and direct arithmetic operations carried out on them in the USR routine by calling the relevant Basic subroutines. On returning to Basic the new values may be obtained in decimal by PRINTing. The decimal to floating point conversions are thus left to the interpreter.

The class of programs which benefit most from this approach are those involving a large number of simple arithmetic calculations, preferably on relatively few variables. Matrix manipulations are a particularly good example. The speed of matrix multiplication can be increased by more than a factor of 10 over that of a pure Basic program by directly calling Basic subroutines. This has obvious applications in graphics, for example. Another area where increased speed is useful is that of Fast Fourier transformations.

An order of magnitude increase in speed can therefore justify the extra effort of writing specific USR routines in a large number of applications. The other software approach of starting from scratch in assembler language would certainly involve a great deal more work and it is unlikely that the final result would be appreciably faster than that obtainable using the hybrid method.

1.	0, 0, 0
2.	1, 0, 0
3.	0, 1, 0
4.	1, 1, 0
5.	0, 2, 0
6.	1, 2, 0
7.	0, 0, 1
8.	1, 0, 1
9.	0, 1, 1
23.	0, 2, 3
24.	1, 2, 3

Table 5 The ordering of array elements in memory, in this case the array AR(1,2,3).

PROTECT YOUR SOFTWARE INVESTMENT

APPLE®
COPY II PLUS – can copy the "uncopyable"

With the Copy II Plus it is possible to make back-up copies of most currently available diskettes – including many supposed to be "protected" against copying.

RELAX
With the Apple Copy II Plus in your top drawer you can stop worrying about accidental damage to your valuable diskettes. The Copy II Plus allows you to make back-up copies for normal use, so you can keep your originals safely locked away – away from the dangers of spills or stray magnetic fields, or just the wear and tear of everyday usage.

FAST
The Copy II Plus requires a 48K Apple II with at least one disk drive and DOS 3.3 (DOS 3.2 can also be supplied). The Copy II Plus will copy nearly any diskette in less than one minute and is suitable for BASIC, PASCAL, FORTRAN and most "protected" diskettes.

PAYS FOR ITSELF
Many software suppliers offer replacement of damaged disks – but many don't. With the Copy II Plus you can avoid the problems and time lost in sending disks back.

IDEAL FOR NEW USERS
The Apple Copy II Plus is ideal for offices, colleges and schools and other places where inexperienced users have access to valuable software. Why watch your expensive programmes deteriorate when they could be safely locked away?

HOW TO GET YOUR COPY II PLUS
Send £39.99 (which includes VAT) to:–
Apple Orchard, 7a Church Lane, Loughton, Milton Keynes MK8 0AS.
or: Phone 0908 53595 and quote your Access or Diners Club card to our 24-hour answerphone.
Please allow 21-28 days for delivery – or tell us to rush if that's too long.

apple orchard

Apple is a registered trade mark of Apple Computer Inc.
Apple Orchard is a registered business name of Flintdata Ltd.
Copyright Flintdata Ltd. 1981

Commodore VIC–20

A fully-fledged, fully expandible, computer with large typewriter-style keyboard, programmable function keys, PET compatible. Gives 24 colours and sound, (to the degree that it can be used to compose music). High resolution graphics module available as extra. Speaks BASIC. Easy-to-use, even for beginners. New VIC–20 material is available and more is on the way. Supplied with easy-to-read, easy-to-use manual, suitable for beginners and children. Programs can be stored on optional VIC tape recorder. **Commodore approved supplier.**

Texas Instruments TI–99/4

(PAL colour TV compatible)

Usable literally within minutes of unpacking. Anyone can use it without previous computer experience or programming knowledge. Powerful 16K. BASIC language. Special features: high resolution graphics let you create animated displays, charts, graphs; built-in music synthesizer allows you to build notes and chords; equation calculator for maths solutions. Designed for home management, educational and entertainment use. Large amount of educational software available on modules for youngsters. Programs can also be stored using good quality tape recorder. **Texas Instruments approved supplier.**

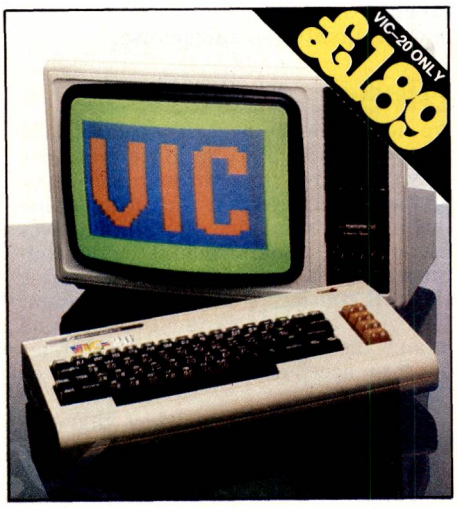

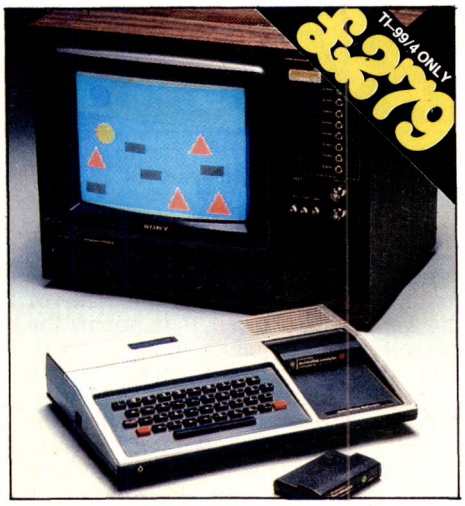

Trust the unique Computer Supermarket to be first with the unique new personal computers.

Four new-technology computers bring you colour, sound, high resolution graphics. All with plug-in program modules. All at unique Computer Supermarket prices.

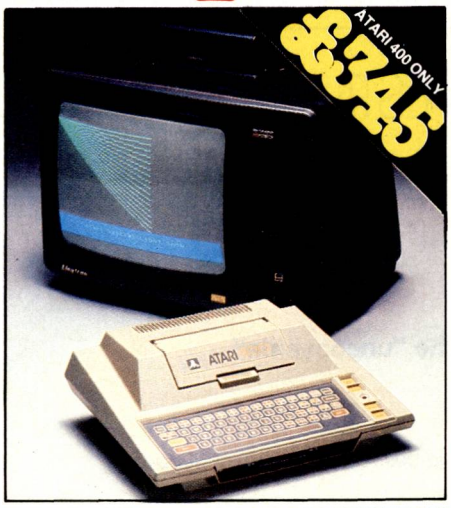

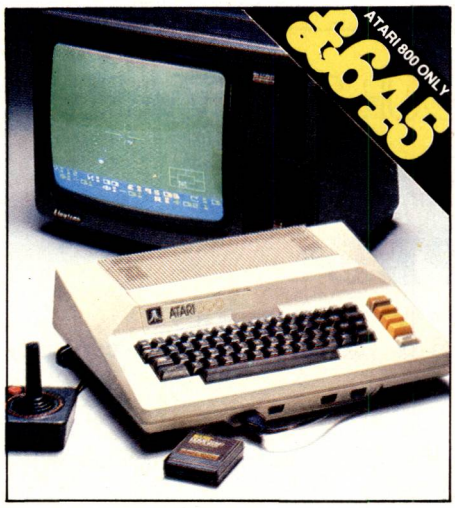

Atari 400

Brings the family music, art, education, entertainment. A general purpose personal computer that's easy to operate and offers 16 colours, each with 8 intensities; high resolution graphics; 4 sound synthesizers; 57 key alphanumeric keyboard with upper/lower case, inverse video, full screen editing, four-way cursor control, 29 graphics keys. Programming languages: BASIC, ASSEMBLER, PILOT. Programs can be stored on optional Atari tape recorder. **Atari approved supplier.**

Atari 800

Top-of-the-line personal computer. Advanced peripheral components, comprehensive software library. Modular design precludes obsolescence. 16 colours (8 intensities), 4 sound synthesizers; 57 keys with upper/lower case, inverse video, full screen editing, four-way cursor control, 29 graphics keys. Programming languages: BASIC, EXTENDED BASIC, ASSEMBLER, PILOT, PASCAL. Programs can be stored on optional Atari tape recorder. **Atari approved supplier.**

THESE EXCITING NEW PERSONAL COMPUTERS CONNECT TO VIRTUALLY ANY COLOUR OR MONO TV. Full range of peripherals will be available for each computer. All units are complete and ready to use. 13 amp plug fitted. Thorn colour TV's can be supplied for use with these computers. Details on application.

Prices include VAT. P&p & insurance £3.50

Your remittance should be made payable to 'Computer Supermarket Ltd', and shall remain your money until the goods have been despatched to you at the address specified. All goods offered are subject to Computer Supermarket conditions of sale, copies available on request. Registered in England No. 2646589.

PRESTEL SERVICE Prestel subscribers can obtain further details on these computers – and place orders for them – through the Prestel service. **PRESTEL No. 400400**

To Computer Supermarket Ltd, Douglas House, Queens Square, Corby, Northants.

Please send me

- ☐ Commodore VIC–20 at £192.50
- ☐ Texas Instruments TI–99/4 at £282.50
- ☐ Atari 400 at £348.50
- ☐ Atari 800 at £648.50
- ☐ Hardware/Software list
- ☐ Atari tape recorder at £45 inc. VAT, p&p
- ☐ VIC tape recorder at £40 inc. VAT, p&p

I enclose my cheque for £

Or debit my Access/Barclaycard/Diners Card No.

(Cardholders may telephone orders to 05366 61587/8)

Signature_____

Name _____

Address _____

_____

_____ (BLOCK CAPITALS PLEASE) **PCW10**

COMPUTER SUPERMARKET

COMPUTER SUPERMARKET LTD, DOUGLAS HOUSE, QUEENS SQUARE, CORBY, NORTHANTS. TELEPHONE 05366 61587/8 AND 62571



CHOOSE ATOM POWER

At work or play – everything you need in a personal computer

The Atom is a machine to be used. Every day, day after day. It's a full function machine – check the specification against others. It's rugged, easy to operate built to last and features a full-size typewriter keyboard.

Just look at some of the features!

● More hardware support than any other microcomputer ● Superfast BASIC – can be updated to BBC BASIC if required ● High resolution and comprehensive graphics ideal for games programmers and players* ● Integral printer connection* ● Software available for games, education, maths, graphs, business, word processing, etc. ● Other languages: Pascal, FORTH, LISP ● I/O port for control of external devices ● Built-in loudspeaker ● Cassette interface ● Full service/repair facility ● Users club

* Expanded version only

Optional Extras

● Network facility with Econet ● Disk ● PAL UHF colour encoder ● Add-on cards include 32K memory, analogue to digital, viewdata VDU, disk controller, daisywheel printer, plus many, many more! ● Power supply

FREE MANUAL

The Atom's highly acclaimed manual comes free with every Atom and leaves nothing out. In just a while you'll be completely at ease with your new machine! Within hours you'll be writing your own programs.



YOU AND YOUR CHILDREN

More and more schools are buying Atoms. More and more children will learn on an Atom. You can give them that extra familiarity with an Atom in the home.

ACORN COMPUTER 4a Market Hill, CAMBRIDGE CB2 3NJ

When you order your Atom we will include full details of all software packs and the optional hardware.

To: Acorn Computer Limited, 4A Market Hill, Cambridge CB2 3NJ.

I enclose a cheque/postal order for £.....

Please debit my Access/

Barclaycard No .....

Signature .....

Name (please print).....

Address .....

.....

Telephone Number .....

Registered No. 1403810 VAT No. 215 400 220

Quantity	Item	Item price inc. VAT + P&P	Totals
	Atom Kit 8K ROM + 2K RAM	@ £140.00	
	Atom Assembled 8K ROM + 2K RAM	@ £174.50	
	Atom Assembled 12K ROM + 12K RAM	@ £289.50	
	Power Supply	@ £ 10.20	
		TOTAL	

Dealers or Mail Order

Computer stores are stocking Atoms – there's a list below, but if you have any problems getting hold of one just fill in the coupon and we'll rush one to you within 28 days. If the machine isn't all you expected, or all we've told you, just return it within 14 days for a full refund.

MOM, Aberdeen 22863. Broadway Electronics, Bedford. Owl Computers, Bishops Stortford, 52682. Eltec Services, Bradford 491371. Gamer, Brighton 698424. Electronic Information Systems, Bristol 774564. Cambridge Comp Store, Cambridge 65334. Cardiff Micros, Cardiff 373072. Emprise, Colchester 865926. Silicon Centre, Edinburgh 332 5277. Esco Computing, Glasgow 204 1811. Control Universal, Harlow 31604. Unitron Electronics, Haslington. Castle Electronics, Hastings 437875. Currys Micro Systems, High Wycombe. Microdigital, Liverpool 236 0707. Barrie Electronics, London 488 3316. Off Records, SW12. Technomatic, NW10 452 1500. H.C.C.S., Low Fell 821924. NSC Comp Shops, Manchester 832 2269. Compshop, New Barnet 441 2922. Newbear Comp Store, Newbury 30505. Newcastle Comp Services, Newcastle 615325. Anglia Comp Store, Norwich 29652. Leasalink Viewdata, Nottingham 396976. Customized Elect, Redcar 481460. Computers for All, Romford 751906. Intelligent Artefacts, Royston, Arrington 689. Quadraphenia, Sheffield 77824. Q-TEK Systems, Stevenage 65385. 3D Computers, Surbiton (01) 337 4317. Computer Supplies, Swansea 290047. Abacus Micro Comp, Tonbridge, Paddock Wood 3861. Northern Comp, Warrington 601683.

THE REAL CHALLENGE OF THE CHIP

Jeff Taylor is a researcher currently studying micro awareness and computer literacy projects in Britain and the USA. He spent this summer travelling across the States visiting the various projects there and comparing them to UK efforts. In this, the first of these reports, he gives an overview of computer literacy; the views he expresses are his own and are not necessarily those of PCW. *We would welcome responses from readers, but advise that you read all three of his articles first.*

In its revolutionary potential for changing society, microtechnology has been likened to a multitude of fundamental technologies throughout history, from the harnessing of fire to the electric motor. Two models in particular are useful to bring into sharp focus the confliction potentials of this new technology: the development of writing and the printing press. Writing can be shown to have led to the development of a stratified society, in which those who controlled the written word could, for example, record history to their own advantage; the printing press eventually instigated a democratising influence. Significant concern with both the negative and positive social implications of microtechnology scarcely exists in the United States, whereas Britain has at least begun to realise the crucial need for an informed public that can direct, rather than be merely persuaded to accept, the impact of this and other new technologies.

In Britain, the simple-but-classic 'Computer Revolution' has diversified into the 'Microcomputer Revolution', the 'Second Industrial Revolution', the 'New Industrial Revolution', the 'Microelectronics Revolution', the 'Information Revolution', the 'Microrevolution', etc. It has been said that Britain's only growth industry is talking about the chip and the rate at which names are added to this list is matched in spirit only by the changes in social conditions with which it interfaces so provocatively: the demise of traditional industry and the sharp rise in unemployment. Hence the keen attention paid to it by practically all sectors in Britain, who see microtechnology as a crucial variable in projecting the future course of society.

The media and the micro

Popular British awareness of the microrevolution has been fed by, and in turn spawned, a plethora of media response, of which the supermarket bestseller, Chris Evans' *The Mighty Micro* (known in the US as *The Micro Millenium)*, is but the soft tip of the microberg. The level of current public receptiveness to the airing of micro-social issues in Britain was optimistically gauged by ITV when it ran a prime-time six-part series based on 'The Mighty Micro', narrated by the late Dr Evans. Poor ratings for its first showing indicate that the mass audience was not yet a viable market. Yet, that commercial broadcasting took the early risk is a valuable indicator. Its judgement was based on the phenomenal success of the early 1978 BBC2 documentary 'Now the Chips are Down' which provoked a mass doubletake by shouting bold and problematic questions concerning automation, unemployment and government apathy. The program startled then-Prime Minister James Callaghan to announce overnight a £500 million microelectronics development program for the UK. Indeed, it shocked me into resigning as primary school teacher in bucolic Derbyshire in favour of full-time London-based research into the educational and social implications of microtechnology.

Since 'Now the Chips are Down' and *The Mighty Micro*, the debate has been enriched by a host of books, articles, television and radio programs, conferences, etc. Even computing journals have widened their scope to participate in the dialogue over the social implications of microtechnology. Concerning school micro-education, Margaret Thatcher's government has echoed, albeit belatedly, Callaghan's early response by committing funds to develop a national network of regional centres for software development and exchange, and for in-service teacher training, the 'Microelectronics Development Programme for Schools and Colleges' (consultative paper, DES, 1979). There is also a new commitment to subsidise the purchase of British microcomputers for secondary schools, the micro-related areas being the only exceptions to the general government policy of drastic cuts in educational spending. Concerning out-of-school education, the BBC is hastily assembling its computing skills television course, set now to be aired starting January 1982, licensing the British computing firm Acorn to produce the BBC computers that will receive software via teletext, for home and school-based study. The Science Museum in London has decided to extend indefinitely its exhibit 'The Challenge of the Chip', which attempts to lead the visitor on from the nature of silicon through to applications in sewing machines, missiles, etc. Although the presentation is Department of Industry sponsored, and therefore neglects mention of negative social implications, it at least represents free public access to an understanding of the technology and the potential ubiquity of its applications. Finally, initiatives such as the Nottingdale Technology Project in Hammersmith, and the far-sighted efforts of Robin Bradbeer working through the North London Computer Club, are beginning to provide access to computing to a wide range of people.

'Awareness' and 'Literacy' – The choice

The British government choice of emphasis on the more potentially pervasive 'microelectronics' rather than on 'computers' is reflected in the two early discussion documents issued by the Department of Education and Science in which the past and present governments announce the Microelectronics Development Programme for Schools and Colleges, mentioned above. Throughout these documents the word 'computer' does not appear, an omission more than just semantic. It is indicative of the government's sudden awakening to microtechnology and, in fact, the original document must be seen as a hasty and self-conscious response to the tremendous jolt given by the airing of 'Now the Chips are

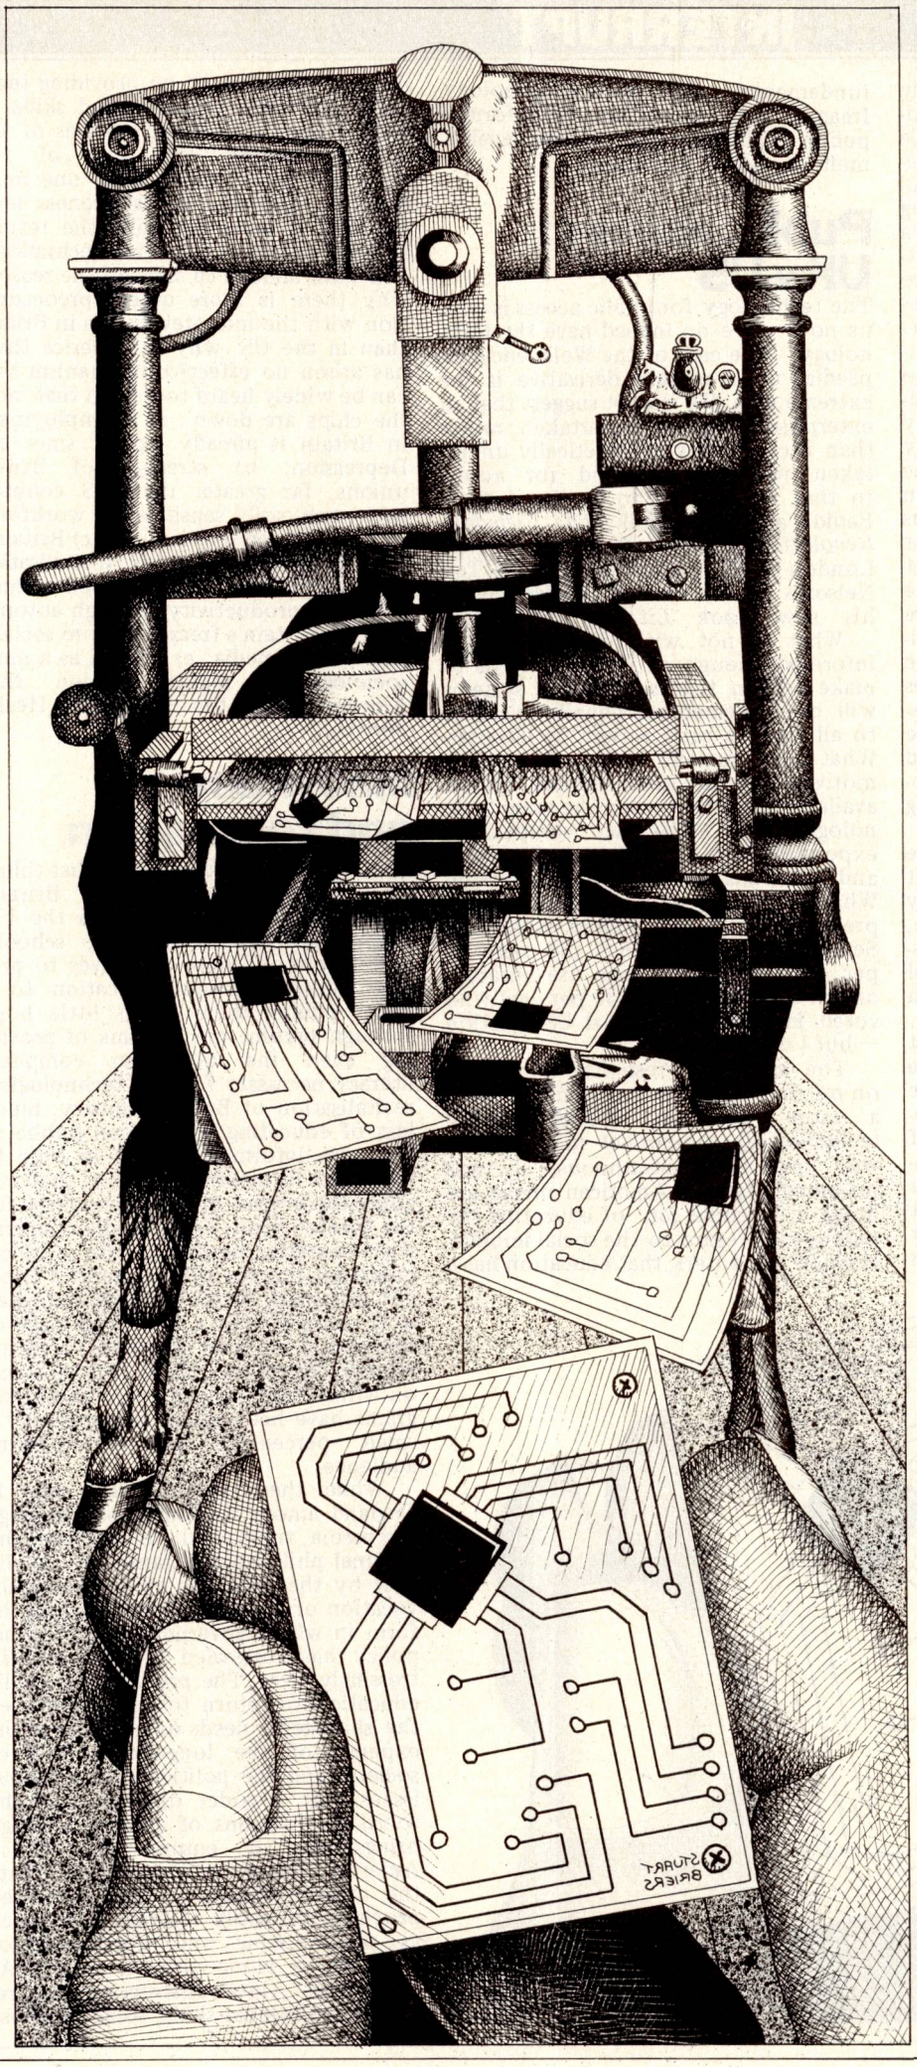

Down'. In that document was included the statement: 'Education, together with training, has a major part to play in producing the skills and qualifications to enable the new technology to be exploited to best advantage; and in preparing society for its full consequences.' Clearly, that government was hedging its bets, vaguely directing education to meet the wide range of needs that the microrevolution *might* imply for society. Note, however, the bureaucratic Catch-22 planted within this document by the Labour government, whereby funds were to be made available to prepare society for the 'full consequences' of the microrevolution, yet it is specifically stated that *no funds* were to be made available by the DES *to research just what these consequences might be.*

In America, sponsorship efficiently blocks mass media from ever being so impudent and informative as to awaken government and populace to the imminent arrival of one of mankind's most fundamental and problematic techno-social revolutions; the 'microelectronics' emphasis has, therefore, never arisen. Instead, here we are experiencing a tidy flip-flop from a stress on the need for 'computer awareness', an early 70s pre-micro concept liberally sprinkled with a social awareness that has gone out of fashion, to a mechanistic and easily-measured 'computer literacy', completing yet another patch in the back-to-basics educational security blanket. (Of the two major opposing views of computer literacy in the US, MECC — the Minnesota Educational Computing Consortium — supports the 'softer' 'computer awareness' approach, fast being superceded by the 'hard' functional approach, supported most notably by Arthur Luehrmann, formely of Lawrence Hall of Science, now heading his own computer literacy firm.)

Media coverage of micro-related subjects in the US is usually confined to non-mass audience networks and geared to cultivating computer consumers rather than informed citizens. When social implications are raised, they are whitewashed with dainty and superficial optimism. These programs are invariably sponsored by major computing companies whose multinational futures depend on spreading just enough carefully diluted computer awareness to ensure ever-expanding markets for their products. It's not merely the familiar reluctance to associate one's name with controversial subject matter that could prove remotely offensive to anyone, it's also the danger that an informed public might be more selective in its applications of new technology than a company's sales projections would allow. It's rather like expecting a producer of mouthwash to sponsor a documentary that attempts to prove that not only is mouthwash ineffective, but that it might cause cancer. Americans spent $300 million on mouthwash last year. They are projected to spend $2 billion on computers in the next five years (*Computer Business News*, 17 Nov 1980).

At a recent US national conference on microcomputers and education, I had the opportunity to voice my dismay before the assemblage of speakers

at their support for a hasty and largely unquestioned transition from the provision of a more socially responsible computer awareness to a largely functional computer literacy in public education, which invariably means learning to program in Basic — programming, a skill which may well soon be automated, and Basic, a language whose future is even more dubious. My argument was and is that *the* major and most immediate social implication of microtechnology is the crucial need for people to be made aware of the remaining potential social implications so that they may be motivated to become quickly informed about how to *direct* the impact of this technology rather than being pacified into accepting decisions taken by the few. Just as a dictator might decide that his country is not yet ready for democratic elections, that the people are not literate and are therefore uninformed and ineligible to make decisions to take control of their collective future, so, as our society becomes ever more closely dependent on increasingly complex technologies, the public is deemed technologically illiterate and ineligible to control its own technological, and therefore social future, leaving decisions by default to the few.

This initial awareness should not be merely concerned with computers, but with the conglomeration of technology that microtechnology makes possible, interfacing computers and robot systems, with their fast-growing artificial intelligence, with telecommunications in general — an awareness of *la telematique*. as the French call it. This is the first important step towards creating the vigilant citizenry essential to direct the impact of this and other new technologies. Through microtechnology itself comes the potential for providing unprecedented access for all people, at their own entry level, to information not just about it, but about other new impending technologies perhaps just as fundamental, such as biotechnology. Imagine what an impact an informed public might have had on the development of nuclear technology.

Public access: UK v US

The technology for public access is with us now — we do indeed have the technology: 'The case of the Wells encyclopaedial or a modern derivative is the extreme case. We do not suggest that an enterprise *should* be undertaken, rather than it *could* now be practically undertaken were the demand for access to that information to be there' (Sam Fedida and Max Malik, *The Viewdata Revolution*, Associated Business Press, London 1980, pp 167-8; see also Ted Nelson's Xanadu Project, as described in his new book *Literacy Machines*).

What is not with us is a public informed enough of its own needs to make certain that such access systems will be implemented, equally available to all, and as basic a right as libraries. What is as crucially lacking is a public motivated to *use* such systems, even if available, especially when the same technology will offer as competition exponentially more titillating diversions and dilutions via the same medium. What percentage of US TV viewers at present watch the Public Broadcast Service? Far smaller than the mere 50 per cent of citizens who use libraries, or the equally pathetic 50 per cent who voted in the last national US election — but I digress.

The assembled response of experts on micros and education to my plea for a more, not less, interdisciplinary technological component in education was ironically montonous. I was informed that the American media are doing a 'splendid job' of educating the public with regard to the social implications of computers, that education has a duty to concentrate on providing technical and employment-related skills. If that is their considered analysis of the present quality and role of the American mass media, then one must question seriously the awareness level of these experts regarding the revolutionary potential of microtechnology.

I have alluded to some of the reasons why there is more urgent preoccupation with the microrevolution in Britain than in the US, why in America there has arisen no effective mechanism that can be widely heard to inform that 'now the chips are down': a) unemployment in Britain is already highest since the Depression; b) strength of British unions, far greater than US counterparts, can easily sensitise the workforce to work-related implications; c) Britain's dire need for economic revitalisation through the exploitation of new technology, for productivity through automation; d) Britain's freer and more socially responsible media; e) Britain as a more sociologically mature nation than America, eg, the National Health Service.

Innovation and regression

Yet, it would be false to say that things are really much better in Britain. Despite the media assault in the UK despite government input to schools, despite out-of-school initiatives to provide microelectronics education to a wider public, there seems little hope through present mechanisms of providing even the utilitarian computer literacy necessary for new technological revitalisation of British industry, much less of educating the general public so they are informed enough in time to take part in making decisions that will guide the impact of this technology for the greater good. Only media concerns with educating beyond a more technical computer literacy offer a spark of hope, yet this spark seems small indeed when it is realised what a tiny percentage of the public are ever exposed to media science education. BBC2, for instance, on which most serious micro-based programs have been aired, captures only a small percentage of the viewing audience.

While these debates still rage in England among academics and through the media, traditional v progressive educational philosophies translated broadly now by the extremes of education for vocation or for permanent vacation, the form in which government educational policy has congealed has become distressingly clear. The pressures on public education to return to basics and heed the short-term needs of industry at the expense of the long-term needs of society, and the politically contentious issues that a wider discussion of the social implications of microtechnology brings with it, ensures that, as in America, British education will dilute the microrevolution to the attempted provision of easily testable skills, such as programming and microprocessor applications, along with the use of CAI (Computer Aided Instruction) to reinforce traditional skills, some of whose

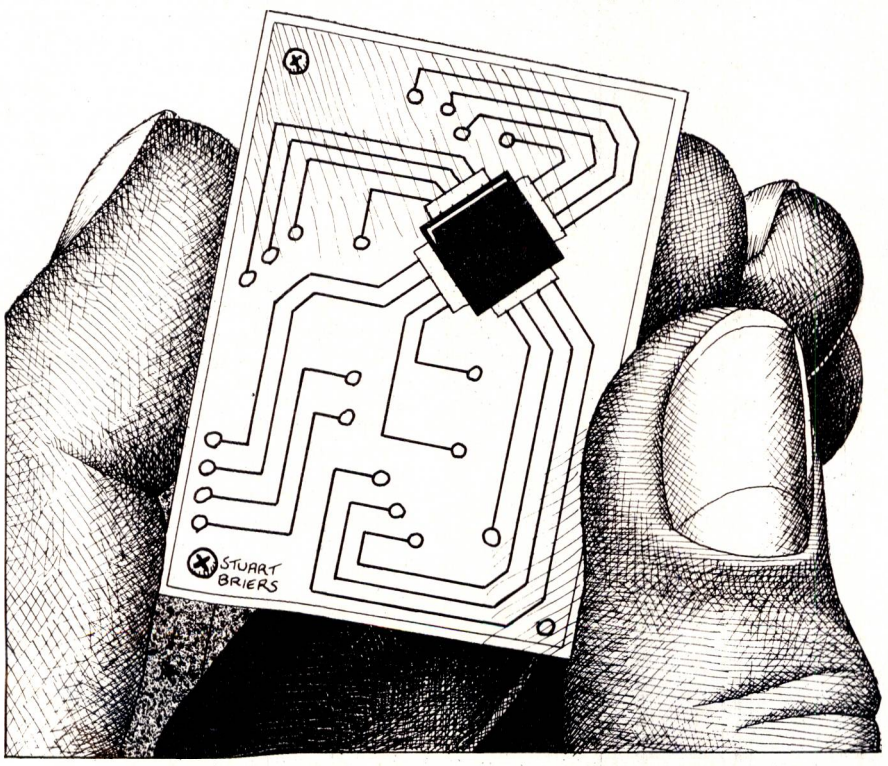

value the microrevolution places in doubt. Signs are that this model is being widely adopted in recent out-of-school British initiatives as well, either confined to providing skills that will ensure competent industrial fodder, or towards cultivating the micro-consumer base, following the role of the US media. Note the new BBC educational initiative is titled 'computer literacy', yet it is designed to promote programming and to sell BBC computers, hence affirming the most functional definition of computer literacy.

So, after a brief flirtation with a potentially far-sighted and enlightened approach, the British seem to have succumbed to importing yet another technology with labels and values intact; the American utilitarian computer literacy, which, though emphasising hands-on activities, allows (under Luehrmann's interpretation) no exposure to the broader social issues as a basis for facilitating informed citizens. (A balanced view of the arguments supporting commuter literacy and computer awareness can be found in Daniel H Watts's article, 'Computer Literacy: What Should Schools Be Doing About It?', *Classroom Computer News*, November-December 1980.)

Yet, who could feign surprise at this regressive rationalisation, par for a government course hell-bent on reducing social obligation in so many other spheres? Indeed, from the outset it was implicit in its careful revision of the inherited Labour Party discussion document previously quoted, in which the Tories deleted the clause about preparing society for its full consequences, while elsewhere stressing the need to exploit microelectronics for its economic potential. It should not be unexpected that Thatcherism should reveal itself unconcerned with creating an informed citizenry, or with the unemployment implications of new technology, or that it should clinically display its only interest in micro-technology and education as exploitable means to revitalise the flagging economy in such a way that it reinforces the status quo. Meanwhile, the consequences of this mentality that increasingly governs the West are beginning first to appear in Britain, with unemployment just now reaching the three million mark, nearly 13 percent of the working population and as high as 60 percent in disadvantaged areas.

As the present lack of micro-foresight in Western government policy allows the gap between the haves and the have-nots to increase rapidly, corresponding to the fall in price-per-chip component and concomitant explosion in automation and automatic unemployment, the critical flashpoint will have been reached throughout the West, as it has just been reached in Britain, where outbreaks of rioting have occured. But whereas it is a bayonet-point society of short, sharp shocks that is now imminent in that formidable bastion of democracy, future troublesome elements of the Western displaced and unplaced workforce will be crushed by sophisticated micro-surveillance. Note Reagan's recent move to create extensive databanks on all welfare recipients, as part of his rationalisation of social programs (as reported in a syndicated *Washington Post* feature which appeared on 1 May 1981 in the *Arkansas Democrat).*

ComputerTown UK! and USA!

Yet, in the midst of all this gloom, a faint glimmer is being issued forth from the British horizon. A new media-initiated effort also stating as its aim the spreading of 'widespread computer literacy' seems to embody just the sort of mechanism necessary to drive a subtle wedge of micro-awareness deep enough within the British society to reach a significant cross-section of the public. ComputerTown UK! (CTUK!) is a nation-wide network of voluntary computer literacy centres with its own monthly notice board, *ComputerTown UK! News'.* In elaborating its aims, CTUK! states flatly that the intent is not to produce a 'nation of programmers', but to do something 'on a very wide scale to introduce the public to some basic truisms of computers' (ComputerTown UK! was introduced through *PCW* in the November 1980 issue, from where all of the CTUK! quotations that appear here were taken). CTUK! relies on 'computer enthusiasts who are prepared to spend a little time spreading computer literacy within their own communities,' and in so doing offers the potential for early, wide, free public access to computers and education about them.

The purpose of spreading this 'awareness' is not so very different from other British initiatives I have mentioned: it is needed to overcome the 'poor public image' of computers which they see as the roots to upcoming 'widespread social unrest' which micro-induced unemployment will trigger off. It is noteworthy that CTUK! sees this investment in automation as essential to Britain's economic future, an imperative that must not be blocked by the hostility of unemployment. In this CTUK! sees its role as removing 'fear of the unknown', namely computers, in order to remove a great 'barrier' to change, in other words, to placate a potentially hostile public by endearing them to the technology that threatens them. It does not see its role as one of involving the public in becoming informed enough to *direct* this transition into a future that respects the quality of life by first making known to it the alternatives. CTUK! identifies the most fearful unknown as the technology, whereas it could be argued that the most obviously fearful unknown to a public is the future itself, especially when the public feels that its future is governed not by it, but by technology out of control.

Another part of CTUK!'s purpose in spreading computer literacy is also not very different from other British initiatives: to prepare citizens to 'help create the new industry that this country requires'. Yet, CTUK! describes itself as 'subversive'. It is subversive in its mechanism, designed to appeal first to children, 'the weak point in society's anti-technology block', getting them 'well and truly hooked', so they will, in turn, involve their parents.

It has the potential to subvert public apathy to matters social *and* technological, not merely to placate, feed industry, or create a consumer base which represents its present direction. Its phenomenal success indicates its potential as a carrier of social evolution and the need to look more closely at its origins.

As one might have guessed, CTUK! represents yet another American *technique* imported by Britain, another triumph of American know-how. As such, it becomes all-the-more essential that the goals for which the 'tool' was originally designed, and its history of success and failure, be carefully examined so that the technique can be appropriately adapted to meet local needs. In this case, the needs are as I have already outlined: for a public motivated to question and seek answers regarding the social implications of new technology.

The concept ComputerTown USA! was originated by Bob Albrecht in Menlo Park, California, with the stated aim of 'bringing computer literacy to the entire community.' (this motto is the subheading of every CTUSA! news bulletin). Activity began in April of 1979 with Albrecht and Ramon Zamora manning personal computers in strategic places in the community, such as local schools, pizza parlours, book stores, community centres, parks, and the eventual home base of CTUSA!, the Menlo Park Library. They managed to attract the support of a local representative of a computer manufacturer who was able to provide the project with three machines, and from then on, as the *CTUSA! News Bulletin* No 1, May 1980, from which I learned all this states, 'the project was an instant success'. An important measure of that success is that in September 1980 CTUSA! was granted $250,000 from the National Science Foundation to put together an implementation package over three years to aid in the replication of CTUSA! in other libraries. The project was funded just prior to Reagan's cuts which no place in jeopardy the future of much of the NSF.

What information I could learn about CTUSA! from England I found vague and intriguing. These two California pied pipers would apparently attract loads of children and, after a brief micro-initiation, each child would go away with a 'My Computer Likes Me' badge as graduation certificate. Yet, beyond spreading 'computer literacy', a term that the bulletin leaves undefined, there are no clearly stated aims, no demystification to counteract the anthropomorphic myth which the badge seems to reinforce.

Through good fortune, it soon became possible for me to visit the US to research CTUSA! and other US micro-education initiatives in context. What follows in the next two months, then, is an impressionistic diary of micro-encounters of all kinds along a 6000-mile drive, meandering ever west, in search of other ComputerTowns enroute to CTUSA!

DESIGNING PROGRAMS THE WARNIER WAY

Here's a really neat way to design programs quickly and logically, described by Paul Overaa.

There's a lot more to writing a program than the physical effort of putting it into code, whether you're using Basic, Pascal or any other programming language. Unless the program is very short and simple, your first action must be to *design* it — work out the underlying sequence and logic. Without doing this, you can end up in a frightful mess.

The program design stage can often be more difficult than the actual coding; or, put another way, by properly designing the program before you start coding, the coding itself becomes very much easier because you have a clear mental picture of what you're doing at each stage in the program. Producing logical, well-structured programs which actually do exactly what you wanted them to thus hinges around good program design.

A program design technique must, if it is to be useful, satisfy several criteria: it must produce consistent results of high quality; it must be quick; it must allow easy program maintenance and it must be simple enough for anyone to use it and produce good results.

If these criteria look as though we're waiting for some really handy program design technique of the future, then relax — just such a technique is here already.



Fig 1

Warnier-Orr techniques were pioneered by Jean-Dominique Warnier in France and their use has been expanded and publicised by Kenneth T Orr in the US. The method is a major step forward in the design of logically structured programs.

Before we look in detail at the techniques, I should emphasise that during the design stage, it's vital to forget about your computer completely — and the programming language you're going to use! These are things which will affect how you code your program but they should not influence your logical solution to the problem.

Programmers are using Warnier-Orr techniques to design programs which are then written in Basic, Cobol, Fortran, APL and assembler languages as well as many other languages; all agree that the techniques result in easy to understand, well-structured programs (yes, even in assembler!).

The technique uses diagrams — called Warnier Diagrams — that are basically a series of hierarchical 'curly brackets'. The best way to learn to understand these diagrams is to see them being used in specific cases, so let's consider a very simple example.

For some purpose or other, we have to print a report comprising the contents of a disk file. The Warnier diagram of this is shown in Figure 1. Notice that the bracket is read from top to bottom and that the word 'report' on the left-hand side identifies what we're doing in the bracket. Notice also that we explicitly state at the top and bottom of the bracket that there is a beginning and an end to the operation.

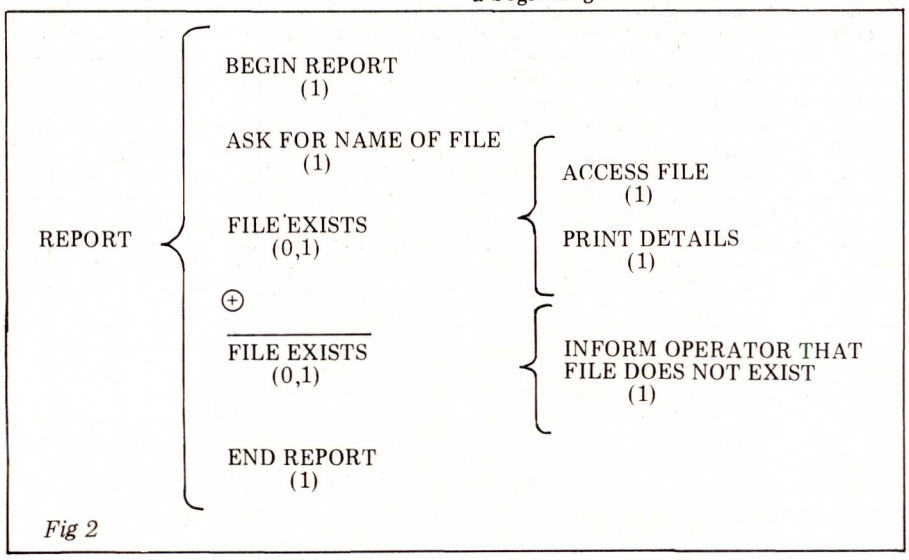

Fig 2

To explain some further conventions, let's now introduce a minor complication to the problem: the user will wish to access a file of his own choosing and obtain a printed report of details present. Such a file may not in fact exist and if this is the case, the user should be informed.

Figure 2 shows the problem in Warnier diagram form. The following conventions are used: the ⊕ sign is used to separate mutually exclusive operations — in this example, a file either exists or doesn't; the logical opposite of a statement is written with a bar over it — FILE EXISTS means that the file does *not* exist; brackets written to the right of an item or statement indicate the operations to be carried out; underneath each item or statement is a number in parentheses which indicates how many times the operation is to be performed — (1) tells us that the operation is performed once and (0,n) tells us that the operation is to be performed any number of times from not at all to n times.

Having now dealt with the basic conventions of Warnier diagrams, we can express in plain language exactly what the diagram tells us: we are dealing with a certain procedure called REPORT which starts by asking us for the name of a file. If the file exists then we can access it and print out the details; if it does not exist then the operator is informed of that fact.

To appreciate the elegance and speed with which this technique can accommodate changing requirements within a particular problem, let's place some additional restrictions on our example: the user must be able to access a file of his own choosing and a report of the contents of this file is to be printed; such a file may not exist and if this is the case, the user must be so informed. In addition to this, there are within our hypothetical system various files containing sensitive information, such as wages or personnel details, which must only be made available to those users with the proper authority — users are therefore issued with access code numbers. If a user tries to access a file which he has no right to examine, two operations must be carried out: the user must be informed that he has tried to access data to which he is not permitted access; and the system security officer must be informed of a possible attempted illegal access.

The Warnier diagram for this new condition is shown in Figure 3; pay particular attention to the layout of

this diagram and compare it to Figure 2, the example without the additional restrictions.

Notice that as we redefine the problem and add more details, we don't have to re-arrange the complete diagram, as we would have to with a flowchart. All we do, in fact, is superimpose the new details and restrictions onto the existing diagram, which grows as we successively modify the requirements. In addition, the diagram is documenting and expressing the logic of the problem in a way which will actually make the transition to a language-coded equivalent very straightforward.

The ability of these Warnier diagrams to display, help formulate and to grow with the changing logic of a problem is of great importance. Once the quite simple conventions have been learned, these diagrams can be read just like the written plain-language equivalent but, unlike the plain language form, a Warnier diagram contains within its apparently simple notation the complete logical solution to the problem!

I don't intend to discuss the coding of the solution in this article, other than by giving a very general pseudo-Basic type of program based on the example we have developed.

The secret in transforming the Warnier diagram into the finished program lies in treating all of the brackets containing more than one operation as subroutines! If this is done, then it's very easy to code the program by working from the largest bracket as a 'main block'. Lower-level brackets are called as subroutines and these may themselves call further subroutines. The pseudo-code in Figure 4 should give you the general idea.

This has been a somewhat brief introduction to this very important technique. If you want to experiment, then try the ideas with small programs at first, gradually increasing the complexty of the problems. I think you'll be very surprised at how quickly your programming assumes a more professional approach.

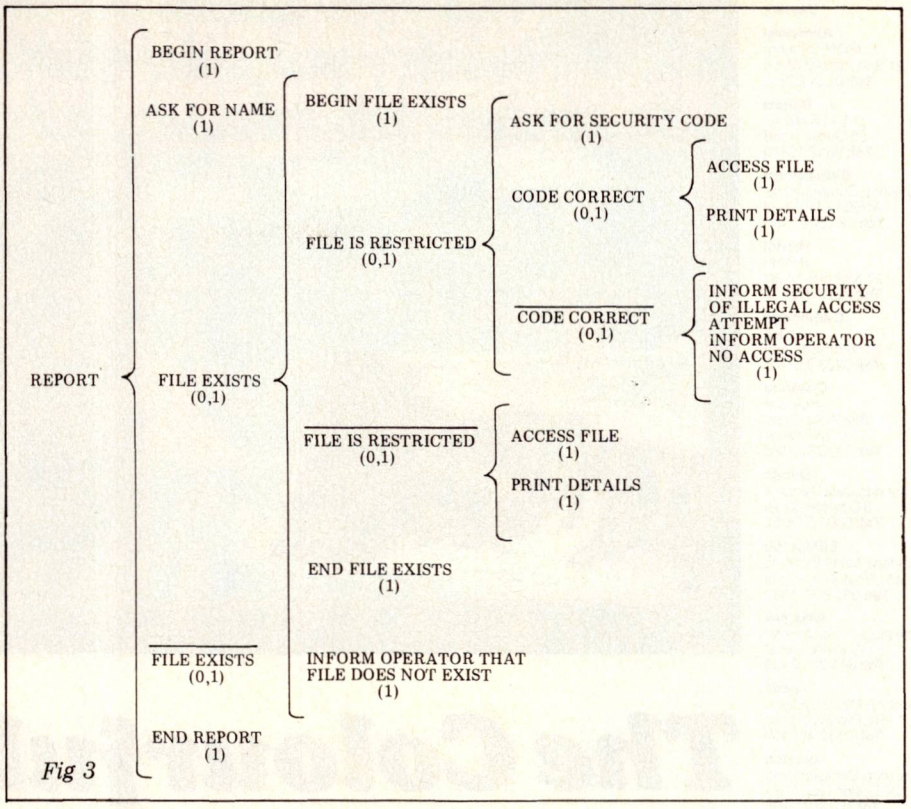

Fig 3

```
REM     REPORT MODULE
        INPUT NAME OF FILE
        IF  FILE EXISTS THEN GOSUB "FILE EXISTS" ELSE
            PRINT "FILE DOES NOT EXIST"
        END

REM     SUBROUTINE FILE EXISTS
        IF  FILE IS RESTRICTED THEN GOSUB "RESTRICTED
            FILE" ELSE GOSUB "ACCESS"

REM     SUBROUTINE RESTRICTED FILE
        INPUT SECURITY CODE
        IF  SECURITY CODE=CORRECT CODE THEN GOSUB
            "ACCESS" ELSE GOSUB "ILLEGAL ACCESS"
        RETURN

REM     SUBROUTINE ILLEGAL ACCESS
        WRITE TO ILLEGAL ACCESS FILE THE TIME OF ACCESS
            ATTEMPT AND USER CODE
        PRINT "THIS IS A RESTRICTED FILE — YOUR ACCESS
            CODE DOES NOT PERMIT YOU ENTRY"
        RETURN

REM     SUBROUTINE ACCESS
        (This would access whatever data the file contained
            and display it on a terminal, printer, etc)
        RETURN
```

Fig 4

References

Warnier, J D: *Logical Construction of Programs*, 3rd edition, trans B M Flanagan, New York, Nostrand Reinhold, 1976.

Orr, K T: *Structured Systems Development*, New York, Yourdon Press, 1977.

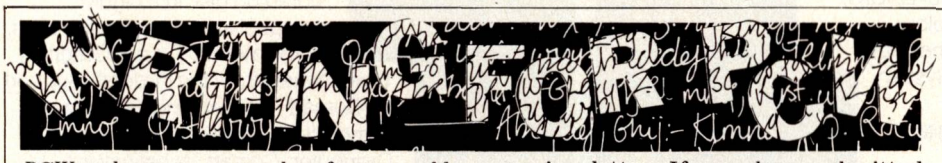

PCW welcomes approaches from would-be writers, even those who may never have appeared in print before. In this game it is often those with practical experience who have important things to say so we don't mind too much if their prose is less than perfect. Providing that submissions have a sensible structure and follow a logical sequence, we can take care of the polishing. Here are some tips:

If the article is already written, simply send it in, making sure that your name, address and 'phone number appear on both the article and the covering letter. If you have submitted the same work to other magazines you should tell us — it would be embarrassing (to say the least) if the same article appeared in more than one.

If you have an idea for an article or a series, write us a letter outlining your ideas. A one or two page synopsis giving the proposed structure, sequence and content will give us a sound basis for discussion. Please give us a daytime 'phone number if possible.

If you have nothing specific in mind but feel qualified to conduct case studies, Benchtests or whatever then drop us a line saying what you'd like to do and why you think you're qualified to do it. We're not particularly looking for strings of academic qualifications — experience carries just as much weight.

Dick Pountain is always on the lookout for interesting calculator features and we wouldn't mind seeing one or two readers getting on their soapboxes but remember: even articles such as this need a structure.

Reading *PCW* will give you a good idea of the style we prefer. You may notice that we try to avoid pomposity at one extreme and flippancy at the other (except in 'Chip Chat', that is).

Finally, have a look through back issue indexes and try not to re-invent any wheels. Oh, we almost forgot — *PCW* does pay for all published work.

Comart Approved Dealers

Aberdeen
MOM Offshore
21 Bon Accord Street
Tel: 0224 22863

Belfast
O & M Systems
95 Dublin Road
Tel: 0232 49440

Birmingham
Byteshop Computerland
94/96 Hurst Street
Tel: 021 622 7149

Bristol
Senton
27 Nicholas Street
Tel: 0272 276132

Cambridge
Toltec
24 Thompson Lane
Tel: 0223 312347

Cheshire
Holdene
82a Water Lane
Wilmslow
Tel: 0625 529486

Dublin
Lendac Data Systems
8 Dawson Street
Tel: 0001 372052

Edinburgh
Holdene Micro Systems
48 Great King Street
Tel: 031 557 4060

Glasgow
Byteshop Computerland
61 Waterloo Street
Tel: 041 221 7409

Leeds
Holdene Micro Systems
11/12 Rampart Road
Tel: 0532 459459

London
Byteshop Computerland
324 Euston Road, W1
Tel: 01-387 0505

Digitus
9 Macklin Street, WC2
Tel: 01-405 6761

Jarogate
67 Tulsemere Road, SE17
Tel: 01-670 3674

Manchester
Byteshop Computerland
Piccadilly Station Approach
Tel: 061 236 4737

NSC Computers
29 Hanging Ditch
Tel: 061 832 2269

Newbury
Newbear Computing Store
40 Bartholomew Street
Tel: 0635 30505

Nottingham
Byteshop Computerland
92a Upper Parliament Street,
NG1 6LF
Tel: 0602 40576

Sheffield
Hallam Computer Systems
451 Eccleshall Road
Tel: 0742 663125

Southampton
Xitan Systems
23 Cumberland Place
Tel: 0703 38740

Suffolk
Eurotec Consultants
Little Waldingfield,
Sudbury
Tel: 0787 247959

Surrey
Gemlines
184 London Road, KT2 6QU
Tel: 01-546 9944

Warwicks
Business & Leisure
Microcomputers
Kenilworth
Tel: 0926 512127

Watford
Lux Computer Services
108 The Parade,
WD11 2AW
Tel: 0923 29513

Worthing
Ace Computing Services
1-11 Bridge Road
Tel: 0903 35411

Comart Ltd,
St. Neots, Cambs.
Tel (0480) 215005
Telex 32514 Comart G.

New Slidemaster brings colour graphics with no application programming



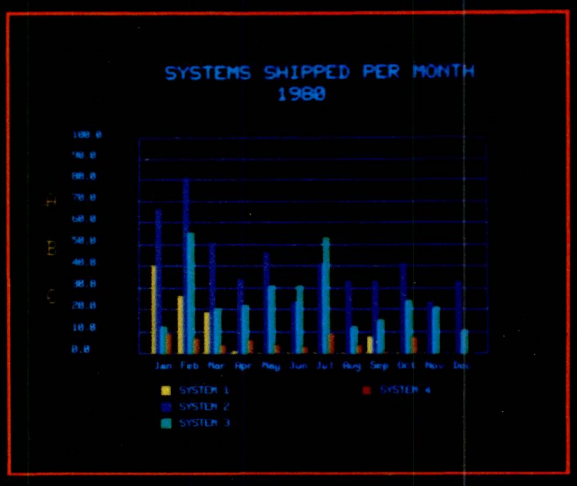

The Colourful World of Cromemco

Cromemco brought High Resolution, broadcast quality colour graphic systems onto a new price/specification level with the SDI System. They gave a wide colour pallete, up to 4096 colours, and a wide variety of functional development; area infill, rotation, — a true professional graphics capability.

With the Slidemaster they have added a new dimension — User Convenience. Slidemaster is an optional expansion to the SDI System. It provides sophisticated colour graphics with no programming.

Slidemaster users still have full SDI 756 x 482 point High Resolution capability, and the facility to program in the high level languages of BASIC, and Fortran. Cromemco Colour Graphics is supported on the floppy disk based System 2 and System 3, and the hard disk Z-2H. Cromemco's analogue, digital, and optically isolated I/O Modules provide versatility for control applications.

Slidemaster is a fully self contained application package. It allows images to be developed, stored and manipulated interactively with speed and ease.



The image is developed from a digitising tablet, and reproduced directly on the colour Monitor.

Slidemaster offers a choice of up to 75 powerful design functions. A touch of the pen and the images can be erased, shaded, coloured, enlarged or reduced, or rotated. The menu provides for a variety of pen or brush selections, and the capability to generate circles, elipses, lines or text, and to zoom and pan.

The images can be stored on diskette, and redisplayed "sideshow" style at the touch of a key. The user can have up to six images stored in RAM Memory for instant recall or merging, and hundreds more stored on disk in a highly compact and cost effective form.

Cromemco Colour Graphics users benefit from the in-depth support of Comart — Cromemco's longest standing, and leading European Distributor. Comart, its nationwide UK dealers, and supported OEM's provide local and specialist end user support at all levels. Comart's central technical, distribution and service facilities ensure ready availability and well qualified technical support in hardware, software and after sales service.

comart

SPECIALIST IN MICROCOMPUTERS

A member of the Comart Group of Companies

Start talking business



with your Apple

COBOL is the most effective business language. Apple II is the most friendly business computer. CIS COBOL with FORMS-2 brings together the best features of COBOL and Apple to enable you to deliver the most effective, user-friendly applications.

Business Programmers: Take the COBOL expertise you have acquired on big business mainframes, and use it on Apple II to create friendly applications that will talk directly to your users – where it suits them best, on their own desks.

CIS COBOL's dynamic module loading gives you big application capability and the FORMS-2 source generator lets you build and modify conversational programs from visual screen formats, creating much of the code automatically.

Application vendors: CIS COBOL with FORMS-2 steps up the pace for your development of the high quality professional application packages needed today. And creating them in COBOL makes them more maintainable.

Over half the Apple II's now being sold are going to business or professional users so demand for quality applications is growing fast, creating big business opportunities for you.

Stability proven by the US Government. CIS COBOL has been tested and approved for two consecutive years by the US General Services Administration as conforming to the ANSI '74 COBOL Standard. Apple II under CP/M is included in CIS COBOL's 1981 GSA Certificate of Validation (at Low-Intermediate Federal Standard plus Indexed I-O and Level 2 Inter-Program Communication).

Get your hands on CIS COBOL at your Apple dealer.

Talk business with him now!

Micro Focus Ltd., David Murray John Tower, Brunel Centre, Swindon, Wilts., SN1 1NB.
Phone: (0793) 695891. Telex: 444418 MICROF G

MICRO FOCUS

CIS COBOL with FORMS-2 for use on the Apple II with CP/M is an Apple Distributed Product. CIS COBOL and FORMS-2 are trademarks of Micro Focus. CP/M is a trademark of Digital Research. Apple II is a trademark of Apple Computer.

Double Anniversary for The Perfect Couple

megastor and apple*

1st Anniversary

of the first MEGASTOR installation

AUGUST 1980

2nd Anniversary

of the first installation of Vlasak's specially-written Apple business-software

AUGUST 1979





MEGASTOR consists of two very reliable 8-inch BASF drives, an integral power supply, and a controller card for Apple][.
In addition, we are able to offer a range of specially-developed user software – inventory, accounting, payroll, etc – to utilise MEGASTOR's large storage capacity.
Special software is available to convert Apple][DOS files to IBM 3741-formatted EBCDIC-encoded files, and to read IBM-formatted files.
MEGASTOR offers the user 1.1 or 2.2 Megabytes of storage power per dual-drive unit.

SOME OFTEN-ASKED QUESTIONS

Q: What drives?
A: BASF double-sided, double-density 8" drives.

Q: How do I copy programs from 5¼" to 8" disks?
A: A utilities disk that provides a direct copy program for DOS 3.2 is supplied. DOS 3.3 files are transferred using FID (on the Apple System Master Disk). Pascal programs can be copied by using the Pascal Autoboot utility (£75).

Q: Is MEGASTOR any faster than 5¼" disks?
A: Yes. A program will operate faster on MEGASTOR than on mini-disks.

Q: Can I run mini-disks and MEGASTOR together?
A: Yes. The MEGASTOR can be used stand-alone, or in combination with mini-disk drives.

* Apple is a trade mark of Apple Computer Inc.

MEGASTOR software available from VLASAK:

LEDGERS: fully-integrated, 1500 accounts, 6000 transactions/month, Open-Item, or Balance-Brought-Forward.

INVOICING: User-configured to produce invoices, credit notes, delivery notes, and picking notes. Automatically updates the Sales Ledger.

STOCK CONTROL (INVENTORY): 3000 to 6000 stock records on-line, with an average access time of 1 second.

PAYROLL: 400 employees (200 weekly, 200 monthly). All tax & NI contribution codes supported. 12 pre-tax payments, and 5 post-tax adjustments available.

Vlasak Computer Systems

Vlasak House, Stuart Road, High Wycombe, Bucks HP13 6AG
Telephone: High Wycombe (0494) 448633

DISTRIBUTORSHIP AND OVERSEAS ENQUIRIES WELCOMED

Open COMPUTER WORLD

Compiled by Derrick Daines

Fibonacci series

A reader wrote to colleague Sheridan Williams recently, asking why there was no function available for factorials. If you're not sure what they are, let me explain. Factorial 2 is written as 2! and is understood to mean 2 x 1. Factorial 3, written as 3!, means 3 x 2 x 1; 4! is 4 x 3 x 2 x 1; and so on. Factorial numbers obviously get very big very quickly but they are of great interest to statisticians as well as to humbler folks who like a flutter on the football pools. Try permutating any eight from 32 matches and you'll see what I mean!

Now, at first sight, it is not immediately obvious why anyone should want a *function* to produce factorials. One would think that all you have to do is access a subroutine:

```
9000 F=1
9010 FOR X=1 TO Y
9020 F=F*X
9030 NEXT X
9040 RETURN
```

where Y is the desired factor to be returned in F — but three variables and five lines are used up and if space is restricted, this can be serious. Besides, it's not nearly as satisfying as having a neat function to call.

I had this little problem at the back of my mind the other day when I was working on a program that called for the use of the Fibonacci series, an interesting series of numbers in which the next element is obtained by adding together the previous two: 1, 2, 3, 5, 8, 13, 21, 34, 55, 89, 144, and so on. (Some authorities start it off as 1, 1, 2, 3, etc, while others begin 0, 1, 1, 2, 3.) As before, it is easy to construct a subroutine:

```
9000 F=1: F2=0
9010 FOR X=1 TO Y
9020 F1=F2+F
9030 F2=F
9040 F=F1
9050 NEXT X
9060 RETURN
```

where Y is the element of the series to be returned in F.

Here four variables and seven lines are used up, although of course with multiple-statement lines there would be some saving. Even more to the point, it is intellectually unsatisfying, like an unsolved crossword puzzle. It was a tantalising challenge to reduce it to a single equation. My program was put away and I devoted a couple of days to solving the problem.

What I finally came up with was the following:

```
F=INT((1.618036↑(X+1)+.5)/2.23614)
```

which will produce the first 26 elements of the series before rounding errors affect the result. The variable X is the desired element — fourth, tenth, or what-have you.

Remember you saw it here first!

If I get some time, I might get around to doing the same for the factorials problem — or can you beat me to it? I would be interested to hear from anyone with a solution, or anyone with a better answer than mine for the Fibonacci series.

Programs received

Square and Cube Roots (TRS-80) by Jonathan Sumpster (14) of Maidenhead.
Alphon Invaders (Video Genie) by Alex Mackow (13) of Margate.
Golf (PET) by Mark Cochrane (13) of Gerrard's Cross.
Old Glory and Horse Race Predictor (ZX81) by Kevin Kirkland (16) of Newport, Salop.
Spacefighter (Video Genie) by Jason Bell (12) of Prestwood, Bucks.
Defender (MZ-80K) by Basil Zimms (16) of Edinburgh.
Berk's Defence (PET) by Stewart Sargaison (15) of Berkhamsted.

That's another good month for programs. Thank you all!

I've also had mugtraps from Shaun Dunmall of Maidstone, Andrew Freudenberg of Taunton, David Lomax of Manchester, Alistair McLuckie of Gwynned, Phillip Watson of Hartlepool and this one from J P Jiggins of Greenwich:

```
10 PRINT "ENTER NUMBER";
20 INPUT N$
25 N=0
30 C=CODE (N$)—28
40 IF C<0 OR C>9 THEN GOTO 20
50 IF N>3275 THEN GOTO 20
60 N=N*10+C
70 N$=TL$(N$)
80 IF NOT N$="" THEN GOTO 30
90 PRINT N
```

Mr Jiggins wins this month's book-token.

Program listings

No fewer than four people have written to me this month, asking for copies of listings that I have mentioned but not published. I have explained the situation on this page already but I'll do it again for new readers. I cannot send out listings because those that are not published are returned to their rightful owners. Besides, if you think about it, you will realise that it would be illegal for me to send copies here, there and everywhere, unless we had previously paid the owner — and that would imply that we should pay for each and every program sent in! It's not on, mates!

As to why we publish a list of those that we have received, well, that's just to encourage you. Even if your listing is not published, at least you get the thrill of seeing your name and program mentioned.

What I can and will do is to put enquirers in touch with authors. I keep a fat and growing file of names and addresses of all those who write to me. If you're interested in a listing mentioned, drop me a line at *PCW* and an SAE and I'll send you the address of the author. Fair enough?

Project packs

'Dear sir, my school is doing a project on computers. Please send me full information.' Roughly speaking, that is the gist of dozens of letters received by *PCW* every year — and it's sending the Editor prematurely bald! He doesn't know how to answer it, you see. Well, do you?

If you are guilty of sending such an enquiry, then take heart — help is at hand. I am proud to announce the formation of MAPE — Micros and Primary Education — an organisation of practising teachers and educationists dedicated to 'spreading the word' among all 22,000 primary school in these islands. The first meeting of the steering committee was held in London recently under the chairmanship of Ron Jones, Headmaster of Upwood Co Primary School, Huntingdon, Cambs, following the Easter international conference held at Exeter University. Committee membets from Land's End to Sheffield (does nobody live North of there?) gathered to begin work on establishing a national body espressly for primary computing.

My own view is that on sheer numbers of machines and schools represented, primary computing will eventually become bigger than any other sector in education — but I may be wrong. The point is that word 'eventually' — so far, MAPE is in its infancy. One thing they have started work on is an information pack for newcomers, but it's not ready yet. I'll keep you informed. Since, for my sins, I too am on the committee, it'll be the 'inside dope'.

Another source of information is Newman College, University of Birmingham, who have started a primary computing magazine *Microscope*, and are devoting space to the fledgeling organisation. Write to Roger Keeling, Newman College, Genners Lane, Bartley Green, Birmingham B32 3NT.

A sub-committee is already at work planning next year's conference at Exeter. Judging by this year's, it will be a sell-out and early booking is advisable. Write to Roy Garland, College of Education, St Luke's, University of Exeter.

Trumpet voluntary

What can you do if you want to know about schools computing and want to get 'stuck in' right away? Well, one thing you can do is to turn to the back issues of *PCW* and read my series, 'Gateways to Logic', which began with the July 1980 issue. (I regret that it is not available in book form, and if any publisher is interested, so am I!)

If all that isn't enough, interested

UP THE SHARP END

A USER'S VIEW OF SOFTWARE PIRACY

From Richard Waller of The Management Centre Ltd

In the good old days BM (Before Micros) we didn't have software piracy. We wrote programs for ourselves. If anyone else wanted to use our programs we gave them to him, with whatever documentation there happened to be, 'as is', warts and all. And good luck to him — let him be ten years behind as well.

Then user groups came into fashion and with them formalised software sharing. IBM identified three classes of software. As I recall, Type 1 was from IBM laboratories and came with super documentation and always worked. Type 2 came from IBM staff working with customers and had some standard documentation and the programs sometimes worked. Type 3 was sent in by customers who either contributed to the well-being of the industry or just wanted to get their name in print. The documentation varied alarmingly and again, the programs sometimes worked, at least on the author's own system.

Came the great IBM price unbundling and things ceased to be free. Suddenly all software cost money. On mainframe computers the average cost of a software package now is said to be $14,000. Surely it should be possible to acquire one cheaper than this from a friend? So was invented software piracy and, in order to try and protect the shattered remnants of their revenue, the authors invented software protection.

First line of defence is the source code. In the new suspicious environment the author keeps the source; all you get is the compiled object code. You can still have some changes; the software house will configure your system for you with a whole range of available user options. But once set up and running, any change means going back to the author again. But this technique doesn't work with interpreted languages like Basic. Quite a lot of users know Basic and we have a protection problem even when the Basic code looks a right dog's dinner with not a remark statement to help you in the entire listing.

The second line of defence is the contract. Every purchaser signs a contract in which he finds he hasn't bought the software — he only has a perpetual lease. And he accepts a more or less open-ended commitment to damages if the software he is using falls into the hands of an unauthorised party.

This worked for a time. With only about 8000 mainframes in the UK and minis not being at that time very significant for their packaged software, a contract seemed a good protection. When I was with CAP we heard, via a man we wanted to employ, of a user who had our software. So we sent him a bill to pay and a contract to sign and he did both without a murmur. No problem.

Documentation was the third kind of protection. The documentation is copyright (not that anyone seems to care about that) but these products were large and full of bugs. And the user manuals were the only communication the user had to keep him in touch with reality. Unless the new releases kept coming, the bugs bit him faster than his boys could fix them. A steady stream of Program Temporary Fixes was a must. Allied with this, most computer users were the larger companies and even if they took a package they also paid a lot of money for customising and for installation consultancy. The actual cost of the software package was trivial by comparison. This still applies for the more complex applications like production control and inventory control.

Now we have maybe 120,000 micros installed, of 140 different types. All the world and their wives are writing software packages. Most are relatively simple and thus easy to install; this up-front, immediate benefit, retail image is a large part of the new micro appeal and suddenly having to pay £95 for a program like Visicalc stops you in your tracks.

Would it be the bicycle shed syndrome? The accountant suddenly queries the £95 (plus VAT) for a program. 'But you bought a program last week', he says. And the money you would have to pay suddenly has to compete with other items of small spending like continuous stationery, an upgrade of the printer — even with important things like beer money.

Everyone tells you that it is foolish to pay the full price. A lot of dealers offer discount on everything — why can't I get discount on Visicalc? So you look for a bootleg copy and pay, say, £40 plus the hidden cost of photocopying the manual.

So nothing is quite as easy any more. The product is more complex and probably more expensive because of the security. You have to see your legal people before you sign the contract; you cannot change anything yourself because you haven't got the source; and if you go back to the author it takes a month and you have to explain your simple requirement to the thickest programmer in the kingdom, and he keeps asking you why you want to change his product when it's obviously perfect.

You cannot even make a backup copy; the authors have put a load of cunning code onto the floppy disk on which the program is supplied so that the copy program will not run. The author has promised a 24 hour turnaround if you send him a corrupt disk, but you want it now.

And there is another nasty. If I have multiple terminals on my computer then I can, of course, use the program at each. If I have several micros with single screens, the best I can do is to pass the program disk around; I cannot use the program simultaneously, which seems unfair.

Now there are some neat ways to protect software. Unfortunately, these are nearly always in addition to the above (no-source code, the contract clause, officious documentation/upgrade service, program copy booby traps). The fashionable thing to do today is to use a 'dongle'; you buy a small box to fit on the cassette port for each machine you want to run your package on and you can make as many copies of the software as you need. It is a much better solution than the PROM chip that came with some earlier products which got bent if you kept picking it in and out of the printed circuit board.

Next in line is user personalisation. The author configures the software for your particular computer model, memory size, printer display and disks and it will not run on any variations of this set pattern. This is not so good for



the user for portability or back-up but it does at least ensure that the buttons are all functional. But then the author can go on and put the purchaser's name on the copyright system welcome message. And on each output display screen. And on each report printed. And on the user manuals. You name it, your name is on it. So unauthorised users have an identity problem.

Third in line is a software maintenance contract. Some companies are now offering software maintenance for life at no extra cost. Whose life is not always clear, but an aggressive sales campaign on the back of this to issue upgrades perhaps for 'the cost of reproduction' like £40(!) could tie the user into his contract in a mutually attractive way.

The objective is to ensure that revenue accrues to software package authors. It is hard enough for package authors to stay solvent without ripping them off. Oh, that everyone was as ethical as you or I. If it is profitable to write software than there will be lots of exciting new products available at nice low prices.

HARD CHOICE

'Sharp End' has until now been mostly concerned with software. For a change, here's a hardware manufacturer's description of the problems involved in equipment design. The author, Hal Hardenbergh, is president of California-based Digital Acoustics Inc.

We at Digital Acoustics have been using the 6502 since 1976 in various instruments, primarily battery powered noise level meters, or environmental noise monitors; it seems if you wrap some pretty aluminium around the 6502 you can sell it for $8000!

I am sure that we are not alone in seeing that the 6502 is approaching the end of its useful life (the first microprocessor that we used here at Digital Acoustics was the Intel 4040, which has been out of production for some time now).

We are astonished that some persons with like views see the Motorola 6809 as the 6502 successor. Perhaps these persons are unfamiliar with some of the characteristics of the 6809. For example, to perform a 32-bit add it is necessary to perform the usual succession of four LDA, ADC, STA sequences since the 16-bit add in the 6809 is not an add with carry. Further, the above sequence will run more slowly than a 6502 at the same clock speed because the 6809 is not pipelined and therefore requires four clocks for a zero page reference as opposed to three for the 6502.

I am not trying to say that the 6809 is not overall a better general purpose computing device than the 6502, what I *am* saying is that, for a chip which came along five years later than the 6502, the relative performance advantage seems slight.

If we want to look at chips with a very high performance to price ratio we would have to consider the 8088 which is now under $15 at the 100 level, or the Z8002 which is under $20 at the 100 level. The 8088 is source code compatible with the 8080, and has considerably superior computational throughout compared to the 6809. The Z8002 has 16 general 16-bit registers and has vastly superior computational throughput as compared to the 6809.

However, if we can ignore the current $198 one-off price for an 8 MHz part, anyone who has been reading the numerous articles and advertisements for the Motorola 68000 is aware that this is by far the fastest of the available microprocessor chips.

Because our environmental noise monitors are manufactured in relatively small quantities the cost of software is by far the single most expensive ingredient of the instrument. Had we had a choice of using a $5 6502 or a $198 68000 developing our latest model, I would have immediately chosen the 68000 because it is far easier to program and requires far fewer lines of code to perform a particular function. This would have benefitted our company in two ways. First, the lessened cost of software would more than offset the additional cost of the integrated circuit. Secondly, the time saved by our engineering staff could have been put to better use developing additional instruments for sale. Of course, this is purely hypothetical because the 68000 was not in fact available at that time!

We did purchase two sample 8 MHz 68000s (at $249 each) when the chip finally became available in a bug-free version last November. Until very recently we had not done anything with the 68000 for the simple reason

L & J COMPUTERS

OFFICIALLY APPROVED COMMODORE DEALER

192 HONEYPOT LANE, QUEENSBURY, MIDDX HA7 1EE 01-204 7525

THE "PET" SPECIALISTS



AFFORDABLE CBM 'PET' PRICES!!

Available from stock:

4008 (8K) 4016 (16K)
4032 (32K) 8032 (32K SUPERPETS)

TRY US! YOU WILL NOT BE DISAPPOINTED

PRICE BREAKTHROUGH !!!

EXT CASSETTE DECKS (INC COUNTER & SOUNDBOX) £55*

Printers: CBM 4022, CENTRONIC 779, CENTRONIC 737, SPINWRITER 5510, CBM 8026 & 8027

Disk Drives: CBM 8050, CBM 4040, CBM 3040

Sundries: INTERFACES: C12 CASSETTES; DISKS: LIBRARY CASES; PAPER (ROLL & TRACTOR FEED); LABELS: DUST COVERS

TOOL KITS (BASIC 2 & 4), SUPERCHIPS
. . . AND ALL SORTS OF OTHER CHIPS. . .
UPGRADE YOUR PET EVEN MORE!!

The "MUPETs" are HERE!
3 to 8 PETs only need 1 DISK DRIVE . . . .
Daily demonstrations: Ring for details.



COMPLETE SYSTEMS FROM £1700!!

THE SYSTEMS WE SUPPLY & INSTALL ARE COMPLETE
ESTIMATES GIVEN FREE WITH NO HIDDEN EXTRAS:
FULL BACK-UP: GUARANTEED EXPERTISE.

* PRICES DO NOT INCLUDE VAT

SOFTWARE

As well as a full range of Petsoft and Commodore Software, we have some highly reliable "Home-Brewed" programs available.

STOCK CONTROL & INVOICING £60
(Handles up to 500 items – 32k) (80 on 16K). Stock depleted on invoicing, search etc. Cassette, disk (& print option).
3000 item: 4040/8050 £125

CASH BOOK £90
Enter daily/weekly amounts printout and totals, weekly monthly analysis, totals and balances.
(4032, & 8032 Versions £110 & £120.

STOCK TAKING for the licensing trade £240
OUTSIDE SERVICES (For Mini-Cabs etc.) £220

Sae for free software booklet

Specialists in: Commodore Business Programs
Bristol Trader, Item & Monitor
Superpay, Word Processing.

COME AND SEE THE NEW
VIC-20 @£189 inc. VAT
FULLY WORKING AND OPERATIONAL
ASK US ABOUT ALL THE ADD-ON-GOODIES
THAT GO WITH THE VIC . . . . . !

PERSONAL SHOPPERS WELCOME
Phone & Mail Orders accepted.

ALL GOODS SENT SAME DAY WHEREVER POSSIBLE
LARGE S.A.E. FOR LISTS ETC.

BARCLAYCARD VISA

that all of the application literature put out on this chip by Motorola (and not much of it at that!) suggests that the circuit cannot be turned on without the use of fewer than 574 integrated circuits to support it! A processor of this complexity is completely inappropriate to the sort of instrumentation we manufactured.

On trying to get clarifying information on this matter through Motorola I discovered that the Motorola sales people were remarkably uncommunicative once they discovered you were not a prospect to purchase their $28,000 Exormacs system. Although I was convinced that it was possible to make a far simpler system using the 68000, there was no information available in such detail as to make it practical to lay out a circuit board with any expectation that the resulting system would work. For these reasons, until a month ago the 68000 chips had literally never been removed from the plastic cartons they came in.

We now go back about 3½ years to a time when a 3M salesman dropped by to show me a new breadboarding system. The sample he had with him was a circuit board about 3x5in and both 14- and 16-pin sockets were available for use with this system. At that time I told him that I loved the concept but could not use the system since all of the circuits that we would like to breadboard would require a board much larger than 3x5in, and sockets with 20, 24 and 40 pin size among others. You are not going to believe this but the very same salesman came back less than two months ago with a brochure outlining exactly what I had asked for. I immediately ordered about $500 worth of breadboarding equipment that included two kits, three circuit boards and a number of various odd sized sockets. In three weeks a partial delivery was made, including one of the two kits and one of the three circuit boards.

The kit was delivered on Friday afternoon, and by noon Saturday I had a fully wired up breadboard which included a Motorola 68000, 16k static RAM and 1k of bipolar PROM, plus the necessary clock generator and decoder and interface circuits to my recently-purchased Commodore 8032. The wiring of this breadboard took about four hours. I then realised that with all of those wires in place it would be virtually impossible to add the necessary +5 V and ground lines, plus the necessary bypass capacitors. I stalled two days over this impasse and then ripped out all of the wires, installed the ground and VCC wires (these needed to be soldered) and a large number of miscellaneous ceramic bypass capacitors. Then the system was rewired; apparently I had learned a little bit about the prototyping system, since it took only a little over three hours the second time through.

I decided to interface the board through the memory expansion port of the 8032 and was rather surprised to discover that Commodore, through its memory decoding procedures, had arranged matters so that the memory expansion port was completely unusable! After examining my alternatives I decided to cut one line and install a single OR gate (one fourth of a 74LS32) so that the upper half of the 4k display area, $8800-through $8FFF could be accessed via the memory expansion port. Since I needed only a few bytes to interface to the 68000, I decoded 2040 of the possible 2048 bytes into an additional static RAM so that I now have about 2k RAM that nobody knows about, including Commodore, Wordpro or Toolkit!

It took about two weeks of debugging both the hardware and the bootstrap PROM software before we finally got the 68000 working reliably. Once the basic hardware and software was debugged, two further changes proved necessary to achieve a completely reliable handshake. First, since the 68000 was operating on its own regulated 5 V supply which didn't have a line filter, it proved necessary to protect the 68000 from line transients. The most convenient means of doing this proved to be the use of a Sola harmonic neutralising regulating transformer which we happened to have on hand. Once we plugged this in we were able to transfer an average of four million bytes before the handshake would hang up. We then modified the software in the 8032 to set the interrupt mask before data transfer and then enabling interrupts after the transfer was complete. After making this software modification we ran the instrument overnight without any hang up. During this time the two instruments exchanged about one gigabyte. I have no idea why it is necessary to set the interrupt mask because, from my knowledge of how the 6502 works, no such problem should occur.

Since that time we have modified the 8032 Basic by replacing 12 bytes so that both entrance points to the floating point multiply and the floating point divide routine jump to a user EPROM which we installed in the A000-socket. At this point the integer portion of the two operands is sent to the Motorola 68000 for processing and the result retrieved. The 6502 does most of the necessary computations involving the exponent while the 68000 is handling the integer portion of the arithmetic.

The elapsed time (for multiply) between the start of the data transfer of the 68000 and the end of the data retrieval from the 68000 is about 250 µs, of which 180 µs is devoted exclusively to data transfer. The integer portion of the divide routine takes a little bit longer but not much. The net result is a saving of between 2.1 and 2.3 ms each time a floating point multiply or divide takes place. If a simple FOR. . .NEXT is written wherein a particular transcendental function is performed (eg, arc tangent), the net performance improvement ranges from 2.6 times to 3.0 times depending upon the particular transcendental function involved.

Now about the 68000 hardware; this system was designed for maximum simplicity rather than for smallest chip count. For this reason LSTTL was used for interfacing rather than PIA chips since an oscilloscope can be used to determine the content of the TTL chips, but not the PIAs! (Now that I have the system debugged I might be inclined to try PIAs on a future attempt.) The complete board contains 25 ICs including the 68000. There are nine 2kx9 static RAMs, one of which is used by the 8032. There are two 512x9 bootstrap PROMs containing a mini-monitor, plus the multiply and divide code. The remaining chips are used for decoding and interfacing purposes. I believe this proves conclusively my contention that it is possible to build a simple system using the 68000 microprocessor!

The point of all this is that I believe the 68000, not the 6809, is the logical successor to the 6502. After all, the 6502 was noted for being significantly faster than the other microprocessor chips of its day. On the other hand the 6809 bears the dubious distinction of being unquestionably the slowest microprocessor of its generation, while the 68000 is the fastest. Like the original 6502 very simple yet useful systems can be built using the 68000. The 68000 even has a zero page addressing mode which, like the 6502, operates significantly faster and uses less memory space than the longer forms of addressing. Further, the zero page in the 68000 is 64 kbytes wide!

I predict that it will be some time before home computer enthusiasts will complain about the lack of zero page space in the 68000 as they now complain about the lack of such space in 6502 systems.

The currently high price of the 68000 is a temporary inconvenience which will surely be cured as a number of second sources are now coming on line. The 68000 has been available from Hitachi for some time now, and Rockwell will be selling parts shortly. There are a number of other second sources for this part and it is possible that some of these are already on line without my knowledge. In any event, how cheap must a processor be for use with a system including a 24x90 CRT, a dual floppy disk drive, and a good quality printer?

I would be very much interested to hear of other persons' experiences with the 68000 and I am very willing to exchange software and other information on the 68000 with anyone who does not plan to compete with us by manufacturing environmental noise monitors! (I emphasise the word *exchange*.)

(Since writing this, Hal has gone on to develop an add-on board which gives 68000 power to the 8032 SuperPET; he's selling this for $600 in the States but it's not yet available in this country. If you want to contact Hal, write directly to him at Digital Acoustics Inc, 1415 E McFadden, Suite F, Santa Ana, CA92705, tel (714) 835 4884 — Ed.)

sinclair ZX81 PERSONAL COMPUTER





Sinclair ZX81 Personal Comp

the heart of a system that grows with you.



1980 saw a genuine breakthrough – the Sinclair ZX80, world's first complete personal computer for under £100. Not surprisingly, over 50,000 were sold.

In March 1981, the Sinclair lead increased dramatically. For just £69.95 the Sinclair ZX81 offers even more advanced facilities at an even lower price. Initially, even we were surprised by the demand – over 50,000 in the first 3 months!

Today, the Sinclair ZX81 is the heart of a computer system. You can add 16-times more memory with the ZX RAM pack. The ZX Printer offers an unbeatable combination of performance and price. And the ZX Software library is growing every day.

Lower price: higher capability
With the ZX81, it's still very simple to teach yourself computing, but the ZX81 packs even greater working capability than the ZX80.

It uses the same micro-processor, but incorporates a new, more powerful 8K BASIC ROM – the 'trained intelligence' of the computer. This chip works in decimals, handles logs and trig, allows you to plot graphs, and builds up animated displays.

And the ZX81 incorporates other operation refinements – the facility to load and save named programs on cassette, for example, *and* to drive the new ZX Printer.



New BASIC manual

Every ZX81 comes with a comprehensive, specially-written manual – a complete course in BASIC programming, from first principles to complex programs.

Kit: £49.95

Higher specification, lower price – how's it done?
Quite simply, by design. The ZX80 reduced the chips in a working computer from 40 or so, to 21. The ZX81 reduces the 21 to 4!

The secret lies in a totally new master chip. Designed by Sinclair and custom-built in Britain, this unique chip replaces 18 chips from the ZX80!

New, improved specification

- Z80A micro-processor – new faster version of the famous Z80 chip, widely recognised as the best ever made.
- Unique 'one-touch' key word entry: the ZX81 eliminates a great deal of tiresome typing. Key words (RUN, LIST, PRINT, etc.) have their own single-key entry.
- Unique syntax-check and report codes identify programming errors immediately.
- Full range of mathematical and scientific functions accurate to eight decimal places.
- Graph-drawing and animated-display facilities.
- Multi-dimensional string and numerical arrays.
- Up to 26 FOR/NEXT loops.
- Randomise function – useful for games as well as serious applications.
- Cassette LOAD and SAVE with named programs.
- 1K-byte RAM expandable to 16K bytes with Sinclair RAM pack.
- Able to drive the new Sinclair printer.
- Advanced 4-chip design: micro-processor, ROM, RAM, plus master chip – unique, custom-built chip replacing 18 ZX80 chips.

Built: £69.95

Kit or built – it's up to you!
You'll be surprised how easy the ZX81 kit is to build: just four chips to assemble (plus, of course the other discrete components) – a few hours' work with a fine-tipped soldering iron. And you may already have a suitable mains adaptor – 600 mA at 9 V DC nominal unregulated (supplied with built version).

Kit and built versions come complete with all leads to connect to your TV (colour or black and white) and cassette recorder.



ter-



Available now- the ZX Printer for only £49.95

Designed exclusively for use with the ZX81 (and ZX80 with 8K BASIC ROM), the printer offers full alpha-numerics *and* highly sophisticated graphics.

A special feature is COPY, which prints out exactly what is on the whole TV screen without the need for further intructions.

At last you can have a hard copy of your program listings – particularly useful when writing or editing programs.

And of course you can print out your results for permanent records or sending to a friend.

Printing speed is 50 characters per second, with 32 characters per line and 9 lines per vertical inch.

The ZX Printer connects to the rear of your computer – using a stackable connector so you *can* plug in a RAM pack as well. A roll of paper (65 ft long x 4 in wide) is supplied, along with full instructions.

16K-byte RAM pack for massive add-on memory.

Designed as a complete module to fit your Sinclair ZX80 or ZX81, the RAM pack simply plugs into the existing expansion port at the rear of the computer to multiply your data/program storage by 16!

Use it for long and complex programs or as a personal database. Yet it costs as little as half the price of competitive additional memory.

With the RAM pack, you can also run some of the more sophisticated ZX Software – the Business & Household management systems for example.

How to order your ZX81

BY PHONE – Access, Barclaycard or Trustcard holders can call 01-200 0200 for personal attention 24 hours a day, every day.

BY FREEPOST – use the no-stamp-needed coupon below. You can pay by cheque, postal order, Access, Barclaycard or Trustcard.

EITHER WAY – please allow up to 28 days for delivery. And there's a 14-day money-back option. We want you to be satisfied beyond doubt – and we have no doubt that you will be.

To: Sinclair Research Ltd, FREEPOST 7, Cambridge, CB2 1YY. **Order**

Qty	Item	Code	Item price £	Total £
	Sinclair ZX81 Personal Computer kit(s). Price includes ZX81 BASIC manual, excludes mains adaptor.	12	49.95	
	Ready-assembled Sinclair ZX81 Personal Computer(s). Price includes ZX81 BASIC manual and mains adaptor.	11	69.95	
	Mains Adaptor(s) (600 mA at 9 V DC nominal unregulated).	10	8.95	
	16K-BYTE RAM pack.	18	49.95	
	Sinclair ZX Printer.	27	49.95	
	8K BASIC ROM to fit ZX80.	17	19.95	
	Post and Packing.			2.95

☐ Please tick if you require a VAT receipt TOTAL £_____

*I enclose a cheque/postal order payable to Sinclair Research Ltd, for £_____

*Please charge to my Access/Barclaycard/Trustcard account no.

*Please delete/complete as applicable. _____

Please print.

Name: Mr/Mrs/Miss _____

Address: _____

_____

FREEPOST – no stamp needed. PCW 10

sinclair

ZX81

6 Kings Parade, Cambridge, Cambs., CB2 1SN.
Tel: (0276) 66104 & 21282.

How the ZX81 compares with other personal computers

SYSTEM IDENTIFICATION		ZX81	ZX80	ACORN ATOM	APPLE II PLUS	PET 2001	TRS 80 LEVEL I	TRS 80 LEVEL II
ROM		8K	4K	8K	8K	14K	4K	12K
GUIDE PRICE	Basic unit – inc. VAT	£70	£100	£175	£630	£435	£290	£375
	Unit plus 16K RAM (*12K RAM)	£120	£150	£285*	£630	£530	£360	£375
COMMANDS	LIST, LOAD, NEW, RUN, SAVE	●	●	●	●	●	●	●
STATEMENTS	PRINT, INPUT, LET, GOTO, GOSUB/RETURN, FOR/NEXT IF/THEN	●	●	●	●	●	●	●
	STEP	●		●	●	●	●	●
	TAB	●			●	●	●	●
ARITHMETIC	ABS, RND	●	●	●	●	●	●	●
FUNCTIONS	INT	●			●	●	●	●
	ATN, COS, EXP, LOG, SGN, SIN, SQR, TAN	●			●	●		●
	ARCSIN, ARCOS	●						
STRING	CHR$	●	●		●	●		●
FUNCTIONS	LEN	●		●	●	●		●
	ASC(CODE), STR$, VAL, INKEY$	●				●		●
NUMBERS	FLOATING PT $\pm 10^{\pm 38}$	●			●	●	●	●
	INTEGERS		●	●	●	●		●
NUMERIC	A-Z			●			●	
VARIABLES	AA-ZØ				●	●		●
	An-Zn, n=any alphanumeric string	●	●					
STRING	A$ & B$						●	
VARIABLES	A$ to Z$	●	●	●				
	An$ to Zn$ n=any alphanumeric character				●	●		●
NUMERIC	SINGLE DIMENSIONAL		●	●			●	
ARRAYS	MULTI DIMENSIONAL	●			●	●		●
DISPLAY	ROWS	24	24	16	24	25	16	16
	COLUMNS	32	32	32	40	40	64	64
	LOW RES GRAPHICS (<7000 pixels)	●	●	●	●	●	●	●
	HI RES GRAPHICS (>40000 pixels)			●	●			
SPECIAL	USR (CALL, LINK)	●	●	●	●	●		●
FEATURES	PEEK, POKE (OR EQUIV)	●	●	●	●	●		●

Sinclair software on cassette.



The unprecedented popularity of the ZX Series of Sinclair Personal Computers has generated a large volume of programs written by users.

Sinclair has undertaken to publish the most elegant of these on pre-recorded cassettes. Each program is carefully vetted for interest and quality, and then grouped with others to form single-subject cassettes.

Software currently available includes games, junior education, and business/household management systems. You'll receive a Sinclair ZX Software catalogue with your ZX81 – or see our separate advertisement in this magazine.

The ultimate course in ZX81 BASIC programming.

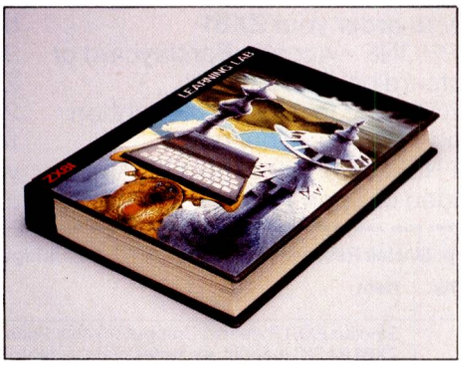

Some people prefer to learn their programming from books. For them, the ZX81 BASIC manual is ideal.

But many have expressed a preference to learn *on* the machine, *through* the machine. Hence the new cassette-based ZX81 Learning Lab.

The package comprises a 160-page manual and 8 cassettes. 20 programs, each demonstrating a particular aspect of ZX81 programming, are spread over 6 of the cassettes. The other two are blank practice cassettes.

Full details with your Sinclair ZX81.

If you own a Sinclair ZX80...

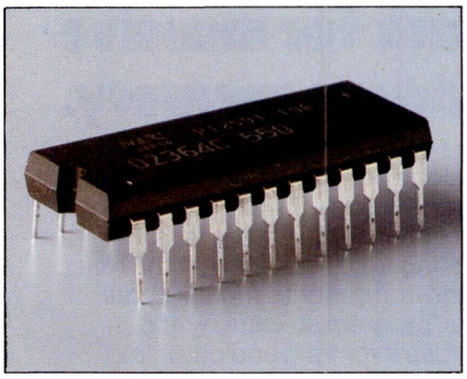

The new 8K BASIC ROM used in the Sinclair ZX81 is available to ZX80 owners as a drop-in replacement chip. (Complete with new keyboard template and operating manual.)

With the exception of animated graphics, all the advanced features of the ZX81 are now available on your ZX80 – including the ability to drive the Sinclair ZX Printer.

sinclair
ZX81

6 Kings Parade, Cambridge, Cambs., CB2 1SN.
Tel: (0276) 66104 & 21282.



CALCULATOR CORNER

Compiled by Dick Pountain.

Yet more from Casio

A veritable deluge of new product from Casio this autumn continues with the fx-702p and fx-9000p.

The 702p is Casio's reply to the Sharp PC1211. The sales literature shows a machine of similar 'sideways' format to the PC1211, but with an alphabetical order rather than QWERTY keyboard. The language is Basic, memory is 1888 bytes and many of the stats and maths functions are carried over from the calculators, including regression analysis. A printer will be available and the price will be around £115.

The fx-9000 is a microcomputer with built in VDU, but may interest calculator users since it works to calculator precision, unlike most micro Basics. It, too, has many built in maths and stats functions; a direct calculator mode plus program storage by removable CMOS RAM modules and an optional matrix handling Basic make it clear that Casio is aiming at scientific rather than hobby or business users. The price is expected to be PET-like. See Benchtests on both machines here soon.

500 Fanfare

A user group has been formed for Casio fx-501/502p owners, and the first issue of its newsletter *500 Fanfare* has just reached me. It contains several games programs plus a nice gossip column and I hope it will go far, which seems likely given the volume of mail I receive from 500 owners.

The first issue contains amusingly slighting references to my good self, speculating on my existence or otherwise, due to my poor record of answering letters and/or publishing readers' programs. To set the record straight, I do exist after a fashion, but lack of time prevents my answering letters, and of space my publishing any but the most unusual of programs.

Get your copy by sending a stamped addressed envelope to: Max Francis, 38 Grymsdyke, Great Missenden, Bucks HP16 0LP. Tel: 02406 5436.

Texas quirk

The Texas TI-51-III is a budget-priced (£20.25) and programmable calculator, which is also subject to alphanumeric quirks, as discovered by Iain Stewart of Alva, Scotland. Here is his own account of how to extract the alphas from it.

Enter the number — 1858 into memory 9 and then (even though there is nothing in the (program) press 2nd R/S, the run/stop instruction, and a capital 'A' will appear on the screen! Now switch off/switch on, and repeat the above with:

—1648 which gives a small 'b'; or — 1748 which gives a capital 'C'; or — 1848 which gives a small 'd'.

More interestingly, after whichever one of the above four sequences you want, press CE and *then* press any random string of numbers. . . eg, 4418365. Sure enough, the A or b or C or d will be pushed along the screen — just as if it was a legitimate number! It is also easy to get several letters on to the screen at once — in fact, even to fill the screen with letters.

Let's say that you want 'bbC' on your screen, for instance. Well, first I must digress a little. These four numbers above (—1858 for A, etc) have the following values, ignoring the —1 at the beginning and the 8 at the end: —85 for A; 64 for b; 74 for C; and 84 for d. Henceforth I will refer to these middle portions as the 'codes' for each letter.

Digression over; no for the crucial point. *The codes can be strung together to give character strings.* Thus the code for bbC, which was my example above, is simply 646474. Now re-attach the —1 and the 8 to this code. . . to get, in the case of bbC, the number —16464748. Switch off/switch on and enter *this* number into memory 9; press 2nd R/S as before and — hey presto — the string bbC appears on the screen! Now press CE and *then* press 3 — and the screen now reads bbC3, the channel on TV which we're all hoping will come soon. (Continue pressing some more numbers and you can have bbC37582 if you want.)

I'll come back later to how you can fill the whole screen with letters. At the moment, I know, it seems impossible; after all, to get (say) ACbbCdAb you would have to enter —1857464647484-85648 into memory 9, which is far too long. All will be revealed below.

Just why does all this happen? If you enter learn mode at step 00 (by pressing 2nd RST *then* 2nd LRN), and step through the program, then it seems totally empty, hardly surprising since you never touched it! — *until* you reach step 17 or thereabouts, when suddenly you are confronted with the keycode for INV (inverse), followed by a lot of nonsense like 2nd DEG (degree mode, of all things!) or 2nd FIX (fix-decimal format key). This garbage usually continues until roughly step 20, the last piece of the garbage invariably being 2nd COSH (hyperbolic cosine key); from then on the program is empty. Why this should cause letters to appear on the screen is quite beyond me.

It seems plausible that the hexadecimal machine-code ROM has somehow been tapped, although I have never managed to get E or F; perhaps some readers will find a way. Incidentally, if you leave out the minus signs in front of the memory 9 inputs above, then the output is the same sequence of letters, except that there is a number '1' before them; for instance, while — 17485648 gives CAb as expected, 17485648 gives 1CAb. Another point: the terminator number does not *have* to be 8. . . 9 works too. Similarly, in the *positive case only* (ie, without minus sign), the first digit does not *have* to be 1. . . anything except zero works, in which case the chosen digit dutifully appears before the letter string — just as the 1 did, in fact.

I have had no success in unravelling this, but by bashing lots of numbers into memory 9 and running, I have come up with more and more intriguing results. By far the most surprising result I have come across so far is this: enter 1.2374858 STC 9, then enter 3.78 EE 8 +/— SUM 9. Thus 1.0374858378 is now in memory 9. Now press CLR, then press 2nd R/S. Unbelievably, the calculator switches off! There is no way to switch it back on again except to 'really' switch it off and *then* to switch it on again. Do so quickly, because the battery is drained at a terrific rate in the artificial switched-off state.

To fill the screen with letters, proceed as follows: I will use ACbbCdAb as an example. The first four letters in this string are ACbb; code 85746464. Throw in the —1 and 8 as usual, to get —185-7464648; and now throw in a decimal point as well, between the eighth and ninth digits, to get —18574646.48. Store this in memory 9. (Do this by putting —18574646 in first, then pressing .48 INV SUM 9). Similarly, the required number for the second half (CdAb) of the letter string is —17484856.48; store this number in memory *eight* (8). Now enter learn mode at step 00, by pressing 2nd RST 2nd LRN, and *replace* all the empty steps, *and* both the 2nd COSH keys (there will be two of them) by INV — *until* you get to the batch of empty steps after your second encounter with a 2nd COSH. Do *not* replace these with INV; rather, replace the first two of them with 2nd R/S 2nd RST.

Now, after all this, simply press 2nd LRN 2nd RST 2nd R/S. The required letter string will appear on the screen at last.

Trails of leading zeroes are possible — eg, C0000144. I will use this number as an example. To obtain it, press 985 STO 9 — which simply stored 985 in memory 9 — and then press 2nd SST 2nd SST 2nd SST. . . on and on and on like this. After some time (about 20 steps), '9A' will built up on the screen. Keep going; the 9A will soon disappear, leaving a string of zeroes. But don't stop now; keep going until there is a string of *five* zeroes, as required. Then press 144. The display screen will now read 00000144, as was wanted.

For all I know, these discoveries may be only a tiny fraction of the quirks which can be exploited. Perhaps readers will spot more.

Computer world

Kraftwerk's new album 'Computer World' has a track called 'Pocket Calculator' which uses the 502p music facility to good effect. The album is recommended, except to those of nervous disposition.

NEWCOMERS-START HERE

This is our unique quick-reference guide, reprinted every month to help our readers pick their way through the most important pieces of (necessary) jargon found in PCW. While it's in no way totally comprehensive, we trust you'll find it a useful introduction. Happy microcomputing!

Welcome to the confusing world of the microcomputer. First of all, don't be fooled; there's nothing complicated about this business, it's just that we're surrounded by an immense amount of necessary jargon. Imagine if we had to continually say 'numbering system with a radix of 16 in which the letters A to F represent the values ten to 15' when instead we can simply say 'hex'. No doubt soon many of the words and phrases we are about to explain will eventually fall into common English usage. Until that time, *PCW* will be publishing this guide — every month.

We'll start by considering a microcomputer's functions and then examine the physical components necessary to implement these functions.

The microcomputer is capable of receiving information, *processing* it, storing the results or sending them somewhere else. All this information is called *data* and it comprises numbers, letters and special symbols which can be read by humans. Although the data are (yes, it's plural) accepted and output by the computer in 'human' form, inside it's a different story — they must be held in the form of an electronic code. This code is called *binary* — a system of numbering which uses only 0s and 1s. Thus in most micros each character, number or symbol is represented by eight binary digits or *bits* as they are called, ranging from 00000000 to 11111111.

To simplify communication between computers, several standard coding systems exist, the most common being *ASCII* (American Standard Code for Information Interchange). As an example of this standard, the number five is represented as 00110101 — complicated for humans, but easy for the computer! This collection of eight bits is called a *byte* and computer freaks who spend a lot of time messing around with bits and bytes use a halfway human representation called *hex*. The hex equivalent of a byte is obtained by giving each half a single character code (0—9,A—F): 0=0000, 1=0001, 2=0010, 3=0011, 4=0100, 5=0101 . . . . . E=1110 and F=1111. Our example of 5 is therefore 35 in hex. This makes it easier for humans to handle complicated collections of 0s and 1s. The machine detects these 0s and 1s by recognising different voltage levels.

The computer processes data by reshuffling, performing arithmetic on, or by comparing them with other data. It's the latter function that gives a computer its apparent 'intelligence' — the ability to make decisions and to act upon them. It has to be given a set of rules in order to do this and, once again, these rules are stored in *memory* as bytes. The rules are called *programs* and while they can be input in binary or hex (*machine code* programming), the usual method is to have a special program which translates English or near-English into machine code. This speeds programming considerably; the nearer the *programming language* is to English, the faster the programming time. On the other hand, program execution speed tends to be slower.

The most common microcomputer language is *Basic*. Program instructions are typed in at the keyboard, to be coded and stored in the computer's memory. To *run* such a program the computer uses an *interpreter* which picks up each English-type *instruction*, translates it into machine code and then feeds it into the *processor* for execution. It has to do this each time the same instruction has to be executed.

Two strange words you will hear in connection with Basic are *PEEK* and *POKE*. They give the programmer access to the memory of the machine. It's possible to read (PEEK) the contents of a byte in the computer and to modify a byte (POKE).

Moving on to *hardware*, this means the physical components of a computer system as opposed to *software* — the programs needed to make the system work.

At the heart of a microcomputer system is the central processing unit *(CPU)*, a single microprocessor chip with supporting devices such as *buffers*, which 'amplify' the CPU's signals for use by other components in the system. The packaged chips are either soldered directly to a printed circuit board *(PCB)* or are mounted in sockets.

In some microcomputers, the entire system is mounted on a single, large, PCB; in others a *bus system* is used, comprising a long PCB holding a number of interconnected sockets. Plugged into these are several smaller PCBs, each with a specific function — for instance, one card would hold the CPU and its support chips. The most widely-used bus system is called the *S100*.

The CPU needs memory in which to keep programs and data. Microcomputers generally have two types of memory, *RAM* (Random Access Memory) and *ROM* (Read Only Memory). The CPU can read information stored in RAM — and also put information into RAM. Two types of RAM exist — *static* and *dynamic;* all you really need know is that dynamic RAM uses less power and is less expensive than static, but it requires additional, complex, circuitry to make it work. Both types of RAM lose their contents when power is switched off, whereas ROM retains its contents permanently. Not surprisingly, manufacturers often store interpreters and the like in ROM. The CPU can only read the ROM's contents and cannot alter them in any way. You can buy special ROMs called *PROMs* (Programmable ROMs) and *EPROMs* (Eraseable PROMs) which can be programmed using a special device; EPROMs can be erased using ultra-violet light.

Because RAM loses its contents when power is switched off, *cassettes* and *floppy disks* are used to save programs and data for later use. Audio-type tape recorders are often used by converting data to a series of audio tones and recording them; later the computer can listen to these same tones and re-convert them into data. Various methods are used for this, so a cassette recorded by one make of computer won't necessarily work on another make. It takes a long time to record and play back information and it's difficult to locate one specific item among a whole mass of information on a cassette; therefore, to overcome these problems, floppy disks are used on more sophisticated systems.

A floppy disk is made of thin plastic, coated with a magnetic recording surface rather like that used on tape. The disk, in its protective envelope, is placed in a disk drive which rotates it and moves a *read/write head* across the disk's surface. The disk is divided into concentric rings called *tracks*, each of which is in turn subdivided into *sectors*. Using a program called a *disk operating system*, the computer keeps track of exactly where information is on the disk and it can get to any item of data by moving the head to the appropriate track and then waiting for the right sector to come round. Two methods are used to tell the computer where on a track each sector starts: *soft sectoring* where special signals are recorded on the surface and *hard sectoring* where holes are punched through the disk around the central hole, one per sector.

Half-way between cassettes and disks is the *stringy floppy* — a miniature continuous loop tape cartridge, faster than a cassette but cheaper than a disk system. *Hard disk* systems are also available for microcomputers; they store more information than floppy disks, are more reliable and information can be transferred to and from them much more quickly.

You, the user, must be able to communicate with the computer and the generally accepted minimum for this is the visual display unit *(VDU)*, which looks like a TV screen with a typewriter-style *keyboard;* sometimes these are built into the system, sometimes they're separate. If you want a written record *(hard copy)* of the computer's output, you'll need a *printer*.

The computer can send out and receive information in two forms — *parallel* and *serial*. Parallel input/output *(I/O)* requires a series of wires to connect the computer to another device, such as a printer, and it sends out data a byte at a time, with a separate wire carrying each bit. Serial I/O involves sending data one bit at a time along a single piece of wire, with extra bits added to tell the receiving device when a byte is about to start and when it has finished. The speed that data is transmitted is referred to as the *baud rate* and, very roughly, the baud rate divided by ten equals the number of bytes being sent per second.

To ensure that both receiver and transmitter link up without any electrical horrors, standards exist for serial interfaces; the most common is *RS232* (or *V24)* while, for parallel interfaces to printers, the *Centronics* standard is popular.

Finally, a *modem* connects a computer, via a serial interface, to the telephone system allowing two computers with modems to exchange information. A modem must be wired into the telephone system and you need British Telecom's permission; instead you could use an *acoustic coupler*, which has two obscene-looking rubber cups into which the handset fits, and which has no electrical connection with the phone system — British Telecom isn't so uppity about the use of these.



COMPUTER ANSWERS

Send your queries to: Sheridan Williams, 35 St Julian's Road, St Albans, Herts. Please note that Sheridan can no longer answer questions on an individual basis, so please don't send an SAE with your query.



Atom memory

I have heard a serious criticism of the Atom, that it isn't possible to have more than 21k of continuous memory. Is this true? Also could you tell me the Atom's maximum amount of memory and are the 1k RAM sets merely pairs of 2114s? Finally, would it be possible to use the Atom for word processing?
Mark Dunn, London.

Taking your questions in order, it is not true that you are limited to 21k RAM. The maximum continuous RAM is in fact 38k. Of this, most of the bottom 1k is used by the Basic interpreter; 7k is assigned for memory-mapped peripherals, although there is absolutely no reason why you should not put RAM here; the next 2k is used by the DOS if present — otherwise it is unused — followed by 256 bytes of floating point variables; a further 22k is available for Basic programs and the last 6k by the VDU, of which some may be unused, depending on which graphics mode you are using.

The RAM sets are indeed pairs of 2114s. They are, in fact, 450 ns low power devices. It is probably not practical to use the Atom as a word processor at the moment due to the small screen size (16 lines of 32 characters), the lack of true lower case letters, the relatively small memory capacity on board and the current lack of disks. However, Acorn does have an 80 by 24 VDU card which is compatible with the Atom, although as yet there is no software to drive it, and it says that disks are on the way.
Richard Meredith, Atom User Group.

Atom for business

In your review of the Atom you implied that the Atom is not much use for business applications. Why is it unsuitable? Is it lack of RAM or what? Which book would you recommend to assist me in programming for business applications?
S R Wyndham, Reading, Berks.

The main drawback to the use of the Atom in business applications is the non-standard Basic, which makes it very difficult to transfer packages originally intended for other machines to the Atom. Other drawbacks are the small screen size, which makes it difficult to display large amounts of information simultaneously, in a coherent manner and the lack of disks.

These are all problems which can be overcome but the question is, is it worth the complications when compared to other systems, which don't have them to start with?

From the specifications that I have seen, the BBC micro looks as though it will have potential in this area for considerably less cost than it would take to bring the Atom up to the same level.

With the non-standard nature of Atom Basic it is difficult to recommend a suitable book; however, it is the principles involved that are important so any book that deals with this, rather than the actual details of programming, should be helpful.
Richard Meredith, Acorn Atom Users Group.

Acorn produces extension memory boards and many other peripherals, possibly the most useful being the disk interface. It s a very well thought out system that allows direct access files; additionally, any file can be locked under software control. The DOS is particularly impressive.
Alan Taylor

Sorcerer software source sought

I have an Exidy Sorcerer which I have modified to interface with my amateur radio equipment. The mods involve the UART, parallel port, keyboard scan and a tremendous amount of screening.

I have mastered the hardware and written quite lengthy machine code programs but am suffering from a distinct lack of information when it comes to software in general — monitor entry points for example. Can you give me a source of information specifically on Sorcerer software?
F J Mellish, Horsham, W Sussex

There are two parts to your question. Firstly, you need sources of Sorcerer software information, and secondly, amateur radio enthusiasts who have mastered the same problems. Protolec Electronics, 34 Pier Avenue, Tankerton, Whitstable, Kent CT5 2HJ is interested in the Sorcerer and may be able to help. The European Sorcerer Club is C Morle, 32 Watchyard Lane, Formby, Liverpool L37 3JU. Also Liverport Data Products, The Ivory Works, St Ives, Cornwall TR26 2HF, tel 0736 798157, has offered to help. I would have thought that the Radio Society of Great Britain, 35 Doughty Street, London WC1N 2AE might also have been of help.
SW

Sharper Basic

Please could you advise me on how to execute double precision arithmetic from Basic on a Sharp MZ-80K microcomputer?
A I Carruthers, Preston, Lancs.

This is a similar question to one published in the July edition of *PCW* and I will repeat myself; why, if you want to do double precision arithmetic, did you buy a MZ-80K? There are excuses for hobbyists but a serious computer user should have written a specification, *before* he bought a system and chosen a system that met that spec. Anyway, I approached Knight's TV & Computers, 108 Rosemount Place, Aberdeen AB2 4YW (0224 630526), where Graham Knight informed me that he was leaving for Japan to bring back a 16-digit Basic for the MZ-80K and it will be available by the time that you read this.
SW

Chain chance

Could you tell me if it's possible to CHAIN or overlay Microsoft Fortran programs running under CP/M?
R D Redman, Bristol

If you wish to call a variety of subroutines then Microsoft Fortran will readily let you do this, as with mainframe Fortran. However, all these subroutines must reside in memory along with the calling program.

If your objective is to use an overlay technique to run programs too long to fit into memory, the problem is more difficult and is not catered for by Microsoft Fortran on its own. However, Lifeboat Associates has advised that this can now be achieved by using Phoenix Software Associates' Plink-II linkage editor along with the Microsoft Fortran, when operating under CP/M.
P L McIlmoyle

TRS-80 upgrade

How can I upgrade my TRS-80 expansion to 32k from 0k?
Stephen Wood, Blackburn, Lancs

Just plug the RAM chips into the sockets provided. No track cutting is required. Expanding by only 16k means putting the RAM into sockets 9 to 16; trust Tandy to get it back to front.
S Bird, Oxford Micro Club

Insurance with a micro

As an insurance broker I am planning to computerise my office to the extent of a full accounts package and a full range of programs to cover producing documents, statements, reports, etc. The only microcomputers available here in Athens with sufficient support for business use seem to be the Apple II and the full range of Ohio Scientific.

I am contemplating either an Apple or an Ohio C4P or C8P with dual 8in floppies:
a. Are these systems reasonably comparable for my use, or what are the significant differences?
b. Would it be worth paying the extra for a C3 system allowing the use of CP/M? Would the Apple CP/M conversion be just as useful?
c. Could you comment on the use of a Microperipherals 99G matrix printer and a 'refurbished' IBM I/O 735 typewriter for general use and letter quality respectively?
d. A cheap multi-user facility with terminals for the Chief Executive, the accounts department, and a word-processing desk in addition to the central unit sounds attractive. Is this being over ambitious?
E T Moore, Nasco Hellas Ltd, Athens

a. The major difference which strikes me is that the Ohio Scientific machines are part of a large

family of computers and associated peripherals, while the Apple II has only the Apple III as stable mate and that is not yet readily available outside the US. So there is perhaps greater scope for moving to bigger machines with Ohio. On the other hand, there is a very wide range of equipment and accessories available for the Apple.

b. In your kind of application there is much to recommend being able to run CP/M, as this makes available a wide range of effective and often competitively priced serious commercial software, either written in machine code (like the very popular WordStar word-processing package) or in one of the wide range of languages for which interpreters or compilers are available to run under CP/M. This includes Cobol, Basic, Pascal, Fortran and APL.

The Apple CP/M conversion should also be effective, as this works by adding a Z80 microprocessor to the Apple! Apart from the wide range of software available, CP/M also makes a file handling simpler.

c. I am sorry that I cannot track down any information on the Microperipherals printer, but any reasonable quality dot-matrix printer should be suitable. It is always good practice not to buy too cheap a printer for serious business use, as quality of the printing and reliability will both be important to you.

While an IBM typewriter can certainly be used for letter quality output, daisy-wheel printers are more popular, despite their greater price, as they will print at 45 or even 55 characters per second, compared with about 15 cps for the IBM typewriters.

d. If your system will run CP/M and take 'bank-switching' memory cards, a four station multi-user system should be possible. However, it would be wise to leave this until your initial installation has settled down, so as not to try too much at once. Also you should get more reliability, as the multi-user version of CP/M (MP/M) has been withdrawn and is being re-written.

Ohio Scientific's agents should be able to give you advice as to whether other equipment in its wide range can provide such a multi-user system without using MP/M.

P L McIlmoyle

Help with Mael

I have recently parted company with my 16k PET because of its limitations for business use and have acquired a Mael 2000 with a suite of programs suitable for my business.

The Mael is working very well, but I would like a way to put my limited knowledge of programming the PET to work in writing small programs for general use in the office. Could you recommend material to suit the assembler language on the Mael? The manual gives the full instruction codes but it is a far cry from Microsoft Basic!

Patrick J Morrissey, Athlone, Co. Westmeath, Ireland

If indeed you are not being over modest as to your 'limited' knowledge of programming in Basic, assembler language programm programming may well cause many headaches when writing even small business programs. After all, that's exactly why one of the first major 'high-level' languages (Cobol) was invented! It is unfortunate that there are no high level compilers or interpreters available for the Mael 2000, particularly as the Mael 5000 range supports Cobol, Fortran, RPG II and Basic.

While I'm not aware of any books which help directly with writing assembler language programs for the Mael 2000, I can recommend *How To Program Micros* by W Barden Jr. While written around the 8080, 6800 and 6502 microprocessors, this gives much practical advice on programming which, taken together with your Mael manual, should set you on the right road.

Should you decide that you would like certain programs written for you, or to explore a range of ready-written commercial programs for the Mael 2000, then you could contact M and O Business Systems and Software Ltd, Unit 55, Milton Trading Estate, Abingdon, Oxfordshire; as well as writing software, this company is the UK agent for the Mael 2000 (The Mael 5000 range is handled by Dicoll of Basingstoke.)

P L McIlmoyle

Random reward

Could you suggest a method for obtaining a convincing 'RND' product on MBasic 5.03? MBasic has been altered so that a 'seed' input is now required. My kids know the effect of various seeds and the fun is spoiled as a result.

R Reason, 24 Mitchell Rd, Camborne, Cornwall TR14 7JH.

Mr Reason has promised a £10 reward for the best answer, which will be published. Send your answers directly to him at the above address.

SW

Just to pre-empt the wise guys, we published two machine code subroutines to obtain random numbers in 'Sub Set'. The routine on page 136 of April's issue (Vol 4 no 4) works on the Z80 only and gives a number in the range 0-127; that on page 145 of July's issue (Vol 4 no 7) gives a 16-bit random number and works on the Z80 and 8080/85. It might be possible to patch one of these into MBasic — or maybe someone has a better solution? — Ed.

A/D for '80?

Does anyone make a multi-channel A-to-D converter for the TRS-80 level II?

R H Walker, Cheadle Hulme, Cheshire.

Yes, you can get one from Magnus Microcomputers, 139 The Moors, Kidlington, Oxford OX5 2AF.

S Bird, Oxford Micro Club

Amazed

I was amazed by your comment in the May issue of *PCW* that for a simple word-processing system you would prefer a TRS-80 to a 'widescreen Superboard C1E with CECMON.

Which of the features of the TRS-80 make it superior for this application, bearing in mind the restricted display area, the quality of the lower case letters and the cassette loading problems of the Tandy? Not to mention the more reliable keyboard and greater speed of the Superboard!

S Graham, Belfast

Please remember that I said that my personal preference was for the TRS-80, not that I was making a recommendation.

So far as I am concerned the Tandy scores particularly on ready expandability. I use the genuine Tandy lower-case conversion and find the lower-case letters on the screen to be all that can be desired, with true-descenders, and a clear font. As I use disks, I avoid the admitted problems with tape-loading. I find it hard to see that serious business word-processing could be done using tapes alone.

I use Newdos as the disk operating system overcomes all problems with keyboard bounce. The speed of the TRS-80 model one seems quite adequate for word-processing but it can be upgraded if you wish.

Finally, I like the word-processing packages available for the TRS-80, in particular Electric Pencil and Scripsit.

P L McIlmoyle



Comart Approved Dealers

Aberdeen
MOM Offshore
21 Bon Accord Street
Tel: 0224 22863

Belfast
O & M Systems
95 Dublin Road
Tel: 0232 49440

Birmingham
Byteshop Computerland
94/96 Hurst Street
Tel: 021 622 7149

Bristol
Senton
27 Nicholas Street
Tel: 0272 276132

Cambridge
Toltec
24 Thompson Lane
Tel: 0223 312347

Cheshire
Holdene
82a Water Lane
Wilmslow
Tel: 0625 529486

Dublin
Lendac Data Systems
8 Dawson Street
Tel: 0001 372052

Edinburgh
Holdene Micro Systems
Bristo Street
Tel: 031 668 2727

Glasgow
Byteshop Computerland
61 Waterloo Street
Tel: 041 221 7409

Leeds
Holdene Micro Systems
11/12 Rampart Road
Tel: 0532 459459

London
Byteshop Computerland
324 Euston Road, W1
Tel: 01-387 0505

Digitus
9 Macklin Street, WC2
Tel: 01-405 6761

Jarogate
67 Tulsemere Road, SE17
Tel: 01-670 3674

Manchester
Byteshop Computerland
Piccadilly Station Approach
Tel: 061 236 4737

NSC Computers
29 Hanging Ditch
Tel: 061 832 2269

Newbury
Newbear Computing Store
40 Bartholomew Street
Tel: 0635 30505

Nottingham
Byteshop Computerland
92a Upper Parliament Street,
NG1 6LF
Tel: 0602 40576

Sheffield
Hallam Computer Systems
451 Eccleshall Road
Tel: 0742 663125

Southampton
Xitan Systems
23 Cumberland Place
Tel: 0703 38740

Suffolk
Eurotec Consultants
Little Waldingfield,
Sudbury
Tel: 0787 247959

Surrey
Gemlines
184 London Road, KT2 6QU
Tel: 01-546 9944

Warwicks
Business & Leisure
Microcomputers
Kenilworth
Tel: 0926 512127

Watford
Lux Computer Services
108 The Parade,
WD11 2AW
Tel: 0923 29513

Worthing
Ace Computing Services
1-11 Bridge Road
Tel: 0903 35411

Comart Ltd,
St. Neots, Cambs.
Tel (0480) 215005
Telex 32514 Comart G.

comart communicator

The clean simplicity outside...



NOW WITH 5 MEGABYTE HARD DISK DRIVE

...conceals the pedigree inside.

First came the Communicator CP100, a British designed, British made Microcomputer; Z80A processing power, Twin Floppy Disk Drives, S100Bus Construction, CP/M operating system, neat compact styling, and a standard of engineering reliability uncommon in such a new system.

In just a few short months Communicator was the focal point of a new range of Microcomputers.

It offered floppy disk drive options, double density, quad capacity, and 80 track quad capacity. It offered floppy disk and s100 bus expansions. It had a 20 Megabyte Hard Disk Sub System and Cassette Back up.

Now there is Communicator CP500, a dedicated system within a System. CP500 provides over 5 Megabytes of on-line data storage with its integral 5 MegaByte 5" Winchester Technology Hard Disk and very high capacity floppy disk drive.

To the user, CP500 means greatly improved utility. It will support larger scale computer operations at several times the speed and commence of the conventional floppy disk systems. And it offers greater application flexibility, with reduced operator involvement in diskette management routines.

Find out more about the Communicator range today.

comart

SPECIALISTS IN MICROCOMPUTERS

A member of the Comart Group of Companies.

The new flexible multi-user system

The Vector Graphic 5005 from Almarc

with 5 megabyte Winchester, 630k floppy disc

The new Vector 5005 is a multiple-user, multi-tasking hard disc system for general business and word processing applications.

It is a low priced system with highly rated capabilities.

It supports up to a maximum of 5 users and gives 5 megabytes of high-speed totally reliable Winchester disc technology with Vector's automatic error correction feature. It is also MP/M compatible.

Total flexibility means that the VG 5005's terminals can work independently which permits the widest possible range of usage. One user could use Execuplan for financial planning whilst the second user is entering sales information with accounting software and the third may run correspondence simultaneously with Vector's Memorite III word processing software. Each user gets a full 56k bytes of RAM and most other standard CP/M compatible applications software will run on the system e.g. COBOL, FORTRAN, PASCAL, BASIC COMPILER, ALGOL, PL/1 and other statistical and data based management packages.

Up to 5 terminals

The Vector Graphic 5005 is ideal for application packages, such as accounts, stock control, payroll, word processing, financial modelling and solicitors packages, all available from Almarc.

For further information on the VG 5005 write or telephone Almarc. Complete sales and servicing facilities are available throughout the U.K.

Almarc DATA SYSTEMS

Almarc Data Systems Ltd.,
906 Woodborough Road,
Nottingham NG3 5QS.
Tel: (0602) 625035.
Telex: 37407 Almarc/G.

Also at:
Green Street,
High Wycombe,
Bucks. HP11 2RF.
Tel: (0494) 23804.



apple® computer

Level 1 Service Centre
Apple Software Experts:

CESIL II

Barristers' Accounts
Technical "Page" Database

CARDIFF micro COMPUTERS

46 Charles Street
Tel: 373072
OPEN ALL DAY SATURDAYS

ACORN COMPUTER

ATOM IN STOCK

Applesoftware from Leicester Computer Centre

SUPER DISK COPY III

48K & DISK II required, APPLE II or APPLE II PLUS SDC is a menu-driven programme that allows manipulation of all types of files under DOS 3.1, 3.2 and 3.3. SDC is the only disk utility available for the APPLE that combines these features: COPY single files (Integer, Applesoft, Binary, or Text), COPY DOS, COPY entire disk, UNDELETE deleted files, LOCK or UNLOCK files, PLOT of disk usage, and optional rearrangement of files so that they occupy contiguous sectors for improved access times, SDC supports the wildcard character "=" in file specifications. SDC makes the conversion to DOS 3.3 less painful (than MUFFIN) and also allows files to be transferred back to DOS 3.2 since both 13 and 16 sectored disks can be accessed at the same time. **£24.95 + VAT**

the correspondent

by R. Wagner

The Correspondent is an extremely versatile program designed primarily for writing letters and other documents but comes with so many supporting utilities and features that it will be one of your most frequently used diskettes. The screen becomes a window onto a 40 to 80 column page with 4 directional scrolling to see any part of the page just as it will be printed. A special "reading mode" compresses text into a 40 column format for easy proof-reading. Editor functions include full upper/lower case & control character support, character or line insert/delete, paragraph move/copy/delete, forward and reverse tabbing, text centering, fine linking and even math functions! Also featured are split screen capabilities, access/edit text files, single disk copy program, and a global find routine for use as a free form database. You can use it for letters, forms, memos, phone lists, etc. **The Correspondent** is easily the best value of performance and price of any similar program.

Price £34.95 + VAT

Visicalc Utilities

Visicalc Utilities Apple computer program includes
Visiprint – Re-format the printout of your worksheets with variable column widths, additional text headings, dates, page control and numbering If you have a clock card the date & time are automatically included in your printout. Visiprint format files can be saved to disc for future use.
Visiform – Enabling you to list out on your printer or VDU all the worksheet formulae.
Also allows you to display or print those formulae too wide for the Visicalc display area. £34.95 + V.A.T.

Apple World

is here. The fast 3D graphics package that runs on your Apple II plus. Zoom, pan, tilt and scale your own designs on the Apple screen, at only **£29.95 + VAT**

Plus a complete range of "off the shelf" programs for finance, commercial, scientific and education. Keep yourself up to date, send for our "Fact Sheets" giving full program details.

apple® computer
Sales and Service

LEICESTER
computer centre limited

Dept. C10, 67 Regent Road, Leicester LE1 6YF.
Tel: 0533 556268

ANGLIA COMPUTER CENTRE

MICROCOMPUTERS FOR BUSINESS, EDUCATION AND HOME

FOR ALL YOUR BUSINESS, EDUCATION & LEISURE COMPUTER REQUIREMENTS!!!

APPLE II
TRS-80
SHARP
NORTH STAR
HORIZON
TANGERINE
J.K. 101
NASCOM

+PRINTERS AND
OTHER PERIPHERALS
BOOKS**
SOFTWARE*
MAGAZINES**
STATIONERY***

BUSINESS+
INDUSTRIAL
CONTROL

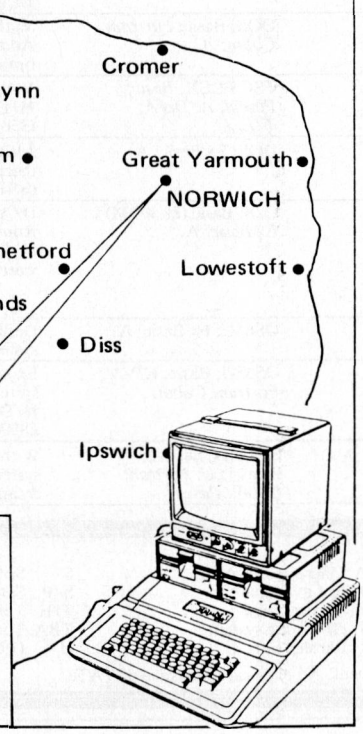

WE ARE HERE!!!

88 St. Benedict's Street
NORWICH NR2 4AB
Tel. (0603) 29652
24hr. Answering Service.

DIRECT ACCESS

IN STORE

'In Store' has been completely updated this month to bring you the very latest from the micro marketplace. I would like to thank all distributors listed for their prompt and comprehensive responses to our enquiries, an indication of the confidence invested in PCW *as a shop window. Any additions or alterations should be addressed to me,* Dick Olney, *PCW*, 14 Rathbone Place, London W1P 1DE.

Machine (Price from)	Main Distributor/s (No. of Dealers)	Hardware	Software	Miscellaneous (Documentation)
ABC 80 (£738)	Datormark Ltd: 97 44896	16-40k RAM; Z80A; C; 12'', 16 x 40 b&w VDU; 4680 bus; IEEE 488; RS232 port.	DOS; Basic (16k ROM;*Fortran; Pascal; A; Multi user Basic.*	Colour video graphics with UHF output. Viewdata compatible. Loudspeaker. Numeric keypad. Options: dual 5¼'' F/D (320k) £895; dual 8'' F/D (2 Mb). BT 1/80. (1)
ACT Series 800 (£3495)	ACT: 021-501 2284 (50)	48k RAM: 6502; dual 5¼'' F/D (800k); 12'', 30 x 64 VDU; 1 S/P; 1 P/P; Multi-screen int. Option: 10-20 Mb H/D	MDOS; Basic; A; *CBasic;* PL/M; *Forth; Fifth; Cesil; Pilot; Fortran.*	IBM compatible K/B. High resolution graphics. Available with dual 8'' F/D (2.4 Mb) £4950 — 4.8 Mb maximum. BT 2/80 (E).
Adler Alphatronic (£1600)	Adler 01-250 1717	48k RAM: 8085Asingle 5¼'' F/D (160k): 12'', 24 x 80 VDU: S/P: P/P	*CP/M: Basic: CBasic: Fortran: Cobol*	With 80 cps printer and dual F/D £2345 (inc CP/M). (S)
Alpha Micro (£5650)	Alpha Micro (UK) Ltd: 01-250 1616 (TBA)	64k — 1 Mb RAM; 16 bit; dual 8'' F/D (2.4 Mb); 6 S/P.	Multi-user OS; Basic; M/A; Pascal; U. *Fortran: Cobol*	Modular. Expands to 1200 Mb, 24 terminals or multiprocessor system. (E)
Altos ACS 8000 (£3398)	Logitek: 02572 66803 (33)	64k RAM; Z80; 1k EPROM; dual 8'' F/D (1 Mb); 2 x RS232 ports; 1 P/P.	CP/M; *Basic; CBasic; Cobol; Pascal; Fortran.*	Expandable to 4-user system with 58 Mb H/D. Maintenance contracts avail; BT 5/80 (S&H).
APL Signet (£1750 or £130pm)	Micro APL: 01-834 2687	64k RAM: Z80A: dual 5¼'' F/D (380k): 2 x RS232 ports.	CP/M: APL: *Basic: U: Fortran: Cobol: Algol: Forth*	Desktop APL computer with self teaching course. (S)
Apple II (£695)	Microsense: 0442 41191 (190)	16-48k RAM; 6502; 8 I/O slots.	OS; Basic; *Pascal; Fortran: Cobol: Pilot*	280 x 192 high resolution graphics; Integer Basic in 6k ROM; Option: single 5¼'' F/D (116k) £349.
Atari 400 (£345-16k)	Ingersoll: 01-226 1200 (40)	16k RAM; 6502; C int; cartridge slot; 12 x 20 TV int; RS232C port; touchpad k/b; Opt: C £40.	OS (10k ROM); Basic (8k ROM). *Pilot: Forth.*	High resolution colour graphics. 4-channel sound. Four games controller/light pen sockets.. BT 10/80. (I/B).
Atari 800 (£645-16k)	As above.	16-48k RAM; 6502; C int; 4 x cartridge slots; 12 x 20 TV int; RS232C port. Opt: single 5¼'' F/D (90k) £345; 16k RAM £65.	As above.	As above. Software & RAM on cartridge modules. Up to 4 disk drives. BT 10/80. (I/B).
Athena 8285 (£5694)	Butel-Comco Ltd: 0703 39890 or 01-202 0262 (TBA)	64k RAM; 8085A; dual 5¼'' F/D (644k); 12'' 25 x 80 VDU; 150 cps printer; RS232 port.	AMOS; T/E; Basic; *Cobol; Fortran; Pascal; APL; M/A.*	Extended ASCII K/B with numeric pad; graphics. Options: dual 8'' F/D (2 Mb); up to 1200 Mb H/D.
Atom (£120)	Acorn: 0223 312772 (35)	2-12k RAM; 8-16k ROM 6502; Full K/B: C int; TV int; 20 I/O lines; 1 P/P.	Basic in 8k ROM; A Cass O/S.	High resolution graphics on bigger model; colour monitor O/P. Loudspeaker. Note also, systems based on Acorn SBC. BT 7/80 (B).
Attache 201 (£8000)	COLT 01-572 3784 (10)	64k RAM; Z80; dual 8'' F/D (2.4 Mb); 12'' 24 x 80 VDU; 180 cps printer.	Basic; *Fortran; Cobol.*	Upgradable to multiuser system with 18 Mb H/D. Full range of business packages included software dealers TBA. (S)
BASF 7120 (£3600)	BASF: 01-388 4200 (12)	64k RAM; Z80A; 3 x 5¼'' F/D (480k); 12'', 24 x 80 VDU; RS232 port; P/P.	DOS;(OASIS) *Ex Basic; Cobol U. A: CP/M*	H/D available soon. Also 7125 with 930K F/D £4280 and 7130 with single F/D (430k) & 5Mb H/D £4950. Disk controller has own Z80A. BT 9/80
Billings BC-12 FD: (£3995)	Mitech: 04862 23131 (TBA)	64k RAM; Z80A; dual 5¼'' F/D (640k); 12'', 24 x 80 b&w (or b&g) VDU.	DOS; Basic; *Fortran; Cobol; A.*	With dual 8'' F/D (2 Mb) £5995. Additional dual 8'' F/D £3000 option: 50MB H/D. (S).
C/09 (£3975)	SWTP Ltd: 01-491 7507 7507 (16)	56k RAM; 6809; dual 8'' F/D (2 Mb); 8'', 16 x 80 VDU; 1 S/P.	TSC FLEX; *Basic; Pascal; A; Dis A; T/E; U.*	VDU is intelligent. Option: 15 Mb H/D £3575; with dual 5¼'' F/D (350k) instead of 8'', £3000. (H)
Canon BX-1 (£3850)	Canon Business Machines (UK) Ltd: 01-680 7700.	64k RAM; 6800; Single 5¼'' F/D (65k); 12'', 25 x 80 VDU; 5 x V24 ports.	DOS; Ex Basic; A.	Also supplied with integral thermal printer instead of VDU. (S&H)
Challenger 1P & C4P (£220 & £395)	CTS: 0706 79332. Millbank Computing: 01-549 7262. Mutek: 0225 743289. U-Microcomputers: 0925 54117 (18)	4-32k RAM; 6502; C int; RS232 port. Options: dual 5¼'' F/D (160k) £550; for C4P dual 8'' F/D (1.15 Mb) and 20MB H/D	O/S; Basic (8k ROM) *Ex Basic;* A.	D/A conv; colour capability. Runs OSI business software on 8'' F/D Plato educational software avail. soon. BT 4/80. (S).
Challenger 2 (£1500)	As above	48k RAM; 6502; dual 8'' F/D (0.5 Mb); RS232 port.	OS65U; Ex Basic; A.	Designed as low cost business system (S).
Challenger C3 (£2334)	As above	32-56k RAM; 6502; 6800; Z80; dual 8'' F/D (1.15 Mb); 2-16 S/P.	OS65U; Basic; *CP/M; Fortran; Cobol.*	Expandable to multi-user (8) system. Options: C3B & C3C H/D units. 74 Mb for about £8500. (S&H).
Clenlo Conqueror (£2475)	Clenlo Computing Systems Ltd: 01-670 4202 (TBA)	64k RAM; Z80; dual 8'' F/D (1 Mb); 3 S/P; 2 P/P.	CP/M; CBasic-2; Pearl 1; *U. Fortran: Cobol: Pascal*	With 2.4Mb F/D £2950. Also H/D systems with 10 Mb H/D & tape drive £5430.

List of Abbreviations

A	Assembler	G/C	Graphics card	M/A	Macro assembler	S	Software
BT	Bench Tested	H	Hardware	N/A	Not available	S/P	Serial port
C	Cassette	H/D	Hard disk	N/P	Numeric pad	T/E	Text editor
E	Extensive	I	Introductory	O/S	Operating system	TBA	To be announced
F/D	Floppy disk	Int	Interface	P/P	Parallel port	U	Utility

Please note: Software items listed in *italic* are not included in the basic price of the equipment. All prices are *exclusive* of VAT.

IN STORE

DIRECT ACCESS

Machine (Price from)	Main Distributor/s (No. of Dealers)	Hardware	Software	Miscellaneous (Documentation)
Comart Communicator (£1995)	Comart 0480 215005 (25)	64k RAM: Z80A: daul 5¼" F/D (780k): 2 S/P: P/P.	CP/M: *Basic: Cobol: Fortran: Pascal*	With 1.5 Mb F/D £2295. Option: 18 Mb H/D. £3395 (S)
Compucolor II (£1175)	Dyad Developments: 08446 729 (TBA)	16-32k RAM; 8080; 13" 32 x 64 8-colour VDU; single 5¼" F/D (51k); RS232 port.	DOS (ROM); Ex-Basic (ROM); A. *M/A: T/E: Fortran: U*	32k version £1295. High resolution graphics. 6-month subscription to user magazine inclusive BT 9/79. (S)
Compucorp 625 (£6000)	Compucorp: 01-952 7860 7860 (17)	48-60k RAM; Z80; dual 5¼" F/D (630k); 9". 16 x 80 VDU; 40 col printer; RS232 port, P/P.	Basic: A; *Fortran; Pascal;* U.	IEEE-488 Controller and S100 int. Many applications packages avail. (E)
Compucorp 655/ 665/675/685 (from £5050)	As above	60k RAM; Z80; Up to 4 x 5¼" F/D (160k-2.4 Mb); 9", 20 x 80 or 12" 20 x 80 or 20" 60 x 80 VDU; 40-col printer; RS232 port.	As above	Prices incl installation and training. Opt: 10-20 Mb H/D
Computermart 2000 DS (£1500)	Computermart: 0603 615089	32-256k RAM. 8085; dual 8" F/D (1-2 Mb); S/P; P/P.	CP/M; *Cis Cobol; Basic; Fortran*	Expandable to multi-user, multi-tasking, multi-processor 96 Mb H/D system (around £15000).
Cromemco System 2, System 3, System Z2H. (£2900/ £4400/£6000)	Datron: 0742 585490. Comart: 0480 215005. MicroCentre: 031-556 7354 (18)	64k RAM; Z80; dual 5¼" F/D (346k) on System 2 & Z2H; dual 8" F/D (1.2 Mb) on Sys 3; 10 Mb H/D on Z2H; S/P; P/P.	CDOS; *Basic; Cobol; Fortran; RPG II; Lisp; A; W/P; Multi-user Basic.*	All systems expandable to multi-user (max 6) Options: dual 8" F/D (996k); 11-22 Mb H/D. BT 10/79 (E).
DAI (£998-48k)	Data Applications (UK): 0285 2588 (7)	48k RAM; 8080; C int; 24 x 60 VDU int; RS232 port; over 20 industrial ints.	Basic (ROM); U.	Colour graphics up to 255 x 335; 3 notes & noise generator; PAL O/P to TV; Paddle int; H maths option. (I). BT 10/80
Diablo 3000 (£6950) (TBA)	Business Computers Ltd: 01-207 3344	32k RAM; 8085; dual 8" F/D (1.3 Mb); 12", 24 x 80 b&w VDU; 45 cps printer.	DOS; Basic; DACL; A; U.	Selection of business packages included (S).
Digital Micro-systems DSC-3 (£3530)	Modata: 0892 41555 (14)	64k RAM; Z80A; dual 8" F/D (1.14 Mb); 4 x RS232 ports; EIA port.	CP/M; CBasic: *Cobol; Fortran: Pascal: PL/I*	Expandable to multiuser system with 10-28 Mb H/D. Extensive software avail. (S)
Digital Micro-systems DSC-4 (£4395)	As above	128k RAM; Z80A; single 8" F/D (500k); 11 Mb H/D; 4 x RS232 ports; 2 P/P.	CP/M; Basic-E; CBasic; *Cobol; Fortran; Pascal.*	Also DSC-3 with 64k RAM. Options; 128k RAM £1295; up to 4 Mb F/D and 20 Mb. H/D. (H).
Durango F-85 (£4995)	Comp Ancillaries: 0784 36455 (12)	64k RAM; 8085; dual 5¼" F/D (1 Mb); 9", 16 x 64 green VDU; 132 col 165 cps printer; N/P.	O/S; DBasic; *CP/M; CBasic; Micro Cobol.*	Up to 5 work stations; fully integrated system. Options: additional dual 5¼" F/D (1 Mb); 12-24 Mb H/D. (S).
Dynabyte 5200 5900 (£2600)	Metrotech 0895-57780 (15)	64k RAM; Z80; S100 bus; 2 ser ports; 1 par port; any com of 5¼" F/D (630k), dual 8" F/D (1Mb), 9/27/45 Mb H/D, 32/64/96 Mb Cart Module Disk.	CP/M; MP/M; CP/Net, CBasic, MBasic Cobol, Fortran, Pascal, PL/1-80	All systems expandable to multi-user and net working; CP/M inc in base price for F/D systems, MP/M for H/D systems.
Equinox 200 (£7500)	Equinox: 01-739 2387 (N/A)	64-512k RAM; Z80; 10 Mb-1200 Mb H/D; 6 x S/P; 1 P/P.	CP/M; CBasic; *Cobol; Fortran.*	Multi-user MVT/FAMOS available in place of CP/M. 16-bit version (Equinox 300) £10,000. (S&H).
Exidy Sorcerer (£695)	Liveport Data Products: 0736 798157 (27)	48k RAM; Z80; RS232 port; 1 P/P; S100 connector; 30 x 64 VDU int. - N/P	O/S; Basic (ROM); *T/E; A; CP/M; Algol; Fortran; Basic; 80. Pascal: W/P*	High-resolution graphics capability; user programmable character set. Option: single 5¼" F/D (316k) £600
Gemini 801 (£1075)	*Gemini: 02403* 22307 (7).	*64k RAM; Z80A; Single 5¼" F/D* (315k); 25 x 80 VDU int; RS232 port. P/P.	*CP/M Basic; Cobol; Fortran; Pascal; A; T/E.*	Up to two integral & two external F/D. Graphics. With no F/D and C int. £750. (S)
Gimix System 68 (£2000)	SEED: 05433 78151: Windrush 0692 405189	16-64k RAM: 6800/6809: dual 5¼" F/D (500k): 2 x RS232 ports.	OS-9: Flex *Basic: Pascal: A: Dis A: T/E: U*	With dual 8" F/D (2 Mb) £2900. Designed as development system for industrial control. (H).
Haywood 3000 (£1925)	Haywood: 01-428 0111. (TBA)	32-64k RAM; Z80A; dual 5¼" F/D (800k); RS232 port; P/P. Opt: 15" 28 x 80 VDU £799.	CP/M; *Basic; Cobol; Fortran; Pascal; W/P.*	Also system 7000 with 48-65k RAM and 8" F/D /2.5 Mb) £2999. (S)
HP 85 (£1830)	Hewlett Packard Ltd: 0734 784774 (16)	16-32k RAM; C.P.U.; 5", 16 x 32 VDU; C (200k): 64 cps printer; 4 P/P. Options: dual 5¼" F/D (540k) £1408; dual 8" F/D (2.4 Mb) £3744.	Basic (ROM)	Full dot matrix graphics. Complete range of interfaces, peripherals and application packages avail. 16k RAM £222. (S).
IMS 5000 (£1500)	Equinox: 01-739 2387 (20)	16-56k RAM; Z80; dual 5¼" F/D (320k); 2x S/P; 1 P/P;	CP/M; C/Basic; *Cobol, Fortran.*	3 drives option: (S&H).
IMS 8000 (£2500)	As above	64-256k RAM; Z80; dual 8" F/D (1 Mb); 2 x S/P; 1 P/P	CP/M; CBasic; *Cobol; Fortran; MicroCobol.*	Multi-user MVT/FAMOS available in place of CP/M. (S&H).
Intecolor 8000 (£2999)	Dyad Developments: 08446 729(TBA)	8-32k RAM: 8080: 19", 80 x 48 colour VDU: single 5¼" F/D (90k): Option: up to 26 Mb H/D.	DOS(ROM): Ex-Basic: *A: M/A: T/E: Fortran: U*	High res graphis avail: Many options including size of F/D and VDU. (S).
ITT 2020 (£867)	ITT: 0268 3040 (15)	16-48k RAM; 6502	Monitor; A; ExBasic; Dis A.	360 x 192 high res graphics. Ex-Basic in 6k ROM; Options: single 5¼" F/D (116k), £425; 16k RAM, £110; RS232 port, £96; 32k system, £931: 48k system. £995. (B).
Ithaca DPS1 (£3995)	Ithaca: 01-341 2447 (10).	64k RAM; Z80; dual 8" F/D 1 Mb); 2 x RS232 ports; 4 x P/P. Opt: H/D.	CP/M; *Basic; Cobol; Fortran; Pascal; A; U.*	Z8000 16-bit processor board avail. IEEE/S100 (8 or 16 bit) compatible. (E).
LX-500 (£3500)	Logabax Ltd: 01-965 0061 (13)	32k RAM; Z80; dual 5¼" F/D (180k); 12" 25 x 80 b&w VDU; 100 cps printer.	DOS; Basic; A.	Other printers available. (S).

List of Abbreviations

A	Assembler	G/C	Graphics card	M/A	Macro assembler	S	Software
BT	Bench Tested	H	Hardware	N/A	Not available	S/P	Serial port
C	Cassette	H/D	Hard disk	N/P	Numeric pad	T/E	Text editor
E	Extensive	I	Introductory	O/S	Operating system	TBA	To be announced
F/D	Floppy disk	Int	Interface	P/P	Parallel port	U	Utility

Please note: Software items listed in *italic* are not included in the basic price of the equipment. All prices are *exclusive* of VAT.

DIRECT ACCESS

IN STORE

Machine (Price from)	Main Distributor/s (No. of Dealers)	Hardware	Software	Miscellaneous (Documentation)
LSI M-One (£4200)	LSI Computers: 04862 23411 (20)	8-16k RAM; 8080; dual 8'' F/D (1.2 Mb); 12'', 24 x 80 b&w VDU	FMOS; A	Choice of standard business packages included in price. (S).
LSI M-Two (£7900)	As above	64-128k RAM; 8085A; dual 8'' F/D (1.2 Mb); 12'', 24 x 80 VDU; 60 cps printer	Elsie; *CP/M; Basic; Cobol Fortran; Pascal; A; U*	Max 8 VDUs and 4 printers. Many applications packages available. Option: 10 Mb H/D £2600. (S)
Macro 1 (£3950 or £294 pm).	Micro APL Ltd. 01-834 2687 (TBA)	64k RAM; Z80A; dual 8'' F/D (1 Mb); 4 x RS232 ports.	CP/M; APL; U; *Basic; Fortain; Cobol; Word-*2star Algo; Pascal; Forth.	Designed as timesharing replacement. Macro 2 with 2 Mb F/D £4750 or £334 pm.
Megamicro (£6080)	Bytronix: 0252 726814(5)	56k RAM; Z80; dual 8'' F/D (500k); 12'', 20 x 80 green VDU; 180 cps printer; 2 S/P; 2 P/P.	CP/M; U; *Basic; A; M/A.*	Range of bus. packages now avail. from Ludhouse of Streatham. (H&B).
Micro Trainer 1 (£650)	Hewart; 0625 22030 (N/A)	16-32k RAM; 6800/6809; 10'' 16 x 24 VDU; 2 x C int; Opt: dual 5¼'' F/D (160k) £595; 8k RAM £17.	Basic; A; *Pascal; PL/M; W/P*	SS50-based system. Graphics avail. Int card with real time clock £17. (I)
Microstar 45 Plus (£4800)	Data Efficiency Ltd: 0442 63561 (30)	64k RAM; 8085; dual 8'' F/D (1.2 Mb); 3 S/P; RS232 port	Stardos; CP/M; Basic; *Cobol; Fortran*	(E)
Microtan 65 (£69)	Tangerine: 0353 3633 (6)	2k RAM; 6502; T Mint; Exp up to 277k RAM.	2k TANBUG monitor; 2k A, disassembler, cassette firm ware; *10k Microsoft Ex Basic.*	Options: bulk I/O modules, hi-def graphics, CP/M, system racking, ASCII keyboard. Prestel adaptor (S&H)
Millbank Sys 10 (£2995)	Millbank: 01-788 1083 (6).	65k RAM; Z80; dual 5¼'' F/D (700k; 12'', 24 x 80 VDU; 2 x RS232 ports; RS4449 port; P/P.	CP/M; *Basic; Cobol; Fortran; Pascal; PL1; W/P*	One high level lang. included. 12-month warranty. Main-frame comm. package. H/D avail. soon. (S&H)
MS5001 (£7450)	BMG Ltd: 0793 37813 (N/A)	64k RAM; 8085; dual 8'' F/D (1 Mb); 12'', 80 x 24 VDU; 80 cps printer; RS232.	CP/M; *Basic; Cobol; Fortran; MP/M.*	Price includes desk mounting and one computer. Hardware & software support. Leasing arrangements available. (E)
MSI 6816 (£1200)	Strumech: 05433 4321 (5)	16-56k RAM; 6800; dual 9'' 16 x 64 b&w VDU; C int; 1 S/P; 1 P/P.	Basic; A.	Graphics & PROM programmer available (S&H)
MSI System 12 (£8000)	As above	56-184k RAM; 6800; 10 Mb H/D; single 8" F/D (500k) 24 x 80 VDU; 1 S/P; 1 P/P.	SDOS; Basic; CBasic; U.	As above. Business packages avail. Up to four terminals (H & S).
NEC PC 8001 (£450)	NEC(UK)	32k RAM; Z80A: RS232 port: P/P Option: dual 5¼" F/D (574k) £675	*CP/M: Basic N: Fortran Cobol: Pascal*	Colour monitor £250 (low res) or £480 (high res) both 12", 25 x 80(E) BT 6/81
Newbrain MB £219	Newbury Labs: 021-707 7170. Newbear: 0635 30505 (N/A)	2-4k RAM; Z80A; Nat 420; 14x 16 VDU; 2 x C int; TV int; V24 port. Option: C (50k) £60.	C Basic (16k ROM)	Graphics. Battery or mains. Mains only with 16k RAM £269. (low power battery version £299). (I).
North Star Horizon (£2230)	Comart: (7) 0480 215005. Comma: 0277 811131. Equinox : 01-739 2387 (20)	48-56k RAM; Z80A; dual 5¼'' F/D (360k); 15'', 24 x 80 VDU; 150 cps printer; 2 S/P; 1 P/P.	DOS; Basic; CP/M; *Cobol; Fortran; Pascal.*	Options: 18 Mb H/D.
Onyx C8000 (£6875)	Onyx Dist Ltd: 0734 664343 Colt 01-577 2150. (TBA)	64k RAM; Z80; 12 Mb Cartridge; 10 Mb H/D; 4 S/P; P/P	CP/M; *MP/M Oasis: Unix; Fortran; Pascal; W/P*	C8001 with 128k RAM £8220. Multi-user version avail. using Oasis. (E) BT 3/81
Oscar (£2560)	IDS Ltd: 0908 313997 (30)	64k RAM; Z80; dual 5 ÷ F/D (800k); 12", 25 x 80 VDU; RS232 port; 1 P/P	CP/M: *Basic; Pascal Fortran; Cobol; W/P; A*	Also avail. with daul 5¼" F/D (1.6 Mb) £2905 and dual 8" F/D (2 Mb) £3380. Advanced video board. (S + H).
Panasonic JD 800U, JD840U (£4275, £4950)	Panasonic Business Equipment: 0753 75841 (10 regional dist)	56k RAM; 8085A; 2-4k PROM; dual 8'' F/D JD800 U (500k), JD840U (2 Mb); 12'', 24 x 80 green VDU; 3 x RS232 ports.	CP/M; Basic; *Micro-Cobol.*	Also available with 5¼'' F/D; JD740U (570k) £4095. H/D avail soon. BT 3/80 (S).
Pascal Microengine (£2295)	Pronto Electronic Systems Ltd: 01-554 6222	64k RAM; MCP 1600; 2 x RS232 ports: 2 P/P.	Pascal.	CPU instruction set is P-code; no interpreter needed. Available with dual 8'' F/D (2 Mb) £3900.
Pasca 640 (£3700)	Westrex Ltd: 01-578 0957 (TBA)	64k RAM; Z80A; dual 8'' F/D (512k); 12'', 24 x 80 VDU; RS232 port; P/P.	CP/M; *Basic; Cobol; Fortran; Pascal; A; W/P; U*	Maintenance contracts avail. 10 Mb H/D avail. soon. (S) BT 5/81
Periflex 630/64 (from £1995)	Sintrom: 0734 85464 (5)	64k RAM; Z80; dual 5¼'' F/D (630k); 2 x RS232 ports; 1 P/P	CP/M; *Basic; Fortran; Cobol; A.*	One-day installation training on site included in price. Option; dual 5¼'' F/D (630k) £464, dual 8¼'' F/D (1 Mb) £1025. BT 6/80 (S&H)
Periflex 1024/64 (from £2750)	As above	64k RAM; Z80; dual 8'' F/D (1.2 Mb); 2 x RS232 ports; 1 P/P.	As above	As above.
PET 16k, & 32k (£550, £695)	Commodore: 0753 79292 (150)	16-32k RAM; 6502; C; 9'' 25 x 40 VDU; IEEE-488 port; Options: dual 5¼'' F/D (353k) £695; same but (950k) £895	O/S; Basic (in 8k ROM); *Forth; Pilot; Pascal; Comal; Lisp; A*	8032 with 80-col screen (32k) BT 12/80. £895 Field service avail. (I)
Powerhouse 2 (£1125)	Powerhouse Micros: 0422 48422 (TBA)	32-64k RAM; Z80A; 5'' 29 x96 VDU; RS232 port; external bus.	4k Monitor; *FDOS; Basic; ExBasic (14k EPROM)*	VDU has flexible screen logic. Options; FDOS & Basic £210; graphics card £200. (H)
Powerhouse 3 (£2600)	As above	32-64k RAM; Z80A; dual 5¼'' F/D (350k); 5'', 29 x 96 VDU; RS232 port; external bus.	As above.	VDU as above. With 1.2 Mb F/D £3500. ExBasic & FDOS in 14k EPOMs £300. (H)
Prince (£3045)	Digico: 04626 78172 (TBA)	48-64k RAM: 2 x Z80: dual 5¼" F/D (800k): 2 x RS232 port: 12", 24 x 80 VDU	CP/M: *Basic: Pascal: Fortron: Cobol: W/P: A:* T/E: U	High res graphics. Options: single 5¼" F/D (400k) £600: dual 8" F/D (2 Mb) £2000. Rentals avail. (S).

List of Abbreviations

A	Assembler	G/C	Graphics card	M/A	Macro assembler	S	Software
BT	Bench Tested	H	Hardware	N/A	Not available	S/P	Serial port
C	Cassette	H/D	Hard disk	N/P	Numeric pad	T/E	Text editor
E	Extensive	I	Introductory	O/S	Operating system	TBA	To be announced
F/D	Floppy disk	Int	Interface	P/P	Parallel port	U	Utility

Please note: Software items listed in *italic* are not included in the basic price of the equipment. All prices are *exclusive* of VAT.

IN STORE

DIRECT ACCESS

Machine (Price from)	Main Distributor/s (No. of Dealers)	Hardware	Software	Miscellaneous (Documentation)
Raannd SP1 (£4500).	Raannd: 0506 33372 (TBA)	64k RAM; MCP 1600; dual 8" F/D (2 Mb); 12", 24 x 80 VDU; RS232 port; P/P.	Pascal *ADA: Basic*	Based on Microengine (with integrated P-code). Up to 4 F/D drives. 64k RAM expansion avail. BT 12/80. (S)
Rair Black Box III (£2750)	Rair; 01-836 6921 (N/A)	64-512k RAM; 8085; dual 5¼" F/D (260k); 2 x RS232 ports.	CP/M; Basic; Cobol; Fortran; M/A	16k RAM expansion £500 10 Mb H/D £2500.
Research Machines 380Z (£895)	Research Machines: 0865 49791 (N/A)	16-56k RAM; Z80A; 2 x C; RS232 port. P/P	ExBasic; A; T/E; U; *CP/M; Fortran; Cobol; Algol; Cesil: Pascal.*	High res colour graphics. Many possible systems. With 48k RAM & dual 8" FD (1 Mb) £3394.
S/09 (£5350)	SWTP Ltd: 01-491 7507 (16)	128k RAM; 6809; dual 8" F/D (2 Mb); 8", 21 x 92 VDU 2 x S/P; 1 P/P	TSC FLEX; *Basic; Pascal; A; Dis A; TIE; U.*	VDU is intelligent. Expands to Option: 15 Mb H/D £3575. 60 Mb H/D multi-user system. Maintenance contracts. (S&H).
Saracen (£1925)	Bytronix 0252 726814 (TBA)	32-64k RAM; Z80; dual 5¼" F/D (800k); 2 x RS232 ports.	CP/M; *Basic; Cobol; Fortran; Pascal; A.*	Applications packages & maint. contracts avail. With dual 8" F/D (2 Mb) and 64k RAM, £2676. (E)
SBS 8000 (£1449)	Manhattan Skyline Ltd: 0801 3442; C Itoh 01-353 6090 (TBA)	64k RAM; Z80A; 12", 16 x 64 VDU; 1 P/P; RS232 port (extra £133).	ExBasic (24k ROM); *DOS*	Options: disk control card £237; dual 5¼" F/D (368k) £795; dual 8" F/D (2 Mb) £1400. BT 11/80. (S)
SEED System 1 (£2000)	Strumech: 05433 4321 (5)	32-56k RAM; 6800; various disk options: 12", 24 x 80 VDU: RS232 port: P/P	DOS; Basic U; *Fortran; A; Pilot; Strubal; T/E*	Graphics. PROM programmer Also system 19 multi-user (£3000). (E).
Sharp MZ-80K (£460-34k)	Sharp Electronics (UK) Ltd: 061-205 2333 (22)	6-34k RAM; Z80; C; 10" 24 x 40 VDU; Option: dual 5¼" F/D (289k) £695.	Basic (14k ROM); A. *CP/M: Pascal.*	Graphics; loudspeaker. BT 10/79 (B)
Sharp MZ-80B (£1095)	As above	64k RAM: Z80A: C: 9", 25 x 80 VDU: RS232 port: P/P.	Basic: *A: Pascal: FDOS*	High res graphics. Options: dual 5¼" F/D (560k) £800: 80 cps printer £415. (S)
Sharp PC3201 (£2995)	As above *CP/M: Cobol.*	64k RAM; Z80A; dual 5¼" F/D (500k); C int; 12", 25 x 80 VDU; 70 1pm printer.	DOS; U; Basic. *CP/M: Cobol.*	Various expansion cards avail. (I&B) (I&B)
Sinclair ZX81 (£50-kit, £70-built - prices inc VAT).	Sinclair: 0276 66104	1-16k RAM: Z80A: C int: TV inb: full K/B: 44-pin expansion port.	Basic (8k ROM).	Advanced 4-chip design. Printer avail soon BT 6/81
Smoke Signal Chieftan (£1800)	Windrush 0692 405189: Seed 05433 78151 (TBA)	32-64k RAM; 6800/6809; dual 5¼" F/D (500k); 2 x RS232 port.	DOS; *68/FLEX; Basic; Fortran; Cobol; A: Dis A: Pascal: U.*	With dual 8" F/D (2 Mb) £2600. Designed as development system for industrial control. (H)
Solitaire WP & BS200 (£6750 & £8200)	Solitaire KPG: 01-995 3573 (TBA)	64k RAM; 8085; 14" VDU (with own CPU); 45 cps printer; CPU port; dual 5¼" F/D (700k) 8" F/D (1.02 Mb) with BS200.	DOS; Basic	All solitaire systems are compatible; and can be upgraded to multi-user H/D system. (S)
Sord M100 ACE (£2339)	Midas Computer Services Ltd: 0903 814523 Exleigh Bus. Mach. 0736-66577.(10)	48k RAM; Z80; 8k ROM dual 5¼" F/D (246k): 24 x 64 green VDU; RS232 port: N/P	O/S; Basic; *A; Fortran; Pascal.*	Up to 3 drives possible. Colour graphics avail. Option S100 bus. (I)
Sord M223 Mk II-VI (£4078)	As above	64k RAM; Z80; 8k ROM; dual 5" F/D (700k); 12", 24 x 80 green VDU; RS232 ports; S100 bus; N/P	*O/S;* Ex Basic; *CBasic; Multi-User Basic; Fortran; Cobol.*	Expandable to 4 Mb F/D. 32 Mb, H/D, 5 screens, 2 printers. M243 with 192k RAM & 1.4 Mb F/D £5087.
SPC/1 (£3770) (TBA)	Digital Data: 01-573 8854	64-1024k RAM; 8085A-2; dual 5¼" F/D (90k); 12", 24 x 80 VDU; 2 x RS232 ports; Option: single 8" F/D (1 Mb) £1090: 20 Mb H/D £7000.	Mikados, Comal; Pascal; A.	With 32k RAM and single F/D (Comal only) £1995. Expandable to multi-user system (8 users). BT 7/80 (S).
Superbrain (£1950)	Icarus: 01-485 5574 (45)	64k RAM; 2 x Z80; dual 5¼" F/D (320k); 12" 25 x 80 VDU; 2 x RS232 port.	CP/M; A; *Basic; Cobol; Fortran; APL; Pascal.*	Limited graphics, Mainframe int avail. Full range of application packages avail. Also avail with 700k & 1.5 Mb F/D. BT 8/80. (S&H).
System 10 (£2995)	Millbank 01-788 1083 (TBA)	64k RAM; Z80; dual 5¼" F/D (700k); 12", 24 x 80 VDU; 2 x RS232 port; P/P	CP/M; *Basic; Fortran; Pascal; Cobol; PL/1; W/P.*	12 month warranty. Maint contracts. Applications packages avail. Choice of high level language in price. (E)
System 20 (£3500)	Extel: 01-739 2041 (TBA)	64-512k RAM; Z80A: dual 8" F/D (1 Mb); 12", 24 x 80 VDU; 3 x V2	CP/M:E Basic; *M Basic; Pascal; Cobol; Fortran*	Maintenance contracts avail (132 field service engineers). Expands to multi-user system. Options 13.7 Mb H/D £5799; 27.4 Mb H/D £6674.(S)
System 80 (£1355-48k)	Nascom: 02405 75155 (32)	16-48k RAM; Z80A; dual 5¼" F/D (560k); TV int; RS232 port.	CP/M; Basic (8k ROM)	EPROM firmware avail. Colour graphics card £165. Many configurations possible. (S&H).
Tandberg EC10 (£4000)	Tandberg: 0532 774844 (N/A)	64k RAM; 8080A; single 8" F/D (250k); 12", 25 x 80 VDU; 7 x RS232 ports; printer int.	CP/M; ExBasic (24k) *Multi-user Basic; Pascal; Cobol;* A; U;	Up to 7 terminals. Includes V28 comms port. (S & H).
Tandberg TG 8450 (£2200)	As above	64k RAM; 8085; single 5¼" F/D (77k); C int; 12", 24 x 80 VDU; RS232 port; P/P	TDOS; *Basic; Cobol; Fortran; Pascal.*	TDOS is CP/M compatible. Opt: single 5¼" F/D (77k) £250 (up to four); dual 8" F/D(2 Mb) £1800. (S&H)
Tandy TRS-80 Model 1 (£289)	Tandy: 0922 648181 (200)	4-48k RAM; Z80; C; 12", 16 x 64 VDU: RS232: P/P	Basic (4k ROM); A.	Fully expandable. Option: single 5¼" F/D (175k) £339 (up to 4). Many extras available. (I)
Tandy TRS-80 Model II (£2499)	As above	64k RAM; Z80; single 8" F/D (500k) 12" 24 x 80 VDU; 2 x RS232 port; P/P	Basic; *M/A Fortran; Cobol*	Option: single 8" F/D (500k) £899 (subsequent £450, up to 4). 32k RAM £344.

List of Abbreviations

A	Assembler	G/C	Graphics card	M/A	Macro assembler	S	Software
BT	Bench Tested	H	Hardware	N/A	Not available	S/P	Serial port
C	Cassette	H/D	Hard disk	N/P	Numeric pad	T/E	Text editor
E	Extensive	I	Introductory	O/S	Operating system	TBA	To be announced
F/D	Floppy disk	Int	Interface	P/P	Parallel port	U	Utility

Please note: Software items listed in *italic* are not included in the basic price of the equipment. All prices are *exclusive* of VAT.

DIRECT ACCESS

IN STORE

Machine (Price from)	Main Distributor/s (No. of Dealers)	Hardware	Software	Miscellaneous (Documentation)
Tandy TRS 80 Model 3 (£500-£1700)	As above	See Model I Levels I and II		Fully intregral unit. Up to 2 integral and 2 external 5¼" F/D.
Tandy Pocket Computer. (£119)	As above	2k RAM: 2 x 4-bit proc: 24 char LCD; K/B: Option: C int £18: C £50	4k Monitor (ROM); 7k Basic (ROM).	Various software packages avail. Runs on mercury batteries. (I).
TECS (£1200)	Technalogics Computing Ltd: 061-793 5293 B&B Computers Ltd: 0204 26644 (TBA)	4-56k RAM; 8k PROM; 6800/ 6809; 2xC; TV int; 2xRS232 ports; internal viewdata modem & printer port.	FLEX: Basic; *Pascal; TDOS; A; T/E; Pilot; Fortran; Cobol.*	Fully viewdata compatible. Options — dual 5¼" F/D (320k) £850; dual 8" F/D £120 £1200. (S&H).
Terodec CPC-100 0 (£4095)	Terodec: 0734 664343 (8)	80k RAM: Z80A: single 5¼" F/D (819k): 2 S/P: 3 P/P	CP/M: CBasic; *Fortran: Pascal: Cobol.*	System with Okidata 80 printer: TVI 910 VDU: W/P and various appliation packages £5995 (S + H).
Terodec DPS 64/2M (£3598)	As above	64k RAM: Z80A: dual 8" F/D (2 Mb): 2 S/P: 3 P/P. Options: 10 Mb H/D: Tape.	CP/M: *MP/M: CP/Net: CBasic: Fortran: Pascal: Cobol: Basic.*	2 user system with 10 Mb H/D £7400 4 user system with 34 Mb H/D & tape backup £11981. (S + H).
TI 99/4 (£750)	TI: 0234 67466 (TBA)	16k RAM; 26k ROM; 9900; 24 x 32 VDU; 2 x C int; TV int; RS232 port.	OS: Basic.	Can run 16-colour TV screen. BT 5/80 (S).
Tuscan CP/M Starter (£999)	Transam: 01-405 5240 (N/A)	24k RAM: Z80: single 5¼" F/D (190k): Cint: TV int: RS232 port: P/P: N/P.	CP/M: *Basic: Fortran: Pascal: Cobol:*	options: single 5¼" F/D (190k) £155: single 5¼" F/D (370k) £285: 8k RAM £50. (S + H)
UDS 3000 (£2300)	Kemitron: 0244 21817. (TBA)	64k RAM; Z80A; dual 8" F/D 2 Mb; 2 x RS232 ports. Option: 10 Mb H/D	CP/M; *Basic; Cobol; Fortran; Pascal.*	Full range of industrial support cards, and applications software. (E)
Vector MZ (£2595)	Almarc: 0602 62503 (3)	56k RAM; Z80A; dual 5¼" F/D (630k); 3 S/P; 2 P/P.	CP/M; Basic; *Algol; Cobol; Pascal; Fortran; Coral; CBasic; A.*	High resolution graphics. Also system B with video board & terminal £3195. (E).
Vector System 2800 (£4195)	As above	56k RAM; Z80A; dual 8" F/D (2.4 Mb); 3 S/P; 2 P/P.	As above	High-res graphics. Also System 3030 with 32 Mb H/D and single 5¼" F/D £7500. (E)
Vic 20 (£200)	Commodore: 0753 70292 (150)	5-32k RAM: 6502: Cint: 22 x 23 TV int: S/P: P/P: Games int.	Basic	Graphics 3 tone sound generator. Will interface to PET. Option: single 5¼" F/D (170k). (S).
VIP (£2125)	Almarc 0602 62503 (3)	64k RAM; 3k ROM; Z80A; single 5¼" F/D (315k); 12", 24 x 80 VDU; RS232 port; 3 x P/P	CP/M; *Basic; Fortran; Cobol; Pascal; A.*	Up to 3 additional F/D drives. Options: dual 8" F/D (2 Mb) £1063, 32 Mb H/D (TBA). (H&S). BT 2/81
Video Genie EG3003 (£300)	Lowe Electronics: 0629 4995 (N/A)	16k RAM; Z80; 500bps C; 16 x 64 TV int; extra C int; 1 P/P	Basic (12k ROM); *Pascal: A M/A; Fortran*	Graphics available with ex-Basic (13.5k) £350.
WH8 (£352)	Heath 0452 29451 (N/A).	16-64k RAM; 808A (or Z80); 4 S/P. Option: single 5¼" F/D (102k) £241.	OS; HDOS; CP/M; *Fortran; Pascal; Basic*	Kit. 3 drives max. Colour graphics avail. (S&H) BT 2/80.
Zentec (£4838)	Zygal Dynamics: 02405 75681 (TBA)	32-64k RAM; 2 x 8080; dual 5¼" F/D (256k); 15", 25 x 80 VDU; RS232 port.	O/S; A; U; *Basic;* Cis Cobol.	User programmable character set. Option: dual 8" F/D (1 Mb). (S).
Zenith WH-11A (£2673)	Heath Ltd: 0452 29451 & 01-636 7349 (N/A)	LSI 11; 16-32k RAM; 25 x 80 VDU; S/P; P/P.	*O/S; Basic; Fortran;* A: U.	PDP 11-compat. Option: 2 x 8" F/D (1 Mb). £1717 (S&H).
Zenith Z89 £1570-£1710	As above	16-48k RAM; Z80; single 5¼" F/D (102k); 12" 24 x 80 b&g vdu; RS232.	*Basic; A; HDOS;* CP/M; *MBasic; CBasic; Fortran.*	3 x 5¼" F/D possible. Options: dual 8" F/D (1 Mb) £1717, 20 Mb H/D.
Zilog MCZ 1/05 (portable): MCZ 1/20A (£3250)	Micropower: 0256 54121. Memec; 084421 5471 (N/A)	64k RAM; Z80; dual 8" F/D (600k); RS232 port; MCZ 1/20A only 1 P/P; Option: 10 Mb H/D £7100	RIO; O/S; *Cobol; Basic; Fortran; Pascal; M/A; U.*	Available desk top or rack mounted. Debug in 3k PROM. 1/20A runs multi-user Cobol, up to 5 terminals with 40 Mb H/D. (S&H).
Z-Plus (from £4000)	Rostronics Ltd: 01-870 4805(16).	64k RAM; Z80A; dual 8" F/D (0.5/1 Mb); 12", 24 x 80 VDU; 4 S/P; 1 P/P	CP/M: MP/M; A; U; *Basic; Cobol; Fortran; Pascal; APL; PL/1; Algol.*	Complete with furniture. Various business packages avail. Option; 20 Mb H/D £4000. BT 12/79 (S&H).

SINGLE BOARDS

Machine (Price from)	Main Distributor/s (No. of Dealers)	Hardware	Software	Miscellaneous (Documentation)
Acorn System 1-5 (£65-£1600)	Acorn: 0223 312772 (35)	11/8k RAM; 6502; EPROM socket; Hex K/B; C int; 8-digit LED display; up to 16 ports. Options: Eurocard 64-way connector; VDU card; full K/B card.	½k monitor; *Basic. Pascal: Forth: DOS.*	Kit. Programmable address linking. On-board 5 V regulator. Available assembled £79. Cn be expanded to disk-based system. (S&H)
Aim 65C (£259)	Pelco: 0273 722155(7)	1-4k RAM: 6502; 4-20k; ROM; Full K/B 2 x C; 20 char LED; 20 char thermal printer; RS232 port.	A. Dis A; T/E; 8k monitor; *Basic (8k ROM); PL65. Forth*	Expandable using RM65 models to full disk systems (E).
Bigboard. (£450)	Maclin-Zand 01-837 1165 (N/A)	64k RAM; Z80; F/D controller; 24 x 80 VDU controller	2k monitor; *CP/M; Basic; Fortran; Cobol; Pasal; A.*	Many options. Will support up to four 8" F/D drives. BT 3/81. (E)
Biproc (£119)	B L Micros: 0494 443073. (TBA)	1k RAM; Z80; TV int; RS232 port. Opt: 4k RAM £8; K/B £30.	2k Monitor; A.	With 9980 instead of Z80 £155 as well as Z80 £180. Kit. (H)
Cromemco SC (£355)	Comart: 0480 215005 (25)	1k RAM; Z80A; 8k EPROM sockets; RS232 port; 3 P/P. Option: S100 bus.	Monitor; *Basic.*	5 program interval timers. Can put own Basic program in EPROM. (E).

List of Abbreviations

A	Assembler	G/C	Graphics card	M/A	Macro assembler	S	Software
BT	Bench Tested	H	Hardware	N/A	Not available	S/P	Serial port
C	Cassette	H/D	Hard disk	N/P	Numeric pad	T/E	Text editor
E	Extensive	I	Introductory	O/S	Operating system	TBA	To be announced
F/D	Floppy disk	Int	Interface	P/P	Parallel port	U	Utility

Please note: Software items listed in *italic* are not included in the basic price of the equipment. All prices are *exclusive* of VAT.

SINGLE BOARDS

DIRECT ACCESS

Machine (Price from)	Main Distributor/s (No. of Dealers)	Hardware	Software	Miscellaneous (Documentation)
Elf II (£50)	Newtronics: 01-348 3325 (N/A)	¼-64k RAM; RCA 1802; Hex K/B; 2-digit LED; TV int; C int; RS232. Options: Full K/B; VDU card.	1k monitor; A; Dis A; T/E; Elf-bug; *Tiny Basic; Basic,*	TTY N-line decoders. Low resolution graphics (high res avail). Kits or built. Full range of peripherals. (H).
Explorer (£82)	As above	4-64k RAM; 8085; Full K/B; RS232 port; 6 x S100 bus; C int; 1k video RAM.	2k monitor; *Basic (8k) CP/M: Basic Fortron: Cobol.*	Supplied in kit or built. Full range of peripherals including F/D. (H).
Hewart 6800S (£299)	Hewart: 0625 22030 (N/A)	16k RAM; 6800; full K/B VDU int; 2 x C int; 1 S/P; 2 P/P; Option: 16k RAM £90	1k monitor; A; T/E.	Can be upgraded with 6809. (H).
Hewart 6800 Mk III (£152)	As above	1k RAM; 6800; VDU board	1k monitor.	Options: single 5¼" F/D (75k) £350; PROM programmer £32. (H)
Microaxis 1 (£250)	Micro Design 0296 86866 (N/A)	1k RAM; 1-8k PROM; 6809; 8 channel A-D system; 12 optically isolated I/O lines.	1k monitor	Designed for industrial control. Can be expanded to F/D system. (H)
MPC 09 (£750)	As above	17k RAM; 48k PROM; 6089; RS232 port; 50 I/O lines; 4 timers; 1 W audio amplifier.	1k monitor; *Multi-tasking OS.*	As above. New 64k version avail.
Microtan 65 (£69)	Tangerine: 0353 3633 (6)	2k RAM; 6502; 16 x 32 TV int; Options; 64 Pixel graphics £6.50;	2k monitor, *Basic*	TANEX expansion kit with 7k RAM; 4k EPROM sockets; 10k Basic; 4 S/P; 32 P/P £145. (E)
Nascom 1 (£125)	Nascom: 02405 75155 (20)	4k RAM; Z80; Full K/B; TV int; 2 P/P; 1 S/P. Options; 16k RAM £140; single 5¼" F/D (250k) £240 (4 disk controller £127).	2k monitor; *B Basic; Tiny Basic; A; T/E; U.*	Kit. Built version £140. Also Nascom 2 with 8k Microsoft Basic in ROM £225 (no RAM). (S&H)
77/68 (£90)	Newbear; 0635 30505 (N/A)	4k RAM; 6800; LED; C int; VDU int.	1k monitor; *Basic*	Expandable to 64k RAM with F/D. (B)
79/09 (£65)	As above	1k RAM: 6809; P/P; S/P	2k Monitor.	Designed to upgrade 77/68. (H).
SBC 100 (£135)	Airamco: 0294 57755 (TBA)	1k RAM; Z80; 8k ROM; S100; 1 S/P; 1 P/P.	*1k monitor; DOS in ROM.*	Kit. Available assembled £196. (E).
Superboard (£188)	(as Challenger)	4-8k RAM; 6502; 10k ROM; full K/B; VDU int; C int.	Basic (8k ROM)	Options; RS232 port; single 5¼" F/D (100k) £316; 8k RAM £188. (S&H).
Smoke Signal SCB 68 (£181)	Windrush 0692 405189 (TBA)	1k RAM; 6800/6809; 8k EPROM; 1 S/P.	2k monitor	Fully expandable to 64k RAM with F/D. (H)
SYM-1 (£160)	Newbear; 0635 30505 (N/A)	1-4k RAM; 6502; C int; VDU int; 2 x 6522 ports. Option: TV int.	4k monitor; *Basic A.*	Expandable to 64k RAM with F/D. (B).
Tuscan (£299)	Transam 01-405 5240 (N/A)	8k RAM; 8k ROM; Z80A; 5 x S100 slots; RS232 port; TV int; C int; 1 P/P.	*2k monitor; 8k Basic; CP/M; Pascal.*	High res graphics available. Can be expanded to F/D system. BT 1.81. (S&H)
UK101 (£149)	Comp Shop: 01-441 2922 (4)	4k RAM; 6502; full K/B; 16 x 48 VDU or TV int; C int: RS232 port, Options; 4k RAM £16.	2k monitor; 8k Basic; *Dis A; U.*	Graphics. Expansion & colour avail. Kit or fully assembled. (S&H).
Windrush 6801 (£175)	Windrush: 0692 405189	2k RAM: 6801/3/5: 12k EPROM: S/P: 3 P/P	2k Monitor	Designed for industrial control & dedicated small systems. (H)
ZCB (£260)	Almarc: 0602 625035 (3)	1k RAM; Z80A; 3 PROM sockets; RS232 port; 3 P/P	*Will take any 2708/ 16/32 software.*	S100 bus compatible. Expandable to full system. (E).

TRANSACTION FILE

We charge a flat fee of **£1** *for one insertion of up to* **30 words.** *Ads for this section are accepted only from non-commercial readers. Please* **type or write clearly.** *Send your ad plus PO or cheque for £1, payable to* **Sportscene Publishers (*PCW*) Ltd,** *to*: **Transaction File,** *PCW*, **14 Rathbone Place, London W1P 1DE**

UK101. . . 8k RAM, Microtype 3 case, PSG, new monitor, full documentation, many programs inc. Invaders, Draughts etc, also TV/mon and radio/cassette, £350 the lot, negotiable. Tel: 01-521 8290.

TRS-80. . . 32k, Level II with sound, cass, VDU, expansion interface and Aculab floppy tape, all manuals etc, and loads of programs, all for £600. Might separate. Ruislip 30344.

Acorn Atom. . . 12k, manual, PSU, leads + cassette recorder (Studio 66), 10 cassette-based games, £330, will seperate. Phone 0268 550217 after 6.30.

PET 32k. . . 8 months old, new ROMs, C2N cassette, Toolkit, Sound box, cover, progs, private usage, £575. PET 3022 tractor printer, IEEE connector, dust cover, as new, £395. Tel Heathfield (04352) 2499 day.

Acorn Atom. . . Fac. built, 12k + 12k inc f.p, manual, PSU, leads, many progs. inc space invaders, spare keys & carrying case, £195 ono. Tel Stalham 81247, eve.

Fed up. . . waiting for Uncle Clive to deliver? 1 Sinc built 1k ZX81 inc leads, PSU & manual, for quick sale, £60. Phone (0262) 70451 (Bridlington)

Acorn Atom. . . 12k RAM 12k ROM, fully checked by Acorn, + newsletters & 3 games cassettes, many programs, £199 ono. 5 volt, 3amp power supply in handsome metal case, £25. Acornsoft games packs 1 and 4 and soft VDU, £7 each. All excellent. Steve, 0792 51762.

UK101. . . 8k Basic, new and old monitor, assembler, editor, complete in case, £25 worth of progs, inc super Space Invaders, £230. Phone 01-679 4525.

Hewlett-Packard. . . printer for HP41, model 82143A, brand new, unused, complete with chrger, cables, paper, instructions, unwanted gift, any offers considered. Tel: 01-960 1404.

Microtan 65. . . graphics, L-case, Tanex, keypad mini-motherboard and 2A power supply in 19" Verd rack, £150. Tel: 0203 29361.

Two. . . 19" Vero Racks 2V and 3V, £10 each; Elizabethan portable TV weak RF gain but super monitor, circuit supplied £30; 20A/5V SM power supply with spares, £15. Tel: 0203 29361.

ITT 2020. . . 48k, colour, disk drive and controller, Applesoft in ROM, cassette and disk software inc integer Basic and DOS 2.2. Computer £595, disk drive £295. Tel (0462) 54241.

Computhink. . . 400k disk drive complete with toolkit on disk, £450 ono. Trendcom 40-col thermal printer + PET interface. £100. D Stringer, 124 Grangemouth Rd, Radford, Coventry CV6 3FE.

Sharp MZ-80K. . . 36k RAM, 9 months old, Basic plus Knight Commander enhancements, manuals, PET manuals included to allow easy conversion of listings, various games, £395 ono. Tel: Brighton 509097.

PET 2001. . . 8k old ROM, with built in cass deck and small keyboard, in good condition complete with manual, space invaders, Basic tutuorial tape and other software, £275 ono. Tel: 01-602 3608.

ZX80. . . Sinc built, complete with 16k R AM pack, manual, PSU, leads, three books (about 130 progs) and Space Invaders, good cond, cost £170, accept £110. Tel: Steve, Halifax 69356.

TRS-80. . . 16K Level II, numeric keyboard, VDU, PSU, cassette recorder, and games progs, had little use, £390 ono. Tel: Sedgley 76131 (West Midlands) after 6.

8k PET. . . 24k expandemem, new ROMs, external keyboard, toolkit, £450. Computhink 400k dual disk drive, £450. Free with above system, 300 PET programs. Tel: 01-894 7149.

ZX80/81 keyboard. . . full size qwerty keyboard, 1 stroke rubout and cursor control key, numerical keypad, etc, £25. 4k RAM expansion board (1k fitted), £18. 9v power supply with cassette to ZX80 switches (saves swapping jack plugs), £18. Tel: 0947 2095.

ZX80. . . complete, 30 progs, pocket book, Starship cassette, cost £115. Sell £70. Q Vandervell, 12 Monk St, Monmouth, Gwent, NP5 3NZ.

PET 32k. . . ROM 2, inc's Toolkit, Superchip, Reset switch, UHF & VIDEO output, two data cassette recorders £625 inc p&p. Approx £1000 software for £180. Burnley 58211.

Video music monitor. . . £20, Big ears speach input £25, Mektronics Comunicator £25, Easicomp sound generator £25, light pen £9, Presto Digitizer £12, tel 92 58211.

UK101. . . 8k ROM, 8k RAM, new monitor, internal PSG, cased, all leads fitted, documentation, £260 ono. Phone Chris, Wakefield 279243

TRS-80 L2 16k. . . with leads, manuls (Basic and machine code), assorted books and cassette programs, inc powerful sort/search program, £280. Tel: 0761 (Avon) 416401.

LOCAL DEALERS

LONDON
Bellmartin Services Limited
194 Union Street
London SE1 0LH
Tel: 01-928 5322/3

Lion House (Retail) Limited
227 Tottenham Court Road
London W1P 0HX
Tel: 01-637 1601

Personal Computers Limited
194–200 Bishopsgate
London EC2M 4NR
Tel: 01-626 8121

S. W. Winter & Co. Limited
101 Westminster Bridge Road
London SE1 7HR
Tel: 01-633 9611

PROVINCES

Avon
Microstyle
29 Belvedere
Lansdown Road
Bath BA1 5HR
Tel: 0225 334659

Buckinghamshire
Chiltern Microcomputers Limited
7 Amersham Hill
High Wycombe HP13 6NQ
Tel: 0494 20416

Cleveland
Weyfringe Limited
Longbeck Road
Marske
Redcar TS11 6HQ
Tel: 0642 470121/2/3/4

Cornwall
Diskwise Limited
25 Fore Street
Callington PL17 7AD
Tel: 05793 3780

Hertfordshire
CCS Microsales
7 The Arcade
Letchworth SG6 3ET
Tel: 04626 73301

Merseyside
Currie (Business Equipment) Limited
8 Upton Road
Claughton
Birkenhead L41 0DF
Tel: 051 658 5111

Business Equipment Centre (Liverpool) Limited
31/35 Edge Lane
Liverpool L7 2PA
Tel: 051-263 5783/4421/5738/6683

Norfolk
Anglia Computer Centre
88 St. Benedicts Street
Norwich NR2 4AB
Tel: 0603 29652

Oxfordshire
Alphascan Limited
Little Bourton House
Southam Road
Banbury OX16 7SR
Tel: 029 575 8202

Surrey
T & V Johnson Limited
(Microcomputers Etc.)
Johnson House
75-79 Park Street
Camberley GU15 3XE
Tel: 0276 20446

Warwickshire
Business and Leisure Micro Computers
16 The Square
Kenilworth CV8 1EB
Tel: 0926 512127

Gallid Limited
1 Bilton Road
Rugby CV22 7AA
Tel: 0788 74442/3

West Midlands
Camden Electronics Limited
462 Coventry Road
Small Heath
Birmingham B10 0UG
Tel: 021 773 8240

C.P.S. (Data Systems) Limited
Arden House
1102 Warwick Road
Acocks Green
Birmingham B27 6BH
Tel: 021 707 3866

Worcestershire
Arrow Business Computers Limited
Royal House
11 Market Place
Redditch B98 8AA
Tel: 0527 62733

SCOTLAND

Strathclyde
Turnkey Computer Technology Limited
23 Calderglen Road
St. Leonards
East Kilbride G74 2LQ
Tel: 03552 39466

Video Vector Dynamics Limited
39 Hope Street
Glasgow G2 6AE
Tel: 041 226 3481/2

WALES

CARDIFF
Penny Computer Systems
15 Main Avenue
Peterston-F-Ely
South Glamorgan CF5 6LQ.
Tel: Peterston 760681

South Glamorgan
David Potter Office Equipment Limited
164 Richmond Road
Cardiff CF2 3BX
Tel: 0222 496510

West Glamorgan
Croeso Computer Services
516 Mumbles Road
Mumbles
Swansea SA3 4BV
Tel: 0792 60624

Switch this data terminal off-line...



...and you've got a daisywheel typewriter.

SCRIPTA £998 + VAT
(RO Version £836 + VAT)

Manufactured in W. Germany by **OLYMPIA INTERNATIONAL**
SOLE UK DISTRIBUTOR: DATAPLUS LTD.,

* Does the work of both a data terminal and an electronic typewriter.
* Saves you hundreds of pounds in machine costs.
* Full word processing capability.
* Library of easily-changed daisy typewheels.
* Optional tractor unit allows continuous feeding of single or multi-part forms.
* 'Lift-off' and 'Cover-up' correction facilities available.
* RO version available without keyboard.
* Contact your nearest dealer or the address below for more detailed information.

DATAPLUS

DATAPLUS LTD.,
39-49 Roman Road, Cheltenham GL51 8QQ.
Telephone 0242 30030 or 37373. Telex: 43594

TRANSACTION FILE

DIRECT ACCESS

32k Sorcerer. . . all manuals, 2 motor-controlled cassette cables/modem connection, working cassette, 3 adventures, startrek, space invaders + various s'ware, £500 ono. Also Casio FX502P prog. calc, with case, full documentation, £50 ono. All vgc. Tel: 01-670 7436.

Diablo 1641. . . daisy wheel printer with keyboard, graphics capability of 60 points per inch, with tractor feed and metal stand, £800 ono. Tel: 01-586 7635 most evenings, 01-407 7050 ext 446 office hours.

Nascom 2. . . with Gemini 64k RAM board (32k RAM) and 3Amp PSU, switch selectable Nas-sys3 or Nas-sys1, graphics or inverted alphanumerics, 1200 or 2400 baud cassette, Zeap 2, Nas-dis, Debug, Naspen, trace and Toolkit all in EPROM, 8k Basic in ROM, offers. Tel: Nantgareding (026 788) 492.

Philips G7000. . . video game computer, 2 hand controls, 2 months old, good cond. 5 cassettes inc. space invaders, £160. 12 Grove Close, Forest Hill, London SE23 after 6pm.

Printer. . . IBM Golfball with interface for TRS-80 or any computer with Centronics parallel port, with spare golfball and ribbons, perfect working order, superb letter quality print, £450. Tel: 01-458 2106 eve, 01-435 3418 day.

Acorn Atom. . . 12k ROM, 12k RAM, colour, PSU, manuals, Magic Book, etc, software (£75 new) inc. Acornsoft packs 1-4, invaders etc, £250 ono. Tel: York 489899.

UK101. . . 8k RAM new monitor, 'Simple Software' case, manual, assembler, space invaders, star trek and other games, £200. Tel: Janet 01-989 8534.

Wanted

PET 2001-8 or 3008 8k. . . large keyboard, new ROM, green screen, cass deck, any manuals, few progs, £325 ono. Tel: Vic, home 01-543 2379. work 01-977 3222 ex 3966.

Cheap 6800 system. . . may be non-worker, ideally SS50 bus but consider anything. G Everett, 104 Junction Rd, Burgess Hill, Sussex, Tel: 44583.

5" disc drive + interface. . . One drive and 16k expansion interface wanted, £325 max. R Jacobs, 19 Vine Way, Brentwood, Essex.

Video Genie. . . wanted for school use, new keyboard preferred, internal cassette use not required. Write FHG, 19 Grayson Drive, Lowestoft, Suffolk NR33 7BA.

Practical Computing. . . 1981 Volume 4 issue numbers 1 (January) and 3 (March). Must be good condition. Reasonable prices paid. Ring 01-866 5160.

USER GROUPS INDEX

These are updates/new entries received since our last full listing. The next complete list will be printed in our November issue.

INTERNATIONAL

DENSPET: group specifically for exchange or original programs for MTU 200x320 dot matrix hi-res PET add-on. Send sample of your work or £2.50 ($2.50) & receive sample in return plus newsletter sub & lists of available programs. Contact: DENSPET, Rock House, Ballycroy, Westport, Co Mayo, Eire.

KAOS — the official 6502 users' group of Australia. Has a range of projects within special interest groups: hardware, software, amateur radio, Pascal, education, Publishes monthly newsletter. Contact: Mr Ian Eyles, 10 Forbes St, Essondon, Victoria, Australia 3040.

DAInamic: European DAI personal computer users' club. Has over 500 members, publishes a bi-monthly newsletter with most articles in English. Contact: DAInamic, Heide 98, 3171 Westmeerbeek, Belgium.

REGIONAL

Merseyside Nascom Users' Group. Now independent, with 150 members. Meets 1st Mon monthly, 7.30pm at Mona Hotel, James Street, Liverpool. Contact: T Searle, 14 Hawkeshead Close, Maghull, Liverpool L31 9BT.

Merseyside TRS-80/Video Genie Users' Group. Contact: Peter Tootill, 101 Swanside Rd, Liverpool L14 7NL, tel 051-220 9733.

Wirral Microcomputer Users' Group. Meets at Mons at Birkenhead Technical College. Contact: J Phillips, 14 Helton Close, Nocturum, Birkenhead, Merseyside L43 9HP. Tel 051-652 0268.

East Anglian Computer Users' Group. Meets: Crane Community Centre, Telegraph Lane East, Norwich. Contact: Gill Rijzl, 88 St Benedict's St, Norwich NR2 4AB, tel: (0603) 29652.

TOWN

Southampton Amateur Computer Club. Meets 2nd Wed monthly, Medical Sciences Building, Bassett Crescent East, Southampton (alternative venue Aug & Sept). Contact: P Blitz, 'Gardenways', Chilworth Towers, Chilworth, Southampton, tel: 0703 766161.

Beford Amateur Computer Club. Recently started, no further details as yet. Contact: Mr R Bird, 7a High Street, Great Barford, Bedford MK44 3LB, tel 0234 870763.

Leeds Microcomputer Users Group. Meets fortnightly on Thurs eve in Leeds, new members welcome. Contact: Paul O'Higgins, 20 Brudenell Mt, Leeds 6, tel (0532) 742347 after 6.

Manchester Atom Users' Group. Meets last Tues monthly during school terms at Abraham Moss Centre, Crescent Rd, Manchester 8. Contact: John Ashurst, 061-370 5121 ext 27 (day), 061-681 4962 (eves).

Medway Atom Users' Group. Meets last Tues monthly during school terms at St John Fisher School, Ordnance St, Chatham. Contact: Clem Rutter, (0634) 42811 (day).

Would anyone interested in fprming a computer club in the Portsmouth area please contact Dave Cocker on Portmouth 751156.

Brunel Computer Club: meets alternate Wednesdays, 1900-2200 hrs at St Werburgh's Community Centre, Contact: Mr R Sampson, 4 The Coots, Stockwood.

Worle Computer Club: meets alternate Mondays 1900-22.30 at Woodsprings Inn Function Rooms, Contact: S Rabone, 18 Castle Rd, Worle, Weston-Super-Mare, Avon, tel: 0934 513068.

NETWORK NEWS

Here is a list of all British (and one Dutch) personal computer networks. As more networks appear — and as more facilities are added to existing ones — we'll report them in this section, which appears monthly.

Forum-80 Hull. . . Operator: Frederick Brown, tel 0482 856169. Facilities: electronic mail, software up/down loading, Forum-80 Users' Group, PET users' section, shopping list. Hours: 7 days/week, midnight-0800, Tues & Thurs 1900-2200, Sat & Sun 1300-2200.

Forum-80 London. . . Operator: Leon Jay, tel 01-286 6207. Facilities: electronic mail, program downloading. Hours: Tues, Fri, Sat & Sun 1900-2300.

80-NET . . . Operators: Leon Heller & Brian Pain, National TRS-80 Users' Group, tel 0908 566660. Facilities: electronic mail, software for downloading, newsletter, TRS-80 information. Hours: 7 days/week, 1900-2200.

CBBS London. . . Operator: Peter Goldman, tel 01-399 2136. Facilities: electronic mail, program downloading. Hours: Wed 0700-0930 & 1900-2200, Fri 1900-2200, Sun 1600-2200.

Forum-80 Holland. . . Operator: Nico Karssemeyer, tel 010 313 512 533. Facilities: electronic mail, program up/downloading, shopping list. Hours: Tues-Sat 1800-0700 nightly, continuous from 1800 Sat — 0700 Tues.

DIARY DATA

Readers are strongly advised to check details with exhibition organisers before making travel arrangements to avoid wasted journeys due to cancellations, printer's errors, etc.

London	(Wembley Conf Centre) Viewdata '81. Contact: Online, 09274 28211	6 — 8 Oct
Friedrichshafen, W Germany	Euro Congress for Word Proc-Intertext. Contact: Int Bodensee-Messe, Meistershofener Str 25, 7790 Friedrichshafen.	21-25 Oct
Stuttgart, W Germany	Hobby Electronics & Minicomputers Exbn. Contact: CES, 01-236 0911	21-25 Oct
London	(Bloomsbury Centre) Computer Graphics Exbn. Contact: Online, 09274 28211	27-29 Oct
London	(West Centre Hotel) Viewdata Exbn. Contact: IPC Exbns, 01-643 8040	4-6 Nov
Madrid, Spain	Int Office Equip & Computers Exbn. Contact: CITEMA, Plaza de conde de valle Suchil 8, Madrid 15	13-20 Nov

MICROMART

GAMER

SHARP MZ-80 (£449 + VAT for 48K)
VIDEO GENIE (£289 + VAT for 16K)
ACORN ATOM ASSEMBLED (£150+ VAT)

+ INTELIVISION + ACE TV GAMES
+ CHESS COMPUTERS
+ HAND HELD ELECTRONIC GAMES
+ SF, FANTASY & WAR GAMES
+ ALL KINDS OF GAMES & PUZZLES

ATARI 400 £285 plus VAT
ATARI 800 £525 plus VAT

18 SYDNEY STREET
BRIGHTON 0273 698424

apple in MIDDLESEX

APPLE 11 EUROPLUS 48K
ONLY £649

Full range of APPLE products Word Processing System from £19 per week. Software: TABS, VLASAK, PADMEDE, Etc. New Low Price memorex discs from only £15.49 per 10. P & P FREE, add' 15% VAT send cheque/PO to Full range of Computer Books, Games and Supplies available for PET, APPLE, ZX80/81. Please send for full list enclosing SAE.

AUTOCRAT COMPUTERS 264 Preston Road, Harrow, Middx. 01-908 3636

HINTS & TIPS FOR THE ZX81
by Andrew Hewson £4.25

Based on the highly successful book for the ZX80
*80 pages explaining clearly how to squeeze a computing quart into a Sinclair pint pot.
*Saving Space – vital reading for all ZX81 users
*Understanding the Display File – using the display file as memory; clearing a part of the display, etc.
*converting ZX80 programs – explaining how to convert the hundreds of published ZX80 programs.
*Chaining Programs – revealing techniques for passing data between programs, calling subroutines from cassette and establishing data files.
*Machine Code Programs – explaining how to get started, how to write, load, edit and save machine code routines. Including full details of Z80 machine language.
*Routines and programs in BASIC and machine code are scattered throughout the text and the final chapter lists twelve useful, interesting and entertaining programs such as LINE RENUMBER, BOUNCER, LIFE, SHOOT, STATISTICS and they all run in 1K.

HINTS & TIPS FOR THE ZX80 £3.50
by A.D. & J.S. Hewson

Some comments from enthusiastic purchasers:
'Your book . . . is excellent' Mr G. Smith, Slough
'. . . most interesting, especially the display file section' Mr Effemey, Colchester
'. . . enormously helpful and streets ahead of any of the other publications currently available for these little machines' Mr Shaughnessy, Brighton
'The book for the ZX80 . . . has been a splendid aid' Mr Herrod, Solihull

On cassette for 16K ZX81

SPACE INTRUDERS – fight the marauding alien as you battle to save the Earth. All the dynamic parts of this program are written in machine code for super fast fun. Just like the famous arcade game £6.50
PROGRAMMERS TOOLKIT – Line renumber including GOSUBs and GOTOs, full facility Hexadecimal Loader/Printer, Find, Edit and Replace BASIC program strings £8.50

Blank C12 cassettes 5 for £2.75, 25 for £13.25

Send SAE for full catalogue Cheque with order or quote Access number to Hewson Consultants, 7 Grahame Close, Blewbury, Oxon OX11 9QE (0235) 850075

To advertise in
MICROMART
Please ring Marianne McNicholas
on 01-631 1433

PCW SUBSET

Alan Tootill presents more useful assembler — language subroutines. If you'd like to contribute your routines (for any of the popular processors), send them to: Sub Set, PCW, 14 Rathbone Place, LondonW1P 1DE.

Text handling

Most applications need some text handling, so any general purpose routines you have developed for this will be very welcome. Many of our home micros are still without the amount of memory and direct access storage we would like, so we start this section off with a routine to economise on space. It can both pack characters, in the range 20H to 5FH, into 6-bit portions of contiguous memory and expand such blocks of 6-bit characters into 8-bit bytes.

Called PAC/UNPAC, the Datasheet brings us back to the Z80 processor. It is submitted by two readers, Dave Yeomans of Halifax and Dave Barrow of Hemsworth, brought together through 'Sub Set'. Routines to do a similar job in M6809 code are given in the *MC6809 Preliminary Programming Manual*.

Datasheet

```
;= PAC/UNPAC — Compress and expand characters
;/ CLASS: 1
;/ TIME CRITICAL? No
;/ DESCRIPTION:  When entered at PAC, converts a string of 8-bit
;/               characters, in the range 20H to 5FH, to a string
;/               of 6-bit characters. When entered at UNPAC,
;/               converts 6- into 8-bit characters.
;/ ACTION:  Not given
;/ SUBr DEPENDENCE: None
;/ INPUT:   HL holds the address of the 1st byte of source data
;/          DE holds the address of the 1st byte of the destination
;/          buffer
;/          BC = Number of characters to be packed/unpacked
;/ OUTPUT:  HL holds end of string + 1 address
;/          DE holds end of destination + 1 address
;/          BC = zero
;/ REGs USED: AF HL DE BC
;/ STACK USE: 4
;/ LENGTH: 64
;/ PROCESSOR: Z80

PAC:    LD    A,80H    ; clear A & set PAC flag.          3E  80
        JR    BINC     ;                                  18  01
UNPAC:  XOR   A        ; clear A for byte indicator.      AF
BINC:   INC   B        ; adjust BC for queer decrmnt.     04
LOOP:   PUSH  BC       ;                                  C5
        PUSH  HL       ;                                  E5
        INC   A        ; get next byte sequence no.       3C
        LD    C,A      ; and save in C.                   4F
        ADD   A,A      ; PAC or UNPAC flagged by carry    87
        LD    B,A      ; & no of bits to shift in B.      47
        LD    A,(HL)   ; get next source byte and         7E
        JR    C,DOPAC  ; jump if PAC.                     38  0D
        DEC   HL       ; else get other part of           2B
```

FREE ASSEMBLER
LISTING IN NEW BOOK COMPLETE MACHINE/ ASSEMBLY LANGUAGE COURSE FOR
FROM 8K PET 2/3000 SERIES

Makes Machine-Code as easy as ABC. Over 100 pages! Examples, programs, exercises. Covers WHOLE Instruction set.
Send £8 (cheque, PO) inc P&P (UK) or £12 for book + assembler on cassette (UK) or SAE for details to
P. HOLMES, 21 COLIN DRIVE
LONDON NW9 6ES

MICROTYPE



NEW LOW PRICE!
MODEL & CASE
READY CUT CASE FOR SUPERBOARD, UK101, NASCOM 2. (ALSO AVAILABLE WITH BLANK KEYBOARD FOR HOMEBREW, NASCOM 1, ETC.)
PRODUCED IN BLACK ABS PLASTIC, COMPLETE WITH SCREWS AND INSTRUCTIONS. SPACE FOR EXPANSION, FORCE FEED FAN, NUMERIC PAD AND ADDITIONAL KEYS.
ONLY £19.95 + £1.50 p&p + VAT.
SEND CHEQUES OR PO's FOR £24.67 TO:
MICROTYPE, P.O. BOX 104, HEMEL HEMPSTEAD, HERTS. HP2 7QZ.
SAE FOR DETAILS. DEALER & OEM ENQUIRIES WELCOME.

```
        LD      H,(HL)  ; packed byte in H and          66
RISH:   RR      H       ; shift right until             CB  1C
        RRA             ; in bits 0-5,A.                1F
        DJNZ    RISH    ;                               10  FB
        AND     3FH     ; mask out unwanted bits and    E6  3F
        ADD     A,20H   ; convert to ASCII.             C6  20
        JR      LODE    ; jump to common part.          18  0C
DOPAC:  SUB     20H     ; adjust ASCII to bits 0-5,A    D6  20
        LD      L,A     ; and copy into                 6F
        LD      H,+0    ; HL.                           26  00
LESH:   ADD     HL,HL   ; shift left by twice the byte  29
        DJNZ    LESH    ; sequence number.              10  FD
        LD      B,L     ; move lowest bits into B.      45
        DEC     DE      ; point to lowest avail dest.   1B
        LD      A,(DE)  ; byte, get in A, merge any bits 1A
        OR      H       ; from current source byte.     B4
LODE:   LD      (DE),A  ; converted byte to destination. 12
        POP     HL      ; restore source pointer.       E1
        LD      A,C     ; byte indicator to A.          79
        AND     83H     ; do a "mod 4" on it.           E6  83
        JR      Z,DINC  ; skip if UNPAC, byte 4.        28  09
        CP      81H     ; test to split PAC, bytes 1—3  FE  81
        JR      C,HINC  ; off & skip if UNPAC 1—3/PAC 4. 38 04
        INC     DE      ; lowest bits of PAC 1—3        13
        EX      DE,HL   ; with trailing reset bits      EB
        LD      (HL),B  ; into next empty               70
        EX      DE,HL   ; destination byte..            EB
HINC:   INC     HL      ; point at next new bytes.      23
DINC:   INC     DE      ;                               13
        POP     BC      ; restore count                 C1
        DEC     C       ; and test for                  0D
        JR      NZ,LOOP ; last byte and                 20  C9
        DJNZ    LOOP    ; repeat if not.                10  C7
        RET             ; else return.                  C9
```

A detail worth noting in PAC/UNPAC is the way the Daves decrement BC and jump if not zero (DEC C; JR NZ, LOOP; DJNZ LOOP) having earlier, at label BINC, incremented B to adjust BC for the queer decrement. This code might (or might not) be preferred on occasions to the code we have used previously (DEC BC; LD A,C; OR B; JR NZ, LOOP) since it does not use the A register.

Random numbers

Giving Knuth, *Art Of Computer Programming*, Vol 2, Ch 3 as his reference, Brian Steel of Kingston-upon-Thames writes:

'There are two points I think should be made about the Random Number routines in July's "Sub Set".

Firstly, in a mixed congruential sequence:

$Xi+1 = aXi + C \ mod \ M$

it is important that 'potency' is high. Potency is the power to which (a—1) must be raised before it is directly divisible by M (which it always will be eventually, if your other criteria are met); 257 is a bad 'a', since a—1 = 256 and $256^2 = 65536$ or 2^{16}: thus potency is only 2. If you choose a = 5 mod 8 you will ensure higher potency (eg, 5, 13, 21 etc).

Secondly, 'a' should be greater than 0.01M but less than 0.99M for good results. 257 is less than $0.01*2^{16}$ and therefore fails here, too.

By observing these guidelines you have a better chance of getting a good PRANG, but sadly it can't be guaranteed on these (plus your) criteria alone. However, *no* good PRANG has a potency of less than 3, and 5 or more is desirable for this measurement.'

In fairness to the contributor of our original Datasheet RAND, he did suggest better 'a's than 257 and two of them were ≡ 5 mod 8, greater than 0.01M and less than 0.99M. Still, Brian's remarks present a challenge waiting to be met in 8080, Z80, 6502, and M6800 code. Nothing with a potency of less than 5 will be considered. June's arithmetic routines might help Z80 users to calculate potency.

Andrzej Filinski, of Vedbaek, Denmark, became the fourth reader to give the optimum improved code for RAND as printed last month.

6502 find

We mentioned how June's FIND could be made equivalent to FOWIA (find out where I'm at) and give in Y,X the current program address on return from the call thus:

```
PLA     ; pull ret addr     68
TAX     ; low byte to X.    AA
```


MICROMART

CC MICRO SYSTEMS
APPLE & ITT2020
SOFTWARE SPECIALISTS
MANAGEMENT INFORMATION SYSTEM (DATABASE)
from £126.00
*All standard features PLUS
*Powerful arithmetic capability
*Flexible Report Generating
*Quick and easy to use.
*FREE DEMONSTRATION
*COMPREHENSIVE AFTER SALES SERVICE
For further details contact:
CC MICRO SYSTEMS
48 MELROSE AVENUE
PEN-Y-LAN
CARDIFF CF3 7AS
Tel: 0222-495257

ACORN ATOM
Quality software for the Acorn Atom
INVASION (6K) £6.00
Fast machine code version requiring only 6K total RAM. Uses graphics mode 0.
TORPEDO (4K) £4.00
Three rows of targets moving at different speeds and in different directions.
BREAKTHROUGH (6K) £4.00
Blast your way through the advancing wall.
ZOMBIE (4K) £3.50
Lure the dreaded zombies into the potholes or you will be eaten.
Figures refer to total RAM required. All prices include postage.
Educational programs also available. Send SAE for details.
ZX81 software available. SAE for details.
J PURVES 12 Stobhill Road
Gorebridge Midlothian EH23 4PL

BIG EARS
SPEECH INPUT FOR YOUR COMPUTER!

BIG EARS opens the door to direct man-machine communication. The system comprises analogue frequency separation filters, preamps and signal conversion, together with a quality microphone and extensive software.
Words, in any language, are stored as "voice-prints" by simply repeating them a few times in "learn" mode. Using keyword selection techniques, large vocabularies can be constructed.
Use BIG EARS as a front end for any application: data enquiry, robot control, starwars — the possibilities are unlimited...
BUILT, TESTED & GUARANTEED ONLY £49
PRICE INCLUDES POSTAGE & PACKING PLEASE ADD VAT AT 15%
PLEASE STATE COMPUTER: UK101, SUPERBOARD, NASCOM2, PET, TRS80, ETC.
MICROGRAPHICS
Colour Conversion for UK101/NASCOM 1 & 2/ Superboard. (Modulator included) KIT £45 BUILT £60
COLOUR MODULATOR KIT £12
RGB in, PAL/UHF out BUILT £18
Please add VAT at 15% to all prices
Barclay/Access orders accepted on telephone
WILLIAM STUART SYSTEMS Ltd
Dower House, Billericay Road, Herongate, Brentwood, Essex CM13 3SD.
Telephone: Brentwood (0277) 810244

ACORN ATOM
UTILITY ROM
Plugs straight into the Atom to provide 17 new commands including: renumber, delete, find, auto line numbers, program compression, disassembler, keyboard scanning, memory and variable dumps, and much more. Supplied with full instruction manual. All inclusive price £35. Send SAE for further details.
WILLOW SOFTWARE
PO Box 6, Crediton, Devon EX17 1DL

INSURE YOUR COMPUTER
Impact damage, Fire & Theft Insurance for your Computer Equipment:
£1 to £1,500 cover ..... £8.00 p.a.
£10 (excess) x/s
£1,500 to £2,500 ..... £16.00 p.a.
£15 x/s.
For details:
KGJ Insurance Brokers,
6 Hagley Road, Stourbridge,
West Midlands, DY8 1QG
Tel (03843) 5333/2545

MICROMART

sinclair
ZX81
SOFTWARE

16K ADVENTURE DRUAGHTS
OTHELLO HEXAPAWN
LUNAR LAND TORPEDO
ARCADE GAMES GRAPHICS

Send a large sae for the new range of 1K and 16K software for the SINCLAIR ZX81

CDS MICRO SYSTEMS
10 Westfield Close, Tickhill
Doncaster DN11 9LA
Mail Order Only

ZX81+16K Software

A Cubic Puzzle, Mastermind, Shoot, Tower of Hanoi, Snap, 4 Century Calendar, Proverbial Codebreaker, Moonlander and others.

SPECIAL OFFER: Any 4 of the above games on a cassette for £3.45. Base cassette 75p + any above program at 75p each (min 2).

Will sell listings separately (25p each, min 2).

Please send large SAE for FREE catalogue or listings.

SCS 4 FFORDD GERWYN, ITHENS, WREXHAM, CLWYD

topmark computers

NEW ! NEW ! NEW !

apple

APPLE FORTRAN
(Needs language card)

Send only £120 + VAT £18 (Fortran only)
or £419 + VAT £62.85 (complete system, includes Pascal and language card)

NEW ! NEW ! NEW !

NEW ! DOS 3.3 – much improved capacity £40 + VAT £6.

NEW ! Eurocolour card – vastly superior to previous versions £113 + VAT £16.95

Official Government and Educational orders accepted.

Contact Tom Piercy at
Topmark Computers, 77 Wilkinson Close, Eaton Socon, St Neots, Cambs. PE19 3HJ
Huntingdon (0480) 212563

```
    PLA     ;  high byte      68
    TAY     ;  to Y.          A8
    PHA     ;  hi byte to stk.  48
    TXA     ;  lo byte to A.   8A
    PHA     ;  lo byte to stk.  48
    INX     ;  adjust to addr  E8
    BNE,L1  ;  of next        D0 01
    INY     ;  instruction.   C8
L1: RTS     ;  return.        60
```

Vincent Fojut from Salford, a member of the Manchester Computer Club and local Atom Users' Group, offers a different approach to the same task in our next Datasheet, GETLOC. He puts the program address in some of the page zero memory we agreed last month to reserve for 6502 datasheets. GETLOC is two bytes more but 6–7 T states less than the amended FIND and does not use the X or Y registers.

Datasheet

```
;= GET LOC — Get current program address
;/ CLASS: 2
;/ TIME CRITICAL? No
;/ DESCRIPTION:   Gives in consecutive zero page locations the
;/                address of the instruction it is at, after
;/                returning to the code that called it.
;/ ACTION:  CY ← 0
;/           ↑A
;/           A ← A+1
;/           M0 ← A
;/           ↑A
;/           A← A+Cy
;/           M1 ← A
;/ SUBr DEPENDENCE: None
;/ INTERFACES: None
;/ INPUT:    Processor must be in binary mode (ie, decimal flag reset)
;/ OUTPUT:   M0 contains the low order and M1 the high order byte
;/           of the address of the current program instruction
;/           (ie, the instruction immediately following the call
;/           to GETLOC). The carry flag is always unset.
;/ REGs USED:   A, M0 and M1.
;/ STACK USE:   None
;/ LENGTH: 14
;/ TIME STATES: 25
;/ PROCESSOR: 6502
;
GETLOC:   CLC              ; prepare to add with no carry.   18
          PLA              ; pull return address (low).      68
          ADC  £01         ; increment address by 1          69  01
          STA  M0          ; and save.                       85  ZZ
          PLA              ; pull return address (high).     68
          ADC  £00         ; add in carry                    69  00
          STA  M1          ; and save.                       85  ZZ
          JMP  (M0)        ; return.                         6C  ZZ  00
```

Vincent demonstrates GETLOC in action with a 6502 version of our old friend the 4-bit binary to Gray Code conversion, one byte shorter than the Z80 and two bytes shorter than the M6800 version. This 6502 version has the most significant nibble of the Y register zero and the least significant nibble giving the value to be converted on input and returns the Gray Code conversion in the least significant nibble of the register — see Listing 1.

```
GYCON:   JSR  GETLOC                  20  XX  XX
         TYA              ; add table  98
         ADC  £07         ; displacement 69  07
         TAY              ; to no. in A. A8
         LDA  (M0),Y      ; get conversn B1  ZZ
         RTS              ; value & ret. 60
TABLE:                                 00  01  03  02
                                       06  07  05  04
                                       0C  0D  0F  0E
                                       0A  0B  09  08
```

Listing 1

Calculate v look-up

When he first saw that way of converting binary to Gray Code in Z80 code, Dave Barrow was against using a look-up table for something that is shorter and quicker when computed, especially if the Gray Code is extended from four to eight bits.

He spotted that, when converting from binary to Gray, each Gray bit has a different state to the corresponding



SOFTWARE

WE WRITE PROGRAMS TO FIT YOUR REQUIREMENTS
SPECIALISTS IN PET SOFTWARE

ARMBAM LTD
KILN LANE
LEIGH
TONBRIDGE
KENT TN11 8RT
HILDENBOROUGH 832130

ZX80 – 81
SOFTWARE

* ZX 80 BASIC Fully disassembled
* ZX 81 BASIC listings @ £7.00 each
* ZXBUG: Now available for ZX81, also machine code debugging program @ £7.00
* ADVENTURE: A real machine code ADVENTURE @ £7.00
* ZXCHESS: The program everyone's waited for written in machine code. @ £10.00

Many more games & educational programs available. Send SAE for further details to:

ARTIC COMPUTING
396 James Reckitt Avenue, Hull,
HU8 0JR

binary bit if the next higher binary bit is set, ie, each Gray bit is the result of XORing the corresponding binary bit with the binary bit's left-hand neighbour. There are hardware circuits to do this or all eight bits of a byte can be done in the software:

```
LD      C,A
SRL     C
XOR     C
```

This code repeated three or seven times converts 4-bit or 8-bit Gray Code back into binary. Dave Barrow has based the next Datasheet, BGCB, on this principle. Both Z80 and 6502 code is given.

Datasheet

```
;= BGCB — Gray Code to and from binary
;/ CLASS: 1
;/ TIME CRITICAL?: No
;/ DESCRIPTION: Converts binary value to Gray Code in input
;/                count is 1. Converts Gray Code to binary if
;/                input count is 3 (4-bit value) or 7 (8-bit value)
;/ ACTION: A ← Input Value
;/          Iterate for input count
;/                A ← A/2 (unsigned)
;/                A ←     Input Value
;/ SUBr DEPENDENCE: None
;/ INTERFACES: None
;/ INPUT: Z80: Value in A, count in B
;/        6502: Value in A, count in Y
;/ OUTPUT: Z80: Converted Value in A, B = 0
;/         6502: Converted Value in A, Y = 0, X = stack pointer —2
;/ REGs USED:   Z80: A B F      6502: A Y P X
;/ STACK USE:   Z80: 2          6502: 1
;/ LENGTH:      Z80: 9          6502: 11
;/ TIME STATES: Z80 — B to G: 55, G to B (4-bit) 97, (8-bit) 181
;/              6502          23              45          89
;/ PROCESSOR: Z80  6502
;  Z80 version
BGCBZ:  PUSH    HL      ;                       E5
        LD      L,A     ; store input value.    6F
        OR      A       ; clear carry.          B7
LOOPZ:  RRA             ; shift right.          1F
        XOR     L       ; exclusive OR with input value.  AD
        DJNZ    LOOPZ   ;                       10  FC
        POP     HL      ;                       E1
        RET             ;                       C9
;
;  6502 version
;
BGCBS:  TSX             ; index stack.          BA
        PHA             ; store input value     48
LOOPS:  LSR     A       ; shift right.          4A
        EOR     $0100,X ; exclusive OR with input value.  5D  00  01
        DEY             ;                       88
        BNE L   LOOPS   ;                       D0  F9
        TXS             ; remove input value from stack.  9A
        RTS             ;                       60
```

Look-up v calculate

Jan Beckman, from Ashstead, writes that we should never overlook the power of look-up tables when it comes to getting things done speedily. To illustrate this, he uses a look-up table to divide four BCD digits in HL by two in 52-61 T states against our previous best (not printed) of 82-93 T states. Jan's routine does not give a carry signal for any remainder and takes rather a lot of space with its 154-byte table in addition to its 15 bytes of code. It is also highly position-dependent since the table must start on a page boundary. But it is fast. Here is the code:

```
HALFHL: LD   D,H              54
        LD   H,table hi addr  26 nn
        LD   E,(HL)           5E
        LD   L,D              6A
        LD   D,(HL)           56
        BIT  0,L              CB45
        EX   DE,HL            EB
        RET  Z                C8
        LD   A,50H            3E50

        ADD  A,L              85
        LD   L,A              6F
        RET                   C9
```

The table looks like this:

```
TABLE:  ORG     nn00H
        DEFW    0000H
        DEFW    0101H
        DEFW    0202H
        DEFW    0303H
        DEFW    0404H
        DEFS    6
        ..............
        ..............
        ..............
        DEFW    4444H
        DEFS    6
        DEFW    4545H
        DEFW    4646H
        DEFW    4747H
        DEFW    4848H
        DEFW    4949H
```


MICROMART

NASCOM SOFTWARE

We offer the following quality software for NASCOM systems:

NASPAS — a 12K PASCAL compiler which produces Z80 code directly i.e. no P-code. The compiler offers floating point and integer airthmetic, arrays, sets, strings and all major Pascal statements together with fully recursive functions and procedures with value and variable parameters. The object programs run very quickly. Price: £35.00

NASMON — A new monitor for NASCOMs. Occupies 4k and includes a sophisticated screen editor, a 'front panel' mode, blocked and buffered tape routines and powerful debugging commands. Price: **£30.00** in EPROM

BAS12K — a 12K BASIC interpreter offering 11 digit precision arithmetic, PRINT USING, IF. . . THEN. . . ELSE and other advanced features. Price: £25.00

NASGEN — a fast 3K assembler generating a full symbol table and with many assembler directives and commands.
Price: £15.00 on tape, £25.00 in EPROM.

NASNEM — a 2½K disassembler which interfaces to NASMON's front panel to produce single step disassembly. Optionally it produces labels and o/p may be directed to a text buffer suitable for NASGEN.
Price: £10.00 on tape, £15.00 in EPROM.

All the above software runs under NASMON except NASPAS which can run under NASMON or NAS-SYS.

All prices are fully inclusive.

FREE: a free CHESS program with every order of NASMON.

Full details may be obtained from:
HISOFT 60 Hallam Moor, Liden, Swindon Wiltshire.

SHARP MZ 80K

Special Programme Package
25 PROGRAMMES FOR £25

HANGMAN. HOME BUDGET. BLOCKADE. SPACEPURSUIT. BOMBER. ELECTRONIC-ORGAN. GRAPHICS. HYPNO. MUSIC. POKER. OTHELLO.3D MAZE. DUCK-SHOOT. STAMPOUT. WORLD TIME. PRIME NUMBERS. BREAKOUT. COLDITZ.SPACE-FIGHTERS. STARTREK. PAPERSTONES. COSMIC INVASION. SNAKE ISLAND CO-ORDIN WARS. ETERNAL CALENDAR.

LIMITED OFFER SEND CHEQUE FOR £25 TO STENMEAD, 42 BERECROFT, HARLOW, ESSEX.

Super Machine Code Word Processor

FOR PET

£35 + VAT

All you'd expect in a £75-£150 program, PLUS redefine keyboard, auto repeat, tape or disk files, old & new ROMs, PET or ASCII printer, AND 80-column PETS. No need to change when you upgrade. We didn't believe it either! £35 tape can be saved to disk, has 80-column mod listing. £37 disk includes sample files plus full 80-column version.

LIGHT PEN + SOFTWARE — plugs in. **£22**

PROGRAMMER'S TOOLKIT — 16/32K new ROM: makes programming less like work! **£29**

ADVENTURE 1 & 2: authentic Scott Adams 24K classic games. Each £7 (both, **£13**)

FANTASTIC MUSIC MACHINE: hardware + software to write music on your PET and see it play. Add small speaker or play through hi-fi. 4 voices. Transpose, change tempo, repeat segments etc just by typing a row of characters. Save music to disk or tape. Beautifully simple: write tunes within minutes! Old & new ROMs, 8-32K. **£37** complete.

Add VAT to all prices please, but post/insurance included. Unconditional Instant Refund Guarantee on hardware, also software if not up to description. Write for more details, more items.

SIMPLE SOFTWARE LTD
15 HAVELOCK ROAD
BRIGHTON, SUSSEX BN1 6GL
(0273) 504879

We welcome Access

NORTHWICH/MID CHESHIRE
CONSULTANCY
BUSINESS SYSTEMS
MAINTENANCE and SERVICE
BUREAU SERVICES

For the personal user our computer shop is now open

PET/CBM Specialists

Hartford Software Ltd.
63 Chester Road, Northwich,
Cheshire. Tel: (0606) 781156

LCL O-LEVEL MATHS

Send for a **FREE** Demonstration Program for your Apple II now, to show you how easy, enjoyable but effective LCL Programs are. **LCL TRAINING PROGRAMS** take the beginner, at his own pace, step-by-step to O-Level standard. Each includes about 240 problems sound and a game. Revision Programs set & mark questions from O-Level Maths Papers.

GUN-SLINGER. Logs and Antilogs > 1
GOAL-KICK. Logs and Antilogs < 1.
SWORD-CLASH. Use of Logs in multiplication, division, roots and powers.
REVISION questions on Logs.
Many more. Send £15 for each program (disc) & text book set, or £3.50 for Demo Program to pay for disc etc. No extras (VAT or p&p).

Send to G. Ludinski B.Sc (Hons), AMBCS AMIEE. LCL, 26 Avondale Avenue, Staines, Middlesex.

MICROMART

It pays to increase your

PET POWER

Why not make use of the spare ROM sockets in your large keyboard PET or CBM machine? Let's take a look at some of the options:

SUPERCHIP (45) is the most successful British chip. It adds many of the features of the 8032 to a 40 column machine, and has numerous other functions including auto-repeat.

FASTER BASIC (£30) speeds up most Basic programs, cutting running time by as much as half. No knowledge of Basic is necessary.

PIC-CHIP (£45) makes it really simple to plot points or draw lines, but it has many other graphic facilities. Now available for the 8032.

MIKRO ASSEMBLER (£50) really does make machine language programming as simple as Basic!

SUPER-PIC (£90) is an unbeatable combination! All the facilities of Superchip and Pic-Chip in one 4k EPROM.

We have many other utilities on cassette or disk, including SPEEDSORT (£12), DISK SEARCH (£25), MASTER DIRECTORY (£22), DISK MERGE (£15) and J-K-L which copies the screen to a printer is just £8 (please state model of printer).

Prepaid orders are post free. Add 15% VAT.

SUPERSOFT

Dept P6, 10-14 Canning Road,
Wealdstone, Harrow, Middlesex
Telephone: 01-861 1166.

ADVENTURE GAMES

MACHINE CODE PROGRAMS FOR THE UK101 OR SUPERBOARD WITH ANY MONITOR

1. **NEW YORK SUBWAY/TROLL'S TUNNEL (£5.50)**
Overcome the trolls, stone giant, and many other monsters to escape from an underground prison.
2. **ZOMBIE FOREST/VAMPIRE CASTLE (£5.50)**
Survive the servants of the Evil One, and rid the forest of its dark curse.
3. **KY, TEMPLE OF THE DRAGONKING (£5.50)**
With strong shield and pulsating sword, slay the dragon and liberate your people.

EACH ABOVE PACK HAS TWO 8K PROGRAMS

4. **ALIEN ADVENTURE 16K (£6.00)**
Your spacecraft is stranded on an asteroid in deep space. Escape is possible, but not easy.

TWO OR MORE PACKS — LESS 20%

From Mr M Perkins, 290 Station Road, Stechford, Birmingham B33 8QR

Quality support for: ATOM ZX80 ZX81

ZX80 ACTION !
2 games per cassette - for only £4 !!
Flicker-free action games for your ZX80. Only 1K RAM needed, and the original (4K) ROM.
Cassette C80A: **BRKOUT - - - - - - - ACK-ACK** £4-
Cassette C80B: **SHELL GAME - - - - INVADERS** £4-

The ZX80 Magic Book
** WITH 8K ROM / ZX81 SUPPLEMENT **
Games programs, computer music, converting programs written in other BASICs. Improving the picture, RAM and I/O circuits, and much more. £4.75

Getting Acquainted with your ZX81
A Tim Hartnell masterpiece. £4.95

23+23 WAY ZX80/81 EDGE CONNECTOR SOCKET £3.50

ATOM CASSETTES ; £5 each
CAAA: **BREAKOUT + CUPBALL + 3D MAZE + SIMON 2**
CAAB: **PINBALL + LETTERS + SPACEWAR + DRIVE**
Both tapes need 1K VDU + 5K text RAM

The ATOM Magic Book
A wealth of games and other programs; storing speech in your ATOM, converting programs written in other BASICs, tape recording hints, plus many other useful hardware and software tips. £5.50

16/32K ATOM RAM Boards from £59.50
Single Eurocard, can fit inside Atom's case. Built & tested. Also suitable for other 6502/6800 computers. Bare PCB only £23. S.a.e. for further details

ALL PRICES INCLUDE U.K. P&P + VAT WHERE APPLICABLE

TIMEDATA Ltd. 57 Swallowdale, Basildon, Essex

LEISURE LINES

Well, we had a fairly mediocre response to July's puzzle, proving once again that the computer would prefer numerics to alphanumerics. Only 11 entries were received for the word/prime number puzzle and one of those was withdrawn when its originator found that his solution wasn't a prime number after all!

There were some very strange words, too. We decided to ban 'interestingness' and although 'disintegrating' looked good, it's not a prime. The largest word which fulfilled all conditions was 'assassinating', corresponding to the number 2,772,776,528,653, which we verified as a 13-digit prime. This came from Mr Brian Stuart of Neubiberg, Germany, whose prize will be on its way soon.

Prize puzzle

Write down eleven thousand, eleven hundred and eleven. It doesn't divide exactly by seven — agreed?

Quickie

The members of a philanthropic family decided to donate £2000 to a group of worthy charities. Each member contributed an equal portion of the money and then allocated it among the agreed charities so that:

a) each charity received a donation of at least £1 but no more than £12 from each family member;

b) no two charities received the same amount from the same family member;

c) no two family members followed the same donation pattern. Finally, all donations were in whole pounds and all the money was distributed.

How many family members were there and how many charities?

Answers on a *postcard* please to: October Prize Puzzle, Leisure Lines, *PCW*, 14 Rathbone Place, London W1P 1DE, to arrive no later than 31 October.

PROGRAMS

TRS-80 Sailing Simulation

by Frank Hope

This program simulates sailing various types of dinghy to varying standards. As far as possible, it follows good sailing techniques. All the knowledge required to use the program is included in the glossary of technical terms and you are strongly advised to study this carefully, since normal club practice can differ from the RYA's recommendations. The program occupies 20k.

```
1 POKE16396,23:GOTO290
2 J1=0:J2=0:J3=0:J4=0:J5=0:J6=0:J7=0:D1=0:D3=0:D5=0:D6=0:D7=0:P2=0:B1=0:04=0:P01
=0
3 IFNC=1THEN278
4 GOSUB118:PRINT@259,"STUDY THE TECHNICAL DATA.";:PRINT@323,S7$;:PRINT@451,"A. C
AST OFF.";:PRINT@515,"B. SEE A DOCTOR.";:PRINT@579,"C. WAIT FOR FINE WEATHER.";:
PRINT@643,"D. HAVE A REST PERIOD.";:PRINT@707,"E. SEE THE GLOSSARY.";:GOSUB112
5 GOSUB123:IFNN$<>"A"ANDNN$<>"B"ANDNN$<>"C"ANDNN$<>"D"ANDNN$<>"E"THENGOSUB99ELSE
7
6 GOTO5
7 IFNN$="A"THEN8ELSEIFNN$="B"THEN11ELSEIFNN$="C"THEN16ELSEIFNN$="D"THEN19ELSEIFN
N$="E"THEN24
8 IFN1=1ANDC1>3ORN1=2ANDC1>4ORN1=3ANDC1>5THENO2=1
9 IFO2<>1THEN36ELSEGOSUB110
10 GOSUB83:GOTO2
11 IFP1=1THENP9=1:GOSUB110
12 IFP1=1THEN2
13 IFP1=2THENGOSUB107ELSEIFP1=3THENGOSUB108
14 P9=1:GOSUB112
15 GOTO2
16 IFN1=1ANDC1<4ORN1=2ANDC1<5ORN1=3ANDC1<6THENO4=1ELSEO4=2
```


APPLE DOS 3.2

PERSONALIZED DISKETTE SERVICE
Your own DOS commands to order
Flashing Disk Volume to order
Flashing Disk File to order
Free Sector Count in DOS

SIMPLE LETTER WRITER (Disk only)
for Apple/Paper Tiger Printer Uses
9½" computer paper Enchanced mode
for Letter Heading 96 character line
Lower case with Lazer's I/c adaptor

SAE for details
MAIL ORDER ONLY
KWOKSONIC 27A ORCHARD ROAD
BROMLEY KENT

ZX80/81 DATABASE

For serious 8K ROM/16 RAM users, DATABASE blends Basic menus with over 1K m/c logic to give dynamic file of name/address/interest codes/text. Selectable display formats include address labels for printing. Search any element type by any key. Beautiful to use, and very fast. All file data is packed into a single string whose length is automatically altered for 0 to 500+ entries. Tape and full documentation . . . . £10.

SAE for full catalogue of Action games, Magic Cube, Disassemblers. . for 4K or 8K ROM,Sinclairs.

CAMPBELL SYSTEMS dept PCW, 15 Rous Rd, Buckhurst Hill, Essex 1G9 6BL.

PROGRAMS

```
17 GOSUB110:GOSUB83
18 GOTO2
19 IFP1=1THENP9=1
20 IFP9=1THENGOSUB110
21 IFP1=1THEN2ELSEIFP1=2THENGOSUB107ELSEIFP1=3THENGOSUB108
22 P9=1:GOSUB112
23 GOTO2
24 GOSUB118:IFN1<2THEN25ELSEPRINT@452,"YOU SHOULD'NT NEED IT.";:05=1:GOSUB110:GO
TO2
25 PRINT@259,"SPRING = VERY HIGH/LOW.";:PRINT@D,"NEAP   = SMALL HIGH/LOW.";:PRIN
T@387,"FLOOD  = COMING IN.";:PRINT@451,"EBB    = GOING OUT.";:PRINT@515,"FORCE
= WIND SPEED.";:PRINT@581,"3 IS ENOUGH FOR YOU.";
26 PRINT@643,"WIND DIR. = WHERE IT COMES";:PRINT@712,"FROM. E.G. THE EAST.";:GOS
UB120
27 GOSUB101:PRINT@258,"BAROMETER = WEATHER GUIDE.";:PRINT@322,"FALLING   = BAD W
EATHER.";:PRINT@386,"RISING    = GOOD WEATHER.";:PRINT@450,"BEATING   = 45° TO T
HE WIND.";:PRINT@514,"REACHING  = ACROSS THE WIND.";
28 PRINT@578,"RUNNING   = FROM THE WIND.";:PRINT@642,"C.BOARD   = A MOVING KEEL.
";:PRINT@706,"(CLOSE HAULED = FULLY DOWN).";:GOSUB120
29 GOSUB101:PRINT@258,"REEFING  = REDUCE SAIL.";:PRINT@322,"MAINSAIL = BIGGEST S
AIL.";:PRINT@386,"RUDDER   = STEERING GEAR.";:PRINT@450,"FLATTEN  = TIGHTEN SAIL
.";:PRINT@514,"FULLNESS = SLACKEN SAIL.";
30 PRINT@578,"JIB       = SMALL FRONT SAIL.";:PRINT@642,"TRANSOM  = BACK VERTICAL
";:PRINT@717,"SECTION OF BOAT.";:GOSUB120
31 GOSUB101:PRINT@67,"  TIDAL CALCULATIONS.";:PRINT@194,"D. OF W. = HW-LW/12*TR+
CDW";:PRINT@322,"TWELFTH RULE (TR) :-";:PRINT@452,"1 HR. AFTER LW  = 1";:PRINT@5
16,"2 ND.   -:-     = 3";:PRINT@580,"3 RD.   -:-     = 6";:PRINT@644,"4 TH.   -:
-     = 9";
32 PRINT@708,"5 TH.   -:-     = 11";:PRINT@772,"6 TH.   -:-     = 12";
33 GOSUB120:GOSUB101:PRINT@67,"  SPEED CALCULATIONS.";:PRINT@323," IF WITH THE T
IDE THEN";:PRINT@387,"SAILING TIME = T/(BS+TS)";:PRINT@515,"IF AGAINST THE TIDE
THEN";:PRINT@579,"SAILING TIME = T/(BS-TS)";:GOSUB120
34 GOSUB101:PRINT@67,"  BEARING CALCULATIONS.";:PRINT@322,"IF V. = EAST ADD IT TO
 C.B.";:PRINT@386,"IF D. = EAST ADD IT TO C.B.";:PRINT@514,"IF V. = WEST TAKE FR
OM C.B.";:PRINT@578,"IF D. = WEST TAKE FROM C.B.";:GOSUB120
35 GOTO2
36 GOSUB139
37 GOSUB87
38 GOSUB134:GOSUB119:PRINT@194,"YOU MUST TRAVEL ";R$;
39 PRINT@322,"ARE YOUR SAILS SET FOR :-";:PRINT@390,"A. BEATING.";:PRINT@454,"B.
 REACHING.";:PRINT@518,"C. RUNNING.";:PRINT@642,S8$;
40 GOSUB121:IFNN$<>"A"ANDNN$<>"B"ANDNN$<>"C"THENGOSUB99ELSE42
41 GOTO40
42 IFNN$="A"THEN43ELSEIFNN$="B"THEN44ELSEIFNN$="C"THEN45
43 S1=1:N1$="  CLOSE HAULED ";GOTO46
44 S1=2:N1$="  REACHING     ";GOTO46
45 S1=3:N1$="  RUNNING      "
46 V=V7:GOSUB106:GOSUB119:PRINT@258,"CENTRE BOARD POSITION.";:PRINT@386,"SHOULD
IT BE :-";:PRINT@455,"A. NEARLY UP.";:PRINT@519,"B. FULLY DOWN.";:PRINT@583,"C.
HALF DOWN.";:PRINT@706,S8$;
47 GOSUB121:IFNN$<>"A"ANDNN$<>"B"ANDNN$<>"C"THENGOSUB99ELSE49
48 GOTO47
49 IFNN$="A"THEN50ELSEIFNN$="B"THEN51ELSEIFNN$="C"THEN52
50 M1=1:N1$="  ALMOST UP    ";GOTO53
51 M1=2:N1$="  FULLY DOWN   ";GOTO53
52 M1=3:N1$="  HALF DOWN    "
53 V=V8:GOSUB106:IF01=1ANDR1=1ANDS1=1ANDM1=2ORO1=1ANDR1=2ANDS1=3ANDM1=1ORO1=1AND
R1=3ANDS1=2ANDM1=3ORO1=1ANDR1=4ANDS1=2ANDM1=3THEN59
54 IFO1=2ANDR1=2ANDS1=1ANDM1=2ORO1=2ANDR1=1ANDS1=3ANDM1=1ORO1=2ANDR1=3ANDS1=2AND
M1=3ORO1=2ANDR1=4ANDS1=2ANDM1=3THEN59
55 IFO1=3ANDR1=3ANDS1=1ANDM1=2ORO1=3ANDR1=4ANDS1=3ANDM1=1ORO1=3ANDR1=1ANDS1=2AND
M1=3ORO1=3ANDR1=2ANDS1=2ANDM1=3THEN59
56 IFO1=4ANDR1=4ANDS1=1ANDM1=2ORO1=4ANDR1=3ANDS1=3ANDM1=1ORO1=4ANDR1=2ANDS1=2AND
M1=3ORO1=4ANDR1=1ANDS1=2ANDM1=3THEN59
57 P2=1:GOSUB110
58 IFNC=1THEN278
59 GOSUB112:KJ=0
60 LO=1:GOSUB118:PRINT@455,"HERE WE GO !!!";:GOSUB138
61 GOSUB229:IFD3=1THEN63ELSEIFD2=1ORNC=1THEN278ELSEGOSUB243:IFD3=1THEN63ELSEIFD2
=1ORNC=1THEN278ELSEGOSUB254:IFD3=1THEN63ELSEIFD2=1ORNC=1THEN278ELSEGOSUB264:IFD3
=1THEN63ELSEIFD2=1ORNC=1THEN278
62 GOSUB133:GOSUB148:GOSUB129:GOSUB102:GOSUB92
63 IFD2=1ORNC=1THEN278ELSEIFD3=0THEN65ELSEIFD3=1THENGOSUB118:PRINT@E,"WE ARE GOI
NG ASHORE !!";:GOSUB138:GOSUB74
64 PRINT@625,O$;:PRINT@689,O$;:PRINT@753,O$;:GOSUB83:GOTO2
65 IFD2=1ORNC=1THEN278ELSEGOSUB118:PRINT@262,"YOUR DOING WELL !!";:PRINT@324,"WE
 ARE OUT ON THE OPEN";:PRINT@387,"SEA. FROM NOW ON YOU NEED";:PRINT@456,"TO KEEP
 ALERT.";
66 KJ=1:LO=0:PRINT@579,"STUDY THE TECHNICAL DATA.";:GOSUB120
67 D3=0:J1=0:J2=0:J3=0:J4=0:J5=0:J6=0:D1=0:D5=0:P2=0
68 GOSUB83:IFRND(10)>6THENGOSUB158
69 GOSUB229:IFN1=1ANDD3<>1ANDC1>5ORN1=2ANDD3<>1ANDC1>6ORN1=3ANDD3<>1ANDC1>7THENG
OSUB97
70 IFD3=1THEN63ELSEIFD2=1ORNC=1THEN278ELSEGOSUB243:IFD3=1THEN63ELSEIFD2=1ORNC=1T
HEN278ELSEGOSUB254:IFD3=1THEN63ELSEIFD2=1ORNC=1THEN278ELSEGOSUB264:IFD3=1THEN63E
LSEIFD2=1ORNC=1THEN278ELSEGOSUB133:GOSUB94
71 IFD2=1ORNC=1THEN278ELSEIFD3=1THEN63ELSEGOSUB139:GOSUB102:GOSUB112
72 IFKL=1THEN284
73 GOTO67
74 GOSUB122:PRINT@709,STRING$(19,191);:POKE16068,139:PRINT@644,STRING$(6,143);:P
RINT@581,STRING$(5,191);:PRINT@518,STRING$(4,191);:PRINT@455,STRING$(3,191);:PRI
NT@392,STRING$(2,191);:POKE15689,191:POKE15625,170
75 PRINT@651,STRING$(10,143);:PRINT@587,STRING$(9,191);:PRINT@523,STRING$(8,191)
;:PRINT@459,STRING$(6,191);:PRINT@395,STRING$(4,191);:PRINT@331,STRING$(2,191);:
POKE15627,191:POKE15627,191:RETURN
76 PRINT@241,O$;:PRINT@305,O$;:PRINT@369,O$;:PRINT@433,O$;:PRINT@497,O$;:PRINT@5
```

MICROMART

Softcentre

OVER 1500 PROGRAMS FOR CBM/PET*

NOW INCLUDING ENHANCED 'MICRO-POOLS PACKAGE (Sole UK Distributors) PLUS HEAPS OF GEAR AT REASONABLE PRICES FROM CASSETTES TO COMPLETE SYSTEMS

WHATEVER YOU WANT/ WHOEVER MAKES IT IT'S PROBABLY IN OUR MASSIVE RANGE & OUR CATALOGUE IS UPDATED ALMOST DAILY.

SEND 20p STAMP FOR YOUR FREE COPY!

MOST MICROS BOUGHT, SOLD, REPAIRED

Top Royalities paid on really ORIGINAL programs — send cassette

26 ALBANY ROAD
RAYLEIGH ESSEX
Callers strictly by appointment

(0268-774089) 1pm - 8pm Mon - Sat

Dealer enquiries welcome.

OPTELCO

BUSINESS & COMPUTER SERVICES

292 Caledonian Rd, London N1 1BA Tel: 01-607 0157 (24-hour Answering Service)

We are Micro-computer Consultants & Programmers

— and specialise in industrial & commercial programs written to clients' specifications.

	VAT & Post incl.
Cash Analyser	£20.00
Vehicle Cost Analyser	£25.00
Book Keeping (min 48k & 2 drives)	£150.00

Please ask us for fuller details of the above. All are disk based for the TRS-80 Model I or III. Please state your DOS when ordering. Apple II versions soon.

APPLE II SOFTWARE AT REDUCED PRICES

Systems	
MAGIC WINDOW — word processing system	£75.00
VISICALC DOS 3.3 — financial modelling package	£120.00
VISICALC DOS 3.2	£75.00
INFORMATION MASTER — menu driven. Create data files. Search files and format reports on record selection criteria	£70.00
DATA MASTER — reorganise, subdivide, or merge existing INFORMATION MASTER files	£50.00
TRANSIT — link INFORMATION MASTER files	£26.00
DOS PLUS — flips between DOS 3.2 and 3.3	£18.00
QUICKLOADER — rapid load from diskette	£18.00
APPLE PROTECTOR III — protects against copy progs	£55.00
SUPER DISK COPY III — copies DOS, files, all disk	£23.00
Programming	
EXPEDITER — compiles Applesoft programs	£70.00
AOPT — Applesoft program condenser	£18.00
APLUS — Structured BASIC for Apple-soft	£18.00
CRAE — Copy, Append, Renumber etc.	£14.00
CRAE AND MCAT — as above, plus Master Catalog	£18.00
HI-RES CHARACTER GENERATOR — from Programma	£18.00
FUNCTION PLOT — also from Programma	£18.00

Games

GERMAN WHIST — our own and very good £9.95
THREE MILE ISLAND £22.00
WIZARD AND PRINCESS £17.00

HYPER-HEAD-ON	£12.00	ALIEN RAIN	£12.00
L.A. MONOPOLY	£16.00	ALIEN TYPHOON	£13.00
MICROCHESS 2.0	£15.00	CRIBBAGE	£12.00
MYSTERY HOUSE	£12.00	FASTGAMMON	£11.00
SNOGGLE	£12.00	GALACTIC EMPIRE I	£12.00
SPACE EGGS	£13.00	GALACTIC TRADER II	£12.00
STAR CRUISER	£12.00	GALACTIC REVOLUTION III	£12.00
		GALAXY WARS	£12.00
		HI-RES SOCCER	£21.00

All software is on diskette, and most requires 48k RAM. Please specify whether DOS 3.2 or DOS 3.3 format. Add 15% VAT on all purchases, and 50p extra for postage and packing for orders below £25.00. Callers welcome by appointment. Telephone Wilmslow 524228

OCCAM SOFTWARE
13 Hawthorn Grove Wilmslow, Cheshire, SK9 5DE

ZX80/ZX81 USERS CLUB

Low cost cassette software

10 2k ZX81 programs — 10 1k ZX80 programs
ZX80 Underground Quest 16k — ZX80 Adventure 16k
£4.00 each £3.00 to members
Also newsletter and technical support.
Membership: £6 UK £10 Overseas
Send stamped addressed envelope for further details to:

David Blagden
ZX80/ZX81 Users Club,
PO Box 159,
Kingston Upon Thames, Surrey KT2 5UQ

Pick a Bargain for your 6800/6809 System!

1. CSH008 SWTPC compatible 5" floppy disk controller, bare PCB £35.00
   — as above, assembled and tested with 1771 chip £140.00
2. CSH009 6800 to 6809 convertor board for 6800 CPU board, bare PCB £8.00
3. CSH010 16k STATic RAM, uses 2114's, silk screened, bare PCB £35.00
   — as above, assembled, fully socketed with 16k RAM £150.00
4. CH020 6800 chip set, 6800 6810 6820 6875 6850 — a bargain at £16.50
5. CSH021 Molex connectors, female, pack of ten £3.00
6. CSH022 Molex connectors, male, pack of ten £2.50

SWTPC Pcb's:-

Motherboard MPB/2	£24.20	6800 CPU MPA/2 (assembled)	£11.00 £75.00
Serial Interface MPS	£6.60	Parallel int. MPL/A	£6.60

— all the above PCB's are offered at a fraction of their original cost.

NEW! 6809 Disassembler, dissasembles 6809 or 6800 code, available £35.00 on FLEX 5" or 8" disk, it's DYNAMITE!!

Please add VAT at 15%, prices include postage.

COMPUSENSE LTD, PO BOX 169, Palmers Green, London N13 4HT. Tel. 01-882 0681
— Dealers for SWTPC. Full range of software & hardware —

io systems ltd.

VERY HIGH RESOLUTION FOR NASCOM 2
380 x 220 individually addressable points

FEATURES:

- fully bit mapped from dynamic RAM
- software controlled
- software supplied for point-plot, line-draw, — block shading and display control
- mixed text and graphics
- real time plotting
- display size variable to suit memory available

Price. . . . . £55 + 15% VAT (post free)

EPROM PROGRAMMER FEATURES:

- programs: 3-rail 2708, 2716 2716, 2516 and single rail: 2758, 2508 2732, 2532
- EPROM type selected by plug-in modules — 3 modules supplied with simple wiring diagrams for all EPROM types
- driven from NASCOM 1 or 2 PIO
- powered from NASCOM and transformer supplied)
- software supplied for READ/PROGRAM/VERIFY

**** CAN BE USED WITH OTHER MACHINES WITH 2 PARALLEL PORTS**

Price. . . . . £63 + 15% VAT (post free)

Both products built & fully tested supplied with comprehensive documentation and full instructions for simple installation

We welcome Access

Send SAF for free data sheets
AVAILABLE NOW direct from:-

6 Laleham Ave., Mill Hill London NW7 3HL,
Tel: 01-959 0106

'SEE US AT THE PCW SHOW STANDS T8/9'

SPECIALISED ELECTRONIC CIRCUITS

Do you have an idea for a circuit which you have difficulty in implementing?

We undertake all types of circuit design from initial concept through circuit diagram to completed board.

Wenleystorm Limited
Micro Computer Systems

New Bungalow
Essendine Road
Ryhall
Stamford
Lincolnshire
Tel:0945 71 2741

RAM BARGAINS

4116—200ns 90p each.
EPROMS 2716—5v—450ns £2.50 each.
2732—450ns £7.00 each.

ATHANA FLOPPIES

MINIS — with free plastic library case.
S/S—S/D £19.95 for 10.
D/S—D/D £25.50 for 10.
S/S — Quad Density. £28.50 for 10.
All with Hub Rings.

8" DISCS
S/S—S/D £19.95 for 10.
S/S—D/D £25.50 for 10.
D/S—D/D £28.50 for 10.

All other disks available. Add 50p p&p for chips and £1.00 for discs + VAT @ 15%.

Dept PW, Opus Media Supplies, 10 Beckenham Grove, Shortlands, Kent.
Ring 01-464 5040 or 01-467 9309 for further details and quantity discounts.

PROGRAMS

```
61,D$:PRINT@625,D$;:PRINT@689,D$;:PRINT@753,D$;:PRINT@817,D$;:RETURN
77 H$="":NN$="":PRINTCHR$(15);
78 H$=INKEY$:PRINTCHR$(143);:FORX=1TO10:NEXTX:PRINTCHR$(8);
79 IFH$=""ORH$=CHR$(10)THEN78
80 IFH$=CHR$(13)THENRETURN
81 PRINTH$;:NN$=NN$+H$
82 GOTO78
83 C1=RND(8):FORZ=1TO3:PRINT@V5,D$;:GOSUB135:PRINT@V5," FORCE ";C1;:PRINT"
";:GOSUB135:NEXT
84 V=V5+D1+RND(4):IFD1=1THENN1$=" NORTHERLY "ELSEIFD1=2THENN1$=" SOUTHERLY
"ELSEIFD1=3THENN1$=" EASTERLY "ELSEIFD1=4THENN1$=" WESTERLY "
85 GOSUB106:V=V+4:D1=RND(3):IFD1=1THENN1$=" FALLING "ELSEIFD1=2THENN1$=" R
ISING "ELSEIFD1=3THENN1$=" STEADY "
86 GOSUB106:RETURN
87 IFE5>7THENZ1=RND(2)ELSEZ1=0
88 IFE5<8THENZ2=RND(2)
89 IFZ1=1THENN1$=" SPRING FLOOD "ELSEIFZ1=2THENN1$=" SPRING EBB "
90 IFZ2=1THENN1$=" NEAP FLOOD "ELSEIFZ2=2THENN1$=" NEAP EBB "
91 V=V9+GOSUB106:RETURN
92 GOSUB136:GOSUB118:P=RND(100):IFP>95THEN167ELSEIFP>90THEN178ELSEIFP>84THEN181E
LSEIFP>80THEN219ELSEIFP>70THEN205ELSEIFP>65THEN217ELSEIFP>50THEN225
93 RETURN
94 GOSUB136:GOSUB118:Y=RND(100):IFY>93THEN174ELSEIFY>88THEN181ELSEIFY>78THEN185E
LSEIFY>70THEN189ELSEIFY>60THEN191ELSEIFY>55THEN197ELSEIFY>45T54145ELSEIFY>35THEN
205
95 IFY>30THEN208ELSEIFY>25THEN210ELSEIFY>20THEN212ELSEIFY>15THENC17ELSEIFY>10THE
NC21
96 RETURN
97 GOSUB136:GOSUB118:E=RND(100):IFE>90THEN174ELSEIFE>70THEN185ELSEIFE>50THEN191E
LSEIFE>30THEN205ELSEIFE>15THEN212ELSEIFE>0THEN217
98 RETURN
99 GOSUB100:PRINT@L,"INCORRECT INFORMATION PLEASE TRY AGAIN. ";:GOSUB136:GOSUB10
0:RETURN
100 PRINT@898,CHR$(31):RETURN
101 SS$=STRING$(28,32):PRINT@194,SS$;:PRINT@258,SS$;:PRINT@322,SS$;:PRINT@386,SS
$;:PRINT@450,SS$;:PRINT@514,SS$;:PRINT@578,SS$;:PRINT@642,SS$;:PRINT@706,SS$;:PR
INT@770,SS$;:RETURN
102 IFB1=1THENY2=5ELSEIFB1=2THENY2=8ELSEIFB1=3THENY2=12ELSEIFB1=4THENY2=15ELSEY2
=20
103 FORX=1TOR4:A2=A2+1:PRINT@121,A2;:FORY1=1TOY2:NEXTY1:NEXTX:B1=0
104 IFKJ=1ANDA2>500THENKL=1
105 RETURN
106 FORZX=1TO3:PRINT@V,D$;:GOSUB135:PRINT@V,N1$;:GOSUB135:NEXT:N1$="":RETURN
107 V=V6:P1=1:N1$=" HEALTHY ":GOSUB106:O9$=D$:RETURN
108 V=V6:P01=2:P1=2:N1$=" POORLY ":GOSUB106:O9$=D$:RETURN
109 V=V6:P01=3:P1=3:N1$=" VERY POORLY ":GOSUB106:O9$=D$:RETURN
110 IFP2=1THENO9$=O0$ELSEIFO3=1THENO9$=O1$ELSEIF04=1THENO9$=O2$ELSEIFWO1=1ORWO2=
2ORWO3=1ORO5=1THENO9$=O3$ELSEIFO4=2THENO9$=O4$ELSEIFO2=1THENO9$=O5$ELSEIFP9=1THE
NO9$=O6$ELSEIFP01>2ORP01=3THENO9$=O7$ELSEIFP3=1THENO9$=O8$
111 FORZX=1TO3:PRINT@817,O9$;:GOSUB135:PRINT@817,D$;:PRINT@881,D$;:GOSUB135:NEXT
112 IFWO1=1ORWO2=2ORWO3=1ORO2=1ORO3=1ORP9=1ORO4=1ORO5=1ORP2=1ORP01=2ORP01=3THENA
1=A1+20:PRINT@114,A1;:GOTO114
113 A1=A1+1:PRINT@114,A1;
114 IFWO1=1ORWO2=2ORWO3=1ORO2=1ORO3=1ORP51=1ORO4=1ORO5=1ORP2=1THENSC=SC+1
115 IFN1=1ANDSC>4ORN1=2ANDSC>3ORN1=3ANDSC>2THENNC=1
116 P2=0:O3=0:O4=0:WO1=0:WO2=0:WO3=0:O5=0:O2=0:P9=0:P3=0:P01=0:O9$=D$
117 RETURN
118 GOSUB101:PRINT@A," READ THE FOLLOWING ";:RETURN
119 GOSUB101:PRINT@A," ANSWER THE FOLLOWING ";:RETURN
120 GOSUB100:PRINT@L,"TO CONTINUE PRESS <ENTER> ";:GOSUB77:GOSUB100:RETURN
121 GOSUB100:PRINT@L,"TYPE A LETTER FROM A -- C ";:GOSUB77:GOSUB100:RETURN
122 GOSUB101:PRINT@A," STAND BY FOR ACTION ";:RETURN
123 GOSUB100:PRINT@L,"TYPE A LETTER FROM A -- E ";:GOSUB77:GOSUB100:RETURN
124 GOSUB100:PRINT@L,"TYPE A LETTER FROM A -- D ";:GOSUB77:GOSUB100:RETURN
125 P2=1:GOSUB110:RETURN
126 P2=1:GOSUB118:PRINT@452,"YOUR NOT GOOD ENOUGH.";:GOSUB110:RETURN
127 P2=1:GOSUB118:PRINT@452,"IT DOES'NT HAVE ONE !";:O5=1:GOSUB110:RETURN
128 P2=1:GOSUB110:RETURN
129 O9$=D$:GOSUB74:IFS1=2ANDJ1=0ANDJ2=0ANDJ3=0ANDJ5=0ANDJ7=0ANDC1>2THENB1=1ELSEI
FN1=1ANDS1=1ANDC1>2ORN1=2ANDS1=1ANDC1>3ORN1=3ANDS1=1ANDC1>4THENB1=4ELSEIFS1>1AND
Z1=3ANDC1>2THENB1=2ELSEB1=3
130 IFB1=1THENO9$=S4$ELSEIFB1=2THENO9$=S2$ELSEIFB1=3THENO9$=S3$ELSEIFB1=4THENO9$
=S1$
131 GOSUB110:O9$=D$
132 RETURN
131 GOSUB110:O9$=D$
132 RETURN
133 GOSUB118:PRINT@259,"STATUS REPORT :---";:PRINT@387,"DIRECTION. = "R$;:PRINT@
451,"MAINSAIL. = "T1$;:PRINT@515,"JIB. = "T3$;:PRINT@579,"SPINNAKER. = "T
4$;:PRINT@643,"TRAPEZE. = "T2$;:PRINT@707,"RUDDER. = "T5$;:GOSUB120:RETURN
134 R1=RND(4):IFR1=1THENR$="NORTHWARD."ELSEIFR1=2THENR$="SOUTHWARD."ELSEIFR1=3TH
ENR$="EASTWARD."ELSEIFR1=4THENR$="WESTWARD.":RETURN
135 FORX=1TO50:NEXT:RETURN
136 FORX=1TO1000:NEXT:RETURN
137 FORX=1TO3000:NEXT:RETURN
138 FORX=1TO1500:NEXT:RETURN
139 I1=RND(10):I2=I1+RND(20):I3=RND(8):I4=RND(12):I5=I4+RND(6):I6=(I5-I4):E5=(I2
-I1)
140 IFI6=1THENH1=1ELSEIFI6=2THENH1=3ELSEIFI6=3THENH1=6ELSEIFI6=4THENH1=9ELSEIFI6
=5THENH1=11ELSEIFI6=6THENH1=12
141 E1=RND(2):IFE1=1THENC1$="A.M."ELSEC1$="P.M."
142 W7=(((I2-I1)/12)*H1)+I3+.5
143 GOSUB101:PRINT@67," TIDAL CALCULATIONS.";:PRINT@258,"HIGH WATER (H.W.) =";:
PRINTUSINGL1$;I2;:PRINT" M.";:PRINT@322,"LOW WATER (L.W.) =";:PRINTUSINGL1$;I1;
:PRINT" M.";:PRINT@386,"DEPTH OF WATER AT";:PRINT@450,"CHART DATUM.(CDW) =";
144 PRINTUSINGL1$;I3;:PRINT" M.";:PRINT@514,"TIME OF LOW WATER =";:PRINTUSINGL1$
```


ZX80-81 SOFTWARE

Many games, Educational and Utility programs available for ZX80 and ZX81.
"ZX80-BASIC", as reviewed by Sync, a dissasembled listing of the 4K BASIC, with Hex, Assembly, Cross reference table and annotations NOW only £7.00

ZXBUG — a machine code debugging program, runs in 4k or 16k, it allows you to, set registers, set Quit points in machine code programs, run programs, display only 64 bytes in Hex or charactors, display registers, search for byte or word, copy a block of memory, set a block of memory to any valve. Utilises INICEV$ and scrolls screen even on ZX81

New low price £500

Other programs include, Startreck, Sword of Peace, Mega — Wumpas and many more!

Send SAE for latest catalogue, or orders to:

ARTIC COMPUTING
396, James Reckitt Ave, Hull, HU8 0JA

FORTH

The small computer language of the eighties!

XForth
Greatly enhanced version of FIG standard Forth. Includes screen editor for cursor addressable VDUs. Introductory offer **£25**
Resident assembler for 8080 mnemonics, easily extended for Z80 add **£5**
Send S.A.E. for more details on this and other Forth products.

Please add £1/order P&P. Prices are for CP/M2.2x on North Star 5" discs. Other CP/M formats and North Star DOS — send S.A.E.

A.I.M. Research, 20 Montague Rd, Cambridge CB4 1BX

PROGRAMS

```
;I4;:PRINT" ";C1$;:PRINT@643,"CALCULATE THE DEPTH OF";:PRINT@706,"WATER AT";I6;"
HR/S AFTER L.W.";
145 PRINT@900,"STATE THE DEPTH OF WATER (DOW).  ";:GOSUB77:GOSUB100
146 IFVAL(NN$)=W7THEN04=2ELSEP2=1
147 GOSUB110:RETURN
148 IFZ1>2THENR1=RND(2)ELSER1=RND(3)+1:R4=RND(20)+10:R2=RND(2)
149 IFR2=1THENB$="WITH"ELSEB$="AGAINST"
150 IFN2<3ANDC1<3THENR3=R1+RND(2)ELSER3=R1+RND(3)+1
151 IFR2=1THENG7=R4/(R3+R1)+.5
152 IFR2=2THENG7=R4/(R3-R1)+.5
153 GOSUB101:PRINT@67,"  SPEED CALCULATIONS.";:PRINT@258,"BOAT SPEED (BS) =";R3;
"KNOT/S.";:PRINT@322,"TIDAL RATE (TS) =";R1;"KNOT/S.";:PRINT@390,"SAILING ";B$;"
 TIDE.";:PRINT@579,"YOU MUST TRAVEL";R4;"MILES.";
154 PRINT@707,"(T = THE NUMBER OF MILES)";
155 PRINT@900,"STATE YOUR ESTIMATED SAILING TIME (ST).  ";:GOSUB77:GOSUB100
156 IFVAL(NN$)=G7THEN04=2ELSEP2=1
157 GOSUB110:RETURN
158 D1=60+RND(300):D2=RND(12):D3=RND(12):D4=RND(2):IFD4=1THEND4$="E"ELSEIFD4=2TH
END4$="W"
159 D5=RND(2):IFD5=1THEND5$="E"ELSED5$="W"
160 IFD4=1ANDD5=1THEND6=(D1+D2+D3)ELSEIFD4=1ANDD5=2THEND6=(D1+D2)-D3
161 IFD4=2ANDD5=1THEND6=(D1-D2)+D3
162 IFD4=2ANDD5=2THEND6=(D1-D2-D3)
163 GOSUB101:PRINT@67,"  LETS TAKE A BEARING.";:PRINT@258,"COMPASS BEARING = ";:
PRINTUSING$L1$;D1;:PRINT"°";:PRINT@322,"DEVIATION (D)    = ";:PRINTUSING$L1$;D2;:PR
INT"°";D4$;:PRINT@386,"VARIATION (V)    = ";:PRINTUSING$L1$;D3;:PRINT"°";D5$;
164 PRINT@578,"CALCULATE THE TRUE BEARING.";:PRINT@900,"STATE THE TRUE BEARING "
;:GOSUB77:GOSUB100
165 IFVAL(NN$)=D6THEN04=2ELSEP2=1
166 GOSUB110:RETURN
167 PRINT@322,"COLLISION IN THE HARBOUR.";:GOSUB138:X=RND(5):ONXGOTO168,170,172,
170,168
168 D3=1:PRINT@393,"DINGY SUNK.";:PRINT@452,"YOUR HEALTH SUFFERED.";:PRINT@515,"
TAKE 20 DAYS FOR REPAIRS.";:P9=1:GOSUB112:GOSUB109
169 RETURN
170 D3=0:PRINT@389,"NO DAMAGE, CARRY ON";:PRINT@458,"SAILING.";:GOSUB138
171 RETURN
172 IFW1<>1ORW2<>1THEN170ELSEPRINT@386,"YOU COULD NOT MAKE IT";:PRINT@450,"TO DR
Y LAND.";:PRINT@514,"YOU DROWNED !";:GOSUB138:D2=1
173 RETURN
174 IFN1=1ANDC1>3ANDJ1=0ORN1=1ANDC1>3ANDJ2=0ORN1=1ANDC1>3ANDJ7=0THEN178
175 IFN1=2ANDC1>3ANDJ1=0ORN1=2ANDC1>3ANDJ2=0ORN1=2ANDC1>3ANDJ7=0THEN178
176 IFN1=3ANDC1>4ANDJ1=0ORN1=3ANDC1>4ANDJ2=0ORN1=3ANDC1>4ANDJ7=0THEN178
177 GOTO191
178 D3=0:PRINT@325,"TOO MUCH SAIL SET.";:GOSUB137:PRINT@388,"BOAT CAPSIZED BUT Y
OU";:PRINT@452,"MADE IT. HOWEVER, YOUR";:PRINT@515,"HEALTH MAY HAVE SUFFERED.";:
GOSUB138
179 IFP1=3THEND2=1
180 GOSUB109:RETURN
181 D3=1:PRINT@325,"REGATTA IN PROGRESS.";:PRINT@387,"TAKE A DAY OFF TO RACE.";:
GOSUB137:X=RND(2):IFX=1THENPRINT@515,"UNFORTUNATELY YOU LOST.";:ELSEPRINT@517,"WE
LL DONE YOU WON.";:GOSUB113
182 GOSUB138:RETURN
183 IFS1<>3THEN185ELSEPRINT@327,"ACCIDENTAL GYBE !!";:GOSUB138:PRINT@452,"NO DAM
AGE DONE. CARRY ON";:PRINT@523,"SAILING.";
184 RETURN
185 IFC1>3THEN187ELSEPRINT@327,"GEAR FAILURE !!";:GOSUB137:PRINT@453,"ONLY MINOR
 DAMAGE.";:PRINT@516,"MAKE RUNNING REPAIRS.";:GOSUB138
186 RETURN
187 D3=1:PRINT@324,"DINGY SERIOUSLY DAMAGED.";:PRINT@450,"20 DAYS NEEDED FOR REP
AIRS.";:P9=1:GOSUB112:GOSUB138
188 RETURN
189 D3=0:PRINT@389,"SAIL SLIGHTLY RIPPED.";:PRINT@453,"MAKE RUNNING REPAIRS.";:G
OSUB113:GOSUB138
190 RETURN
191 D3=1:PRINT@197,"A FREAK GUST HIT YOU.";:GOSUB138:H=RND(4):ONHGOTO189,187,189
,192
192 PRINT@327,"MAN OVERBOARD !!";:IFW1=1ORW2=1THEN193:H=RND(5):IFH>1THEN195
193 GOSUB138:PRINT@453,"YOU LOST YOUR CREW !!";:PRINT@582,"IT'S ALL OVER NOW.";:
GOSUB138:D2=1
194 RETURN
195 D3=0:PRINT@456,"YOU GOT HIM !!";:PRINT@582,"BUT HE CUT HIS LEG.";:GOSUB109:G
OSUB138
196 RETURN
197 PRINT@327,"PASSING LINER !!";:GOSUB138:H=RND(5):IFH>3THEN200
198 PRINT@455,"YOU MISSED HIM.";:GOSUB138
199 RETURN
200 D3=1:PRINT@390,"COLLISION AT SEA !!";:GOSUB138:H=RND(8):IFH<2THEN203
201 D3=0:PRINT@517,"ONLY SLIGHTLY DAMAGED.";:PRINT@581,"MAKE RUNNING REPAIRS.";:
GOSUB138
202 RETURN
203 PRINT@516,"YOUR HOLED & GOING DOWN.";:PRINT@582,"NOBODY SAW YOU HIT.";:PRINT
@710,"IT'S ALL OVER NOW.";:GOSUB138:D2=1
204 RETURN
205 PRINT@325,"SICKNESS ON BOARD !";:IFP1=3THEND2=1
206 IFD2=1THENRETURNELSEPRINT@454,"NO NEED TO WORRY";:PRINT@517,"ONLY A TUMMY UP
SET.";:GOSUB108:GOSUB138
207 RETURN
208 D3=1:PRINT@322,"YOU HAD A GOOD PARTY.";:PRINT@387,"TAKE A DAY TO SLEEP";:PRI
NT@456,"IT OFF.";:GOSUB113:GOSUB138
209 RETURN
210 IFC1<3ORE5>6THEN227ELSEPRINT@325,"YOUR IN A TIDE RACE.";:GOSUB138:PRINT@451,
"YOU HAVE MADE GOOD TIME";:GOSUB138
211 RETURN
212 D3=0:PRINT@325,"YOU ARE LOST IN FOG.";:GOSUB138:IFW3<>1THEN215
213 PRINT@389,"YOU WANDER FOR 1 DAY.";:GOSUB113:GOSUB138
214 RETURN
```


MICROMART

VETS FOR PETS

Anita Electronic Services (London) Ltd. are specialists in the repair and service of Commodore Pets.
We offer a fast on-site service, or alternatively repairs can be carried out at our workshops should you wish to bring in your Pet.
Pet maintenance contracts are available at very competitive prices. Trade inquiries welcomed.

For further information, tel or write to:

John Meade
Anita Electronic Services
15 Clerkenwell Close, London EC1
01-253 2444

We also specialise in the repair of all makes of office equipment.

SHARP MZ-80K software

£5 – DUST COVERS for MZ-80K COMPUTER or MZ-80P3 printer. Black, waterproof.

£6 – HEAD ON. Basic/machine code arcade game. Gobble up dots but avoid suicidal robot cars intent on your destruction! Very fast.

£5 – MOONLANDER. Complex real time lander. Superlative graphics/sound (10K RAM).

£5 – COMPOSER. Play tunes via the keyboard. Replay your compositions. Print music strings for future use.

£5 – CHASE. Excellent real time chase. Steal the gems but avoid the vicious dog!

£5 – MANIAC. Exhausting real time maniac drive. Run down strays, but don't crash. 81 skills.

£4 – BANK ACCOUNT. Input your regular income/outgoings. See the year's cash flow in monthly statements.

£4 – BANNER. Input your message and see it scroll up the screen in large graphics characters.

£4 EACH – BIORHYTHMS, MASTERMIND, FOX & GEESE, ADDRESS BOOK.

COMPUTER ASSISTED LEARNING. Superb suite of programs written by experts. Exclusive to us. £5 each – WORD MATCH, COUNT & ADD, PICTURE COUNT. £4 – CHARACTER MATCH.

Write or phone for full catalogue. Cash with order, or ACCESS. All prices fully inclusive. Orders despatched by return. **FREE** machine code **SPACE INVADERS** with all orders of £15 and over.

HIGHLIGHT SOFTWARE
3 Nether Court Halstead Essex CO9 2HE
Telephone (0787) 475714

PET HI-RES

320 by 200 resolution may seem like an impossible dream – but with our new HI-RES board it becomes reality!

Each of the 64,000 dots on the PET screen is individually addressable, so you can plot accurate graphs, draw realistic diagrams – even display pictures!

The board has 8k of its own RAM, normally used to store the screen contents – but you could use it for machine code routines or data storage. It also has its own ROM, a 2k EPROM containing utility software to plot points, draw lines, display text, fill an area and so on.

At just £149 plus VAT this board is a low-cost solution. Ready-assembled, it's easy to fit, with no soldering or track cutting necessary. A kit version is also available at £99 plus VAT (excluding software). The current model fits any large keyboard PET/CBM which has a 9 inch screen – we will be offering a HI-RES board for 12 inch machines in due course.

SEE HI-RES AT THE PCW SHOW – STANDS T14 & 15

SUPERSOFT
Dept P9, 10-14 Canning Road, Wealdstone, Harrow, Middlesex
Tel: 01-861 1166

IS YOUR COMPUTER ROBBING YOU?

WE ARE SPECIALIST IN COMPUTER SOFTWARE & SYSTEMS SECURITY AUDITS.
for further information write to:
MPT, St Christopher House, 5 Brindles, Canvey Island, Essex SS8 9TG

PET UPGRADE

We can upgrade your large keyboard PET at a fraction of the 'New Price' difference.

8K to 16K £44.00
16K to 32K . . . . . from £56.00
8K to 32K £69.00

NO EXTRA CHARGE

If expansion area drilled with quarter inch holes . . .

All new RAMs fitted with sockets
Fast 2 hours while you wait service.
Tel: Mick Bignell
01-953 8385.

MICROMART

PET'S

PETS – We Sell Them

As authorised Commodore Dealers we stock and supply all PET Hardware., Computhink Discs, Oki Microine 80 Decwriter LA34, Texas 810, Qume Sprint 5 – all at competitive prices

PETS – We Buy Them

Part Exchange is very welcome, we also buy for cash.

PETS – We Hire Them

Our specialist hire service, with maintenance included for all Commodore equipment.
– Complete systems for evaluation
– Multiple units for educational courses
– Single units for individual use

From 1 day upwards, all units available. Delivery by arrangement, anywhere in UK.

PETS – Software

We are fully authorised BUSINESS SOFTWARE DEALERS for Commodore Software – COMPAY COMSTOCK. WORDPRO etc. Also PETSOFT, BRISTOL SOFTWARE, LANDSLER PAYROLL & HOTEL SYSTEM.

PLUS for ACCOUNTANTS, the unique CSM INCOMPLETE RECORDS PACKAGE – this is the best available.

MAIL – ORDER

All Hardware and Software can be bought by Mail Order Delivery by Securicor, or Registered Post. Discounts for Cash & Carry or Mail-Order. Access accepted or by Leasing (subject to acceptance)

MICRO-FACILITIES LTD
129 High Street, Hampton Hill, Middlesex,
TW12 1NJ 01-979 4546 or 01-941 1197

Axon

PO Box 12
Bentham
Lancaster
Tel: Bentham (0468) 61848

ANALYSED CASHBOOK	**£75 + VAT**
INVOICE	**£25 + VAT**
LEDGER/STATEMENT	**£25 + VAT**

Each is available for CBM 'PET' 32K or 16K with CBM or Computhink Disk System and CBM Tractor Printer or other printers.
All combined together with **SALES JOURNAL** and **PERSONAL LEDGER** into:
AUTO-ACCOUNTS **£225 + VAT**
to relieve the drudgery of book-keeping.

An inexpensive word processor for PET:
EASYWORDS **£15 + VAT**

A data handling utility for PET:
DATASTAX **£15 + VAT**

Each available on CBM disk or tape.

PET MACHINE LANGUAGE GUIDE

IF YOU ARE INTERESTED IN OR ARE ALREADY INTO MACHINE LANGUAGE PROGRAMMING ON THE PET, THEN THIS INVALUABLE GUIDE IS FOR YOU. MORE THAN 30 OF THE PET'S BUILT-IN ROUTINES ARE FULLY DETAILED SO THAT THE READER CAN IMMEDIATELY PUT THEM TO GOOD USE. £8.00

THE BRAIN SURGEON (Apple)

This Diagnostic's package is designed to check every major area of your computer, detect errors and report any malfunctions. The Brain Surgeon will put your system through exhaustive, thorough procedures testing and reporting all findings. £30.00
RS232 Serial Interface. £50.00
Apple Serial I/O. £45.00
PET TV Interface £35.00
PET Soundbox. £22.50
Disk Head Cleaning Kit £17.50
PET IEEE/Parallel Interface (addressable). £80.00
4-channel A/D Converter. £45.00
8-channel programmable Relay Switching Unit £45.00
UART & BAUDRATE Generator £50.00
(converts parallel to serial and serial to parallel)

Apple Action Adventure Games
RED BARRON £14.95 **BATTLE OF MIDWAY**
SUB ATTACK £14.95 £14.95
Mail order welcome. Please send for catalogue.

PEDRO COMPUTER SERVICES
65 Glebe Crescent
Kenton, Middx. HA3 9LB
Tel. 01-204 9351

PROGRAMS

```
215 PRINT@390,"LIFE BOAT COMES TO";:PRINT@454,"FIND YOU. ALL HELL";:PRINT@521,"L
ETS LOOSE.";:GOSUB138:D2=1
216 RETURN
217 D3=1:PRINT@324,"PORT SHROUD SNAPPED.";:PRINT@391,"CREW INJURED !";:PRINT@453
,"TAKE 1 DAYS REST.";:GOSUB113:GOSUB109:GOSUB138
218 RETURN
219 PRINT@324,"REGATTA IN PROGRESS.";:PRINT@388,"MAKE A DIVERSION TO";:PRINT@457
,"AVOID IT.";:GOSUB113:GOSUB138
220 RETURN
221 IFC1>4THEN200ELSEPRINT@323,"BEACHED ON A LEE-SHORE.";:D3=1:PRINT@390,"HAVE A
 DAYS REST.";:GOSUB113:GOSUB137
222 RETURN
223 PRINT@324,"ARGUE WITH YOUR CREW.";:PRINT@388,"LOSE 1 DAYS SAILING.";:GOSUB11
3:GOSUB138
224 RETURN
225 D3=1:PRINT@323,"YOU LEFT YOUR WATERPROOF";:PRINT@390,"CLOTHING BEHIND.";:PRI
NT@452,"LOSE 1 DAYS SAILING.";:GOSUB113:GOSUB138
226 RETURN
227 IFN1=1THEN183ELSEIFD1=1THEN185ELSE191
228 GOTO191
229 D2=0:D3=0:O4=0:T1$="UP.":T2$="NOT IN USE.":T3$="UP.":T4$="NOT IN USE.":T5$="
DOWN."
230 GOSUB119:PRINT@259,S7$;:PRINT@387,S5$;:PRINT@451,"B. REEF THE MAINSAIL.";:PR
INT@515,"C. USE THE TRAPEZE.";:PRINT@579,S6$;:PRINT@706,S8$;
231 GOSUB124:IFNN$<>"A"ANDNN$<>"B"ANDNN$<>"C"ANDNN$<>"D"THENGOSUB99ELSE233
232 GOTO231
233 IFNN$="B"THEN237ELSEIFNN$="C"THEN239ELSEIFNN$="D"THEN241
234 IFLO=1THENO5=1
235 IFO5=1THENGOSUB110ELSED3=1
236 RETURN
237 IFN1=1ANDC1<3ORN1=2ANDC1<4ORN1=3ANDC1<5THEN125
238 J1=1:T1$="REEFED.":RETURN
239 IFN2=1ORN2=2THEN127ELSEIFN1=1THEN126ELSEIFC1<2THEN125
240 D7=0:T2$="IN USE.":RETURN
241 IFN1=1ANDC1>2ORN1=2ANDC1>3ORN1=3ANDC1>4ORN1=2ANDS1<3ANDC1>1ORN1=3ANDS1<3ANDC
1>1THEN125
242 RETURN
243 GOSUB119:PRINT@259,S7$;:PRINT@387,S5$;:PRINT@451,"B. LOWER YOUR JIB.";:PRINT
@515,"C. LOOSEN YOUR MAINSAIL.";:PRINT@579,S6$;:PRINT@706,S8$;
244 GOSUB124:IFNN$<>"A"ANDNN$<>"B"ANDNN$<>"C"ANDNN$<>"D"THENGOSUB99ELSE246
245 GOTO244
246 IFNN$="B"THEN248ELSEIFNN$="C"THEN250ELSEIFNN$="D"THEN252ELSED3=1
247 RETURN
248 IFN1=1ANDC1<4ORN1=2ANDC1<5ORN1=3ANDC1<6THEN125
249 J7=1:T3$="LOWERED.":RETURN
250 IFJ1=1ORC1>1THEN125
251 J5=1:T1$="SLACKENED.":RETURN
252 IFN1=1ANDC1>3ORN1=2ANDC1>4ORN1=3ANDC1>5ORC1<2THEN125
253 RETURN
254 GOSUB119:PRINT@259,S7$;:PRINT@387,S5$;:PRINT@451,"B. USE THE SPINNAKER.";:PR
INT@515,"C. LOWER YOUR MAINSAIL.";:PRINT@579,S6$;:PRINT@706,S8$;
255 GOSUB124:IFNN$<>"A"ANDNN$<>"B"ANDNN$<>"C"ANDNN$<>"D"THENGOSUB99ELSE257
256 GOTO255
257 IFNN$="B"THEN259ELSEIFNN$="C"THEN261ELSEIFNN$="D"THEN262ELSED3=1
258 RETURN
259 IFN1=1THEN126ELSEIFN2=1ORN2=2THEN127ELSEIFS1>1ANDN1=2ANDC1<5ANDJ1=0ORS1>1AND
N1=3ANDC1<6ANDJ1=0THEN260ELSE125
260 D6=1:T4$="FLYING.":RETURN
261 IFJ7=1THEN125ELSEIFN1=1ANDC1<4ORN1=2ANDC1<5ORN1=3ANDC1<6THEN125ELSEJ2=1:T1$=
"DOWN.":RETURN
262 IFN1=2ANDS1>1ANDC1<5ORN1=3ANDS1>1ANDC1<6ORN1=1ANDC1>4ORN1=2ANDC1>5ORN1=3ANDC
1>6THEN125
263 RETURN
264 GOSUB119:PRINT@259,S7$;:PRINT@387,S5$;:PRINT@451,"B. ANGLE THE RUDDER.";:PRI
NT@515,"C. FLATTEN YOUR MAINSAIL.";:PRINT@579,S6$;:PRINT@706,S8$;
265 GOSUB124:IFNN$<>"A"ANDNN$<>"B"ANDNN$<>"C"ANDNN$<>"D"THENGOSUR99ELSE267
266 GOTO265
267 IFNN$="B"THEN269ELSEIFNN$="C"THEN271ELSEIFNN$="D"THEN274ELSED3=1
268 RETURN
269 IFS1<>3THEN125
270 J3=1:T5$="SLIGHTLY UP.":RETURN
271 IFJ1=1THEN125ELSEIFJ2=1ORP2=1ORS1=3ORS1=2ANDC1<3ORS1=1ANDC1<2THEN125
272 IFS1=3THEN125
273 J4=1:T1$="FLATTENED.":RETURN
274 IFS1=3THEN125
275 IFJ1=1ORJ2=1ORJ7=1THEN277
276 IFJ1=0ANDC1>2ORJ2=0ANDC1>2ORJ7=0ANDC1>2THEN125
277 RETURN
278 FORM=1TO4:GOSUB118:PRINT@267,CHR$(191);CHR$(131);CHR$(131);CHR$(131);CHR$(19
1);:PRINT@335,CHR$(191);:PRINT@398,CHR$(131);:PRINT@397,CHR$(188);:PRINT@461,CHR
$(143);:PRINT@525,CHR$(143);
279 PRINT@645,"PROBLEMS. PROBLEMS.";:GOSUB135:NEXT
280 GOSUB135:GOSUB118:PRINT@325,"YOU ARE EITHER VERY";:PRINT@387,"UNLUCKY OR ELS
E YOU HAVE";:PRINT@452,"MADE TOO MANY MISTAKES.";:PRINT@515,"EITHER WAY YOU HAVE
 JUST";:PRINT@588,"LOST !!";:GOSUB138:O9$=O8$:GOSUB110:GOSUB120
281 IFA1=0THENA1=1ELSEIFA2=0THENA2=1
282 LO=((A2*100)/A1):GOSUB118:PRINT@322,"YOUR COMPETENCE RATING IS";:PRINT@460,L
O;:PRINT@900,"FOR ANOTHER TRY PRESS <ENTER> ";:GOSUB77
283 CLEAR:GOTO1
284 GOSUB118:FORM=1TO3:GOSUB74:GOSUB135:NEXT
285 IFA1=0THENA1=1
286 IFA2=0THENA2=1
287 LO=((A2*100)/A1)
288 GOSUB118:PRINT@328,"WELL DONE !!";:PRINT@387,"YOU HAVE COMPLETED THE";:PRINT
@457,"WHOLE TRIP.";:PRINT@517,"YOUR RATING IS";LO;:PRINT@642,"FOR ANOTHER TRY HI
T <ENTER>";
```


COMPASS

6 Market Street,
Standish,
Lancs, WN6 0SQ



Start your computer hobby with an inexpensive **SUPERBOARD 3** or **CHALLENGER CIP**, and expand later.
Full range of Software and Add-ons
S.A.E. or call in for our new catalogue detailing our **SPECIAL OFFERS** (limited period)

ALGOL-60
Z80 – CP/M, PDP11, PDP8

A family of high level languages
from RHA (Minisystems) Ltd.

ALGOL–60, the language from which PASCAL is derived. A mature implementation with comprehensive operating system and machine code interfaces.

SYSTEM-ALGOL, the subset of Algol-60 in which all the compilers are written. Compiled code is shorter, execution faster.

Z80 based CP/M systems including TRS80
RML Algol-60, including the option of 32 bit integers instead of floating point. About 7 times faster than TRS80 Level II BASIC, speed comparable with Microsoft Fortran. Document £10, system £99 + VAT. System-Algol £50 + VAT, free leaflet.

PDP11 WITH RT-11, RSTS, RSX or IAS and PDP8 with OS/8 or stand alone
Complete package including both compilers in machine readable source form. . . £250 + VAT. The author of the compilers is available as a consultant.

83, Gidley Way, Horspath, Oxford OX9 1TQ (08677) 3625

PROGRAMS

```
289 GOSUB120:CLEAR:GOTO1
290 CLS:F$="DINGY RACER":FORX=70TO833STEP64:P1$=MID$(F$,(X-1)/64,1):PRINT@X,CHR$
(23);P1$;" ";:PRINT@X+59,CHR$(23);P1$;" ";:FORC=1TO30:NEXTC:NEXTX:PRINT@208,CHR$
(23);"COPYRIGHT F. HOPE. 1981.";:PRINT@338,"ALL RIGHTS RESERVED.";:PRINT@474,"VE
RSION 6.6";
291 PRINT@602,"**********";:GOSUB138
292 CLEAR150:RANDOM:DEFINTC-Z
293 O0$="  RUBBISH !!  ":O1$="  CHICKEN  !!  ":O2$="  FEEBLE  ":O3$="  NAU
GHTY !!  ":O4$="  WELL DONE !! ":O5$="  TOO RISKY !! ":O6$="  LAZY DEVIL  ":O7
$="  HAVE A REST  ":O8$="  BAD LUCK !  "
294 S1$="IT'S HARD WORK ":S2$="YOUR GOING WELL":S3$="SAILING SLOWLY ":S4$=" YOUR
 PLANING !":S5$="A. GO ASHORE.":S6$="D. CARRY ON SAILING.":S7$="DO YOU WISH TO :
---":S8$="SELECT A LETTER FROM A -- C":V1=241:V2=305:V3=497:V4=561:V5=433:V6=369
:LP=0
295 V7=689:V8=753:V9=625:SC=0:O$=STRING$(15,143):A=67:B=195:C=259:D=323:E=387:F=
451:G=515:H=579:I=643:J=707:K=772:L=900:M1=0:NC=0
296 CLS:X=0:FORY=0TO39STEP2:SET(X,Y):NEXT:X=60:FORY=0TO39STEP2:SET(X,Y):NEXT:Y=0
:FORX=0TO60STEP2:SET(X,Y):NEXT:Y=39:FORX=0TO60STEP2:SET(X,Y):NEXT
297 PRINT@32,"TECHNICAL DATA.";:PRINT@96,STRING$(16,43);:PRINT@50,"DAYS.";:PRINT
@57,"MILES.";:A1=0:L$="£.£";L1$="£££":PRINT@114,A1;:A2=0:PRINT@121,A2;
298 PRINT@224,"SAILING SKILL.";:PRINT@288,"TYPE OF BOAT.";:PRINT@352,"HEALTH STA
TUS.";:PRINT@416,"WIND FORCE.";:PRINT@480,"WIND DIRECTION.";:PRINT@544,"BAROMETE
R.";:PRINT@608,"TIDE STATUS.";:PRINT@672,"SAILING POINT.";:PRINT@736,"CENTRE BOA
RD.";
299 PRINT@800,"COMMENTS.";:FORX=239TO930STEP64:PRINT@X,STRING$(1,42);:NEXT:PRINT
@864,STRING$(16,42);
300 PRINT@241,O$;:PRINT@305,O$;:PRINT@369,O$;:PRINT@433,O$;:PRINT@497,O$;:PRINT@
561,O$;:PRINT@625,O$;:PRINT@689,O$;:PRINT@753,O$;:PRINT@817,O$;:PRINT@881,O$;
301 PRINT@131,STRING$(23,42);:PRINT@67,"  INTRODUCTION !!  ";
302 GOSUB101:PRINT@C,"YOU ARE ABOUT TO EMBARK";:PRINT@D,"ON A SAILING TRIP INTO"
;:PRINT@E,"UNFAMILIAR WATERS.";:PRINT@F,"SOME DEGREE OF ERROR IN";:PRINT@G,"ANSW
ERING THE QUESTIONS";:PRINT@H,"WILL BE ALLOWED BUT, THE";
303 PRINT@I,"AMOUNT WILL DEPEND UPON";:PRINT@J,"YOUR SAILING STANDARD.";:GOSUB12
0
304 GOSUB101:PRINT@C,"IF YOU ARE A BEGINNER";:PRINT@D,"SELECT THE STANDARD OF";:
PRINT@E,"NOVICE. THIS WILL THEN";:PRINT@F,"ALLOW YOU TO USE THE";:PRINT@G,"GLOSS
ARY OF SAILING TERMS.";
305 PRINT@643,"IF YOU SELECT  ADVANCED";:PRINT@707,"YOU HAD BETTER BE GOOD !";:G
OSUB120
306 GOSUB101:PRINT@C-1,"ALL CALCULATIONS SHOULD BE";:PRINT@D+1,"ROUNDED TO THE N
EAREST";:PRINT@E-1,"WHOLE NUMBER E.G. 6.5 AND";:PRINT@F,"ABOVE = 7  BUT, 6.4 AND
";:PRINT@G+5,"BELOW EQUAL 6";
307 PRINT@I-1,"A PENCIL & PAPER OR EVEN";:PRINT@J-1,"A CALCULATOR MAY BE USEFUL.
";
308 GOSUB120:GOSUB74
309 GOSUB135:GOSUB101:PRINT@262,"SAILING STANDARDS.";:PRINT@386,"HOW GOOD ARE YO
U ?";:PRINT@457,"A. NOVICE";:PRINT@521,"B. INTERMEDIATE";:PRINT@585,"C. ADVANCED
";:PRINT@709,"(SELECT A LETTER)";
310 GOSUB121:IFNN$="A"N1=1:IFN1=1N1$="  NOVICE  "
311 IFNN$="B"N1=2:IFN1=2N1$="  INTERMEDIATE "
312 IFNN$="C"N1=3:IFN1=3N1$="  ADVANCED  "
313 IFN1<>1ANDN1<>2ANDN1<>3THENGOSUB99ELSE315
314 GOTO310
315 V=V1:GOSUB106:GOSUB101:PRINT@258,"SELECT YOUR DINGY :-";:PRINT@395,"A. WAYFA
RER";:PRINT@459,"B. ENTERPRISE";:PRINT@523,"C. 420";:PRINT@587,"D. FIREBALL";:PR
INT@651,"E. 470";
316 GOSUB123:IFNN$="A"N2=1:IFN2=1N1$="  WAYFARER  "
317 IFNN$="B"N2=2:IFN2=2N1$="  ENTERPRISE  "
318 IFNN$="C"N2=3:IFN2=3N1$="  420  "
319 IFNN$="D"N2=4:IFN2=4N1$="  FIREBALL  "
320 IFNN$="E"N2=5:IFN2=5N1$="  470  "
321 IFN2<>1ANDN2<>2ANDN2<>3ANDN2<>4ANDN2<>5THENGOSUB99ELSE323
322 GOTO316
323 V=V2:GOSUB106:IFN1=1ANDN2>2ORN1=2ANDN2>4THEN324ELSEIFN1=3ANDN2<3THEN326ELSE3
27
324 N2=0:O2=1:GOSUB110
325 GOTO316
326 O3=1:GOSUB110
327 GOSUB74:GOSUB112:GOSUB107:GOSUB83
328 GOSUB119:PRINT@260,"HOW FAR CAN YOU SWIM ?";:PRINT@393,"NOT AT ALL";:PRINT@4
57,"25 METRES.";:PRINT@521,"50 METRES.";:PRINT@585,"100 METRES.";:PRINT@649,"200
 METRES.";
329 PRINT@L,"TYPE THE NUMBER OF METRES. (0 = CANNOT SWIM) ";:GOSUB77
330 IFNN$<>"0"ANDNN$<>"25"ANDNN$<>"50"ANDNN$<>"100"ANDNN$<>"200"THENGOSUB99ELSE3
32
331 GOTO329
332 GOSUB100:W1=0:IFNN$="50"ORNN$="100"ORNN$="200"THEN334
333 W01=1:W1=1
334 GOSUB119:PRINT@330,"CRASH ON !";:PRINT@450,"WHAT PERSONAL SAFETY GEAR";:PRIN
T@518,"ARE YOU WEARING ?";:GOSUB112
335 PRINT@L,"STATE THE EQUIPMENT  (0 FOR NONE) ";:GOSUB77
336 GOSUB100:W2=0:IFNN$="0"THEN338
337 IFNN$="LIFE JACKET"ORNN$="BOUYANCY AID"ORNN$="BOUYANCY JACKET"ORNN$="LIFE BE
LT"THEN340ELSE339
338 W02=2:W2=2:GOTO340
339 GOSUB99:GOTO335
340 GOSUB119:PRINT@327,"READ ON SAILOR !";:PRINT@F+4,"WHO DO YOU WISH";:PRINT@G,
"TO INFORM BEFORE YOU GO ?";:GOSUB112
341 PRINT@L,"STATE THE PERSON ( NO-ONE = 0 ) ";:GOSUB77:GOSUB100
342 W3=0:IFNN$<>"0"THEN344
343 W03=1:W3=1:GOTO4
344 IFNN$="COAST GUARD"ORNN$="HARBOUR MASTER"THENGOSUB112
345 IFNN$<>"COAST GUARD"ANDNN$<>"HARBOUR MASTER"ANDNN$<>"0"THENGOSUB99ELSE347
346 GOTO341
347 GOTO4
```


CARDIFF MICRO CENTRE

APPLES + PETS
+
SHARP MZ-80s
+
HEWLETT PACKARD
+
COMPUTER BOOKS
+
DEMONSTRATIONS
+
SEIKOSHA PRINTERS
ONLY £250 + VAT

SIGMA SYSTEMS
54 PARK PLACE CARDIFF 21515/34869

STOKE on TRENT

for
TUSCAN
and
TANGERINE
and
VIDEO GENIE + SOFTWARE
and
BOOKS

MICRO-PRINT Ltd.,
59, Church Street, Stoke on Trent.
(0782) 48348. Barclaycard and Access

MICROMART

Make your computer

NAG...

Just one of the many uses to which you can put the fantastic Mutek

Voice Synthesiser

This remarkable unit adds speech output capabilities to almost any computer with a parallel or serial output port.

Infinite Vocabulary
For less than the cost of most limited-vocabulary synthesisers the Mutek **VoxBox** offers full phoneme synthesis using the building blocks of speech. This enables simple and easy generation of programmed speech and sentences of any length.

Fits Most Computers
Within minutes of receiving the **VoxBox** you will be able to generate intelligible speech using the comprehensive documentation supplied with the unit. For most computers the interfacing is just a matter of plugging in — and the relevant connector is supplied as part of the package.

Listen before you buy!
We can't honestly say that the quality is as good as human speech — but why not call *Bath (0225) 743289* after 6pm and listen to our computer talking through **VoxBox**. You may place a credit-card order or a request for further information after the message.

Models currently available:
VB-1 **VoxBox** for all PETs **£59**
VB-2 **VoxBox** for Acorn Atom..... **£59**
(these units complete with cable and connector)
VB-3 **VoxBox** for 6821-type PIA parallel port..... **£57**
(complete with cable and data for connection)
VB-4 RS-232 **VoxBox** with serial interface* **£83**
(**note:* CTS signal must be available)
VB-5 RS-232 **VoxBox** for Superboard/UK101 ...**£83**
(with interface cable and data for connection)
The VB-4/VB-5 units include Mutek's serial to parallel conversion board — an optional built-in Centronics printer port is available for these units at **£5.00** extra.
VC-1 PET demonstration cassette....**£2.50**
VC-2 Atom demonstration cassette **£2.50**
Versions available for other makes of computer — please call for details.

All units are ready-built, fully guaranteed and complete with case and speaker, mains PSU and lead and comprehensive manual. *The manual is also available separately at £1.50* (credited against order). Please include VAT at the appropriate rate and £2.00 for carriage for any number of units.

All prices quoted exclude VAT

MUTEK Quarry Hill, Box, Wilts
Tel: Bath (0225) 743289

MICROMART

FASTER, FASTER, FASTER!

One way you can get your PET programs to run faster is to use machine code – in which case you'll need a good assembler, like our MIKRO assembler. In one 4k chip we've packed a powerful assembler/editor – and because MIKRO source is written as BASIC lines it's an easy way to start! Available for 3000, 4000 or 8000 machines, just £50 plus VAT.

Writing machine code isn't everybody's cup of tea. You could spend £300 on a compiler, but we think that for most purposes our new FASTER BASIC chip is the best solution. For just £30 plus VAT it'll speed up most Basic programs by 50-100%, sometimes more.

If you don't have a disk unit then much of your time is spent waiting for programs to LOAD, SAVE, and VERIFY. The ARROW chip enables the standard CBM cassette deck to load, save, verify and append at 6 to 7 times normal speed. For £30 plus VAT you also get auto-repeat, a plot command, and a 'hexadecimal calculator' mode.

FASTER BASIC and ARROW are 2k chips which can be located in any vacant ROM area (as ordered). Each can also be combined in a 4k chip with one of our other 2k chips such as SUPERCHIP or PIC-CHIP. There is a 'customising' charge of £5 plus VAT.

OUR SUMMER 1981 CATALOGUE IS FREE TO OWNERS

SUPERSOFT

Dept P6, 10-14 Canning Road, Wealdstone, Harrow, Middlesex. Telephone: 01-861 1166

NEW VISICALC FAMILY NOW AVAILABLE

Visicalc 3.3 (New)	£135
PET Visicalc	£100
Visidex 3.3 (New)	£110
Visiplot 3.3 (New)	£85
Visitrend includes Visiplot	£140
Visicalc 3.2	£85
Desktop Plan II	£110

Add £2 p&p to above prices + 15% VAT

Apple II 48k Europlus £675

EPSON MX 100 printer 15" car £575

Add £10 p&p to above prices + 15% VAT

Delivery will be by Securicor

For full catalogue send to:

ANDERLEE COMPUTING SERVICES
17 ADELPHI CRESCENT, HAYES PARK
HAYES, MIDDX UB4 8LY
or TEL: 01-841 1507

ZX81

11 PROGRAMS FOR 1K ZX81

*REACT (m/c)
*INVADERS (m/c)
*PHANTOM ALIENS (m/c)
*MAZE OF DEATH (m/c)
*COMPETITIVE PLANET LANDER (m/c)
*BUG SPLAT (m/c)
*BOUNCING LETTERS (m/c)
*I CHING (Basic)
*MASTERMIND (Basic)
*BASIC HANGMAN (Basic)
*ROBOTS (Basic)

PROG OF THE MONTH: REACT

Destroy the heavily defended reactor before the countdown ends. Continuous display of score and countdown. Realistic bomb trajectories.

All on CASSETTE ONE (sent first class) for £3.80 from M. Orwin, 26 Brownlow Road, Willesden, London NW10 9QL

(Programs wanted, send s.a.e.)

SOFTY 2

Continued from page 94

bytes to be moved from one position to another, shifting the surrounding code accordingly and leaving the rest of the program unaltered. STORE and REPLACE together allow a block of hex of up to 110 bytes to be lifted out and placed in a temporary store to be later called back to any place in memory. This is particularly useful for routines which frequently need to be repeated; they can be copied to wherever the cursor is located at the mere press of a button.

In the ROM emulator mode, Softy2 can aid in debugging programs. The screen behaves as a window into the contents of 512 bytes of memory. The correct functioning of any part of a program can be checked by running the program in the host system and arranging that any results or changes occur in the area of memory into which this window is looking. A page facility allows the window area to be moved through the whole of the 2k RAM.

Various other necessary facilities exist, like clearing all of the memory either in front of or behind the cursor. Such clearing means that FFs are written to every location rather than zeros, as this is the cleared condition for EPROMs. Softy2 also has the facility whereby the contents of an existing EPROM can be copied in, first for modification and then for re-burning into a clean EPROM. Another facility allows the contents of an EPROM to be compared with whatever is within Softy2.

Softy2 is provided with two parallel ports for connection with a more sophisticated micro, to allow downloading of a hex program, perhaps from an assembler to Softy2, or to connect a printer for a permanent record of the contents of an EPROM. The user would have to provide his own connector and solder it in place himself.

Conclusion

The choice between a ROM emulator and a more complete computer system must be a trade-off between cost and time: Softy2 has the advantage of being at the cheap end of the market but must invariably take longer to operate than would a more sophisticated system with an assembler.

On a chip-by-chip comparison with personal computers, ROM emulation systems seem rather expensive but this probably reflects their relatively smaller volume of production. At £169 +VAT, Softy2 is significantly cheaper than any competitors I know.

Chatter COMPUTER WORLD

Continued from page 131

schools should get in touch with their nearest CTUK! centre, or go along to any one of the hundreds of computer clubs and user groups. Failing all that, have you tried contacting the local Education Authority? Everyone now has an Advisor or Inspector charged with the responsibility of advising on computer matters!

Restrictions removed

I'll say one thing about the DOI and DES – they're listening. You can't say that in the computing field they don't respond to opinion, judging by some recent dope to come my way. One of the loudest complaints from schools was that those who had previously taken the plunge and bought their own computers were to be excluded from the plan to install machines in every secondary school during 1982. Apparently this restriction is to be lifted, which appears natural justice and will pacify many. I also hear that there is to be the removal of the restriction on choice of machines, but more of that in another issue.

BANKS' STATEMENT

Continued from page 71

particular marketplace requires, have the facility to tailor a standard microcomputer system to meet such requirements?

It could well happen and would perhaps mark the biggest nail in the coffin of semiconductor industry design leadership, which is already under threat from existing trends in gate array products. The semiconductor industry now stands every chance of becoming what has already been called

CHEAP PETS

EX-HIRE **EX-DEMO**

EX-STOCK

Full Guarantee

4032 Computer £525
3032 Computer £475

Tel: 01-878 7044/5/6

ATARI

Hardware/Software

ATARI 400	ATARI 800
£299.50 + VAT	£564.50 + VAT

ATARI 400 + disk + 32K

Price on application

Space Invaders, Asteroids, Word Processing Teaching Programs etc. etc.

Ring for list **0454 418596**

DORLING MICROSYSTEMS
Tockington, Bristol.
Cash & Carry/Mail order P&P extra

a 'silicon foundry', manufacturing other people's designs on contract.

The other development in the integrated circuit business that I mentioned ealier will also have its effect on the microcomputer manufacturers and perhaps to a greater extent the systems houses and distributors/dealers. That development is firmware.

In its simplest form, this is software in a hardware form, and has been around for some time. The read-only memory and programmable ROM are good examples. There are developments here, however, that will greatly extend their influence in system design.

Firstly, there is the area of system utilities. Already there are CRT controllers and keyboard controllers that incorporate both the software and the hardware in a single chip. There are numeric processors that give a hardware implementation of a software floating point maths routine. Intel, with its iAPX 432 32-bit processor, is using a kernel operating system in ROM. This trend will continue, and more utilities will start appearing as firmware modules. But why stop there? Why not start putting common program subroutines into ROM? Why not have a module that provides the software linking for these sub-routines? Why not edge towards complete applications packages in the same way?

As the circuit complexity increases, so the memories will get bigger and be able to store more code, so there is no real technical brake. The main one will be marketing — which programs or sub-routines to go for. Another potential brake will be the proliferation of bugs in programs. Put an infested program into ROM and it is stuck — there will be no chance to patch. The whole production run of ROMs would have to be chucked. One way round this to use PROMs instead, for the capacity of these devices is also increasing rapidly. The other alternative is better programming, but. . .

Now suppose all this is in existence, what happens then? Well, it would be possible for the systems house/distributor/dealer to configure a system (both in hardware and software) to more nearly suit the exact requirements of a user with simplicity, reliability and low cost. Simplicity, because the task would tend towards the 'pick-a-chip-off-the-rack-and-insert-in-board' approach. Reliability, because semiconductor devices have a high inherent reliability. Low cost, because when made in high volume, the little beasties are usually cheap.

Bear in mind something once said by Gerry Sanders, president of Advanced Micro Devices: 'At the first level of approximation, the semiconductor industry has made memory free. At the second level we have made logic free. Now we are going for the third level, and make software free as well.' The industry can and probably will do it, so think about the implications now.

BLUDNERS

In June's 'Calculator Corner' we wrongly referred to Jan 81 *PCW* as containing the first Casio Quirks article — it was actually Feb 81. The less said about the mystery disappearance of August's 'Calculator Corner' the better — we were as puzzled by it as everyone else, but it's reprinted in this issue.

A few bugs crept into Adrian Stokes' HMSOS review last month. Figure 1 should have looked like this:▼

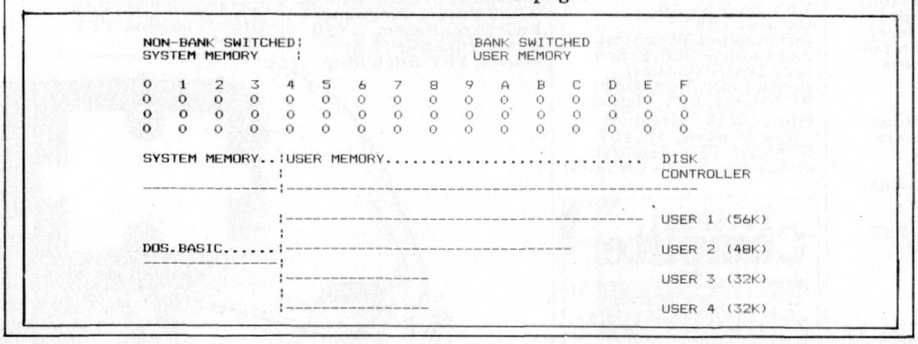

The subroutine call towards the end of the software section should have stated 'I=CALL' and the last sentence in the paragraph before the summary should read: '. . . if a single-user system were marketed at a very much lower price. I have discussed this proposal with Hotel Microsystems and. . . '

Finally, last month's edition was Volume 4 No 9, not 7 as on the contents page.

MICROMART

PET and VIC

Southampton

FREE offers with PET Products

Price List

2001S plus TOOLKIT and Dustcover		£405
4008N	"	£420
4016N	"	£475
4032N	"	£625
8032N	"	£795
4040 plus box disks		£640
8050	"	£825
4022 plus box paper		£365
C2N plus ten C12's		£55

HIRE Commodore equipment by the week (inc. manuals, demos, games etc) 8K £23, 32K £30, Disk, Printer £30

VIC 20 available mid August £165

We are also a TV dealer and will advise, supply and service a suitable B & W or colour TV

6550 RAM's £10 each

OFFICIAL COMMODORE DEALER

SUPER-VISION

13 St James Road, Shirley, Southampton Telephone (0703) 774023 After hours (0703) 554488

All prices are cash-and-carry and exclude VAT

Jacquie Hancock is leaving Micromart and handing over to Marianne McNicholas. Jacquie sends her best wishes and says goodbye to all Micromart advertisers and wishes Marianne every success.

TRS-80 Compiler Work-Station

Model I and III, and Video Genie

Speed up your Basic Program Development

EDIT — Full-screen BASIC editor with floating cursor and auto repeat. 30 commands and functions let you find, change, insert, delete, replicate, copy, or move BASIC text at the character, string, line, or block level. Improved program visibility, fewer errors. £17.50

EXEC — Command-list processor. Speeds up and simplifies repetitive procedures such as power-up, file reorganisation. £9.50

Speed up your Basic Program Execution

ACCEL2 — Compiler for Model I and III BASIC (disk and non-disk). Execution speed-ups of 20-30 times for integer operations, 5-7 times for string handling, less if I/O limited. Very easy to use. Professionals note: Full instructions for selling derived code on tape or disk. No royalties! Ask for more details. £39.95

TSAVE — Writes compiled code to SYSTEM tape. Makes core-image backups of any machine-language programs. £4.95

Southern Software

PO Box 39, Eastleigh, Hants, England, SO5 5WQ

LISTING PAPER

2000 Sheets per Box

11" × 9½" ruled or plain **£16.00**

11" × 14½" ruled only **£17.00**

FULLY INCLUSIVE OF CARRIAGE AND VAT

UK MAINLAND ONLY CASH WITH ORDER

Scholarly Supplies
Woodlands Park Avenue
Woodlands Park, Maidenhead, Berks
Tel: Littlewick Green (062882) 3104

COMPUTER CONSUMABLES

Paper 11x9.5inch 60g continuous plain with perforated sprockets. £10 per box of 2000 sheets

Labels, self-adhesive. 1.44 x 4inch 2 across on web. £7.50 per 1000.

Envelopes continues any size. . . ring for quote.

5.25inch FLOPPY DISKS MEMOREX S.S.S.D. £16.20 per box of 10.

Mailing service. . . Personal and business mailing list created and printed. . . ring for a quote.

Postage/packing: Paper £3 per box; labels £1 per 1000; Disks £1 per box.

All plus VAT.

ALSO VIDEO GENIE 16K £279 + VAT

VIDEO GENIE Small Business System: 48K system with twin disks, monitor and Epson MX80 printer £1350 + VAT.

MICRO COMPUTER SERVICES, 22 HOLLAND ROAD, CLACTON-ON-SEA, ESSEX. TEL (0255) 29018.

BACK ISSUES SERVICE

Here is a complete guide to all available back issues of *PCW*. A quick guide to their contents is shown below. Check the coupon overleaf for the issues you require.

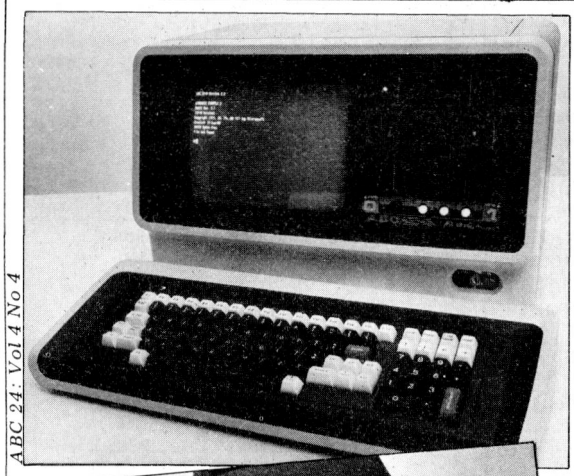



Volume 1 No 1, 1978
The 77-68/Practical hints on kit building/Nascom 1/Charity case study/Flowcharting/Pontoon flowchart

Volume 1 No 2, 1978
Kit building/Basic — first steps/Case study — a software house/PET 2001/Research machines 380Z/School computing/E78 — Europa Bus.

Volume 1 No 3, 1978
More efficient programs/Cosmac 1802/The PDP11 Part 1/Small business computing — an approach/The Z80/EPROM programmer construction.

Volume 1 No 6
October 1978
Pilot/Assembly code programming/Small business case study/PET preening/Time tabling for schools.

Volume 1 No 8
December 1978
Microcomputer architecture/System design/Colossus/Medical interviewing machine/Hints for the business beginner/Cromemco Z2D/School computing/3rd Noughts & crosses/Low cost/High speed cassette interface

Volume 1 No 11
March 1979
SYM-1/Mk14/IEEE-488 Bus/Motorola 6809/Small computer networks/TMS-9900 homebrew.

Volume 2 No 1
May 1979
Chess programming/Using a small business computer Part 1/Smart 1/In defence of PET/3D Noughts & crosses.

Volume 2 No 2
June 1979
Different computer languages/(MSI) 6800/Using a small business computer Part II/Demonstrations using the Apple II Part I.

Volume 2 No 3
July 1979
Basic or Pascal?/The Sorcerer/Z8000/Chess programming/Graphics for the TRS-80/Applevision — part II/

Volume 2 No 4
Apple medical application/North Star Horizon/Word processing/High speed cassette interface/Sorting/Buying a computer for a small business

Volume 2 No 5
September 1979
Benchtest: Compucolor II/Checkout: Heuristics Speech Lab/Testing Precognition/Pascal series — Part I/Programs: 6800 Time response, Apple memory test, Fx 201p spaceship, PET Orbit sim, PET digital clock, Acronyms.

Volume 3 No 5
May 1980
Benchtest: Texas TI 99/4 / Benchtest: ACS 8000-2/Benchmark round-up/Benchtest: HP85/Viewdata — Part 2/Checkout: Microdata UV8 EPROM Eraser/DIY teleprinter conversion feature/Nascom music/T159 accountancy application.

Volume 3 No 6
June 1980
Benchtest: Tandy TRS-80 Model II/Benchtest: Sintrom Periflex 630/48 / Staff case study/Checkout: Softy Intelligent EPROM Programmer/Checkout: Exatron Stringy Floppy/Practical examples of the IEEE-488 bus use/Programs: Naming Nascom files, 380Z Pictures, Fuel tank calculations — PET, PET large numeral generator, PET tank battle, Basic string handling routines/Pascal: Final instalment.



Volume 3 No 9
Setember 1980
Benchtest: BASF 7120/Checkout: Hi-Tech S100 colour VDU board/Secrets of systems analysis — Part 1/Sub set — part 1/Benchtest: CBM's 'SuperPET'./Programs: PET Dots & boxes, PET Bloobers, PET Demolition, Apple Showpiece, PEEK & POKE for Apple & Pascal, PET Giant Slalom, Speed & Acceleration.



Volume 3 No 10
October 1980
3-D graphics/Benchtest: Atari 400 & 800/Benchtest: DAI/Robotics/Benchmarks/Programs: PET Racer, PET Fighter Pilot, UK101 Graphics, Apple Plotting, UK101 Gunfight, PET Algebraic evaluation, ZX80 Breakout



Volume 3 No 12
December 1980
Benchtest: Microwriter/Printerfacing: Series — Part 1/Sharp PC-1211 speed-up/Programs: TRS-80 Tarot, PET Cat & Mouse, PET Rebound, MZ-80K Alligator Swamp, PET Connect, UK101 Minefield, PET Simon



Volume 4 No 1
January 1981
Benchtest: Transam Tuscan/Real-time control using trains — part 1/Recover from a data tape disaster/PET Music/Multi-user systems — part 1/Programs: TRS80 Four in a row, TRS80 Target Practice, PET Convoy, PET Wire, PET Maze Chase, PET Android Attack, PET Anagram



Volume 4 No 2
February 1981
Benchtest: The Vector Graphics VIP/Patterns — Part 1/The last one/Real time control — part 2/Multi-user systems part 2/ZX80 Printer/Programs; PET Greenfingers, ZX80 Bumper Bundle (3 programs), PET Brick Stop



Volume 4 No 4
April 1981
Benchtest: ABC 24/Slow scan TV/IDPM/Word processing: Benchtests/ZX80 books/Commons report/Casio fx 3500p/Programs: ZX80 Maths Test, ZX80 Calendar, PET Link Index, ZX80 Moon Lander, TRS-80 Rocket Attack, TRS-80 Dropout, PET Giant Trap.



Volume 4 No 3
March 1981
Benchtest: Onyx C8002/Benchtest: Bigboard/Micro music software package/ALC circuit/Commons report/HP 34C/Programs: TRS80 Show Jumping, PET Grand Prix, PET Aircraft landing, PET Bouncy.

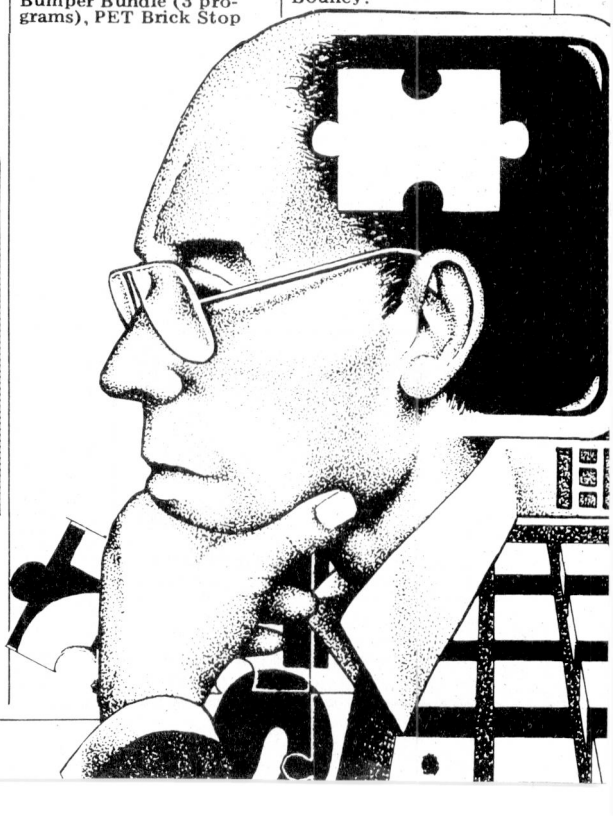



Volume 4 No 5
May 1981
Benchtest: Pasca 640/ WP Benchtest: Magic Wand/PET colour/Low-cost digital tape system/ Using calculator printers on micros/Apple music-making/Multi-user Benchtest: MVT-Famos/Programs: PET Grand Prix, PET Aircraft Landing, PET Bouncy.



Volume 4 No 6
June 1981
Benchtest: NEC PC-8001/ Multi-user Benchtest: MP/M/Benchtest: Sinclair ZX81/West Coast Faire report/Radio Teletype/ WP Benchtest: Wordpro 4 Plus/Budget tape interface/Further Casio quirks/ Programs: UK101 Zor, PET Chords.

Volume 4 No 7
July 1981
Benchtest: Sharp PC-3201/ Multi-user Benchtest: Acorn Econet/ Case study: Accident investigation on TRS-80/Zilog Z8 family/ WP Benchtest: Format-80/ Pascal Benchmarks: readers' letters/Quicker Casio computations/Programs: ZX80 Sliding Letters, UK101 Car Rally, TRS-80 Calendar, UK101 m/c code to Basic converter, PET Exam Questions, MZ-80K Designer, ZX81 Sketch Pad.





Volume 4 No 8
August 1981
Benchtest: Tandy Model III/Viewdata update/WP Benchtest: Spellbinder/ Printer survey/Microholism/Programs: ZX80 Othello; Easter Sunday; Apple Mondrian; MZ-80K Duck Shoot; PET Gomoku; MZ-80K Football.



Vol 4 No 9
September 1981
Benchtests: Tandy Color Computer, Commodore VIC/Checkouts: Hi Tech Speakeasy, Tantel/ Multi-user Benchtest: HMSOS/ WP Benchtest: Memorite III/Word proc program for PET/Apple dealership run by spastics/Printer-facing extra/Calc Corner: Casio fx602p review/ Programs: PET Arithmetic test, ZX80 Eldorado, 380Z Memory test.

BACK ISSUES CENTRE

We have a complete selection of all available *PCW* back numbers in our flashy new Back Issues Centre in the West End of London, just half a minute's walk from Oxford Street (close to Tottenham Court Road tube station). Of course, you could order them from our excellent mail order service using the coupon below, but by visiting in person you save on postage costs. The Back Issues Centre also often has back numbers of *PCW* on sale which we cannot offer through the mail order service because of shortage of stock. And any new issue is usually on sale in the Back Issues Centre several days before it reaches your local newsagent. Our receptionists will also be happy to sell you a set of binders or take your subscription. And there's a range of interesting computer books on sale as well. Drop by next time you're in the West End. We're open Monday to Friday, 10am to 6pm. The address is 14 Rathbone Place, London W1.

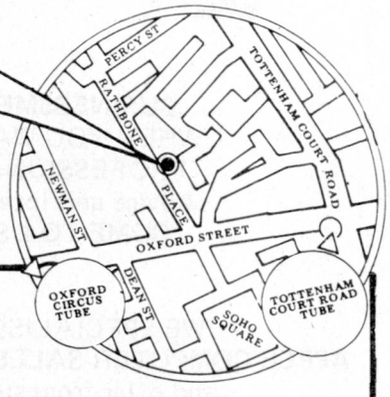

COME UP AND SEE US..

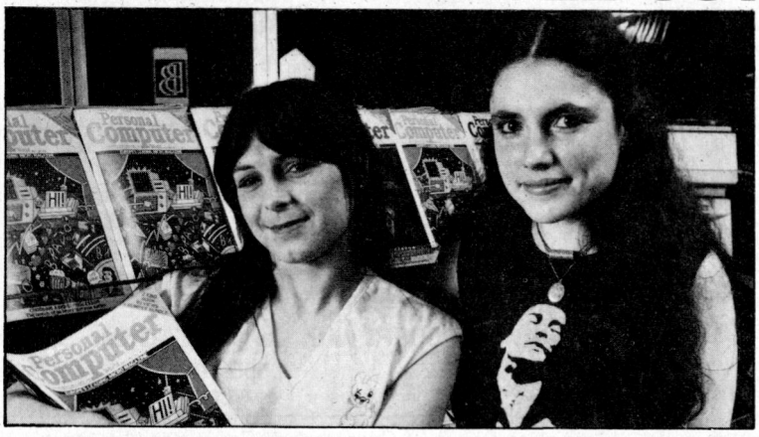

DESK TOP COMPUTING

A COMPREHENSIVE GUIDE TO SUCCESSFUL BUSINESS AND PROFESSIONAL MICROCOMPUTING

Send £2.25 to Desk Top Computing Offer, 14 Rathbone Place, London W1P 1DE. Cheques should be made payable to *Personal Computer World*.

PCW BINDERS

Strong, durable, attractive yellow *PCW* binders — £3.25 each, including postage and packing. See coupon below.

Any one issue £1.25; Any two issues £2.25; Any three issues £3.00; Any four issues £3.75. All additional issues @ 75p each. Binders @ £3.25. All prices include post and packing. Cheque or P.O. payable to *(PCW)* Sportscene Publishers Ltd., 14 Rathbone Place, London W1P 1DE. Please allow up to 3 weeks for delivery and don't forget to state clearly your name and full address with your order. Please send me the following copies of *PCW*. I enclose a cheque/P.O. for £_____ Please tick appropriate boxes.

Volume 1	Volume 2	Volume 3	Volume 4
1☐ 2☐ 3☐ 6☐	1☐ 2☐ 3☐ 4☐ 5☐	5☐ 6☐	1☐ 3☐ 2☐ 4☐ 5☐ 6☐
8☐ 11☐		9☐ 10☐ 11☐ 12☐	7☐ 8☐

Name_____ Address_____

the software house

Access · Barclaycard VISA

apple computer
Sales and Service

Visicalc	Locksmith
Visicalc II	DB Master
Visidex	Mail List
Visiplot	DOS Toolkit
Visiterm	3.3 Upgrade
Visitrend/Plot	Super Apple Basic
CCA Database	Assbly Dev System
Tabs Modules	Verbatim Discs
Super Editor	The Data Factory
Symdis	

BUSINESSMEN
WHEN YOU WANT
PROFESSIONAL
Advice and Interest
COME TO US!

WE SPECIALISE IN
APPLE COMPUTER SALES and SERVICE
and offer from stock—
COMPUTERS, PRINTERS, ACCESSORIES
and a simply ENORMOUS range of
SOFTWARE

We give FRIENDLY advice
and try not to use confusing jargon
COME AND DISCUSS YOUR
REQUIREMENTS!

We offer LEASING and LEASE-PURCHASE
facilities

Our SHOP is in HORSE SHOE YARD
(corner of BROOK STREET and BOND
STREET)

Why not phone us on 493 3420
and see how much better we are!

We keep large stocks of most popular
equipment

THE SOFTWARE HOUSE
HORSE SHOE YARD
BROOK STREET
LONDON W1

Intex DATALOG LTD

MICROCOMPUTER HARDWARE/
SOFTWARE & ACCESSORIES



SPECIAL OFFERS

FOR A LIMITED PERIOD

DISKETTES

Suitable for Computhink or CBM 8050

BASF	D/S	D/D	BOX 10	40.25
VERBATIM	D/S	D/D	BOX 10	36.80

Suitable for CBM 3040/4040

WABASH	S/S	D/D	BOX 10	27.60
ACCUTRACK	S/S	D/D	BOX 10	27.60

Prices include :– FREE LIBRARY CASE, VAT and postage.
DISCOUNTS FOR QUANTITIES.

BLANK CASSETTES

C12	BOX 10	5.75
C60	BOX 10	8.05

Prices Include :– VAT and postage.
DISCOUNTS FOR QUANTITIES.

FORMS RECEIVING TRAY

Suitable for :– ANADEX DP8000
MICROTEK MT–80S 10.50
CBM 3022

Price includes :– VAT and postage.

We also stock :– RIBBONS * PLUGS * SOCKETS * CONNECTORS * HEAD–CLEANERS * DEMAGNETISERS * PAPER * INTERFACES * HI–RES GRAPHICS * UPGRADES.

FREE CATALOGUE on request.

MAIL ORDER BY RETURN OF POST
24hr. ANSWERING SERVICE
BARCLAYCARD & ACCESS

Please Quote
PCW 1081

CRA COMPUTER RETAILERS ASSOCIATION

Eaglescliffe Ind. Est. Stockton
Cleveland TS16 0PN Tel(0642) 781193

Intex

LEEDS COMPUTER CENTRE

apple



II EUROPLUS

48K £625 + VAT
DISK WITH CONTROLLER
£360 + VAT
DISK WITHOUT CONTROLLER
£275 + VAT
MONITORS B/W OR GREEN
FULL RANGE OF CHEMPIALS,
EPSON AND PAPER TIGER.
PRINTERS ALL DISCOUNTED
o/o £4.

VIC-20

+ £175 'INCLUDING VAT'
P/P £3.

Price includes fully tested unit with fitted plug.
Complete range of vic-pheriphials.

COMMODORE PET

NEW 4000SR. with Large 12" Green Screen
32K MODEL £555.00
P-P £5.00 + VAT

Complete Range of Commodore Equipment Ex-stock.

Telephone your order 'NOW'. Access and Barclaycard accepted.
Official orders welcome. Goods dispatched 24hr delivery.
Please phone for our lowest prices.

Sales Service Satisfaction

ADVANCED COMPUTER EQUIPMENT
(LEEDS) LTD
95 MEADOW LANE, LEEDS 11
PHONE 0532 446960 TELEX 335909

THE EXHIBITION FOR THE ELECTRONICS ENTHUSIAST

COMPUTERS● AUDIO● RADIO● MUSIC● LOGIC● TEST GEAR● CB● GAMES● KITS

Wednesday 11th November 10 a.m.-6 p.m. Thursday 12th November 10 a.m.-8 p.m.
Friday 13th November 10 a.m.-6 p.m. Saturday 14th November 10 a.m.-6 p.m.
Sunday 15th November 10 a.m.-4 p.m.

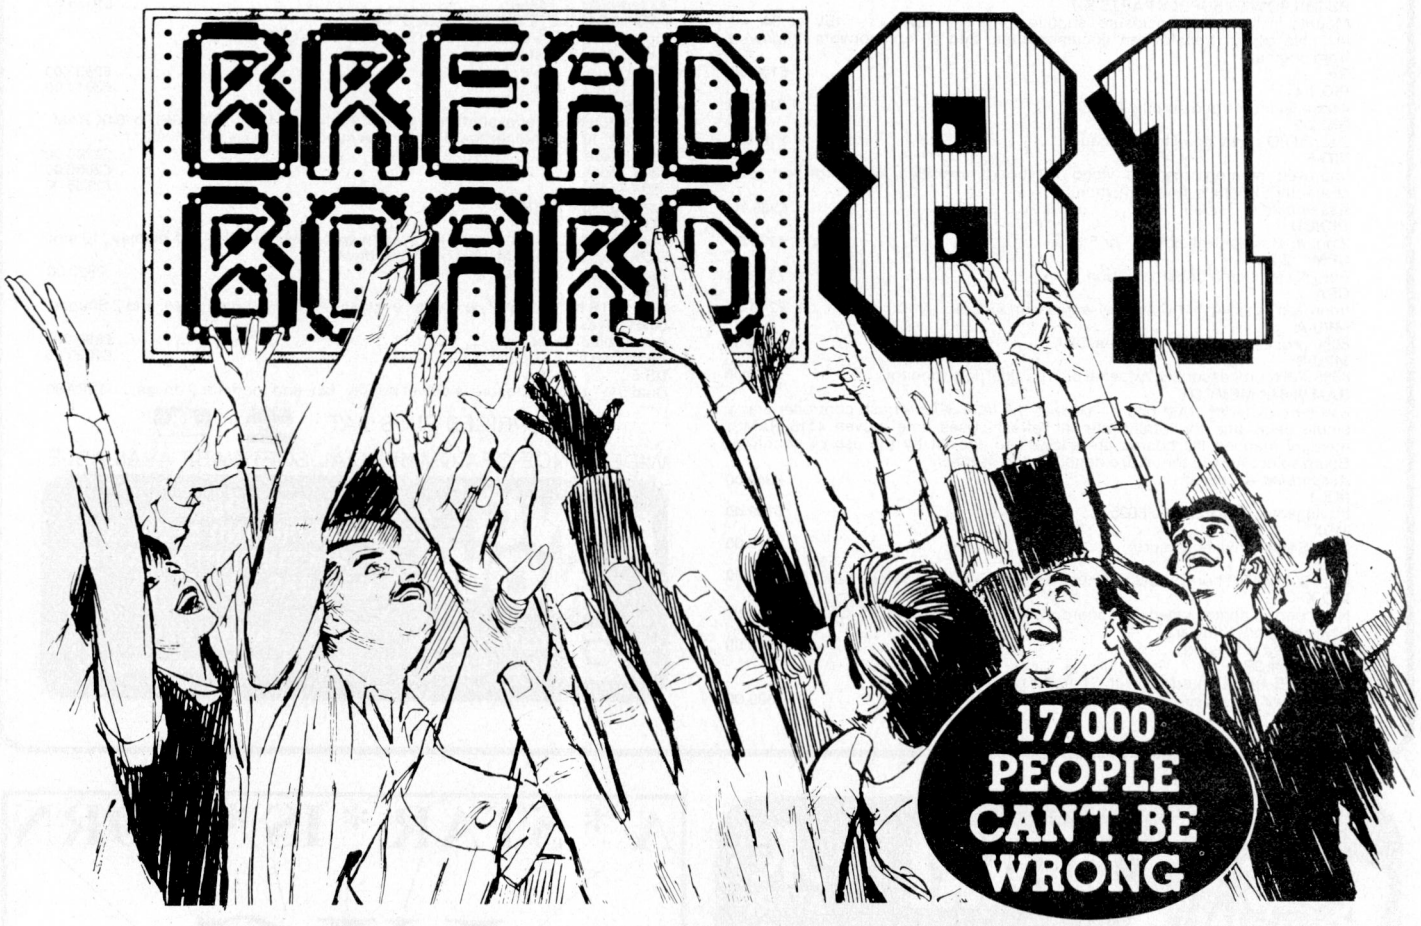

COMPONENTS● DEMONSTRATIONS● SPECIAL OFFERS● MAGAZINES● BOOKS

Any one of the 17,000 people who thronged the RHS for the Breadboard exhibition last year will need no introduction to this year's premier show for the electronics enthusiast. They already know all about the demonstrations, bargain sales, bookstalls, games, kits, computers and music machines to be found at BREADBOARD 81. They could name you all the leading companies who were there to see — and to buy from, at fantastic prices.

Even those lucky 17,000 would be surprised to hear that this year we've **improved** BREADBROAD still further! More stands, more demonstrations and wider gangways to make it all easier to enjoy!

BREADBOARD 81 is the place to be from November 11th to 15th at the RHS Hall. Why not come and find out for yourself how much you missed last year? We can promise plenty to see and do at BREADBOARD 81.

Close to Victoria Station and NCP car parking facilities.

Cost of entry will be £2.00 for adults and £1.00 for children under 14 yrs and O.A.P.s.
ORGANISED BY MODMAGS LTD., 145 CHARING CROSS ROAD, LONDON WC2H 0EE.

ROYAL HORTICULTURAL SOCIETY'S NEW HALL, GREYCOAT STREET, WESTMINSTER, LONDON S.W.1.

To avoid queueing, advance tickets will be available from
Advance Tickets BB '81,
Modmags Ltd, 145 Charing Cross Road,
London WC2H 0EE.

"Special Advance Booking Price"
Adults £1.75 Children under 14 yrs and O.A.P.s 80p

Please send ..... tickets @ £1.75 ..... tickets @ 80p

To: .....

.....

.....

.....

I enclose PO/cheque for £.....

Advance tickets MUST be ordered BEFORE 20th October 1981.

TESTED & ASSEMBLED PCB'S & KITS

6 MONTH GUARANTEE — REPAIR SERVICE

FULCRUM COMPUTER PRODUCTS

I-8080 S-100 ENCLOSURE SHEET METAL KIT
Just like THE ORIGINAL IMSAI: Mainframe with blue cover, cardguides and hardware spaced for PS-28D Power Supply, up to 22 slot motherboard.
Kit of all metal parts and hardware with documentation £120.00
Thinker Toys Wunder Buss 20 for above w/o conn £85.00
S-100 Connectors—*each* £3.60
8015 Blank jump-start panel w/3 switches £41.00
8035 Jump start panel for 2 SA-400 ..... £95.00

PS-28D POWER SUPPLY PARTS KIT
Mounts in the I-8080 enclosure, supplies + 8V @ 28A, +/– 16V @ 3A, kit includes board, transformer, documentation, and all components. Improved from original.
Kit £180.00

PIO 4-4
4 parallel inputs and outputs (8212) £160.00

SIO 2-2
2 serial I/O ports, good to 9600 baud £160.00

VIO-F
Improved memory mapped video I/O board, includes keyboard port, 256 character EPROM's, firmware, monitor.
Assembled & Tested £269.00

DIO/CD
2 board disk controller for 8" or 5¼" £299.00

CPM® 2.2
For DIO including documentation £125.00

CPA
Improved Imsai style front panel works with Z80, etc £249.00

MPU-A
8080 processor board—requires CPA £129.00

MPU-B
8085 3MHz processor SBC w/serial plus parallel port, monitor £249.00

RAM III 64K MEMORY
64K byte dynamic RAM board—Utilizes the Intel 3242 refresh controller and a single delay line for totally internal refresh. Uses time proven 4116 RAMS. memory mapped I/O boards are allowed to coexist by the use of phantom. Board select via A16 thru A20 extended address lines.
Assembled & Tested £349.00

IKB-1
Intelligent keyboard uses 8035 ..... £189.00

MDX
Dual SA400 drive enclosure £78.00

DE 8
Dual 800R/801R horizontal style enclosure w/power supply and fan £270.00

VIO-X
New port mapped video I/O board w/8085 processor, 8275 CRT controller, keyboard port, firmware.
Assembled & Tested £249.00

IEEE 488 + 3P
New IEEE-488 I/O interface with 3 parallel ports.
Assembled & Tested £599.00

COMPUTER SYSTEMS

INSTALLATION — SOFTWARE
PROGRAMMING — MAINTENANCE

FULCRUM COMPUTER PRODUCTS

I-8080 SYSTEM
The basic 8080 based S-100 system. Includes CPA front panel, 20 slot 10 MHz motherboard (with all 20 connectors), MPU-A 8080 CPU board, PS-28D power supply (+ 8V @ 28A, +/– 16V @ 3A), and chassis.
Assembled & Tested. With MPU-A £706.00

I-8015 BASIC SYSTEM
The complete 8085 system, includes MPU-B, 64K RAM 10 slot terminated motherboard, PS-28D, and jump start front panel.
Assembled & Tested £1035.00

I-8025 COMPLETE BUSINESS SYSTEM
Includes I-8015 system and DS-8 Disk system w/CPM 2.2.
Assembled & Tested.
1.2 M byte 8" drive £2933.00
2.4 M byte 8" drive £3017.00

I-8035
The 8085 computer system with twin 5¼" disk drives, DIO-D, MPU-b, 64K RAM, chassis, 10 slot motherboard and power supply. Includes CPM® 2.2.
180K store £2386.00
360K store £2686.00
780K store £3186.00
Assembled & Tested.

VDP-40
Desk-top 8085 micro-computer system with keyboard, 9" CRT display, 10 slot S-100 board, 64K RAM, twin 5¼" disk drives.
Assembled & Tested 2820.00

DS-8
Dual 801R horizontal style 8" disk enclosure w/power supply, fan, and 2 Shugart 801R drives.
Assembled & Tested £855.00
Above w/DIO-C & CPM 2.2 ..... £1030.00

DS-5
Dual 5¼" disk enclosure w/power supply, fan, and room for 2 drives £189.80

ALL PRICES PLUS VAT

BARCLAYCARD VISA

WIDE RANGE OF COMMERCIAL SOFTWARE AVAILABLE

RING NOW

FOR FREE PRODUCT BROCHURE AND DETAILS OF OUR SUPPORT SERVICES & DEALERS

0245 357136
0621 828763

Telex: 995411
Export enquiries welcome

ATARI APPROVED DEALER

ATARI PERSONAL COMPUTER SYSTEMS

ATARI 400 & 800

IN MANCHESTER

✸ SOFTWARE ✸ PERIPHERALS
✸ COMPUTER CHESS GAMES
(FULL RANGE IN STOCK)

BARCLAYCARD VISA

Access Buy it with Access

SPECIAL MAIL ORDER SERVICE WRITE OR PHONE FOR FULL DETAILS

GEMINI ELECTRONICS

Dept. PCW, 50 Newton St., Off Piccadilly, Manchester M1 2EA. Tel: 061-236 3083.

WE ARE AT THE CORNER NEWTON ST./ HILTON ST.

A * STAR * IS * BORN

VIC

THE BEST HOME COMPUTER YET

SEE IT TRY IT BUY IT

IN OUR SHOWROOMS NOW!

ALONG WITH ALL AVAILABLE COMMODORE EQUIPMENT AND ACCESSORIES

SALES SERVICE SATISFACTION

COMMODORE APPROVED SUPER DEALER

Telephone your order NOW Access and BARCLAYCARD VISA accepted

CAMDEN ELECTRONICS LTD

MICROCOMPUTER SYSTEMS

462 COVENTRY ROAD · SMALL HEATH · BIRMINGHAM B10 0UG
Telephone: 021-773 8240 or 021-772 5718 · Telex: 335909 (Camden G)

Rumour has it that we sell microcomputers . . .

But we also supply:

Complete Business Systems
Wordprocessors
Bespoke software
Packaged software
Printers
Accessories
Full after sales support
Sound advice

Don't believe everything you read in the press though-

Find out for yourself.

THE AVERY
COMPUTER COMPANY
13 The Mall
Bar Hill, Cambridge.
Tel: Crafts Hill 80991

COMPUTER GAMES

CHESS CHAMPION MARK V
SciSys' most advanced chess computer.



SciSys Mk V
*Plays strategic chess
*Has problem speed and tournament modes.
*Can play 12 games simultaneously.
*Provides analysis, comment, advice or complete game history.

*Integral LCD chessboard
*Two clocks
*Memory retention when switched off
*Modular game
*24K memory
*Full take-back and playback facility
*Move entry by cursor or keys
*Intelligent sensor board and printer available soon.

Great game machine with

Morphy program Capablanca and Gruenfeld modules available.
CALL US FOR PRICE.
Morphy Encore available – SAE for details.



ALSO Chess champion sensory challenger £320
SAE for details.
Atari 400 £30
VIC 20 – phone or SAE for details.

We stock a vast range of chess computers at the most competitive prices. Call or write to:–

KRAMER AND CO.
DEPT. PCW, 9 OCTOBER PLACE,
LONDON NW4 1EJ. 01-203 2473

PRINTERS

CENTRONICS 737

This versatile printer provides consistently excellent standard print for routine applications. Furthermore, under software control, it will also generate proportionally spaced high density matrix characters of correspondence quality.

- 80 CPS - Proportional Spaced Mode
- 50 CPS - Monospaced Mode
- Proportional Spacing, Plus 10 CP1 and 16.7 CP1
- Nx9 (Proportional) or 7x8 (Monospaced) Dot Matrix
- 3 Way Paper Handling System
- 96 Character ASC11 plus 6 European character sets
- Microprocessor Electronics
- Expanded Print
- Right Margin Justification



£345 +VAT

EPSON
A FINE RANGE OF PRINTERS WITH ASCII AND GRAPHICS
From £259
MX70T, MX80T, MX80FT, MX100FT +VAT

The VIDEO GENIE SYSTEM EG3003
16K RAM, 12K Microsoft BASIC in ROM
TRS-80 Level II software compatible.
£277 +VAT

L.R.COMPUTERS
CHURCHILL CHAMBERS
92 GEORGE LANE LONDON E18 1JJ 01·989·3259

Central Semi~ Conductors

Production problems?

We guarantee prime parts & ex-stock delivery on all common I.C.'s

Here is part of our list:

Z80A	–	£4.50
8085A	–	£4.50
8156	–	£5.50
8255A	–	£3.20
8251A	–	£3.80
2716	–	£3.20

200 ns 4164 (64K Dynamic) £14.00!!

01-624 8581

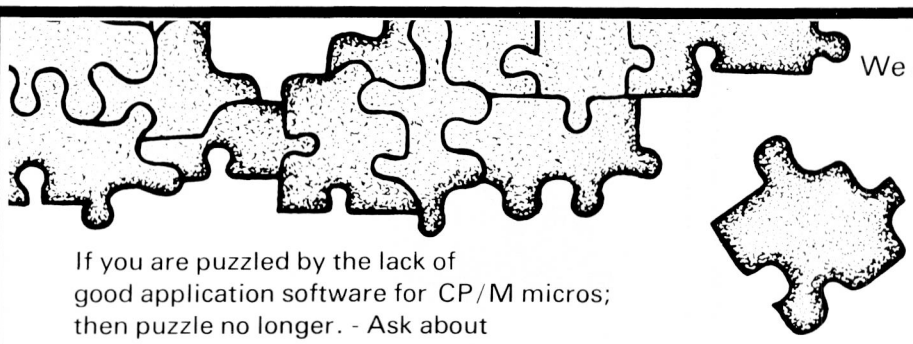

We are exclusive distributors for UK of SERENDIPITY SYSTEMS packages for Apple & CP/M; of MAGSAM index sequential access routines for CBASIC and IFO-Information File Organiser - the best data base package available for use with Apple.

If you are puzzled by the lack of good application software for CP/M micros; then puzzle no longer. - Ask about

our **GANG OF FOUR**

BASKAM

BASic Keyed Access Method routines are merged into your MBASIC programs to provide simple but efficient **INDEX-SEQUENTIAL** file handling : Multiple indexes : re-organisation : speeds processing : cuts desk use : cuts programming time by 60%. R.R.P. £95

MINIMODEL

Financial Modelling system for CP/M : Very easy to use : Flexible report layouts : consolidation : can handle large models simply and practically. Designed by business consultants for use by real businessmen. R.P.P. £399.00

DATAFLOW

The easy-to-use, fast and flexible Database management and information retrieval package for CP/M systems. If you can file it manually; then you can file it faster and better with DATAFLOW. R.P.P. £99.95

BILLFLOW

Client Billing for "Professional" business - Accountant, Consultant, Engineer, Surveyor : Invoicing, Sales Ledger, Work-in-progress, Analysis Contribution by Fee- earner : With Nominal Ledger forms complete system from Time Sheet to Balance Sheet. R.R.P. £375.00

Also ask about; Inter-Stat, Advanced Maths and Video Message packages for Apple
Ask for leaflet on; Serendipity Ledgers and Stock Control for CP/M
All CP/M packages NOW AVAILABLE for **APPLE II** and **SHARP MZ80B**

MEMBER CRA COMPUTER RETAILERS ASSOCIATION

GREAT NORTHERN Computer Services Limited

116 Low Lane, Horsforth, Leeds LS18 5PX. Telephone (0532) 589980

sbd Software

GAMES

Hi-Res SOCCER:
The only real-time action SOCCER game for Apple. All tackling, goal kicks, throw-ins, corners, are shown in full Hi-Res graphics. Fully animated players. **£22.95**

Alien Rain:
The Aliens swoop down from all sides in swift attack. Formerly sold as Apple Galaxian. **£12.95**

Snoggle:
You are Snoggle, wending your way through a maze of ghosts who will eat you if they catch you. You must be quick & bold. Please note, the upper levels of this game are very difficult.. **£12.95**

Space Eggs:
A terrific arcade-style game. You will be hatching little spiders, wolves, lips & fuzzballs!!! **£14.95**

The Wizard & the Princess:
In this adventure you must do battle against an evil wizard to save the life of the Princess. **£17.95**

Tarturian:
As you explore 160 rooms you gather weapons & treasure for the final battle aginst the Tarturian. **£14.95**

Creature Venture: You have inherited your Uncle Stashbuck's mansion. You must rid it of the horrible creatures to find your uncle's buried treasure. **£14.95**

THE GALACTIC SAGA:

The Galactic Empire I	**£12.95**
The Galactic Trader II	**£12.95**
The Galactic Revolution III	**£12.95**
Tawala's Last Redoubt	**£14.95**

Add 15% V.A.T. Postage & Packing Free
Write or phone for full catalogue of available software.
Dealer Enquiries Welcome.
Contact: **S.B.D. SOFTWARE, 14 Jocelyn Road,**
Richmond TW9 2TJ Tel: 01-948 0461, Telex: 22861

★ NEW BROOM FOR EPROMS ★

TEX ERASER SWEEPS CLEAN!

EPROMPT is Prompt Enough!



Eproms need careful treatment to survive their expected lifetime. Rushing it could burn their brains out. So cop-out of this helter-skelter world; take it easy the TEX way and give your chips a well-earned break. Cool, gentle and affordable; EPROMPT does it properly.

★ *16-chip basic economy EPROMPT EB: £32 nett; £39 c.w.o.* ★
★ *32-chip interlocked de-luxe EPROMPT GT: £40 nett; £49 c.w.o.* ★



TEXTIME is Tea-Break Time!

Our EPROMPT needs just half-an-hour to finish its job; this is the proper erase time for all Eproms. While it's busy you may as well take a break yourself, but don't take too long without a timer on the job; over-erasing can shorten data storage time. So our TEXTIME will remember to turn out the light and your chips will forget nothing new.

★ *30-minute solid-state TEXTIME M30: £15 nett; £19 c.w.o.* ★
★ ★ ★ *Special Offer EB + M30: £45 nett; £55 c.w.o.* ★ ★ ★
★ ★ ★ *Special Offer GT + M30: £53 nett; £66 c.w.o.* ★ ★ ★

TEX: Reliable quality at affordable prices. We manufacture in the U.K. and sell direct. All items ex-stock from St. Albans or Watford Electronics.
C.W.O. Prices include Carriage & VAT. Write post-free: **BOX 11;**

TEX MICROSYSTEMS LTD. FREEPOST
ST. ALBANS, HERTS. AL1 1BR **ST. ALBANS 64077/TRING 4797 ANYTIME**

MICROTEK COMPUTER SERVICES

MICROTEK INTRODUCE THE

`MICOM 81´

THE `STATE OF THE ART´ MICRO-COMPUTER SYSTEM.



- **4 MHZ Z80A CPU!**
- **18 Slot S100 Mainframe!**
- **32 MB or 96 MB CMD Hard Disk Storage!**
- **Up to 768K Dynamic or 384K Static RAM with Bank Switching!**
- **2, 4 or 8 port Serial and Parallel I/O boards!**
- **8" Double Density Floppy Disk Drives, (optional)!**
- **IBM Compatable Communications!**
- **Rugged and Reliable Rack Housing!**

The 'MICOM 81' system will run CPM, (if you really must!) or

`MVT FAMOS´

The most powerful and versatile multi-tasking, multi-user 8-bit operating system currently available! You don't believe us? Well we have a large international bank using this system with 6 terminals and 2 printers in a 'Real Time' trading application!

Do you know of a UNIX, MPM, MBOS, OASIS or any other 8-bit 'multi-user' operating system, that you can get demonstrated doing the same? Well neither do we!

The 'MICOM 81' system is also currently being used in one of this country's leading universities, and in many other different types of industrial and commercial applications.

Prices start from as little as £7,000 and OEM enquiries are welcome.

For further details phone Orpington 26803/36228 or write to Microtek Computer Services, 50 Chislehurst Road, Orpington, Kent, BR5 ODJ.

LOW COST HIGH QUALITY
EPROM PROGRAMMER/COPIER MODEL
EC2000 FOR PET OR APPLE II
LOOK WHAT YOU GET FOR YOUR MONEY

****

HARD WARE

* ATTRACTIVE CASE.
* AC MAINS POWER SUPPLY.
* TWO ZERO IN FORCE SOCKETS.
* BUILT IN INTERFACE.
* BUILT IN PROTECTION CCT AGAINST:—
  1. VCC OVER CURRENT
  2. VPP ON SLAVE OVER CURRENT.
  3. S/C ON ADDRESS OR DATA LINES.
  4. FULLY DOCUMENTED INSTRUCTIONS.

SOFT WARE

* SELECT THE TYPE OF EPROMS.
  1. TMS 2532/MCM 2532. 2. I 2732.
  3. TMS 2516/MCM 2716/MOSTEK 2716.
  4. TMS 2508/TMS 2758.
* FUNCTIONS:— COPY MASTER SLAVE.
  " RAM SLAVE.
  VERIFY MASTER SLAVE.
  READ MASTER RAM.
  " SLAVE RAM.
  EMPTY CHECK SLAVE.
* INDICATORS:— SOCKET EMPTY
  VCC O'LOAD ON MASTER + SLAVE.
  VERIFY FAIL
  EMPTY FAIL

ALL FOR ONLY £79-95p ALL EX STOCK.
UNITS BUILT & TESTED.
S.A.E. FOR FURTHER DETAILS
MID OCTOBER EC 2000
AVAILABLE FOR TRS80, UK101,
NAS COM, CSI ECT.

THE EXCITING TYPE — 'N' — TALK VOICE SYNTHESIZER EC — 01.
FOR INDUSTRIAL, BUSINESS & PLEASURE USES
LOOK & COMPARE WHAT YOU GET FOR YOUR MONEY

****

* **SELF CONTAINED BOXED UNIT.**
* **AC MAINS POWER SUPPLY.**
* **ON BOARD BUFFER.**
* **RS 232 INTERFACE FOR TRS80, APPLE, NASCOM OSI, UK101, ECT.**
* **IEEE INTERFACE FOR PET, HEWLETT PACKARD**
* **AUDIO AMPLIFIER & SPEAKER.**
* **COMPLETE INSTRUCTION MANUAL.**
* **UNLIMITED VOCABULARY. CONTINUOUS SPEECH.**
* **DATA ECHO OF ASII CHARACTERS.**
* **NO LANGUAGE BARRIER & MANY MORE FEATURES.**

ALL FOR ONLY £149.95p + VAT + P&P.
EXSTOCK. FOR FURTHER DETAILS FULL SIZE S.A.E. PLEASE.

EASI COMP SOUND EFFECT BOARD DOWN IN PRICE £40.00 + VAT.

SUPER BOARD III	**£159.00 + VAT**
610 EXPANSION BOARD	**£159.00 + VAT**
CD3P FLOPPY DISC DRIVE FOR UK101 OR OSI SUPER BOARD	**£285.00 + VAT**
CHALLENGER 2 SERIES 8K	**£225.00 + VAT**
BUS EXTENTER FOR UK101/SUPERBOARD	**£6.00 + VAT**
MICRO CASE FOR NASCOM, UK101, OSI	**£26.00 + VAT**
GAMES PROGRAMS WITH DIFFERENT	**FROM £2.00**

EXAMPLE ALLIEN INVASION WITH SOUND BETTER THAN THE PUB GAME FOR NAS COMP ONLY £10.00
SEND S.A.E. FULLSIZE FOR LIST
TELEPHONE:— (0603) 416352.

Easicomp ltd
57 Parana Court, Sprowston, Norwich NR7 8BH.

ALL MAJOR CREDIT CARDS ACCEPTED — Small surcharge

Intex DATALOG LTD
MICROCOMPUTER HARDWARE/ SOFTWARE & ACCESSORIES





'PC–BASIC' COMPILER
A TRUE COMPILER FOR THE CBM RANGE OF MICROCOMPUTERS

- A program has been SAVED normally on disk is compiled back onto disk in a directly loadable program file.
- The COMPILER is completely written in machine code and is compatible with CBM–Microsoft interpreted BASIC.
- It supports all BASIC commands and all CBM peripherals.
- The largest program that can be compiled is about 28k (depending on its structure).
- The increase in speed depends on type of program, but PCW benchmark tests indicate that a compiled program will run at up to 10 times faster than its interpreted equivalent.
- Extra facilities available in a COMPILED program include:—

(1) Integer loops for faster execution.
(2) RUN/STOP disable/enable command.
(3) Optional fully formatted listing of the program as it is compiled.
(4) Optional production of a cross reference table of variables and line references at compilation.
(5) True integer arithmetic.
(6) Full syntax check with optional object file.

FULL DETAILS AVAILABLE ON REQUEST
TRADE ENQUIRIES INVITED Please Quote PCW 1081
£300.00 + VAT Post free
Additional run time packages in EPROM £25.00 + VAT.
Under LICENCE ONLY.

Eaglescliffe Ind. Est. Stockton Cleveland TS16 0PN Tel(0642)781193 **Intex**

ZX81 VIC-20 ACORN ATOM
SUPERB SOFTWARE

ZX81 16K SOFTWARE
The following is a list of our 16K ZX81 Software (which fit into 11K)

Code and contents	Details
AIR TRAFFIC CONTROL:	An absorbing simulation of air traffic control over a busy airport. Animated display shows radar screen with moving aircraft with name tags and a list of call sign, height, speed, heading is displayed; by contacting the pilot you must bring in all the planes without them hitting the mountains or running out of fuel.
INVADERS + Self play vers:	A ZX81 implementation of the arcade game with full screen, and a self play version is supplied.
PHONE BOOK:	Now you can keep all your friends' and relatives' phone numbers on cassette, uses very fast data retrieval technique.
DATE 81:	Computer dating program. . . who will it pick for you?
16/81/2	
ADVENTURE ATLANTIS:	You are shipwrecked in the middle of a terrific storm. . . in this game you can become very rich. . . or you may be marooned on a desert island for ever!
BREAKOUT + self play vers:	A ZX81 implementation of the arcade game with full screen, and a self play version is supplied.
TRANSL8R:	Translates any European language into any other! This program stores its vocabulary on cassette.
COMPUTAPUNT:	Keeps statistical records of horses' or dogs' performances in races — and will make predictions on future races.

both packs contain the four programs described; these programs come with user instructions and are loaded and ready to run. Pack: 16/81/1 and 16/81/2 are £4.95 each or £5.95 for both incl.

VIC20 5k RAM VOLKSCOMPUTER
Tapebook 15:15 VIC-20 programs at £3.95: Tapebook 30 = £5.95 incl.
See list of ZX81 Tapebooks for details!

ACORN ATOM (original ROM) f/p not required

Code	Contents
a/1	STAR TREK: sound effects, damage control, help, animated display + all features found on other versions available, requires 6K + 4K upper text area min. PHONE BOOK: keep records on a data tape of useful phone nos, menu driven. FRUIT MACHINE: 6K + mode3 graphics; £6.95 inc
a/2	GALAXIONS, PIANO, requires 6K + 6K £6.95 inc

Both a/1 and a/2 for £8.95

CONTROL TECHNOLOGY, 39 Gloucester Road, Gee Cross, Hyde, Cheshire SK14 5JG. 061-368 7558

COMPUTER WAREHOUSE

NOW OPEN
MONDAY-SATURDAY
9.30-5.30

RAM AND EPROM NEW LOW VAT INCLUSIVE PRICES

2716	5v Rail	**£7-50**	4116	200 NS	16KX1 DYN.	**8 for £19-95**
2716	3 Rail	**£8-50**	2114L-3	300 NS	1KX4 ST.	**8 for £22-50**
2708	450 NS	**£4-50**	2102L-3	650 NS	1KX1 ST.	**8 for £ 5-50**
2708	Ex Equip	**£2-25**	TMS4030JL	300 NS	4KX1 DYN	**8 for £ 9-95**

All devices full spec. and guaranteed. Bulk enquiries welcome.

In stock now test equipment, microprocessors, teletypes, transformers, power supplies, scopes, sig. gen's, motors, peripheral equipment, I.C.'s, tools, components, variacs, keyboards, transistors, microswitches, V.D.U's sub-assemblies + thousands of other stock lines. Just a mere fraction of our vast range, is displayed below: 100's of bargains for callers.

TELETYPE ASR33 I/O TERMINALS



From £195 + CAR + VAT

Fully fledged industry standard ASR33 data terminal. Many features including: ASCII keyboard and printer for data I/O, auto data detect circuitry, RS232 serial interface, 110 baud, 8 bit paper tape punch and reader for off line data preparation and ridiculously cheap and reliable data storage. Supplied in good condition and in working order.
Options: Floor stand **£12.50 + VAT**
Sound proof enclosure **£25.00 + VAT**

ICL TERMIPRINTER 300 BAUD TERMINALS



PRICES REDUCED

ONLY £295 + CAR + VAT

Made under licence from the world famous GE Co. The ICL Termiprinter is a small attractive unit with so many features it is impossible to list them in the space available! Brief spec. as follows; RS232 serial interface, switchable baud rates 110, 150, 300, (30 cps), upper and lower case correspondence type face, standard paper, almost silent running, form feed, electronic tab settings, suited for word processor applications plus many more features. Supplied in good condition and in working order. Limited quantity.

SCOOP PURCHASE 12" VIDEO MONITORS



CONNECT DIRECT TO YOUR MICRO

Made by the "BALL MIRATEL" CORPORATION USA the CD12 is a self contained, mains powered chassis professional monitor. All controls are inbuilt on a single PCB with exception of the brightness control which can be brought out for external use. Many features such as composite video, quoted bandwidth of 19 Mhz, superb linearity and definition make this a must for any MICRO/CCTV application.
Brand new and boxed only + carriage **£7.50** + **VAT.** **£97.50 + VAT**
Input harness, brightness pot and connector **£2.50 + VAT.** Dimensions 9"H × 11"D × 11½"W
HURRY WHILE STOCKS LAST

EX STOCK SOFTY

EPROM BLOWER

Software development system invaluable tool for designers, hobbyists, etc. Enables open heart surgery on 2716, 2708 etc. Blows, copies, reads EPROMS or emulates EPROM/ROM/RAM in situ whilst displaying contents on domestic TV receiver. Many other features. **£115 + carr. + VAT.** Optional 2716, 2716 Function Card **£40 + VAT.** PSU **£20 + £1.50 carr. + VAT.**
Write or phone for more details.

JUST IN

Secondhand chassis 9" Blue-best mains powered, video monitors, composite video input with inbuilt 5v 3 amp DC P.S.U. Tested, but unguaranteed.

£39.99 + **£7.50 carriage**
Complete with circuit.

EQUIPMENT CASES



GIVE YOUR M.P.U. A HOME ONLY £9.95 + 1.85 pp

Superb professional fully enclosed, made for the G.P.O. to the highest standard, offered at a fraction of their original cost they feature aluminium sides, hinged removable front panel, which can be secured by 2 screws to prevent prying fingers. All are finished in two tone G.P.O. grey and although believed brand new may have minor scuff marks/scratches due to bad storage.
Dimensions 16"D × 6½"H × 14¾"W

NATIONAL MA1012 LED CLOCK MODULE

★ 12 HOUR
★ ALARM
★ 50/60 HZ



The same module as used in most ALARM/CLOCK radios today, the only difference is our price! All electronics are mounted on a PCB measuring only 3" × 1½" and by addition of a few switches and 5/16 volts AC you have a multi function alarm clock at a fraction of cost. Other features include snooze timer, am pm, alarm set, power fail indicator, flashing seconds cursor, modulated alarm output etc. Supplied brand new with full data only **£5.25**
Suitable transformer £1.75.

SEMICONDUCTOR 'GRAB BAGS'

Amazing value mixed semiconductors, include transistors, digital, linear I.C.'s, triacs, diodes, bridge recs. etc. etc. All devices guaranteed brand new, full spec. with manufacturers markings, fully guaranteed.
50 + BAG **£2.95** 100 + BAGS **£5.15**

MUFFIN FANS

Keep your equipment Cool and Reliable with our tested ex-equipment "Muffin Fans" almost silent running and easily mounted. Available in two voltages. **110 V.A.C. £5.05+pp 90p OR 240v A.C. £6.15+pp 90p DIMENSIONS 4¾" x 4¾" x 1½"**

ELECTRONIC COMPONENTS & EQUIPMENT 66% DISCOUNT

Due to our massive bulk purchasing programme which enables us to bring you the best possible bargains, we have thousands of I.C.'s, Transistors, Relays, Cap's., P.C.B.'s, Sub-assemblies, Switches, etc. etc. surplus to our requirements. Because we don't have sufficient stocks of any one item to include in our ads., we are packing all these items into the "**BARGAIN PARCEL OF A LIFETIME**" Thousands of components at giveaway prices! Guaranteed to be worth at least *3 times* what you pay plus we always include something from our ads. for unbeatable value!! Sold by weight

2.5kls £ 4.75+pp £1.25 **5kls £ 6.75+pp £1.80**
10kls £11.75+pp £2.25 **20kls £19.99+pp £4.75**

SAVE OVER £1400

THE PRINTER SCOOP OF THE YEAR
THE LOGABAX Z80 MICROPROCESSOR CONTROLLED LX180L MATRIX PRINTER



A massive bulk purchase enables us to offer you this superb professional printer at a fraction of its recent cost of over **£2000.** Utilising the very latest in microprocessor technology, it features a host of facilities with all electronics on one plug in P.C.B. Just study the specification and you will instantly realise it meets all the requirements of the most exacting professional or hobbyist user.

STANDARD FUNCTIONS ★ Full **ASCII** character set ★ Standard ink ribbon ★ RS232/V24 serial interface – 7 xtal controlled baud rates up to 9600 ★ 194 characters per line ★ Parallel interface ★ Handshakes on serial and parallel ports ★ 4 Type fonts, italic script, double width, italic large, standard ★ Internal buffer ★ Internal self test ★ 170 CPS ★ Variable paper tractor up to 17.5" wide ★ Solid steel construction ★ All software in 2708 eproms easily reconfigured for custom fonts etc.

All this and more, **not** refurbished but BRAND NEW At Only **£525** + VAT + carriage and ins. **£18.00 + VAT**

OPTIONAL EXTRAS ★ Lower case £25.00 ★ 16K buffer £30.00 ★ Second tractor for simultaneous dual forms £85.00 ★ Logabax maintenance. P.O.A.

MAJOR SAVINGS HARD DISK DRIVES

Another major purchase allows us to bring you the professional technology of hard disk drives at a price you can now afford. Just imagine absolutely masses of correct data transferred or saved on your system by the time your finger leaves the carriage return key!! All drives offered are made to the highest professional standard by the DRE Co., perhaps the largest of UK OEM peripheral manufacturers. All components are batch selected to obtain the utmost reliability and after having run two series 30 and a 4000 drive continuously 24 hours a day for over a year without a single read/write error we can most certainly vouch for the quality.

DIABLO/DRE series 30. Fully refurbished this 2.5 MB drive accepts 2315 exchangable (via removing top cover) disk cartridges. Sectoring is a feature of the disk pack and may range from 8-48. Fully DEC RK05, Nova, Texas, system compatable. Requires + & –15v DC Supply.
Series 30 Drive £475 + VAT Series 30 Front Loader £695 + VAT
DC Power Supply £125 + VAT

DRE 4000 B Series. Model 4044. Technology at its finest, this drive currently manufactured by DRE features 10 MB's of on line storage split into two disk plattens, 1, 5 MB fixed and 1 top load 5 MB type 5440 exchangable cartridge. Features, DC drive motor, built in air conditiong system, write protect, mains powered, etc. Supplied **Brand New** and Boxed complete with Manual and Rack Slides.
Manufacturers current price **£3100,** our price **£1495** + VAT

*For DEC compatability or alternate sectoring please enquire. Xylogics DEC LSI 11 controller for 4 S30 or 2 4000 drives £850 + VAT Newton Labs S100 controller for 4 S30 or 2 4000 £625 + VAT Controller for TRS80, PET, APPLE, price to be announced.
NEW 2315 12 sector disk packs £40 + VAT
NEW 5440 any sector packs £48 + VAT
ORDER NOW!! These prices may never be repeated. Specialist carriage S30 £15.00 + VAT 4000 £20 + VAT.

DISPLAY ELECTRONICS

Dept. P.C.W. 64-66 Melfort Rd., Thornton Heath, Croydon, Surrey. Tel: 01-689 7702 or 01-689 6800

MAIL ORDER INFORMATION

Unless otherwise stated all prices inclusive of V.A.T. Cash with order. Minimum order value £2.00. Prices and Postage quoted for UK only. Where post and packing not indicated please add 60p per order. Bona Fida account orders minimum £10.00. Export and trade enquiries welcome. Orders despatched same day where possible. Access and Barclaycard Visa welcome.

STEP INTO THE 80's
WITH TOMORROW'S WORLD TECHNOLOGY TODAY
THE TANTEL PRESTEL–VEWDATA ADAPTOR

At last this amazing piece of micro technology is available at a price you can afford. Just connect to the aerial socket of any colour or black and white domestic TV receiver and to your Post Office installed jack socket and you are into the exciting world of **PRESTEL**. Via simple push button use you are able to view a staggering 170,000 pages of up to the minute information on many services and utilities, order goods from companies, even play games!! All this and more without ever leaving your armchair!

ONLY £170
+ £1.75 carr. + VAT
SEND £197.51

RCA FULLY CASED ASCII CODED KEYBOARDS



IDEAL – TANGERINE, OHIO ETC,

Straight from the U.S.A. made by the world famous R.C.A. Co., the VP600 Series of cased freestanding keyboards meet all requirements of the most exacting user, right down to the price! Utilising the latest in switch technology. Guaranteed in excess of 5 million operations. The keyboard has a host of other features including full **ASCII** 128 character set, user definable keys, upper/lower case, rollover protection, single 5V rail, keyboard impervious to liquids and dust, TTL or CMOS outputs, even an on-board tone generator for keypress feedback, and a 1 year full R.C.A. backed guarantee.

VP601 7 bit fully coded output with delayed strobe, etc. **£43.95**
VP611 Same as VP601 with numeric pad. **£54.95**
VP606 Serial, RS232, 20MA and TTL output, with 6 selectable Baud Rates. **£60.95**
VP616 Same as VP606, with numeric pad, **£72.50**
Plug and cable for VP601, VP611 **£2.25**
Plug for VP606, VP616 **£2.10**
Post, Packing and Insurance. **£1.95**
ORDER NOW OR SEND FOR DETAILS.

5v D.C. POWER SUPPLIES

Following the recent "SELL OUT" demand for our 5v 3 amp P.S.U. we have managed to secure a large quantity of ex-computer systems P.S.U.'s with the following spec.; 240 or 110v A.C. input. Outputs of 5v @ 3-4 amps, 7.2v @ 3 amps and 6.5v @ 1 amp. The 5v and 7.2v outputs are fully regulated and adjustable with variable current limiting on the 5v supply. Unit is self contained on a P.C.B. measuring only 12" x 5" x 3". The 7.2v output is ideal for feeding "on board" regulators or a further 3 amp LM323K regulator to give an effective 5v @ 7 amp supply.
Supplied complete with circuit at only **£10.95 + £1.75pp.**
Believed working but untested, unguaranteed.

MAPLIN for ATARI

AUTHORISED DEALER

ATARI

The World-beating ATARI PERSONAL COMPUTERS



Atari 400 Console

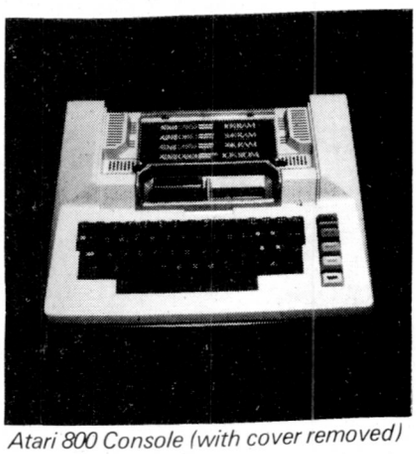

Atari 800 Console (with cover removed)

3 consoles available

Atari 400 with 16K RAM (AF36P) £345

Atari 400 with 32K RAM (AF37S) £395

Atari 800 with 16K RAM (AF02C) £645
(expandable to 48K)

All consoles when connected to a standard UK colour (or black and white) TV set can generate the most amazing graphics you've ever seen.

Look at what you get:

* Background colour, plotting colour, text colour and border colour settable to any one of 16 colours with 8 levels of illuminance!
* Video display has upper and lower case characters with true descenders, double and quad size text and inverse video.
* 57-Key keyboard (touch type on Atari 400) and four function keys.
* Full screen editing and four-way cursor control.
* 29 keystroke graphics and plottable points up to 320 x 192 (160 x 96 only with 8K RAM).
* 40 character by 24 line display.
* Extended graphics control and high speed action using a DMA chip with its own character set.
* Player missile graphics.
* Four programmable sound generators can be played individually or together and each has 1785 possible sounds playable at any one of eight volume settings, for game sounds or music.
* Full software control of pitch, timbre and duration of notes in 4-octave range.
* Four joystick or paddle ports, sounds output to TV.
* BASIC cartridge and 10K ROM operating system and full documentation.

MORE HARDWARE

Atari 410 Cassette Recorder (AF28F)	£50
Atari 810 Disk Drive (AF06G)	£345
Atari 822 40-column Thermal Printer (AF04E)	£265
Atari 850 Interface (AF29G)	£135
Joystick Controllers (AC37S)	£13.95
Paddle Controllers (AC29G)	£13.95
16K RAM Memory Module (AF08J)	£65

MUCH MORE FOR ATARI COMING SOON

SOFTWARE

SEND S.A.E. NOW FOR OUR LEAFLET (XH52G)

SPECIAL PACKAGE OFFER

Disk-based system for £725 with Le Stick
The Atari 400 Console
Special 32K RAM Module
Atari 810 Disk Drive
Disk Operating System
Documentation
Interconnecting Leads
Everything in "Look at what you get" list.

Can any other computer on the market offer all this at anything like this price?

***STOP PRESS* ROAD SHOWS**

Friday 25th September
Newcastle Centre Hotel

Saturday 26th September
Grosvenor Centre Hotel, Edinburgh

Sunday 27th September
Portland Hotel, Manchester

Monday 28th September
Birmingham Centre Hotel

Tuesday 29th September
Hotel Nelson, Norwich

For further details phone 0702 554155

LE STICK

For Atari Computer or Video Game
Replaces standard joystick, but much easier to use. Internal motion detectors sense hand movements. Large pushbutton on top of Stick. Squeeze Stick to freeze motion. A MUST for SPACE INVADERS, STAR RAIDERS & ASTEROIDS.
ONLY **£24.95** (AC45Y)

VERSAWRITER

12½ x 8in. drawing board. Drawing on board is reproduced on TV via Atari with 32K RAM and Disk Drive. Closed areas may be filled in with one of 3 colours. Text may be added in any one of 4 fonts. Paint brush mode: select size of brush and paint away. Air brush mode: shade in your drawing – colour and density is up to you. Plus many more features. S.a.e. for price and further details.

DEALER ENQUIRIES WELCOME

MAPLIN

Maplin Electronic Supplies Ltd
P.O. Box 3, Rayleigh, Essex.
Tel: Southend (0702) 552911/554155

Note: Order codes shown in brackets.
Prices firm until 14th November, 1981 and include VAT and Postage and Packing.
(Errors excluded).

Demonstrations at our shops NOW
See Atari at 284 London Road, Westcliff-on-Sea, Essex.
Tel: (0702) 554000 and at
159-161 King St., Hammersmith W6.
Tel: 01-748 0926

EXPLORER 85 For Maximum flexibility

A thoroughly versatile S100 based computer
Start the system for as little as * £85

17K system from £327 29K system from £410

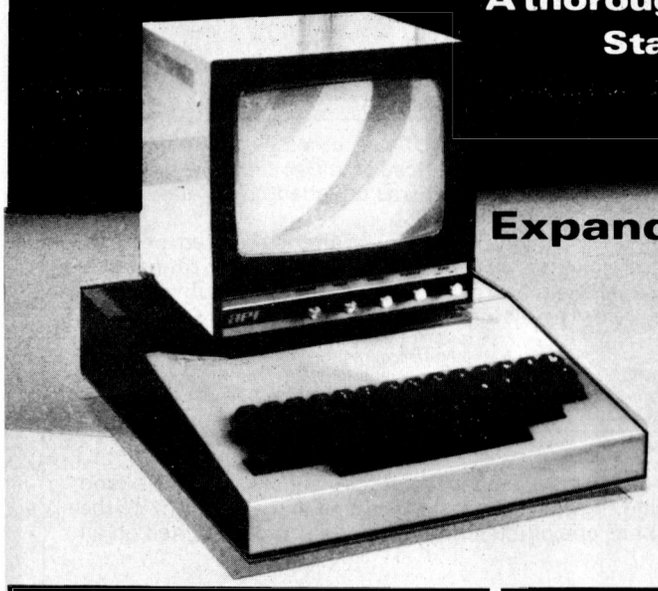

Expand to the full 64K disk system

- C.P.U. 8085A– 3.5 mhz S100 slots expandible to 6
- Languages 8K Resident ROM Microsoft basic
- Running on CP/M 2.2 M basic FORTRAN COBOL
- Memory. 17K RAM expandible to 64K
- 2K monitor
- Stand alone full alphanumeric Keyboard. 64/32 characters 16 lines
- 80/25 lines, VDU available
- Full cursor control
- COMPLETE BUSINESS SOFTWARE AVAILABLE

Disks

8" Control Data Corporation Professional Drives



- LSI controller
- Single density 400K
- Double density 800K
- Access time 25 ns

£350

Controller I/O 5100 card

- Up to 4 drives
- 1771 ALSI floppy disk controller
- On board data separation.IBM compatible
- 2716 PROM socket
- On board I/O Baud rate
- Two serial I/O ports **£170**
- Generates to 9600 Baud

- Disk drive cabinet P.S.U. £79
- Cable set £19
- Coming shortly. Hard disks.

Monitors

NEW 12" Green screen monitor

£150



- 10" Black & white monitor.
- Ideal for Apple. Nascom. UK 101 and more **£79.95**
- 10 MHZ band width
- Metal cabinet 9" x 9" x 9.5"

- Trade enquiries welcome.

Printers



- **Oki Microline £299**
- Serial Interface £75 extra

- **Centronics** 737-2 **£399**
  737-4 **£429**

- Other models available

ELF 11

A great beginner's computer for as little as £49.95

Ideal for controller systems
Extra low power RCA Cosmac 1102

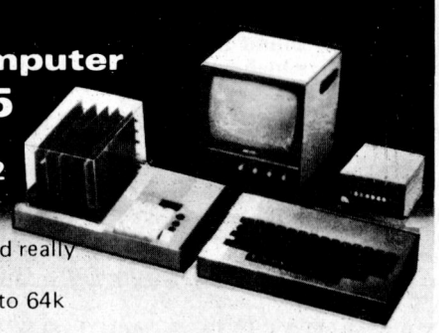

- For engineer and industry
- Learn to programme in machine code and really understand computer systems
- Expand it to meet your requirement up to 64k RAM working in basic level 111
- Starters pack - Elf 11 and RF modulator and T. Pitmans short course for **£56.70**
- Expansion Kits. Full Range available. Hardware. Firmware
- Software. Manuals. Send S.A.E. for literature

Expansion Cards

SJ64K S100 Dynamic Ram Card
16K from £149 48K from £239
32K from £194 64K from £284

S100 SS16K Board
Add memory beyond the 64K limit
Expand to a multi terminal system
Bank selectable **£149**

NEW Electric Mouth Cards
S100
Elf 11 from **£99**
TRS 80
Apple

FDC Controller Card **£170**

SEND SAE FOR COMPREHENSIVE BROCHURE

NEWTRONICS

255 ARCHWAY ROAD,
LONDON, N.6 TEL: 01-348 3325

Please add VAT to all prices. P&P extra. Please make cheques and postal orders payable to NEWTRONICS or phone your order quoting BARCLAYCARD, ACCESS number.

We are open for demonstrations and Sales. Monday-Saturday 9.30 a.m.-6.30 p.m. Near Highgate Underground on main A1 into London.

CASTLE ELECTRONICS
MICRO COMPUTER CENTRE
Telephone Hastings (0424) 437875

COMMODORE VIC



£189.95 incl. VAT

Commodore International Ltd. (AMEX-CBU) has officially introduced the world's first full-featured colour computer priced at under £200.

The new VIC 20, which retails at £189.95 was unveiled on January 8th at the Consumer Electronics Show in Las Vegas.

The new computer puts Commodore squarely in the low priced personal computer market with a fully expandable microcomputer which connects to any television set and rivals the features of existing microcomputers selling at four or five times the price. The features speak for themselves:

- colour
- sound
- programmable function keys
- 5K memory expandable to 32K
- standard PETBASIC
- full-size typewriter keyboard
- graphics character set
- plug-in programme/memory cartridges
- low-priced peripherals
- joystick/paddles/lightpen
- self-teaching materials

Acorn Atom



£138.00 incl. VAT

The ATOM is a British-designed personal computer—simple to operate, and in kit form, simple to build. It has all the features found in machines twice the price or more, and yet it has one outstanding advantage. It is designed on an expandable basis.

8k Rom + 2k Ram—kit ...	138.00
8k Rom + 2k assembled ...	172.50
12k Rom + 12k Ram—kit ...	195.50
12k Rom + 12k Ram—assembled	230.00

4K Floating Point ROM (inc. in 12K version)	23.00
Colour Encoder	21.85
Mains Power Supply (1.3A)	9.20

TANGERINE microtan 65



£79.35 incl. VAT

Microtan 65 is the most advanced, most powerful, most expandable microcomputer available —it also happens to be the most cost effective.

Microtan 65 kit	79.35
Microtan 65 built	90.85
Tanex Min. Config. kit ...	49.45
Tanex Fully Expanded kit	103.15
Tanex Min. Config. built	60.95
Tanex Fully Expanded built	114.65
20 Way Keypad	11.50
Full ASCII Keyboard (less Case)	69.95
Mini-Motherboard (M/Tan and Tanex)	11.50

MPS1 5v Power Supply ...	26.45
± 12v Power Supply Kit (for use with RS232 on TANEX)	9.20
Mini-Rack (with PSU) ...	56.35
XBUG ROM with manual	19.95
10K Basic in EPROM ...	56.35
Microtan 65 Manual ...	5.00
Tanex manual	5.00
Serial I/O kit	17.25
Microtan/TV Cable (kit) ...	1.75

Lower Case Kit...	10.90
Graphics Kit	7.50
MPS2 Power Supply ...	72.50
6522 VIA	9.20
System Rack	56.35
System Motherboard (inc. 4 connectors)	44.85
ASCII Keyboard (incl. Case)	92.95

Tantel Prestel adapter ... 199.00

COMMODORE PET

Everything has been said about PET—Britain's number one selling microcomputer. A full range of accessories and software (both games and business), is held in stock

£550 incl. VAT



4016 PET 16K RAM ...	550.00
4032 PET 32K RAM ...	599.00
PET C2N Cassette Deck ...	63.25
4022 Tractor Feed printer: Full PET Graphics	454.25

apple



£759 incl. VAT

The Apple II+ is more powerful than its predecessors with built-in sound and high resolution graphics, which make it ideal for scientific and games applications.

APPLE II Plus 48K RAM Fitted (Video out ONLY) ...	759.00
Apple Disk Drive with Controller	368.00
Apple Disk Drive WITHOUT Controller	291.00

nascom



Nascom 1 kit—NAS-SYS1—without 3881 PIO	143.75
Nascom 1 built—NAS-SYS1—without 3881 PIO	161.00
Nascom 2 kit—NAS-SYS1—NO USER MEMORY ...	258.75
16K RAM "B" Expansion Memory Kit	161.00

Nascom 3A PSU (+12V@1A, +5V@3A, -5V@0.5A and -12V@1A)	37.40
Nascom IMP Printer ...	373.75
78 Way Veroboard 5" ...	3.20
78 way Veroboard 15" ...	9.50
Buffer Board (Nascom 1)	37.50
ZEAP Assembler (4 x 2708)	57.50

NAS-DIS Disassembler (3 x 2708) ...	43.20
NAS-DEBUG Uses NAS-DIS (1 x 2708)	17.25
NAS-PEN Text Editor (2 x 2708) ...	34.50
NAS-SYS 3 Monitor ROM...	46.00
NAS-GRA Graphics ROM (Nascom 2)	17.25

*** ALL PRICES INCLUDE VAT**
*** DELIVERY: POSTAGE/PACKING WILL BE NOTIFIED**
*** BARCLAYCARD AND ACCESS ORDERS TAKEN BY PHONE**

CASTLE ELECTRONICS 7 CASTLE ST., HASTINGS, E.SUSSEX
Telephone Hastings (0424) 437875

Shop hours 09.00 to 1730 Mondays to Saturdays

SALES - LEASE

and other services

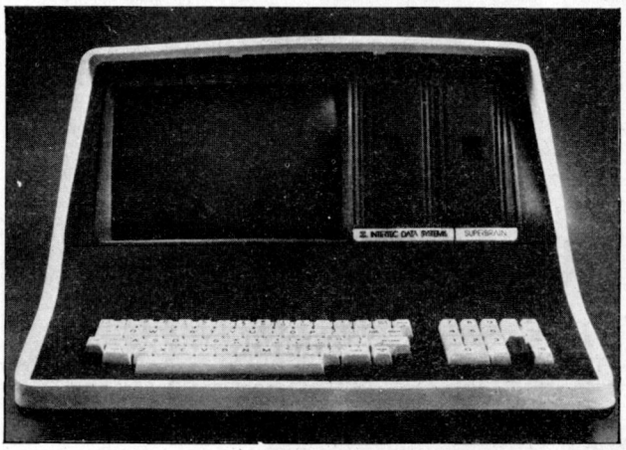

SUPERBRAIN

64K

APPLE CPM Z80

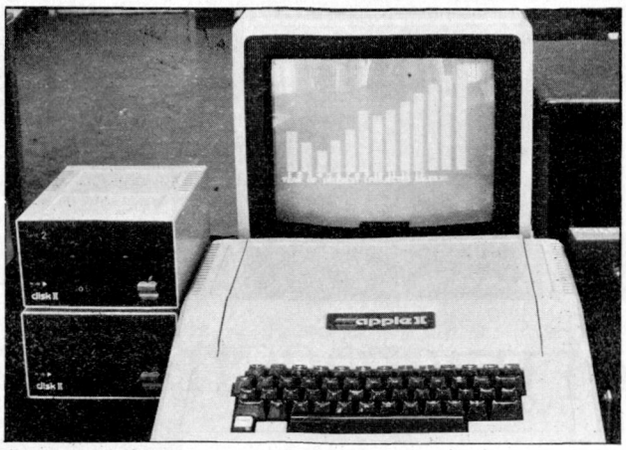

SUPERBRAIN 64K

SUPERBRAIN STANDARD MODEL
(350KB DOUBLE DENSITY DISK DRIVE)
SUPERBRAIN QUAD MODEL
(700KB QUAD DENSITY DISK DRIVE)
SUPERBRAIN + PRINTER
(BUSINESS SYSTEM CONFIGURATION)
SUPERBRAIN + PRINTER
+'WORD STAR' SOFTWARE PACKAGE
(COMPLETE WORD PROCESSING SYSTEM

ALL CPM SOFTWARE P.O.A.

PASCAL	WORDSTAR	INCOMPLETE RECORDS
FORTRAN	MAGIC WAND	INTEGR. ACCOUNTS
CIS-COBOL	SPELLBINDER	SALES LEDGER
COBOL 80	MAILMERGE	PURCHASE LEDGER
FORTRAN 80	DATASTAR	NOMINAL LEDGER
MBASIC	SUPERSORT 1	INVOICING
CBASIC	IBM 3780 EMU	PAYROLL
APL	STATIONERIES	STOCK CONTROL
MPM		DBMS
PLI		

EPSON

Unbelievable quality from the world's largest print head manufacturer.



Qume



MX 80T
MX80/FT
MX100

£	HARDWARE
550	APPLE 16K VIDEO OUTPUT ONLY
260	DISC DRIVE WITHOUT CONTROLLER
320	DISC DRIVE WITH CONTROLLER
25	16K ADD ON
	CARDS & ACCESSORIES
	ALF MUSIC SYNTHESISER CARD
	TIMING MODE INPUT BOARD
	ALF MUSIC ALBUM 1
	ALF MUSIC ALBUM 2
	ALF MUSIC ALBUM 0 (CHRISTMAS)
	ANALOG OUTPUT BOARD 4 CHANNEL
	ANALOG OUTPUT BOARD 8 CHANNEL
	A1-02 DATA ACQUISITION CARD
	DIGITAL INTERFACE
	PROTOTYPE/HOBBY CARD
	PARALLEL PRINTER INTERFACE CARD
115	COMMUNICATIONS CARD
100	HIGH SPEED SERIAL INTERFACE CARD
260	PASCAL LANGUAGE SYSTEM
	CENTRONICS CARD
	APPLESOFT FIRMWARE CARD
90	INTEGER CARD
98	EUROCOLOUR CARD
	SPEECH LAB
	PROGRAMMERS AID 1
	AUTO START ROM PACK
370	GRAPHICS TABLET
	CONTROLLER CARD
	APPLETEL SYSTEM
100	80-COL DISPLAY CARD FOR BASICS
10	DISC TO CONVERT DV80 TO PASCAL
	APPLE JUICE
5	APPLE BLACK & WHITE MODULATOR
	HEURISTICS CONTROLLER 70
145	HEURISTICS SPEECHLINK 2000
120	IEEE INTERFACE
	CLOCK/CALENDER CARD
	SUPERTALKER
110	ROM-PLUS BOARD
	ROMWRITER
	COPYPLUS ROM
	MUSIC SYSTEM COMPLETE
	PRINTERS
325	SILENTYPE 80-COL GRAPHICS PRINTER
	10 ROLLS THERMAL PAPER FOR A2M0034
	DUSCT COVER FOR SILENTYPE PRINTER
380	CENTRONICS 737 PRINTER
	C/W ADAPTOR
20	11x9.5" PAPER FOR CENT. 737
	12 ZIPPACK RIBBONS FOR CENT.737
	DUST COVER FOR CENT.737 PRINTER
	TEXAS OMNI 810 PRINTER
	T1810 PAPER 11x14.5" (2000)
	T1810 PAPER 11x15.5/16" (2000)
	TEXAS 810 RIBBON
	FULL UK ASCII
	DUST COVER FOR T1810 PRINTER
	PAPER TIGER PRINTER WITH GRAPHICS
	SERIAL CABLE FOR TIGER PRINTER
	GRAPHICS SOFTWARE FOR TIGER/G
	2000 SHEETS 11x9.5 PAPER 1 PART
	RE-INKING RIBBON & ROLLER SET

* All prices ex. VAT
* On site maintenance. Low Cost!!
* On site customer training

£	SOFTWARE
	APPLE DESK TOP PLAN
	CCA DATA MANAGEMENT SYSTEM
	CONTRIBUTED SOFTWARE VOLS 3-5
	CONTRIBUTED SOFTWARE VOLS 1-2
	MICROCHESS 2.0 CHESS DISK
	DISC UTILITY PACK
	APPLE BUSINESS CONTROLLER PROGRAM
	APPLE POST PROGRAM
	APPLE BOWLING DISKETTE
	3.3 DISK OPERATING SYSTEM
	APPLE CASHIER PROGRAM
	APPLE WORD PROCESSING PROGRAM
	STELLAR INVADER
	APPLE FORTRAN PACKAGE
35	APPLE PLOT
	APPLE ADVENTURE
	MICROCHESS 2.0 CHESS CASSETTE
	CHECKER KING DISKETTE
	GAMMON GAMBLER
	BRIDGE PARTNER
80	VISICALC DISK & BOOK COMPLETE
	MILLIKEN MATHS PACKAGE
	ESTATE AGENTS (RES. PROPERTIES)
	MICROBASE MAILING LIST
	MICROCHASE STOCK CONTROL
	DOCUMENTATION
	APPLE II REFERENCE MANUAL
	6502 HARDWARE MANUAL
	6502 SOFTWARE MANUAL
	APPLE II BASIC PROGRAM MANUAL
	APPLESOFT II REFERENCE MANUAL
	DOS 3.2 MANUAL
	APPLE II BASIC TUTORIAL MANUAL
	AUTOSTART ROM MANUAL
	GENERAL ACCESSORIES
20	(10) BLANK APPLE DISKETTES
	VINYL CARRYING CASE
	MINT DISC LABRARY BOX
	DUST COVER FOR APPLE II
	DUST COVER FOR APPLE DISK DRIVE
	APPLE DESK TWO TIER
	PRINTER TABLE FOR APPLE
	PRINTER DESK ECONOMY RANGE
	TWO TIER DESK ECONOMY RANGE
	SINGLE TIER APPLE DESK
	ADD ON PRINTER STAND FOR APPS
	MONITOR SHELF FOR APP5
	FREESTANDING MONITOR SHELF
	DATA DESK TWO TIER WORKSTATION
	DISCOFLEX FILING CASE-MINI
	VIDEO MONITORS
	9" HIGH RESOLUTION B/W MONITOR
	9" BLACK & WHITE VIDEO MONITOR
155	12" BLACK & WHITE VIDEO MONITOR
	CABLE FOR VIDEO MONITOR
150	12" VIDEO MONITOR GREEN DISPLAY
	MONITOR CABLE FOR VM12G
120	VERSA WRITER
175	Z80 SOFTCARD
	TABS ACCOUNTS

MICROCOMPUTER HIRE SERVICE

Superbrain with application packages
Apple System
PET Tandy Sorcerer Horizon Printers

A TRIAL PERIOD FOR YOUR COMPUTERISATION.

—Promglow Ltd, 3 Westholm, London NW11. 01-458 5845

—Microcomputer Spacedrome, 12 Dene Road, New Southgate. Tel 01-368 9002.

Now we never say no

Icarus can now offer a complete range of microcomputers from 320K-60M



COMMANDER COMPUTERS
IEEE Communications Port with 4 RS-232 serial ports and 4 8-bit parallel ports. Full graphics standard. Three models – the fully self-contained 964 with integral 9″ video display, the F64 with 2 8″ disk drives and the M64 with one 5″ disk drive.

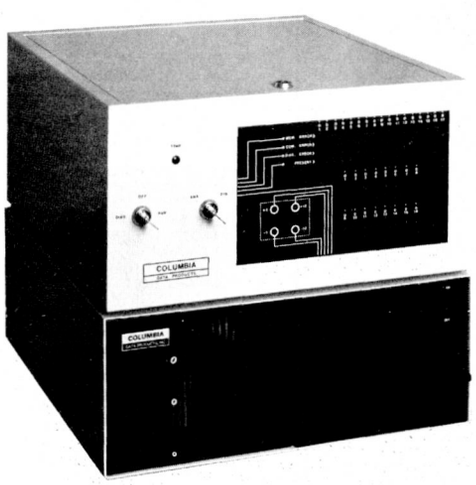



MULTI-USER MULTI-PROCESSOR SYSTEMS
Designed to give unparalleled performance for one to 16 users. Each terminal has a dedicated processor with its own RAM.

SINGLE AND MULTI-USER UPGRADEABLE/ EXPANDABLE SYSTEMS
Offering the disk storage capacity that's exactly right for you. Single user machines to take 5¼″ or 8″ floppy disks giving 320K–2.4M capacity and multi-user machines with up to 60M on hard disk.

A comprehensive new range of microcomputers so versatile that a system may be compiled for each and every micro-based application – that's the exciting news from Icarus. Columbia Data Systems of the USA has appointed Icarus to handle its full range of CP/M and MP/M single and multi-terminal products with hard and floppy disk storage capacities. Which means that whenever you need a microcomputer, for whatever purpose, Icarus will never have to say no.

For full details of the complete Columbia range, or if you would like to become a dealer yourself, contact

ICARUS
Computer Systems Ltd.

Icarus Computer Systems Ltd. Deane House 27 Greenwood Place London NW5 1NN Tel: 01-485 5574 Telex: 264209

PCW 180

WATFORD ELECTRONICS

33/35, CARDIFF ROAD, WATFORD, HERTS, ENGLAND
Tel Watford (0923) 40588. Telex: 8956095

ALL DEVICES BRAND NEW FULL SPEC. AND FULLY GUARANTEED ORDERS DESPATCHED BY RETURN OF POST. TERMS OF BUSINESS CASH/CHEQUE/P.O.s OR BANKERS DRAFT WITH ORDER. GOVERNMENT AND EDUCATIONAL INSTITUTIONS OFFICIAL ORDERS ACCEPTED (TELEPHONE ORDERS BY ACCESS NOW ACCEPTED Minimum £10.00 please) TRADE AND EXPORT INQUIRY WELCOME. P&P ADD 50p TO ALL ORDERS UNDER £10.00 NETT

VAT Export orders on V.A.T. Applicable to UK Customers only. Unless stated otherwise all prices are exclusive of VAT. Please add 15% to the total cost incl. p&p.

We stock many more items. It pays to visit us. We are behind Watford Football ground Nearest Underground/Br Rail Station Watford High St. Open Monday to Saturday 9am. – 6pm. Ample Free Car Parking space available.

COMPUTER ICs:	
1702	325
1802	720
2101-2	250
2112-2	250
2114-450n	99
2114L-300n	110
2114L-200n	130
2532-450n	725
2708	225
2716-5V	250
2732-450n	725
4027	240
4116-3	89
4118-250n	530
4315CMOS	995
4334-3	325
4864-3	£12
6116	£11
6502CPU	495
6503	850
6505	795
6520PIA	325
6522VIA	495
6530RRIOT	1350
6532RIOT	795
6545CRTC	1450
6551ACIA	785
6592PC	£26
6800	375
6802	550
6803	1350
6808	520
6809	£13
6810	175
6821	175
6840	470
6843	1459
6845	£12
6847	795
6850	175
6852	225
8080A	450
8085A	550
81LS95	115
81LS96	115
81LS97	115
8212	210
8214	425
8216	200
8251	400
8253	799
8255	399
8257	800
8T26A	90
8T28A	90
8T31A	350
8T95N	160
8T97N	90
AY-3-1015	395
AY-5-1013	350
AY-5-2376	700
MC1488	62
MC1489	62
MC14411	695
MC14412	800
RO-3-2513U	600
RO-3-2513L	850
SFF96364E	950
IM6402	420
SFC71301	820
TMS2716-3V	875
TMS4027	240
TMS6011	365
TMS9900J	£36
TMS9980A	£20
Z80CPU2.5M	390
Z80ACPU4M	550
Z80PIO	400
Z80A PIO	440
Z80CTC	400
Z80A CTC	440
Z80SIO-1	£15
Z80A SIO	£23
Z80DART	726
Z80A DART	775
ZN423	195
ZN426	325
ZN427	625
ZN428	478
ZN429	210
ZN1034	200
ZN1040	685

TTL 74 TEXAS	
7400	11p
7401	11
7402	11
7403	14
7404	14
7405	18
7406	28
7407	28
7408	16
7409	16
7410	14
7411	20
7412	20
7413	24
7414	32
7416	25
7417	25
7420	16
7421	20
7422	20
7425	28
7426	30
7427	27
7428	28
7430	16
7432	26
7433	27
7437	27
7438	27
7440	17
7441	68
7442	38
7443	90
7444	90
7445	65
7446	55
7447	50
7448	50
7472	30
7473	30
7474	25
7475	40
7476	30
7480	48
7481	120
7484	80
7485	95
7486	26
7489	205
7490	28
7492	30
7493	30
74100	85
74110	40
74111	55
74112	170
74116	88
74118	80
74119	90
74120	75
74121	30
74122	45
74123	50
74125	42
74126	40
74132	48
74136	35
74143	250
74144	250
74145	70
74147	99
74148	75
74150	80
74151	45
74153	45
74154	75
74155	75
74156	75
74157	45
74159	99
74160	60
74161	60
74162	62
74163	64
74164	64
74165	62
74166	65
74167	185
74170	168
74172	290
74173	65
74174	72
74175	72
74176	55
74177	75
74178	95
74179	68
74180	65
74181	140
74182	75
74184	99
74185	99
74188	290
74190	70
74191	70
74192	70
74193	65
74194	75
74195	65
74196	65
74197	65
74198	99
74199	99
74221	80
74246	150
74247	150
74248	150
74249	150
74251	80
74265	65
74273	195
74278	160
74279	90
74283	90
74284	199
74285	199
74290	105
74293	125
74297	236
74298	100
74365	55
74366	55
74367	55
74368	55
74390	99
74393	99
74490	120

74LS TEXAS	
74LS00	12
LS01	13
LS02	14
LS03	14
LS04	15
LS05	15
LS06	15
LS08	15
LS09	15
LS10	15
LS11	15
LS12	15
LS13	30
LS14	48
LS15	15
LS20	15
LS21	15
LS22	15
LS26	18
LS27	15
LS28	20
LS30	18
LS32	15
LS33	16
LS37	16
LS38	16
LS40	16
LS42	35
LS47	40
LS48	80
LS49	60
LS51	15
LS54	15
LS55	30
LS63	150
LS73	25
LS74	25
LS75	28
LS76	20
LS78	24
LS83	50
LS85	70
LS86	38
LS90	35
LS91	80
LS92	36
LS93	36
LS95	45
LS96	120
LS107	43
LS109	30
LS112	30
LS113	40
LS114	35
LS122	44
LS123	55
LS124	105
LS125	30
LS126	30
LS132	45
LS133	35
LS136	28
LS138	35
LS139	38
LS145	75
LS147	199
LS148	99
LS151	39
LS153	39
LS155	39
LS156	39
LS157	35
LS158	36
LS160	41
LS161	41
LS162	41
LS163	41
LS164	48
LS165	145
LS166	85
LS170	110
LS173	72
LS174	72
LS175	58
LS181	130
LS183	275
LS190	58
LS191	58
LS192	58
LS193	65
LS194	40
LS195	40
LS196	58
LS197	85
LS200	345
LS202	345
LS221	120
LS240	165
LS241	96
LS242	85
LS243	85
LS244	80
LS245	118
LS247	40
LS248	65
LS249	68
LS251	40
LS253	40
LS257	48
LS258	40
LS259	85
LS261	195
LS266	25
LS273	90
LS275	290
LS279	88
LS280	250
LS283	45
LS290	57
LS293	46
LS295	215
LS298	130
LS299	420
LS300	175
LS302	175
LS320	270
LS323	270
LS324	320
LS325	330
LS326	315
LS373	75
LS374	48
LS375	90
LS377	69
LS378	69
LS379	250
LS384	250
LS385	378
LS386	28
LS390	62
LS393	60
LS395	199
LS396	190
LS398	275
LS399	220
LS445	140
LS447	195
LS471	620
LS490	245
LS541	135
LS571	620
LS640	225
LS641	225
LS645	210
LS668	175
LS669	150
LS670	175
LS673	550
LS674	750

74L	
74L00	68
74L30	50
74L47	380
74L75	145
74L85	349
74L121	165
74L123	325

74S series	
74S00	60
74S04	73
74S132	138
74S138	240
74S158	240
74S188	210
74S189	158
74S194	380
74S195	795
74S201	
74S241	540
74S262	850
74S287	325
74S288	210
74S470	325
74S472	1150
74S475	825
74S571	620

75 series	
75108	350
75150	140
75154	150
75450	95
75451	70
74454	225
75491	89
75492	95

CRYSTALS	
100KHz	290
200KHz	370
455KHz	370
1.0MHz	295
1.008MHz	290
1.28MHz	392
1.6MHz	323
1.8MHz	323
1.8432MHz	240
2.0MHz	240
2.4576MHz	300
3.2768MHz	240
3.57954M	150
3.6864M	300
4.0MHz	240
4.032MHz	290
4.19430M	270
4.433619M	120
5.0MHz	240
5.185MHz	300
5.24288M	390
6.0MHz	240
6.144MHz	240
6.5536MHz	290
7.0MHz	290
7.168MHz	290
7.680MHz	300
8.0MHz	240
8.08333M	362
8.867237M	240
9.375MHz	323
10.0MHz	240
10.7MHz	270
12.0MHz	290
14.31818M	320
16.0MHz	275
18.0MHz	290
18.432M	240
19.968MHz	300
20.0MHz	323
26.0MHz	383
26.69MHz	290
27.145MHz	240
27.648MHz	323
38.6667M	290
48.0MHz	270
100.0MHz	323
116.0MHz	300

DIL SOCKETS

(Texas)	Low Prof.	Wire Wrap
8 pin	8p	25p
14 pin	10p	35p
16 pin	10p	42p
18 pin	16p	52p
20 pin	22p	60p
22 pin	25p	70p
24 pin	25p	70p
28 pin	28p	80p
36 pin	-	105p
40 pin	30p	99p

DIL PLUGS (Headers)
14 pin 44p, 24 pin 88p
16 pin 49p, 40 pin 255p

'D' CONNECTORS

(Cannon Type)	Plugs	Sockets	Plastic Covers
9 way	95p	125p	145p
15 way	135p	198p	170p
25 way	198p	284p	195p
37 way	290p	398p	210p

AMPHENOL PLUGS
IEEE 575p Centronics 675p

DIL Switches (SPST)
4 way 70p
6 way 85p
8 way 90p
10 way 145p
(SPDT)
4 way 190p

EDGE CONNECTORS

.1" .156"

2 x 10 ways		120p
2 x 15 way		135p
2 x 18 way	140p	145p
2 x 22 way	160p	165p
2 x 25 way	180p	185p
2 x 30 way	199p	
2 x 36 way	235p	
2 x 40 way	265p	
2 x 43 way	280p	

JUMPER LEADS
(Ribbon Cable Assemblies)

Single end DIP Jumpers with 24" long Ribbon Cable
14 pin plug 145p 24 pin plug 240p
16 pin plug 165p 40 pin plug 385p

Double end DIP Jumpers

length	14 pin	16 pin	24 pin	40 pin
6"	185p	205p	300p	465p
12"	195p	215p	315p	490p
24"	215p	235p	350p	540p
36"	230p	250p	375p	595p

ZERO FORCE: DIL Sockets
24 way 650p 28 way 820p 40 way 975p

VIC-20

At last it is here, the long-awaited Commodore's VIC20 Microcomputer. Connects directly to any colour (or B&W) TV set. Sound reproduced through TV Speaker (Music, Language and other Sound effects). Has PET type graphics. Standard PET Basic. Full size keyboard. Has 5K Memory expandable to 32K on Board. Attractively Cased.

All this for: Only £165

Cassette Deck including a free 6 programme Cassette £34

WEMON

Watford's Ultimate Monitor IC

A 4K Monitor Chip especially designed to produce the best from your Superboard II, Superboard II Series II, UK101, and Enhanced Superboard. Facilities available are: Full Screen Editing – Home cursor/ screen clear facility – True insert/ delete – Fully programmable cursor control with meaningful sumbols on screen – Single Key Basic – True ASCII Keyboard routine – Auto remote control of tape recorder (requires only a relay) – Open line facility – Named Tape files – Two Key Video Swop (Series II only) – Bell (Series II only) – Cursor Indication of quotes mode – User definable flashing cursor character – User controllable command vectoring for your own machine code routines – Full or partial scroll-up or down (callable by programs) – Au[o list on error – Single command save (automatically returns "List") Centronics compatible printer driver Monitor Functions include: Scrolling list in Data mode - Warm restart vector – Fill memory – Search memory – Two save & three load routines – Floppy disc vector – Break handling routines – Tabular display of memory.
All this for Only: £19.95

ETI/WATFORD'S MICRO EXPANSION SYSTEM

This versatile economical Expansion System as published in ETI Oct 1981 issue provides a cheap but reliable Expansion possibility for most of the popular Microcomputers.

Send SAE for details.

VOLTAGE REGULATORS

1A, TO220 Plastic Case
+5V, +12V, +15V, +18V 50p

1A -5V, -12V, -15V, -18V **55p**
78H05 5A/5V **550p**; 79HG **850p**
78HG **650p**; LM309K **135p**

SEIKOSHA GP80 only £195



(p&p £4)

This unihammer dot matrix printer gives normal and double width characters as well as dot resolution Graphic.
- Printing Speed 30CPS.
- Character Set 5x7 matrix.
- Print Density 12CPL @ 80CPL
- Paper Feed 8" Tractor
- Parallel Interface Standard. Other Interfaces available.

IEEE/488, PET, TANDY, APPLE, RS232

EPSON TX80

SPECIAL OFFER **£235**



A complete 80 Column Dot Matrix Printer available in tractor or friction feed (p&p £5)
Speed: 125cps – Unidirectional Print-PET Compatible Graphics. Various Interfaces available.

VIDEO GENIE

A Complete System. Ideal for Schools, Colleges or as a small business system. 16K Users RAM – 12K Microsoft Basic. in ROM. – 64 x 16 line display – 128 x 48 dot graphics resolution - Software compatible with TRS80 level II – Built in Cassette Recorder – Output and control for second cassette – Full expansion via Expansion box to Disc/Printer. Basic demonstration tape Three manuals. – The computer connects straight to a Domestic TV set or Monitor.

Only **£275** (p&p 4.50)

SOFTY-2

The complete microprocessor development system for the engineers & beginners, now supplied fully built, tested & with encapsulated Power Supply. Enclosed in neat Black ABS Case - Displays memory contents on TV – New powerful instructions – can replace monitor ROM to test & develop programs – Serial/parallel Input/Output routine for interfacing to Computer/Printer – New improved touch Keyboard – Fast cassette interface – On board EPROM (any single rail 5V 24pin chip) programmer – Copies software – Supplied fully tested and guaranteed.

All this for Only £169

ACCESSORIES

• TEX Eprom Eraser	£33
• TEX Eprom Eraser with 30 min. Electronic timer	£45
• Full ASCII Keyboard "756" Micro Case Beige/Brown ABS Attractive, for Superboard, UK101	£39
	£26
• Numeric Keypad	£9
• ASTEC UHF Modulator 8MH2	450p
• ASTEC UHF Modulator 6MH2	280p
• 9" B & W Monitor Cased	£69
• 8½" Fan Fold Paper (500)	595p
• 9½" Fan Fold Paper	595p
• Teleprinter Roll	350p

FERGUSSON COMPUTERS LIMITED

CRA COMPUTER RETAILERS ASSOCIATION

T.M. apple & COMPUTER

SALES AND SERVICE

SALES
* Authorised Apple Dealer
* Full range of equipment
* on demonstration

AFTER SALES
* Full support services
* Installation
* Staff Training
* Consultancy

MAINTENANCE
* Apple Level I Service Centre
* ITT Repair and Maintenance
* On-Site contracts
* Ad-hoc repairs
* Workshop Services
* Collection from Red Star

AGENTS FOR:
HARDWARE
* Qume
* Anadex
* Epson
* NEC

ACCOUNTING
* Systematics
* Vlasak
* Computech
* Tabs

FINANCIAL
* Visicalc
* Micromodeller

. . .and many others

Come and see us for a demonstration or telephone for an appointment

4 PYRFORD ROAD, WEST BYFLEET, SURREY
TELEPHONE (09323) 45330/41810

THE SEED SYSTEM 19

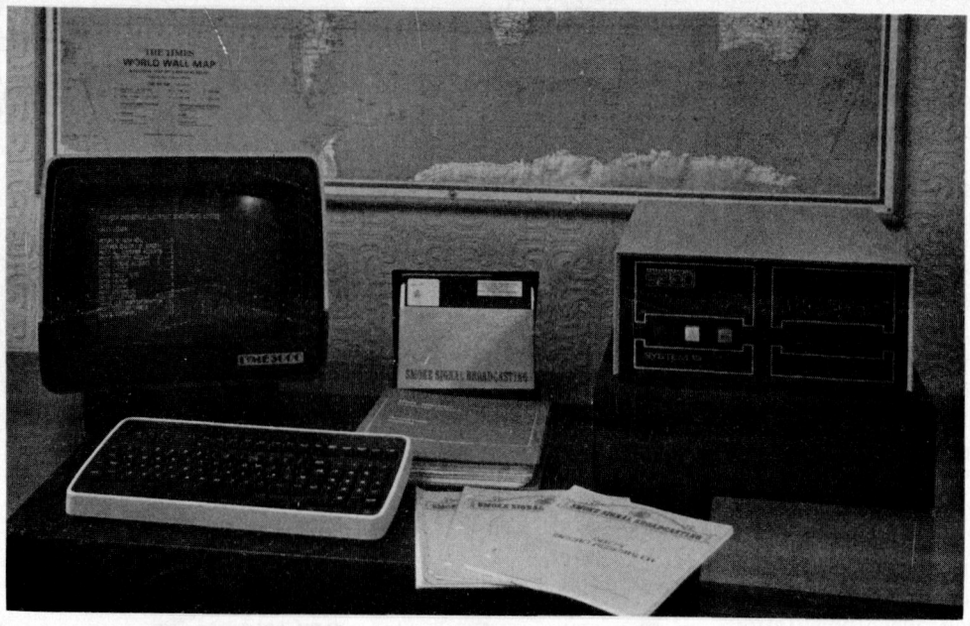

microcomputer products

A 6809 BASED SYSTEM SUPPORTING EITHER MINI-FLOPPY OR FLOPPY DISK MEMORY SYSTEM CHOICE OF TWO POWERFUL DISK OPERATING SYSTEMS

OS-9
TRUE MULTI-TASKING/MULTI USER
FAST BASIC INTERPRETER/COMPILER
PASCAL
EDITOR/ASSEMBLER
STYLOGRAPH WORD PROCESSOR

DOS69
SINGLE USER
BASIC
EDITOR/ASSEMBLER
DOS 68 EQUIVALENT

WIDE RANGE OF TERMINALS PRINTERS AND ANCILLARY EQUIPMENT
NATIONWIDE MAINTENANCE
PERSONEL TRAINING
RAM EXPANDABLE FROM 32K TO 1 MEGABYTE

PRICED FROM £2515

INTERESTED? THEN CALL US FOR YOUR DEMONSTRATION FREE OF OBLIGATION.

seed

STRUMECH

PORTLAND HOUSE, COPPICE SIDE,
BROWNHILLS, WALSALL, W. MIDLANDS.
TEL 054 33 78151 TELEX 335243 SELG

MORE PRICE MAGIC ON MIRACLE MICRO NETWORKS!

When 2-64 micros share up to 72Mb of Corvus hard disc through Constellation host multiplexing, you get a Miracle – no less.

Miracle puts distributed data processing on tap, with each user station enjoying high-speed access and total flexibility. A Miracle can outperform a mini-network and save you money all along the line.

You can expand your network as your needs expand with many kinds of micros: Apple II and III, S100 North Star, Vector Graphic, Cromemco, Superbrain, Research Machines 380Z, TRS-80 I and II, DEC LSI 11 – and more to come.

In addition to his own dedicated computer and associated memory, each Miracle user has access to a central hard disc memory – normally twenty times faster than floppies – without interference from other users. Like computers can communicate with each other in the network and peripherals shared.

Traditional peripherals, such as printers and VDUs, and interactive devices like speech output, voice recognition, colour graphics, light pens and digitisers, can be linked up to give a Miracle system unrivalled configurability.



2-user from £5,709
4-user from £7,625
8-user from £12,707
16-user from £22,026

How a Miracle system works

Each Constellation host multiplexer links 2-8 micros in star configuration to 5Mb, 10Mb or 18Mb of Corvus hard disc drive. Up to 8 host multiplexers can be connected together, allowing up to 64 micros to use four disc drives for a total system capacity of 72 Mb.

Inexpensive back-up for the hard disc system is provided by the unique Corvus Mirror. It interfaces the data signals on the disc with a 100Mb capacity video tape system; and the entire contents of a 10Mb disc can be archived in about 15 minutes.

Applications software

Miracle can make use of a comprehensive range of languages, from BASIC, COBOL and FORTRAN to PASCAL, ALGOL and APL.

PASCAL-written applications software packages include: Accounting Systems, Payroll and Stock Control (fully integrated with order processing/invoice generator); Addressing/Mailing; Database Management; Incomplete Records; Job Costing; Time Records; Graphics; Critical Path Analysis.

Come and see Miracle being put through its paces at our London or Nottingham showrooms. Phone now for an appointment or complete the coupon below.

London 01-236 5682
Nottingham 0602 412777

Keen Computers

Typical five-user Miracle system

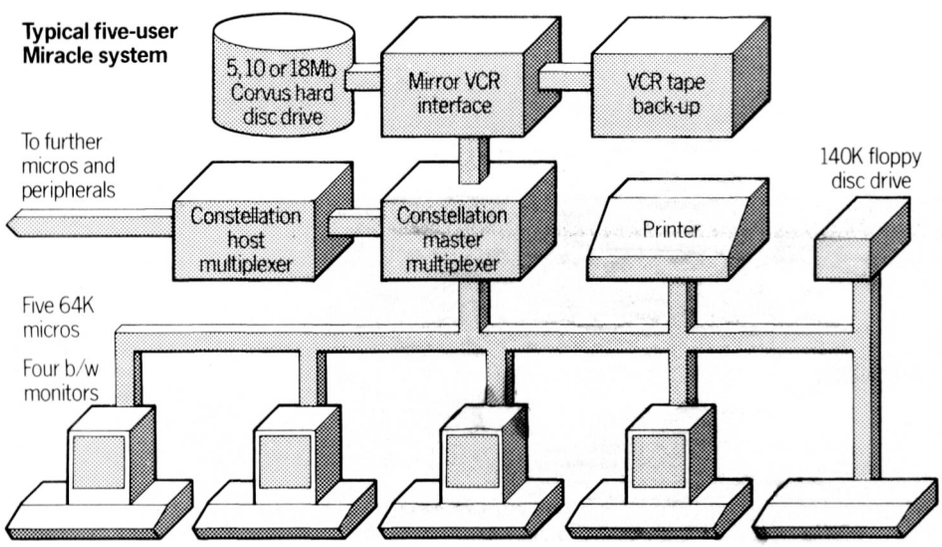

Please send me details of:
Miracle with the following micros

_____

_____

Applications software packages (please state) _____

_____

Name _____

Position _____

Company/Establishment _____

Address _____

_____ Tel _____

Please post to Keen Computers, Marketing Department, 5 Giltspur Street, London EC1A 9DE

ENQUIRIES FROM OEMs DEALERS AND OVERSEAS WELCOME. SPECIAL TERMS ARE AVAILABLE FOR EDUCATIONAL/GOVERNMENT DEPARTMENTS

THE
COMPUTER BOOK SHOP
RUN BY PEOPLE WHO KNOW COMPUTERS

LION MICRO COMPUTERS
NEW
COMPUTER BOOK SHOP

(ALSO STOCKING HI-FI, VIDEO AND C/B BOOKS)

LONDON'S LARGEST SELECTION OF COMPUTER BOOKS

PLUS ALL THE HARD TO GET COMPUTER MAGAZINES

OPEN MONDAY to SATURDAY 9-6 *PLUS*
THURSDAY LATE CLOSING 9-7

GROUND FLOOR
LION HOUSE
227 TOTTENHAM COURT ROAD
LONDON W1
TEL: 01-580 7383

SEND SAE FOR FULL CURRENT LIST – BETTER STILL, CALL IN.

ALL SMALL BUSINESS COMPUTERS HAVE THEIR FAULTS. AT PANASONIC WE AVERAGE ONE A YEAR.

True, most small business computers have the capacity to transform your business overnight.

But how many can you rely on to be working efficiently a year from now?

It's an unpleasant little detail most manufacturers tend to gloss over.

Not Panasonic, however.

Because reliability is the first principle we build into all our computers.

One fault a year per computer is our mean average (including minor faults like a blown fuse).

That's almost unheard of in the computer industry.

Mind you, it does explain why we offer you a year's guarantee instead of the usual three or six months.

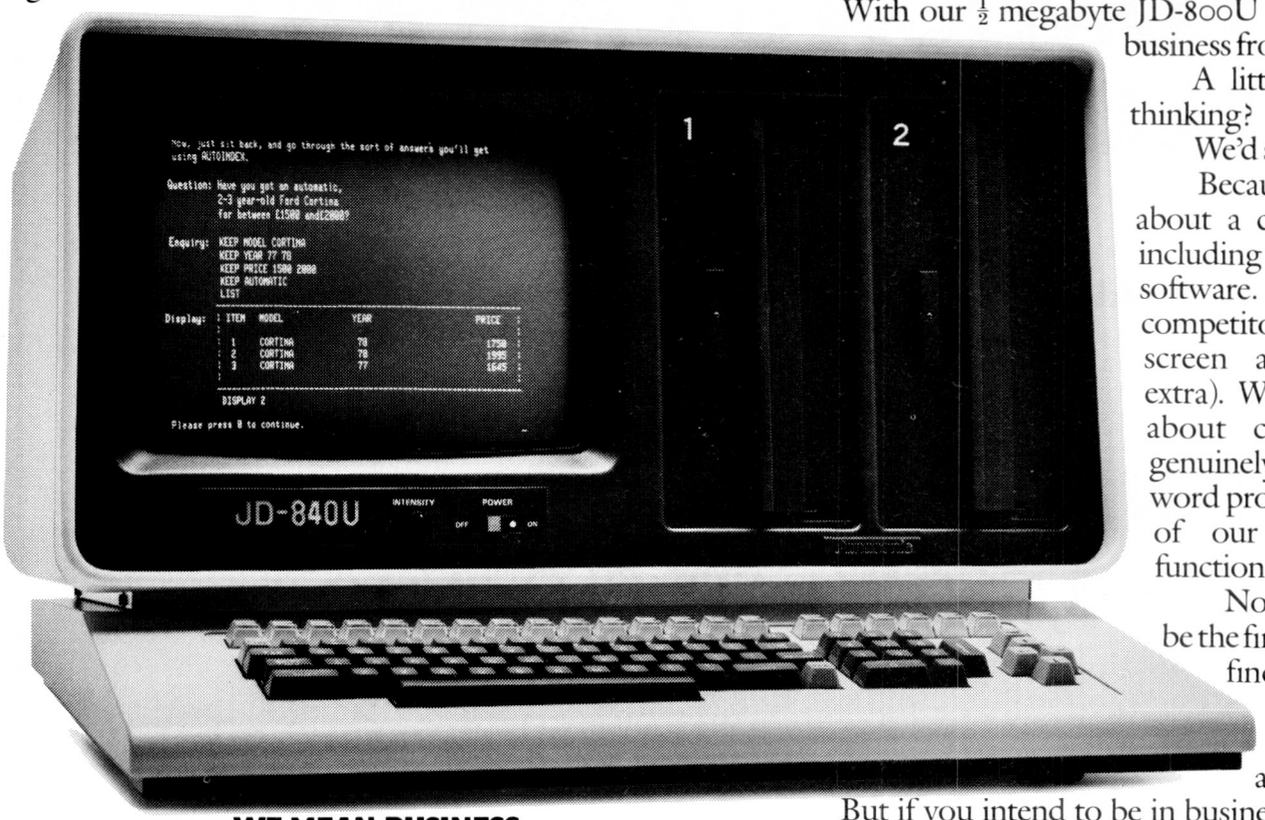

WE MEAN BUSINESS

Another key difference about our computers is that we developed them specifically for business use.

From the outset we designed them to be self-contained desktop units rather than a collection of boxes. Mind you, they're quite prepared to adapt to your particular needs.

Both our current models have three input/output ports for linking up with printers and telephones.

(Essential if you're thinking of running them as intelligent terminals off a mainframe computer).

We also make sure they speak your language.

All our computers are supplied with BASIC, the most common of all microcomputer languages.

Plus a CP/M® operating system giving you access t a wide range of software.

And, to show you we really mean business, all ou computers support Microcobol.

Specifically developed for commercial use, it's ger erally regarded as the most comprehensive softwar available for small business computers.

Finally, we build in all the brainpower you're likel to need.

You've got 64k bytes at your disposal and th capacity to store up to 2 million characters on twi floppy discs.

MORE FOR YOUR MONEY

By now you're probably wondering what it's a going to cost you.

With our ½ megabyte JD-800U you could be i business from about £6,00

A little pricey, you' thinking?

We'd say realistic.

Because we're talkir about a complete set-u including a printer an software. (Some of ou competitors even regard screen as an option extra). We're also talkir about computers th genuinely double up word processors, courte of our programmab function keys.

Nonetheless, we be the first to admit you find several cheap systems if you' prepared to sh around.

But if you intend to be in business this time ne year, better buy a Panasonic.

CP/M is a registered trade mark of Digital Rese

To: Panasonic Business Equipment (UK) Ltd., 107/109 Whitb Road, Slough, Berks SL1 3 DR. Tel: 0753 75841. Telex: 847811.

Please send me details of your JD Series microcomputers.

Name_____ Position _____

Company_____

Address_____

_____ Tel:_____

Panasonic

Small Business Computers

PCV

INDEPENDENT COMPUTER ENGINEERING LTD

APPLE AND S100 USERS:
A 5¼" WINCHESTER DISK SUBSYSTEM

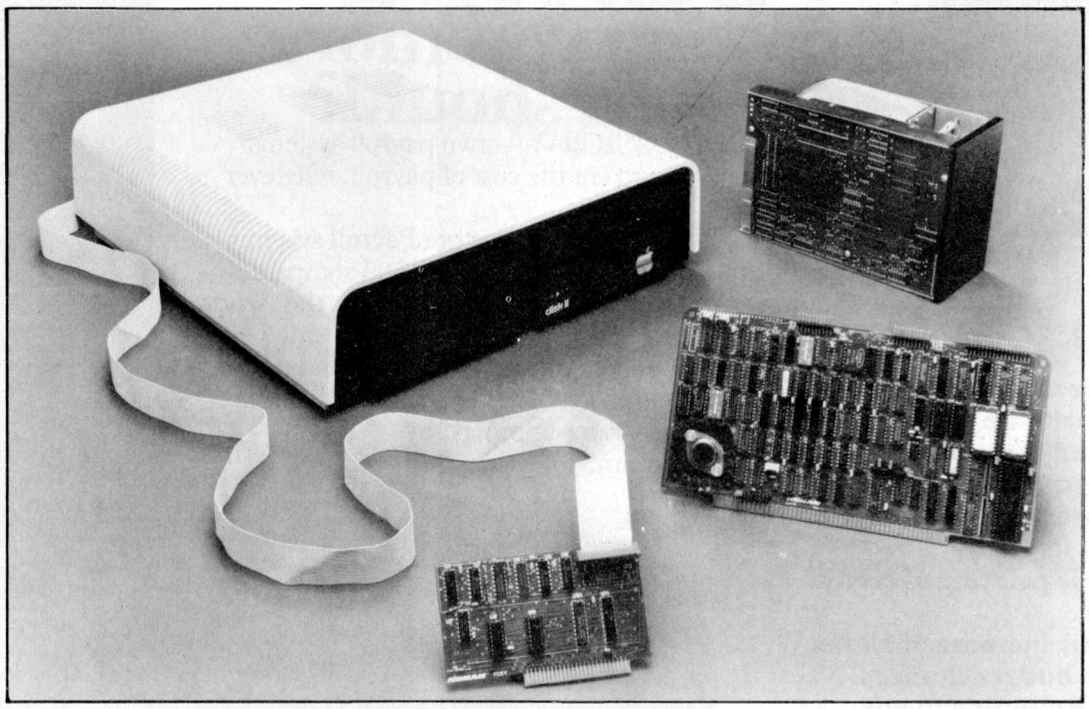

* UP TO 12.6 MBYTE FORMATTED (256 BYTE SECTORS) CAPACITY PER DRIVE
* OPTIMISED SEEKTIMES (DRIVE HAS ON BOARD MICROPROCESSOR)
* CABINET & POWER SUPPLY SUPPORTS 2 WINCHESTER DRIVES OR MIX OF 5¼" FLOPPY + WINCHESTER
* DRIVES AVAILABLE SEPARATELY
* SUB-SYSTEM INCLUDES: CONTROLLER, CABLES, DRIVE, CABINET AND SOFTWARE TO SUPPORT YOUR SYSTEM.

PRICES FROM: £1560 FOR COMPLETE SUBSYSTEM

COMPLETE S100 BUS COMPUTER SYSTEM (Z80, 64K,
1 x 5¼" MINI FLOPPY, 1 x 5¼" WINCHESTER, 6.3 MBYTE FORMATTED) **£3240**

CROMEMCO SYSTEMS & SOFTWARE

CP/M 2.2 £150

MP/M 1.1 – £350

CALIFORNIA COMPUTER SYSTEMS:

S100 BOARDS & SYSTEMS

64K DYNAMIC RAM BANK SELECT – £380

EPSON: MX80 £395

MX80 F/T + HIGH RES. GRAPHICS £455

NEW: MX100 – 15" CARRIAGE
PLUS HIGH RES. GRAPHICS £575

TELEVIDEO:

910, 920, 950 FROM £425

WORDSTAR/CUSTOMISING OPTIONS

ALL PRICES EXCLUDE VAT

END USER & OEM ENQUIRIES TO: ASHFORD (STD 07842) 47171 or 47271
INDEPENDENT COMPUTER ENGINEERING LIMITED
16/18 LITTLETON ROAD, ASHFORD, MIDDLESEX, TW15 1UQ

TELEX: 8952042

WAGES AND SALARIES

Is the payout costing you more than it should?

SUPERPAY and BASICPAY — two payroll systems from Computastore to cut the cost of payroll, whatever the size of your company.

Over the past two years Computastore Payroll systems have proved their effectiveness for over 500 companies — ranging in size from six employees to over a thousand.

Suitable for *all* types of PET and CBM Disk, Computastore's SUPERPAY and BASICPAY are the only Payroll Programs approved by Commodore.

SUPERPAY £350

- **Easy to read departmental analysis with up to 20 rates of pay and adjustments, for up to 26 departments.**
- **Automatic printing of year end P60's, P11's and P35's.**
- **Automatic printing of credit transfers.**
- **Automatic increase of all tax codes for budget changes.**
- **Net Pay Rounding to any amount less than £10.**
- **PLUS all of BASICPAY's standard features.**

BASICPAY £75

- **Automatic calculation of Tax and NI for weekly, monthly, four weekly, or irregular payment periods.**
- **Automatic advancement of tax week for holiday periods.**
- **Automatic coin analysis for cash payments.**
- **Can produce individual payslips.**
- **Option to process all employee payslips automatically.**
- **Easy to install. Even newcomers to computers can use BASICPAY within a few hours.**

COMMODORE APPROVED



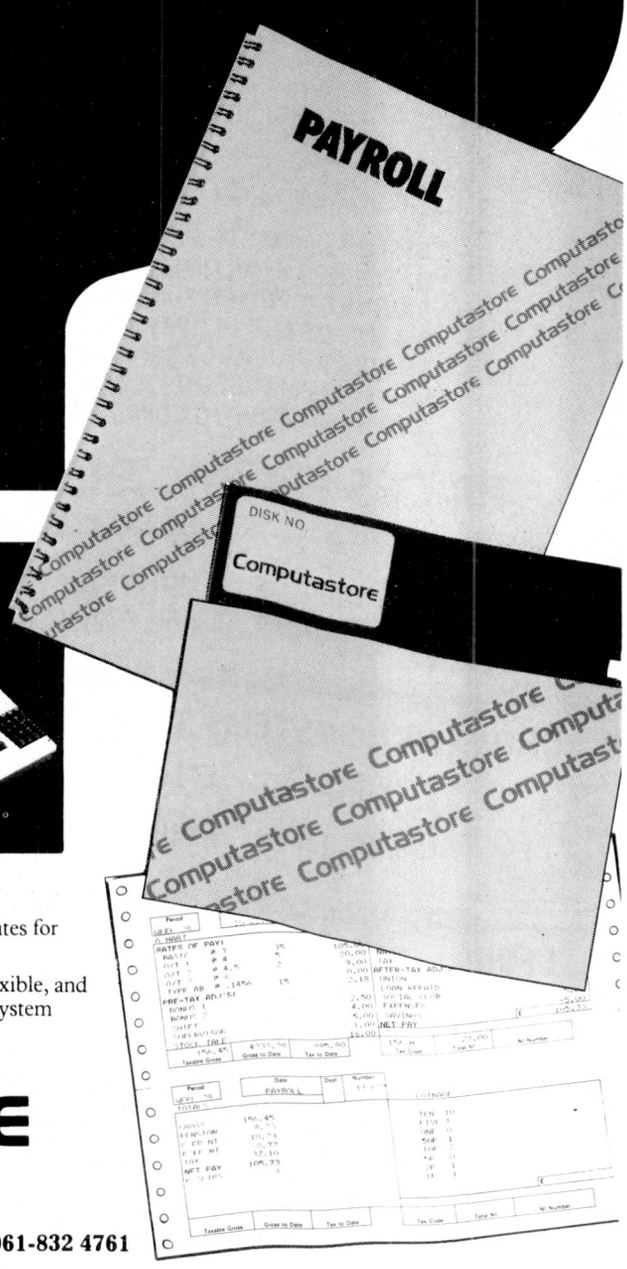

Each program takes no more than 35 seconds per employee for build up to gross, net pay calculation, and printing a payslip in duplicate.

That works out at only 2 hours each week for a typical payroll of 200, or just 15 minutes for a staff of 20.

SUPERPAY is designed for medium size companies which need a comprehensive, flexible, and easy to use payroll; BASICPAY is for small companies who want a flexible, low cost system which carries Commodore's seal of approval.

For the name of your local Computastore Agent, contact:

Computastore

Computastore

Computing for Business

Computastore Ltd., 16 John Dalton St., Manchester M2 6HG. Tel: 061-832 4761

PCW 188

HENRY'S COMPUTER KIT DIVISION

TANGERINE COMPUTER SYSTEMS
LONDON & HOME COUNTIES STOCKISTS

ALL PRE-PAID ORDERS POST FREE

404 EDGWARE RD. LONDON, W2 1ED TEL: 01-402 6822

TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE

MICROTAN 65

Microtan 65 is the most advanced, powerful, expandable micro-computer available - it also happens to be the most cost effective!



Electronic Today International held a mammoth survey of kits. The result: Microtan 65 WINS COMPUTER CLASS!

MICROTAN 65 CONTENTS

High quality, plated thru hole printed circuit board, solder resist and silk screened component identification. 6502 microprocessor. 1K monitor TANBUG. Now with 'V' Bug. 1K RAM for user programme, stack and display memory. VDU alphanumeric display of 16 rows by 32 characters. MICROTAN 65 system file binder. 136 page, bound, users hardware / software manual with constructional details and sample programmes. Logic and discrete components to fully expand MICROTAN 65.

The MICROTAN 65 kit has won widespread acclaim for its superb presentation. We pay attention to detail!

KIT FORM £69.00 + £10.35 V.A.T., total £79.35.

MICROTAN 65 assembled and tested.
Specification as above, but assembled and fully bench tested by ourselves.
£79.00 + £11.85 V.A.T., total £90.85.

MICROTAN 65 OPTIONS

LOWER CASE PACK
Two integrated circuits which connect into locations on MICROTAN allowing 128 displayable characters.
£9.48 + £1.42, total £10.90.

MINI MOTHER BOARD
Used to connect Microtan to Tanex
Built **£10.00** + VAT

GRAPHICS PACK
Five integrated circuits which connect into locations on MICROTAN allowing the display of chunky graphics (64 x 64 pixels). What are chunky graphics? Well, imagine a piece of graph paper with 64 squares vertically and 64 squares horizontally, a total of 4096. Each square can be made black on white.
£6.52 + V.A.T. 98p, total £7.50.

20 WAY KEYPAD
Inexpensive means of getting up and running. Uses 'Schoeller' key-switches, and connects to MICROTAN through a 16 pin D.I.L. plug on ribbon cable. Black anodised escutcheon, with TANGERINE legends, finishes off what must be the best value for money keypad available. Available assembled and tested.
£10.00 + V.A.T. £1.50, total £11.50.
*Space Invaders game (for use with keypad only)
£15.22 + V.A.T. £2.28 total £17.50.

POWER SUPPLIES

MPS 1. Input 120 or 240V AC. Output 5 Volts at 3 Amps Regulated. MPS 1 will power both MICROTAN and TANEX fully expanded. Built on the same size printed circuit board as MICROTAN etc. Available as a fully built and tested unit.
£23.00 + V.A.T. £3.45, total £26.45.

X MPSZ +5V 6A, +12V, -5 and -12V switch mode system PSU.
£69.13 + V.A.T.

MINI-SYSTEM RACK

We have produced a mini-system rack which accepts MICROTAN 65, TANEX and our mini-mother board. It has an integral power supply, just plug it into the mains and away you go! Finished in TANGERINE/BLACK, it gives your system the professional finish. Front panel access for I/O cables. **AVAILABLE AS AN ASSEMBLED UNIT.**
£43.00 + V.A.T. £6.45, total £49.45.

FULL SYSTEM RACK

For the man that has everything! 19 inch wide system rack which accepts: MICROTAN 65, TANEX, TANRAM, SEVEN FURTHER EXPANSION BOARDS, TANDOS and THE SYSTEM POWER SUPPLY. Available in many formats, e.g. Individual front panels, full width hinged front panel, back panel with or without connectors.
£49.00 + V.A.T. £7.35, total £56.35.

MICRON COMPUTER



FULLY BUILT, TESTED, and housed in ATTRACTIVE CASES.

£395 inc. V.A.T. P&P

6502 based microcomputer VDU alpha numeric display. Powerful monitor TANBUG. 8K RAM. 32 parallel I/O lines. 2 TTL serial I/O lines. Four 16 Bit counter timers. Cassette interface. Data bus buffering. Memory mapping contol. 71 key ASCII Keyboard, including numeric keypad. Includes power supply. Also includes the first "10K MICRO-SOFT BASIC" available in the U.K. All the usual BASIC commands.

TANRAM



AVAILABLE NOW. TANRAM. 40K Bytes on one board! Single board of bulk memory offering: 7K Static RAM (2114), and 32K Dynamic RAM (4116). Onboard refresh is totally transparent to CPU operation and is unaffected by normal DMA's. TANRAM fully expands the available address space of the 6502 microprocessor. MICROTAN, TANEX and TANRAM together provide 16K RAM, 48K RAM, and 1K I/O - that's a lot of memory and a lot of I/O! Built and tested. TANRAM ASSEMBLED

40K RAM CARD with 16K DYNAMIC RAM £76 +VAT

CONTENTS: High quality plated thru hole printed circuit board, solder resist and silk screened component identification. Full complement of I.C. sockets for maximum expansion. 64 way D.I.N. edge connector. 1K RAM (2114). Data bus buffering. TANRAM users manual.

EXTRA RAM:
1K STATIC (2114) **£2.95** each. 16K DYNAMIC (4116) £1.50 each.

MEMORIES

EXPAND YOUR SYSTEM WITH OUR TANGERINE APPROVED CHIPS.
Discounts 10% for 4, 15% for 8, 20% for 16.

2102 1K x 1 Static RAM 80p	IM 6402 UART £4.50
2708 £3.50	2114 1K x 4 Static RAM £2.95
2716 £6.50	8080A £5.00
MK 4116 16K x 1 Dynamic RAM £1.50	4118 1K x 8 Static RAM £7.50

All plus VAT

MONITORS (PROFESSIONAL)

RECONDITIONED AND NEW - FROM £35.00 to **£129.95**

CENTRONICS Ideal for Tangerine PRINTERS



CENTRONICS P.I. **£150** + VAT
SHEIKOSHA **£199** + VAT
Model 730 **£350** + V.A.T.
Model 737 **£395** + V.A.T.

NEW MICROTANTEL POST OFFICE APPROVED PRESTEL - VIEWDATA



• FULL COLOURGRAPHICS • MICROTAN OWNERS CAN COMMUNICATE WITH EACH OTHER • CAN STORE PRESTEL • CAN BE USED AS AN EDITING TERMINAL • CAN BE INTERFACED WITH PET, APPLE etc.

£170 +V.A.T.

Just connect to the aerial socket of any colour or black and white domestic T.V. receiver and to your Post Office installed jack socket and you are into the exciting world of PRESTEL. Via simple push button use you are able to view 170,000 pages of up to the minute information on many services, order goods from companies - all this without leaving your armchair!

TANEX £43.00

Minimum Config Kit

CONTENTS +V.A.T. £6.45, total £49.45

High quality plated thru hole printed circuit board, solder resist and silk screened component identification. I.C. sockets for maximum expansion. 64 Way D.I.N. edge connector. 1K RAM, cassette interface, 16 parallel I/O lines, a T.T.L. serial I/O port, two 16 bit counter timers, data bus buffering, memory mapping, logic and discrete components for maximum expansion. TANEX users manual.



TANEX (Minimum configuration) Assembled
£53.00 + V.A.T. £7.95, total £60.95.

TANEX EXPANSION



Expanded TANEX offers: 7K RAM locations for 4K EPROM (2716), locations for 10K extended MICROSOFT BASIC, 32 parallel I/O lines, two TTL serial I/O ports, a third serial I/O port with RS232/20mA loop, full modem control and 16 programmable baud rates, four 16 bit counter timers, cassette interface, data bus buffering, and memory mapping.

EXPANDED TANEX KIT (Excludes ROM, XBUG and BASIC)
£89.70 + V.A.T. £13.46, total £103.16.

EXPANDED TANEX ASSEMBLED
£99.70 + V.A.T. £14.96, total £114.66.

OPTIONS TO FULLY EXPANDED TANEX IN SIMPLE INEXPENSIVE STAGES.

10K Extended MICROSOFT BASIC in EPROM (with manual)
£49.00 + V.A.T. £7.35, total £56.35.

Extra RAM: 1K (2 x 2114) **£5.20** + V.A.T. 78p, total £5.98.

SERIAL I/O KIT **£10.26** + V.A.T. £1.60, total £11.80.
6522 VIA **£8.00** + V.A.T. £1.20, total £9.20.
XBUG £17.35 + V.A.T. £2.60, total £19.95.

AS YOU CAN SEE THE PRICES OF OUR EXPANSION COMPONENTS ARE VERY, VERY COMPETITIVE!

TANGERINE DISC SYSTEM



Z8 CONTROLLER CARD **£150.00** +VAT
DOUBLE SIDED DOUBLE DENSITY DRIVE
£215.00 +VAT
CP/M DISK OPERATING SYSTEM
£80 +VAT

71 KEY ASCII KEYBOARD £56.34 + VAT

NO EXTRAS NEEDED.
Uses gold crosspoint keys. Includes numeric keypad and ribbon cable. Available as fully assembled and tested.



SUPER METAL CABINET IN TANGERINE/BLACK
£20.00 + V.A.T. £3.00, total £23.00.

PROFESSIONAL ASCII KEYBOARDS Ideal for Tangerine



£29.95 + VAT

- 52 key 7 bit ASCII coded
- Positive strobe +5V 12V
- Full ASCII characters
- Parallel output with strobe
- Power light on control
- Chip by General Instrument (G.I.) TTL output
- Superbly made
- Size 13 x 5.5 x 1.5 ins.
- Black keys with white ledgens
- Escape shift return & reset keys
- Control repeat & bell
- Complete with DATA

ADD-ON KEYPAD



A compact 12 button keypad suitable for use with above keyboard to extend its functions plus four extra keys. Supplied brand new with with data. A 4 x 4 non-encoded single mode keyboard.

LIST PRICE £22.00
OUR PRICE **£7.95** + VAT

NEW PRODUCTS NOW AVAILABLE

HIGH DEFINITION COLOUR GRAPHICS
£90.85 incl. VAT
CONTROLLER CARD **£120.00** + VAT

SERIAL I/O CARD (From)	£58.00 + VAT	SYSTEM MOTHER BOARD WITH 4 SOCKETS FOR SYSTEM RACK	£39 + VAT
PARALLEL I/O CARD (From)	£47.50 + VAT	SYSTEM MOTHER BOARD WITH 12 SOCKETS FOR SYSTEM RACK	£55 + VAT
ROM CARD (BUILT) LESS ROM	£47.50 + VAT	32K RAM CARD	£115 + VAT
AIM/KIM INTERFACE CARD	£59.00 + VAT	32K ROM CARD (LESS CHIPS)	£54.65 inc. VAT
SERIAL I/O KIT	£17.25 incl. VAT		

PLUS MANY NEW EXCITING PRODUCTS IN DEVELOPMENT AUTOMATICALLY AVAILABLE FROM US WHEN RELEASED BY OUR PRINCIPALS TANGERINE LTD.

All products are available from stock.

FULLY GUARANTEED * BUY WITH CONFIDENCE

BRITISH DESIGN & MANUFACTURE AND ON DEMONSTRATION IN OUR COMPUTER DEPT.

TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE

SEND FOR FREE BROCHURE

Stockist Enquiries on headed notepaper to:
COMPUTER KIT LTD. (Principal Distributors in U.K.)
11/12 Paddington Green, London, W2. Tele: 01-723 5095
Telex 262284 Ref. 1400 TRANSONICS

All orders pre-paid and official advertised here and elsewhere in this magazine by TANGERINE to be forwarded DIRECTLY to COMPUTER DEPT., 11/12 PADDINGTON GREEN, LONDON W2

ZX80 – ZX80 – ZX80 | JRS SOFTWARE | ZX80 – ZX80 – ZX80

PROGRAMMABLE MOVING DISPLAY

YES! Now you can write your own **GENUINE,** continuous, flicker-free routines on a **1K ZX80 (4K ROM).** Just enter your routine into the **MOVING DISPLAY PROGRAM** (using a simple numeric coding system devised by **JRS SOFTWARE)** then sit back and watch your routine being carried out on **CONTINUOUS** display.

Sent first class post in a padded envelope, your package contains:-

Cassette in a library case with 1K **AND** 2K versions plus three example programs, copied on both sides of the cassette. Eight page instruction booklet. Completed Coding Charts showing how the example programs work. Eight blank Coding Charts to prepare your own routines. Graph paper for designing your displays.

ALL FOR ONLY £4.95

ZX81 – ZX81 – ZX81 | JRS SOFTWARE | ZX81 – ZX81 – ZX81

SLALOM

Can you weave your skier accurately between the 14 slalom posts and achieve a fast time. Beware hitting a post or the run boundary markers. Think you can miss out a post? You will get disqualified if you do.

BLACK HOLES

Black holes, continuously evolving at random, are bearing down on you. You must manoeuvre your starship to avoid being swallowed up. Dare you take the chance of entering the hyperspace corridor to escape or will you switch to a different path to gain a few more seconds before destruction.

These great real time games require the addition of the 16K RAM pack.

CASSETTE and INSTRUCTION – £2.95 for each program or, for the two on one cassette – £4.50

JRS SOFTWARE, 19 WAYSIDE AVENUE, WORTHING BN13 3JU.

JENNINGS

ATARI

AUTHORISED DEALER

JENNINGS STORES LTD.
244/8 HERTFORD ROAD, ENFIELD, MIDDX. EN3 5BL.
Tel: 01-804 1767.

400	COMPUTER WITH 16K RAM	£399.00
800	COMPUTER WITH 16K RAM	£625.00
410	RECORDER	£44.95
810	DISK DRIVE	£325.00
825	80 COL PRINTER	£549.00
853	16K RAM MEM MODULE	£ 63.95
	PADDLE CONTROLLER	each £599.00
850	INTERFACE	£120.00

SOFTWARE

STARRAIDERS	£29.95	SPACE INVADERS	£12.95
MUSIC COMPOSER	£32.50	ENERGY CZAR	£ 8.95
HANGMAN	£ 8.95	KINGDOM	£ 8.95
SCRAM	£12.95	BASKETBALL	£20.50
INVITE TO DROG	£11.95	SUPER BRAK OUT	£24.50

Orders to: JENNINGS FREEPOST ENFIELD MIDDX EN3 4BR
or Tel: 01-804 1767

Payment:
VISA, ACCESS, DINERS, AMERICAN EXPRESS
H.P. Available. Send S.A.E. for written quotations.



CRAB SOFTWARE

(for the TRS-80,* Level II)

* Trademark of the Tandy Corporation

THE CRAB ASSEMBLER

Standard Z80 assembler, features syntax checking on entry, full documentation, 40% MORE BUFFFER SPACE THAN EDTASM. £10.00

INVADERS FROM SPACE

The old favourite video game £4.00

E.O.S

Extended Operating System adds 17 commands to L II BASIC: user defined shift key entries, multiple USR calls, improved cassette I/O, controlled delays, full error messages etc. £8.00

MAGRATHEANS

Based on the pub game 'Galactic Guerrillas' £5.00

DEBUG

Machine code debugging aid: single step through code, update registers, contents of memory and all registers displayed and updated on screen. £6.00

DISAS

Z80 disassembler, compatible to EDTASM, inserts labels. £6.00

TRACE

More civilized than TRON, current line number displayed in top left hand corner - powerful debugging aid. £4.00

Make cheques/postal orders payable to:
CRAB SOFTWARE

Prices are completely inclusive
10% discount on orders over £15
Send S.A.E. for full software list
Orders, by post only, to: **CRAB SOFTWARE**
2, PONDWICK RD.
HARPENDEN
HERTS AL5 2HG

SHARP PC3201 PAYROLL

Up to 500 employees All Tax and NHI codes Monthly and weekly paid with full coin analysis, full end of year printout. Complex Bonus calculations, voluntary deductions 3 overtime rates.
All output, payslips etc on PLAIN PAPER Full support and updates available. Personalisation undertaken
. . . . . £275.00

CP/M REVIVE

Ever erased a file by mistake? Revive enables you to recover all erased files on a disc! You must have REVIVE if you use CP/M, fully menu driven

ONLY £20

PC3201 now with choice of **PRINTERS**

The Latest **MZ80B** on display.

Phone Chris Robinson on (0473) 50152

MICROTEK IPSWICH

15 Lower Brook St Ipswich Suffolk

MEMBER CRA COMPUTER RETAILERS ASSOCIATION



Now teach the next stage with your micro

The pure mathematics operations have been mastered, you've played it at chess, business information has been analysed and printed out.

Now for the next stage: the monitoring and control of other equipment. These working applications of the microprocessor function are becoming even more important in full computer courses, and Feedback's new range of MICA interfaces and modules provides immediate hands-on experience in analysing, programming and operating models of real life applications such as traffic control, heating cycle control, diesel generator and many others.

Each module comes complete with manuals suitable for classroom instruction or direct use by the student.



FEEDBACK

Feedback Instruments Limited, Park Road, Crowborough, Sussex TN6 2QR. Telephone: (08926) 3322. Telex: 95255.

Modules

MIC 951 Automatic Washing Machine	£74
MIC 952 Project Board	£45
MIC 954 Stepping Motor	£99
MIC 955 Temperature Control	£132
MIC 957 Traffic Control	£66
MIC 958 Binary Input/Output	£106

Interfaces

MIC 944 PET	£71
MIC 945 AIM	£45
MIC 946 Apple	£55
MIC 947 ABC 80	£107

Prices exclusive of VAT

I am very interested in the Feedback MICA series of interface modules. Please send me detailed information.

My present microcomputer is _____

Name _____

Position _____

Organisation _____

Address _____

Telephone No. _____

PCW 10

IBM SELECTRIC GOLFBALL PRINTERS AND INPUT, OUTPUT 735 TYPEWRITERS

PRINTERS FROM	£195.00
735 TYPEWRITERS FROM	£245.00
WIRING AND COMMISION TO SUIT ACULAB INTERFACE	£48.00
ACULAB INTERFACES EX STOCK	£155.00

ALSO AVAILABLE
IBM 71, 72, 82 typewriters.
Full workshop facilities for rebuilds and servicing.
Keyboard ASCID-ASCII, 10-12 pitch, language conversions undertaken.
11", 13", 15" platen lengths, split platens pin feed platens. Operational keylever repeats fitted on request.
Full IBM range of 10-12* pitch heads including language, symbol and metric.
Language keybuttons blue or grey

WE BUY SELL OR EXCHANGE ALL IBM SELECTRIC TYPEWRITER MODELS

For further details phone Stuart Kirby or Louis Baker Prices excl VAT @ 15% carriage & packing, callers by appt only please

KEYTRONICS

Saul Lodge, Saul, Gloucester GL2 7JE
Tel: 0452 740 612

MALVERN MICRO SYSTEMS

TEL. 06845 68500

COMPUTERS:

NEW Adler Alphatronic
NEW Gemini G801
Intertec Superbrain
NEW Shelton SIG/NET

Most makes supplied including Commodores and S100 Systems

DIGI-PLOT Plotter

PRINTERS:

Ricoh RP 1600S
Adler DRH80
Microline 80/82
Epson MX70/MX80
Seikosha GP80

NEW CP/M Software for Alphatronic!! Phone Now.
CP/M Software including
MBasic-80, CBasic, Wordstar
Osbourne A/P, A/R and G/L
Fig-Forth

WYCHE CUTTING, UPPER COLWALL, MALVERN, WORCESTERSHIRE, WR13 6PL

NEW! For Atom Owners
THE BIG ONES

Acorn are right on target with a whole range of games

GET THE BEST – FORGET THE REST

All Acornsoft games are designed and produced by the manufacturers of the Atom. Trust the manufacturer to get the very best out of his product. Realistic sound effects, great graphics and colour too!



SPACE INVADERS
This has proved to be the most popular video game ever. And now we've brought it right up to date. Different, types of invaders, flying saucers, shelters, laser guns and full sound effects. Program 5K, graphics 6K
Also in Games Pack 5
Wumpus + Reversi

GAMES PACK 1
Asteroids Shoot them before they crash into you. Lists ten best scores. Program 4K, graphics 6K.
Sub Hunt Command a destroyer tracking a submarine, find its position and destroy it. Program 1K, graphics ½K, needs floating point.
Breakout Score points knocking bricks from wall. Ball has two changes of angle and speed. Program 3K, graphics 1-2K. COLOUR



GAMES PACK 2
Dogfight Two-player game each player controls a plane and tries to shoot down his opponent without crashing. Program 4K, graphics 6K.
Mastermind Guess the computer's code before the computer guesses yours; program 3K, graphics ½K.
Zombie Land on Zombie island; try to lure all the zombies into the swamp. In desperation jump into hyper-space! Program 3K, graphics ½K. COLOUR

GAMES PACK 3
Rat Trap Move your rats without colliding with the trails left. Entangle your opponent before he entangles you! High-speed rat action-replay. Program 4K graphics 6K.
Lunar Lander Land a spacecraft on a lunar crater; altitude velocity, fuel and drift. Program 1K, graphics ½K.
Black Box Deduce the position of four invisible objects in the Black Box by firing rays at them. Program 4K, graphics ½K.

GAMES PACK 4
Star Trek Classic computer game; rid the universe of Klingons. Short and long-range scans, galactic map, phasers, photon torpedoes, shields, etc. Program 5K, graphics 2K.
Four Row Take turns in placing marbles on the board; the first to get a line of four wins. Program 5K, graphics 6K. COLOUR
Space Attack Repel the invasions of earth and avoid being hit by the gunner ships. Becomes progressively harder with each invasion. Program 3K, graphics 6K.



GAMES PACK 6
Dodgems Steer your car and avoid the computer-controlled car programmed to collide. Survive, and the game gets faster. Program 4K, graphics 6K.
Simon Test your ability to remember a progressively longer sequence of lights and tones. Adjustable skill level. Program 2K, graphics 3K. COLOUR
Amoeba Try and create the shapes devised by the computer. Program 3K, graphics 3K.

GAMES PACK 7
Green Things An alien life-form has invaded your spacecraft; discover a way of destroying it with the weapons available on the ship. Program 5K, graphics 2K. COLOUR
Ballistics Take turns in firing shells at the other player, taking into account the wind and shape of the hill, Program 3K, graphics 6K, needs floating-point.
Snake Grow yourself a snake by guiding it towards digits which it eats. Program 2K, graphics ½K.

ORDER TODAY!

Just send a cheque or money order only £11.50 per pack including VAT and post and packing. State which packs you want.
Or ring **0223 316039** or **01-930 1614** quoting your Access or Barclaycard number. Allow 14 days for delivery.

Or if you think you can wait for more details just write to
Acornsoft Limited, 4a Market Hill, Cambridge.

ACORNSOFT TAKE GAMES SERIOUSLY

PRINTERS
Buy any of the below and get a free interface kit and word processor program for UK101 or Superboard. Seikosha GP80R £199. Centronics 737 £395. OKI Microline 80 £299. OKI Microline 82A £399. OKI Microline 83A £699. OKI Microline 82 £399. OKI Microline 83 £699. Epson MX70T £259. Epson MX80T £359. Epson MX80F/T1 £399. Epson MX80F/T2 £449. Epson MX100 £575.



OHIO SCIENTIFIC COMPUTERS
Our prices are so low we dare not print them! Special offer — Superboard 3 with free Cegmon monitor poa. Superboard 3 + free power supply, modulator and guard band kits poa. Series 2 challenger 4K poa, 8K poa. Power supply kit £11.95. Modulator £3.b0. Guard band kit £10. 4K extra ram £10.90. Case £27. Cegmon £22.b0. Wemon £19.95. Assembler/Editor tape £25. Word processor program £10. Centronics interface kit £10. 610 expansion board poa. Cased minifloppy disc drive with DOS and Psu poa.

SHARP COMPUTERS
MZ80K 20K £418, 36K £440, 48K £460. PC1211 £82.



VIDEO GENIE £289



VIC 20 COMPUTER
Our prices are the lowest yet. Ring for a quote.



5V POWER KITS
Fully stabilized 5V computer and TTL Power kits. Automatic current limiting and short circuit portection. Crowbar over-voltage protection. 1.bA £7.93, 3A £12.17, 6A £19.13.

SWANLEY ELECTRONICS
Dept PCW, 32 Goldsel Rd,
Swanley, Kent BR8 8EZ.
Tel Swanley (0322) 64851

Postage £3.50 on computers, £4.50 on printers and 45p on other orders. Lists 27p post free. Please add VAT to all prices. Official credit orders welcome.



THE LONDON SORCERER CENTRE

EMG MICROCOMPUTERS LTD.
30 HEATHFIELD ROAD, CROYDON, SURREY CR0 1EU.
TEL: 01-688 0088

We are specialists in complete installations, tailormade software for your business needs.

WORD PROCESSING SYSTEM	£14.99/WEEK
COMPLETE BUSINESS SYSTEM	£24.99/WEEK

Software includes customer and invoice system, leads and sales system, VAT outputs and debtors, insurance agents system, car sales program, order processing program.

We provide any printer to fit your Sorcerer e.g. Qume, Starwriter, Spinwriter, Centronics 737 and NEW Adcomp printer plotter matches '8.8 Graphics capability of Sorcerer to give complete graphics.

SPECIAL OFFER

Sorcerer 48K for only £595*
★ Special Educational Discount
★ Demonstrations and Quotes given
★ Free Software and Hardware catalogue
★ 6 copies of Source magazine £6

ALL PRICES EXCLUDE VAT — AN EMG COMPANY
*Subject to dollar surcharge.

SOLE UK DISTRIBUTOR



A DYNAMIC REVOLUTIONARY CONCEPT IN APPLE WORD PROCESSING



Magic Window
word processing system

PRICE £79.95 + V.A.T.
postage and packing free

MAGIC WINDOW allows you to type up to EIGHTY CHARACTERS per line!!! This allows you to see your letter, report, etc., exactly the way it will be printed. Inserting, deleting, centering, and justifying can be done on the screen without the need to print a work copy.

The real power and sophistication of a word processor is judged by how easy it is to use. **MAGIC WINDOW** is as easy to use as a standard typewriter, yet it has the POWER a PROFESSIONAL requires.

Novice typists to professional secretaries and administrators are amazed at the ease and simplicity of **MAGIC WINDOW.**

MAGIC WINDOW is a Apple II word processing/text editing system that is designed to increase your office productivity—those time-consuming typing tasks can now be done quickly and efficiently.

The simplest and best-known word processing machine is the standard typewriter. We have retained the simple operating features of the typewriter while providing complete editing facilities.

MAGIC WINDOW is a word processing system that allows text to be entered, edited, printed, and saved on a diskette. **MAGIC WINDOW** is unique in the way it performs these functions.

Most systems separate the tasks of editing text and formatting for printing. This separation requires formatting commands to be placed in the text file. **MAGIC WINDOW** has no need for these commands because it formats the text as you enter it. What you see is truly what you get. There is no guesswork in laying out your document.

MAGIC WINDOW will instantly convert your Apple system into a word processor—no modifications or fancy gadgets to buy. Simply insert the **MAGIC WINDOW** diskette into your disk drive and experience word processing as never before.

MAGIC WINDOW

LOOK INTO OUR MAGIC WINDOW AND EXPERIENCE A WONDERLAND IN WORD PROCESSING.

NO MATTER WHAT YOUR ABILITY, MAGIC WINDOW'S HUMAN ENGINEERING WILL GUIDE YOU FROM BEGINNING TYPING THROUGH PROFESSIONAL DOCUMENTS INSTANTLY AND EFFORTLESSLY.

• EDITING & FORMATTING

USING VERY SIMPLE KEY STROKES, MAGIC WINDOW WILL MANIPULATE PARAGRAPHS, MAKE ADDITIONS, DELETIONS AND CORRECTIONS. THE DAYS OF RETYPING ARE OVER.

• AFFORDABLE & EXPANDABLE

MAGIC WINDOW DOES NOT REQUIRE ANY MODIFICATION TO YOUR APPLE II COMPUTER. YOU CAN MODIFY MAGIC WINDOW TO USE ANY CUSTOM ADDITIONS YOU HAVE IN YOUR APPLE: LOWER CASE MODIFICATION, LANGUAGE CARDS, CUSTOM PRINTER INTERFACES ETC.

• HUMAN ENGINEERING

MAGIC WINDOW'S FOUR WAY SCROLLING ALLOWS YOU TO VIEW EIGHTY-COLUMNS ON YOUR FORTY-COLUMN SCREEN. MOST PAPER SIZES CAN BE SIMULATED. MAGIC WINDOW WILL SHOW ALL FOUR EDGES OF THE "PAPER" AS YOU TYPE. THIS SIMULATION OF A STANDARD TYPEWRITER HAS CAUSED A REVOLUTION IN APPLE II WORD PROCESSING.

MAGIC WINDOW WILL KEEP YOU SPELLBOUND WITH OUR SPELLBINDER—A WEBSTER'S WORD SPELLER/DIVIDER.

See your local dealer or send cheques to :
SBD SOFTWARE
15 JOCELYN ROAD
RICHMOND TW9 2TJ
TEL :01- 948 0461
Telex : 22861

sbd Software

MARCH COMMUNICATIONS Ltd.

MICRO CLOCK

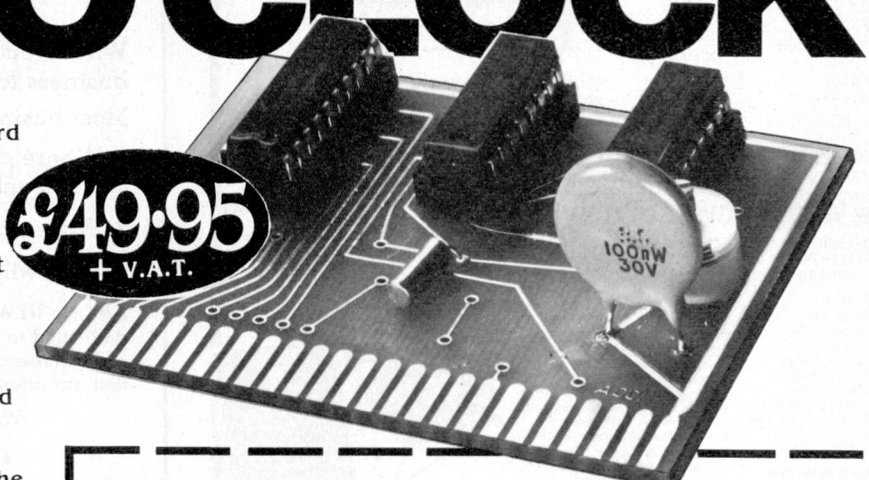

The March Micro-Clock is possibly the cheapest and smallest real time clock card for the APPLE II COMPUTER. The Micro-Clock is designed to provide a useful and economical timing facility for incorporation within the users own programs. The unit provides a time count from tenths of seconds to months and years. Once initiated the count will continue without supervision and can be read at any time.

Possible uses include: micro-monitored experiments, micro-controlled processes, data logging, games and lots more.
The comprehensive handbook contains the necessary software and applications programs required to make full use of the card.

Available from most good Apple dealers or direct from March Communications Ltd.

MARCH COMMUNICATIONS Ltd.
4 COMMUTATION ROW
LIVERPOOL L1 1JB
Tel. 051-207 7477

☐ Send me ..... Micro-Clock cards @ £57.44 inc. V.A.T.
☐ Send details of the full range of March products.

I am paying by cheque/P.O./ Barclaycard/Access.
Barclaycard/Access No. ☐

Name .....

Address .....

.....

My present computer system is .....

PCW 1081a

THERE'S ONE PLACE IN GLOUCESTERSHIRE THAT REALLY MEANS BUSINESS.

Appropriately, we're called The Business House.

We produce complete systems based on the Apple II. Everything from selecting the equipment to the training of your staff.

But before you buy anything from us, you'll have to answer a few questions. For example: "What do you expect to achieve?"

Above all else, we'll make sure that's exactly what you get.

So our service is rather more helpful than you may be used to. And in fact there's literally no end to it all.

We'll give you complete after-sales support, with up-grades, on-going system development and full maintenance for everything we sell.

And it's worth noting we're the only Apple Level I Service Agents in the county.

apple computer Sales and Service

THE BUSINESS HOUSE
Systems Division

The Business House, 37 St Michael's Square, Gloucester, GL1 1HX. Telephone (0452) 424411.

MONITORS: HITACHI, PACT, SCANTIC, BMC. **DATA STORAGE:** VLASAK MEGASTOR, CORVUS HARD DISK.
PRINTERS: EPSON, PAPER TIGER, ANADEX, VLASAK DUET. **LANGUAGES:** BASIC, PASCAL, FORTRAN, COBOL, FORTH, PILOT.
SOFTWARE: SYSTEMATICS, TABS, PADMEDE, FARMPLAN, MICRO-MODELLER AND DECISION MODELLER, VISICALC, DESK TOP PLAN, CCA DMS, PFS, DATAPLAN, WORDSTAR.
COMMUNICATIONS: MODEMS, MICROCOURIER, NOVATION, APPLE-CAT. **FURNITURE:** EMKAY WORKSTATION. **ACCESSORIES:** Z80 CARDS, VIDEX 80-COLUMN CARD, VERSAWRITER.
SUPPORT: DOCUMENTATION, SERVICE, MAINTENANCE, TRAINING, CONSULTANCY. **SUPPLIES:** PAPER, PRINTWHEELS, RIBBONS, DISKS.

SCOOP ONLY £29.95 + V.A.T.

Professional ASCII Keyboards

The 'CHERRY' Computer Keyboard



BRITISH MADE
- 52 KEY 7 BIT ASCII CODED
- POSITIVE STROBE +5V - 12V
- FULL ASCII CHARACTERS
- PARALLEL OUTPUT WITH STROBE
- POWER LIGHT ON CONTROL
- CHIP BY GENERAL INSTRUMENT (G.I.) TTL OUTPUT
- SUPERBLY MADE SIZE 13 x 5.5 x 1.5 ins.
- BLACK KEYS WITH WHITE LEDGENS
- ESCAPE SHIFT RETURN & RESET KEYS
- CONTROL REPEAT & BELL

Complete with DATA

Ideal for use with **TANGERINE, TRITON, TUSCAN, APPLE and most computers.** Ex-Stock from HENRY'S

This is definitely the BEST BUY. FULLY GUARANTEED. Supplied BRAND NEW in manufacturers original packing. Just post remittance total £35.95 (incl. V.A.T. & Post)

The 'Apple' Power Supply

Suitable for use with most computers

A PROFESSIONAL BUILT & TESTED, CASED & VENTILATED POWER UNIT WITH BUILT IN OVERLOAD & CUT OUT PROTECTION CIRCUITS

SPECIFICATIONS
Input voltage: 210-250v
Supply voltages: +5.0, +11.8, -12.0, -5.2
Power consumption: 60 watts max. (full load)
Full load power output: +5v: 2.5 amp, -5v: 250ma, +12v: 1.5 amp, -12v: 250ma
Size: 10" x 3¼" x 2½"
Weight: (Approx.) 3 lbs

Complete with full data & information - Supplied brand new

The Apple Power Supply is a high-voltage "switching" power supply. While most other power supplies use a large transformer with many windings to convert the input voltage into many lesser voltages and then rectify and regulate these lesser voltages, the Apple Power Supply first converts the AC line voltage into a DC voltage, and then uses this DC voltage to drive a high-frequency oscillator. The output of this oscillator is fed into a small transformer with many windings. The voltages on the secondary windings are then regulated.

PREVENTS DAMAGE & RETURNS UNIT TO NORMAL WORKING CONDITIONS



LIST PRICE £60
OUR PRICE £32.50 + VAT
Just post remittance £39.50 (includes VAT, post & packing) for delivery by return



I.T.T. 2020 CABINET

Complete PROFESSIONAL Case beautifully constructed with cut out for one 'CHERRY' keyboard, plus ample room to house a COMPLETE SYSTEM and our power supply complete with fittings. (Case top detachable.) Unit is silver-grey in colour. Robust construction. Sloping front with side ventilation. Ideal for NASCOM, ACORN, TANGERINE or **your own system.**

Size: 18" x 15½" x 4½" (Front slopes).

A snip at **£39.95** incl. VAT post free



'CHERRY' ADD-ON KEYPAD

'CHERRY' ADD-ON KEYPAD

A compact 12 button keypad suitable for use with Cherry keyboard to extend its functions plus four extra keys.
Supplied brand new with data.
A 3 x 4 non-encoded single mode keyboard in sloped format.

£7.95 + VAT

HENRY'S

COMPERKIT DIVISION
404 Edgware Road, London, W2. England
Telephone: 01-402 6822
Telex: 262284 Mono Transonics

Buy it with Access

BARCLAYCARD VISA

KAI

apple computer

When you have decided that **Apple** means business for you, what next?

Most businessmen would ask 3 key questions . . .

1 Where can I get the best service and back up? **KAI**

2 Where can I get the best deal? **KAI**

3 Who will deliver promptly? **KAI**

KAI is a NEW breed of Business Microcomputer Store dedicated to meeting the needs of today's **Micro Managers.** Our professional standards and willingness to serve ensures that our clients receive the very best attention.

We are specialists in:

- ★ **Financial Planning & Modelling**
- ★ **Accounting, Invoicing & Stock Control**
- ★ **Project Control & Costing**
- ★ **Word Processing & Mailing**
- ★ **Database & Bespoke Programming**

The KAI Full service package is designed for first time micro users who can benefit from having the system installed and tested, staff trained and operational support in the early stages.

KOMPUTATION AUTOMATION INFORMATION LTD
203A Belsize Road, London NW6
01 328 7038 01 328 3968
24 hour personal answering service 01 486 4808

SUMLOCK BONDAIN makes the decisions easier

THE EASIER WAY TO BUY THE CASIO PROGRAMMABLE OF YOUR CHOICE



FX 180P

Casio fx 180p
38 PROGRAM STEPS
55 SCIENTIFIC FUNCTIONS
7 MEMORIES
18 PARENTHESES
TRUE ALGEBRAIC LOGIC
INTEGRATION
LINEAR REGRESSION
LOG. EXP. & POWER REGRESSIONS

£ 19.95 (inc. VAT)
FAMOUS CASIO RELIABILITY

GUARANTEED 1 Year

Complete with Batteries Cover and Full Instruction Book.

DON'T WASTE TIME SEARCHING THE SHOPS—
—BUY AT HIGH STREET PRICES FROM SUMLOCK BONDAIN—ALL PRICES INCLUDE VAT POST & PACKING

fx 200P 44 Sci. Functions 38 Prog. Steps Handheld Size **£17.95** (inc. VAT)
fx 2700P 50 Sci. Functions 38 Prog. Steps Notebook Size **£19.95** (inc. VAT)
fx 3500P 61 Sci. Functions 38 Prog. Steps Notebook Size **£22.95** (inc. VAT)
Same Capability as fx 180p + Hyperbolics (6 Functions)
fx 502P 51 Sci. Functions 256 Prog. Steps 22 Registers **£74.95** (inc. VAT)
fx 602P Alphanumeric — over 500 steps — up to 88 mems (inc VAT)

fx 31-29fns-Green Display	**£12.95**	*fx 120*-40fns-Green Display	**£17.95**	*fx 3200*-43fns-LCD-10 digit	**£21.95**
fx 39-40fns-Green Display	**£15.95**	*fx 310*-50fns-LCD	**£17.95**	*fx 6100*-39fns-Clock, Stp. watch, Alarm	**£19.95**
fx 68-38fns-LCD Credit Card	**£19.95**	*fx 330*-38fns-LCD	**£15.95**	*fx 7100*-39fns-Cl.,Alm.,Stp.wch.Cr.Cd	**£24.95**
fx 81-30fns-LCD	**£12.95**	*fx* 550 50fns-LCD-10 digit	**£19.95**	*fx 8100*-46fns-Cl.,Calendar,Alm.,Stp.wch.	**£24.95**
fx 100 College-44fns-LCD	**£16.95**	*fx 2600*-43fns-LCD	**£19.95**		

ORDER *NOW* BY TELEPHONE (24 hour) USING YOUR BARCLAYCARD/ACCESS NUMBER

SUMLOCK BONDAIN LTD.
263-269 CITY ROAD, LONDON EC1V 1JX
Tel: 01—250 0505 Telex 299844
Shops—Cannon Street Station, London EC4
360 Euston Rd. Nw1(near Gt Portland St. Tube)

Please send me . . . . . Photocopy page to avoid spoiling magazine.
Cheque/P.O. Enclosed £. . . . . Name: . . . . . .
Please Debit Barclaycard/Access Address: . . . . . .
. . . . . .
. . . . . .
Signed . . . . . .

WE STOCK THE ENTIRE RANGE OF CASIO CALCULATORS—Request FULL COMPETITIVE PRICE LIST

Pet Graphics Software

FOR 8K to 32K PETS EQUIPPED WITH PET 3022 OR 4022 PRINTER ONLY
(no disk drive and no plotter required)

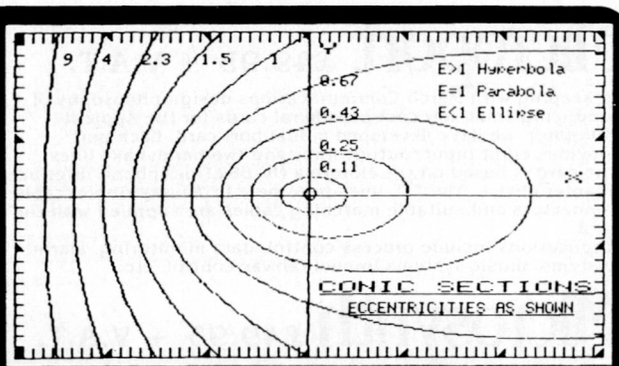

COMPUTACE LTD Infabco House, 552/556 London Rd, North Cheam Sutton, Surrey.

Curve Fit
Linear or general regression of any function to least squares data fit + full graph plot
Send for brochure

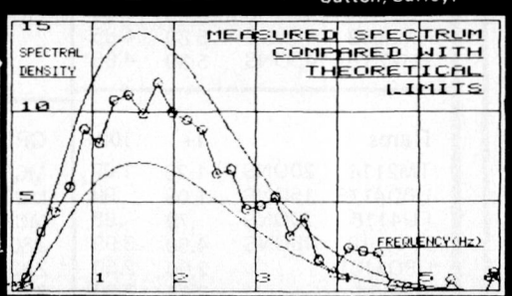

Professional quality, Single Pixel accuracy graphs are printed on the standard PET Tractor Feed Printer by the AUTOGRAPH programme: — Simple to use, all Basic Software, fully flexible graph dimensions and page position. Plots multiple X, Y functions on same axes. Automatic or manual scale selection options. Plain, Dotted or Squared graph background, comprehensive Alphanumeric labelling (as illus.) on and around graph enabling rapid, quality presentation. Send for brochure. **incl CURVE FIT**

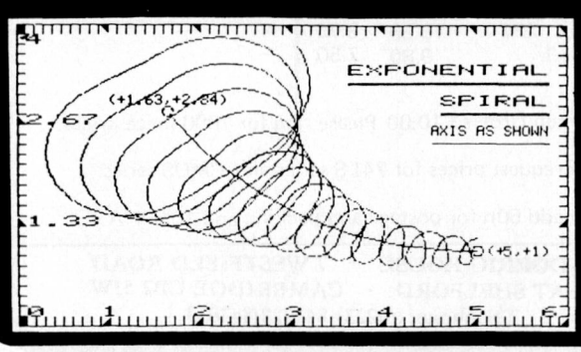

AUTOGRAPH is written and supported exclusively by ComputAce Ltd and is supplied with extensive documentation and after sales service.
(Please specify printer when ordering)

AUTOGRAPH 1 (16K, 32K only) Plots graphs in continuous line (as illus.) or in spaced dots £39.50 incl.

AUTOGRAPH II (16K, 32K only) As Autograph 1 but includes multiple data point plotting with joining lines and marking circles option (as centre graph).
Autographs 1 and 2 combined pack . . . . . .£49.50 incl.

CURVE FIT 2 (8K) Regression curve fit programme, £19.50 incl
CURVE FIT 1 (32K) As above but with graph plot, £55.50 incl

MARCHCARDS

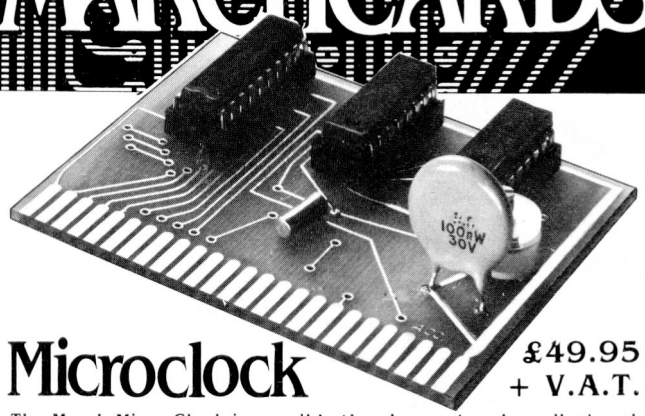

Microclock £49.95 + V.A.T.

The March Micro-Clock is possibly the cheapest and smallest real time clock card for the Apple II computer. The Micro-Clock is designed to provide a useful and economical timing facility for incorporation within the users own programs. The unit provides a time count from tenths of seconds to months and years. Once initiated the count will continue without supervision and can be read at any time without interfering in any way with the operation of Micro-Clock.
Possible uses include: micro-monitored experiments, micro-controlled processes, data logging, games and lots more.

Microtalker £84.95 + V.A.T.

The March Communications Micro-Talker I is designed for use with the Apple II computer and is based on the National Semiconductor Digitalker™ chip set. The basic vocabulary is in excess of 140 words. The speech system used involves digital compression of a REAL VOICE and thus Micro-Talker does not use animated robot-like phonetic generators. The result is a clearer and cleaner speech output than is usually achieved with conventional computer voice synthesis equipment.
The Micro-Talker I can be programmed from either low or high level languages with a minimum of software overhead. This then leaves maximum space available for user programs.
Applications include verbal warning devices, process control and data monitoring, point of sale terminals.

Microport £49.95 + V.A.T.

In keeping with March Communications design philosophy of producing small low cost peripheral cards for the Apple II computer, we have developed a dual port card. Each port provides eight input/output lines and two handshake lines.
The card is based on the Motorola MC 6821 peripheral interface adapter device. The TTL lines terminate in 20-way ribbon cable; connectors and suitable matching cables are supplied with the card.
Applications include process control, data monitoring, alarm systems, music systems, model railway control, etc.

Microsynth £49.95 + V.A.T.

The March Communications Micro-Synth produces complex sound waveforms under user program control. It consists of two AY-3-8910 programmable sound generator devices which enable the user to obtain both sound effects and music.
Possible applications include games, music composing aid, electronic organs.

THE COMPREHENSIVE HANDBOOKS CONTAIN THE NECESSARY SOFTWARE AND APPLICATIONS PROGRAMS REQUIRED TO MAKE FULL USE OF THE CARDS.

MARCH COMMUNICATIONS Ltd.
4 COMMUTATION ROW
LIVERPOOL L1 1JB
Tel. 051-207 7477

For details of the MARCHCARDS and a FREE copy of our comprehensive book list, fill in the coupon and post to:—
March Communications Ltd., 4 Commutation Row,
Liverpool L1 1JB

Name .....

Address .....

.....

Telephone .....

---

apple computer Sales and Service

BETTER PRICES!!



APPLE II PLUS APPOINTED DEALERS

COMPLETE SYSTEM FOR £1190

*48K Apple II Plus
*Disc Drive w/controller
*Visicalc or Magic Window
*Video Monitor
*Plus 12 months warranty



SHARP

MZ-80K, 20K £399
PC1211 Computer. . £75
CE121 Interface . . . £13
CE122 Printer. £69

Tandy

SPECIAL OFFER
SAVE £100!! ON
16K LII CPU £295.00
NORMAL PRICE £395.00

WANTED: Young sales person, good salary + commission.

Add 15% VAT
Delivery is paid at cost

DEANS Of Kensington
191, KENSINGTON HIGH STREET, LONDON W.8.
Tel. 01-937 7896 Ext. 3.

Infra Computer Components Ltd.

Eproms.		1+	100+
AM2708	450NS	1.97	1.70
FU2716K	450NS	2.45	2.19
FU2716	350NS	3.98	3.42
HM2532	450NS	5.80	4.85
FU2732	450NS	5.80	4.85

Crt Controllers	1+
SFF9636E	7.00
MC6845	10.00
MC6847	10.50

Rams		1+	100+
TM2114	200NS	1.26	1.09
UPD4116	150NS	1.05	.90
FU4116	200NS	.79	.68
MK4118	450NS	4.50	3.99
UPD5101		2.90	2.50
TC5114		3.25	3.00
HM6116	P3	9.85	8.75
HM6116	LP3	10.80	8.75
HM486413		9.80	7.50

CPU's	1+
MC6809	12.30
MC6802	5.50
MC6502	5.50
Z80CPU	5.25
Z80CPU4	6.25
8255	4.10

Minimum Orders £10.00 Please ring for 1000 piece prices.

Please request prices for 74LS series and CMOS series.

Please add 50p for postage and packing and 15% V.A.T.

PENDORRIC HOUSE · 7 WESTFIELD ROAD
GREAT SHELFORD · CAMBRIDGE CB2 5JW
Telephone: (0223) 841728/843953

WHY DON'T YOU PLAY A ROUND WITH OUR NEW GAMES?



Now a whole world of skilled entertainment is at your fingertips. LEISURE GENIUS introduces games like EXPLOSION, DEATH, and WORMS to test your strategic ability and your dexterity. Unlike most other computer games, you can play these with partners and opponents and you can play WORMS against your own micro. Invented by some of Britain's brightest experts, they are a challenge you can't pass up or put down. Don't let all work and no play make computing a dull business!

Each game is available on floppy disk for only £15.00 plus VAT from most computer retailers or direct mail order from:
Leisure Genius, Suite 504, Albany House,
324 Regent Street, London W1R 5AA
Telephone: 01-580 6361

In U.S. write to:
Leisure Genius, 34-36 83rd Street, Jackson Heights, New York 11372

Leisure Genius

MEMOTECH

48K MEMORY EXTENSION FOR THE ZX81

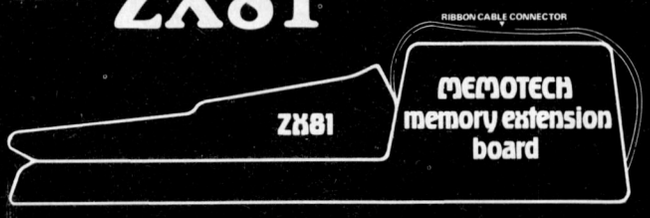

The MEMOTECH memory extension board will allow the ZX81 to run 48K Basic programs which may include up to 16K of assembly code.

The ZX81 sits on a custom built case which contains the **MEMOTECH** memory and a power supply which not only supplies power to the **MEMOTECH** memory, but also to the ZX81.

The MEMOTECH memory board has a fully buffered control-data-address bus with PCB 40 way header plug. All leads are provided.

The **MEMOTECH** memory costs:
£109.00 + 15% VAT in kit form. £129.00 + 15% VAT ready assembled. Please make cheques payable to **MEMOTECH**. **Delivery** in two weeks from receipt of order.

MEMOTECH, 103 Walton Street, Oxford.

TECHNICAL PROGRAMS

We specialise in producing technical programs for Microcomputers – PET, APPLE, and shortly ZX81.

All our Programs have been written by Professionals for Professionals in an easy to use, self prompting, conversational style.

If you fall into one of the following categories then we have a Program for you:

- STRUCTURAL ANALYSIS
- PIPING DESIGN
- ROTATING MACHINERY
- GAS PROPERTIES
- PIPELINES
- LAND SURVEYING
- PRESSURE VESSELS
- RETAIL JEWELLERY

(If your application is not listed, ask about our custom programming service – competitive rates)

Contact us for further details at:
TECHNICAL & SCIENTIFIC MICROCOMPUTER SOFTWARE LIMITED
The Parade, Frimley, Surrey GU15 5HY
Tel: 0276 23054 Telex: 858/47 SPC UKG

TECHNICAL & SCIENTIFIC MICRO-COMPUTER SOFTWARE LTD.

VIGIL FOR THE PET/CBM

VIGIL is an exciting, new interactive language for your PET/CBM. It's easy to learn and lets you quickly create games and graphics applications.



* More than 60 powerful commands for manipulating graphics figures
* Double density graphics give you 80 X 50 plot positions
* Large number displays, two timers and tone (with ext. speaker)
* LOADing and SAVEing of VIGIL programs to cassette or diskette
* Nine complete programs included - Breakout, SpaceWar, AntiAircraft, U.F.O., SpaceBattle, Concentration, Maze, Kaleidoscope & FortuneTeller.
* Comprehensive 50+ page manual
* For OLD, NEW or 4.0 Roms

	U.S. & CANADA	FOREIGN
VIGIL for PET/CBM on cassette or diskette w/9 programs	$35	$40
VIGIL User's Manual (refundable with software order)	$10	$12
VIGIL Interpreter Listing (6502 Assembler Language)	$25	$30
PET MACHINE LANGUAGE GUIDE (OLD, NEW, or 4.0 ROMS)	$9	$11

PET & APPLE II USERS TINY PASCAL Plus+ GRAPHICS



The TINY Pascal System turns your PET or APPLE II into a P-machine with:

* LINE EDITOR - creates, modifies and maintains source language
* COMPILER - produces P-code, the assembly language of the P-machine
* INTERPRETER - executes compiled P-code. Features built-in TRACE.
* STRUCTURED PROGRAMMING - CASE-OF, WHILE-DO, IF-THEN-ELSE, REPEAT-UNTIL, FOR-TO/DOWNTO, BEGIN-END, PROC, FUNC
* Graphics version has more - GRAPHICS, PLOT, POINT, TEXT, INKEY, ABS, SQR. PET/CBM has double density plotting and APPLE II has LORES and HIRES (with ROM Applesoft) - COLOR, HGRAPHICS, HCOLOR, HPLOT, PDL and TONE

	U.S. & CANADA	FOREIGN
TINY Pascal PLUS+ GRAPHICS VERSION includes manual		
PET 32K NEW/4.0 ROMS diskette	$50	$60
PET 32K NEW/4.0 ROMS cassette	$55	$65
APPLE II 48K and DOS 3.2/3.3	$50	$60
TINY Pascal NON-GRAPHICS VERSION includes manual		
PET 16K/32K NEW ROMS diskette	$35	$45
PET 16K/32K NEW ROMS cassette	$40	$50
APPLE II 32K and DOS 3.2/3.3	$35	$45
TINY Pascal User's Manual (refundable with software order)	$10	$12
TINY Pascal 6502 Interpreter Listing-GRAPHICS version	$25	$30
TINY Pascal 6502 Interpreter Listing-NON-GRAPHICS version	$15	$20
PET MACHINE LANGUAGE GUIDE $for OLD, NEW or 4.0 ROMS	$9	$11

VISA

master charge

ABACUS SOFTWARE
P. O. Box 7211
Grand Rapids, Michigan 49510

616 / 241-5510

Prices include postage.

Orders must be prepaid via check, money order or bank-card. Foreign orders may be paid for via international money order or bankcard: (Access,Eurocard,Barclaycard)

PET & APPLE II USERS TINY PASCAL Plus+ GRAPHICS





The TINY Pascal System turns your APPLE II or PET micro into a 16-bit P-machine. You too can learn the language that is slated to become the successor to BASIC. TINY Pascal offers the following:

* **LINE EDITOR to create, modify and maintain source**
* **COMPILER to produce P-code, the assembly langauge of the P-machine**
* **INTERPRETER to execute the compiled P-code (has TRACE)**
* **Structured programmed constructs: CASE-OF-ELSE, WHILE-DO, IF-THEN-ELSE, REPEAT-UNTIL, FOR-TO/DOWNTO-DO, BEGIN-END, MEM, CONST, VAR ARRAY**

Our new TINY Pascal PLUS+ provides graphics and other builtin functions: GRAPHICS, PLOT, POINT, TEXT, INKEY, ABS AND SQR. The PET version supports double density plotting on 40 column screen giving 80 x 50 plot positions. The APPLE II version supports LORES and for ROM APPLESOFT owners the HIRES graphics plus other features with: COLOR, HGRAPHICS, HCOLOR, HPLOT, PDL and TONE. For those who do not require graphics capabilities, you may still order our original Tiny Pascal package.

PET BASIC 4.0 version also available

TINY Pascal Plus + GRAPHICS VERSION-includes manual	
PET 32K NEW Roms cassette	$65
PET 32K NEW Roms diskette	$60
APPLE II w/ROM Applesoft only w/DOS	$60
TINY Pascal NON-GRAPHICS VERSIONS-includes manual	
PET 16K/32K NEW Roms cassette	$50
PET 16K/32K NEW Roms diskette	$45
APPLE II w/ROM Applesoft 32K w/DOS	$45
APPLE II w/RAM Applesoft 48K w/DOS	$45
USER's Manual (refundable with software order)	$12
6502 Assembly Listing of INTERPRETER-graphics	$30
non-graphics	$25

Includes Airmail Postage to Europe. Orders may be prepaid of by bankcard (include card number and expiration date) Eurocard, Access, Barclaycard, etc

ABACUS SOFTWARE
P. O. Box 7211
Grand Rapids, Michigan 49510

CREAM
HAVE
E-X-P-A-N-D-E-D

Cream, with its large modern shop centrally situated in Harrow (5 minutes from Harrow on the Hill Tube) has long been recognised as THE Computer Shop in North-West London to see and buy the latest in Apple and Commodore PET computer systems.

— NOW WE HAVE EXPANDED —
More professional demonstrators and consultants and AN EVEN GREATER PRODUCT RANGE!

PROFESSIONAL SERVICES

* The best demonstrators in town.
* First class consulants to help identify your specific business needs.
* Programming expertise second to none for special software and tailoring.
* Full after sales service and training of your staff.

PRODUCT RANGE

* THE Fullest range of Apple and Commodore Pet computers and the latest peripherals.
* MORE printers to choose from — Qumes, Okis, Epsons, etc.
* Excellent business software.
* **THE NEW VIC 20** personal computer with colour and sound — plugs straight into your TV — **Just £189.95 inc VAT.**
* Disks Tapes Books, Paper Ribbons.

FOR KEEN PRICES PROMPT DELIVERY AND THE BEST SERVICE IN TOWN —

CREAM COMPUTER SHOP

380 STATION ROAD, HARROW, MIDDLESEX HA1 2DE.

Open Tuesday — Friday 10am — 5.30pm — Saturday 10am — 5.00pm Tel: 01-863 0833/4

ACCESS BARCLAYCARD and MAIL ORDERS WELCOMED.

BUSS STOP

BUSS STOP

PROP: PHOTO ACOUSTICS LTD

Cash & Carry Prices





PET

apple®

A FULL RANGE OF PERIPHERALS AND SOFTWARE AVAILABLE.

RING NOW!!

58 HIGH ST
NEWPORT PAGNELL
BUCKS
TEL: (0908) 610625

255a ST ALBANS RD
WATFORD, HERTS
(entrance in Judge St)
TEL: 32006

BARCLAYCARD VISA

Mail order credit charge

Welcome Access

TEMPLEMAN SOFTWARE LIMITED

. . . Comprehensive packages for complete solutions to . . .

- ★ INVOICING
- ★ PURCHASE LEDGER
- ★ STOCK CONTROL/RE-ORDERING
- ★ PALLET/WAREHOUSING
- ★ WORD PROCESSING WITH ADDRESSING
- ★ PAYROLL
- ★ PRODUCTION CONTROL
- ★ HI FI RETAILING
- ★ GROCERY RETAILING
- ★ WHOLESALING

SOFTWARE IS OUR MIDDLE NAME

TEMPLEMAN SOFTWARE LTD

STRATFORD-ON-AVON

WARWICKSHIRE

Tel 0789 66237

Have you ever wished that you could~

see it,



file it,





sort it,

print it,

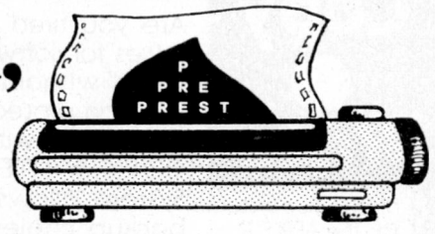



use it?

Well now you can, automatically.

It's a major breakthrough in computer communications, heralding a new era in information manipulation.

It's a British 'First'.

It's a brilliantly simple piece of 'kit' which makes it possible to call up Prestel or any other Viewdata System, to go automatically to any pages, to store, retrieve, sort and print information and to integrate it with an application program.

It's the Rostronics S-100 Viewdata board.

And it costs only £400.

See Prestel pages 42075. For more details contact John Pendreich, Rostronics Limited, 115-117 Wandsworth High Street, London SW18 4HY. Tel. 01-874 1171.

Dealership and OEM enquiries welcome.

ROSTRONICS

SPECIALISTS IN MICROCOMPUTERS

keep your apple][* online

Super Fan II

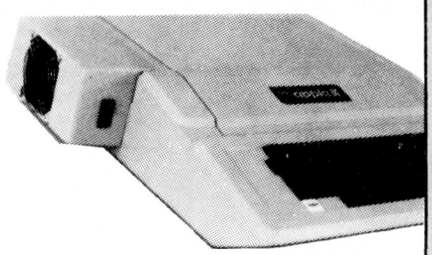

£ 60 + VAT

Heat is hardware's greatest enemy. The APPLE]['s design provides insufficient ventilation for peripheral cards. If you use several, the results could be disastrous. Cool your APPLE with the SUPER FAN II.

- Matches the APPLE case
- Clips on-no holes or screws
- Durable, quiet motor
- Separate switch with pilot light

Copy-Write

Disk Backup System for the APPLE][

£ 50 + VAT

Are you tired of paying high prices for software that is provided without backup? Now you can protect your software investment with COPY-WRITE. COPY-WRITE Disk Backup System allows you to make backup copies of your most valuable software. COPY-WRITE will duplicate virtually all disks, including the uncopyable protected ones. No longer will you be at the mercy of the original manufacturer to replace damaged disks or be forced to be without your software while a new disk is being shipped.

Additional Features

- Illustrated manual
- Allows visual examination of disk structure
- Special parameter files allow easy program updates
- Automatic half-tracking
- Synchronized copies
- Special fast copy feature (Data Mover)

Your order

can be placed by telephone. ACCESS and VISA cards accepted. Or send your order with payment to the following address. Please add 15% VAT. Postage and packing free.

Spreebond, Ltd., Unit 7 Haslemere
Parkwood Industrial Park, Sutton Rd.
Maidstone, Kent ME15 9LZ
Telephone (0622) 683 866

*APPLE][is a trade name of Apple Computer, Inc.

MACRONICS

ZX81 ZX

26 Spiers Close
Knowle, Solihull
West Midlands
B93 9ES England



1K Space Intruders £4.00
3K Super Version £5.00
Written in machine code to give fast moving 'Flicker Free' graphics. A superb achievement. Supplied as a listing only. (£1.00 extra if cassette required)

16K High Resolution £4.00 (192 x 184) graphic pictures
Never before achieved on the ZX Create your own artwork. Supplied as a listing (£1.00 extra if cassette required) with full screen demonstration picture.





9K Nightmare Park £3.75
A good example of a BASIC program using MACRONICS 'Amazing Active Display' The park of DEATH - can you get through this nightmare. No human has yet succeeded. Confronted by all sorts of 'Happenings' you'll be taken to your wits end. Supplied on cassette only.

BRAND NEW INTERACTIVE GRAPHICS for the 16k ZX81

DRAGON MAZE an exciting game of skill	£5.95
PLANETOIDS blast through the asteroids	£3.95
LAP RECORD random circuit car racing	£3.95
SCROLL rolling large text display	£2.95

Introductory offer: £12.95 all four listings

COMMODORE PETS

8032 Computer
8050 Floppy Disk
8024 Matrix Printer
8026 Daisy Printer Keyboard
8027 Daisy Printer Read Only
4032 Computer
4040 Floppy Disk
4022 Matrix Printer. *Phone for latest prices *

** VIC'S NOW IN **

Second Hand Equipment Brought & Sold. Call now.

Other printers we supply are: Qume, Ricoh, Epson, Centronics.

We also supply software: Visicalc, Wordcraft, Incomplete Records, Payroll, Stock Control, Invoicing, Sales & Purchase, Time Recording, Ozz.

All accessories are available from us and our other services include installation & training and maintenance contracts.

Please phone for a quotation of our typing, word-processing and personalised mail shot services.

DAVINCI COMPUTER SHOP
65 High Street
Edgware Midds
Mon-Fri. 9.00-4.30 Sat 9.30-5.00
or send for details.
Tel: 01-952 0526

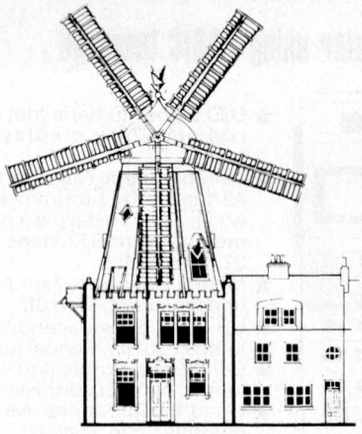

PLANNING

An important announcement from Claremont Controls

Available from Commodore dealers worldwide

Contact Claremont Controls
(0632) 610210 for further details

CRITICAL PATH OR PRECEDENCE NETWORK ANALYSIS
UP TO 1024 ACTIVITIES
PRINTED BAR CHARTS

A range of programmes to satisfy your most detailed planning requirements: they are easy to use and provide the tools you need to plan the future and monitor the present. Powerful features have been included for effective application throughout industry and commerce.

Claremont Controls Ltd, Chimney Mill,
Newcastle upon Tyne, England
NE2 4AL PCW8

Constructional software and Commodore computers working together for you

DO YOU USE AN APPLE SYSTEM IN YOUR BUSINESS?

LOOKING AFTER IT IS OURS

★COMPLETE SYSTEM COVER
★ FAST RESPONSE
★COMPETITIVE RATES
★FULLY TRAINED PERSONNEL
★OVER 600 SATISFIED CUSTOMERS



PHONE NOW FOR PRICES AND BROCHURE

DOWNHAM ROAD RAMSDEN HEATH BILLERICAY ESSEX

ON-SITE MAINTENANCE TEL. 0268-710292

FROM

COMMERCIAL DATA SYSTEMS LTD

HEAD OFFICE

AUTHORISED SERVICE CENTRE CORVUS APPLE

PROGRAMMABLE CALCULATORS

Powerful high-speed FX702P computer using BASIC language



CASIO FX-702P
(R.R.P. £134.95)
ONLY £119.95
Available September

LCD scrolling display of alpha/numeric (dot matrix) characters. Input can be varied from 1680 program steps with 26 independent memories to 80 program steps with 226 memories. (All retained when switched off). Up to 10 programs can be stored (P0 to P9). Subroutine: Nested up to 10 levels. FOR-NEXT looping: Nested up to 8 levels. Straightforward program debugging by tracing. Editing by moving cursor. 55 built-in scientific and statistical functions, can be incorporated in programs. Program/data storage on cassette tape via optional FA-2 (available soon). Optional FP-10 mini printer and plug-in ROM modules available soon. Two lithium batteries give approx. 200 hours continuous operation, with battery saving Auto Power Off after approx. 6 minutes non-use. Dimensions: 17 x 165 x 82mm (⅝ x 6½ x 3¼"). Weight: 180g (6.3oz).



CASIO FX602P
(R.R.P. £84.95)
ONLY £74.95

- ★ LCD alpha/numeric (dot matrix) scrolling display (86 types)
- ★ Variable input capacity from 32 functional program steps with 88 independent memories, to 512 steps with 22 memories.
- ★ Memory and program retention when switched off.
- ★ Up to 10 pairs unconditional jumps (G010). Manual jump.
- ★ Conditional jumps and count jumps. Indirect addressing.
- ★ Up to 9 subroutines. Nesting possible up to 9 levels.
- ★ 50 built-in scientific functions, all usable in programs.
- ★ PAM (perfect Algebraic Method) with 33 brackets at 11 levels
- ★ Ultra high-speed calculations.
- ★ Program storage on cassette tape using optional FA-1.
- ★ Compatible with FX-501/2P.

★ 2 lithium batteries. Approx. 660 hours continuous use.
★ Battery saving Auto Power Off.
★ Only 9.6 x 71 x 141.2mm. 100g.

Prices include V.A.T. and P. & P. Send your company order, cheque, p.o. or phone your ACCESS or BARCLAYCARD number.

DELIVERY NORMALLY BY RETURN POST

TEMPUS

LEADING CASIO DISTRIBUTORS
DEPT. DEPT. PCW
164/167 EAST ROAD, CAMBRIDGE, CB1 1DB
TEL: 0223-312866

OASIS SOFTWARE

....PRESENT....

FOR THE **TRS 80** LEVEL II
AND VIDEO GENIE

KBOARD

FEATURE BY F. JOHNSON ACTION

MEMRESET	Set memory size
GOTO/GOSUB	Indirect references
ERRORS	Displayed in full
KEYBOUNCE	Eliminates keyboard bounce
RUN "KEY	Auto Run from tape
MN	Screen Printer (LList/LPrint)
VLDAD	Displays any program/data coming from tape
INSTR$	Find String
MID$	Replace part of string
OUTPUT	Gives sound effects
GRAPHICS	Powerful new graphics features
&H	Hex to decimal
&D	Decimal to Hex
DEF KEY	Define User Keys
DEF LIST	Display Defined Keys
DEF EDIT	Alter Defined Keys
DEF USR	Define User Calls 0–9
EDIT/LIST	Graphics characters displayed in Listings & Edits
SPECIAL FUNCTIONS	One key Edit/List/Run/Cont

Also for the TRS80/VIDEO GENIE — By the same Author

DEF FN	Define Functions
DEF (0-7)	Video Scroll
NUMBER	Fast, Flexible Reumbering routine
VARTAB	Full Variable Table for easier debugging
MERGE	Effortless program and subroutine joining from tape
SAVE	Saves time and memory by deleting spaces and/or REMs

ALL OASIS PRICES INCLUDE P&P & VAT
NUMBER,VARTAB,SAVE,MERGE £6.50 EACH, KBOARD + MANUAL £19.50
SPECIAL OFFER–ALL FIVE–THE COMPLETE SET ONLY £37.50
SEND A LARGE SAE FOR THE FULL OASIS CATALOGUE TO:

OASIS SOFTWARE
LOWER NORTH STREET CHEDDAR SOMERSET
PLEASE STATE MEMORY SIZE WITH ORDER

MASTER THE MIGHTY MICRO.

RENT OR PURCHASE A MICRO

We supply micro wordprocessing and accountancy microcomputer systems for full home and office use. A complete micro system including printer with full wordprocessing is £12.50 a week.

TAILOR MADE SOFTWARE

The micro should fit your company, not your company the micro. We produce programs and systems that do exactly what you want in your business.

TRAINING COURSES

Training courses in wordprocessing, micro operating, micro computers, micro processing and micro data processing for executives, secretaries, businessmen, students, accountancy personnel and hobbyists. These short courses are attended week days, evenings and weekends and are all with 'hands on experience'.

TEL: 01·730·8791 TODAY

LONDON MICRO CENTRE only 3 mins from Victoria Station



RETAIL ONLY

THE LONDON MICRO CENTRE

An EMG Company.

47, Lower Belgrave St., London, SW1.

The Currah Mini Digital Recorder is the fast and simple alternative to Disc



- High Read/Write speed - 6000 baud (10-20 times faster than audio cassette)
- High data integrity (error better than 1:10⁹)
- No keys - under software control - facilities normally only available with disc
- Uses proven Philips mechanism
- Large capacity - up to 120K bytes
- Additional RAM and ROM
- Firmware included
- Robust construction/ Attractive appearance
- Compatible with 6502 based computers including

£195
+ postage and packing + VAT

SEND FOR FULL DATA NOW!

PCW

To: Currah Computer Components Ltd.,
Graythorp Industrial Estate, Hartlepool, Cleveland, TS25 2DF.

Please send me

- ☐ 220m recorder £227.40 inc. P & P. and VAT
- ☐ Box (6) Cassettes £18.80 inc. P & P. and VAT
- ☐ Further Information

Money Back Guaranteed if returned in 7 days.

I enclose my cheque/postal order for £..... or debit my Access/ Barclaycard No.....

Name .....

Address .....

.....

Signature ..... *please allow 28 days for delivery*

DISTRIBUTORS REQUIRED IN SELECTED AREAS

CURRAH
COMPUTER COMPONENTS LIMITED
GRAYTHORP INDUSTRIAL ESTATE
HARTLEPOOL, CLEVELAND TS25 2DF
Telephone: (0429) 72996

FREE SOUND WITH VIDEO GENIE

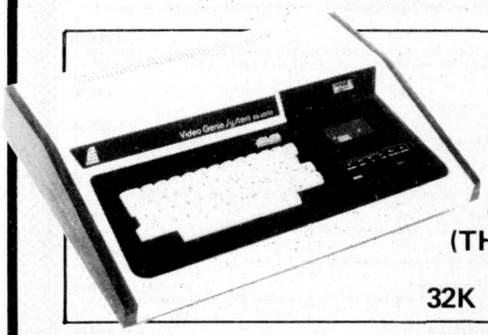

NEW "SUPER GENIE" WITH UPPER/LOWER CASE AS STANDARD ONLY £299 INC. SOUND! (THIS IS THE LATEST MODEL NOT AN UPGRADE) 32K EXPANSION BOX ONLY £279

* GENIE II *
THE BUSINESSMAN'S MOST COST EFFECTIVE COMPUTER INCLUDING NUMERIC PAD AND SOUND ONLY £329



EUROPE'S FASTEST SELLING ONE BOARD COMPUTER
COMPUKIT UK101

1K KIT £99.95
8K KIT £119.00
8K BUILT £159.00
(8K BUILT WITH FREE SOUND)

EPSON PRINTERS
MX80T — £329
MX80F/T — £379

DISC DRIVES FOR VIDEO GENIE (40 TRACK)
SINGLE — £195
DUAL — £380

DISC CONTROLLER/24K EXPANSION FOR UK101/SUPERBOARD ONLY £189

SEIKOSHA PRINTER NOW ONLY £179

KRAM ELECTRONICS,
VICTORIA HOUSE,
17 HIGHCROSS ST.,
LEICESTER.
TEL. LEICESTER 27556

ATOM OWNERS
LOOK OUT
There are DODGEMS about!

Dodgems is just one of the brand new games packs from Acorn, the manufacturers of your Atom. You have to steer your car around the lanes collecting points. But beware! There's a computer controlled car programmed on a collision course. If you survive the game gets faster. Also in Games Pack 6 are Simon and Amoeba.



GET THE BEST—FORGET THE REST

All Acornsoft games are designed and produced by the manufacturers of the Atom. Trust the manufacturer to get the very best out of his product. Realistic sound effects, great graphics and colour too!

GAMES PACK 1
Asteroids Shoot them before they crash into you. Lists ten best scores. Program 4K, graphics 6K.
Sub Hunt Command a destroyer tracking a submarine, find its position and destroy it. Program 1K, graphics ½K, needs floating-point.
Breakout Score points knocking bricks from wall. Ball has two changes of angle and speed. Program 3K, graphics 1-2K. COLOUR

GAMES PACK 2
Dogfight Two-player game; each player controls a plane and tries to shoot down his opponent without crashing. Program 4K, graphics 6K.
Mastermind Guess the computer's code before the computer guesses yours; program 3K, graphics ½K.
Zombie Land on Zombie island; try to lure all the zombies into the swamp. In desperation jump into hyper-space! Program 3K, graphics ½K. COLOUR

GAMES PACK 3
Rat Trap Move your rats without colliding with the trails left. Entangle your opponent before he entangles you! High-speed rat action-replay. Program 4K, graphics 6K.
Lunar Lander Land a spacescraft on a lunar crater; altitude velocity, fuel and drift. Program 1K, graphics ½K.
Black Box Deduce the position of four invisible objects in the Black Box by firing rays at them. Program 4K, graphics ½K.



GAMES PACK 4
Star Trek Classic computer game; rid the universe of Klingons. Short and long-range scans, galactic map, phasers, photon torpedoes, shields etc. Program 5K, graphics 2K.
Four Row Take turns in placing marbles on the board; the first to get a line of four wins. Program 5K, graphics 6K. COLOUR
Space Attack Repel the invasions of earth and avoid being hit by the gunner ships. Becomes progressively harder with each invasion. Program 3K, graphics 6K.

GAMES PACK 5
Invaders The most popular video game, with invaders, flying saucers, shelters, and full sound effects. Program 5K, graphics 6K.
Wumpus Wander in caves inhabited by the Wumpus. Find and shoot him before he eats you. Pits and bats make things harder. Program 2K, graphics ½K.
Reversi Reversi, or Othello played with counters that are black one side and white on the other; Program 3K, graphics ½K. COLOUR

GAMES PACK 7
Green Things An alien life-form has invaded your space-craft; discover a way of destroying it with the weapons available on the ship Program 5K, graphics 2K. COLOUR
Ballistics Take turns in firing shells at the other player, taking into account the wind and shape of the hill, Program 3K, graphics 6K, needs floating-point.
Snake Grow yourself a snake by guiding it towards digits which it eats. Program 2K, graphics ½K.



ORDER TODAY!

Just send a cheque or money order. Only £11.50 per pack including VAT and post and packing. State which packs you want. Or ring **0223 316039** or **01-930 1614** quoting your Access or Barclaycard number. Allow 14 days for delivery. Or if you think you can wait for more details just write to **Acornsoft Limited, 4a Market Hill, Cambridge.**

ACORNSOFT TAKE GAMES SERIOUSLY

Pete & Pam Computers

apple computer

APPLE SYSTEM SALES AND SERVICE IN BOTH LONDON AND LANCASHIRE

Competitive Quotes and Personal Service

Ring Chris Gillard in London — Pete or Pam Fisher in Lancashire

We welcome dealer enquiries. All the products we advertise are available from your local dealer.

RAMCARD £99.95
A 16K Expansion card for your Apple. It will provide additional memory for Visicalc, load integer from a System Master and is fully compatable with Apple's Pascal System. The only board with Neon Read/Write indicators.

Z-80 SOFTCARD £195.00
A Z-80 microprocessor for Apple. Comes with CP/M operating system and Microsoft Basic 5.

COBOL 80 £299.00
FORTRAN 80 £109.95
BASIC COMPILER £199.00
ASSEMBLY LANGUAGE DEVELOPMENT £79.00

80 COLUMN BOARDS
Take your pick—
SUP-R-TERMINAL £195.00
VIDEX £185.00

PASCAL JOB CONTROL SYSTEM — From High Technology £295.00
A fast, sophisticated job control/costing system able to control costs on 400 jobs, providing useful reports and maintaining 50 cost centres with 500 sub cost centres. Worth its weight in gold!

DB MASTER £129.95
The Data Base with 100 fields operating on multi-diskette files for large capacity.

DB MASTER Utility Pack No. 1 £60
Links DB master with Apple Text Files and Visicalc 3.3. Add, delete or change existing DB Master Fields and more.

DB MASTER for Corvus available soon £295

INFORMATION MASTER — Data Base £79.00
A dream to use, has advanced facilities such as global change and calculator mode of entering figures. A system that a novice can use with ease.

DATA MASTER £55.00
A utility for use with Information Master. Allows the splitting of a data base system selectivity, change of field types and transfer of print formats.

TRANSIT £29.00
A utility that enables you to link Information Master to many files including those created by Visicalc.

VISICALC 3.3 Our Price £105.00
At last — Visicalc on 16 sector DOS 3.3 with 12 additional commands. Enhanced Manual is included.

VISIDEX £105.00
New from Personal Software. Type in whatever key words. Phase dates or numbers you want the info to be associated with and store it away.

VISITERM £79.00
Allows your computer to communicate with larger computers or other personal computers. Link your personal computer with your company's mainframe.

VISIPLOT £85.00
Automatically creates high resolution graphs and charts. Visualise data in six different formats and six different colours. Data can be directly entered or data files loaded from Visicalc 3.3.

VISITREND £129.00
Allows you to perform sophisticated math operations on time series data such as stock prices or production figures. Includes: Multi line regress, cumulative total, percent change, lead/lag, moving averages, smoothing and various transformations
which let you create new time series. This package also includes Visiplot.

WORDSTAR for Apple £179.00
If you want the best in word processing for Apple then Wordstar is the answer. Very well documented and great to use. Require the installation of a Z-80 Softcard.

MAILMERGE £69.00
Allows you to maintain name and address lists and merge fields into text to form personalised letters etc.

Z TERM £59.95
Software that allows you to emulate the terminal of your choice whilst using Apple with a Z-80 Softcard.

THE MILL £249.95
A 6809 plug-in board for Apple can run at full speed whilst the 6502 runs at 20%. Comes with either a Pascal speed-up kit to increase the speed of execution of Apple's U65D Pascal or a 6809 assembler.

DAKIN 5 PROG AIDS 3.3 £49.00
12 Utility Programmes in one pack.

APPLE HOW TO £29.95
Requires Int Basic or 16K Expansion Card — teaches calculating and programming.

APPLE MUSIC THEORY £29.95

RAMEX 16 £89.95
UK entrant to the expansion card market — does not need to be ribboned to the memory area.

ECHO II Speech Synthesizer £139.95
Based on TMS 5200 chip from TI — type in speech direct from the keyboard.

EXPANSION CHASSIS £399.00
Long awaited — here at last. More slots for your Apple.

MOUNTAIN CPS — multi-function card £159.95
A bi-directional serial interface — parallel port and clock/calendar card — all on one board. Can be made to use phantom slots.

MEMORY MANAGEMENT SYSTEM £29.00
A utility that moves DOS onto a 16K expansion card — freeing motherboard Ram space for larger programs.

SUPERB JOYSTICK £19.95
2 buttons — excellent quality — smooth action.

OLYMPIC DECLATHLON from Microsoft £12.95
Superb Hi-Res Graphics — Winner of this year's WCCF prize for creative programming.

FLIGHT SIMULATOR by Sub-Logic Disk £19.95 Cassette £14.95
So realistic — you might feel airsick! — be warned!

DRAGON FIRE from Dakin Corp. £29.95

WIZARDRY from Sir-Tech £29.95
PASCAL ADVENTURE needing only 48K.

Apple Galaxian — Galaxy Wars — Head-On — Galactic Revolution — Galactic Trader — Galactic Empire — Mystery House — Bridge Partner — Checker King — Gammon Gambler — Roulette — Craps — Apple 21 — Puckman — Global War — Space Warrior — Apple Typhoon — Apple Panic — Sneekers — Galactic Attack — Gorgon by Nasir. **All at £13.95**

Microsoft Adventure — ABM — Dog Fight — Phantoms Five — Orbitron — Pulsar — Microchess 2.0 — Odyessy — La Land Monopoly — Merloc's Tower — Rescue at Rigel — Space Eggs — Trilogy of Games — The Prisoner — Raster Blaster — Autobahn — Space Raiders — Tawala's Last Redoubt — Gamma Goblins — Apple Panic. **All at £15.95**

Computer Conflict — Computer Quarterback — Cartels and Cutthroats — Space Album — Bill Budge 3D Graphics Tutor — Cyber Strike — 3 Mile Island — Adventure 123 — Adventure 456 — Adventure 789 — Hi-Res Soccer — Temples of Apshai — Hellfire Warrior — Zork. **All at £20.95**

Buy any five games and you can deduct 10% off the total price!

Authorised Apple Sales and Service

LONDON RETAIL, 98, Moyser Road, London, SW16 6SH
Tel: 01-677 2052/7341

MAIL ORDER AND DISTRIBUTION, Waingate Lodge, Waingate Close, Rossendale, Lancs. BB4 7SO
Tel: Rossendale (0706) 227011

Prices do not include VAT. Please add 15% VAT to your remittance. Postage and packing FREE.

CASCADE COMPUTERS OF NEWBURY

Telephone: (0635) 201591

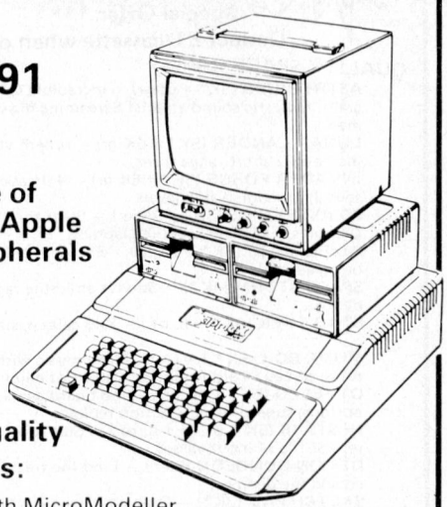

for the full range of Apple products, Apple compatible peripherals

and these high quality software products:

*Financial Modelling with MicroModeller

*Decision Evaluation with VisiCalc, Desk Top Plan and Apple Plot

*Integrated Accounts, Stock Control and Job Costing with TABS Accounting Business Systems

*Word Processing with AppleWriter and TAB Writer

*Portable Software Development with CIS-COBOL and PASCAL

Apple Computer Specialists

ZX81 owners

have you seen

The Cambridge Collection

A book of

30 PROGRAMS

For Only **£4.95**

NO MEMORY EXPANSION NEEDED

Each program has been designed to fit into 1K of RAM

TEACH YOURSELF PROGRAMMING

Comprehensive explanations of each listing will teach you many techniques of **ZX81** programming.

HOURS OF AMUSEMENT

With titles such as FORTRESS, BALLOON, and ODD MAN OUT, you could easily become a **ZX81** addict. Plus, entirely new implementations of well-known favourites; LUNAR LANDING, MASTER CODE, ORBITAL INVADERS, and many others.

CASSETTE AVAILABLE TOO!

If you order the book you can also buy the programs on a quality cassette for only £4.95 extra.

Please send me:

copies of the book at **£4.95** each

copies of the book and cassette at **£9.90** pair

Please send your orders with cheques/PO's to:

Richard Francis, Dept PCW
22 Foxhollow, Barhill, Cambridge, CB3 8EP.

GATEPOST

Gate now sole UK Distributors for Strategic Simulations Inc!
Quality Games for your Apple!

2 more great new games from Strategic Simulations
Computer Quarterback & President Elect available now, from Gatepost – see below!

From Strategic Simulations, we can now offer:

COMPUTER QUARTERBACK (48k-D). A real time strategy football game for 1 or 2 players. Pick your own team! £27.00

PRESIDENT ELECT (48k-D). Change the course of history – rerun the last 2 elections – stand yourself! £27.00

COMPUTER NAPOLEONICS (48k-D). Traditional wargame – 1 or 2 players – meticulous detail and realism £40.50

COMPUTER BISMARK (48k-D). Simulation of this historic ship's battle with British Home Fleet. 1 or 2 players. £40.50

COMPUTER AMBUSH (48k-D). World War II man-to-man street fight in French town. 7 scenarios, 1 or 2 players. £40.50

COMPUTER CONFLICT (48k-D). 2 Games for 1 or 2 players in HIRES graphics – modern warfare with tanks and infantry £27.00

COMPUTER AIR COMBAT (48k-D). 36 famous World War II planes accurately simulated, HIRES graphics, 1 or 2 players £40.50

OPERATION APOCALYPSE (48k-D). HIRES graphics, 4 scenarios of WWII. 1 or 2 players – recreate actual battles. £40.50

TORPEDO FIRE (48k-D). 3-D graphics periscope view of fleet of 30 different WWII vessels. 1 or 2 players. £40.50

THE WARP FACTOR (48k-D). 1 or 2 player strategy space game with 12 starship designs – light years ahead of the rest! £27.00

CARTELS AND CUTTHROATS (48k-D). 1 to 6 player business strategy game. You select difficulty (advanced version will beat the boss!) – an accurate business simulation. £27.00

THE SHATTERED ALLIANCE (48k-D). First in a new series – send for full details. £40.50

Of course we still stock the best from other software houses! Our most popular sellers are:-

SARGON II (24k-D). The champion chess game for Apple £23.85

A2-FS1 FLIGHT SIMULATOR (34k-D). Extended and improved version, including British Ace 3D Aerial Battle Game £23.60

THE PRISONER (48k-D). A nightmare world of 1984 – very difficult – uses every trick, including subliminal techniques £21.00

THE WIZARD AND THE PRINCESS (48k-D). This has to be the best HIRES adventure game. 100s of pictures. We're still trying to get past the giant! £23.00

ASTEROIDS IN SPACE (32k-D). Blast approaching asteroids – watch out for debris – and aliens! £13.55

SPACE (48k-D). Simulation of human life in space. You develop characters and games. £20.35

SPACE EGGS (48k-D). Shoot down the aliens as they hatch – great arcade game £20.35

ADVENTURELAND (32k-C) An enchanted world of lost treasures, wild animals and magical beings. £10.15

TEMPLE OF APSHAI (48k-D) Mythical labyrinth with fearsome monsters and treasure. £27.15

SAUCER WARS (24k-C) One person game with 150 levels of difficulty. £11.55

VOYAGER EXCURSION (24k-C) Hires lunar landing game. £11.55

GOLF (20k-C) 18 holes for 1 or 2 players – full choice of clubs and direction. £5.55

AIR FLIGHT SIMULATION (16k-C) ONLY £7.15

B-1 NUCLEAR BOMBER (16k-C) Fly through Russian defences – and back, missiles, to bomb your target £10.40

AKALABETH (48k-D) 10 HIRES monsters, infinite dungeons, perfect perspective £24.00

NEW NEW NEW NEW NEW NEW NEW

DOS BOSS (32k-D) Dos 3.3 Super value utility – change dos, rename commands, plus lots more! Loads of tips in manual £16.25

BEAGLE BROTHERS GAME PACKS (32k-D) 4 different packs of super games – even includes magic tricks! Each pack £16.25

GAMMA GOBLINS (48k-D) Defend your body against all manner of intravenous nasties. Super HIRES arcade game £23.15

GORGON (48k-D) Gorgons materialise from air to steal your man. Defend him with your fighter. Beats space invaders out of sight for HIRES graphics and action. Easily worth £30.85

PLUS LOTS MORE!! Send large stamped addressed envelope for our full list.

All programmes listed above are written in Applesoft or machine code. C = on cassette, D = on diskette.

ALL THE ABOVE PRICES ALREADY INCLUDE VAT! Just add 50p for post & packing and send your order with cheque or PO to our address below.

Please note, we endeavour to obtain the best possible prices. However, prices are subject to change in the event of dollar fluctuations.

STOP PRESS STOP PRESS STOP PRESS STOP PRESS

SERIOUS STUFF DEPARTMENT

THE FAST ONE – no not LAST, FAST!

THE HAYDEN APPLESOFT COMPILER – We've Benchmarked it and amazed ourselves with the results! It's selling like hot cakes, and no wonder!

S.A.E. for details and benchmark, or for the full kit £125.00 plus VAT and £1.00 p&p

Dealer enquiries welcome.

GATE MICROSYSTEMS LIMITED
The Nethergate Centre,
35 Yeaman Shore,
Dundee.

PROGRAM POWER

NASCOM 1 & 2

Keys of Kraal (24K/B/G) — superb adventure game PLUS exciting graphics. Fight the monsters & demons in real time. Swords flash, arrows fly & spells home-in. Endless hours of enjoyment. £8.95

Vortex (MC) — Speed up your display of pixel graphics. 29 routines called from BASIC. Manipulate 2 screen images & then update your VDU. Changes appear instantaneous. Extensive examples and instructions supplied. State 16, 32 or 48K. £8.95

Serpent (MC/G) — 8K of incredible M/C code. An interactive game 'par excellence'. Torpedo the moving snake-like sea serpents & the marauding killer whales. Five levels & special missions with almost infinite skill settings. £5.95

Galaxian Attack (MC/G) — Fast machine code space game, featuring diving Galaxian spacecraft. 10 speeds from good to impossible. No barriers for protection. Highest score displayed. £8.95

Blackjack (16K/B/G) £5.95
Cowboy Shoot-out (MC/G/Sound) £4.95
Road Race (MC/G/Sound) £4.95
Tantaliser (B/G) £3.95
Vocabulary Tutor (B) £5.95
Fruit Machine (B/G) £4.95
Spider (B/G) £4.95
Death Run (B/G) £3.95

** **NASCOM 1** — Cottis Blandford cassette interface — for N2 format, reliability and fast load £14.90

WRITTEN ANY PROGRAMS? WE PAY HANDSOME ROYALTIES!

Please add 55p/order P&P + VAT @ 15% or Sae for FULL catalogue (over 60 items)

All programs supplied on cassette in Kansas City/CUTS format (listings available)

PROGRAM POWER
5 Wensley Road
Leeds LS7 2LX
Tel. (0532) 683186

PROGRAM POWER

MORE NEW PROGRAMS FOR ACORN ATOM ★

** Special Offer ***
Deduct £1/cassette when ordering 2 or more

QUALITY SPACE GAMES

ASTROBIRDS (5K* + 6Kgr) — incredible GALAXIAN type program, fantastic sound effects! Screaming missiles, swooping birdmen £8.95
LUNAR LANDER (5K* + 6K gr) — superb version of arcade game incl long & short range scans. £8.95
INVADER FORCE (5K* + 6K gr) — 4 invader types, mother ship, sound, hi-score, 6 skill levels. £8.95
3D ASTEROIDS (3K* + 2K gr) — Steer through the rolling, hurtling asteroids. Excellent real life graphics. £6.95
ALIEN MAZE (5K* + 2K gr) — Escape the 3D labyrinth before being eaten. £5.95
SPACE STORM (4K*) — Survive amid the raging comets & space debris. £4.95
STAR TREK (5K* + fl. pt.) — 8x9 galaxy, starbases, torpedoes etc. £6.95
MUSIC BOX (5K* + VIA) — Make music with your Atom. Compose tunes or key in old favourites. Hours of enjoyment. £8.95
OTHELLO (5K* + 2K gr) — trad board game, 5 levels of skill, many options, superb version, action replay. £5.95
HI-STATS (5K + 6K gr + fl. pt.) — Statistical analysis & graphical rep. of file of input values. £7.95
DEMON DUNGEON (5K*) — Find the treasure, the way out & escape the demons. £6.95
SKETCH PAD (3K*) — Draw in black on white & vice versa. Many options incl choice of gr. modes & save & recover routines. £6.95
DISASSEMBLER (3K*) — Lists object code & assembler mnemonics. £6.95
DAMBUSTERS (3K* + 2K gr) — Realistic bombing raids, bouncing bombs etc. £4.95
ZOMBIES (Real Time) + **DEMOVADERS** + **LASER FIGHT** (3K*) £6.95
LABYRINTH + SLOT RACER (5K* + 6K gr) £6.95
MINEFIELD + SNAKE + AWARI (2K*) £5.95
TERRITORY + AZTEC (3K* + 2K gr) £5.95
EXTRA MEMORY 2 x 2114 Low power chips. £3.75

WRITTEN ANY PROGRAMS? — WE PAY 20% ROYALTIES!

Please add 55p/order P&P + VAT @ 15%. Send Sae for catalogue.

PROGRAM POWER
5 Wensley Road,
Leeds LS7 2LX.
Tel (0532) 683186

THE WESTFARTHING SMALL BUSINESS SYSTEM

for Apple & other micros

Designed from first principles for the family business and small professional practice, it will pay for itself by keeping the accounts in good order, saving management time on paperwork, and accountant's fees.

FUNCTIONS: (in short, everything you need)

* Invoicing (+ discounts, quotations, delivery notes)
* Customer accounts and shop sales
* Bank and cash balances calculated weekly
* Sales and overheads (30 categories) totalled weekly
* VAT return calculated (while you have lunch)

SPECIAL FEATURES FOR OWNER - MANAGERS:

* VAT - inclusive bills split automatically
* Messages can be printed on invoices
* Automatic payment entry when customer pays on the spot
* Uses plain fanfold paper, or headed sheets.
* Prints s/a customer address labels
* User's manual (50 pages) in clear, non - technical style
* Designed to be user - modifiable

Also available in the same suite:
Professional practice accounting. Job costing.
Car salesman's contact index system.
Cost of programs £500 - £750.

Westfarthing Computer Services Ltd.
21 Wendron St. Helston. Cornwall.
Tel: Helston [03265] 4098.

NASCOM SOFTWARE

We offer the following quality software for NASCOM systems:

NASPAS — a 12k PASCAL compiler which produces Z80 code directly, i.e. no P-code. The compiler offers floating point and integer arithmetic, arrays, sets, strings and all major Pascal statements together with fully recursive functions and procedures with value and variable parameters. The object program runs very quickly. Price: **£35.00**

NASMON — A new monitor for NASCOMs. Occupies 4k and includes a sophisticated screen editor, a 'front panel' mode, blocked and buffered tape routines and powerful debugging commands. Price: **£30.00 in EPROM**

BAS12K — a 12K BASIC interpreter offering 11 digit precision arithmetic, PRINT USING, IF. . .THEN. . . ELSE and other advanced features. Price: **£25.00**

NASGEN — a fast 3K assembler generating a full symbol table and with many assembler directives and commands. Price: **£15.00** on tape, **£25.00 in EPROM.**

NASNEM — a 2½K disassembler which interfaces to NASCOM's front panel to produce single step disassembly. Optionally it produces labels and o/p may be directed to a text buffer suitable for NASGEN. Price: **£10.00** on tape, **£15.00 in EPROM.**

All the above software runs under **NASMON** except **NASPAS** which can run under **NASMON** or **NAS-SYS.** All prices are fully inclusive.

FREE: a free **CHESS** program with every order of **NASMON.**

GEMINI DISK OWNERS: HISOFT offer a Z80 development package to run under CP/M 1.4 on the Gemini Floppy Disk System. Included in the package are:
— a powerful screen editor.
— a fast Z80 assembler with conditional assembly.
— a debugger based on the Front Panel of NASMON together with a labelling Z80 disassembler. All this for the inclusive price of: **£50!**
Send for details NOW.
Full details may be obtained from:

HISOFT 60 HALLAM MOOR, LIDEN, SWINDON, WILTSHIRE.

DTL-BASIC COMPILER

The only BASIC Compiler fully compatible with the full range of Commodore Microcomputers.

- ★ Up to 20 times faster when compiled
- ★ More compact object code e.g. a 24K program when compiled would run on a 16K machine
- ★ Available now on 3000, 4000 & 8000 Series machines
- ★ DTL-BASIC handles full arithmetic expressions
- ★ The compiler copes with nested loops, handles arrays and variables dynamically and accepts extensions to Basic
- ★ Thoroughly supported by a comprehensive manual and full back-up from Dataview.

Unique new security system for compiled programs for use by Software Houses — ring us for details — Colchester (0206) 865835

£360.00 + VAT
special prices for education

Dataview Ltd, Portreeves House, East Bay, Colchester, Essex.

Dataview

'SUPERBRAIN' IN THE NORTH WEST

SUPER

VALUE FOR MONEY MICRO-COMPUTERS WITH EXCELLENT SUPPORT FACILITIES

SUPER

SERVICE, NORTHWEST OPERATED C.A.R.E. FACTORY APPOINTED AFTER SALES TECHNICAL SERVICE.

SUPER LEASING

THE "SUPERBRAIN" CAN BE LEASED FOR £11.25 PER WEEK (+V.A.T.) OR A COMPLETE WORD PROCESSING SYSTEM FOR ONLY £18.00 PER WEEK (+V.A.T.)

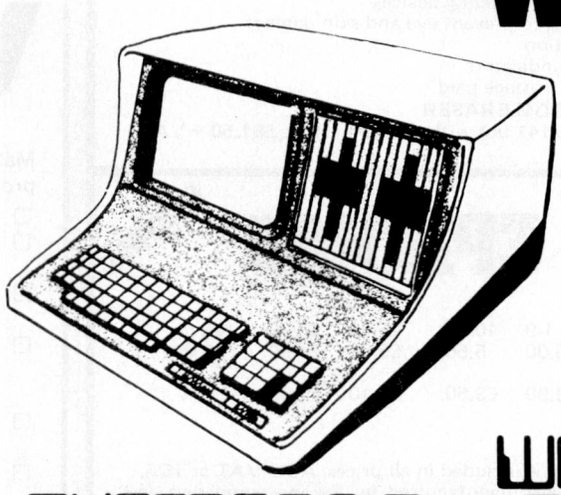

SUPER SOFTWARE

STOCK CONTROL ● PURCHASE LEDGER
SALES LEDGER ● NOMINAL LEDGER
INVOICING ● POINT OF SALE
PAYROLL ● WORD PROCESSING
DATA BASE MANAGEMENT ● RECIPE COSTING

SUPERBRAIN

64K RAM ● 2 RS232 PORTS
TWIN Z080A ● CPM OP. SYSTEM
2 DUAL DENSITY DISK DRIVES ● M. BASIC, COBOL, FORTRAN, ETC.
12" CRT 80 x 24 ● FULL ASCII KEYBOARD

WE ALSO SUPPLY

PET ● APPLE
NORTH STAR ● IMS 8000
XEROX RANGER ● OLIVETTI
OLYMPIA ● EPSON
MICROLINE ● ANADEX

★ *PACKAGES CAN BE AMENDED TO SUIT YOUR REQUIREMENTS OR, IF NECESSARY, BESPOKE SOFTWARE CAN BE WRITTEN*

BEC

35, EDGE LANE, LIVERPOOL, L7 2PA
TELEPHONE: 051-263 5738/5783/4421/6683

BULK EPROM PROGRAMMING

2 YEAR WARRANTY

P400 PRODUCTION EPROM PROGRAMMER



This unit provides simple, reliable programming of up to 8 EPROMS simultaneously it has been designed for ease of operator use — a single 'program' key starts the self check — blank check — program — verify sequence.
Independent blank check & verify controls are provided along with mode, pass/fail indicators for each copy socket and a sounder to signal a correct key command & the end of a programming run. Any of the 2704/2708/2716 (3 rail) & 2508/2758/2516/2716/2532/2732 (single rail) EPROMS may be selected without hardware or personality card changes.
PRICE £545 + VAT. Postage paid.

BULK EPROM ERASING

EX-STOCK

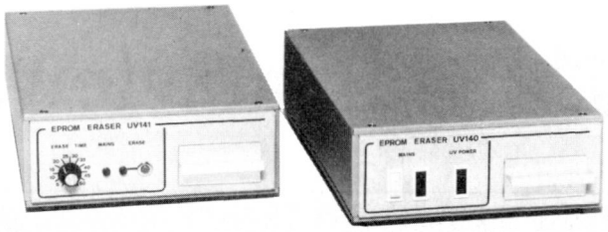

MODEL UV141 EPROM ERASER
- 14 EPROM capcity
- Fast erase time
- Built-in 5-50 minute timer
- Convenient slide-tray loading devices
- Safety interlocked to prevent eye and skin damage
- Rugged construction
- MINS & ERASE indicators
- Price £78 + VAT postage paid.

MODEL UV140 EPROM ERASER
Similar to Model UV141 but without timer. **Price £61.50** + VAT post paid.

BULK EPROMS

EX-STOCK

	1-9	10-24	25-49	50-99	100 up
2716 (450ns) (single rail)	£6.00	5.50	£5.00	£4.50	£3.90
2708 (450ns)	£3.90	£3.50	£3.10	£2.90	—

Postage and Packing is included in all prices. ADD VAT at 15%. All our EPROMS are manufactured by leading companies and are fully guaranteed, branded and to full specification.

WRITE OR TELEPHONE FOR FURTHER DETAILS OR SEND OFFICIAL COMPANY ORDERS/CHEQUES TO:

PLEASE NOTE NEW ADDRESS & TELEPHONE NUMBER

GP INDUSTRIAL ELECTRONICS LTD

Unit 6, Burke Road, Totnes Industrial Estate, Totnes, Devon
Telephone: Totnes (0803) 863360 sales, 863380 technical
Telex No. AS 42596
DISTRIBUTORS REQUIRED - EXPORT ENQUIRIES WELCOME

sbd Software UTILITIES

EXPEDITER II — The Applesoft Compiler:
Expediter II provides an easy means by which Applesoft BASIC programs may be translated into machine language. As a result the compiled version of the program will normally execute from 2-20 times faster. All features of Applesoft are supported. **£75.00**

LISA:
The assembler takes an assembly language source textfile and converts it to the proper machine language. LISA has 30 pseudo opcodes and more other built-in features than other assemblers available for the Apple II. **£39.95**

4-part LISA package:
Includes LISA as described above. XREF creates a cross-reference listing of all variables and labels. TRACE provides symbolic trace listings. DISASM creates LISA-based text files. **£79.95**

AOPT:
Applesoft Program Optimizer is a 2.2K machine language utility that will substantially reduce the size of the program without affecting the operation of the program. **£19.95**

APLUS:
Applesoft — Plus structured Basic is a 4K machine language utility that adds structured programming commands to Applesoft Basic. **£19.95**

CRAE & MCAT:
A co-resident Applesoft Editor. Global changes & finds. Quote (copy) a range of lines. Append, Renumber, Modify, 15 commands in all. **£19.95** MCAT which creates a sorted Master Catalog.

APPLE PROTECTOR III:
Protect your programs against pirating. The protected disks cannot be copied by presently available commercial copy programs. **£60.00**

SDC III:
Super Disk Copy III is a menu driven program that allows manipulation of all types of files, under DOS 3, 1, 3, 2 & 3, 3 COPY single files, DOS, entire disk. UNDELETE, FIX, filesizes etc. Allow files to be transferred back to DOS 3.2. **£24.95**

DISK RECOVERY:
This utility will examine all the sectors on the disk. BAD BLOCK SCAN option. And the REDO VTOC option may correct "messed-up" disks. Repair your disks. **£24.95**

DOS PLUS:
This utility adds 8 new commands to APPLE DOS. Three are built-in & 5 are user-definable. Now you can 'flip' between DOS 3.3 & DOS 3.2 while a program is running!! **£19.95**

Add 15% VAT Postage & Packing Free
Write or phone for full catalogue of available software.
Dealer Enquiries Welcome.
Contact:— S.B.D. SOFTWARE
15 Jocelyn Road, Richmond TW9 2TJ. Tel: 01-948 0461

ZX81 VIC ATOM

Make the most of your microcomputer with our range of proven books:

- ☐ GETTING ACQUAINTED WITH YOUR VIC **£5.95**
- ☐ GETTING ACQUAINTED WITH YOUR ACORN ATOM **£7.95**
- ☐ GETTING ACQUAINTED WITH YOUR ZX81 **£4.95**
  (Each of the above contain around 80 programs)
- ☐ THE GATEWAY GUIDE TO THE ZX81 & ZX80 **£5.95**
  (ZX BASIC explained in detail, 60 programs)
- ☐ MASTERING MACHINE CODE ON YOUR ZX80 & ZX81 **£4.95**
- ☐ INTERFACE, monthly ZX81, ZX80 and Acorn Atom magazine. £8.50 for 12 copies, £1 for sample copy.

Send this ad., or a copy, with cheque to:

INTERFACE, Dept PCW, 44 Earls Court Road, London W8 6EJ.

INTERFACE



LEARN A COMPUTER LANGUAGE THROUGH ACTUAL PRACTICE

FIFTY BASIC EXERCISES
by J.P. Lamoitier
256 Pages 194 Illustrations
Price only £10.25

The best way to learn a computer language is through actual practice. FIFTY BASIC EXERCISES is a book of completely explained exercises; a statement and analysis of the problem, flow-charts, programs and actual runs. This format enables anyone to learn BASIC rapidly, checking progress at each step.

Programs in the fields of mathematics, business, operations research, games and more, presented in varying levels of difficulty, have been chosen for their educational value as well as their relevance to everyday applications.

FIFTY BASIC EXERCISES is a vital book for anyone who wants an effective, practical way of learning to program in BASIC.

Get this invaluable book from your Local Bookshop or Micro Store – NOW! In case of difficulty send a S.A.E. and we'll let you have the name of your nearest stockist.

Dept. PCW **The Computer Bookshop**



30 Lincoln Road, Olton, Birmingham B27 6PA

The Computer Bookshop is the exclusive distributor for all Sybex Books in the U.K.

SUMLOCK BONDAIN

unveil the VIC 20

Now anyone can afford a computer. The Commodore VIC 20 is incredibly low priced, has colour and sound, and is so designed that anyone can operate it with ease and confidence.

SEE IT
TRY IT
BUY IT



at one of these addresses:

Cannon St. Station, Cannon St., London EC4
360 Euston Road, London NW1
263/269 City Road, London EC1V 1JX (Head office)

commodore COMPUTER

BEST PRICES IN U.K

APPLE EUROPLUS 48K	£659.00
ITT 2020 48K	549.00
PET 4042	595.00
VIC 20	165.00
APPLE DISC DRIVE IF BOUGHT WITH COMPUTER	249.00
(CONTROLLER £69 EXTRA)	
ITT COMPLETE SYSTEM 48K COMPUTER 2 DRIVES 12" MONITOR	1199.00

All brand new boxed with full manufacturers warranty. Send cash with order to

Mail order.
Prices exclude VAT and delivery.

ELFTON LTD
(0429) 61770
ADVANCE CHAMBERS
SURTEES STREET
HARTLEPOOL
CLEVELAND

AUTHORISED APPLE, COMMODORE & ITT DEALERS



THE LONDON SUPERBRAIN CENTRE

47, Lower Belgrave St., London, SW1.

Visit the Superbrain centre to see wordprocessing systems and business systems with your own tailormade software.

Software includes customer and invoice system, leads and sales system. VAT output and debtors, insurance agents system, car sales program, order processing program.

SPECIAL OFFER!
SUPERBRAIN FOR ONLY £1,550*

*Subject to dollar surcharge.

We provide any printer to fit the Superbrain e.g. Qume, Starwriter, Spinwriter, Centronics 737 etc.

★ Special Educational Discounts
★ Demonstrations and Quotes given
★ Free catalogues on request

TEL:
01-730-8791
TODAY



47, Lower Belgrave Street, London, SW1.
Tel: 01-730-8791

AN EMG COMPANY

microware

FLOPPY DISK SUBSYSTEMS

DOUBLE DENSITY SINGLE SIDED DRIVES WITH POWER SUPPLY & ENCLOSURE

MAIL ORDER

SINGLE 5.25″	DRIVES	£175.00
DUAL 5.25″	DRIVES	£295.00
SINGLE 8″	DRIVES	£395.00
DUAL 8″	DRIVES	£695.00

LOW LOW PRICES

EPSON PRINTERS

COMPLETE WORD PROCESSING PACKAGES FROM £2395.00

COVER CRAFT PLASTIC COVERS

FOR: MICRO's
PRINTERS
V.D.U.s
FROM £6.95 – £9.95

We also stock Wheels and Mutli-coloured ribbons
For: Qume, Diablo, N.E.C.

MEMOREX FLOPPY DISKS

5¼″	Single Sided	Single Density	£1.65
	Double Sided	Double Density	£2.10
8″	Single Sided	Single Density	£2.39
	Double Sided	Double Density	£3.45

Sold in Boxes of 10

INCREASE THE LIFE EXPECTANCY OF YOUR FLOPPY DISKS

INDEXING SYSTEMS

5¼″	£1.50
8″	£5.95

For use with our Polymer Plastic Boxes

FLOPPY SAVER KITS

5¼″	Saver Kit	£7.95
	Refill pack	£4.95
8″	Saver Kit	£8.95
	Refill Pack	£5.95

5¼″ DISK STORAGE SYSTEMS

* Capacity: ——— 50 Disks
* Colour: ——— Smoke/Sand
* Construction: ——— Polymer Plastic/3 partitions

*** £14.95 ***

8″ DISK STORAGE SYSTEMS

* Capacity: ——— 50 Disks
* Colour: ——— Seville/Black
* Construction: ——— Polymer Plastic/6 partitions
* Carrying Handle
* Lock and Key

*** ——— £24.95 ——— ***

Terms: Payment with written Order.
P&P £1.00 Media – £3.00 Subsystems.
Please add 15% V.A.T. to total payment.
Made payable to Microware (London) Ltd.
Telephone and Mail Orders accepted. Telephone: 01-346 8452

Microware (London) Ltd., 5 Western Court, Huntly Drive, London N3 1NX

PERSONAL SERVICE FROM SHARP'S BIG DEALER

KNIGHTS SHARP MZ-80K OFFERS

1. 48K Sharp with Basic	£409
2. 48K Sharp with BASIC and PASCAL	£415
3. 48K Sharp with BASIC, PASCAL and MACHINE CODE	£425
4. 48K Sharp with BASIC, PASCAL, FORTH and MACHINE CODE	£439
5. 48K Sharp with BASIC, PASCAL, FORTH, FORTRAN and MACHINE CODE	£459
6. PASCAL INTERPRETER tape with 4 programs	£20
7. FORTH COMPILER tape and 4 programs	£25
8. FORTRAN COMPILER tape and 32K demo	£30
9. PASCAL, FORTH, FORTRAN + machine code	£85

SHARP MZ-80B with 50 programs £1045

Write for our latest newsletters and prices –
only KNIGHTS have six languages for the Sharp.
Our DISK COMMANDER (adds 300 commands) supplied with each MZ-80FD.
PLEASE ADD VAT TO ABOVE PRICES AND NOTE THAT WE WILL BEAT ANY ADVERTISED PRICE ON SHARP MICROS.

Knights T.V. & COMPUTERS

108 ROSEMOUNT PLACE ABERDEEN

Telephone 0224 630526 telex 739169



Not just a light pen but a complete data entry and processing system for your PET. It can offer a much faster, more convienient and often better alternative to the keyboard in almost any program. In fact any task involving human participation in the office, lab or classroom can be carried out faster and with fewer errors. (Especially if you can't touch type!). Typical applications include: data input and selection, word processor enhancement, graphics handling, fast program writing and editing, computer assisted design, games etc. etc. This system is very easy to use. All complicated machine code is out of sight in a plug in ROM – just point the pen and touch the tip! The hardware includes a stainless steel light pen with precision optics, programmable touch switch and retractable cable. The 'pen-rest' houses the control electronics (including CB2 sound) which simply plugs into the USER PORT. The firmware supports both pic and track modes, auto cursor movement (better than repeat keys for editing!), single key instant screen reverse, high resolution (1 x 2 pixels) if needed, Coordinates and screen address returned as BASIC variables. All this and more is fully explained and documented in the comprehensive manual. There is not enough room in this ad to list all its features but literature is available on request. To order just send a cheque or phone (anytime) quoting your credit card number.

£170 + VAT

ALTEK (C.W.) 1 Green Lane
Walton-on-Thames Surrey

Order by post or phone (093 22) 44110 . . . 24 hours
Access or Visa accepted. . . Callers by appointment
Selected dealers needed in U.K. and overseas.

APPLE SOFTWARE

The Expeditor — The Applesoft compiler	£63.95	A48K
SuperScribe — Word processor with true upper/lower case on screen	£57.95	M48K
Both Barrels — 2 hir-res action games on one disk.	£15.95	A48K
Star Cruiser — Real-time hi-res action game with sound.	£15.95	M32K
Cyber Strike — 3K hi-res action adventure in space.	£25.95	M48K
Phantoms Five — 3D action-packed hi-res game	£19.95	M48K
Space Eggs — Hi-res super fast arcade style game	£19.95	M48K
Pulsar II — 2 games on one disk	£19.95	M48K
Orbitron — fight off enemy forces and avoid meteor showers.	£19.95	M48K
Autobahn — Road race game with sound and hi-res graphics	£19.95	M48K
Gemma Goblins — Yet another superb hi-res action game	£19.95	M48K
Gorgon — Ultra-fast colour graphics with many different levels.	£25.95	M48K
Sneakers — Waves of little creatures attack you.	£19.95	M48K
Alien Rain (Galaxian) — Colour + hi-res version of the pub game.	£15.95	M48K
Alien Typhoon — A much more difficult verson of Alien Rain.	£15.95	M48K
Snoggle (Puckman) — Hi-res maze of ghosts. Great fun.	£15.95	M48K
Demon Derby (Hyper Head-On) — 4 skill level hi-res car race game.	£15.95	M32K
Galaxy Wars — Colour graphics + Sound effects + hi-res.	£15.95	M32K
Mission: Asteroid — Hi-res adventure in 21 colours. Superb value.	£12.95	M32K
Mystery House — Hi-res adventure using over 100 pictures.	£15.95	M48K
The Wizard and the Princess — Hi-res adventure in 21 colours	£21.95	M48K
Hi-Res Soccer — English football for 1 or 2 players in hi-res	£25.95	M48K
Missile Defense — Hi-res animation and sound arcade game	£19.95	M48K
Thrilogy — Three super games on one disk.	£14.95	I48K
Hi-Res Cribbage — The title describes it. Even hear the pegs move.	£15.95	M48K
Pool 1.5 — Hi-res colour graphics pool table simulation. 4 games.	£23.95	M48K
Oldorf's Revenge — Hi-res adventure with 100 rooms.	£11.95	A48K
Tarturian — Yet another hi-res adventure game with 160 rooms.	£14.95	A48K
Fracas — Graphics and sound effects in this multi-player adventure	£13.95	M48K
Meteoroids in Space — Superb hi-res implementation of the pub game.	£12.95	M48K
Cartels & Cutthroats — Business game for up to 6 players.	£23.95	A48K
D/DATABASE — Ultra-fast database.	£39.95	A48K
Cross-Ref — Machine -code programmers utility.	£15.95	M32K
Linker — Dynamically loads and relocates machine-code programs.	£31.95	M32K

A: Requires Applesoft in ROM. I: Requires Integer Basic in ROM. M: Will run on any Apple. All software is available on disk only and boots under DOS 3.2 (some programs will also boot under DOS 3.3). Many of the games require paddles. Please write for your FREE copy of our catalogue of Apple software. PRICES INCLUDE VAT @ 15%. Please add 50p p&p for orders under £30.00 totally. DEALER INQUIRIES INVITED. MAIL ORDER ONLY.

SPIDER SOFTWARE

98, AVONDALE ROAD, SOUTH CROYDON, SURREY.
Tel: 01-661 2365

ZX81 SOFTWARE
ON CASSETTE

ZXAS MACHINE CODE ASSEMBLER
For 16K ZX81 & 8K ROM ZX80
Complete assembler. Assembles standard Z80 anemonics written into REM statements. Overwrite protection. Occupies 5K. Supplied on cassette, with written documentation. Amazing value at only £3.95!!

ZXDB — The complete debugging program.
Perfectly complements the ZXAS assembler. Includes disassembler, single-step, string search, block transfer and many more useful routines all in one amazingly compact machine code program. SAE for details.

MULTIFILE (16K ZX81 only)
Versatile multipurpose filing system, with complete documentation and 3 data cassettes. Many possible applications. PRICE £17.50, or £1.00 for documentation (refundable against purchase).

Acorn Atom

ACORN ATOM SOFTWARE
The best software available for the Atom at low prices. All software is supplied on cassette with full instructions.

ATOM INVADERS (12k)	£8.00
PINBALL (6k)	£4.50
ATOM BREAKOUT (4k)	£4.00
FRUIT MACHINE (8k)	£4.00
UFO BOMBER (7k)	£4.00
*STAR TREK (12k)	£5.00
DISASSEMBLER (3k)	£4.00
2K PROGRAMS (1)	£4.50
2K PROGRAMS (2)	£4.50
2K PROGRAMS (3)	£4.50
PONTOON (4k)	£3.00
BATTLESHIPS (4k)	£3.00
BIORHYTHMS (4k)	£3.00

Figures refer to total memory needed
* = floating point required

We pay generous royalties on your software!

NEW
LABYRINTH (12k) £5.95
GOLF (6k) £5.00
LUNAR LANDER (12k) £5.50

SEND LARGE SAE FOR OUR FULLY ILLUSTRATED ATOM CATALOGUE
Note new address Mail Order only
96-100 The Albany, Old Hall Street, Liverpool L3 9EG

BUG-BYTE SOFTWARE

MICROS MEMORIES TTLs AND INTERFACE DEVICES

Z80	£3.70	6800	£3.75	6502	£5.00
Z80A	£5.00	6802	£5.50	6502A	£6.00
8085A	£5.00	6809	£12.00	2650A	£12.00
Z80CTC	£4.00	8205	£2.20	6522	£5.00
Z80ACTC	£5.00	8212	£1.80	6532	£8.00
Z80DMA	£10.00	8216	£1.80	6821	£1.80
Z80ADMA	£12.00	8224	£2.50	6845	£10.00
Z80 ADART	£10.00	8228	£2.50	6850	£1.80
Z80 PIO	£4.00	8251	£4.00	6852	£2.50
Z80A PIO	£5.00	8255	£4.00	6875	£6.00
Z80 SIO-1	£20.00	8279	£9.50		

Large range of PERIPHERAL devices available.

SPECIAL OFFERS

	1-24	25-99	100
2114Low Power — 450ns	£1.00	£0.95	£0.92
2114Low Power — 200ns	£1.25	£1.17	£1.10
2716 (+5v)	£2.40	£2.30	£2.10
2732 (+5v)	£6.00	£5.50	£5.50
2532 (+5v)	£6.50	£6.00	£5.50
4116 — 200ns	£0.90	£0.85	£0.75
6113/3 — 150ns	£9.40	£9.00	£8.50

SPEECH SYNTHESISER

(A PROJECT BY TEXAS INSTRUMENTS LTD)
Superb major solid state speech project for under £100
Promises to have a dramatic impact on State-of-Art Electronics —
A talking library of over 200 words with room for expansion.
Easy interfacing to a microcomputer
Pitch control has exciting electronic music applications.
(A Reprint of original constructional article in E & MM (June 81) available at 65p + large SAE)
COMPLETE KIT (inc. PCB) £87.00
(NB. We are fully authorised TEXAS INSTRUMENT distributor for the above project)

ACORN ATOM: Basic Atom Kit £120, Built £150
SOFTY: Ideal hardware/software development tool. Ready built for programming +5V EPROMS. £170.

MEMORY EXPANSION PCB: Low price versatile system for UK101 and Superboard. Compact memory expansion PCB. 8K RAM (2114) plus 4 EPROM SOCKETS FOR 2716, 2732 OR 2532 EPROMS. Plated thru holes. Fully bufferred and decoded lay-out. Interfacing instructions supplied £12.50.

UK101 : INTERFACING COMPUKIT
DECODING MODULE KIT £27.50
ANALOGUE BOARD KIT £47
The analogue board kit includes D/A converter, 8-channel A/D couverter, AY-3-8910 Prog. Sound Generator, 6522 VIA giving timing and counting functions plus extra 16 bit port.

PLEASE ADD P & P 40p AND VAT AT 15%

TECHNOMATIC LIMITED

RETAIL SHOPS:
15 BURNLEY ROAD
LONDON NW10

305 EDGWARE ROAD
LONDON W2
Tel: 01-723 0233

MAIL ORDER
17 BURNLEY ROAD
LONDON NW10
Tel: 01-452 1500/450 6597
Telex: 922800

The Newest Peripheral for your Microcomputer~ The Encyclopedia for the TRS 80

What's the key to getting the most from your TRS-80? No, it isn't disk drives or printers or joysticks. It's information. Without a continual supply of information and ideas, you can't realize the full potential of the TRS-80.

Our response to the clamour for additional information is the Encyclopedia for the TRS-80, a ten-volume reference work that is absolutely packed with programs and articles carefully selected to help you make the most of your microcomputer. You can consider the volumes of the Encyclopedia to be an extension of the documentation that came with your TRS-80. The articles and programs will be similar to those found in 80 Microcomputing. Each book is full of material on programming techniques, business, games, tutorials, education, utilities, interfacing . . . you name it.

Unlike conventional encyclopedias, the Encyclopedia for the TRS-80 will never become stale or out of date. That's because the volumes of the Encyclopedia are being issued one-at-a-time, over a period of months. This means that each new volume will reflect the latest developments and discoveries, making this a living encyclopedia for TRS-80 users.

Volume 1 will be out in September. It's more than 270 pages in length . . . that's 270 pages of solid information . . . no advertising.

SPECIAL INTRODUCTORY OFFER

Order the entire set (the first ten volumes) of the Encyclopedia for the TRS-80 and receive the tenth volume FREE! PAY ONLY £53.91 for the first ten volumes — normally £59.90.

Beat inflation by buying the whole set now . . . we cannot guarantee these same single volume prices for future volumes. You cannot lose! Preview the first volume of the set and judge for yourself. If the Encyclopedia for the TRS-80 does not meet your needs or expectations, just return the first volume within ten days and we will refund the entire amount of your purchase. If at any time you are dissatisfied, you may cancel the remaining volumes. The books will be automatically sent to you every 6 weeks. Take advantage of this offer now! You can't afford to miss out on the newest peripheral — the Encyclopedia for the TRS-80. Telephone 021-632 6458 call your order in today or use the coupon below.

Send me a complete set of the first ten volumes of the Encyclopedia of the TRS-80 at your special introductory price of £53.91 including VAT and p & p. ☐

Send me Volume 1 priced £5.99 including VAT and p & p. ☐

Name_____

Address_____

Phone _____ (Day/Evg)

(Cheque enclosed/My credit card number is _____

CALISTO COMPUTERS LIMITED

SPECIALISTS IN MICROCOMPUTER HARDWARE/SOFTWARE
119 John Bright Street
Birmingham B1 1BE
Phone: 021-632 6458

BARCLAYCARD VISA — Access Buy it with Access

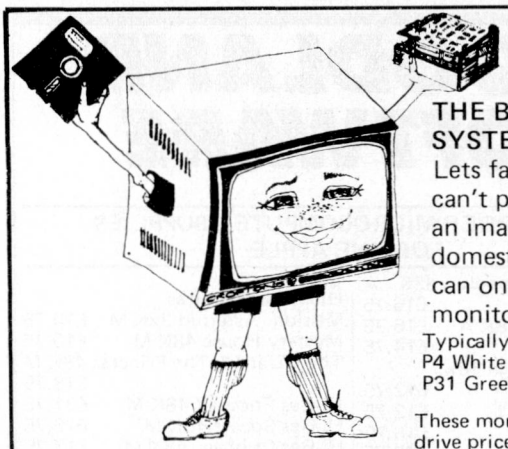

THE BODY OF ANY SYSTEM

Lets face it — you can't produce as crisp an image on a domestic T.V. as you can on a Crofton monitor.

Typically
P4 White £64.97
P31 Green £79.32

These monitor/floppy disk drive prices are dependent upon sterling-dollar conversion rates. Please phone us for up-to-date prices.

SHUGART FLOPPY DISK DRIVES

No case, No Power Supply

SA 400	5¼"	S.S.S.D.	£149.05
SA 450	5¼"	D.S.S.D.	£283.31
SA 800	8"	S.S.S.D.	£340.52

FLOPPY DISKS — BOXES OF TEN

Single sided	35/40 Track		£ 26.45
Double sided	35/40 Track	5¼"	£ 37.95
Single sided	77 Track		£ 41.40
Double sided	77 Track	5¼"	£ 47.15
Single sided		8"	£ 40.25

IKEGAMI 12" MONITORS

P 4 White	£171.50
P31 Green	£184.97

2/3" FULLY INTERLACED C.C.T.V. CAMERAS £149.00

ALL THE ABOVE PRICES INCLUDE V.A.T. AND CARRIAGE

ALL MAJOR CREDIT CARDS ACCEPTED — Small surcharge

CROFTON ELECTRONICS LTD
35 Grosvenor Road, Twickenham, Middx TW1 4AD
01-891 1923/1513

Happy Memories

Part	type		1 off	50-99	100 up
4116	200ns		.95	.85	.75
4116	250ns		.85	.75	.65
2114	200ns	Low power	1.30	1.20	1.10
2114	450ns	Low power	1.25	1.15	1.05
4118	250ns		3.45	2.95	2.75
6116	150ns	CMOS	8.75	8.25	7.95
2708	450ns		2.40	2.25	2.15
2716	450ns	5 volt	2.65	2.40	2.20
2716	450ns	three rail	7.40	7.00	6.75
2732	450ns	Intel type	5.40	4.95	4.65
2532	450ns	Texas type	5.40	4.95	4.65

Z80A-CPU £5.25 Z80A-PIO £4.75
Z80A-CTC £4.75

Low profile IC sockets:

Pins	8	14	16	18	20	22	24	28	40
Pence	9	10	11	14	15	18	19	25	33

Soft-sectored floppy discs per 10 in plastic library case:
5 inch SSDD £17.00 5 inch DSDD £21.00
8 inch SSSD £21.00 8 inch SSDD £26.65
8 inch DSDD £31.75

74LS series TTL, large stocks at low prices with DIY discounts starting at a mix of just 25 pieces. Write or 'phone for list.

Please add 30p post & packing to orders under £15 and VAT @ 15%.
Access & Barclaycard accepted. 24hr service on (054 422) 618.
Government & Educational orders welcome, £15 minimum. Trade accounts operated, phone or write for details.
Prices are still tending to drop, 'phone for a quote before you buy.



Happy Memories (PCW),
Gladestry, Kingston, Herefordshire,
HR5 3NY
Tel: (054 422) 618 or 628

FREE
BASIC TRAINING COURSE WITH EVERY
SHARP MZ-80K

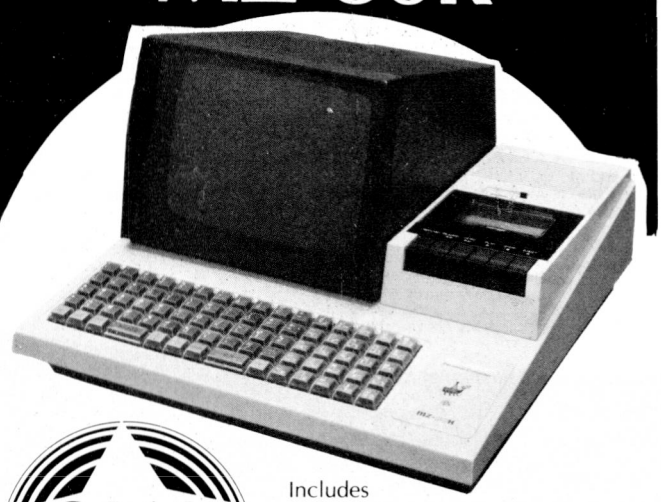

£418 + VAT

Includes
- ✻ 20K RAM
- ✻ One day BASIC course
- ✻ BASIC Cassette & Manual
- ✻ 12 months guarantee
- ✻ Many options & programmes available

	NETT	VAT	TOTAL
MZ-80 Computer 48K	£478.00	£71.70	£549.70
MZ-80K 28K UPGRADE	£87.00	£13.03	£100.05
MZ-80 I/O Interface Unit	£62.00	£6.30	£48.30
MZ-80 FD Dual Disk Drive	£693.00	£103.95	£796.95
MZ-80 FDK Additional MZ-80FD	£616.00	£92.40	£708.40
MZ-80 RS232 Interface	£110.00	£16.50	£126.50
MZ-80 P3 Matrix Printer	£430.00	£64.50	£494.50
CP/M Operating System	£196.00	£29.40	£225.40
PC-1211 Pocket Computer	£91.00	£13.65	£104.65
CE-121 Cassette Interface	£12.60	£1.89	£14.95
RP1600 Daisywheel Printer	£1450.00	£217.50	£1667.50

Ledger and stock control packages free with computer systems

Please send me .....

.....

Name .....

Address .....

.....

I enclose cheque/P.O. for £..... (£10 P & P)

Butel-Comco Limited
Garrick Industrial Centre
Garrick Road Hendon
London England NW9 6AQ
Telephone 01-202 0262
Telex 47523

Barclaycard

Access

Signed _____

Technology for business

INSTANT H.P. CREDIT AVAILABLE

PCW

AFTER NUMEROUS REQUESTS, HERE IT IS. . . .

THE ZX 81 COMPANION

PRICE INCL. UK POSTAGE
£7.95

LINSAC's latest publication includes over forty ZX81 programs and routines, and sections on real-time graphics and the monitor. It is designed as an extension of the Sinclair manual, with all the quality and depth found in its predecessor, THE ZX80 COMPANION. Owners of 8K ROM ZX80's will also find the book an invaluable asset.

Also available at FOYLES Charing Cross Road.
Send cheque for £7.95 to:

LINSAC 68 Barker Road, Linthorpe, Middlesbrough, Co. Cleveland TS5 5ES

WOODLAND SOFTWARE

MAIL ORDER MICROCOMPUTER SUPPLIES FOR THE APPLE

L.A. Land Monopoly 48K A	£16.75
Hyperspace Wars 48K A	£16.75
Odyssey 48K I	£14.75
Wilderness Campaign 48k I	£12.75
Doom Cavern 48K I	£12.75
Sneakers 48K M	£16.75
Gorgon 48K M	£22.75
Gamma Goblins 48K M	£16.75
Autobahn 48K M	£16.75
Orbitron 48K M	£16.75
Pulsar II 48K M	£16.75
Space Eggs 48K M	£16.75
Phantoms Five 48K M	£16.75
Cyber Strike 48K M	£21.75
Star Cruiser 32K M	£13.75
Both Barrels 48K A	£13.75
Infotree 48K P	£49.75
Galactic Attack 48K P	£17.75
Wizardry 48K P	£28.75

Hi-Res Adventures

Mission: Asteroid 32K M	£10.75
Mystery House 48K M	£13.75
The Wizard & The Princess 48K M	£18.75
Hi-Res Football 48K M	£21.75
Hi-Res Soccer 48K M	£16.75
Hi-Res Cribbage 48K M	£13.75
Missile Defence 48K M	£16.75
Cranston Manor 48K M	£19.75
Sabotage 48K M	£13.75
Gobbler 48K M	£13.75
Higher Text 48K I	£19.75
Higher Graphics II 48K I	£19.75
E-Z Draw 3.3 48K M	£27.75
Superscript 48K M	£49.75

STOP PRESS
UK DISTRIBUTOR FOR SIR-TECH INC

A = Applesoft I = Integer M = Runs on any Apple
P = Requires PASCAL or DOS 3.3
All software is disk based. All prices are inclusive.
On multiple orders of 3 or more programs P&P is FREE; please add 50p P&P on orders less than 3.
A list of our full range of software is free on request. . . from

WOODLAND SOFTWARE
103 Oxford Gardens, London W10 6NF.
TRADE ENQUIRIES INVITED
Tel: 01-960 4877

SELECT THE BEST

New DIABLO 630
LETTER QUALITY PRINTING AT REALISTIC PRICES

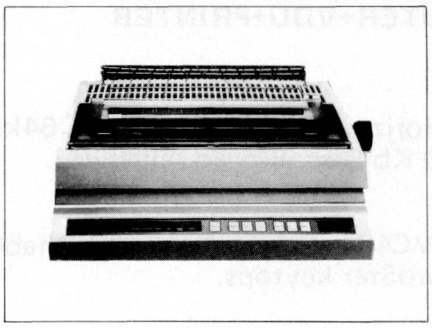

- Interchangeable Metal/ Plastic Print Wheels
- Automatic Bi-directional Printing
- Word Processing Options
- Diablo Quality and Reliability
- Paper Handling Accessories

FOR INNOVATIVE DISTRIBUTION TO OEMs

geveke electronics

New DRE Series 8000
HIGH QUALITY BUSINESS SYSTEM PRINTERS



- Full Range of Models with High Parts Commonality
- Bi-Directional Logic Seeking and Efficient Paper Handling
- Operator Changeable, Long Life 9 Wire Print Head
- Cartridge Ribbon and Red Black Option
- Optional Keyboards
- Models 8820 (150 cps), 8830 (180 cps), 8840 (240 cps)
- Models 8910 8920, 160 cps Correspondence, 240 cps WP Draft

FOR INNOVATIVE DISTRIBUTION TO OEMs

geveke electronics

New AMPEX VDU
INTERACTIVE VIDEO DISPLAY TERMINAL

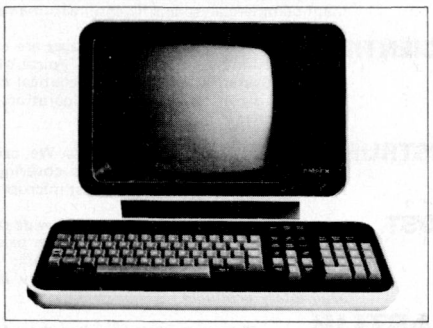

- Low Cost, Full Feature VDU
- Conversational or Block Mode
- Transmission Rates to 19200 Bauds
- 20 Programmable Function Keys
- Detached Full ASCII Keyboard
- Standard Serial Printer Interface
- 2 Page Display & Optional 2 Pages
- Line Graphics
- Switch Selectable Status Line
- Full Tabs

FOR INNOVATIVE DISTRIBUTION TO OEMs

geveke electronics

Geveke Electronics Ltd., RMC House, Vale Farm Rd., Woking Tel: 04862 71337

MEMORIES AT UNBEATABLE PRICES

		1+	25+	100+
2114	200NS LOW POWER	1.28	1.19	1.11
2114	300NS LOW POWER GTE (recommended for Acorn Atom)	1.28	1.19	1.11
2708	450NS	1.99	1.86	1.73
2716	450NS (single +5V)	2.49	2.37	2.29
2532	450NS	5.50	5.31	5.13
2732	450NS	5.43	5.24	5.07
4116	150NS	1.15	1.06	0.99
4116	200NS	0.80	0.72	0.66
4118	200NS	3.90	3.23	3.13
6116	200NS	10.95	9.93	9.27
8264	200NS	12.00	11.00	10.50

E. & O.E.

ALL PRODUCTS BRANDED FULL SPECIFICATION AND GUARANTEED. ALL PRICES EXCLUDE POST & PACKING (50p ON ORDERS UNDER £10) AND V.A.T. OFFICIAL ORDERS FROM SCHOOLS, COLLEGES AND GOVERNMENT ESTABLISHMENTS WELCOME. CREDIT CARDS ACCEPTED (ACCESS AND VISA) PLEASE SEND S.A.E. FOR FULL COMPONENT PRICE LIST.

MIDWICH COMPUTER COMPANY LIMITED,
HEWITT HOUSE,
NORTHGATE STREET,
BURY ST. EDMUNDS,
SUFFOLK. IP33 1HQ
TELEPHONE: (0284) 701321
(24 HOUR SERVICE FOR CREDIT CARD ORDERS)

Try us!

***MEMORIES**

2732	32K EPROM	(4 x 8)	450NS	£ 6.00
2532	32K EPROM	(4 x 8)	450NS	£ 6.00
2716	16K EPROM	(2 x 8)	450NS	£ 3.00
2708	8K EPROM	(1 x 8)	450NS	£ 2.40
2114	4K S RAM	(1 x 4)	450NS	£ 1.15
2114	4K S RAM	(1 x 4)	300NS	£ 1.25
2114	4K S RAM	(1 x 4)	200NS	£ 1.35
4164	64K D RAM	(64 x 1)	200NS	£12.00
4164	64K D RAM	(64 x 1)	150NS	£13.00
4116	16K D RAM	(16 x 1)	200NS	£ 1.15
6504	4K CMOS	(4 x 1)	250NS	£ 3.30
5101	1K CMOS	(256 x 4)	450NS	£ 1.15
16K	CMOS RAM	(2 x 8)	250NS	£10.00
16K	S RAM	(2 x 8)	150NS	£ 9.00

***LOGIC and CMOS IC'S**

74LS09P	£0.11	74LS48P	£0.34	74LS90P	£0.31
LS138P	£0.28	LS163P	£0.63	LS174P	£0.40
LS175P	£0.40	LS257P	£0.46	LS367P	£0.31
LS368P	£0.31	14001	£0.11	14011	£0.11
14049	£0.17	14081	£0.12		

***EPSON PRINTER** ***14" COLOUR MONITOR**

Please write to us for any item unlisted. We may be able to help you.

Please add 50p for Postage and Packing for orders under £50.00.

Price includes VAT. Minimum order £15.00.

Calona Limited

Third Floor Broadway House
112-134 The Broadway Wimbledon
London SW19 1RH
Telephone 01-543 1008 Telex 923416 CLNLDN G

VIDEO VECTOR DYNAMICS LTD
39 Hope St., Glasgow G2 6AE;
Telephone 041-226-3481/2

WE SELL SOLUTIONS. Have you discovered that your problems really begin after you've bought the hardware? Either you've bought the wrong hardware or no software exists to make it work properly. We specialise in providing total solutions to problems and professional after-sales support of hardware and software. We have the resources successfully to implement commercial, scientific and instrumentation/control projects.

SCIENTIFIC Our scientific packages are currently in use by a number of major multi-national companies. Typical of these packages is our Chemical Graphics System used by pharmaceutical companies in drug design. This is designed to run on PDP-11 configuration but a subset of the facilities is available on microcomputers.

INSTRUMENTATION/CONTROL We can supply a complete range of hardware and software packages covering analog, digital and graphical input/output and logging using fast microprocessor-based systems.

COST Due to our familiarity with a wide range of hardware we can supply systems either optimised for minimum price or maximum performance – you decide on the price/performance mix.

In addition to consultancy and turnkey packages we offer the following proprietary products.

FASTLIB This package is based on the AMD9511 arithmetic chip and is a complete hardware/software system. Use of FASTLIB is completely transparent to the user of Microsoft FORTRAN. The software is totally integrated with the FORTRAN compiler and simply by replacing the Microsoft-supplied library by FASTLIB existing programs can run 5 – 20 times faster without any modification. The hardware requires a single S100 slot. In addition to enhancing the speed of execution of the existing FORTRAN functions and operations, additional functions have been implemented – NINT, TAN, ASIN, ACOS, SINH, COSH, THAN & RAN (a pseudo-random number generator). £495.

GLIB A graphics library enabling complex pictures to be produced for a series of simple subroutines calls such as; VECTOR (draws a line between ANY TWO (x,y) points); CIRCLE (draws a circle of any radius centered on any (x,y) point); TEXT (plots a 64-character ASCIset); STEXT (plots Greek and Mathematical symbols); etc. Plots can be saved on or retrieved from disk by single subroutine calls. The standard package used the Vector Graphic High-Resolution Graphics board but the software can be configurated for any graphics board or device. Microsoft FORTRAN, MACRO is also required £550.

WORD PROCESSING SYSTEMS

SYSTEM = +SOFTWARE

COMPUTER+VDU+PRINTER

COMPUTER:

North Star Horizon; S-100 based Z80A 64kB RAM; 2x340 Kb Disc. Proved reliability.

VDU:

Volker-Craig VC404; Green screen; detachable keyboard; WordStar keytops.

PRINTER:

Olympia Scripta Daisywheel (14cps); or NEC Spinwriter (55cps)

SOFTWARE:

MicroPro WordStar; Widely used and incredibly versatile; running under CP/M2 the industry standard operating system.

SYSTEM/1 With Scripta printer £3950
SYSTEM/2 with Spinwriter £4650.
OPTIONS: Hard discs from £2075 (10Mb); 132 col VDU's etc.

SOFTWARE FOR CP/M®

HIGH QUALITY SOFTWARE – WITH HIGH QUALITY SERVICE

★ **NOTE NEW PRICES ON MICROPRO AND MICROSOFT PRODUCTS – Dealer enquiries welcome---good discounts for quantity orders let us supply your full range of software**

WORDSTAR - Professional word processing software. On-screen formatting, wordwrap, pagination, line and character count on view. Micro-justification on daisy-wheel printer. Search and replace. Block/paragraph manipulation. External file read/write. Background printing during editing etc.	£250
MAIL–MERGE - Powerful Wordstar enhancement for file merging and document personalisation.	£65
DATASTAR Screen orientated system for Data Entry, Retrieval and Updating.	£175
SUPERSORT - Sort, merge and selection program.	£125
CONFIGURABLE BUSINESS SYSTEM (CBS) - Unique information management system with user definable files, powerful report generator, menu-driven for ease of use. No programming experience necessary!	£225
ACCOUNTING PACKAGES by Median - Tec: PAYROLL, SALES, PURCHASE, NOMINAL Specially developed by UK software house to exacting specifications. Written in Microsoft Basic each package may be customised by end user, all are widely used. Ledgers are open item. Payroll caters for weekly and monthly pay.	£500 each
PROJECT COST CONTROL/JOB ACCOUNTING - A comprehensive set of programs to monitor budgets, account for expenditure and project completion etc. Ideally suited for contractors. Written in CBASIC-2.	£150
STATISTICS PACKAGE - Over 25 routines including Regression & ANOVA	£100
MATHS PACKAGE - Over 40 easily used routines.	£100
IBM - CP/M COMPATIBILITY - Powerful utility to transfer data to/from IBM machines in standard disk format.	£110
MICROSOFT BASIC INTERPRETER	£155
MICROSOFT BASIC COMPILER	£195
MICROSOFT FORTRAN COMPILER	£205
MICROSOFT COBOL	£310
MAGSAM - Versatile easy to use Keyed File Management System for Microsoft Basic or CBASIC.	£130
CIS - COBOL - ANSI' 74 implementation to full level 1 standard. Supports random, indexed and sequential files, features for conversational working, screen control, interactive debugging, program segmentation etc.	£425
FORMS-2 - Automatic COBOL code generator for screen formats.	£100
PASCAL-Z	£235
STRUCTURED BASIC - Relocatable compiler	£160
CBASIC-2 - Extended Disk Basic pseudo compiler and run-time interpreter.	£75
SELECTOR III - C2 - Information management system written in CBASIC-2	£185
SELECTOR IV - Upward compatible version of III with enhanced reporting.	£300
BSTAM - Telecomms facility for exchanging files between CP/M computers.	£75
ASCOM - Facility for communicating with other computers.	£95
TRANSFER - CP/M to CP/M file exchange - telecomms source code	£125
MACRO 80 - Macro Assembler	£99
CP/M 2.2 - Standard Version 8" Single Density.	£99

Please contact us for availability of other products
All orders must be PREPAID. Add £1 per item P & P (Minimum £2.00) and VAT
CP/M is trade mark of Digital Research

TELESYSTEMS LTD

P.O. Box 12, GREAT MISSENDEN, BUCKS, HP16 9DD
Telephone (02406) 5314

MJB COMPUTER SYSTEMS FOR THE HOME & BUSINESS ENTHUSIAST

SHARP MZ 80K

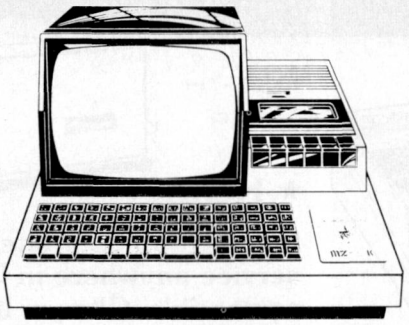

Sharp MZ-80K 48K £470, Twin Disk Unit for MZ-80 £660, 80-Col. Printer for MZ-80 £399, *A complete business system for less than £2000.00. Now available Sharp MZ-80B P.O.A. ring for details of this outstanding system.

SHARP MZ 80K – **£437**

ATARI 400/800



Atari 400 · 16K Ram expandable to 32K · Amazing graphics · amazing 3D games · the game computer of the future · must be seen to be believed · programs in "Basic" "Assembler" "Pilot"

ATARI 400 – **£335**
ATARI 800 – **£625**

SHARP 3201

Business computer 64K Ram 32K Rom expandable to 112K Ram 72K Rom P.O.A.

SHARP 3201

SHARP PC 1211 Pocket Comp

Sharp PC1211 Pocket computer ● Programs in Basic ● Qwerty Alphabetic Keyboard ● 1.9K Ram ● Long battery life with interface £105.00, Printer for PC1211 £67.00

SHARP PC 1211 – **£105**
Phone for more details now

GAME COMPUTERS

Atari 2600 plus Combat £95.45, Game cartridges from £15.45, Atari 2600 Space Invader Package plus Combat, 139 games only £119, Atari 2600 Asteroids package plus Combat, 93 games, only £125, *"Asteroids Launched" game cartridge only £29.95, Philips G7000 Computer Game of the Future only £84, Game cartridges from £13.50, Matel Intellivision the most advanced computer game (3D graphics) an unbelievable £199.

CREDIT FACILITIES AVAILABLE

SPECIAL DISCOUNTS FOR CASH & CARRY CUSTOMERS

MAIL ORDER AVAILABLE

VIDEO SERVICES (BROMLEY)*
8 SUNDRIDGE PARADE
PLAISTOW BROMLEY KENT
(near Sundridge Park Station)*

Prices include VAT & may change during month

TELEPHONE 01-460 4169/8833



Colour from EuroApple *without* 'Colour Card'

14" Colour Monitors for Computer Application

Model AM 3781 dedicated to EuroApple. £325.
No 'colour card' required
High Resolution Colour Graphics
80 Character Capability
Full Screen Text Window Display
Green or white text

Model TVTM 3781. USA Apple, Texas TI 99/4 Atari 800 etc, £325.
TV Programmes
American Standard Video, NTSC (3·58)
European Standard Video, PAL (4·43)
add 15% VAT

PortaTel Conversions Limited
25 Sunbury Cross Centre
Sunbury on Thames Middlesex
Tel. No. Sunbury (09327) 88972
VIDEO MODIFICATION SPECIALISTS

THOMSON COMPUTERS

Personal support for the Small Business and First Time User with

apple®

COMPUTER PRODUCTS

ONYX Systems
Sales and Software Support

Contact Mr H A Thomson BSc
Phone 01-485 8430
or 01-723 5736

NewBear Computing Store Ltd

BETTER PRICES!
BETTER DELIVERY!
WIDEST RANGE OF SOFTWARE

SHARP

For the best deal from the largest sharp dealer phone Newbear (0635) 30505

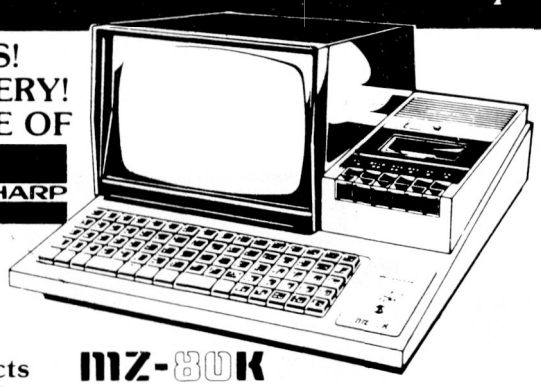

MZ-80K

Many unique products Zen/Listings/Word Proc.

Apple II plus

apple



ACORN
PROM PROGRAMMERS
PROM ERASERS
KEYBOARDS
5¼ AND 8″ *DISC DRIVES*
WIDEST RANGE OF BOOKS IN U.K.

For ex-stock delivery
12 months warranty

and **Bear care**
Bear Bargains

NORTH STAR

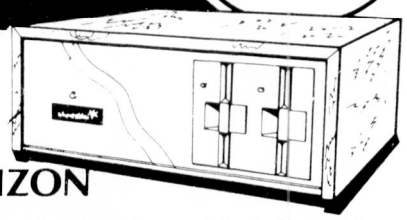

★ HORIZON

Installed on your site with full field service anywhere in U.K. fully C.P.M. compatible. Chosen by Newbear for its reliability and performance.

64K Dual Drive Quad North Star Horizon	£1995.00
Newbury Laboratory 7009 terminal	£795.00
Citoh8300 R.M. Printer	£499.00
CPIM 2.2.	£95.00

Please send urgently:
Sharp □ **B**
North Star Horizon □ Cat. □
Booklist □ Citoh□ N.L. Terminals □
Please contact me □ Phone No. .....
Name .....
Address .....

NEWBEAR COMPUTING STORE LTD. (HEAD OFFICE)
40 BARTHOLOMEW STREET, NEWBURY, BERKS
TEL. (0635) 30505 TELEX 848507 NCS
FIRST FLOOR OFFICES, TIVOLI CENTRE, COVENTRY ROAD, BIRMINGHAM. TEL. 021 707 7170
220-222 STOCKPORT ROAD, CHEADLE HEATH, STOCKPORT. TEL. 061-4912290



COMPUTERS in OXFORD

Now open, your *local* stockist of the latest and best in personal and business computing.

VIDEO GENIE SYSTEM	
Genie	£299
Genie II	£355
9″ B/W monitor	£85
9″ Green monitor	£95
Exp. Box/235	£225
Exp. Box	£195
Disk drive	£225
Visicalc	£60

PRINTERS	
Centronics 737	£377
Seikosha	£210
OKI Microline	£299

SUPERBRAIN	
SD (320K)	£1990
QD (680K)	£2490
DQD (1.6 MEG)	£2900
HDI (5MEG/320K)	£4100
HD2 (5MEG/680K)	£4350
Microdeller	£645
Wordstar	£250
Mailmerge	£69

Epson MX80 F/T1	£389
Epson MX80 F/T2	£439
Epson MX82	£379
Epson MX100	£560

TANTEL PRESTEL TV ADAPTOR £169
BOOKS. SOFTWARE. MEDIA. PERIPHERALS.
INTEGRATED ACCOUNTS + SPECIALIST BUSINESS SYSTEMS.
SEND LARGE S.A.E. (32p) FOR LIST + DETAILS.
ALL PRICES, VAT EXTRA.

Open 9.00 – 5.30 Monday - Friday
9.30 – 1.00 Saturday.
All prices VAT extra.
MICRO BUSINESS SYSTEMS
C.T. MADDISON LTD
THE CROFTS
WITNEY OXFORD TEL: WITNEY (0993) 73145



Old tricks for new Pets...

COMMAND-O is a FOUR KILOBYTE Rom for the 4000/8000 Basic 4 Pets with all the "Toolkit" commands RENUMBER (improved), AUTO, DUMP, DELETE, FIND (improved), HELP, TRACE (improved & includes STEP), and OFF - plus PRINT USING - plus four extra disk commands INITIALIZE, MERGE, EXECUTE, and SEND - plus extra editing commands SCROLL, MOVE, OUT, BEEP, and KILL - plus SET user-definable soft key, 190 characters - plus program scroll up and down - plus 8032 control characters on key. Ask for Model CO-80N for the 8032 or CO-40N for the 4016/4032. £59.95 plus Vat

New tricks for old Pets...

DISK-O-PRO is a FOUR KILOBYTE Rom that upgrades 2000/3000 Pets, but lets you keep all your old software - including Toolkit. As well as REPEAT KEYS and PRINT USING, you get all the Basic 4 disk commands CONCAT, DOPEN, DCLOSE, RECORD, HEADER, COLLECT, BACKUP, COPY, APPEND, DSAVE, DLOAD, CATALOG, RENAME, SCRATCH and DIRECTORY - plus extra disk commands INITIALIZE, MERGE, EXECUTE and SEND - plus extra editing commands SCROLL, MOVE, OUT, BEEP and KILL - plus SET user definable soft-key, 80 characters - plus program scroll-up and scroll-down. We recommend the 4040 disk or upgraded 3040 for full benefit of disk commands. Ask for Model DOP-16N for new Pets 2001-3032, and 2001-8 with retrofit Roms & TK160P Toolkit. £59.95 plus Vat, other models available.

PRONTO-PET hard/soft reset switch for the 3000/4000 Pets. We don't think you'll "crash" your Pet using our software, but if you do the Pronto-Pet will get you out! Also clears the Pet for the next job, without that nasty off/on power surge. £9.99 + Vat

and no tricks missed!

KRAM Keyed Random Access Method. Kid your Pet it's an IBM! VSAM disk handling for 3032/4032/8032 Pets with 3040/4040/8050 disks means you retrieve your data FAST, by NAME - no tracks, sectors or blocks to worry about. Over 2,500 users worldwide have joined the "Klub"! Now you can too, at the 1981 price, £86.95 plus Vat.

SPACEMAKER All our Rom products are compatible with each other, but should you want, say, Wordpro with Kram, or Disk-o-pro with Visicalc, then SPACEMAKER will allow both Roms to address one Rom socket, with just the flip of a switch, for £21.95 plus Vat.

We are sole UK distributors for all these fine products. If your CBM dealer is out of stock, they are available by mail from us, by cheque/Access/Barclaycard (UK post paid) or send for details.

Calco Software

Lakeside House Kingston Hill Surrey KT27QT Tel 01-546-7256

Compare & Save

apple II
europlus
48K
£695 + VAT



Complete 48K with Games
Paddles manuals + 12
Months Warranty
Service available nationwide

Epson
MX-80 F/T2
£399
+ VAT



The Best Buy in Printers Today
9 × 9 Matrix with 40, 60, 80,
132 Columns
Friction & Tractor Feed With
High Resolution Graphics



apple Disk II

With 3.3 Controller £350
Without Controller £279

Software

3.3 VISICALC II	£99
VISIPLOT	£89
Desktop Plan	£99
Apple Plot	£33
Musicomp	£21
Galactic Wars	£16
D B Master	£109
Data Plot	£49
Anti-Ballistic Missiles	£17
Visidex.	£99

Hardware

Apple Graphics Tablet	£413
Parallel Interface	£79
Apple Serial Interface	£89
Apple Centronics Interface	£99
Apple PRESTEL Interface	£536
12" Green Monitor/cable	£177
Epson MX100	£517
Paper Tiger 560	£795

Data force
68 Alma Road
Bristol BS8 2DJ
Mail Order Desk
0272-37555
PLEASE REMEMBER TO ADD 15% VAT

ALL PRICES ARE FOR MAIL ORDER ONLY. NO MAIL ORDER SALES AT SHOWROOM.
WE TRY TO KEEP PRICES STABLE BUT THEY ARE LIABLE TO CHANGE WITHOUT NOTICE

ANGLIA COMPUTER CENTRE

MICROCOMPUTERS FOR BUSINESS, EDUCATION AND HOME

FOR ALL YOUR BUSINESS, EDUCATION & LEISURE COMPUTER REQUIREMENTS!!!

APPLE II
TRS-80
SHARP
NORTH STAR
HORIZON
TANGERINE
J.K. 101
NASCOM

+PRINTERS AND
OTHER PERIPHERALS
BOOKS**
SOFTWARE*
MAGAZINES**
STATIONERY***

BUSINESS+
INDUSTRIAL
CONTROL

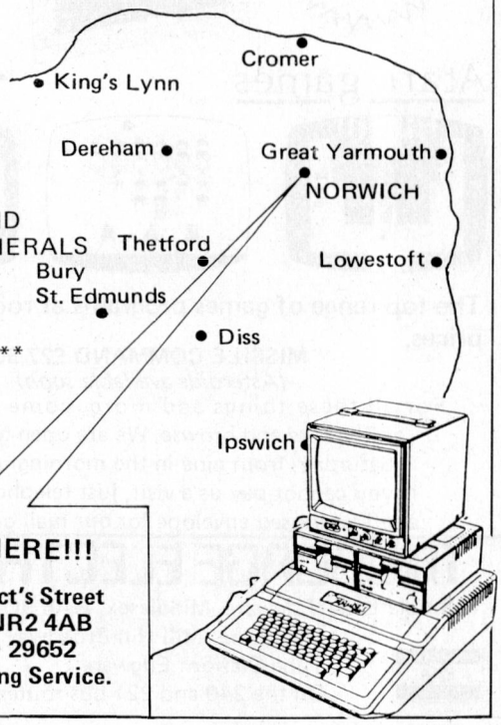

WE ARE HERE!!!

88 St. Benedict's Street
NORWICH NR2 4AB
Tel. (0603) 29652
24hr. Answering Service.

new and popular Sams Books

Don Lancaster
The Cheap Video Cookbook
£3.85 672-21524-1

Mitchell Waite
Computer Graphics Primer
£8.40 672-21650-7

Stephen Murtha and Mitchell Waite
CP/M™ Primer
£7.75 672-21791-0

J. Krutch
Experiments in Artificial Intelligence for Small Computers
£4.50 672-21785-6

David Fox and Mitchell Waite
Pascal Primer
£11.00 672-21793-7

J. Downey and S. Rogers
PET Interfacing
£11.00 672-21795-3

Marvin L. De Jong
Progamming and Interfacing the 6502, with Experiments
£10.35 672-21651-5

Elmer C. Poe
and James C. Goodwin III
The S-100 and Other Micro Buses
Second Edition
£6.45 672-21810-0

Leon Scanlon
6502 Software Design
£7.50 672-21656-6

Andrew C. Staugaard, Jr.
6801, 68701 and 6803 Microcomputer Progamming and Interfacing
£9.05 672-21726-0

Andrew C. Staugaard Jr.
6809 Microcomputer Programming and Interfacing, with Experiments
£9.05 672-21798-8

Don Lancaster
Son of Cheap Video
£5.80 672-21723-6

Jonathan and Christopher Titus
and David Larsen
TRS-80 Interfacing: Book 1
£5.80 672-21633-7

TRS-80 Interfacing: Book 2
£7.10 672-21739-2

Mitchell Waite and Michael Pardee
Your Own Computer
Second Edition
£5.15 672-21860-7

William Barden, Jr.
Z-80 Microcomputer Handbook
£5.80 672-21500-4

Elizabeth and Joseph Nichols
and Peter Rony
Z-80 Microprocessor Progamming and Interfacing: Book 1
£7.75 672-21609-4

Z-80 Microprocessor Progamming and Interfacing: Book 2
£9.70 672-21610-8

Prices are correct at the time of going to press but may be subject to change. All titles advertised are published as paperback books.

For details of our full range of Sams Computing Books please write to Jean Walmsley at Prentice-Hall International at the address below.

Dealer enquiries are welcome:
please contact Roy Jones at the address below or telephone Hemel Hempstead (0442) 58531.

Prentice-Hall PHI **International**

66 Wood Lane End, Hemel Hempstead, Hertfordshire, HP2 4RG, England.
Exclusive distributors of **Howard W. Sams** books in the UK and Europe.

BITS & P.C.s

COMPUTER PRODUCTS LTD

The North's Leading Computer Specialist
Service & Advice our Speciality

Quantum Micros



HIGH RESOLUTION GRAPHICS FOR MZ 80K
Available Now
At £150 + VAT

Resolution down to a single dot. User definable characters. Reverse Video. New Pixel graphics which actually join. Rotate Characters through 360°. High resolution plotting. Three dimensional drawing & high resolution rotates. Fixes internally and is fully compatable with all existing hardware & software. Comprehensive graphics editor with twenty commands. Fully built and tested units, easily installed or alternatively we will arrange for installation.

★ Quantum MZ 80K High Res. ★
This is a Sharp MZ 80K (48K Version) already fitted with high resolution system.
Only **£560 (Carriage £10) + VAT**

SHARP MZ 80K ONLY £460 + VAT

FULL RANGE OF EPSON PRINTERS AT COMPETITIVE PRICES.
Interfacing details & Cords available for Nascom & Sharp.

Full Range of **NASCOM** & **GEMINI MULTIBOARD** products, see the **MICRO VALUE** Ads for details.

Software for MZ80K £7.00 each

GAMES (1)	Star Trek, Spacefighter, Stock car, Labyrinth, Reverse, Test.
GAMES (2)	Electric organ, Othello, Ambush, Fox & hounds, Metric conversions, Hangman, Shuffle.
GAMES (3)	Ten pin, War, Swamp, Minefield, Biorythm, Scramble.
GAMES (4)	Paper stone, Jumping balls, Bounce, Race, Calendar, Alarm clock, One armed bandit.
GAMES (5)	Poker, Stamp, Obstacle, Battleships, Surround, Animal.

PC1211 POCKET COMPUTER
£96.00 inc VAT
PC1211 POCKET COMPUTER PRINTER
£88.00 inc VAT
PC1211 CASS INTERFACE
£16.95 inc VAT

BITS & P.C.s Computer Products Ltd.
4 Westgate, Wetherby, West Yorkshire
LS22 4LL Tel: 0937 63744.
SAE for details

MICROAGE ELECTRONICS

135 HALE LANE EDGWARE MIDDLESEX HA8 9QP
TEL: 01-959 7119 TELEX: 8813241

We make a good deal a good deal better

We stock the best products at the best prices then add a personal or postal service and helpful advice.



only **£170** inc. VAT ready built

THE OUTSTANDING ACORN ATOM

ACORN COMPUTER

PLUS

10,000 2114 RAM sets - MUST GO AT ONLY £2 each

PLUS



all the latest software - games, maths, VDU

PLUS

~~*the Seikosha printer at £228 inc VAT, cassettes monitors etc.*~~

STOP PRESS!

*Now only **£199** inc. VAT and postage for the Seikosha uni-hammer printer. 96ASCII characters.*

DAI personal computer 48K RAM 24K ROM

£684 inc. VAT



FOR THE COMPUTER MAN WHO WANTS nearly everything

Atari games



The top range of games programs at rock bottom prices.

MISSILE COMMAND £27.50
(Asteroids available soon)

For all these things and more, come to Microage at Edgware and browse. We are open Monday to Saturday, from nine in the morning until late.
If you cannot pay us a visit, just telephone or send a self addressed envelope for our mail order prices.

MICROAGE ELECTRONICS

135 Hale Lane, Edgware, Middlesex, HA8 9QP TEL. 01-959 7119
Main Line: Mill Hill Broadway
Tube Station: Edgware
On the 240 and 221 bus routes

The Sinclair ZX80 is innovative and powerful. Now there's a magazine to help you get the most out of it.

Get in sync



SYNC magazine is different from other personal computing magazines. Not just different because it is about a unique computer, the Sinclair ZX80 (and kit version, the MicroAce). But different because of the creative and innovative philosophy of the editors.

A Fascinating Computer

The ZX80 doesn't have memory mapped video. Thus the screen goes blank when a key is pressed. To some reviewers this is a disadvantage. To our editors this is a challenge. One suggested that games could be written to take advantage of the screen blanking. For example, how about a game where characters and graphic symbols move around the screen while it is blanked? The object would be to crack the secret code governing the movements. Voila! A new game like Mastermind or Black Box uniquely for the ZX80.

We made some interesting discoveries soon after setting up the machine. For instance, the CHR$ function is not limited to a value between 0 and 255, but cycles repeatedly through the code. CHR$ (9) and CHR$ (265) will produce identical values. In other words, CHR$ operates in a MOD 256 fashion. We found that the "=" sign can be used several times on a single line, allowing the logical evaluation of variables. In the Sinclair, LET X=Y=Z=W is a valid expression.

Or consider the TL$ function which strips a string of its initial character. At first, we wondered what practical value it had. Then someone suggested it would be perfect for removing the dollar sign from numerical inputs.

Breakthroughs? Hardly. But indicative of the hints and kinds you'll find in every issue of **SYNC**. We intend to take the Sinclair to its limits and then push beyond, finding new tricks and tips, new applications, new ways to do what couldn't be done before. **SYNC** functions on many levels, with tutorials for the beginner and concepts that will keep the pros coming back for more. We'll show you how to duplicate commands available in other Basics. And, perhaps, how to do things that can't be done on other machines.

Many computer applications require that data be sorted. But did you realize there are over ten fundamentally different sorting algorithms? Many people settle for a simple bubble sort perhaps because it's described in so many programming manuals or because they've seen it in another program. However, sort routines such as heapsort or Shell-Metzner are over 100 times as fast as a bubble sort and may actually use less memory. Sure, 1K of memory isn't a lot to work with, but it can be stretched much further by using innovative, clever coding. You'll find this type of help in **SYNC**.

Lots of Games and Applications

Applications and software are the meat of **SYNC**. We recognize that along with useful, pragmatic applications, like financial analysis and graphing, you'll want games that are fun and challenging. In the charter issue of **SYNC** you'll find several games. Acey Ducey is a card game in which the dealer (the computer) deals two cards face up. You then have an option to bet depending upon whether you feel the next card dealt will have a value between the first two.

In Hurkle, another game in the charter issue, you have to find a happy little Hurkle who is hiding on a 10 X 10 grid. In response to your guesses, the Hurkle sends our a clue telling you in which direction to look next.

One of the most ancient forms of arithmetical puzzle is called a "boomerang." The oldest recorded example is that set down by Nicomachus in his *Arithmetica* around 100 A.D. You'll find a computer version of this puzzle in **SYNC**.

Hard-Hitting, Objective Evaluations

By selecting the ZX80 or MicroAce as your personal computer you've shown that you are an astute buyer looking for good performance, an innovative design and economical price. However, selecting software will not be easy. That's where **SYNC** comes in. **SYNC** evaluates software packages and other peripherals and doesn't just publish manufacturer descriptions. We put each package through its paces and give you an in-depth, objective report of its strengths and weaknesses.

SYNC is a Creative Computing publication. **Creative Computing** is the number 1 magazine of software and applications with nearly 100,000 circulation. The two most popular computer games books in the world, *Basic Computer Games* and *More Basic Computer Games* (combined sales over 500,000) are published by Creative Computing. Creative Computing Software manufactures over 150 software packages for six different personal computers.

Creative Computing, founded in 1974 by David Ahl, is a well-established firm committed to the future of personal computing. We expect the Sinclair ZX80 to be a highly successful computer and correspondingly, **SYNC** to be a respected and successful magazine.

Order SYNC Today

Right now we need all the help we can get. First of all, we'd like you to subscribe to **SYNC**. Subscriptions are posted by air directly from America and cost just £10 for one year (6 issues), £18 for two years (12 issues) or, if you really want to beat inflation, £25 for three years (18 issues). **SYNC** is available only by subscription; it is not on newstands. We guarantee your satisfaction or we will refund the unfulfilled portion of your subscription.

Needless to say, we can't fill up all the pages without your help. So send in your programs, articles, hints and tips. Remember, illustrations and screen photos make a piece much more interesting. Send in your reviews of peripherals and software too—but be warned: reviews must be in-depth and objective. We want you to respect what you read on the pages of **SYNC** so be honest and forthright in the material you send us. Of course we pay for contributions—just don't expect to retire on it.

The exploration has begun. Join us.

The magazine for Sinclair ZX80 users
SYNC

27 Andrew Close
Stoke Golding
Nuneaton CV13 6EL, England

ONLY Kansas could do it — REAL inovative software —

MODEL 1 TO MODEL III

Yes, you can actually upgrade your existing Tandy TRS-80 Model I to Model III performance — for under £10!

This exclusive Kansas program enables you to both save and load Basic and machine language programs at three times your normal speed — 1500 baud, giving complete level III compatibility.

SEE US AT THE PCW SHOW

Not only this, but in addition to doing the normal checksum on machine language, it does an unheard of checksum on Basic too! Telling you the moment anything goes wrong.

Why put up with the so slow 500 baud any longer, when everything can be three times faster? The program takes up a mere ½K, is very friendly, in that it is easy to operate and gives you full information as it goes along, and is well documented.

As with all our programs it's from Kansas and ONLY from Kansas — £9.50

Kansas

All prices are Vat paid and post free. Same-day return first class post service. All software fully guaranteed and in stock as we are the actual publishers and not a software house. Free catalogue upon request. Programs are for the Tandy TRS-80 and Video Genie.

Kansas City Systems, Unit 3, Sutton Springs Wood, Chesterfield, Derbys. Tel 0246 850357

---

apple computer Software

HOTEL MANAGEMENT SYSTEM – A comprehensive system for the administration of bookings, guest billing and miscellaneous accounting for the small to medium size hotel. Will accept bookings up to 13 months ahead, print confirmation notes, print guest bills, produces managerial and accountancy reports. For hotels up to 36 rooms **£525**. For hotels up to 75 rooms **£575**.

DENTAL RECORDS SYSTEM – Stores all records usually held on FP 25 or similar. Uses standard charting methods. Apple's Hi-Res graphics capability displays patient charts on screen. Detailed information on request **£395**.

SALES CONTROLLER – Forget old fashioned ledgers! Sales Controller is a complete sales office system. Checks credit control; it prints works orders, invoices, customer delivery notes, purchase office stock shortage advices, customer credit situation, accountancy reports, and keeps customers' accounts. The entire sales administration and accounting of a sales office for **£350**.

PAYROLL – The best payroll system we've seen. Provides hitherto unseen facilities on micro computers. Supports both weekly and monthly paid employees up to 1000 total. Handles overtime rates, adjustments to gross pay, pension contributions etc. Produces an edit list prior to final payslip printing, produces P.45's and P.60's as required. **£200**.

PROPERTY RENTAL CONTROLLER – A simple, efficient and low cost system for estate agents to control their property rentals. Automatic production of rent demands, overdue letters, statements and management reports. **£250**.

HIRE PURCHASE CONTROLLER – A comprehensive program. Sorts all agreement details, produces statements, calculates interest and profits, prints management reports and even forecasts cash flow! **£250**.

GOODS RENTAL CONTROLLER – Similar to hire purchase controller but for the rental industry. Whether for T.V.'s, office equipment, furnishings or machinery, this program will amortize its cost in a very short period! **£250**

DEALER ENQUIRIES WELCOME.
COMPLETE DETAILED OVERVIEWS ARE AVAILABLE ON ALL THE ABOVE SOFTWARE

DON'T DELAY!!! RING US FOR MORE DETAILS NOW!!!

Data force
Dataforce (UK) Ltd.,
68 Alma Road, Bristol BS8 2DJ. Tel: 0272 314496
Authorized apple Dealer

HAVING TROUBLE GETTING THE RIGHT STAFF?

If you're having the same trouble that everyone else in the Micro industry is having filling that Sales or Technical job then we've got news for you.

Starting in November, *Personal Computer World* is running a special trade recruitment page right here opposite Chip Chat to help you solve your problems.

Even if your ideal candidate is not already in the business, if micros are as important to them as they are to you they will be reading *PCW* cover to cover, every month.

So you get the best either way. Over 120,000 readers must have somewhere in their midst just the person you need to keep on expanding your business.

And you won't find us anywhere near as expensive as the national press, the computer weeklies or a recruitment agency.

Call Margaret Burton now on 01-631 1433.

ADVERTISERS INDEX

Abacus	198
Acorn	121,192,204
Adda	39
Adler	42
Advanced Computer Equipment	168
Almarc	144
Altek	211
Altwasser	205
Anglia	145,219
Arfon	15
Audio Computers	45
Avery	171
BEC	207
BMC	97
Bits & PC's	220
Bug Byte	212
Business House	104,194
Butel	214
CPS Data Systems	41
Calco	218
Calisto	213
Calona	215
Camden	170
Cardiff Micro	145
Cascade Computers	205
Castle Electronics	178
Chromasonic	49
Claremont	201
Comart	201
Commercial Data Systems	201
Commodore PET	56,57
Comp Shop	224,IBC
Computace	195
Computastore	188
Computech	33
Computer Bookshop	209
Computer Supermarket	120
Control Technology	174
Crab Software	190
Cream	198
Creative Computing	221
Crofton	213
Cumana	35
Currah	203
Curry's	20,21
DJ AI Systems	31
DRG Business Systems	84
Data Applications	95
Data Efficiency	28,32
Dataforce	219,222
Datalink	29
Dataman	6
Dataplus	152
Dataview	207
Davinci	200
Deans	196
Digitus	2
Display	175
EMG	192,202,210
EMPA	112,113
Easicomp	174
Elfton	210
Encotel	105
Equinox	66
Essential Software	92,110
Feedback	191
Fergusson	182
Flintdata	119
Fulcrum	170
G.P. Industrial	208
GW Computers	24,25
Gate Microsystems	205
Gemini	170
Geveke	215
Great Northern	172
Guestel	96
Hal	59-62
Happy Memories	213
Harding	18,19
Helistar	79
Henrys	189,194
Hewlett Packard	4,5,52
Hisoft	206
Honeywell SPA	47
Hotel	14
ITT	48
Icarus	180
Independent Computer Engineering	187
Infra	196
Intelligent Artefacts	43
Interam	81
Interface	208
Intex	168,174
JRS	190
Jennings	190
Johnson's Micros	26
KAI	194
KGB Micros	44
Kansas	222
Katotek	46
Keen	184
Keytronics	191
Knight	211
Kram	203
Kramer	171
L & J	133
Leicester	145
Leisure Genius	197
Leisure Reference	171
Linsac	214
Lion House	185
London Comp Store	51
Lowe Electronics	22,23
Lucas Logic	76
MPI	27
Macronics	200
Maddison	218
Malvern	191
Maplin	176
March	193,196
Memotech	197
Microage	220
Microcentre	IFC
Microcomputer Space Drome	179
Microdigital	7-10
Microfocus	129
Micronetworks	40
Microtek (Ipswich)	190
Microtek (Orpington)	173
Microware	211
Microvalue	12,13
Midwich	215
Modmags	169
Newbear	218
Newtronics	177
Northamber	72,73
Oasis	202
Olympia	68
Panasonic	186
Personal Computers	OBC
Pete & Pam	204
Photo Acoustics	199
Portatel	217
Prentice Hall	219
Printout	70
Program Power	206
Qume	36
Ram	53
Rostronics	199
Roxburgh	17
SBD	172,203,210
SRS Microsystems	50
Sharp	11,87
Sinclair Research	82,135-138
Sirton	37
Software House	168
Spider	212
Spreebond	200
Strumech	183
Sumlock Bondain	193,195
Superior Systems	30
Swanley	192
TSMS	197
Team 4	14
Technomatic	212
Telesystems	216
Templeman	199
Tempus	202
Tex	172
Thompson	217
Transam	34
Video Services	217
Video Vector	216
Vlasak	130
Watford Electronics	181
Westfarthing	206
Woodland Software	214
X-Data	65
Xitan	38

ChipChat

Our friend Les Solomon of *Popular Elecronics* called in recently with news of a Japanese pocket micro which incorporates a full keyboard and a TV-quality flat LCD display. There's also a real TV, using the same screen, apparently. Les also told us about his latest robot which he's trained to go to the fridge and fetch a can of beer. He went strangely quiet when we asked what else he's trained it to do... Talking of robots, 'Squire' Allason has been buying up all those unwanted ZX80s and using them to control his latest toy, a multi-armed robot with an '80 in each joint. Rumour has it that once he's found a way of fitting it with legs, he'll let it run *Printout*.

Then we'll *really* have to smarten up our act... Julian calls his robot 'Bradbeer', by the way. We can't print what it calls him... News from other mags time: Henry of *Toady* has moved into what he calls a 'spanking' new office — so that's what you and Tina get up to, Henry; Richard Pawson of *Printout* has a policewoman for a girlfriend — we think we'd better not say any more about that; and Dennis Jarrett was going to start up a trade newsletter until people started trying to bribe him *not* to do it... If you've seen our new section, 'TJ's Workshop' and you still don't know what it stands for, then, for the last time, TJ means terminal junkie... Editor Rodwell has now taken to going round in disguise since a ridiculous photo of him appeared in our sister publication *Which Bike?* (page 83 of its August issue if you want a good snigger)... We spotted a car outside a particularly sleazy Soho strip joint the other day — with an Alphatronic set up on the back seat. Odd. And no, we won't explain what we were doing *outside* a sleazy Soho strip joint... This was written just before the *PCW* Show, which is why it's short and sweet — stand by for a bumper bundle next month, starring 'Bumper' Harris and 'Legless', among many others!

NOW IN STOCK

THE NEW & EXCITING TRS80 MODEL III



EXTENDED GUARANTEE BY COMPUCARE

48K **£619** + VAT

The Radio Shack TRS-80™ Model III is a ROM-based computer system consisting of:
- A 12-inch screen to display results and other information
- A 65-key console keyboard for inputting programs and data to the Computer
- A Z-80 Microprocessor, the "brains" of the system
- A Real-Time Clock
- Read Only Memory (ROM) containing the Model III BASIC Language (fully compatible with most Model I BASIC programs)
- Random Access Memory (RAM) for storage of programs and data while the Computer is on (amount is expandable from "16K" to "48K", optional extra)
- A Cassette Interface for long-term storage of programs and data (requires a separate cassette recorder, optional/extra)
- A Printer Interface for hard-copy output of programs and data (requires a separate line printer, optional/extra)
- Expansion area for upgrading to a disk-based system (optional/extra)
- Expansion area for an RS-232-C serial communications interface (optional/extra)

All these components are contained in a single moulded case, and all are powered via one power cord.

Disc Drives Kit with 2x40 Track Drives — **£599** + VAT
Disc Drives Kit with 2x80 Track Drives — **£729** + VAT
Add **£25** for Installation

ACORN ATOM

NEW



EXTENDED GUARANTEE BY COMPUCARE

UNIQUE IN CONCEPT — THE HOME COMPUTER THAT GROWS AS YOU DO

Fully Assembled **£149** + VAT

Special features include ● Full Sized Keyboard ● Assembler and Basic ● Top Quality Moulded Case ● High Resolution Colour Graphics ● 6502 Microprocessor

TV GAME BREAK OUT



Has got to be one of the world's greatest TV games. You really get hooked. As featured in ETI. Has also 4 other pinball games and lots of options. Good kit for up-grading old amusement games.

MINI KIT — PCB, sound & vision modulator, memory chip and de-code chip. Very simple to construct. **£14.90** + VAT
OR PCB **£2.90** MAIN LSI **£8.50** Both plus VAT

TANTEL

NEW



EXTENDED GUARANTEE BY COMPUCARE

ONLY **£169** + VAT

Demonstation available at our showroom

PRESTEL BY TANTEL The greatest thing since television & telephones. Communications at your fingertips for business & home. 180,000 pages of up-to-date information on travel, news, investment, holidays, hotels etc etc. Ask Prestel a question and you have your answer in seconds in full colour on your own TV. Only requires a telephone jack socket available from the PO.

HITACHI PROFESSIONAL MONITORS



EXTENDED GUARANTEE BY COMPUCARE

9" — ~~£129~~ **£99.95**
12" — ~~£199~~ **£149**

● **Reliability** Solid state circuitry using an IC and silicon transistors ensures high reliability. ● **500 lines horizontal resolution** Horizontal resolution in excess of 500 lines is achieved in picture center. ● **Stable picture** Even played back pictures of VTR can be displayed without jittering. ● **Looping video input** Video input can be looped through with built-in termination switch. ● **External sync operation** (available as option for U and C types) ● **Compact construction** Two monitors are mountable side by side in a standard 19-inch rack.

WE ARE NOW STOCKING THE APPLE II AT REDUCED PRICES

AUTOSTART EURO PLUS



EXTENDED GUARANTEE BY COMPUCARE

48K **£599** + VAT

Getting Started APPLE II is faster, smaller, and more powerful than its predecessors. And it's more fun to use too because of built-in features like:
- BASIC — The Language that Makes Programming Fun.
- High-Resolution Graphics (in a 54,000-Point Array) for Finely-Detailed Displays.
- Sound Capability that Brings Programs to Life.
- Hand Controls for Games and Other Human-Input Applications.
- Internal Memory Capacity of 48K Bytes of RAM, 12K Bytes of ROM; for Big-System Performance in a Small Package.
- Eight Accessory Expansion Slots to let the System Grow With Your Needs.

You don't need to be an expert to enjoy APPLE II. It is a complete, ready-to-run computer. Just connect it to a video display and start using programs (or writing your own) the first day. You'll find that its tutorial manuals help you make it your own personal problem solver.

APPLE DISC II 3.3 Dos

EXTENDED GUARANTEE BY COMPUCARE



Disc with Controller **£349** + VAT
Additional Drives **£299** + VAT

● Powerful Disk Operating Software Supports up to 6 drives ● Name Access to Files for Ease of Use ● BASIC Program Chaining to Link Software Together ● Random or Sequential File Access to Simplify Programming ● Dynamic Disk Space Allocation for Efficient Storage ● Individual File Write-Protection Eliminates Accidental File Alterations ● Loads an 8K Byte Binary Image in 6.5 sec. (1.2 sec. in Pascal) ● Storage Capacity of 116 Kilobytes (143K Bytes with Pascal) on Standard 5¼" Diskettes ● Powered Directly From the APPLE (Up to 6 Drives) for Convenience and High Reliability ● Packaged in Heavy-Duty, Colour-Coordinated Steel Cabinet

Colour Monitors for Apple — **£295** + VAT

ATARI PERSONAL COMPUTERS IN COLOUR

EXTENDED GUARANTEE BY COMPUCARE

NEW



Atari 400 Console — Atari 800 Console (with cover removed)

Consoles available:-

Atari 400 with 8K RAM	£225
Atari 400 with 16K RAM	£295
Atari 800 with 16K RAM	£625
Atari 800 with 32K RAM	£649
Atari 800 with 48K RAM	£659

+ VAT

CENTRONICS 737 DOT MATRIX PRINTER

EXTENDED GUARANTEE BY COMPUCARE

NEW



only **£369** + VAT **including cables**

Standard Features
●80 CPS — Proportional Spaced Mode ●50 CPS — Monospaced Mode ● Proportional Spacing, Plus 10 CP1 and 16.7 CP1 ● N x 9 (Proportional) or 7 x 8 (Monospaced) Dot Matrix ● 7 x 8 Dot Matrix ● 3 Way Paper Handling System ● 96 Character ASC11 plus 6 European character sets ● Microprocessor Electronics ● Expanded Print ● Right Margin Justification ● Print Underlining ● 9-Wire Free Flight Print Head ● Bidirectional Stepper Motor Paper Drive ● Full One Line Buffer ● 21 LPM With 80 Columns Printed ● 58 LPM With 20 Columns Printed ● 6 Lines Per inch Vertical Spacing ● Paper Tear Bar ● Centronic Colours and Logo

MICROLINE 80

NEW



only **£299** + VAT

EXTENDED GUARANTEE BY COMPUCARE

● 9 x 7 dot matrix ● 96 ASC11 and 64 graphic character set ● Selectable line spacing ● Condensed, double width print ● Friction or pin feed ● 40/80/132 columns ● Upper and lower case ● Centronics parallel interface

EXTENDED GUARANTEE BY COMPUCARE

ATARI CARTRIDGES IN STOCK

Phone for availability

SALE

MEMORY UPGRADES

16K (8 x 4116) **£15.90** + VAT
4K Compukit (8 x 2114) **£15.90** + VAT

The PEDIGREE PETS



EXTENDED GUARANTEE BY COMPUCARE

32K ONLY **£549** + VAT

RRP £795 for 32K

Very popular for home & business use. 8K Microsoft Basic in ROM. 32K with new improved keyboard.

Cassette Deck **£55** extra Interface PET IEEE — Centronics Parallel Decoded **£77.00** + VAT

8032 80 COLUMN PET

EXTENDED GUARANTEE BY COMPUCARE



NEW

ONLY **£825** + VAT

The reliable value for money system with after sales support, instruction and training facilities and a wide range of programmes.

SPECIAL SCOOP

GET YOURSELF A NEW MX70 PRINTER AND SAVE A FORTUNE

EXTENDED GUARANTEE BY COMPUCARE

only **£249** + VAT



Interface Cards for Apple
● 80 Column, ● Upper & lower case ● Apple dot Graphics ● Centronics Parallel ● Uni-dimensional.

EX-STOCK

TX80 — **£229** + VAT MX80 — **£299** + VAT

COMMODORE VIC-20

ONLY **£159** + VAT



EXTENDED GUARANTEE BY COMPUCARE

- **16 foreground colours**
- **8 background colours**
- **Real typewriter keyboard with full graphics**
- **Music in three voices and three octaves**
- **Language and sound effects**

THE VIDEO GENIE SYSTEM

Ideal for small businesses, schools, colleges, homes, etc. Suitable for the experienced, inexperienced, hobbyist, teacher, etc.

EXTENDED GUARANTEE BY COMPUCARE

EG3000 Series

WITH NEW EXTRA KEYS!



16K **£279** VAT

● 16K user RAM plus extended 12K Microsoft BASIC in ROM ● Fully TRS-80 Level II software compatible ● Huge range of software already available ● Self contained, PSU, UHF modulator, and cassette ● Simply plugs into video monitor or UHF TV ● Full expansion to disks and printer ● Absolutely complete — just fit into mains plug.

The Video Genie is a complete computer system, requiring only connection to a domestic 625 line TV set to be fully operational; or if required a video monitor can be connected to provide the best quality display. 51 key typewriter style keyboard, which features a 10 key rollover. Supplied with the following accessories:- ● BASIC demonstration tape; ● Video lead; ● Second cassetee lead; ● Users manual; ● BASIC manual; ● Beginners programming manual. Write useful programs in the BASIC computer language yourself.

VIDEO GENIE EXPANSION BOX

EXTENDED GUARANTEE BY COMPUCARE

Complete with RS232 interface and floppy disc controller. O memory. **£225** + VAT.

Memory expansion card (S100) 16K **£110** 32K **£159** + VAT
Further S100 cards available later in the year.

YOUR ZX80 IS NOW NO LONGER REDUNDANT

Upgrade your ZX80 to the full animated graphics of the ZX81. (No screen flicker).

FOR ONLY **£12.95** + VAT IN KIT FORM

Works only in conjunction with **NEW** 8K ROM from Sinclair (Not Included).

ZX81 part-exchanges accepted-
GOOD PRICES OFFERED

SINCLAIR 16K RAM PLUS EXPANSION BOARD

3 SLOTS WITH EXTRA POWER SUPPLY

16K ONLY **£79** + VAT **4K** ONLY **£59** + VAT

COMP PRO MIXER



Professional audio mixer that you can build yourself and save over £100.
Only
£99.90
plus VAT for **complete** kit.
Plus **FREE** power supply valued at £25.00

ACCESSIT AUDIO ADD-ONS



TEAC DISK DRIVES

EXTENDED GUARANTEE BY COMPUCARE

- TEAC FD-50A has 40 tracks giving 125K Bytes unformatted single density capacity.
- The FD-50A can be used in double density recording mode.
- The FD-50A is Shugart SA400 interface compatible.
- Directly compatible with Tandy TRS80 expansion interface.
- Also interfaces with Video Genie, SWTP, TRS80, North Star Horizon, Superbrain, Nascom, etc, etc.
- Address selection for Daisy chaining up to 4 Disks.
- Disks plus power supply housed in an attractive grey case.

40 TRACK
Single Disk Drive **£225** + VAT Double Disk Drive **£389** + VAT

77 TRACK
Single Disk Drive **£299** + VAT Double Disk Drive **£499** + VAT

EXTENDED GUARANTEE BY COMPUCARE



FANTASTIC FOR FILE HANDLING

ACULAB FLOPPY TAPE

The tape that behaves like a disc, for TRS-80 LEVEL 2.
only **£169** + VAT

The Aculab Floppy Tape for the TRS-80 and Video Genie is a highly reliable digital storage system that provides many of the advantages of floppy disks at less cost. Automatic debounce routine for the Level 2 keyboard.
Connects directly to TRS-80 Level 2 Keyboard. Operating and file handling software in ROM. 8 commands add 12 powerful functions to Level 2 BASIC.

STOCKTAKE SALE NEVER TO BE REPEATED AT THIS PRICE

EUROPE'S FASTEST SELLING ONE BOARD COMPUTER

COMPUKIT UK101

33% DISCOUNT UNTIL STOCKS LAST



★6502 based system — best value for money on the market. ★Powerful 8K Basic — Fastest around ★Full Qwerty Keyboard ★1K RAM Expandable to 8K on board. ★Power supply and RF Modulator on board. ★No Extras needed — Plug-in and go ★Kansas City Tape Interface on board. ★Free Sampler Tape including powerful Dissassembler and Monitor with each Kit. ★If you want to learn about Micros, but didn't know which machine to buy then this is the machine for you.

COMPUKIT WITH ALL THE FEATURES THAT MADE IT THE MOST PROFESSIONAL COMPUTER KIT ON THE MARKET. Now WITH FREE NEW EXTENDED MONITOR (a saving), which includes Flashing Cursor, Screen Editing, & Save Data on Tape.

Build, Understand and Program your own Computer for only a small outlay.

KIT ONLY **£99.95** + VAT
Fully Assembled — **£149** + VAT

DEALER ENQUIRIES INVITED

NEW MONITOR IN ROM — available separately at **£7.90** + VAT.
Improved Basic function — revised GARBAGE routine. Allows correct use of STRING ARRAYS **£4.90** + VAT
This chip can be sold separately to existing Compukit and Super board users.

4K Upgrade Kit **£15.90** + VAT

FOR THE COMPUKIT — Assembler Editor **£14.90** Screen Editor Tape **£1.90**
GAME PACKS — 1). Four Games **£5.00** 2). Four Games **£5.00** 3). Three Games 8K only **£5.00**
Super Space Invaders (8K) **£6.50** Chequers **£3.00** Realtime Clock **£3.00**
Case for Compukit **£29.50** 40 pin Expansion Jumper Cable **£8.50** All Prices exclusive VAT

TTL SALE

Minimum Order — £5

74LS00	£0.10	74LS86	£0.30	Z80 6502	£4.90
74LS04	£0.10	74LS93	£0.50	ACIA 6850	£1.90
74LS05	£0.15	74LS157	£0.60	OP-AMP CA3130	£0.45
74LS10	£0.15	74LS165	£0.90	REG. 7805 5V	£0.75
74LS32	£0.20	74LS365	£0.40		
74LS74	£0.25	74LS373	£1.20		

Low Profile Sockets

14 PIN £0.05	18 PIN £0.10	24 PIN £0.20
16 PIN £0.06	20 PIN £0.15	40 PIN £0.27

OUR NEW SUPER LOCATION IN IRELAND

19 Herbert Street, Dublin 2.
Telephone: Dublin 604165

HEAR OUR ADS ON RADIO NOVA 88.1 VHF Stereo

NEC SPINWRITER

EXTENDED GUARANTEE BY COMPUCARE

only **£1490** + VAT



NEC's high quality printer uses a print "thimble" that has less diameter and inertia than a daisy wheel, giving a quieter, faster, more reliable printer that can cope with plotting and printing (128 ASCII characters) with up to five copies, friction or tractor fed. The ribbon and thimble can be changed in seconds. 55 characters per second bidirectional printing — with red/black, bold, subscript, superscript, proportional spacing, tabbing, and much, much more.

8MHz Super Quality Modulators	£4.90
6MHz Standard Modulators	£2.90
C12 Computer Grade Cassettes	10 for £4.00
Anadex Printer Paper — 2000 sheets	£15.00
Floppy Discs 5¼" Hard and Soft Sectored	£2.90
Floppy Disc Library Case 5¼"	£3.50
Ribbons DP8000	£3.50
DP9500/9501	£12.50

All Prices exclusive VAT

PANASONIC KX-T1520 AUTOMATIC TELEPHONE ANSWERING SYSTEM

EXTENDED GUARANTEE BY COMPUCARE

NOW AVAILABLE



£190 + VAT

One of the most technically advanced telephone answering units available, the KX-T1520 features a double cassette system, a C60 cassette for incoming calls, which can be limited to 30 secs each or recorded in their entirety, and a 20 sec continuous loop cassette for your outgoing messages which are recorded through the built-in microphone. Your telephone conversations can also be recorded after a bleep tone has notified your caller they are being taped. Incoming calls can be monitored and the ring control is adjustable.
The remote call-in pick-up with Playback/Reset/Repeat and Skip controls, activates the system to play back your messages to you over the phone wherever you are in the world.

WE HAVE ONE OF THE LARGEST COLLECTIONS OF COMPUTER BOOKS UNDER ONE ROOF, ALONG WITH RACKS OF SOFTWARE FOR THE GENIE AND TRS80.

EXTENDED GUARANTEE BY COMPUCARE



SHARP PC1211

£79.90 + VAT

COMPUTER POWER THAT ONCE FILLED A ROOM CAN NOW BE CARRIED IN YOUR POCKET!

- Programs in BASIC
- "QWERTY" Alphabetic Keyboard
- 1.9K Random Access Memory
- Long Battery Life.

EXTENDED GUARANTEE BY COMPUCARE

We give a full one year's guarantee on all our products, which normally only carry 3 months guarantee.

A SELECTION OF APPLE INTERFACES ARE NOW AVAILABLE AT OUR EDGWARE ROAD SHOWROOM

COMP SHOP

"Europes Largest Discount Personal Computer Stores"

Delivery is added at cost. Please make cheques and postal orders payable to **COMPSHOP LTD.**, or phone your order quoting **BARCLAYCARD, ACCESS, DINERS CLUB** or **AMERICAN EXPRESS** number.

MAIL ORDER AND SHOP: **CREDIT FACILITIES ARRANGED** — send S.A.E. for application form.
14 Station Road, New Barnet, Hertfordshire, EN5 1QW *(Close to New Barnet BR Station — Moorgate Line).*
Telephone: 01-441 2922 (Sales) 01-449 6596 Telex: 298755 TELCOM G
OPEN (BARNET) — 10am - 7pm — Monday to Saturday

NEW WEST END SHOWROOM:
311 Edgware Road, London W2. Telephone: 01-262 0387
OPEN (LONDON) — 10am - 6pm — Monday to Saturday

- **IRELAND: 19 Herbert Street, Dublin 2. Telephone: Dublin 604155**
- **COMPSHOP USA,** 1348 East Edinger, Santa Ana, California, Zip Code 92705. Telephone: 0101 714 5472526

TELEPHONE SALES
OPEN 24 hrs. 7 days a week
01-449 6596

BARCLAYCARD VISA · AMERICAN EXPRESS · DINERS CLUB INTERNATIONAL · ACCESS

BUYING THE HARDWARE IS ONLY HALF THE STORY...



Come & visit us



... bring your colleagues



... excellent demonstrations



... ex-stock items



... in the unlikely event,

...At Personal Computers we'll give it a happy ending.

Personal Computers Limited have been in the personal computing business right from the start — so we've got our values sorted out.

It's important for you to choose the right hardware and vital to select the right software.

To help you make the right choice we offer our highly-trained staff.

They know what makes computers whirr, and they know how to give you the right kind of support and maintenance.

THE BEST AVAILABLE

We stock the best available hardware and software packages in the market.

Such as Apple and Sharp units, with the latest additions like 16K RAM card.

We have I.E.E.E. Interface, low cost serial, parallel interfaces, Doublevision 80 character card, numeric keypads, personal computer plotters, Paper Tiger printers and much more besides.

Whatever you need in computing, we will satisfy your requirements.

FROM PERSONAL COMPUTERS

- **Small Business/Accounting.** We provide low-cost invoicing, purchase, sales and general ledger systems.
- **Financial Planning.** Micromodeller or Visicalc for ad hoc or regular financial reporting.
- **Dow Jones & Prestel** (including I.P. Terminal) services to the city, plus access to city commodities data base.
- **Word Processing.** Our Format 80 system is recognised as the best of its kind.
- **Databases.** State-of-the-art products like Personal Filing Systems and Data Factory.
- **Graphics.** Pad to plotter software and low-cost plotter.
- **Technical Support.** Our knowledge of computer languages and application requirements is unrivalled. And we can supply either on-site or in-house maintenance.

Once again ... Personal Computers Limited give the story a happy ending.

Computers are only as good as the people who use them ... and sell them. Think about that! Then give us a call.

Personal Computers Limited

Masters of Personal Computer Technology

194/200 Bishopsgate London EC2M 4NR Tel: 01-626 8121