# Personal Computer World

US $2.50 FF 18.50 SFr 7.30 IR £1.41 BFr 99.00
Lire 5,700 DKr 27.00 DM 9.5

July 1985 95p

Cheap memory on the Mac

BRITAIN'S BIGGEST MICROCOMPUTER MAGAZINE



## HAT TRICK OR HOWLER?

## Exclusive: Commodore's 128 tested




# Export, Buy, Rent or Lease.

**Join hundreds of leading companies – come to Silicon Valley in the heart of London for the very best hardware, software, training and above all – SERVICE.**

The B.B.C., British Telecom, Coopers and Lybrand, Express Newspapers, Imperial College, London Business School, The First National Bank of Chicago, McDougall, The National Computing Centre, Rank Xerox, Thames Water Authority, The Institute of Chartered Accountants . . .

These are just some of the many hundreds of companies and organisations who have dealt with us over the years.

Why do they come to Silicon Valley? Because whether you're a first time user or an established computer professional we try harder to provide friendly, helpful advice; a fuller service and better deals.

Whether you want the latest sophisticated multi-user system, accounts software or simple add-ons we can supply you quickly from our large depth of stock.

Shown above are just three of the many computers we can offer. From left to right they are: the Macintosh from Apple, the New AT from IBM and the Apricot from ACT.

What about our service?

We have our own workshops, stores and maintainence facilities at our premises, which enable us to provide a comprehensive after-sales service.

We also offer a full range of training programmes for you and your staff.

## TEL: 01-833-3391

TELEX: 8813271 GECOMS

ACT

IBM Personal Computer

COMPAQ™

**NEW OFFICE**

2, Paul St, E.C.2. Tel: 01-247 8577

silicon valley
COMPUTER CENTRE

## 164 Grays Inn Road, London WC1

I am interested in the following.
Please send me further information.

| | |
|---|---|
| HARDWARE | ☐ |
| SOFTWARE | ☐ |
| WORD PROCESSING | ☐ |
| NETWORKING | ☐ |
| COMMUNICATIONS | ☐ |
| TRAINING | ☐ |
| COMPUTER SYSTEMS | ☐ |
| GENERAL ADVICE ON MICROS | ☐ |
| SUPPLIES | ☐ |

Name_____
Position_____
Company_____
Address:_____
_____
_____
Tel No:_____

# Everyone can benefit from Effective Micro Training at Digitus

NEXT COURSE DATES

### Introduction to Personal Computers — Jun 10
Provides a basic understanding of microcomputer hardware, software and peripherals. Establishes the criteria for selecting and using micros. Explains the rudiments of programming. **1 day. £105.**

### Introduction to DOS — Jun 24
Provides a concentrated introduction to PC/MS DOS. Also reviews hardware components and popular applications. **1 day. £105.**

### Lotus 1-2-3 — Jun 25
A workshop course with advice on the design of worksheets and on solving practical problems. **1 day. £105.**

### 1-2-3 to Symphony — Jun 3
A practical conversion workshop for existing 1-2-3 users. **1 day. £105.**

### Introduction to Symphony — Jun 4
Provides a concentrated introduction to the main elements including spreadsheeting, graphics, information management and "managers" wordprocessor. Teaches the basic skills needed to use these features. **2 days. £210.**

### Symphony Workshop — Jun 6
Consolidates basic skills and teaches advanced features including building systems with the integrated package and command language. **2 days. £210.**

### Working with dBASE II — Jun 17
Teaches the user how to build and enquire from files and generate reports. **1 day. £105.**

All course fees are subject to VAT

### Programming with dBASE II — Jun 18
Teaches programming using the dBASE procedure language and also file design and indexing. **2 days. £210.**

### dBASE II Workshop — Jun 20
Builds on existing dBASE skills to teach the more advanced use of the procedure language and the practical application of all these facilities. **2 days. £210.**

### Wordprocessing with WordStar — Jun 19
A practical workshop course which teaches basic skills. **1 day. £105.**

### WordStar Workshop — Jun 20
A workshop to consolidate basic skills and teach advanced commands. **1 day. £105.**

### MailMerge — Jun 21
Efficient use of WordStar for mailing using MailMerge. **1 day. £105.**

### Wordprocessing with Multimate — Jun 18
A practical workshop course which teaches basic skills. **1 day. £105.**

### Multimate Workshop — Jun 19
Covering advanced features of Multimate, providing an ideal follow-up. **1 day. £105.**

### Wordprocessing with DisplayWrite 2 — Jun 5
A practical workshop teaching basic skills on this increasingly popular IBM-oriented wordprocessing package. **1 day. £105.**

### SunAccount — Jun 3
A practical course for both experienced and new SunAccount users. **2 days. £210**

### Fundamentals of BASIC — Jun 11
Develops the first principles of BASIC programming so that you can produce programs on a microcomputer. Gives practical hands-on experience of micros. **2 days. £210.**

### Improve your BASIC — Jun 13
Brushes up and improves BASIC programming technique; introduces sophisticated methods of file design, data organisation, access methods and control. Examines software tools. **2 days. £210.**

### Communications — Jun 6
Introduces the techniques of communicating between micros, from micros to peripherals and from micros to mainframes. **1 day. £125.**

### UNIX — Jun 10
An introduction to the facilities of the UNIX multi-user operating system, including the file system, shells and editors, and a review of the problems of system management. **3 days. £375.**

### UNIX Workshop — Jun 13
Further skills for those with responsibility for a UNIX system. **2 days. £250.**

### The C Programming Language — Jun 24
A tutorial on the main features of the C language, with extensive practical sessions on a multi-user system. **2 days. £250.**

### "C" Workshop — Jun 27
More advanced C programming skills. **2 days. £250.**

**The following courses are also held on a regular basis. Please send for details of next available dates.**

### Advanced Lotus 1-2-3
Builds on existing Lotus 1-2-3 skills, presenting information on database, statistical and file functions. **1 day. £105.**

### Introduction to Framework
Teaches the basic skills to operate the spreadsheet, graphics, database and wordprocessing. **2 days. £210.**

### Spreadsheeting with SuperCalc
A workshop course with advice on the design of worksheets and on solving practical problems. **1 day. £105.**

### Data Management with Delta
Teaches how to design, define and implement systems using this powerful data management package. **1 day. £105.**

### Information Management with Cardbox
A workshop course on design, applications and implementation. **1 day. £105.**

### Spreadsheeting with Multiplan
A practical workshop course on this popular spreadsheet package. **1 day. £105.**

### MANAGING OFFICE AUTOMATION
A two-day seminar to prepare management to devise and implement a successful office automation strategy. It addresses key issues, presents current examples and provides the opportunity to discuss important aspects related to the needs of your organisation.

**Next seminar: June 3-4.**

Digitus TRAINING

Send to, or phone:
The Training Administrator, Digitus Ltd.
Lading House, 10-14 Bedford Street,
Covent Garden, London WC2E 9HE
Tel: 01-379 6968 Telex 27950 ref 3005

From .....

Company .....

Address .....

.....

PCW/7/85

Please book places as follows ☐ or send me more details ☐

Course ..... Date ..... Places .....

.....

.....

### IN-COMPANY TRAINING
**Digitus provides courses tailored to the needs of individual companies, from seminars for management to detailed training for office and professional staff. Courses can be held on company premises, or at the Digitus Training Centre. Contact the Training Administrator for full details.**

# CONTENTS




Vol 8 No 7 July 1985

*Cover story begins page 136. Illustration by Andrew Farley*

# REGULARS

**NEWSPRINT** 110
Guy Kewney finds out if there's still life in the micro industry — twitching it may be, but it's definitely not dead yet.

**YANKEE DOODLES** 126
It could only happen in America — David Ahl put US events into perspective.

**ORIENT EXPRESS** 131
Shinichiro Kakizawa reports from the land of the rising technology.

**LETTERS** 132
Readers continue our learning process.

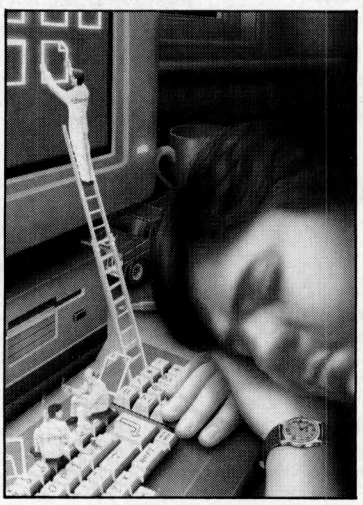

**BANKS' STATEMENT** 134
Windows, Topview and GEM — the inimitable Martin wonders if user-friendly operating environments are all they're cracked up to be.

**SUBSCRIPTIONS** 192
Come snow, rain and even a heatwave (well, it might happen one day) — guaranteed supplies of *PCW*.

**TJ'S WORKSHOP** 204
Save time and trouble by using these hints and tips.

**SCREENPLAY** 208
There are alternatives to alien-bashing — Stephen Applebaum selects the best in games.

**BIBLIOFILE** 212
Get rich or get educated? Just two of the choices open to David Taylor in this month's selection of books.

**SUBSET** 214
The perennial problem of screen-dumping solved in machine code.

**COMPUTER ANSWERS** 218
You name it, Simon Goodwin will solve it.

**NETWORKS** 220
Peter Tootill looks at a miraculous new modem and rounds up the UK networks.

**END ZONE** 222
Touchdown for Transaction File, Diary Data, Leisure Lines, Numbers Count, Computer Chess and ACC News.

**PROGRAM FILE** 232
No longer need Commodore users face the shame of tapes that load faster than disks. Nick Walker presents the solution to this particular problem, alongside other programs for machines whose drives already work at a respectable rate. He also presents programs for the BBC Micro, Spectrum, Memotech and Epson HX-20.

**ADVERTISERS' INDEX** 302
Who's where in this issue.

**CHIPCHAT** 304
Renamed the C5 Special for this issue only — plus the worst of the rest

**Founder** Angelo Zgorelec **Editor** Graham Cunningham **Production Editor** Ginny Conran **Acting Production Editor** Kirstie Rogers **Sub Editor** Lauraine Danker **Business Computing Editor** Peter Bright **Staff Writers** Nick Walker, Stephen Applebaum, Owen Linderholm **Consultant Editors** David Tebbutt, Dick Pountain **Editorial Secretary** Tracy Dear **Art Director** Peter Green **Assistant Art Editor** Paul Ballard **Typesetters** Meadway Graphics 198 Victoria Road Romford Essex **Sales Director** John Cade **Publisher** Tony Harris **Publishing Manager** David Mankin **Group Advertisement Manager** Duncan Brown **Advertisement Manager** Bettina Williams **Assistant Advertisement Managers** Claire Rowbottom, Phil Pratt **Sales Executives** Claire Barnes, Steve Corrick, Jeska Harrington, Tony Keefe, Christian McCarthy, David Morgan, Isabel Middleton **Advertisement Assistant** Nicola Hall **Advertisement Production** Gerry O'Sullivan **Production Assistant** Howard Carter

# BENCHTESTS & REVIEWS

**COVER STORY: 136**




**COMMODORE 128**
Other companies just add more memory to the micros they already make, but not Commodore. It's incorporated two new 'machines' within the 64 to create the 128. Peter Worlock finds out if it's a perfect marriage or an unholy alliance.

**QL ISO PASCAL** **142**
Does this Pascal's validation by the International Standards Organisation put it ahead of the pack? Adam Denning ponders the question.

**EPSON QX-16** **144**
You need to offer more than IBM PC compatibility to survive these days. Epson has added a Mac-like operating environment to this desk-top machine, and has bundled in peripherals and software as part of the package. Peter Bright extracts the contents.

**SAMNA+** **182**
Not exactly a name to conjure with, but worth noting for word processing. Kathy Lang explains why.

**McMILL 68008 CARD** **186**
Bring the ageing Apple II up-to-date with this 16-bit processing card.

**DEMON** **194**
Does this modem offer the right combination of sophistication and price? Ralph Peters is the man on the line.

**SYCERO** **196**
It may be powerful, but how easy is it to use? Kathy Lang puts this program builder through its paces.


# FEATURES

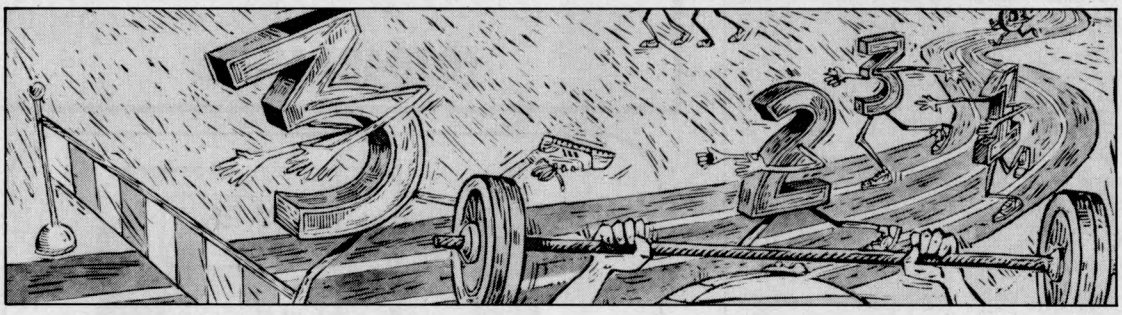


**FAST TIMING** **152**
It's stopwatch time again as we measure the mathematical accuracy and speed of nine different micros, with some surprising results.

**GO FORTH AND PROSPER** **156**
The intricacies and delights of programming in Forth.

**TELEVISION TUNE-IN** **162**
Basicode may be dead on the radio, but long live Visicode on television. All the details on receiving via your TV set in this follow-up to 'Light Fantastic'.

**BUSINESS BEGINS AT HOME** **168**
Balance your books using the Abacus module in Psion's Xchange suite of packages.

**FATTEN UP YOUR MAC** **174**
Make a killing by upgrading a 128k Mac to 512k — at a third of the official price.

**SLICING THE PIE** **188**
Programming business graphics the easy way.

**PRIMITIVE LOGO** **200**
The sophisticated side of Logo illustrated by a 'predatory' simulation.


**ON THE MOVE**
We've moved — our new address is:
Personal Computer World
VNU Business Publications
VNU House
32-34 Broadwick Street
London W1A 2HG

The new phone numbers are:
Advertising: (01) 927 9016
Editorial: (01) 439 4242
Subscriptions/Back Issues: (01) 439 4242


**PCW Subscription Enquiries** Stuart Cruickshank **Subscription Rates** UK: £15, Overseas £40 **Subscription and mail order address** 32-34 Broadwick Street, London W1A 2HG, tel: 01-439 4242 telex 23918 VNUG


© Computing Publications Ltd. 1985.


**Editorial and advertising address** 32-34 Broadwick Street, London W1A 2HG, tel: 01-439 4242.


No material may be reproduced in whole or in part without written consent from the copyright holders.


Printed by Chase Web Offset, St Austell, Cornwall. Distributed by Seymour Press, 334 Brixton Road, London SW9, tel: 01-733 4444.

# Computer Enterprises International Ltd.

### OLIVETTI
OLIVETTI M21, DD, 128K RAM ..... £1399
OLIVETTI M24 128K, DD, Mono/colour ..... £1399/£1850
OLIVETTI M24 128K, SD, 10MB HD Mono/colour ..... £2995/£3390
OLIVETTI M10 8K RAM/24K RAM ..... £350/399

### IBM
IBM PC 256K Double drives Mono/colour ..... £1900/£2150
IBM PC 256K SD, 10MD HD Mono/colour ..... £2990/£3300

### APRICOT
APRICOT PC 256K, 2X720, 9" Mono/12" Mono ..... £1499/£1550
APRICOT X1 10MB, 1X720, 9" Mono/12" Mono ..... £2170/£2220
APRICOT XI10S 512K, 10MB HD ..... £2590/£2630
APRICOT X120S 1MB RAM, 20MB HD ..... £3395/£4430
APRICOT F1/F1E ..... £750/£400
APRICOT Portable 512K, 720K, Colour, Mouse ..... £1699
POINT 7 Cluster Controller with DOS ..... £425

### SIRIUS/VICTOR
VICTOR 1.2MB+256K/2.4MB+256K ..... £1695/£2050
VICTOR 10MB HARD DISK+1.2MB Drive+256K ..... £2790
VICKY (Portable) 2.4mb drives+256K RAM ..... £1950
VICTOR VI (Sirius/IBM Compatible) ..... £3990
VICTOR VPC 15MB HD, SD, Mono ..... £2550
PC Card (Makes Sirius IBM compatible) ..... £950

### SANYO
SANYO 775 Colour with free software ..... NEW ..... £1795
SANYO MBC 2X720K DRIVES+monitor+Free Software ..... £990
SANYO MBC 10MB HARD DISK+Monitor+Free Software ..... £1990
SANYO 555 With £1000 worth software ..... £790
SANYO 550-2/555-2 £1000 worth software ..... £799/£1159

### COLOMBIA
COLOMBIA Twin disks, mono, bundled software/Colour £1799/1895
COLOMBIA 10mb+320K disk+£1000 software/Colour £2850/2940
COLOMBIA VP PORTABLE 128K RAM/256k RAM+Software..£1299/1350

MACINTOSH Macwrite+Macpaint/
Apple IIe/IIc ..... £1399/£495/799

### COMPAQ
COMPAQ 256K RAM, 2 DRIVES;SDOS ..... £1650
COMPAQ 256K RAM, 10MB HARD DISK+DRIVE ..... £2990
DESKPRO MOD2/DESKPRO MOD4 ..... £2100/£4490

### TELEVIDEO
TELE-PC 1605 ..... £1695
TELEVIDEO TPC-II PORTABLE ..... £1750

### ZENITH
Desk Top Twin 320/360KB Drives IBM Comp/Portable ..£1795/1699
Desk Top 1 MB Hard Disk & Drive ..... £2790

### COMMODORE
COMMODORE PC 256K RAM, 12" mono, Double drives ..... £1399
COMMODORE 8296 £1000 worth free software ..... £1499

### EPSON
EPSON QX16 Taxi, Free Software ..... £1795
EPSON PX-8 64k, CPM, Basic, Wordstar/120k RAM PACK ..... £699/£859

### KAYPRO
2 Twin single sided & free Soft ..... £899
KAYPRO 4 Twin double sided & free Soft ..... £1175
KAYPRO 10 with 10Mb HD and Free software ..... £1895
KAYPRO 286 (IBM AT Compatible) ..... £4250

### NEC
NEC APC III Mono/colour ..... £1850/2150
NEC APC+NEC 2000 DW Printer+Software ..... £1990
NEC PORTABLE PC8201+£200 Free software ..... £290

CANNON A200M/A200C 256K RAM, Twin drives ..... £1390/£1450
HEWLETT PACKARD HP 150 ..... £2195
HYPERION 256K, RAM disk, 2 drives, Free software ..... £1995
SINCLAIR QL/DISK INTERFACE ..... £320/£149
BBC B with DFS ..£399/COMMMODORE 64 ..... £450/£195

### MULTI-USER COMPUTERS
NORTHSTAR DIMENSION 15MB HD, 2 User/each user £4995/£1295
TELEVIDEO PERSONAL MINI ..... £9750
ALTOS Xenix, MPM86, 1 to 8 users, Ethernet ..... £POA
OLIVETTI 3B2 unix V for UNIX SOFTWARE ..... £RING

## PRINTERS

### DOT MATRIX
Smith Corona FT80/D100/D200/D300
New LOW PRICES ..... £RING
Canon PW1080A/1156A (NLQ) ..... £285/375
Canon PJ1080A (Ink Jet) ..... £389
Kaga Taxan KP810/910 (NLQ) ..... £289/£399
Panasonic NLQ 80/136 ..... £275/375
Riteman II NLQ ..... £299
MP165 NLQ/165CPS ..... £279
Honeywell 32/34CQ ..... £499/£850
Dataproducts 8050/8070 ..... £CALL
Dataproducts 8010/8020 ..... £CALL
Brother EP44 KSKR/HR5 ..... £195/129
Brother M1009/TC600 ..... £189/£395
Brother 202NLQ ..... £850
Panasonic 80/132Col LQ ..... £265/£399
Epson P40/P80 ..... £95/£150
Epson JX80 Colour ..... £499
Epson RX80FT+ ..... £219
Epson FX80 ..... £350
Epson RX100FT/FX100FT ..... £359/£459
Epson LQ1500 ..... £895
Fujitsu P1340/1351 (24pin) ..... £CALL
Shinwa CPA80/CPB800 ..... £179/£199
Shinwa CPB 136P ..... £350
NEC P2/P3 ..... £650/£795
Brother 2024L (190cps) ..... £899
Brother 1009 ..... £179
Infoscribe 1100/1200 ..... £1100/£1395
Microprism FT (S&P) ..... £299
Mannesmann Tally MT85/86 ..... £299/£399
M Tally MT80/180 ..... £175/£499
Seikosha GP700A (Colour) ..... £349
Seikosha GP250X ..... £199
Seikosha GP550A ..... £219
Seikosha GP100A ..... £149
Seikosha BP5420 420CPS ..... £590
Microline 82A/92P ..... £239/£360
Microline 83P/93P ..... £468/$99
Microline 84P ..... £659
Microline 2410P ..... £1590
Star Gemini 10X/15X ..... £219/£299
Star Delta 10X/15X ..... £335/£429
Star Radix 10X/15X ..... £470/£595
Toshiba 210DH (LQ) ..... £1349
Texas Instruments 810/LQ ..... £995
Texas Instruments 855/LQ ..... £695
Anadex DP9725 (240cps) ..... £1195
Anadex WP6000 (330cps) ..... £1795
Anadex DP6500 (500cps) ..... £1990
DRE-Newbury DRI 8925 240cps ..... £1445
Newbury Data 8931 240cps+LQ ..... £1750
Newbury Data 8950 480cps ..... £1990
Hermes 612B ..... £1690
Anadex DP9500 (180cps) ..... £850
Anadex DP9620 (240cps) ..... £985
Philps Mullard GP300 from ..... £1900
Siemens PT88 & PT89 (Ink jet) ..... £525
Diablo 750C Colour ink jet ..... £890
Cannon Laser Printer ..... £2900
HP Laser Printer ..... £3195

### DAISYWHEEL PRINTERS
Brother HR1/HR15 ..... £290/£349
Brother HR25/35 ..... £595/£799
Juki 6100/6300 ..... £299/£650
Juki 2200 ..... £249
Quen-Data ..... £219
Daisystep 2000 ..... £269
QUME Letter-Pro20 ..... £446
Olivetti DY450 ..... £699
QUME 9/45-55 ..... £1595/£2150
QUME 11/40-55 ..... £1195/£1379
NEC 3510 (S or P) ..... £1015
NEC 2010 (S or P) ..... £539
NEC 2050 (for IBM) ..... £699
Diablo 620 RO ..... £695
Diablo 630 API ..... £1299
Ricoh 1200/1300 ..... £495/795
Ricoh 1600 ..... £1375
TEC F10-40/50 ..... £995/£1250
Smith Corona TP1/L100 ..... £189/£249
Silver Reed EXP .. *NEW* ..... £CALL
Brother EM101 KSR ..... £799
HP 2225 THINKJET ..... £399

### AUTO SHEET FEEDERS
Genesis
(Tec/Nec/Ricoh/Diablo) ..... £299
Rutishauser Mechanical ..... £395
Rutishauser Electro Mechanical ..... £479
Tractor Feeds ..... £159
Acoustic Hoods/with SSF ..... £250/£375
Printer Stand for any printer ..... £79

## MONITOR

### MONOCHROME
Roland MB121 Green/Amber ..... £120
Sanyo DM8112 CX (18mhz) ..... £89
Sanyo DM9112 12" 20mhz ..... £110
Philips 7502/7522 ..... £79/£85
Kaga 12G (Green) ..... £98/£110
Zenith Green/Amber ..... £90
BMC 12" High Res ..... £99
Zenith 12" Green/Amber ..... £95
Yanjen (Green/Amber/tilt/Sw) ..... £99
Swivel & Tilt Monitor Stand ..... £28

### COLOUR
Roland CC-141 14" (640×200) ..... £395
Kaga Vision-PC ..... £399
Kaga K12R1X ... RGB/PAL ..... £249
Sinclair Vision QL ..... £235
Novex 14" ... RGB ..... £239
Luxor 14" (Super Res, 800 dot) ..... £495
Dyneer 14CMI 640×200 ..... £399
Dyneer 14CHI 720×350 ..... £575
Sanyo CD3117M (620 DOT) ..... £295
Sanyo CD3115H (720 DOT) ..... £399
Fidelity CM14 12mhz, RGB & COMP £185
Microvitec monitors ..... £POA
Princeton HX-12/SR12 ..... £490/£645

### TERMINALS
Qume QVT 102 ..... £455
Qume QVT 108 ..... £590
Qume QVT 211GX (Tektronics) ..... £856
Qume QVT 103 (DEC VT100) ..... £595
Kokasi ICL 12" ..... £350
Televideo 924/925/950 ..... Best Price
Zentec (Various Emulations) ..... £495
Hazeltines Esprit I/II ..... £450/£495
Hazletine Esprit III (TV1950) ..... £655
Tatung VT4200 ..... £499
Wyse WY50/WY75 ..... £595/£699

### PLOTTERS & DIGITISERS
Roland DXY800(8 Pen/A3) ..... £495
Roland DXY880 (HP Compatible) ..... £795
Roland DXY980 ..... £1150
HP 7470/7475 ..... £895/£1390
Watanabe MP1000 ..... £699
Watanabe WX4636 ..... £2165
MT Pixy Plotter (with SF) ..... £495
ACT Writer 80/81 ..... £528/£695
Epson H180/Expansion RAM ..... £365/£75
Gold Bryans DP7 ..... £1255
Houston DMP42 (A2) ..... £2990
Houston DMP52 (A1) ..... £3990
STROBE 8 Pen drum plotter ..... £655
Summagraphics ..... £595
Houston Hi-Pad ..... £699
Sweet-P ..... £800
PC-Pad Digitizer ..... £390
Calcomp Digitizer ..... £POA

### SOFTWARE
**(Please call us for any Software for best prices).**
Wordstar 2000 (IBM/Apricot) ..... £295
Dataflex (Single/Multi User) ..... £595/£990
Lotus 123/Symphony ..... £299/£399
Open Access-2 (IBM/Apricot) ..... £350
Framework/Friday ..... £350/£175
Dbase II/III ..... £250/£325
Sensible Solution ..... £600
PC-Paint with Mouse ..... £180
Exchange (4 Int. Package) ..... £395
Card-box/Plus ..... £139/£295
Files & Folders/Offix ..... £250/£450
Volkswriter Deluxe ..... £190
PFS: Report/File/Write/Graph ..... £350
File Transfer IBM/Apricot/Sirius ..... £95
Autocad/ADE1/ADE2 ..... £800/£300/£300
Doodle (CAD Package for IBM/Apricot) ..... £695
Cadplan (CAD with Autodimensioning) ..... £1500
Smartwork (Circuit Board Design) ..... £895
QED+/Main Street Filer ..... £290/£150
Sage Accounts/Plus ..... £239/£490
Easy Junior ..... £395
Sycero/Crosstalk ..... £499/£129
Pulsar/Pegasus (Each) ..... £200/£230
Microsoft Project/
Superproject ..... £250/£295
Pertmaster/Milestone ..... £650/£295
Harward Project Manager/
Hornet ..... £379/£2150
Omnis III/Datamaster ..... £399/£425
Everyman/Knowledgeman ..... £379/£395
Reflex/Ensemble (Mac) ..... £375/£250
Wordstar Professional ..... £119
Multi Tool Word w/Mouse ..... £275
Multimate/Wordperfect ..... £250/£399
Wordcraft/Samna+ ..... £299/£500
Arabic Word Processor/
Conversion ..... £550/£500
Perfect II (Writer/Calc/Filer) ..... £395
Filevision (Mac) Maccash/
Macledger ..... £140/£295
Jazz/Desq ..... £395/£290
Energraphics/Helix ..... £290/£290
Crosstalk/Sidekick ..... £129/£49
Human Edge Software ..... Each £195
Expertease/Mind Proper ..... £650/£39
R:Base 5000 ..... £399
Norton Utilities/Xenocopy ..... £55/£135
Supercalc 2/3 ..... £195/£235
Multiplan/Trigger ..... £150/£450
Turbo Pascal/Superkey ..... £45/£60
Delta 4/Retrieve II ..... £350/£350
Smart WP/DB/SS ..... Each £295
Micromodeller ..... £595/£450
Copy IIPC/Copywriteple ..... £39/£50
Think Tank/TK! Solver ..... £125/£190
Jane (Apple)/Spotlight ..... £179/£195
Sargon II/III ..... £22/£29
Millionaire (Stock market simulation) ..... £39
Chess 3D/Frogger/Pinball ..... 95/£25/£29
Spotlight ..... £99
Management training series ..... £350
Backgammon/Checkers/Chess ..... £59
Flight Simulator ..... £59
Insurance Brokers System ..... £695
News Agent System ..... £500
Integrated Travel Agents System ..... £750

### COMMUNICATION
Acoustic Couplers (CX21/KN) ..... £160/£130
Buzzbox Modem/V21
Auto Answer ..... £90/£139
Portman V2123/V2123AA ..... £125/£170
Telemod V21AA/V2123AA ..... £130/£150
Minor Miracles V21/V22 ..... £120
Steebek SB1212/V22AD ..... £450/£650
Micom Borer M4012/V22 (AA) ..... £600
Micom Borer M3012/V21V23 (AA) ..... £250
Master Systems V2123/
2123AD ..... £235/£300
Dacom V2123AD/2123GT ..... £330/450
Braid Telex System ..... £1750
Telebox III/Mytelex ..... £1350/£1700
Communique (Sirius/Apricot) ..... £350
Telecom Gold/Easylink/one to one ..... £POA
Sage Communication Pack ..... £350
IBM Internal Modem V2123AD ..... £290
Pace Multifunction ..... £137

### Add-Ons and Accessories
AST/MPC/QUAD Cards
for IBM PC/XT ..... £RING
Keytronics IBM Keyboard ..... £175/£250
Roland Synthesizers
(Juno-106/JX-3P) ..... £POA
Image Recording System ..... £1250
Cumana Disk for BBC at best prices ..... RING
Each 64K RAM for IBM or Comp ..... £76
IBM Joystick/Trackball ..... £45/£39
Apple/IBM/C64/Atari joystick ..... £39
Mouse (IBM/Apricot S or P) ..... £125
Hercules GRF CARD ..... £250
Plus-5 10MB HD for IBM,
Sanyo, etc ..... £1125
Power Bank (for power cuts) ..... £590
Multi User PC Expansion ..... from £1050
Rodime hard disks for
IBM/Sanyo/Apricot
10MB/20MB/30MB ..... £1000/£1295/£1500
Cipher Tape Streamer 10MB ..... £850
Oberon Omni-Reader ..... £350
Tecmar 10mb HD/15mb ..... £1100/£1790
Tecmar Graphics Master ..... £595

### SPECIAL DEALS
Complete 2D Colour Drafting
System ..... £3950
Circuit Board Desing System ..... £2900
Macintosh with 15mb hard disk ..... £3500
Televideo 1605 ..... £1490
Hyperion ..... £1550
Apple IIE (Lots of software) ..... £250
Smith Corona Fastext 80 ..... £95
Smith Corona D100 ..... £150

**COMPUTER ENTERPRISES INTERNATIONAL LTD.**
**01-543 6866/542 4850 TLX: 946240 CWEASY G (Quote: 19005565)**
**EASYLINK MAILBOX: 19005565 TELECOM GOLD MAILBOX:**
**SHOWROOMS (OPEN Mon-Sat 9 to 6)**
**85-85A QUICKS ROAD, WIMBLEDON, LONDON SW19 1EX UK**
**LESSINGSTRASSE 60, 5300 BONN 1 GERMANY**
**Tel: 0228/220297**

Export, Educational, Dealer, Governmental, Lease, Rent, Consultant ENQUIRIES WELCOME. All items new and carry manufacturers guarantee. Prices exclusive of VAT, Installation, Training, Delivery and subject to change without notice. Delivery £10 for each item in UK, £75.00 for Europe.
PAYMENT
By Eurocheques, Credit Cards LC, IMO, Direct Transfer

# PAM COMPUTERS

apricot

SANYO

## FOR YOUR FIRST COMPUTER SYSTEM

When you buy a system from PAM COMPUTERS that is not all you get, with each system comes advice, training and ongoing support. We will advise you on the right system for your business having first assessed what your needs are.

## COMPLETE BUSINESS SYSTEMS

SANYO MBC555 with 2x160k disks ..... £1369
SANYO MBC555-2 with 2x360k disks ..... £1699
APRICOT PC with 2x720k disks ..... £2299
APRICOT Xi 10 with 10MB & 720k disks ..... £2999

## FREE TRAINING

Prices include a matrix printer, everything you need to set up your first system, plus free software and 2 days on-site training. These systems include the SAGE integrated accounts package. All prices exclude vat.

## ASK ABOUT OUR SOFTWARE PRICES NORMALLY 30% OFF RRP

**Please PHONE**
**for more details about our systems**

**3 TENNYSON ROAD, ASHFORD, MIDDX TW15 2LN**

# (07842) 48972




# dBASE® takes off!

*WordTech Systems productivity tools are making dBASE the world's most popular programming language.*

**dB**COMPILER
The first compiler for dBASE II.

**dB**IIICOMPILER
The new compiler for dBASE III.

**dB**DEBUGGER
The symbolic debugging tool for programs written in dBASE.

**dB**INDEX
The high speed index and sort utility for dBASE II and III data files.

dBASE, dBASE II, dBASE III are trademarks of Ashton-Tate, Inc.

**PARKINS ASSOCIATES**

PARKINS ASSOCIATES (PCW7)
20 RIDGEWAY, RAYLEIGH
ESSEX SS6 7BJ
Tel: 0268 - 743928

Cash: Cheque with order or Access

Access

Now available for Rental

# IBM+ACT WITH EXTRAS

- ✻ Accurate analysis of your requirements
- ✻ Highly competitive pricing
- ✻ Wide range of compatible software
- ✻ Staff training facility
- ✻ Rentals service available
- ✻ Try before you buy – we refund 95% of your rental if you purchase within first month of rental
- ✻ Trade-in on existing systems
- ✻ Expert installation service
- ✻ Micro data-transfer service






CORPORATE DEALER

IBM Personal Computer
IBM Authorised Dealer

We specialise in networking your IBM PC's and Apricots together using the manufacturers' related products. These include IBM networking and clustering hardware and software and also the Point 7 and Point 32 from ACT.

As well as hardware from the leading manufacturers, you'll get friendly help and advice from 01 Computers, one of Britain's acknowledged experts.

And since we also handle the New Innovative Smart Integrated Business software package, we can really help you turn your personal computer into a powerful business tool.

Send in the coupon and find out how.

## 01 COMPUTERS LTD.

Southampton House, 192-206 York Road, London SW11 3SA

**Telephone for a FREE demonstration Tel:- 01-228 2207 Telex 8954575 CTC LDN**

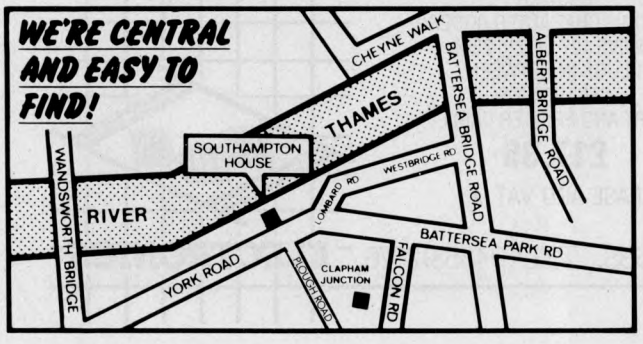


Fill in this coupon and send it to us at the address below. It's an important first step to answering all your business computing needs.

Name _____

Address _____

_____ Tel No: _____

Occupation _____

Southampton House, 192-206 York Road, London SW11 3SA

# ITS

| IBM PC | |
|---|---|
| FRAMEWORK | £325 |
| SYMPHONY | £400 |
| WORDSTAR PROF | £275 |
| DBASE III | £325 |
| TK SOLVER! | £225 |
| OMNIS 3 | £375 |
| LOTUS 1-2-3 | £300 |
| SUPERCALC 3 | £200 |
| HITCHHIKER'S GUIDE | £30 |
| DOLLARS AND SENSE | £110 |
| PROKEY | £80 |
| FLIGHT SIMULATOR | £45 |
| WIZARDRY | £40 |
| MILLIONAIRE | £40 |
| SIDEKICK | £40 |
| MULTIMATE | £260 |
| R:BASE 4000 | £275 |
| OPEN ACCESS | £325 |
| CROSSTALK XVI | £125 |
| THINKTANK | £125 |

| APRICOT | |
|---|---|
| DBASE II | £235 |
| LOTUS 1-2-3 | £330 |
| MULTIPLAN | £105 |
| OPEN ACCESS | £315 |
| SUPERCALC 3 | £195 |
| WORDSTAR PROF | £265 |
| DATASTAR | £115 |
| SUPERSOFT C | £135 |
| TURBO PASCAL | £40 |
| XCHANGE | £360 |
| SPELLBINDER | £295 |
| CARDBOX PLUS | £250 |
| DELTA 4 | £415 |
| BRAINSTORM | £215 |
| CHIT-CHAT | £95 |
| CROSSTALK | £140 |
| QUILL | £125 |
| ABACUS | £125 |
| EASEL | £125 |
| ARCHIVE | £180 |

| APPLE II | |
|---|---|
| DBASE II | £235 |
| TURBO PASCAL | £40 |
| BANK STREET WRITER | £45 |
| FORMAT 80 | £95 |
| SIDEWAYS | £40 |
| HITCHHIKER'S GUIDE | £30 |
| THINKTANK | £100 |
| DOLLARS AND SENSE | £65 |
| WORDSTAR PROF | £300 |
| MULTIPLAN ADOS | £115 |
| ULTIMA III | £40 |
| MOVIEMAKER | £35 |
| WIZARDRY | £35 |
| WIZARDRY SCENARIO 4 | £35 |
| PFS:FILE | £80 |
| SUPERCALC II | £140 |
| FLIGHT SIMULATOR II | £40 |
| MEGAWORKS | £100 |
| FLASHCALC | £65 |
| OMNIS 3 | £325 |

| MACINTOSH | |
|---|---|
| HOME ACCOUNTANT | £65 |
| SQUIRE | £45 |
| INFOCOM ADVENTURES | £35 |
| TRIVIA SAVANT | £40 |
| THINKTANK | £95 |
| JAZZ | £390 |
| MICROSOFT BASIC | £105 |
| MICROSOFT CHART | £105 |
| MICROSOFT FILE | £115 |
| MULTIPLAN | £135 |
| MICROSOFT WORD | £115 |
| MAC THE KNIFE | £25 |
| DOLLARS AND SENSE | £100 |
| HELIX | £175 |
| TK! SOLVER | £140 |
| FILEVISION | £125 |
| OMNIS 3 | £325 |
| 1ST BASE | £130 |
| FACTFINDER | £110 |
| MACLEDGER | £215 |

**ITS, 33 FOSCOTE ROAD, LONDON NW4 3SE**
**Tel: 01-430 2284 Telex: 21251 TICK G**
MAIL ORDER ONLY : ALL PRICES EXCLUDE VAT
ALL PRICES INCLUDE POST & PACKING
CHEQUES ETC PAYABLE TO ITS
*Other popular software packages available*

# Low-cost Acoustic Couplers

FROM
**£85**
+ p&p + VAT




APPROVED for use with telecommunication systems run by British Telecommunications in accordance with the conditions in the instructions for use

An unbeatable range of completely portable, instantly useable, highly reliable Acoustic Couplers — at astoundingly low prices.

**3005** Originate only mode CCITT V21 with external power supply unit. Diagnostic LEDS. Standard V24/RS232 interface. Durable aluminium case. In-built current loop interface. Digital filter for minimum error. Unique cup design fits almost any phone.

**3005-1** As above plus switch for originate and answer mode.

**3005-2** As 3005-1 plus internal rechargeable battery

**3005-3** As 3005-2 plus external switch controls V21 or Bell 103

**3012** Originate only CCITT V23, 1200/75 or 1200 half duplex

Please send me _____ 3005 at £103.50; _____ 3005-1 at £109.25; _____ 3005-2 at £115.00; _____ 3005-3 at £119.60; _____ 3012 at £115.00.
All prices are inclusive of £5 p&p and VAT.

NAME _____

ADDRESS _____

_____

_____ TEL: _____ PCW 7/85

I enclose my cheque for £ _____

**Modular Technology Ltd.**, Zygal House, Telford Road, Bicester, Oxfordshire. OX6 0XB
Tel: Bicester (0869) 253361

Modular Technology

# AMSTRAD INTERFACES AMSTRAD INTERFACES

★★★ THIS IS NOT JUST A MODEM, BUT A COMPLETE SYSTEM, NOTHING ELSE TO BUY ★★★

Incorporating serial and parallel interfaces, to allow software control of all functions. Each feature controlled from Basic with the bar commands. Call from M/C or on entering bar modem all controls are menu driven for ease of use. Bell/CCITT standards 300/300 600 1200 1200/75 75/1200 full and half duplex, auto dial and auto answer contact bulletin boards, Prestel compatible, software built-in on its own sideways ROM. Unique panel display, it displays what the modem is doing, mode of operation, and digits when auto-dialling. Standard BT plug connector.

★★ MODEM ★★
★ £153.00 ★

*NOTE — THIS MODEM IS NOT BT APPROVED*

★ SIDEWAYS ROM ★
★★★ £26.05 ★★★

The unit holds 4 ROMs. Each can be 2, 4, 8 or 16K in size incorporating a device to allow 'slower' ROMs to be used, less than Amstrad suggested 200ps. That means cheaper ROMs. Free utility ROM with every unit.

**RS232**
COMMUNICATE WITH YOUR MODEM
TALK TO OTHER COMPUTERS
USE SERIAL PRINTERS
SPLIT BAUD RATES
STANDARD 25-WAY 'D' CONNECTOR
**£39.96**

**PARALLEL PORT**
MAKE THAT ROBOT MOVE
CONTROL ELECTRICAL APPLIANCE
TWIN 8-BIT PORTS
OPERATES DIRECT FROM BASIC
2 14-WAY SPEEDBLOCK CONNECTORS
**£22.57**

**8-BIT PRINTER PORT**
MAKE USE OF THAT 8-BIT PRINTER
ALLOWS CHARACTER CODES ABOVE 127 (ie 0 to 255)
PLUGS IN-BETWEEN CENTRONICS PORT AND PRINTER CABLE
**£17.35**

ALL UNITS ARE CASED AND HAVE THROUGH CONNECTORS ★ PLEASE ADD VAT ★

15 HILL STREET, HUNSTANTON, NORFOLK PE36 5BS. TEL:(04853)2076

COMPUTER HARDWARE & SOFTWARE

KDS ELECTRONICS

# Isn't it time your software learnt to co-operate?

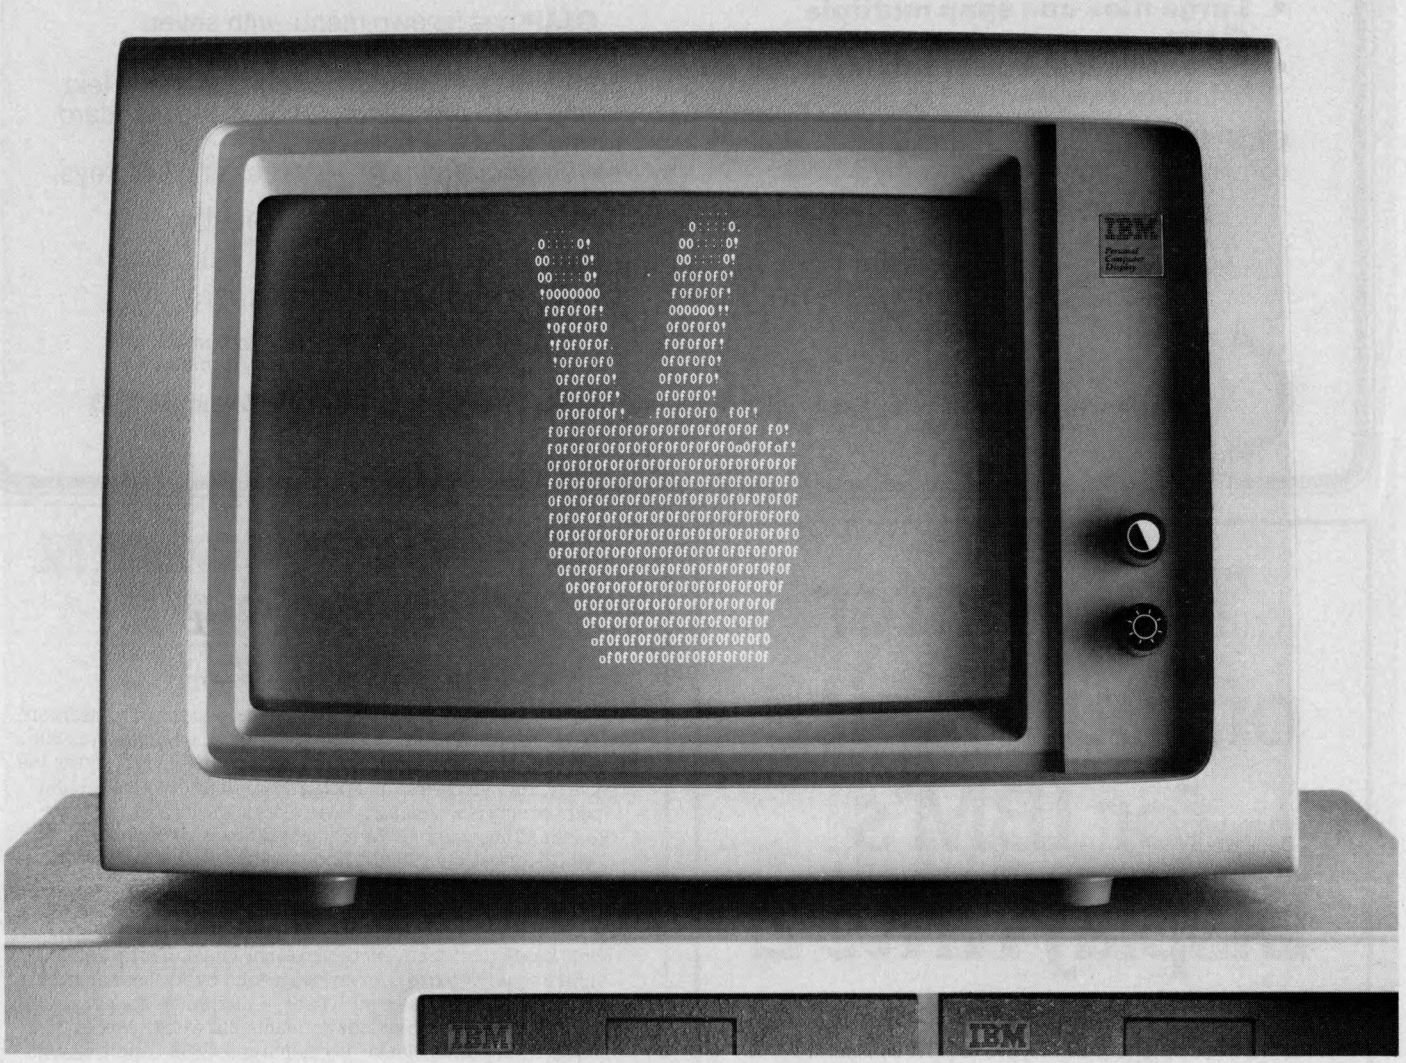


Software programs have always had their own way of working and no other.

But their quirks and limitations are no longer a problem.

Twenty/twenty is a unique and quite extraordinary new package which can take any information from your existing software and present it exactly as you wish.

So you can have all the answers without ploughing through a mountain of printouts or writing new programs.

And there's much more besides.

Until now, software packages have been very particular about who they work with. dBase II wouldn't work with 1-2-3, while dBase III and Delta kept a bargepole's length from your own files and each other.

Then came twenty/twenty.

By selecting data from your files, twenty/twenty can literally pick the brains of each package you use.

So next time you need information from more than one package, twenty/twenty will do the donkey work for you.

Of course, with a package as revolutionary as this, you might think you need to be a genius to use it.

In fact, you only need two fingers.

For further information, simply return the coupon or call 0727 36341.

To: Anne Bush, Interactive Software Products Limited, 1-4 Lloyds Bank Chambers, The Maltings, St Albans, Herts.

PCW

Name

Company

Address

Telephone

twenty/twenty

Takes the hard work out of software.

dBase II AND III ARE REGISTERED TRADE MARKS OF ASHTON TATE INC. 1-2-3 IS A REGISTERED TRADE MARK OF THE LOTUS CORPORATION. DELTA IS REGISTERED BY COMPSOFT LTD.

# Have you put a CLIP in your Winchester?

## CLIP — Compressed Library Interchange Program

**CP/M  CP/M-86  PC DOS  MS DOS  £105.00**

- **Backs up a Winchester on to floppies.**
- **Compresses text or data to less than half size.**
- **Large files can span multiple discs.**
- **Selective backup or retrieval, on an inclusive or exclusive basis.**

**CLIP** has no equal in reputation, convenience, power or economy.

**EFFORTLESS BACKUP**

You can save commands for later use, or type commands directly.

**CLIP** has its own menu, with seven prepared commands. Customise the commands if you wish, or edit the menu text with a word processor. Or keep the standard forms. All your housekeeping — save/restore/review — by pressing two keys.

**CLIP** comes standard with Winchester systems supplied by
**Olympia, Cifer Systems, Research Machines and Philips, British Telecom.**
And is highly recommended by other major manufacturers

**KEELE CODES LTD**
**University of Keele, Keele, Staffordshire, U.K. Tel: (0782) 629221 Telex: 36113**

**All prices excl. VAT, post free in U.K.**
**Most popular disc formats from stock.**

# The Printer of your choice for IBM's DisplayWrite 2

A range of sophisticated drivers is now available for a wide variety of printers including:

- Hewlett Packard Laserjet, Epson LQ1500, Toshiba 2100, Diablo 630

and for true compatibles such as:

- the Fujitsu range, Canon Laser, Juki 6300, Philips GP300 etc.

Contact the experts in IBM Word Processing,
The Professional Connection Ltd.
The Old Manor House,
Fareham, Hampshire.
Tel: 0329 230870
Telex 86683 OMHFAR G

**The Professional Connection**

# LUTTERWORTH SOFTWARE

### THE NUTCRACKER SUITE

Why use a sledgehammer to crack a nut? Most word-processors are too powerful, too complex and too expensive. The Nutcracker Suite's three programs are really easy to use. You can even print text as you enter it. Has word-wrap and paragraph reforming, plus line and page editing functions using every key in the most natural way. Reads and unscrambles Wordstar files. Saves and prints in 100% ASCII format. Special printer control program also included.

*Winner C.T.A. Award Best Business Program 1984*

### THE ULTIMATE DIARY

Event based diary for every professional. Events can be entered with a frequency tag (e.g. every two weeks, every three months, annually, even every second Tuesday!), and will re-appear in all future reports. Reports for today's events, this week's events, this month's events. Calendar for any month up to 2083. Simple search routine (any field) with wild cards. Up to 5000 separate entries, which can easily be amended or deleted.

### MICROFILE

Powerful flat form database. User can set field lengths and labels for any number of separate databases. Up to 16 fields and 32,767 records. Search or sort on any field. Print format options, allowing mail-merge, on both automatic and inspection basis. Superbly easy to use with all prompts on screen.

**EACH PROGRAM IS ONLY £43 + VAT (£49.45)**

FORMATS: IBM PC DOS/APRICOT MS DOS
Ask your dealer for a demo, or send cheque to:

BARCLAYCARD VISA  LUTTERWORTH SOFTWARE,  Access

126 NEW WALK, LEICESTER LE1 7JA (Tel. 0533 550822)

# ATT
## PRICE GUARANTEE

PROVIDE A WRITTEN LOWER QUOTATION FROM AN AUTHORISED DEALER WITHIN 7 DAYS OF PURCHASE AND THE DIFFERENCE WILL BE REFUNDED!

*CALLERS BY APPOINTMENT ONLY*

## SPECIALISTS IN EXPORT

### APPLE

| | |
|---|---|
| MAC 512K | 1880* |
| MAC 128K | 1345 |
| MAC DRIVE | 256 |
| IMAGEWRITER 10" | 285 |
| IMAGEWRITER 15" | 395 |
| ACC. KIT | 30 |

**CALL FOR SPECIAL MAC SYSTEMS OFFER*
LIMITED PERIOD ONLY

### OLIVETTI

| | |
|---|---|
| M24 2×360 DRIVES | 1462 |
| M24 10Mb | 2567 |
| M21 2×360 DRIVES | 1322 |
| M21 2×720 DRIVES | 1644 |

### APRICOT

★ £1000 OFF ★
PORTABLE ~~1795~~ 795

| | |
|---|---|
| PC 2×720K + Mon | 1546 |
| PC 2×315K + Mon | 1391 |
| XI 10Mb + Mon | 2321 |
| POINT 32 10Mb + Mon | 2476 |

### SOFTWARE

CALL FOR UP TO 40% OFF

PRINTERS

*TOO MANY TO LIST — CALL FOR PRICES*

### SYSTEMS

DESIGNED FOR YOUR REQUIREMENTS
**INCL BACK UP!**

### IBM

PRICES NOW SLASHED

## RING NOW: 01-729 7033

**ATT**
**(T.I.) INDUSTRIAL UNITS**
**STANWAY STREET**
**LONDON N1 6RY** Telex: 296119 DATALEX G

# Use a micro without buying one?

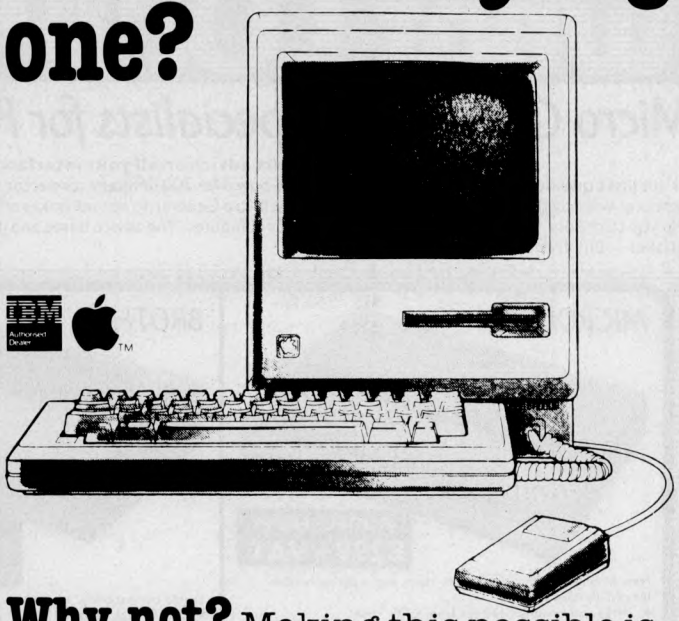


**Why not?** Making this possible is our speciality!

Want an Apple or an Apricot microcomputer? Or maybe an IBM? But which one? It's an expensive business if you get it wrong. See CCA and we'll *rent* you the system of your choice – with no great capital outlay.

If you are happy with your chosen system, a purchase option is available. If not, you can try another!

No matter which way you turn, you get unbiased professional advice. Plus training. Plus maintenance. Painless!

Learning more is painless too. Just attach your business card to this advertisement and post it. Or simply phone.

# CCA / MICRO RENTALS

**CCA MICRO RENTALS LIMITED**
Unit 7/8, Imperial Studios,
Imperial Road, London SW6 2AG.
Telephone: 01-731 4310

PCW

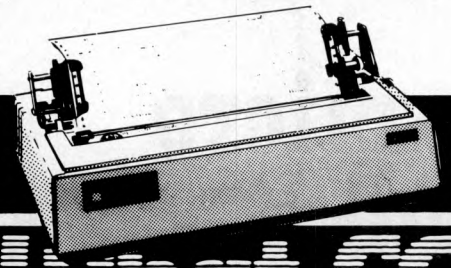

# Which PRINTER FOR What COMPUTER?



## Micro General the Specialists for Printer Selection

**Contact us for our expert advice on all your interfacing problems**

It's not just a question of plug in and let's go. There are now over 200 different connector situations. How do you know that your computer will accept the printer of your choice? We at Micro General do not sell boxes off the shelf. As computer engineers we help you to choose and install the right printer for your computer. The advice is free and it could save you some embarrassing mistakes – Buy from us for peace of mind.

### MICROLINE



**MODELS FROM £299 + VAT**

New Slimline design thats quieter, faster and superbly reliable. IBM PC Version available

- M182 par/serial/IBM 120 cps from £299 + VAT
- M192 par/serial/IBM NLQ from £399 + VAT
- M193 spec as 192 132 col from £549 + VAT
- NEW 84XS Host of options: Bar coding, 30K buffer, Multi Lingual, Scientific fonts, Qume/Diablo, Arabic.

3 print modes: Draft, Memo & Correspondence from £1295 + VAT

### BROTHER



**FREE on site maintenance in the UK. For all business printers!**

Diablo compatibility, 3K Buffer 2 colour printing.

- HR15 13cps Serial or Parallel £375 + VAT
- HR15 keyboard £150 + VAT
- HR25 25cps Full width 16½" £699 + VAT
- HR35 35cps Full width 16½" £899 + VAT
- 2024L MATRIX NLQ 80cps, Draft 160cps, Diablo/Epson selectable £999 + VAT

### SMITH CORONA

**from £170 + VAT**



New printer range from the leading office equipment supplier. EPSON & IBM selectable

- FASTEXT 80 – 80cps ideal for home user – parallel – £170 + VAT
- D100 – 120cps – parallel – £220 + VAT (Serial interface for F80/D100 – £58 + VAT)
- D200 – 160cps Draft 80cps NLQ Serial & Parallel as standard – £299 + VAT
- D300 – 160cps, 132 col, NLQ 80cps Serial & Parallel interface standard – £495 + VAT

### ZIYAD Paperjet Printing System

*Collates paper and envelopes – AUTOMATICALLY!*




**£3750 + VAT**

- Takes up to A3 paper
- Automatic position sensing on manual feed
- Integral Dual paper feeding
- Integral envelope feeder
- Automatic Address storage for envelope printing
- Diablo 630 or QUME Sprint Compatible

### TRY BEFORE YOU BUY!

Bring your micro to us and match with our range of printers – full workshop facilities available to iron out all technical hitches! CALL US FOR PRINT SAMPLES.
TRADE or PRIVATE CUSTOMERS take advantage of our

### INTERFACING CONSULTANCY

INTERFACES & CABLES AVAILABLE FOR:

● COMMODORE 64 ● OSBORNE ● MSX
● SPECTRUM ● SIRIUS ● EINSTEIN
● SAGE ● AMSTRAD ● SINCLAIR QL
and more!

**INTERNAL & STAND ALONE BUFFERS from £65 + VAT**

**PRINTER SWITCHES from £65 plus VAT.**

### CANON Laser Beam Printer

*Lighten up to LASER PRINTING!*



Crisp, clear images on plain paper – to 8 pages per minute RS232 or CENTRONICS.

**£3195 + VAT**

Features include:

- Multiple character pitches in a line 10, 12, 13.3, 15 CPi, P.S., etc.
- Multiple font – maximum 15 fonts/page (internal font, font cartridge)
- Character enlargement – doubling in two directions
- Down loading of fonts

### APRICOT F1

**a full blown business micro**



For the first time business user a genuine business machine with some amazing 'high tech' features. – See the Apricot's mouse execute previously complex tasks at a single key stroke, and the new infra-red device means there's no cable connection to the keyboard, giving desk top planning a new meaning.

- 256K RAM 720 single disk.
- MS-DOS
- Rapid Display manipulation and special effects.
- Expansion and Outport facilities.
- Colour/Mono Monitor or VHF for your TV.
- Extremely light (under 13lbs) – totally portable.
- Price includes SuperWriter, SuperCalc, & SuperPlanner software.
- Well over 1000 software packages now available.

**LEASE F1**
from **£7** per week
CALL FOR DETAILS
DEMO NOW

### MICRO GENERAL'S Pick of the Printers

| | | | |
|---|---|---|---|
| Epson RX80T 100cps | £210.00 | MP-165 160cps NLQ | £269.00 |
| Epson RX80 F/T 100 cps | £230.00 | JUKI 6100 Parallel | £325.00 |
| Epson FX80 160cps | £360.00 | JUKI 6300 Serial or Par | £799.00 |
| Epson RX100 100cps | £390.00 | SILVER REED 16 Parallel 16cps | £256.00 |
| Epson FX100 160cps | £499.00 | SILVER REED 16 Serial 16cps | £279.00 |
| Epson LQ1500 200cps | £999.00 | SILVER REED 20 Parallel | £453.00 |
| Canon PW1080A 160cps | £299.00 | SILVER REED 20 Serial | £479.00 |
| Canon PW1156A 160cps | £419.00 | SILVER REED 36 Parallel | £799.00 |
| Canon Serial I/Face | £79.00 | SILVER REED 36 Serial | £825.00 |
| Canon PJ1080A 7-COLOUR | £479.00 | | |
| Shinwa CPA-80P Par 100cps | £199.00 | **OKI HIGH SPEED MATRIX** | |
| Shinwa CPA-80S Ser 100cps | £219.00 | OKI 2350 Par. 350cps | £1755.00 |
| Panasonic KC-P1091 120cps | £299.00 | OKI 2410 Par. Graphics | £1875.00 |

**PLOTTERS**

| | |
|---|---|
| EPSON HI-80 | £400.00 |
| HITACHI 672 | £495.00 |

**CUMANA BBC DISK DRIVES**

| | |
|---|---|
| CSX100 40T S/Side 100K | £109.00 |
| CSX200D 40T D/Side 200K | £119.00 |
| CSX400 80T D/Side 400K | £166.00 |
| CD200 2x40T S/Side 200K | £259.00 |
| CD400D 2x40T D/Side 400K | £285.00 |
| CD800S 2x80T D/Side 800K | £360.00 |

**MICROVITEC 14 COLOUR MONITORS**

| | |
|---|---|
| 1431-MS 452 PIXEL BBC | £216.00 |
| 1451-MS 653 PIXEL BBC | £260.00 |
| 1456-LI 653 IBM, Apricot | £395.00 |
| 1456-DQ 653 Sinclair | £239.00 |

● All prices exclusive of VAT.

**MICRO GENERAL**

*DEALER/OEM ENQUIRIES WELCOME*
■ *Always call for the best possible price.*

Access/Visa

*(PCW 7)*
*Unit 25, Horseshoe Park, Pangbourne, Reading, RG8 7JW Tel: 07357 4466*

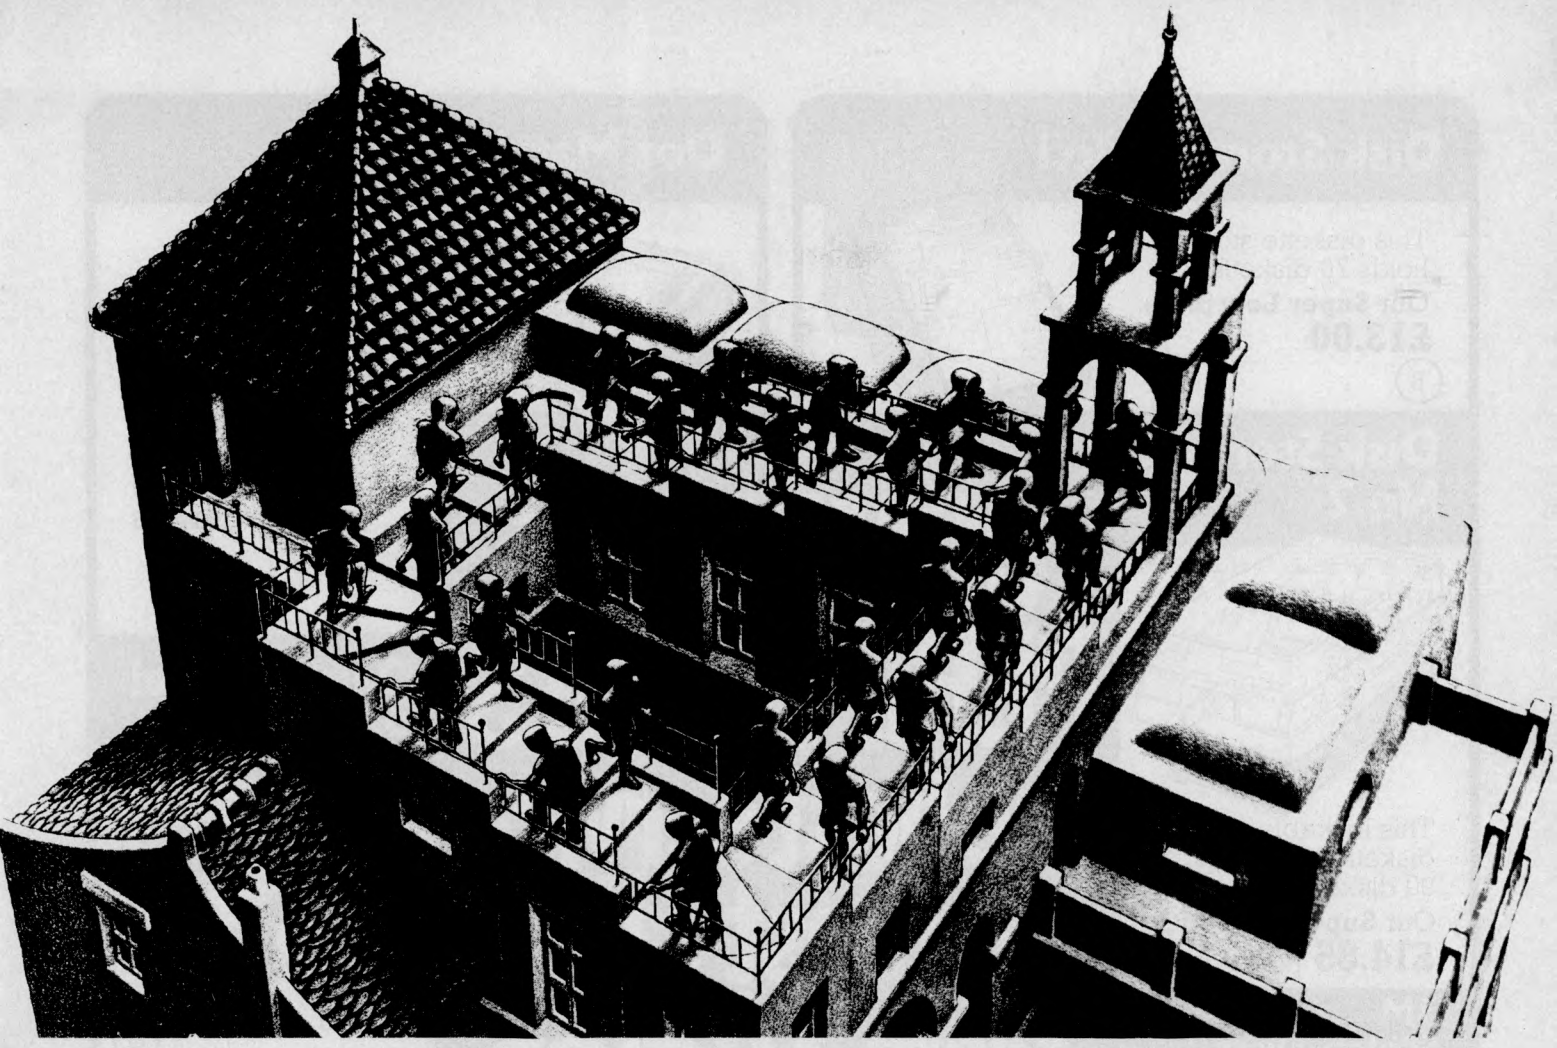

# If you're getting nowhere slowly with your existing computer – come to Silicon Valley

**Do you feel that you're really getting nowhere with your existing computer system?**

Is it too small to cope with your business needs? Is it too inflexible to suit your requirements? Does it only partially fulfil your great expectations? Is it forcing you to adapt to its limitations? Is it really more efficient? Is it giving you greater control? And finally, is it, or will it ever help increase your bottom line?

If you answered yes to any of these questions, you need reliable, expert help.

The solution to your problem or problems may in fact be quite simple. Your staff may just need further training, or perhaps you may need an inexpensive add-on. Alternatively you may need a reappraisal of your needs. You may indeed need a completely different computer system – one that suits you – and one that won't break the bank.

Come to Silicon Valley – we can help you – just as we have helped thousands of companies – large and small in virtually every market sector. These are just some of the better-known ones: The B.B.C., British Telecom, Coopers & Lybrand, Express Newspapers, The Institute of Chartered Accountants, London Business School, The National Computing Centre, Rio Tinto Zinc, The Stock Exchange, Tarmac Plc...

**Why do they come to Silicon Valley?**

Because we try harder to provide expert, helpful advice, reliable hardware, software and training, maintenance and full back-up support.

In recognition of our professionalism, we are authorised Dealers for all of the following manufacturers: ACT, Apple, Compaq, Olivetti and of course IBM. And we are authorised dealers for the following software houses: Ashton Tate, Lotus, Pegasus. What's more, all our consultations are absolutely free and without commitment. And our terms are very flexible – you can rent, lease or buy at very competitive rates.

If you would like a free consultation or advice without obligation at your offices or ours, please telephone for an appointment.

**silicon valley**
COMPUTER CENTRE

164 Grays Inn Road,
London, WC1X 8AX
Tel: 01 833 3391
Telex: 262005 SILVAL G

**NEW BRANCH***
2-4 Paul Street,
London EC2A 4JH
Tel: 01 247 8577

*Not IBM Authorised

IBM Authorised Dealer

OLIVETTI PERSONAL COMPUTER

WE ARE AUTHORISED DEALERS FOR ALL OF THE FOLLOWING:

COMPAQ

Lotus

ASHTON·TATE

ACT

# COMPUTER PERIPHERALS the best service the best value from Viglen

## Disk Storage No.1



This diskette storage box holds 70 diskettes

Our **Super Low** price

**£13.00**

(B)

## Disk Storage No.2



This lockable diskette box holds 90 diskettes (B)

Our **Super Low** price

**£14.85** inc.VAT

## 3M Scotch Discs

(Lifetime guarantee)




(A)

### 5¼" diskettes double density

| | 1-2 boxes | 3-9 boxes | 10 + boxes |
|---|---|---|---|
| SS 40 TRACK | £13.04 | £11.74 | £11.30 |
| DS 40 TRACK | £17.40 | £16.00 | £15.40 |
| SS 80 TRACK | £20.00 | £13.80 | £17.40 |
| DS 80 TRACK | £23.22 | £20.87 | £20.00 |

## Printer Stand

- 80 column dot matrix printers
- Raises printer high enough to put continuous stationery underneath
- Beautifully finished in clear perspex
- Viglen quality every time
- Will accept paper up to 12½" wide
- Non-slip rubber pads

Dimensions:
15" (380mm) wide
12½" (320mm) deep
4" (90mm) high




(B)

Our price **£13.00**

**Also available 136 column printer stand £23.00**

## Dot Matrix Printers



(C)

Canon PW1080A .....**£258.26**

Epson RX80/FT .....**£249.56**

Epson FX80 .....**£344.35**

## Daisy Wheel Printers




Juki 6100 **£301.74** (C)

Quen Data **£214.78**

## FREE

Parallel Centronics Cables for the following computers. Please specify when ordering.

BBC, IBM-PC and compatible computers, Apricot, Sirius, Amstrad, MSX.

Printer Interface and Cable for the following printers:-

| | |
|---|---|
| Apple II | **£43** |
| Sinclair Spectrum | **£34** |
| Sinclair QL | **£22** |

## SHOWROOM OPEN

Weekdays 9.30 - 6pm
Saturdays 9.30 - 4pm

**Money-Back Guarantee**

If not entirely satisfied with your purchase, simply return to us within 7 days in perfect condition and in original packing including a note stating reason(s) for return.

Please add for carriage:-
**A** - £2. **B** - £3. **C** - £8.

UK CUSTOMERS, PLEASE ADD 15% VAT

Post to: Viglen Computer Supplies.
Unit 7, Trumpers Way, Hanwell W7 2QA.
Credit Card Holders may order by phone. 01-843 9903.

Please send me _____

I enclose Cheque/P.O. for £ _____ Incl. carriage.
Cheques payable to Viglen Computer Supplies.

Name _____

Address _____

_____

_____

PCW 7/85

I prefer to pay by ACCESS/BARCLAYCARD
(Delete whichever is not applicable)

Credit Cards valid only if signed by card holder. Address must be the same as card holder.

Card No. _____

Signature _____

Prices correct at time of printing and offers subject to availability.

**ORDERS** are usually despatched within 24 hours

Viglen are also major suppliers to educational and government establishments and welcome further enquiries and orders.

# Tasha Business Systems

# Your First Choice for Computers, Wordprocessors, Software & Printers

## THE PORTABLE



HP 110

**HP 110:** Uses industry standard operating system, MSDOS and is made more friendly with HP's PAM which gives easy access to the program packages. Lotus 123 and Memomaker are built into ROMs giving spreadsheets, simple graphics and note making — making it a useful tool for the executive on the move.

**£2595**
List price £2995

## HEWLETT PACKARD CALCULATORS

| | | | |
|---|---|---|---|
| HP 11C | £54 | Printer | £call |
| HP 15C | £call | Cassette Drive | £call |
| HP 12C | £call | HP 75C | £599 |
| HP 16C | £call | Visical pack | £119 |
| HP 41CX | £221 | Text Formatter | £78 |
| HP 41CV | £149 | Data Com Pac | £144 |
| Card Reader | £145 | | |

### HP-150

**HP-150:** dual 270kb 3½" disc drive 256kb RAM, keyboard. High resolution (512×390) monitor.

**£1899**

**HP-150:** dual 720kb 3½" disk drive 256kb RAM, keyboard. High resolution (512×390) monitor.

**£2299**

## PRINTERS

### HP Think Jet

Fast 150 CPS, quiet 50 dBa(A). High print quality 11×12 charactercell, 96×96 (192) dots per inch. Disposable print head. Pin and friction allows you to use single sheets as well as fanfold paper.

**£399**

### Largerjet Printer

A silent but speedy masterpiece. 300 CPS for best letter quality. Unbeatable resolution whether it is text, charts or diagrams and it's compatible with the IBM PC and wordstar, Lotus packages etc.

**£3195**

## OLIVETTI M24



**M24:** Not only is it stylish but technically superior to the IBM PC. It uses the full 16 bit 8086 chip running at 8MHZ, which makes it more than twice as fast. It combines monochrome text and colour graphics, offering a 640 by 400 pixel higher resolution mode. The quality of the screen is excellent. The M24 has 128k of RAM (can be up graded to 640k RAM), serial and parallel ports, clock/calendar and reset button and is cheaper than an IBM having the same specifications.

**£1499**

## OLIVETTI M21 PORTABLE PC



**M21:** It is self contained with an Intel 8086-2 chip, 128k of RAM, a 9in amber screen with brightness and contrast controls, colour graphics adaptor, printer adaptor, serial RS232C port and two lockable 360K MFD 5.25in floppy disc drives. It includes a built in clock/calendar and LED indicator. The Olivetti M24 has a better screen than the IBM and runs more than twice as fast as either IBM or COMPAQ.

**£1499**
**OLIVETTI**

## EPSON COMPUTERS & PRINTERS



### EPSON PX-8

**PX8:** Uses CP/M operating system and has an 8 line by 80 column LCD screen. CP/M 2.2, Microsoft Basic, Wordstar, and Cardbox+ are built in ROM, with 64K RAM available

## HX 20



**FREE** INTEXT WORD PROCESSOR

**£395**

## PRINTERS

| | |
|---|---|
| FX 80 | £349 |
| FX 80 F/T | £259 |
| FX 100 | £call |

**PORTABLE PRINTERS**

| | |
|---|---|
| P40 | £87 |
| P80 | £159 |
| Epson colour | £call |
| Epson Plotter | £399 |
| Epson LQ 1500 | £call |

| | |
|---|---|
| Cannon PW1080A | £289 |
| Cannon PW1056A | £call |
| Panasonic Printer | £call |
| Silver Reed EX550 | £489 |
| Silver Reed EX500 | £279 |

## SONY MODEL 10 Word Processor



The Model 10 is probably the smallest WP system on the market and incorporates all the easy to use features of SONY WP. Sony word processing opens up a whole new world of office efficiency taking in text editing, text processing, arithmetic calculations, records management, communications and data processing.

Simplicity is the central feature of the Model 10 system. The High resolution screen, displaying black characters on a light blue background, ensures visual clarity and comfort Embolding, underlining, centering and indentation can all be seen before printing. The keyboard is easy to operate designed specifically for typing. The SONY PAL (personal audio learning) system enables the secretary to use the Model 10 quickly and without fuss. Please call for demonstration and price.

# Tasha Business Systems

**Authorised Dealer**

APPLE — COMMODORE — HEWLETT PACKARD — EPSON — SONY — OLIVETTI

**01-937 8529**
Monday to Saturday 9.30-6.30pm

- TBS reserves the right to change advertised prices
- Add 15% VAT
- Goods subject to availability

191 Kensington High Street, London W8

Tel: 01-937 7896
01-937 3366

Telex: 946240 (CWEASY G)

MBX No. 19001120

# What have the SECRETARY and the VICAR, the Fashion Director, the Yacht Delivery Skipper, the Funeral Director, the Transport Clerk and the Engineer got in common

*They used* THE LAST ONE *Program generator to solve their own problems and then built a business around it writing computer programs for others.*

**Now they have**

# TLO PLUS...

**All the power and freedom of** THE LAST ONE

PLUS... **Create as many databases as you wish** *(just select the option)*
PLUS... Access any wordprocessor, spreadsheet or database
PLUS... Ultra fast searching PLUS... much much more

TLO PLUS... £250 — £375
or THE LAST ONE £199 — £330

Available for most P.C's all plus VAT

*For details or orders contact your dealer or*
**D.J. 'A1' Systems, Summers Orchard, Speke Close, Ilminster, Somerset TA19 9BJ** **Tel: (04605) 4117**

**THE LAST ONE The Famous Original The Program that writes Programs**

# AFFORDABLE 68000 SYSTEMS FOR YOUR APPLE II+ or IIe!

**McMILL PLUS with Q68 Board**

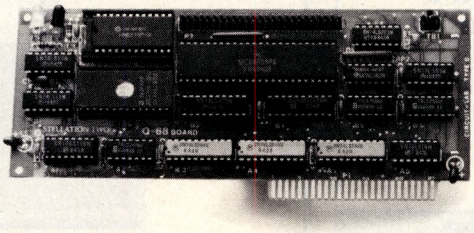

* On-board debugger in EPROM
* Expansion connector for peripherals and memory
* 2Kx8 to 8Kx8 static RAM
* Edit, assemble, and run directly from RAM
* "The best update you'll probably ever make to your Apple!" *(CALL A.P.P.L.E.* Magazine)

**UNDER £350**



**McMILL standard system**

* Super efficient design
* Accesses standard Apple memory and peripherals
* Debugger on disk

**UNDER £200**

**BOTH SYSTEMS FEATURE THE MC68008,** code compatible with the 68000, plus a 6502/68000 Assembler development system from S-C Software Corp, including Debugger and screen editor.
68000 Fig FORTH, and 68000 Tiny Basic are also included. Both systems are professional development tools, and are not intended for CPU speed enhancement.

**EVERYTHING YOU NEED TO CREATE 68000, DOS 3.3 COMPATIBLE PROGRAMS IS INCLUDED**

DIRECT ORDERS ACCEPTED, or inquire with your local dealer. FOR A COMPLETE CATALOGUE ON ALL OUR 68000/6809 BASED SYSTEMS FOR THE APPLE, ENCLOSE CHEQUE OR MONEY ORDER FOR £3
(Catalogue charge will be deducted from purchase)

STELLATION TWO

26 West Mission Street #3
PO Box 2342
Santa Barbara, CA 93120 USA
*Providing enhancements for the Apple since 1979*

**10 DAY MONEY BACK GUARANTEE ON ALL PRODUCTS**
**SHIPMENTS BY EXPRESS AIR FREIGHT**

TELEX: 295298 Intertel SNC
TELEPHONE: (805) 569-3132
(for convenience — call in evening, UK time)

# PRINTERS

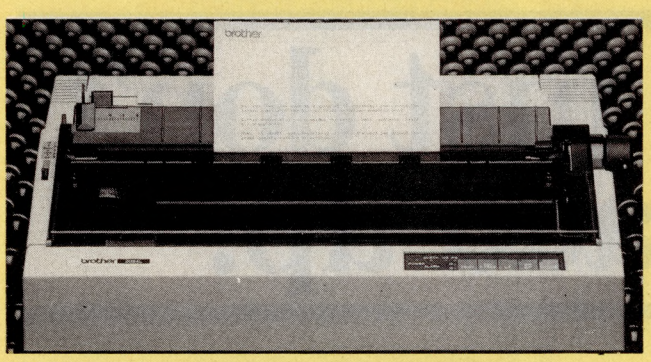

**BROTHER 2024L**
**Letter Quality Dot-Matrix**
Built-in tractor feed. High speed printing — 96 CPS (LQ Elite), 160 CPS (draft). Up to four carbon copies, bi-directional logic seeking.....**£995**

**BROTHER HR35**
**Daisy Wheel Printer**
Specially developed for the office that demands a high output of high quality printing. 7K bytes buffer, two-colour printing, super/subscript, 35 CPS, auto-underlining, bold printing.....**£CALL**

**BROTHER HR15**
A superb printer offering high quality daisy wheel print, for an exceptionally low outlay. HR15 offers two-colour printing, shadow printing, proportional spacing, superb/subscript and auto-underlining. 50 CPS bi-directional.....**£CALL**

**BROTHER TC600**
**The Teleprocessor**
The Brother TC600 puts a computer telecommunications system in your briefcase. Not a computer, just a portable electronic typewriter, but a fully functional telecommunications terminal that incorporates many of the advanced word processing features found on desktop models.....**£415**

**BROTHER EP44**
A feature loaded printer with 24 × 18 dot matrix print head, 4K memory, built-in RS-232C serial interface and 15 character display. Light, compact and battery powered — will fit into your briefcase.....**£CALL**

**BROTHER M-1009**
A compact high quality printer with full 80 column printing, 9 pin dot matrix head, 50 characters per second, built-in RS232C and Centronics, and bi-directional text/uni-directional graphic printing.....**£CALL**

**BROTHER HR-5**
This quiet and versatile thermal transfer printer delivers high definition 9 × 9 dot matrix text over 80 columns at 30 characters per second. Incorporates RS232C, Centronics or Commodore interface. Either battery or mains powered.....**£CALL**

**BROTHER HR-25**
An exceptionally high quality daisy wheel printer with a 3K buffer memory, bi-directional speed of 25 characters per second, 2 colour printing, super/sub script, auto underlining, text emboldening and proportional spacing. Also text reprinting facilities **£CALL**

# Tasha Slash Big MAC Prices By £700




**£1,899**

**LIST PRICE £2,599**

LIMITED STOCK

**APPLE CARD:**
INSTANT CREDIT AVAILABLE
UP TO **£2,500**

128K MAC £1,399

**ORDER LINE 01-937 8529**

# MSX COMPUTERS

**SONY**
HIT BIT 64k RAM.....**£260**
Disk drive.....**£299**
Joystick.....**£CALL**
Printer/Plotter.....**£200**

**SANYO**
MCP 100 64k RAM.....**£199**
Joysticks (two Ports).....**£13**
Light pen.....**£CALL**

**JVC**
HC-7GB 64k RAM.....**£225**
Cassette Recorder.....**£**
Joystick.....**£91**

**PANASONIC**
**EPSON PRINTERS**
RX80 FT.....**£259**
FX80.....**£349**
FX100.....**£499**
P40.....**£87**
P80.....**£160**

**AMSTRAD COMPUTER NOW AVAILABLE**

# COMMODORE 64 Package

**Commodore 64 computer**
**C2N cassette recorder**
**International Soccer**
**Commodore Bag**

**£174**

1541 Disk drive.....**£174**
MSP801 Printer.....**£160**
Music Maker.....**£**
Easy Script.....**£39**
Easy File.....**£39**

## COMMODORE MODEM

- 1200/75 V23 Full Duplex Asynchronous operation
- B.T. Approved
- Components software held in 8k ROM

**£85**

Sargon III.....**£42**
Sargon II.....**£17**
Multiplan.....**£99**
Zork I.....**£**
Zork II.....**£**
Zork III.....**£**
Simons Basic.....**£39**
Football.....**£9**
Lode Runner.....**£30**
Easy Calc.....**£39**
LOgo.....**£56**
Flight Simulator II (C).....**£34**
Flight Simulator II (D).....**£42**
Superbase.....**£85**

# Macintosh Software

Multiplan.....**£190**
Chart.....**£145**
Basic.....**£145**
Lotus Jazz.....**£call**
Copy-Mac.....**£call**
MacPlot.....**£90**
Clickart.....**£call**
Mac the knife.....**£call**
Millionaire.....**£51**
Zork I.....**£36**
Zork II.....**£42**
Zork III.....**£42**
Witness.....**£call**
TK Solver.....**£189**
Word.....**£179**
OMNIS1.....**£149**
OMNIS2.....**£295**
OMNIS3.....**£399**
PFS: FILE.....**£call**
DFS: REPORT.....**£call**
Macforth.....**£call**
MacPascal.....**£99**
MacProject.....**£99**
Macterminal.....**£call**
Macdraw.....**£call**
Deadline.....**£call**
Hitchhiker's Guide to Galaxy.....**£34**
Music Composer **£69**
Frogger.....**£34**
Lode Runner.....**£call**
MacGammon.....**£call**
Sargon III.....**£42**
MacCalender.....**£call**
Trivia.....**£34**
Funpack.....**£34**
Penstate.....**£call**
Payroll.....**£call**
Macspell+.....**£84**
PC to Mac.....**£128**
Sargon III.....**£42**
Mind Probe.....**£46**
Think Tank.....**£124**
Dollars & Sense.....**£124**
Mac Ledger.....**£249**
MacCash.....**£149**
Typing Tutor III.....**£50**
Wizordary 1.....**£62**
PFS File & Report.....**£160**
DB Master.....**£149**
Desk Organiser.....**£127**
MacAttack.....**£42**
Helix.....**£337**
Professional B/jack.....**£64**
Squire.....**£60**
Mighty Mac.....**£84**
Animation Toolkit.....**£62**
Vicom Com Package.....**£149**
Modem.....**£call**
MacVision.....**£299**
Championship Boxing.....**£33**
Mac Dust Cover.....**£11**
Box of 10 3½" Disks.....**£39**

# APPLE IIC Package



**Apple IIC**
**Monitor IIC**
**Monitor Stand IIC**

**£999**

# Tasha Business Systems

**Authorised Dealer**
APPLE — COMMODORE — HEWLETT PACKARD — EPSON — SONY — OLIVETTI

**01-937 8529**
**Monday to Saturday 9.30-6.30pm**

- TBS reserves the right to change advertised prices
- Add 15% VAT
- Goods subject to availability

191 Kensington High Street, London W8

Tel: 01-937 7896
01-937 3366

Telex: 946240 (CWEASY G)

MBX No. 19001120

# Some PC's just don't seem to add up.

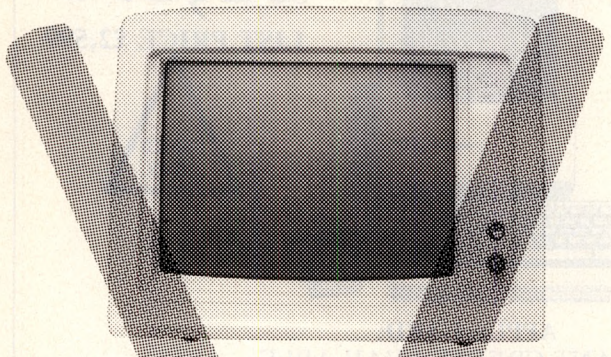

| | |
|---|---|
| Mono Monitor | £182.00+ |
| Mono/Printer Adapter | £177.00+ |



| | |
|---|---|
| C.P.U. | £2,952.00+ |

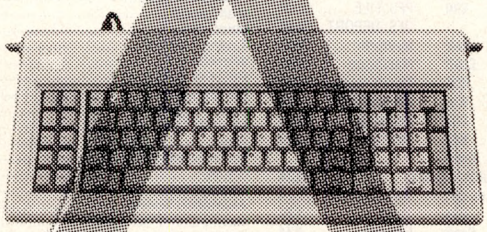

| | |
|---|---|
| Keyboard | £181.00+ |
| Additional RAM | £144.00+ |
| DOS 2·10 | £51.00+ |

**IBM XT* 10Mb**
**£3,684.00+VAT**



## Victor VPC 15 Mb 256 K RAM
## £2,995.00

The package comes complete with a 15 Mb Winchester drive at around one third less than the XT, ready to run (with mono screen) at £2,995 + VAT.

An industry standard micro with fully 50% more storage than the XT, more expansion slots and drive options, high resolution mono and colour monitors featuring tilt and swivel screens and last but not least a keyboard that's easy to understand and simple to use.

For more details contact Victor Technologies (UK) Ltd., The Valley Centre, High Wycombe, Bucks or telephone (0494) 450661.

**VICTOR® Technologies**

**We never forget you're human.**

*IBM XT prices quoted at time of going to print. IBM XT is a registered trade mark of International Business Machines.

PC SOFTWARE: **OVER**

# 40% DISCOUNT!

*Just look at some of our prices!*

| | | | |
|---|---|---|---|
| DBASE III | **290** | RRP 550 | **–47%!** |
| FRAMEWORK | **295** | RRP 550 | **–46%!** |
| DBASE II | **222** | RRP 395 | **–43%!** |
| WORDSTAR PRO | **242** | RRP 399 | **–39%!** |
| SUPERCALC 3.2 | **219** | RRP 360 | **–39%!** |
| LOTUS 1-2-3 | **265** | RRP 430 | **–38%!** |
| SYMPHONY | **385** | RRP 595 | **–35%!** |
| MULTIMATE | **263** | RRP 399 | **–34%!** |
| MULTIPLAN | **129** | RRP 190 | **–32%!** |
| FRIDAY! | **125** | RRP 175 | **–28%!** |

*Most popular business micros supported!*
*Unlike some of our competitors, these prices will be held until next publication date! (IBM–PC prices shown excluding VAT)*

Call us NOW on 0480 · 53044 for further details!

## Elite Computer Systems

40 SAPLEY ROAD · HARTFORD · HUNTINGDON · CAMBS PE18 7YQ



## Express Computer Consultants Ltd.

**0273 204377**

JULY SPECIAL OFFERS

| | | RRP | SPECIAL OFFER |
|---|---|---|---|
| SOFTWARE | LOTUS 1-2-3 | £430 | **£325** |
| | DBASE II | £365 | **£275** |
| | DBASE III | £495 | **£325** |
| | SYMPHONY | £550 | **£425** |
| | FRAMEWORK | £550 | **£350** |
| | WORDSTAR PROF. | £399 | **£275** |
| SPECIAL DUAL PACKS | LOTUS/SYMPHONY | £980 | **£725** |
| | LOTUS/WORDSTAR PROF. | £829 | **£575** |
| | DBASEII/FRAMEWORK | £915 | **£600** |
| | DBASEII/WORDSTAR PROF. | £764 | **£525** |
| | DBASEIII/FRAMEWORK | £1045 | **£650** |
| | DBASEIII/WORDSTAR PROF. | £894 | **£575** |

Similar special offers are available on many more products, also 'triple packs'. Phone us for details.

ALL ITEMS SUBJECT TO DELIVERY CHARGES. ALL PRICES SUBJECT TO VAT. ALL ITEMS SUBJECT TO AVAILABILITY. WE RESERVE THE RIGHT TO ALTER PRICES WITHOUT PRIOR NOTICE.

**Equity and Law House,**
**102 Queens Road, Brighton,**
**BN1 3XF. Tel: 0273 204377**



# I.S.C. Offer the UK's lowest prices on computer systems

| | |
|---|---|
| APRICOT TWIN 315K and monitor | £1,350 |
| APRICOT TWIN 720K and monitor | £1,500 |
| APRICOT XI 5MB and monitor | £2,000 |
| APRICOT XI 10MB and monitor | £2,150 |
| APRICOT F1 720K Excl monitor | £850 |
| APRICOT XI IOS (+ monitor) | £2,775 |
| APRICOT XI 2OS (+ monitor) | £3,455 |
| APRICOT XI 20 (+ monitor) | £3,115 |
| APRICOT point 32 10MB (+ monitor) | £2,395 |
| APRICOT point 32 20MB (+ monitor) | £3,395 |
| COMPAQ PORTABLE | £1,870 |
| EPSON RX80 F/T | £210 |
| EPSON FX80 | £310 |
| EPSON RX100 | £330 |
| EPSON FX100 | £400 |
| EPSON DX100 | £340 |
| WORDSTAR | £190 |
| LOTUS 1-2-3 | £310 |
| D-BASE II | £225 |
| PEGASUS | £175 |
| CANON PW1156A | £399 |

All products carry 12 months full guarantee, with **HOTLINE** phone support.
Prices exclude only VAT and delivery.
We **GUARANTEE*** the lowest prices!

**I.S.C. LIMITED**

## COMPANY SERVICES INCLUDE:

CUSTOMISED DATABASE SYSTEMS, MAINTENANCE CONTRACTS, INSTALLATION CONTRACTS, NETWORK SYSTEMS, MULTI-USER SYSTEMS.

## FINANCING:

CASH, LEASE-RENTAL, LEASE-PURCHASE, SHORT-TERM RENTAL, HIRE-PURCHASE, PERSONAL LOANS, INSTANT CREDIT (subject to status).

** Provide a currently advertised lower price within 7 days of purchase and difference will be refunded.*

Call for IBM prices.

TRADE AND EXPORT ENQUIRIES WELCOME

**GRAPHIC HOUSE, 88 WAVENEY ROAD**
**ST IVES, CAMBS PE17 4FW**
**TEL: 0480 300533**

authorised dealer

authorised dealer **olivetti**

**Olivetti M24 £1939**+VAT
256k 2X360 k d/drive
12" monitor, MSDOS
**FREE** SC D100 120cps f/t printer + cable
**FREE** Quill w/processor
**FREE** Abacus s/sheet
**FREE** Archive d/base
**FREE** Easel graphics
**FREE** 5 discs & paper

**Apricot £1595**+VAT
256k business system
2x315k d/s d/d
**FREE** 9" monitor
**FREE** SC D100 120cps f/t printer & cable
**FREE** SuperWriter w/p
**FREE** SuperCalc s/sheet
**FREE** SuperPlanner
**FREE** 5 discs & paper

authorised dealer **COMPAQ**

**Compaq £1795**+VAT
256k 2x360 k d/d
9" built-in monitor
**FREE** SC D100 120cps f/t printer + cable
**FREE** Quill w/processor
**FREE** Abacus s/sheet
**FREE** Archive d/base
**FREE** Easel graphics
**FREE** 5 discs &paper

**Olivetti M24 £1728**+VAT
256k 2x360k d/d
12" monitor, MSDOS
**FREE** QuenData 20cps d/wheel printer & cable
**FREE** Quill w/processor
**FREE** 5 discs & paper

**Olivetti M24 £3202**+VAT
640k business system
10MB hard disk
1x360k d/drive
Olivetti monitor, MSDOS
**FREE** Canon 1080 nlq printer and cable
**FREE** Quill w/processor
**FREE** Abacus s/sheet
**FREE** Archive d/base
**FREE** Easel graphics
**FREE** discs & paper

**Apricot £1795**+VAT
256k business system
2x720k d/s d/d
**FREE** 9"monitor
**FREE** SC D100 120cps f/t printer & cable
**FREE** SuperWriter w/p
**FREE** SuperCalc s/sheet
**FREE** SuperPlanner manuals, MSDOS
**FREE** 5 discs &paper

**Printers**
**£179** Mannesman T MT80+
SmithCorona FASTEXT 80cps
Shinwa CPA80 100cps
Epson RX80FT 100cps
Epson FX80 160cps
**£180** SC D100 120cps
**£259** Taxan 810 160cps/(27)
**£260** Canon PW1080 160cps(27)
**£260** SmithCorona D200
**£360** SmithCorona D300 (WIDE)
**CALL** Epson LX100
**£299** Juki 6100 20cps
**£799** Olivetti DY450 45cps
**£549** Olivetti DY250 25cps
Brother HR15 13cps
**£209** QuenData 18cps
Canon LaserJet
HP LaserJet 500cps
HP ThinkJet 150cps (50db)

Crestmatt packages may be reconfigured to suit individual business needs. We provide **demonstration support** and **training;** on-site maintenance contracts are available

**CRESTMATT CHALLENGE YOU TO FIND A BETTER DEAL**

export and mail order

**Crestmatt Limited**
67a York Street (Baker St )
London W1H 1PQ
**01.402 1254/5**
**01.723 4699**

telex 265871 (MONREF G)
quote ref 81:DRG015
Monday Friday 9.30am-7
Saturday 10.30am-4pm
prices subject to change without notice; goods subject to availability
**add VAT at 15% to all prices**

# 01-771 6373

## APRICOT

| | |
|---|---|
| F1 256K | 945 |
| PC 2X 315K | 1308 |
| PC 2X 720K | 1472 |
| Portable 256K | 1472 |
| Portable 512K | 1882 |
| Xi 10MB | 2292 |
| Point 32 10MB | 2456 |
| MSD 10MB | 1062 |
| 9" MON | 164 |
| 12" MON | 205 |
| 10" Colour Mon | 324 |
| Mouse cordless | 78 |
| 128K Board | 165 |
| 256K Board | 324 |
| 512K Board | 652 |
| Modem Board | 242 |
| Printer 08 | 136 |

## IBM P.C.

| | |
|---|---|
| PC 64 1X360K | 934 |
| Portable 2X360K | 1648 |
| PCXT 10MB | 2318 |
| PC 64 10MB | 1750 |
| Portable 10MB | 2230 |
| PC AT/ATE | Call |
| 360K Drive | 243 |
| PC Keyboard | 151 |
| AT Keyboard | Call |
| Mono display | 153 |
| Mono/Printer adap. | 148 |
| RGB Colour Mon | 405 |
| Colour adap. | 159 |
| Parallel adap. | 71 |
| 64K RAM kit | 59 |
| 10MB upgrade kit | 820 |
| DOS 2-1 | 48 |

## THE CROYDON COMPUTER STORE

67, WESTOW STREET, UPPER NORWOOD, LONDON SE19 3RW.
TELEPHONE 01-771 6373 TELEX 297598 MICROW G

## APPLE

| | |
|---|---|
| MAC 128K | 1472 |
| MAC 512K | 2128 |
| MAC Drive | 286 |
| IMAGE WRITER 10" | 316 |
| IMAGE WRITER 15" | 430 |
| ACC kit | 31 |
| APPLE //e | 481 |
| //e & Duo Disk & MON //e | 898 |
| Mouse //e | 111 |
| APPLE //C | 709 |
| //c Drive | 188 |
| MON & stand //c | 137 |
| Mouse //c | 58 |

## SOFTWARE

| | |
|---|---|
| Lotus 123 | 262 |
| Symphony | 399 |
| D Base II | 230 |
| D Base III | 339 |
| Framework | 335 |
| Wordstar | 190 |
| Wordstar Prof. | 285 |
| Multimate | 220 |
| Supercalc 3 | 210 |
| Multiplan | 130 |
| Sage accounts | 249 |
| Pegasus | 185 |
| JAZZ | Call |
| Apple Works | 140 |
| File Vision | 140 |

## WE'LL BEAT ANY PRICE BY £10

If you can buy any computer, software or printer at a lower price than ours, we'll beat it by £10 — guaranteed. To qualify simply provide a written quotation from an authorised dealer.
We accept official orders from UK Government and Educational Establishments.

**EXPORT SPECIALISTS**

## COMPAQ

| | |
|---|---|
| PC 2X360K | 1799 |
| PLUS | 3235 |
| PC 10MB kit | 2395 |
| Deskpro Mod 2 | 2128 |
| Deskpro Mod 4 | 4588 |
| 30 MB Drive | Call |

## PRINTERS

Too many printers to list – call for best price

**4% EXTRA DISCOUNT FOR 2 OR MORE!**

# MICRO COMPUTER CONSULTANTS LTD

OUR PRICES ARE VERY

# COMPETITIVE

A Challenge to Every businessman

## MACINTOSH




## ALL the APPLE range at BARGAIN PRICES!

PORTABLE Luxury with the



### APPLE IIC

- ★ *Built-in disc drive*
- ★ *128K RAM*
- ★ *40/80 column display*
- ★ *TV Modulator*
- ★ *6 interactive demo discs*
- ★ *Ultra Hi-Res*
- ★ *Built-in serial ports for printers and modem*
- ★ *Weight only 7.5lbs*
- ★ *External power supply*

**Authorised Apple Dealer**
**Level One Service Centre**

Call TODAY for further details

MCC

**Ascott House, 227 Elliott St**
**Tyldesley, Manchester**
**M29 8DG**

**Tel: 0942-892818**

☆☆☆OVERSEAS ORDERS A SPECIALITY☆☆☆

# KENDAL COMPUTING

## TOTAL EXPERTISE UNDER ONE ROOF



















# THE APRICOT & SIRIUS MAINTENANCE PLAN YOU'VE BEEN WAITING FOR . . .

## *AT LAST!*

AN EXCLUSIVE **LOW COST** MAINTENANCE PLAN THAT GIVES YOU A TOTAL ON SITE RELIABLE SERVICE AND 100% PEACE OF MIND

CONTACT US ***NOW*** FOR A FAST NO OBLIGATION QUOTATION ON YOUR SYSTEM. ASK FOR DAVID FULLER

# 01-366 1411

OUR OTHER DIVISIONS INCLUDE

★ ***SOFTWARE SUPPORT.*** Our specialists are available to offer comprehensive software support.

★ ***SUPPLIES.*** We can supply *ALL* the computer products you are ever likely to need, our service is fast, efficient and competitively priced.

★ ***SECOND USER EQUIPMENT.*** *ALL* makes of computer equipment bought and sold, attractive trades, all guaranteed.

MAIN CENTRES AT

**LONDON**
**London Computer Centre**
Kendal House
700 Great Cambridge Road,
Enfield, Middlesex EN1 3RU
Tel: 01-366 1411
Telex: 261774 KENDAL G

**MANCHESTER**
**Manchester Computer Centre**
419 Barlow Moor Road
Chorlton-cum-Hardy
Manchester M21 2ER
Tel: 061-861 8877

**WORCESTER**
**Worcester Computer Centre**
45 Foregate Street
Worcester
Tel: Worcester (0905) 612931

**SWANLEY**
**Swanley Computer Centre**
Unit 4, Park Road, Swanley,
Kent
Tel: 0322-64908

# Yet another unbeatable deal from Datastar Systems!

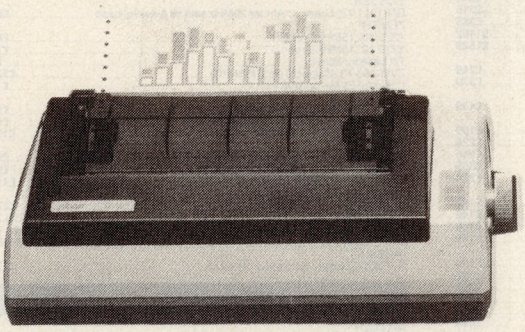

## STAR SG10

### Character Sets

96 Standard ASCII Characters
88 Standard International Characters
96 Italic Characters
88 Italic International Characters
96 NLQ Characters
88 NLQ International Characters

### Character Matrix

Standard Characters: 9 dot × 11 dot
STAR Block Graphics: 6 dot × 6 dot
IBM Block Graphics: 12 dot × 11 dot
User Defined: 8 dot × 4 to 11 dot
Near Letter Quality: 17 dot × 11 dot

### Character Fonts

Normal (10 CPI)
Elite (12 CPI)
Condensed (17 CPI)
NLQ (10 CPI)

**Line Spacing** 1/6, 1/8 in. or 7/72 in. Standard
**Dimensions (W × D × H)**
392 × 315 × 145mm (15.4 × 12.4 × 5.7 in.)
**Number of Columns**
80, 96, 136, (40, 48, 68 Double Width)
**Print Head** 9 Wires (User Replaceable)

### THE *INCREDIBLE* NEW STAR SG-10 NEAR LETTER QUALITY PRINTER.

*features:—*

- Epson and IBM compatible print codes
- Friction and tractor feeds.
- Externally Accessible DIP-Switches
- High-resolution bit-image graphics
- Downloadable character sets
- NLQ, italics, condensed, enlarged, super & subscript styles.
- High 120 CPS print speed, logic seeking.
- Hex dump facility.
- Macro-instructions.
- Touch-sensitive control panel.
- Standard parallel Centronics interface.
- 2K print buffer — expandable to 10K
- Commodore 64 version available shortly

| | |
|---|---|
| **Star SG-10 £259 + VAT** | **£297.85** |
| **Parallel cable for any Micro (max. price)** | **£20** |
| **2 Spare ink ribbons** | **£5** |
| **2000 sheets of continuous listing paper** | **£15** |
| **Next day doorstep delivery service** | **£10** |
| | **£347.85** |

**Datastar's all in price £297.85!!!**

**Post your cheques to**

## Datastar Systems UK

**Unicom House, 182 Royal College Street, London NW1 9NN. Telex 295931 UNICOM G**

PERSONAL CALLERS WELCOME — We are situated by the junction of Camden Road, near the railway bridge
MONDAY-FRIDAY 9-6 SUNDAY 10-1 *EXPORT ENQUIRIES WELCOME*

## Credit Card Hot Line 01-482 1711

**AS MAIN DISTRIBUTORS FOR THE STAR RANGE, WE ARE ABLE TO OFFER EXCELLENT DEALER MARGINS**

# DIGITASK
## BUSINESS SYSTEMS LTD

56, MAPLE DRIVE, EAST GRINSTEAD, WEST SUSSEX, RH19 3UR

## APPLE COMPATIBLE PERIPHERALS

128K RAM Card with manual & disk ..... £139.95
SNAPSHOT (II & II+) — Dark Star ..... £52.00
SNAPSHOT IIe — Dark Star ..... £99.00
COPYKIT Software — Dark Star ..... £19.95
SHUTTLE MULTITASKING Software Dark Star ..... £19.95
Auto Dial/Auto Answer MODEM Card ..... £125.00
COMMS software for above ..... £25.00
PRESTEL Graphics ROM for Modem Card ..... £19.95
Disk Drive Controller Card ..... £34.95
16K RAM (language) Card ..... £39.95
80 Column Card (Videx Compatible) II+/e ..... £44.95
80 Col Card as above with Soft Control ..... £59.95
INVERSE Video ROM for above ..... £5.00
80/40 Column Hard Switch ..... £9.95
80 Column Card for IIe ..... £44.95
80 Column Card for IIe with 64K RAM ..... £84.95
Z80 CP/M Card for II+ ..... £39.95
Z80 PLUS Card with Manual for II+ ..... £49.95
CP/M Z80-B (6MHz) Card with 64K RAM II+ ..... £169.95
Z80 Card for IIe ..... £44.95
CP/M Module for IIc ..... £86.00
Parallel Printer Card (Centronics) ..... £34.95
Parallel Printer Card (Epson) ..... £34.95
SUPER Parallel Card with manual ..... £89.95
Printer Buffer Card (64K dump) ..... £129.95
Grappler+ Card ..... £84.95
Grappler+ 16K Buffer ..... £149.95
CHAMPION Parallel Interface (with cable) ..... £45.00
CHAMPION + 16K Buffer (with cable) ..... £89.00
CHAMPION + 64K Buffer (with cable) ..... £125.00
CACHEBOX 64K Parallel inline Buffer ..... £125.00
Communications Card ..... £32.95
RS-232 Serial Interface Card ..... £34.95
SUPER Serial card with manual ..... £89.95
7710 Asynchronous Serial Interface ..... £79.95
NTSC to PAL Converter + UHF Mod ..... £44.95
RGB Card (TTL output) ..... £49.95
RGB Card (LINEAR output) ..... £49.95
IEEE-488 Controller, cable, disk & manual ..... £149.95
Eprom Blower Card (2716,2732,2764) ..... £49.95
MK2 Eprom Blower (2716,2732,2764,27128) ..... £59.95
NEW EPROM controller/Parallel I/Face ..... £32.00
EPROM Blower for 2716,32,32a,64,128,256 ..... £53.00
8 BIT AD/DA Card (8-channel) ..... £59.95
12 BIT AD/DA Card ..... £119.95
8 BIT 16 Channel AD Card ..... £59.95
8 BIT 16 Channel AD/DA Card ..... £109.95
CLOCK CARD (TIME II) Card ..... £44.95
Music Card ..... £44.95
Wild Card ..... £69.95
Wild Card Plus ..... £99.95
Four Port Twin 6522 Card ..... £34.95
6809 Card ..... £119.95
Integer Basic Card ..... £32.95
LOGO Card ..... £59.95
Joystick (2 control buttons) ..... £9.95
Joystick (self centering) ..... £14.95
Joystick (deluxe version) ..... £19.95
Joystick extension cord ..... £3.99
Apple Compatible Power Supply 5A ..... £49.95
ASC II Encoded Keyboard with I/c mod ..... £54.95
IBM STYLE keyboard for Apple ..... £89.95
A/C Cooling Fan (clip on) with suppress ..... £24.95
Speech Card ..... £79.95
Replay Card ..... £79.95
Forth Card ..... £89.95
8088 Card with 64K (capacity 128K) ..... £365.00
Light Pen system ..... £195.00
Graphics Table ..... £89.00

## APPLE STORAGE DEVICES

CUMANA full height drive for Apple ..... £109.00
CUMANA half height drive for Apple ..... £145.00
AFD-2 half ht. SS/DD 320K floppy drive ..... £249.00
AFD-4 half ht. DS/DD 640K floppy drive ..... £289.00
AFD-4 drive controller card ..... £59.00
INTEC 5MB Hard Drive for Apple ..... £699.00
INTEC 10MB Hard Drive for Apple ..... £950.00
INTEC 10MB Hard Drive KIT ..... £875.00
5/10MB Hard Drive Controller Card ..... £250.00
(Note: All INTEC drives are UK built and backed — Prices include controller card, cables, power supply, utility and diagnostic software for DOS, PASCAL & CP/M, together with 24 month service warranty).

## PRINTERS — DOT MATRIX

ANADEX — 100% DUTY CYCLE
ALL MODELS ..... Call
BROTHER
HR-5 Portable thermal transfer (P or S) ..... £125
HR-5 for CBM64/VIC 20 ..... £125
EP-44 Thermal transfer (KSR) ..... £189
M-1009 Dual Interface ..... £155
M-1009 (IBM) 50cps ..... £149
2024L NLQ 190cps draft ..... £889
TC 600 — Typewriter — printer ..... £339
DISK DRIVE for TC 600 ..... £149
CANON — NEW LOW PRICES
PW-1080 160cps (NLQ) ..... £263
PW-1156 160cps (NLQ) ..... £349
F-60 80cps Thermal DRAFT/NLQ/LQ/GR 110col ..... £349
PJ-1080A Seven COLOUR 37cps ..... £379
DATAPRODUCTS — PAPER TIGER
8010 80col 180cps draft NLQ both S & P ..... £389
8011 as above but IBM COMPATIBLE ..... £389
8020 132col 180cps draft both S & P ..... £469
8021 as above but IBM COMPATIBLE ..... £469
8050 132col 200cps + SSF both S & P ..... £1219
8050 COLOUR as above but colour printing ..... £1449
8070 132col 400cps draft LQ both S & P ..... £1589
8070 COLOUR as above but colour printing ..... £1829
EPSON
RX-80 T 80col 100cps ..... £189
RX-80 F/T 80col 100cps ..... £209
RX-100 136col F/T 100cps ..... £324
FX-80 80col 160cps ..... £309
FX-100 F/T 136col 160cps ..... £420
LQ-1500 200cps (NLQ) 4 to 16" paper width ..... £855
EPSON 8143 Serial I/Face OK ..... £29
EPSON 8145 Serial I/Face 2K buffered ..... £59
EPSON 8148 Serial I/Face 3K buffered ..... £65
XON/XOFF Serial I/Face 2K buffer ..... £65
EPSON/COMMODORE I/Face 2K buffer ..... £53
EPSON 8165 PET IEEE 2K I/Face 2K buffer ..... £65
EPSON PET IEEE Cable 8260 ..... £20
EPSON APPLE Card 8132 ..... £59
EPSON APPLE Cable 8231 ..... £20
8K Buffered parallel or serial I/F ..... £79
16K Buffered parallel or serial I/F ..... £95
32K Buffered parallel or serial I/F ..... £125
64K Buffered parallel or serial I/F ..... £159
HONEYWELL
ALL MODELS ..... Call
MANNESMANN TALLY
MT-80 80cps ..... £189
MT-160 160cps ..... £395
MT-180 160cps (NLQ) ..... £545

MICRO PERIPHERALS
CPA-80P Parallel 100cps, 80col ..... £179
CPA-80S Serial version of above ..... £195
CPA-80Q QL version of above ..... £219
CPA-80C Commodore version of above ..... £195
CPB-80P Parallel IBM COMPAT. 130cps, 80col ..... £199
CPB-80S As above but Serial ..... £209
CPB-136 Parallel IBM COMP. 130cps, 136col ..... £289
MP-165 165cps 136col NLQ ..... £235
MP-165Q QL version of above ..... £311
MP-1651 IBM version of above ..... £249
SERIAL Interface for 165 series ..... £55
NEC
PINWRITER P2 80col ..... £489
PINWRITER P3 132col ..... £569
Parallel Interface for P3/P2 ..... £99
RS232 Interface for P3/P2 ..... £155
IBM PC Interface for P3/P2 ..... £99
Sheet Feeder for P3 ..... £289
Tractor Unit for P3 ..... £119
NEWBURY DATA — Heavy Duty
DRE-8830 Parallel 180cps 132col ..... £1019
DRE-8840 Parallel 240cps 132col ..... £1129
DRE-8925 Parallel 240cps 132col ..... £1275
DRE-8850 Parallel 300LPM ..... £1959
OKI — MICROLINE
OKI-82A P&S 120cps 80col ..... £239
OKI-84A 200cps Parallel ..... £645
OKI-92P 160cps Parallel ..... £315
OKI-83A 120cps Parallel ..... £385
OKI-2350 Parallel line printer ..... £1492
OKI-2410 350cps line printer ..... £1529
PANASONIC
KX-P1091 120cps NLQ, IBM COMPATIBLE ..... £249
KX-P1092 180cps NLQ, 7K buffer, IBM COMP ..... £379
RADIX
10 F/T 200cps ..... £439
RITEMANN
PLUS — (MX-80 FT compatible) 120cps 80col ..... £199
BLUE PLUS (RX-80 FT comp) 140cps 80col ..... £225
II — (FX-80 compatible) 160cps 80col NLQ ..... £255
15 — (FX-100 compatible) 160cps 136col ..... £395
NEW F+ 80col 105cps FRONT LOADING, NLQ, 2K ..... £224
SEIKOSHA
GP-100 VIC 50cps ..... £149
GP-100 Parallel or Serial ..... £149
GP-500A 50cps ..... £169
GP-250X 50cps ..... £199
STAR
GEMINI 10X F/T 120cps 80col ..... £195
DELTA 10X F/T 160cps 80col ..... £299
RADIX 10 F/T 200cps 80col ..... £399
GEMINI 15X F/T 120cps 132col ..... £295
DELTA 15 F/T 160cps 132col ..... £419
RADIX 15 F/T 200cps 132col ..... £499
TAXAN
KP-810 140cps 80col NLQ ..... £279
KP-910 140cps 156col NLQ ..... £368
KP-810PC IBM VERSION ..... £329
KP-910PC IBM VERSION ..... £409
TEC
1550 Parallel ..... £539
1550 Serial ..... £539
TOSHIBA — 24 Wire Head
2100H Parallel 100cps LQ ..... £1339
2100H Serial 100cps (NLQ) ..... £1269
Auto Sheet Feeder for 2100 ..... £546
Bi-directional Tractor for 2100 ..... £136
P-1340 PII or Serial, 80col + Graphics ..... £619
P-1351 PII or Serial, 136col + Graphics ..... £1129

## PRINTERS — DAISY WHEEL

BROTHER
HR-15 Parallel 20cps ..... £311
HR-15 Serial 20cps ..... £349
HR-25 Parallel 25cps ..... £549
HR-25 Serial 25cps ..... £599
HR-35 Parallel 35cps ..... £690
HR-35 Serial ..... £779
HR-15 Keyboard ..... £129
HR-15 Sheet Feeder ..... £179
HR-15 Tractor Feed Unit ..... £60
HR 25/35 Sheet Feeder ..... £185
HR 25/35 Tractor Unit ..... £75
TOWA
Daisy Junior 14cps 80col, PII ..... £199
Daisystep 2000 18cps 132col, PII ..... £219
DIABLO
630-API 40cps ..... £1529
630-API Sheet Feeders, from ..... £229
EPSON
DX-100 Parallel 20cps ..... £315
JUKI
6100 18cps ..... £297
6300 ..... £645
2200 ..... £245
2100 ..... £169
NEC SPINWRITER
3510/30/15 Ser/PII/Diablo 35cps ..... £999
7710/30/15 Ser/PII/Diablo 55cps ..... £1429
2000 Printer 20cps ..... £569
Ser/PII/Diablo I/face for 2000 ..... £89
8800 Printer ..... £1299
Ser/PII/Diablo I/face for 8800 ..... £99
Accessories for NEC printers ..... Call
QUME
11/40 RO (without interface) ..... £1165
9/45 RO full front panel ..... £1525
12/20 Letter Pro (S or P) 20cps ..... £445
9/55 RO full front panel 55cps ..... £1895
11/55 RO (without interface) ..... £1359
QUEN DATA/UCHIDA
Daisy Wheel Parallel 18cps ..... £215
UCHIDA DAISY WHEEL 20cps parallel ..... £199
UCHIDA as above Serial version ..... £239
RICOH
RP-1200 Parallel/Serial 20cps ..... £489
RP-1300S Parallel/Serial 30cps ..... £789
RP-1600S PII or Ser 8K 60cps ..... £1300
FLOWRITER 1600 46K Multi I/face ..... £1235
FLOWRITER 1300 46K Multi I/face ..... £1279
Elec/Mech Sheet Feeder RP-1600 ..... £445
Tractor Unit for 1600 Models ..... £129
SILVER REED
EXP-400 Parallel 10cps ..... £219
EXP-400 Serial 10cps ..... £249
EXP-500 Parallel 16cps ..... £259
EXP-500 Serial 16cps ..... £291
EXP-550 Parallel 19cps ..... £429
EXP-550 Serial 19cps ..... £469
EXP-770 Parallel 36cps ..... £579
EXP-770 Serial 36cps ..... £609
Tractor for 500 ..... £84
Tractor for 550/770 ..... £105
Cut Sheet Feeder for 500 ..... £163
Cut Sheet Feeder for 550/770 ..... £163
8K Buffer for 770 ..... £55
16K Buffer for 770 ..... £95
48K Buffer for 770 ..... £259
TEC STARWRITER
F10/40 Parallel 40cps ..... £830
F10/55 Parallel 55cps ..... £1190
Elec/Mech Single Sheet Feeder ..... £445
Tractor for F10 units ..... £129

## PLOTTERS

EPSON H180 Plotter ..... £349
ASTAR MCP-40 4-Colour 80 Character ..... £105
ASTAR MCP-80 4-Colour full graphics ..... £165
**NEW *SILVER REED EB-50 typewriter/calculator/intelligent 4-colour plotter/printer ..... £169

## COLOUR PRINTERS

SEIKOSHA GP-700A ..... £345
EPSON JX-80 160cps Text ..... £469
DIABLO 150C ..... £799
ANADEX DP-9725B ..... £1299
CPP-40 4-colour printer/plotter ..... £99

## MONITORS

SANYO
DM-2112 40col 15MHz+ P31 ..... £63
DM-8112CX 80col 18MHz+ P31 ..... £83
CD-3125 14" Normal Res RGB ..... £155
CD-3117 14" Medium Res RGB ..... £275
CD-3115 14" High Res RGB ..... £379
DMC 7650 IBM/APRICOT Colour Monitor ..... £319
YAN JEN
GN-1211 12" Green or Amber 20MHz with tilt & swivel base ..... £83
ZENITH
122E 12" 15MHz AMBER ..... £84
123E 12" 15MHz Green ..... £79
Tilt base for above ..... £8
ZVM-133 13" Colour hi Res (IBM-PC) ..... £329
Cable for ZVM-133/IBM-PC ..... £15
PHILIPS
7513 12" Green, composite, 20MHz ..... £69
7502 12" Green, IBM Compatible 20MHz ..... £94
CT 2007 Monitor/TV RF,CVBS,RGB ..... £199
TAXAN
KX 1201G 12" 20MHz, Green, P31 tube ..... £89
KX 1202G 12" 20MHz, Green, P39 tube ..... £99
KX 1212PC 12" (IBM) 20MHz, Green P39 ..... £119
MONOCHROME CABLES
Phono/Phono ..... £3.75
BNC/Phono ..... £3.75
Videolink for Commodore 64 ..... £3.75
UHF/Phono ..... £9.00
INDESIT
APRICOT display 12" (beige or black) ..... £159

## COMPUTERS

APRICOT
F1 ..... £910
PC 256K + 2 × 315K + Monitor ..... £1295
PC 256K + 2 × 720K + Monitor ..... £1529
XI 256K + 10MB + Monitor ..... £2189
XI 512K + 10MB + Monitor ..... £2499
XI 512K + 20MB + Monitor ..... £2945
SANYO
MBC 550 128K + 1 × 160K + software ..... £595
MBC 555 128K + 2 × 160K + software ..... £789
MBC 550-2 as 550 but 360K Drive ..... £789
MBC 555-2 as 555 but dual 360K dr ..... £1125
CRT 36 Hi Res 12" Green Monitor ..... £110
CRT 50 Med Res Colour Monitor ..... £279
CRT 70 Hi Res Colour Monitor ..... £419
MBC 232 — RS232 I/Face board ..... £49
64K RAM Plug In Module ..... £79
EPSON
PX-8 Portable Computer ..... £649
120K RAM Disk for above ..... £249
PX8 + 120K RAM Disk ..... £889
QX-10 Desk Top Computer ..... £1295
PCs AND COMPATIBLES
CANON
A-200M 256K + 2 × 360K drives + mono display MS-DOS, GW-Basic ..... £1449
A-200C as above but COLOUR ..... £1549
COMMODORE
PC-10 256K + 2 × 360K drives + monitor ..... £1499
PC-20 256K + 1 × 360K + 10MB + monitor ..... £2439
COMPAQ
PC-2 256K + 2 × 360K drives ..... £1689
PLUS Portable ..... £3098
DESKPRO 1 ..... £1725
DESKPRO 2 ..... £2099
DESKPRO 3 ..... £3395
DESKPRO 4 ..... £4525
IBM
Mono PC 256K + 2 × 360K drives + monitor ..... £1575
Colour PC 256K + 2 × 360K + monitor ..... £1845
Mono XT 256K + 1 × 360K + 10MB + monitor ..... £3100
OLIVETTI
M24 256K + 2 × 360K drives ..... £1675
M24 256K + 1 × 360K + 10MB ..... £2795
M21 256K + 2 × 360K drives ..... £1580
M21 256K + 2 × 720K drives ..... £1799
SANYO
SANYO MBC 775 COLOUR PORTABLE IBM COMPATIBLE 256K RAM + 2 × 320K DRIVES, COLOUR MONITOR + MS-DOS and GW-BASIC ..... £1749

## SOFTWARE

WORDSTAR ..... £189
D BASE II ..... £229
FRIDAY ..... £129
FRAMEWORK ..... £315
LOTUS 123 ..... £269
SYMPHONY ..... £380
DMS DELTA ..... £369
MULTIMATE ..... £255
OPEN ACCESS ..... £310
D BASE fIII ..... £315
SUPERCALC II ..... £130
SUPERCALC III ..... £189
MULTIPLAN ..... £125
PEACHTREE ACCOUNTS ..... POA
PFS FILE ..... £75
PFS REPORT ..... £75
SIDEKICK ..... £42
CARD'BOX PLUS ..... £285
CROSSTALK XVI ..... £120
WORDSTAR PROFESSIONAL ..... £245
SIDEWAYS ..... £49
WORDSTAR 2000 ..... £289
FLIGHT SIMULATOR ..... £39
NORTON UTILITIES ..... £65
SPREADSHEET AUDITOR ..... £75
TURBO PASCAL ..... £49
NICEPRINT ..... £69
PC PAL ..... £29
***WE OFFER EXCELLENT DISCOUNTS ON JUST ABOUT EVERY MAJOR BRAND OF SOFTWARE — CALL FOR QUOTATION***

REMEMBER Even if you don't see it advertised here we can probably supply it AND FOR LESS. Problems with limited space means that we are only able to advertise a limited range of products. Additional prices on application. Consumables, paper, ribbons etc, supplied at exceptional prices. 24-HOUR DELIVERY on items ex-stock.
CARRIAGE WITHIN UK: items which may be dispatched by POST (eg, peripheral cards etc) add £2.00 per order under £50.00. ORDERS EXCEEDING £50.00 CARRIAGE FREE. SOFTWARE PACKAGES: CHARGED SEPARATELY MINIMUM CHARGE £4.00. Items which must move by CARRIER (such as printers, monitors etc) will be delivered within 24-hours for a charge of £10.00. OR ALTERNATIVELY within 48-HOURS at a charge of £7.50. Add 15% VAT to all prices given. Remember, VAT is also applicable on carriage at 15%. Terms STRICTLY CWO. DEALER ENQUIRIES WELCOME. FOREIGN enquiries if possible by telex please. Favourable rates to most destinations. CALLERS BY APPOINTMENT ONLY.

BARCLAYCARD VISA

TEL: (0342) 24631 • 313427 TLX: 957547

# Discount Micros!

## SAVE HUNDREDS OF £££s

on the BEST RANGE OF MICROCOMPUTERS at the BEST PRICES!

**RECOMMENDATION? RELIABILITY? ... 40% REPEAT BUSINESS!!!!**

PRINTERS * MODEMS

SOFTWARE * PERIPHERALS

### IBM PC — Full system

64K System Unit
2 x 320K Drives
Keyboard
High Res. Monitor



~~£2000~~

**£1598***

### COMPAQ™

(Fully IBM compatible portable computer)

— Full System

256K System Unit
2 x 320K Drives
Colour interface
Keyboard
High Res. Monitor



~~£2200~~

**£1698***

### apricot — Full system

256K System Unit
2 x 315K Drives
Keyboard
High Res. Monitor



~~£1800~~

including a range of software FREE

**£1398***

### Macintosh

128K
Keyboard
High Res. Monitor



~~£1800~~

**£1398***

### SANYO MBC 550

128K System Unit
1 x 160K Drive
Keyboard
Spread Sheet
Wordstar



~~£800~~

**£598***

### olivetti M24

IBM Compatible
128K RAM
2 x 320/360K Disc Drives
Monitor
Keyboard, etc.



~~£1939~~

**£1498***

*** COMMODORE PC * KAYPRO * SIRIUS ***

**APRICOT**

| | |
|---|---|
| XI 256K 10MB + Mon | £2348 |
| XI 256K 5MB + Mon | £2148 |
| PC 256K, 2 x 720K + Mon. | £1598 |
| PC 256K, 2 x 315K + Mon. | £1398 |
| **FI 256K, 1 x 720K + Mon** | £1048 |
| **Fle 128K, 1 x 315K + Mon.** | £848 |

**OLIVETTI**

| | |
|---|---|
| M24 PC + Mon | £1498 |
| M21 Portable | £1498 |
| M10 Lap held | £359 |

**IBM PC**

| | |
|---|---|
| 128K 'XT' 10MB | £2998 |
| 128K 'XT' 10MB Colour | £3298 |
| 64K 'PC', 2 x 320K | £1598 |
| 64K 'PC', 2 x 320K Colour | £1898 |

**COMPAQ**

| | |
|---|---|
| 256K, 10MB | £2999 |
| 256K, 2 x 320K | £1698 |
| Deskpro 2 | £2095 |

NEW **Kaypro A.T. Compatible £3299!!!!**

**APPLE**

| | |
|---|---|
| Macintosh 128K inc. Mon. | £1398 |
| Macintosh 512K inc. Mon | £2199 |
| Ile 64K + Mon | £599 |

**SANYO**

| | |
|---|---|
| MBC 550 (128K, 1 x 160K) | £598 |
| MBC 555 (128K, 2 x 160K) | £798 |
| MBC 550 (1 x 360K) | £798 |
| MBC 555 (2 x 360K) | £1098 |

EXPORT SPECIALISTS

**3** YEARS PEACE OF MIND PROTECTION AGAINST*

- Breakdown, theft, etc.
- Loss of data
- Cost of hiring another machine
- Insurance in transit

*Option available

**Other machines on request.**

**To place your order for IMMEDIATE DELIVERY, call Vanessa on**

**01-938 2151 (20 lines)**

Discount Micros Ltd. PCW July
7 Kensington High Street, London W.8.

Please send me

☐ Quote on ☐ Information on ☐ Ring me ☐ Urgent

Name _____ Title _____

Company _____

Address _____

_____

_____ Postcode _____

Phone _____ Extension _____

*Offer lasts for limited period only and is subject to VAT and change without notice!

# Its Staggering!




**How many products AWS cram into their New 1985 Catalogue**

**Phone 01 541 1188**

**For your Free Copy**

AWS Computer Supplies, 57 Surbiton Road, Kingston Upon Thames, Surrey KT1 2HG. TELEX 859205

---

**ALTOS 486 Series** — **from £7695.00**

- Entry level XENIX System
- up to 4 terminals
- 0.5 Mbyte RAM memory
- 20 Mbyte Hard Disc
- one networking port
- 80168 8 Mhz processor
- includes one ALTOS terminal
- 1 floppy drive
- 5 serial ports
- XENIX 3.0 runtime included

The ALTOS 486 is a cost effective XENIX system with a wide range of database, communications and applications software available. ALTOS Teamnet is supported via the networking port for expansion. Ask about PC PATH for adding your IBM PC to the ALTOS network.

**ALTOS 586 and 986 series** — **from £9235.00**

10 Mhz 8086 based systems with XENIX 3.0 operating system

- up to 1 Mbyte RAM memory
- up to 80 Mbyte Winchester
- Low cost ALTOS Teamnet
- One Altos terminal included
- up to 9 users
- cartridge tape backup
- Ethernet
- 1 floppy drive

The ALTOS 586 and 986 series offers high performance, and a wide range of applications, database and communications software. ALTOS Teamnet supports transparent networking for distributed databases, Telex and 3270 and 3280 communications. Enquire about PC PATH to integrate ALTOS and IBM PCs.

**ALTOS 68000 Series** — **from £12,450.00**

- Motorola 68000 processor
- up to 16 users
- ~1 floppy drive
- Multibus expansion
- ALTOS-NET or Ethernet
- UNIX III
- up to 160 Mbyte Winchester
- cartridge tape backup
- Large memory space

The ALTOS 68000 is an excellent UNIX workhorse for software development work, and scientific and technical processing.

**WYSEpc** — **from £1925.00**

- MS-DOS 2.11
- 256 Kbyte RAM
- Parallel printer interface
- 2 360 Kbyte floppy
- runs Lotus 1-2-3 etc
- GW Basic
- 2 RS232 serial ports
- 14" colour or mono screen
- or 1 floppy & 10 Mbyte HD
- IBM expansion slots

The WYSE pc is an elegant and powerful, but economical microcomputer with IBM compatibility and improved ergonomics.

Systematika Ltd. offers a full installation service with a wide range of terminals, printers and applications software.

**Systematika Ltd.**

**6-7 West Smithfield, London EC1A 9JX. Tel: 01-248 0962**

---

# Make more things happen with Memoco.

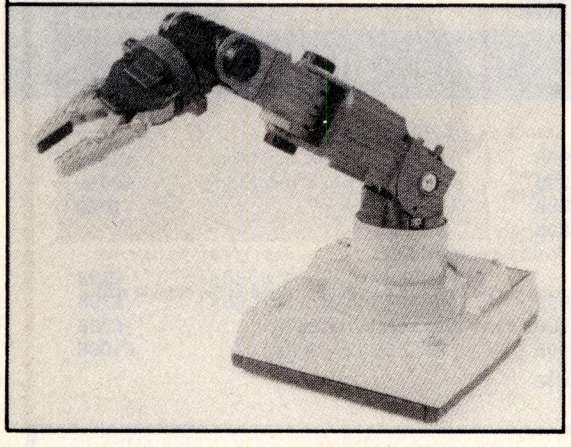

**Memoco Electron Robotic Arm**

12 Axis of movement. Arm raise and lower. 270 degree rotation left or right. 90 degree Elbow movement left or right. 90 degree wrist movement either side of centre. 270 degree wrist rotation in either direction. Claw open and close. Fitted with motor control circuit. Switched from 5 volt TTL. Controlled by computer. Separate motor driver power supply.

With position feedback ___ **£129.95**
BBC B Interface card ___ **£49.00**
Spectrum Interface card ___ **£79.00**
Commodore 64 Interface card ___ **£49.00**



**200 in 1 Electronic Lab Kit**

Includes all parts to make 200 projects such as Radio : Rain Detector : Burglar Alarm. Covers projects using Transistors : Integrated Circuits : Seven segment displays: Light Sensitive circuits and many more. All components built into fitted workcase with cover. Comprehensive manual. Completely safe.

Normal Price £34.00
Our Price ___ **£24.95**

**Range Doubler Multitester 43 Ranges**

50,000 Ohms per volt DC. 10,000 Ohms per volt AC. 4.25" Colour coded mirrored display giving accurate reading without parellex error.

Normal Price £27.00
Our Price ___ **£15.45**

**Ni-Cad Battery Charger**

A.A., C., D and PP3. Charges up to five batteries at a time.
Price ___ **£6.95**

**Battery Eliminators**

Mains to DC regulated 300 mA 6v, 7.5v, 9v selectable. Suitable for most battery operated equipment.
Price ___ **£6.95**

**QuickShot™ II** Joystick ___ **£9.50**

**1½–4½ v DC Motors** Stall Current 300 mA
Dimensions: Length o/a: 45 mm; Dia: 24 mm; Shaft length: 5 mm; Shaft Dia: 2 mm
Price – **£1.50** each or 10 for **£12.50**

ALL PRICES ARE INCLUSIVE OF VAT – FOR ORDERS UNDER £5 ADD £1.00 POSTAGE AND PACKAGING. FOR INFORMATION ONLY PLEASE SUPPLY S.A.E. TRADE ENQUIRIES WELCOME

**MEMOCO ELECTRON**

VISA

15 WINDSOR STREET
MELTON MOWBRAY, LEICS
TELEPHONE (0664) 63544

# IBM COMPATIBLES
## SAVE UPTO £1000
on the price of an equivalent IBM PC system

**FERRANTI ADVANCE 86b**

IBM compatible micro, 128K memory, 2× 360K disc drives, colour graphics, parallel and serial ports, 5 expansion slots, complete with monitor, BASICA, integrated spreadsheet, wordprocessing, and database, and 12 months on-site maintenance. Runs LOTUS 123, etc.

**Only £995 + VAT**

**COMPLETE BUSINESS PACKAGE**

Ferranti Advance 86b micro, monitor, printer, accounts software, integrated spreadsheet, word processor, and database, BASICA, box of discs and paper, 12 months on-site maintenance. Everything you need to get started.

**Only £1595 + VAT**

**HARD DISK FERRANTI MICRO**

Phone today for unbeleivably LOW PRICES for a hard disk micro.

**CANON A200 Microcomputer**

Phone today for details of our SPECIAL INTRODUCTORY OFFER.

**CAD PACKAGE**

Doodle-dms computer aided design package, and Ferranti Advance 86b microcomputer, high resolution colour monitor, and A4 plotter.

**Only £2395 + VAT**

**SUBSTANTIAL SAVINGS ON PC SOFTWARE**
**IBM COMPATIBLE PRINTERS PC ACCESSORIES**

CALL NOW FOR DETAILS
OPEN 7 DAYS 9am to 9pm

**CARRERA COMPUTING**
**12, Lyons Avenue**
**Hetton-le-Hole**
**Tyne and Wear**
**DH5 OHS**

**Tel: SUNDERLAND (0783) 267816**

# Word-Bird

is not **"user friendly"** it is *easy* and *natural* to use.

No commands, no keying-in sequences, no "easy" reference cards.

*Can be used immediately, mastered in days.*

Labels, letters and fully-formatted books are typed direct to the screen, as they will look on paper, with all the emphasis and special characters your printer is capable of.

Easy, natural multi-lingual use.

Full wordprocessing power at your finger-tips.

*Phone for your **FREE** copy of the* Word-Bird Book of Wordprocessing *now!*

*SPECIALISED MULTILINGUAL WORD PROCESSING SYSTEMS*

**LEABUS**
*Legal & Business Software*

114 Brandon Street
London SE17 1AL
Telephone: 01-708 2756

## WE'LL BEAT ANY PRICE BY £10

If you can buy any computer, software or printer at a lower price than ours, we'll beat it by £10 — guaranteed. To qualify simply provide a written quotation from an authorised dealer.
We accept official orders from UK Government and Educational Establishments.

**EXPORT SPECIALISTS**

**4% EXTRA DISCOUNT FOR 2 OR MORE!**

### APRICOT/APPLE

| | |
|---|---|
| F1 256K | 945 |
| PC 2X 315K | 1308 |
| PC 2X 720K | 1472 |
| Portable 256K | 1472 |
| Portable 512K | 1882 |
| Xi 10MB | 2292 |
| Point 32 10MB | 2456 |
| MSD 10MB | 1062 |
| 9" MON | 164 |
| 12" MON | 205 |
| 10" Colour Mon | 324 |
| Mouse cordless | 78 |
| MAC 128K | 1472 |
| MAC 512K | 2128 |
| MAC Drive | 286 |
| IMAGE WRITER 10" | 316 |
| IMAGE WRITER 15" | 430 |

### IBM P.C.

| | |
|---|---|
| PC 64 1X360K | 934 |
| Portable 2X360K | 1648 |
| PCXT 10MB | 2318 |
| PC 64 10MB | 1750 |
| Portable 10MB | 2230 |
| PC AT/ATE | Call |
| 360K Drive | 243 |
| PC Keyboard | 151 |
| AT Keyboard | Call |
| Mono display | 153 |
| Mono/Printer adap. | 148 |
| RGB Colour Mon | 405 |
| Colour adap. | 159 |
| Parallel adap. | 71 |
| 64K RAM kit | 59 |
| 10MB upgrade kit | 820 |
| DOS 2-1 | 48 |

### MODEMS

| RACAL B.T. Approved | |
|---|---|
| 1222 | 546 |
| 1222 AD | 630 |
| CP 2123 | 311 |
| MPS 24 | 463 |
| VI 2422 | 756 |

### CARDS

| | |
|---|---|
| AST Sixpak + 64K | 273 |
| Qubie 64K | 261 |
| Hercules Mono Graphics | 389 |
| Simon 256K and Serial | 223 |
| S.V. Multifunction 64K | 198 |

### SOFTWARE

| | |
|---|---|
| Lotus 123 | 262 |
| Symphony | 399 |
| D Base II | 230 |
| D Base III | 339 |
| Framework | 335 |
| Wordstar | 190 |
| Wordstar Prof. | 285 |
| Multimate | 220 |
| Supercalc 3 | 210 |
| Multiplan | 130 |
| Sage accounts | 249 |
| Pegasus | 185 |
| JAZZ | Call |
| Apple Works | 140 |
| File Vision | 140 |

### COMPAQ

| | |
|---|---|
| PC 2X360K | 1799 |
| PLUS | 3235 |
| PC 10MB kit | 2395 |
| Deskpro Mod 2 | 2128 |
| Deskpro Mod 4 | 4588 |
| 30 MB Drive | Call |

### PRINTERS

Too many printers to list – call for best price

**01-278 5688/01-833 3831**

GROUP 18 LTD
164 Grays Inn Road
London WC1

All prices exclude VAT
Credit Cards attract a surcharge

Telephone: 01-833 3391 Telex: 262005 SILVAL G
Prices are subject to change without notice

IBM Authorised Dealer

## 2c SYSTEM 2

| | |
|---|---|
| Apple 2c | £899 + VAT |
| 2c Monitor | £129 + VAT |
| Monitor Stand | £27 + VAT |
| Apple Works | £175 + VAT |
| **SYSTEM PRICE** | **£1049** + VAT |

## 2c SYSTEM 3

| | |
|---|---|
| Apple 2c | £899 + VAT |
| 2c Monitor | £129 + VAT |
| Monitor Stand | £27 + VAT |
| Additional Disk Drive | £199 + VAT |
| Apple Works | £175 + VAT |
| **SYSTEM PRICE** | **£1199** + VAT |

apple

## APPLE 2c



- 128K RAM
- Built-in Disk Drive
- 80 Column Display

## APPLE 2e




- Reliable
- Flexible
- Well Proven

## 2e SYSTEM 2

| | |
|---|---|
| Apple 2e | £489 + VAT |
| Disk with Controller | £199 + VAT |
| Additional Drive | £149 + VAT |
| 12" Monitor | £79 + VAT |
| Apple Works | £175 + VAT |
| **SYSTEM PRICE** | **£999** + VAT |

## 2e SYSTEM 4

| | |
|---|---|
| Apple 2e | £489 + VAT |
| Disk with Controller | £199 + VAT |
| Additional Disk | £149 + VAT |
| 12" Monitor | £79 + VAT |
| 80 Column Card | £79 + VAT |
| Printer Interface | £79 + VAT |
| Epson RX80FT | £259 + VAT |
| **SYSTEM PRICE** | **£1199** + VAT |

## APPLE MACINTOSH

**"If you can point, you can use a Macintosh."**




- 68000 Processor
- 128K RAM
- Built-in 400K Disk
- Macwrite
- Macpaint
- Built-in high resolution screen

Macintosh with **FREE** Imagewriter **OR** External Drive **£1790** + VAT

## ACT APRICOT

Apricot PC from **£1390** + VAT including Monitor

Apricot Xi from **£2490** + VAT including Monitor



All Apricots come with BASIC Superwriter, Supercalc, Superplanner.

## ACORN BBC



BBC + 8 Program Tapes **£299** + VAT

BBC +DFS + 8 Tapes **£347** + VAT

**SYSTEM 1**
BBC + DFS
+ Disk Drive
**£449** + VAT

**SYSTEM 2**
BBC + DFS
+ Disk Drive
+ High Res. Monitor
+ Wordwise
**£549** + VAT

**SYSTEM 3**
BBC + DFS
+ Disk Drive
+ Monitor
+ Wordwise
+ Epson Printer
+ Box Diskettes
+ All Leads
**£799** + VAT

**SYSTEM 4**
BBC + DFS
+ Disk Drive
+ Monitor
+ Wordwise
+ Juki 6100 Daisy Wheel Printer
+ Box Diskettes
+ All Leads
**£899** + VAT

Maintenance Contracts available on BBC equipment. Phone for details.

## SANYO

| | |
|---|---|
| MBC 555 | £799 + VAT |
| 12" Monitor | £79 + VAT |
| Juki 6100 Printer | £349 + VAT |
| Box Diskettes | £20 + VAT |
| Lead | £20 + VAT |
| **PACKAGE** | **£1199** + VAT |



+ FREE Wordstar, Calcstar, Datastar, Mailmerge, BASIC

**COMPSHOP PRICE PROMISE** — We guarantee to match the price on equipment offered from stock through any other supplier.

Educational enquiries and orders welcome.

Quotations given.

One year warranty on all products.

COMPSHOP was established in 1978 and has continually offered the best in micro computers to discerning customers.

We sell only computers and peripherals, and therefore can offer the support many other shops cannot.

All prices quoted are exclusive of VAT.

COMP SHOP LTD

BARCLAYCARD VISA · Access We welcome Access · AMERICAN EXPRESS · DINERS CLUB INTERNATIONAL

14 Station Road, New Barnet, Hertfordshire, EN5 1QW
*(Close to New Barnet BR Station - Moorgate Line)*
Telephone: 01-441 2922 (Sales) 01-449 6596 Telex: 298755 TELCOM G
*OPEN (BARNET) - 10am - 7pm - Monday to Saturday*

# THOUGHTS & CROSSES

## 37 MARKET STREET, HECKMONDWIKE, WEST YORKS

### COMPUTERS

| | |
|---|---|
| Apricot F1E 128K + 315K disk drive | £625 |
| Apricot F1 256K + 720K disk drive + (with FREE software incl Superwriter, Supercalc, Superplanner) | POA |
| BBC Plus Microcomputer (includes DFS) | £499 |
| BBC Microcomputer Model B | £349 |
| BBC Model B with DFS | £399 |
| Acorn Electron (+ £40 FREE software) | £129 |
| ZX Spectrum 48K (+ £50 FREE software) | £99 |
| ZX Spectrum Plus 48K (+ £50 FREE software) | £129 |
| Memotech 512 | £265 |
| Commodore 64 (+ £50 FREE software) + cassette rec. | £189 |
| Apple IIe with 2 disk drives and controller | £985 |
| Amstrad CPC464 (green) + £100 FREE software | £239 |
| Amstrad CPC464 (colour monitor) + £100 FREE software | £349 |
| Amstrad CPC664 (col with disk drive) | £439 |
| Amstrad CPC664 (green with disk drive) | £329 |
| Sinclair QL | £359 |

### PRINTERS

| | |
|---|---|
| Canon PW1080A with NLQ (+ FREE printer lead) | £315 |
| Canon PW1080A (+FREE QL Interface) | £315 |
| Canon PW1156A with NLQ | £395 |
| Panasonic KX-P1091 with NLQ | £315 |
| Smith Corona D100 | £215 |
| Epson P40 | £95 |
| Epson RX80 | POA |
| Epson RX80 F/T | POA |
| Epson FX80 | POA |
| Epson FX100 | POA |
| Brother HR5 (Centronics or RS232) | £149 |
| Brother AC adaptor | £17 |
| Brother HR15 (Centronics or RS232) | £375 |
| Brother Cut-Sheet Feeder | £220 |
| Brother Keyboard | £150 |
| Brother EP44 | £235 |
| Brother 1009 (Centronics) | £185 |
| Juki 6100 (Centronics Daisy Wheel) | £350 |
| Juki 2200 (Typewriter Daisy Wheel Printer Cent/Ser) | £275 |
| Juki Tractor Feeder | £129 |
| Juki Sheeter Feeder | £220 |
| Daisy Step 2000 (Centronics Daisy Wheel) | £250 |
| Shinwa CPA80 (Centronics) | £205 |
| Shinwa CPA80 (RS232) | £235 |
| Mannesman Tally MT80 Plus (Centronics) | £199 |
| Shinwa CP80 (Centronics) | £195 |
| Commodore MPS 801 | £210 |
| Alphacom 32 (Spectrum/ZX81 model) | £69 |
| CCP 40 (4 colour Printer Plotter) | £105 |
| Uchida Daisy Wheel | £250 |
| Epson RS232 Interface | £29 |
| Epson RS232 Interface with 2K Buffer | £65 |
| Canon RS232 Interface | £80 |
| Shinwa RS232 Interface with 2K Buffer | £60 |
| Mannesman MT80 RS232 Interface | £25 |
| Mannesman MT80 2K Buffer | £10 |
| Juki RS232 Interface | £60 |
| Kempston Interface-E (rom) | £39.95 |
| Kempston Interface-S (cass) | £29.95 |
| Tasman Interface (cass) | £35 |
| QL Centronics | £30 |
| Atari Centronics Interface | £70 |
| Downsway Centronics Interface | £30 |
| Turbo Print GT Centronics Interface (supports CBM64 graphics) | £70 |
| IEEE to Centronics Interface for Commodore 4032/8096 | £70 |
| IBEK CBM64 to Parallel | £60 |
| Tripler Centronics for Commodore Vic 20/64 | £50 |
| Apple IIE Centronics (Aristocard) | £69 |
| Apple IIE Serial I | £69 |
| Electron Plus 1 | £58 |

### PRINTER RIBBONS

| | |
|---|---|
| Epson MX/FX/RX 80 | £4 |
| Epson MX/FX 100 | £8 |
| Seikosha GP100 | £4.50 |
| Seikosha GP80 | |
| Microline (group 66) | £2.30 |
| Anadex | £12.50 |
| MPS 801 | £6.50 |
| NEC 8023 | £7 |
| Canon PW1080A | £8 |
| Canon PW1156A | £8 |
| Epson 100 refill | £3.30 |
| Shinwa CP30/CPA80 | £6.50 |
| Mannesman Tally MT80 | £6.50 |
| Riteman A1 | £7 |
| Panasonic KX-P110 (MTX) | £9 |
| QUME MS | £4.30 |
| QUME nylon | £6.50 |
| Diablo MS | £5 |
| Diablo nylon | £4 |
| Diablo S/S | £3 |
| Juki 6100 SS | £2 |
| Juki 6100 MS | £5 |
| Brother EP44 | £2.30 |
| Brother HR5 | £2.99 |
| Brother M1009 | £3.80 |
| Brother singlestrike HR15/25 | £3 |
| Brother correctable HR15/25 | £3 |
| Brother multistrike HR15/25 | £6 |

Others available, please ask.
Print Wheels also available, please ask.

### PRINTER LEADS

| | |
|---|---|
| BBC Centronics printer lead | £10 |
| BBC Serial printer lead | £10 |
| Memotech Centronics printer lead | £10 |
| Dragon Centronics printer lead | £10 |
| Oric Centronics printer lead | £10 |
| Amstrad Centronics printer lead | £10 |
| Einstein Centronics printer lead | £10 |
| Wafadrive to Centronics lead — Spectrum | £10 |
| Spectrados to Centronics lead — Spectrum | £10 |
| ZX Interface 1 to RS232 'D' — Spectrum | £14.95 |
| QL to RS232 lead | £14.95 |
| Centronics to 25-way 'D' lead | £15 |
| Centronics to Centronics lead | £15 |
| RS232 'D' to RS232 'D' | £13.50 |

### PRINTER PAPER

| | |
|---|---|
| 1000 Sheets of continuous tractor feed paper | £9 |
| 1000 Single/Double tractor feed labels | £6.50 |
| Alphacom Roll (black) | £1.40 |

### MONITOR

| | |
|---|---|
| Microvitec 1431 MS (standard res. suitable for BBC etc) | £199 |
| Microvitec 1451 MS (medium res. suitable for BBC etc) | £290 |
| Microvitec 1431 MZ — Spectrum | £245 |
| Microvitec 1451 MQ — Sinclair QL | £250 |
| Microvitec 1451 APMS4 | £345 |
| Philips 7502 anti-glare green screen monitor (20MHz) | £78 |
| Commodore 1702 | £210 |
| Fidelity TV/Monitor | £210 |
| Fidelity CM14 | £179 |
| Fidelity QL Monitor (std res) | £199 |
| Amstrad Modulator | £30 |

### DISK DRIVES

| | |
|---|---|
| ZX Microdrive — Sinclair | £45 |
| ZX Interface 1 — Sinclair | £45 |
| ZX Expansion System (includes Microdrive/Interface 1/Tasword Two/Masterfile/Ant Attack/Games Designer) | £95 |
| Commodore 1541 + Easy-Script + 6 programs | £210 |
| Torch Disk Pack — Torch | £800 |
| Memotech (single) — Memotech | £410 |
| Memotech (dual) — Memotech | £800 |
| Amstrad 3" drive — Amstrad | £190 |
| Electron Plus 3 — Acorn | £210 |

### CUMANA

Single without PSU

| | |
|---|---|
| CSXL 100 100k 40T | £99 |
| CSX 100 100K 40T | £109 |
| CSX 200D 200K 40T DS | £129 |
| CSX 400 400K 40/80T DS | £149 |

### CUMANA

Single with PSU

| | |
|---|---|
| CS 100 100K 40T | £129 |
| CS 200D 200K 40T DS | £159 |
| CS 400 400K 40/80T DS | £179 |

### CUMANA

Twin drives with PSU

| | |
|---|---|
| CD 200 2 × 100K 40T | £249 |
| CD 400D 2 × 200K 40T DS | £299 |
| CD 800S 2 × 400K 40/80T DS | £329 |

### DISKETTES

Parrot, Wabash, 3M Scotch

| | |
|---|---|
| S/S S/D 40T 10 for | £16 |
| S/S D/D 40T 10 for | £16 |
| D/S D/D 40T 10 for | £20 |
| D/S D/D 80T 10 for | £26 |

Parrot diskettes include FREE library case

### DYSAN DISKETTES

| | |
|---|---|
| 104/1D S/S D/D 40T 10 for | £20 |
| 104/2D D/S D/D 40T 10 for | £29 |
| 204/2D D/S D/D 80T 10 for | £35 |
| 3" Maxell Diskettes — single | £4.50 |
| 3.5" Hewlett Packard — single | £4.50 |
| 3.5" Hewlett Packard — double | £5.50 |

### PVC COVERS

| | |
|---|---|
| Apricot F1 | £6.50 |
| BBC | £3.99 |
| Acorn Electron | £2.99 |
| BBC Cassette Recorder | £2.90 |
| ZX Spectrum | £1.99 |
| ZX Spectrum Plus | £2.99 |
| Saga Keyboard | £3.99 |
| Sinclair QL | £3.99 |
| VIC 20/64 | £2.99 |
| Dragon 32/64 | £3.99 |
| Memotech 512 | £3.99 |
| Amstrad CPC464 | £3.99 |
| Amstrad Monitor (green) | £3.99 |
| Amstrad Monitor (colour) | £4.80 |
| Philips Monitor | £4.30 |
| Microvitec 14" | £4.80 |
| Canon PW1080A | £4.80 |
| Epson FX80 | £4.80 |
| Epson RX80 F/T | £4.30 |
| Epson RX80 | £4.30 |
| Shinwa CP80 | £4.30 |
| Mannesman Tally MT80 | £4.30 |
| MPS 801 | £4.30 |
| Brother HR15 | £5.60 |
| Apple IIe | £4.50 |
| Apple IIe & Monitor | £5.75 |
| Seikosha GP80 | £3.50 |
| Seikosha GP100 | £3.75 |
| Juki 6100 | £5.60 |

Over 40 different covers available for various computers. Phone for availability and price.

### SPECTRUM PERIPHERALS

| | |
|---|---|
| Spectrados DDOS (disk drive prices as per BBC with PSU) | £89 |
| DK Light Pen | £18 |
| Datel Light Writer | £18 |
| Games Board | £3.95 |
| DK Spectrum Keyboard | £37 |
| DK 3 Channel Sound | £28 |
| Saga Keyboard | £45 |
| Microdrive Library Case | £5.95 |
| Extension to Keyway (ribbon) | £12 |
| Currah Microslot | £6.95 |
| Microdrive Extension Lead | £5 |
| Microdrive Cartridge | £1.99 |
| Pack of 4 Cartridges | £7.50 |
| Currah Microspeech | £22 |
| Datel Vox Box | £33 |
| 2 Wafa Cartridges (64K) | £7 |
| VTX 5000 Modem | £69 |

### COMMODORE PERIPHERALS

| | |
|---|---|
| Currah Microspeech | £22 |
| Datel Commversa | £18 |
| Music Maker | £28 |
| Modem 100 | £125 |
| CBM Modem | £80 |
| Simon's Basic | £45 |
| Disk Utilities | £13.50 |
| Wordcraft (cartridge) | £85 |
| VC20 RAM Pack (3K/16K switchable) | £32 |

### BBC PERIPHERALS

| | |
|---|---|
| Acorn DNFS 1.2 | £95 |
| Econet Upgrade | £45 |
| Opus DDOS Interface | £110 |
| LVL DDOS Interface | £110 |
| Wordwise (rom) | £40 |
| Wordwise Plus (rom) | £60 |
| Acorn Speech ROM | £54 |
| View 2 (rom) | £55 |
| View Printer Driver Generator | £8.95 |
| 6502 Second Processor | £199 |
| Z80 Second Processor + FREE Software | £367 |
| Music 500 | £189 |
| ROM Extension Board | £40 |
| AMX Mouse | £85 |
| Commstar (rom) | £27 |
| Modem | £69 |

### JOYSTICKS & INTERFACES

| | |
|---|---|
| Vulcan Joysticks (pair of proportional joysticks for the BBC) | £20 |
| Quickshot II Joystick | £11 |
| Sure Shot Joystick | £15 |
| Formula 1 Joystick | £16.95 |
| Formula 2 Joystick | £11 |
| Kempston Interface | £11 |
| DK Tronics Dual Port Interface | £12 |
| Datel Electronics Interface | £9 |
| Budd Interface (+ reset switch) | £12.95 |
| Cambridge Programmable Joystick + Interface + Program | £29 |
| DK Tronics Programmable Interface | £22 |

### BOOKS

| | |
|---|---|
| Sinclair QL Companion | £6.95 |
| Electron Advanced User Guide | £10 |
| Child's Guide to the Electron | £6.25 |
| Child's Guide to the Amstrad | £6.25 |
| Amstrad Advanced User Guide | £6.95 |
| BBC Basic Course (cass & book) | £13.50 |
| BBC Assembly Course (cass & book) | £13.50 |
| BBC User Guide | £15 |
| BBC Advanced User Guide | £15 |
| Graphs & Charts (BBC) | £9.95 |
| Creative Graphics (BBC) | £9.95 |
| Commodore Reference Manual | £10 |
| Memotech Games Book | £5.95 |
| Memotech Computing | £6.95 |
| Memotech Program Book | £5.95 |

### COMPUTER SOFTWARE

| | |
|---|---|
| Spectrum — Titles (approx) | 800 |
| Commodore 64 — Titles (approx) | 400 |
| Amstrad — Titles (approx) | 180 |
| Electron — Titles (approx) | 160 |
| BBC — Titles (approx) | 400 |

All our software is discounted by 10%. Please send for software lists.

### BBC

| Title | Company | RRP | Ours |
|---|---|---|---|
| Creative Graphics | Acornsoft | £9.95 | £ 8.95 |
| Database | Acornsoft | £11.90 | 10.70 |
| Database (disk) | Acornsoft | £15.35 | 13.85 |
| Graphs and Charts | Acornsoft | £9.95 | £ 8.95 |
| View Driver Gen. | Acornsoft | £9.95 | £ 8.95 |
| Viewsheet rom | Acornsoft | £59.95 | £55.00 |
| White Knight II | BBCSoft | £11.50 | £10.25 |
| Discmaster (disk) | Beebugsoft | £19.00 | £16.90 |
| Dumpmaster (disk) | Beebugsoft | £12.00 | £10.80 |
| Exmon | Beebugsoft | £29.00 | £15.99 |
| Help (rom) | Beebugsoft | £25.00 | £22.50 |
| Hershey Font (disk) | Beebugsoft | £15.00 | £13.50 |
| Murom (rom) | Beebugsoft | £29.00 | £26.90 |
| Paintbox II (disk) | Beebugsoft | £12.00 | £10.80 |
| Paintbox II | Beebugsoft | £10.00 | £9.00 |
| Sleuth (rom) | Beebugsoft | £29.00 | £26.90 |
| Spellcheck II (rom) | Beebugsoft | £31.00 | £27.90 |
| Sprite Utilities | Beebugsoft | £10.00 | £ 9.00 |
| Sprite Utilities (disk) | Beebugsoft | £12.00 | £10.80 |
| Starter Pack | Beebugsoft | £13.00 | £11.70 |
| Teletext Pack | Beebugsoft | £10.00 | £ 9.00 |
| Teletext Pack (disk) | Beebugsoft | £12.00 | £10.80 |
| Caretaker (rom) | Computer Concepts | £33.00 | £30.00 |
| Disk Doctor (rom) | Computer Concepts | £33.00 | £30.00 |
| Graphics (rom) | Computer Concepts | £33.00 | £30.00 |
| Gremlin (rom) | Computer Concepts | £33.00 | £30.00 |
| Printmaster (rom) | Computer Concepts | £33.00 | £30.00 |
| Wordwise (rom) | Computer Concepts | £45.00 | £40.00 |
| Beta-Base (disk) | Clares | £25.00 | £22.00 |
| Grafdisk (disk) | Clares | £12.90 | £11.50 |
| Grafkey | Clares | £ 8.99 | £ 8.00 |
| Replica II (disk) | Clares | £12.00 | £10.50 |
| The Key (disk) | Clares | £12.95 | £11.50 |
| Mini Office | Database | £ 5.95 | £ 5.35 |
| Cashbook Accounts | Gemini | £59.95 | £50.00 |
| Database | Gemini | £19.95 | £18.00 |
| Final Accounts | Gemini | £59.95 | £50.00 |
| Home Accounts | Gemini | £19.95 | £18.00 |
| Invoices & Statements | Gemini | £19.95 | £18.00 |
| Mailist | Gemini | £19.95 | £18.00 |
| Payroll | Gemini | £39.95 | £35.00 |
| Stock Control | Gemini | £19.95 | £18.00 |
| Word Processor | Gemini | £19.95 | £18.00 |
| Beginner's Assembler | Honeyfolds | £14.95 | £13.50 |
| Beginner's Basic | Honeyfolds | £14.95 | £13.50 |
| Editor:Printout:Library | Island Logic | £12.95 | £11.65 |
| Synthesiser:Keyboard: Library | Island Logic | £12.95 | £11.65 |
| The Music System (disc) | Island Logic | £24.95 | £22.00 |
| Basic Ext (rom) | Micropower | £19.95 | £17.95 |
| Machine Code Tutor | New Gen | £14.95 | £13.50 |
| VU-Calc | Psion | £14.95 | £ 6.00 |
| VU-File | Psion | £14.95 | £ 6.00 |
| Ed-Master | R. H. Electronics | £ 9.95 | £ 8.95 |
| Light Pen Graphics | R. H. Electronics | £ 9.95 | £ 8.95 |

### SPECTRUM

| Title | Company | RRP | Ours |
|---|---|---|---|
| System 15000 | AVS | £ 9.95 | £ 8.95 |
| Beta Basic | Betasoft | £11.00 | £ 9.90 |
| Masterfile | Campbell | £15.00 | £13.50 |
| Masterfile & MF Print | Campbell | £19.95 | £18.00 |
| Astronomer | CP Software | £ 9.95 | £ 8.95 |
| Extending Basic | CP Software | £ 9.95 | £ 8.95 |
| Floating Point Forth | CP Software | £14.95 | £13.50 |
| Supercode II | CP Software | £ 9.95 | £ 6.95 |
| Supercode III | CP Software | £12.95 | £11.65 |
| Leonardo | Creative | £ 7.95 | £ 7.15 |
| Money Manager | Creative | £ 6.95 | £ 6.25 |
| Mini Office | Database | £ 5.95 | £ 5.35 |
| The Illustrator | Gilsoft | £14.95 | £13.50 |
| The Quill | Gilsoft | £14.95 | £13.50 |
| C Compiler | Hisoft | £24.99 | £22.50 |
| Dev Pac 3 | Hisoft | £14.00 | £12.50 |
| Pascal | Hisoft | £25.00 | £22.50 |
| Ultrakit | Hisoft | £ 9.45 | £ 8.50 |
| Purchase Ledger | Kemp | £14.95 | 1/2 Price |
| Sales Ledger | Kemp | £14.95 | 1/2 Price |
| Stock Control | Kemp | £14.95 | £13.50 |
| Melbourne Draw | Microsphere | £ 8.95 | £ 8.00 |
| Omnicalc 2 | Microsphere | £14.95 | £13.50 |
| Machine Code Tutor | New Generation | £14.95 | £13.50 |
| Lightmagic | New Generation | £14.95 | £13.50 |
| Machine Lighting | Oasis | £19.95 | £17.95 |
| Spec Mac Mon | Oasis | £14.95 | £13.50 |
| White Lightning | Oasis | £14.95 | £13.50 |
| Address Manager Standard | OCP | £ 8.95 | £ 8.05 |
| Address Manager Plus 80 | OCP | £19.95 | £17.95 |
| Editor Assembler | OCP | £12.95 | £11.65 |
| Finance Manager Standard | OCP | £ 8.95 | £ 8.05 |
| Finance Manager Plus 80 | OCP | £19.95 | £17.95 |
| Machine Code Test Tool | OCP | £ 9.95 | £ 8.95 |
| Stock Manager Standard | OCP | £ 8.95 | £ 8.05 |
| Stock Manager Plus 80 | OCP | £19.95 | £17.95 |
| VAT Manager Standard | OCP | £ 8.95 | £ 8.05 |
| VAT Manager Plus 80 | OCP | £19.95 | £17.95 |
| Editor & Assembler | Picturesque | £ 8.50 | £ 7.65 |
| Spectrum Monitor | Picturesque | £ 7.50 | £ 6.75 |
| Paint Plus | Print 'n Plotter | £ 9.95 | £ 8.95 |
| Screen Machine | Print 'n Plotter | £ 8.25 | £ 7.40 |
| Trans Express (cass) | Romantic | £ 9.95 | £ 8.95 |
| Trans Express (m/d) | Romantic | £14.95 | £13.50 |
| Make A Chip | Sinclair | £ 9.95 | 1/2 Price |
| Musicmaster | Sinclair | £ 9.95 | 1/2 Price |
| Print Utilities | Sinclair | £ 9.95 | 1/2 Price |
| Small Business Accounts | Sinclair | £12.95 | 1/2 Price |
| VU Calc | Sinclair | £ 8.95 | 1/2 Price |
| VU File | Sinclair | £ 8.95 | 1/2 Price |
| VU 3D | Sinclair | £ 9.95 | 1/2 Price |
| Zeus Assembler | Sinclair | £12.95 | 1/2 Price |
| ZX Forth | Sinclair | £14.95 | 1/2 Price |
| Tascopy | Tasman | £ 9.90 | £ 8.90 |
| Tasmerge | Tasman | £10.90 | £ 9.80 |
| Tasprint | Tasman | £ 9.90 | £ 8.90 |
| Taswide | Tasman | £ 5.50 | £ 4.95 |
| Tasword II | Tasman | £13.90 | £12.50 |

### AMSTRAD

| Title | Company | RRP | Ours |
|---|---|---|---|
| Cash Planner & Forecaster | Abacus | £29.95 | £26.95 |
| Mailing List | Abacus | £29.95 | £26.95 |
| Payroll | Abacus | £29.95 | £26.95 |
| Purchase & Sales Ledger | Abacus | £29.95 | £26.95 |
| Basic Tutorial 1 | Amsoft | £19.95 | £17.95 |
| Complete Firmware | Amsoft | £19.95 | £17.95 |
| Complete OS | Amsoft | £24.95 | £22.50 |
| Decision Maker | Amsoft | £24.95 | £22.50 |
| Easi-Amscalc | Amsoft | £19.95 | £17.95 |
| Guide to Basic 1 | Amsoft | £19.95 | £17.95 |
| Guide to Basic 2 | Amsoft | £19.95 | £17.95 |
| Micropen (disk) | Amsoft | £49.95 | £44.95 |
| Microscript (disk) | Amsoft | £49.95 | £44.95 |
| Microspread | Amsoft | £49.95 | £44.95 |
| Project Planner | Amsoft | £24.95 | £22.50 |
| Screen Designer | Amsoft | £14.95 | £13.50 |
| Star Watcher | Amsoft | £19.95 | £17.95 |
| Mastercalc CPC464 | Campbell | £24.95 | £22.50 |
| Masterfile CPC464 | Campbell | £24.95 | £22.50 |
| Artist & Sprite Designer | CRL | £ 8.95 | £ 8.05 |
| Mini Office | Database | £ 5.95 | £ 5.35 |
| Masterfile 664 (D) | Campbell | £24.95 | £22.50 |
| Devpac | Hisoft | £24.95 | £22.50 |
| Font 464 | Hisoft | £ 7.95 | £ 7.15 |
| Pascal | Hisoft | £24.95 | £22.50 |
| Home Budget | Kuma | £19.95 | £17.95 |
| Logo | Kuma | £19.95 | £17.95 |
| Machine Code Tutor | New Generation | £14.95 | £13.50 |
| Assembler + Monitor | Picturesque | £19.95 | £17.95 |
| Easi-Amscalc | Saxon | £19.95 | £17.95 |
| Tascopy 464 | Tasman | £ 9.90 | £ 8.90 |
| Tasprint 464 | Tasman | £ 9.90 | £ 8.90 |
| Tasword 464 | Tasman | £19.95 | £17.95 |
| Tasword 664 (disk) | Tasman | £24.95 | £22.50 |

### COMMODORE 64

| Title | Company | RRP | Ours |
|---|---|---|---|
| Purchase/Sales Ledger | Abacus | £29.95 | £26.95 |
| Stock Control | Abacus | £17.95 | £16.25 |
| Music Studio | Activision | £14.99 | £13.50 |
| Music Studio disk | Activision | £19.99 | £17.99 |

**Tel: (0924) 402337 for General Enquiries.**

***ALL PRICES INCLUDE VAT + CARRIAGE***

**Shop open 9-5pm Mon-Sat; Mail Order 9-8pm Mon-Sat. Answerphone outside these hours.**

**Tel: (0924) 409753 for Credit Card Orders only.**

***EXPORT ORDERS WELCOME***

# BBC MICRO COMPUTER SYSTEM

**BBC Computers**

| | | | |
|---|---|---|---|
| Model B | £299 (a) | 6502 Second Processor | £175 (a) |
| Model B + NFS | £335 (a) | Acorn IEEE Interface | £280 (a) |
| Model B + DFS | £346 (a) | Z80 2nd Proc. + Software | £348 (a) |
| Model B + DFS + NFS | £399 (a) | Bitstick + graphics Software | £325 (a) |

**TORCH UNICORN PRODUCTS:**

ZEP100 Z80 Card with 64K Ram + Free Software Package ..... £275 (a)
ZDP240 Z80 Card with 2 × 400K Dual Drive + Software ..... £625 (a)
HDP68K + UNIX 68000 with Z80B & UNIX OS ..... £3495(a)
GS800 GRADUATE 8086 + 256K RAM + Dual Drive + Xchange Software ..... £925(a)

In addition to above we carry a very wide range of BBC firmware & software packages. Please write for further details.

# SANYO COMPUTER SYSTEM

SANYO's MBC 555 Series featuring 16 bit 8088 CPU with powerful MS-DOS operating system. 256K on board ram with a dual drive system offering 360K or 720K storage capacity. Detachable keyboard with 81 keys including 5 user definable function keys. RGB/Composite Video with hi res 640 × 200 8 colour display. Centronics port as standard. Supplied with Systems dics, Sanyo BASIC and utility software which includes Professional WORDStar, DATAStar, SUPERSORT and CALCStar.

SANYO MBC 555-2 360K Drive — £1099 (a+b)
SANYO MBC 555-2 720K Drive — £1199 (a+b)

FREE SANYO Hi Res GREEN SCREEN MONITOR WITH THE COMPUTER

# PRINTERS

## EPSON

RX80T **£210(a)** RX80FT **£220(a)** RX100 **£345(a)** FX80 **£315(a)** FX100 **£430(a)**
**JX80 Full Colour Printer £525(a)** H180 Plotter **£399(a)**
**KAGA TAXAN** NLQ Printers
KP810 **£225(a)** KP910 **£349(a)**

**DAISY WHEELS**
JUKI 6100 **£325(a)** BROTHER HR15 **£325(a)**

# PRINTER ACCESSORIES

## EPSON

Serial Interface: 8143 **£28(b);** 8148 with 2K buffer **£59(b).**
32K Parallel Buffer **£99(b)**

Paper Roll Holder **£17(b);**
FX80 tractor Attachment **£37(b)**
Ribbons: MX/RX/FX 80 **£5(c);** MX/RX/FX 100 **£10(c).**
Dust Covers: RX/FX 80 **£4.50(c);** RX/FX100 **£6.50(c).**
KAGA Serial I/face with 2K Buffer **£65(c)**
Ribbon **£6(c)**

JUKI Serial I/Face with 2K Buffer **£60(b);** Ribbon **£2.50(d).**
JUKI Sheet Feeder **£180(a);** Tractor Feed **£129(a).**
BROTHER HR15 Sheet Feeder **£199(a);** Tractor Feed **£99(a).**
2000 Fanfold sheets with extra fine perforations
9.5″ × 11″ **£13.50(b);** 14.5″ × 11″ **£17.50(b).**
Self Adhesive Labels 3½″ per 1000.
Single Row **£5.25(d);** Triple Row **£5(d).**
Parallel Leads: IBM **£18(c);** BBC **£7(c).**

# TECHNOLINE VIEWDATA SYSTEM

## Using 'Prestel' type protocols

For information and orders phone:
01-450 9764.
24 hour service, 7 days a week.

# MODEMS

## — All modems listed below are BT approved

**MIRACLE WS2000:**
The ultimate world standard modem covers all common BELL and CCITT standards up to 1200 Baud. Allows communication with virtually any computer system in the world. The optional AUTO DIAL and AUTO ANSWER boards enhance the considerable facilities already provided on the modem. Mains powered **£129(b).** Auto dial Board/Auto Answer Board **£30(c)** each awaiting BT approval. Software lead **£4.50.**

**BUZZ BOX:**
This pocket sized modem complies with V21 300/300 Baud and provides an ideal solution for communications between users, with main frame computers and bulletin boards at a very economic cost. Battery or mains operated, **£62(c).** Mains adaptor **£8(d).**

BBC to Modem data lead **£7.**

# EPROM PROGRAMMERS

Industrial Programmer P8000 ..... £695(a)
Industrial Prod. Programmer P9010 ..... £795(a)
Industrial Prod. Programmer P9020 ..... £995(a)
Industrial Prod. Programmer P9030 ..... £1295(a)
GANG OF EIGHT PRODUCTION POROGRAMMER ..... £395(a)

**UV ERASERS:**

UV1B 6 Eprons ..... £47(b)
UV1T with timer 6 Eproms ..... £59(b)
UV140 14 Eproms ..... £71(b)
UV141 with timer 14 Eproms ..... £88(b)

**ALL PRICES EXCLUDE VAT**
*Please add carriage 50p unless indicated as follows*
*(a)* **£8** *(b)* **£2.50** *(c)* **£1.50** *(d)* **£1.00**

**We also stock a full range of TTLs CMOS, CPU's, RAMs, EPROMS.**
Please write for our catalogue.

# DISC DRIVES

BBC compatible disc drives, fully cased and supplied complete with cables, manual and formatting disc for operation with the BBC micro. These drives can operate in both single and double density modes and are suitable for use with any micro with Shuggart A400 interface. Mechanisms available separately.

| | | |
|---|---|---|
| **Single Drives:** | | |
| 1 × 100K 40T SS | TS100 **£85(b)** | PS100 with psu **£125(b)** |
| 1 × 400K 80/40T DS | TS400 **£125(b)** | PS400 with psu **£149(b)** |
| **Dual Drives: Stacked Version:** | | |
| 2 × 100K 40T SS | TD200 **£175(a)** | PD200 with psu **£200(a)** |
| 2 × 400K 80/40 DS | TD800 **£250(a)** | PD800 with psu **£290(a)** |
| **Plinth Version:** | | |
| 2 × 40T 100K SS | TD200P **£195(a)** | PD200P with psu **£200(a)** |
| 2 × 400K 80T DS | TD800P **£265(a)** | PD800P with psu **£305(a)** |

## 3M FLOPPY DISCS

**Authorised Distributor**
**Data Recording Products**
Industry standard high quality discs with guaranteed error free performance for life.
Discs in packs of 10:
40T SSDD **£13(c)** — 40T DSDD **£18(c)**
80T SSDD **£22(c)** — 80T DSDD **£24(c)**

# MONITORS

All monitors supplied with BBC lead

**MICROVITEC 14″ RGB**
1431 Standard Resolution ..... £185(a)
1451 Medium Resolution ..... £240(a)
1441 Hi Resolution ..... £389(a)

**MICROVITEC 14″ RGB with PAL & Audio**
1431 AP Standard Resolution ..... £205(a)
1451 AP Medium Resolution ..... £280(a)

**KAGA TAXAN 12″ RGB**
VISION II Hi Res ..... £225(a)
VISION III Super Hi Res ..... £325(a)

**MONOCHROME MONITORS:**
SANYO DM8112CX Hi Res 12″ Green Screen ..... £90(a)
KAGA KX1201G Hi Res 12″ Etched Green Screen ..... £99(a)
KAGA KX1202A Hi Res 12″ Etched Amber Screen ..... £105(a)
ZENITH 123 Hi Res 12″ Green Screen £70(a)
ZENITH 122 Hi Res 12″ Amber Screen £70(a)

# DRIVE ACCESSORIES

FLOPPICLENE Disc Head Cleaning Kit with 20 disposable cleaning discs ensures continued optimum performance of the drives ..... £14.50(c)

Single Disc Cable ..... £6(d)
10 Disc Library Case ..... £1.80(d)
40 Disc Lockable Box ..... £14(c)
Dual Disc Cable ..... £8.50(c)
30 Disc Storage Box ..... £6(c)
100 Disc Lockable Box ..... £19(b)

# PRINTER SHARER/BUFFER

A unique printer sharer/buffer that provides a simple way to improve the utilisation of the installed equipment by reducing the waiting time for printing documents.

* STANDARD Centronics interface with 3 inputs
* EACH input port scanned every 5 secs to check for data. Switching between ports completely automatic.
* Data input rate 4800 bytes/sec
* LED Bargraph indicates percentage memory used.
* COPY key allows current document to be reprinted.
* Internal check to prove the data integrity.
* PAUSE switch allows printing to be stopped temporarily to allow paper change, adjust form feed etc. or allows temporary storage for large number of small files which can all be printed together.
* RESET allows all buffer memory to be cleared without having to hard break on the computer.

* 64K buffer capacity. * Mains powered * Compact 7cm × 17cm × 24cm

TSB 64 Buffer/Sharer **£205(a)**
Cable Set **£30**

# PRINTER/COMPUTER SHARERS

Three computers to one printer (Centronics — 26 pin) **£65(b)**
External power pack **£6.50**
Cable Set (ea 1m long) **£25(d)**
Three computers to one printer (Serial) **£75(b)**

# CONNECTOR SYSTEMS

## I D CONNECTORS

| | Headers | Receptacles | Edge Conns | Grey Cable/m |
|---|---|---|---|---|
| 10 Way | 90p | 85p | 120p | 40p |
| 20 Way | 145p | 125p | 195p | 85p |
| 26 Way | 175p | 150p | 240p | 120p |
| 34 Way | 200p | 160p | 320p | 160p |
| 40 Way | 220p | 190p | 340p | 180p |
| 50 Way | 235p | 200p | 390p | 200p |

## RS 232 JUMPER LEADS WITH 25 WAY CONNECTORS

24″ Single end Male ..... £5.00
24″ Single end Female ..... £5.25
24″ Male to Male ..... £8.25
24″ Female to Female ..... £9.50
24″ Male to Female ..... £9.00

*Other lengths available*

## TEXTOOL ZIF SOCKETS

24 pin ..... £7.50
28 pin ..... £9
40 pin ..... £12

## GENDER CHANGERS

*25 Way D type*
Male to Male ..... £10
Female to Female ..... £10
Male to Female ..... £10

## AMPHENOL CONNECTORS

| | Solder | IDC |
|---|---|---|
| 36 Way Centronics Plug | 500p | 475p |
| 36 Way Centronics Socket | 550p | 500p |
| 24 Way IEEE Plug | 475p | 475p |
| 24 Way IEEE Socket | 500p | 500p |

PCB Mtg Skt
Ang. Pin 36 Way 750p 24 Way 700p

## D CONNECTORS

| | No of Ways 9 | 15 | 25 | 37 |
|---|---|---|---|---|
| *Male* | | | | |
| Solder | 60p | 85p | 125p | 170p |
| Angled Pins | 120p | 180p | 240p | 350p |
| IDC | 175p | 275p | 325p | — |
| *Female* | | | | |
| Solder | 90p | 130p | 195p | 290p |
| Angled Pins | 160p | 210p | 290p | 440p |
| IDC | 195p | 325p | 375p | — |
| Hoods | 90p | 95p | 100p | 120p |
| Screwlock Hood | 130p | 150p | 175p | — |

# TECHNOMATIC LTD

**MAIL ORDERS TO: 17 BURNLEY ROAD, LONDON NW10 1ED**
**SHOPS AT: 17 BURNLEY ROAD, LONDON NW10**
**(Tel: 01-208 1177 (4 lines) Telex: 922800)**
**305 EDGWARE ROAD, LONDON W2**

**PLEASE ADD 50p p&p & 15% VAT**
(Export: no VAT, p&P at Cost)
Orders from Government Depts. & Colleges etc. welcome.
Minimum Telephone Order £5.
Detailed Price List on request.
Stock items are normally by return of post.

# WEST ONE GALAXY

## BUSINESS SYSTEMS LTD

**230 Tottenham Court Road, London W1P 9AE.**
**Telephone: 01-636 7142/4102**

Looking for a business system?
Let us help you.
Come to the first floor for expert advice and unbeatable price.




### apricot XI10 WITH 10MB WINCHESTER ONLY £2195 + VAT!

**PLUS**

Apricot PC
Dual Drive
Double sided 720K
**£1495 + VAT**



INTEGRATED ACCOUNTS PACKAGE

- *FREE* Invoicing
- *FREE* Stock Control
- *FREE* Sales Ledger
- *FREE* Purchase Ledger
- *FREE* Nominal Ledger
- *FREE* Payroll
- *FREE* Mailing List

### SPECIAL

**IBM COMPATIBLE SANYO 550.**

IBM COMPATIBLE 550

Features dual 360K disk drive, 256K Ram.
Full IBM Colour Grahpics, (including IBM Compatible Video Board and GW Basic).
MSDOS 2.11. Wordstar and Calcstar.
FREE Hi-Res Green Monitor
Runs Lotus 123 etc

**£895 + VAT**

Limited stock.
Offer applicable only while stocks last.




### SANYO 550 WITH 2×800KB FLOPPY DISC ONLY £795 + VAT!

**PLUS**

Includes 256K Ram and MSDOS 2.11

- *FREE* Monitor (Philips V7001)
- *FREE* Wordprocessor (Wordstar)
- *FREE* Spreadsheet (Calcstar)

**Special Summer Prices**

### GALAXY BARGAINS

SANYO with 10MB Winchester 360K floppy, 256K Ram, MSDOS 2.11, Wordstar & Calcstar and Monochrome Monitor
**£1495** + VAT

SANYO 775/10MX SPECIAL OFFER

The portable Sanyo with 10MB Winchester disk.

Twin 360K floppies, 256K Ram, MSDOS 2.11, Integral 9 train, FREE SOFTWARE, FREE COLOUR PRINTER
**£2495** + VAT

**TRAINING CAN BE PROVIDED ON ALL SYSTEMS SUPPLIED**

**We also stock a wide range of Printers, Monitors, Disc Drives and Software Packages, plus many other Computer Systems at bargain prices.**

**1 YEAR WARRANTY & MAINTENANCE CONTRACTS AVAILABLE**

OPENING HOURS MON-SAT 9AM-6PM

MAIL ORDERS TO: West One Galaxy Business Systems Ltd.
230 Tottenham Court Road, London, W1.
Cheques payable to: West One Galaxy Business Systems Ltd.

# Space-saving furniture at accommodating prices

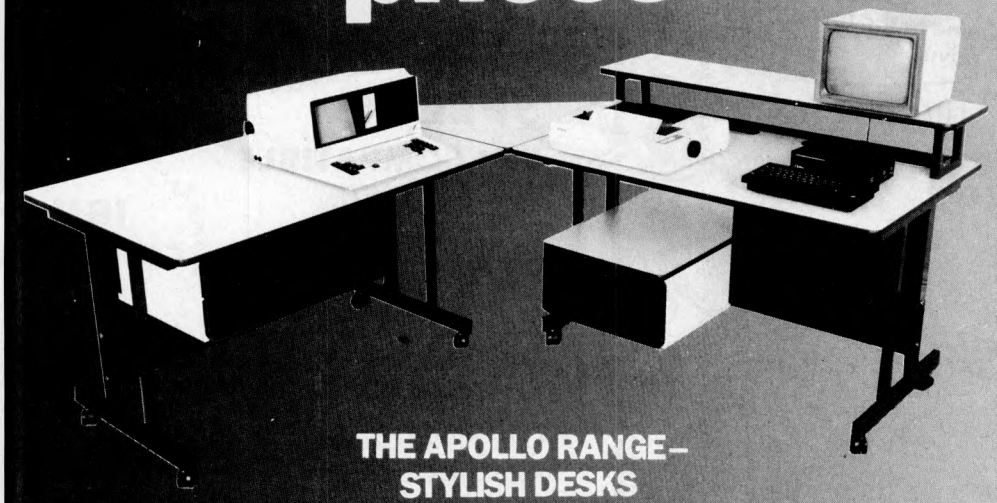

THE APOLLO RANGE–
STYLISH DESKS
TO SAVE YOU SPACE AND MONEY.

The Apollo business desk range from Opus Supplies brings a little high-style into the hi-tech age. But, with prices that start at only £100, these are desks designed to suit your computer system and your pocket.

Smart, modern, appearance combined with robust construction and practical styling ensures that Apollo desks will fit into any working environment; office or laboratory, classroom or sales area.

Sturdy steel underframes support shelving with scratch-resistant surfaces. The top shelf has sufficient room for a monitor and printer while below the lower desk top will accommodate your computer, hard or floppy disc drive and software.

You can choose left or right handed drawers for extra storage and all Apollo desk units are equipped with lockable castors.

Generous dealer, government and education discounts are available.

To: Opus Supplies Limited, 55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.

Please send details and brochure of the Apollo business desk range ☐ (please tick)

or please send me the address of your nearest stockists ☐ (please tick)

Name_____

Address_____

_____

Telephone_____

Opus. Opus Supplies Ltd. 55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey. TELEPHONE: 0737-65080

# ALL-TIME CP/M MICROCOMPUTER SYSTEM BARGAIN!

*Fantastic bulk purchase of a major European manufacturer's entire stock of this top-quality machine enables us to retail it at far below its manufacturing cost.* ***ALL FEATURES LISTED*** *are* ***INCLUDED*** *as* ***STANDARD:***



- COMPLETE with EITHER single or double (as illustrated) TEAC half-height 5¼" double-sided, double-density floppy disc drives. Formatted capacity: 320Kb per drive.
- 4 MHz Z80A CPU
- 64Kb RAM (in 4164 chips)
- 28Kb EPROM containing monitor & MICROSOFT BASIC
- CP/M Version 3.01
- 80 × 24 display with colour block-mode graphics
- Exceptionally high quality styled keyboard with numeric keypad & 6 function keys
- Centronics parallel interface
- RS232/V24 serial interface selectable 300-9600 Baud
- UHF Modulator for TV & composite video output
- ROM port. (A Word-Processor ROM is available at extra cost)
- 6 month full guarantee & option to return within 14 days if not absolutely delighted

**PRICES** (monitor not included): With DUAL floppy: **£347.00** (**£399.05** incl. VAT) With SINGLE floppy: **£250.00** (**£287.50** incl. VAT)
CARRIAGE: **£9.50** (incl. VAT) Visa & Barclaycard accepted VISA

Available ONLY from:
**COMPUTER APPRECIATION,** 16 Walton Street, Oxford OX1 2HQ. (0865) 55163 TELEX: 838750
**MATMOS Ltd.,** 1 Church Street, Cuckfield, W. Sussex RH17 5JZ. (0444) 414484 454377 (0444) 73830

# SPEEDIT WITH BASIC

A revolutionary new productivity tool for developing programs in Basic.

SpeedIt has two components:

A flowback EDITOR which creates and maintains program files.

A BASIC language TRANSLATOR.

Features include:

- ★ Creates a structured, well defined specification using flowbacks.
- ★ User friendly and cost effective.
- ★ Full screen editor with cursor-controlled colour within active flowbacks.
- ★ Help facility.
- ★ Flowback specification file can be printed.

**MINIMUM SYSTEM REQUIREMENTS**

IBM PC/XT or equivalent, 256K RAM, one floppy disk drive, colour graphics card, RGB monitor. Hard disk recommended. Needs PCDOS, M5DOS or Concurrent DOS.

**COST:** Only **£99** + **VAT** for the full SPEEDIT system and **£29** + **VAT** for the demonstration version.

One day conversion courses commence in the autumn at the RAC, Pall Mall, London. These courses include full SPEEDIT system package plus buffet lunch, exclusive use of a PC by each delegate, professional computer staff. Cost is £210 plus VAT. Book early to avoid disappointment.

*Send to:* R. H. Jones, LAMNIA, 49 Normanton Avenue, London SW19 8BA.
Tel: 01-946 4108

## *SpeedIt* Summary

### WITHIN A FLOWBLOCK

**Cursor Movements**

| | | | |
|---|---|---|---|
| **^S** | Char Left | **^D** | Char Right |
| **^A** | Word Left | **^F** | Word Right |
| **^E** | Line Up | **^X** | Line Down |
| **Home** | Block Up | **End** | Block Down |
| **^F1** | Block Left | **^F2** | Block Right |

**Scrolling Actions**

| | | | |
|---|---|---|---|
| **^Z** | Line Down | **PgDn** | Page Down |
| **^W** | Line Up | **PgUp** | Page Up |
| **^C** | Page Down | **^R** | Page Up |

| **Delete** | | **Miscellaneous** | |
|---|---|---|---|
| **^G** | Char | **^L** | Line Ruleoff |
| **Del** | Char Left | **^O** | Open Comment |
| **^T** | Word Right | **^** | New Comment |
| **^Y** | Line | **^V** | Insert Tog. |
| **^U** | Undo | **^Q** | Find/replace |
| | | **^J** | Short Help |

**Function Keys**

| | |
|---|---|
| **F1** | Call up main Help System |
| **F2** | Create a WHILE block |
| **F3** | Create a (Basic) FOR block |
| **F4** | Create IF-THEN block |
| **F5** | Create IF-THEN-ELSE block |
| **F6** | Create a CASE block |
| **F7** | Reserved |
| **F8** | Create a GOSUB statement |
| **F9** | Reserved |
| **F10** | Reserved |

### WITHIN THE PROGRAM

| **Detaching** | | **Traversing** | |
|---|---|---|---|
| **^B** | Block | **Alt B** | Beginning |
| **^P** | Pile | **Alt E** | Ending |
| | | **Alt N** | Next Module |
| | Attaching | **Alt L** | Last Module |
| **Alt A** | Replace a GOSUB | **Alt I** | Ins Module |
| | | **Alt K** | Kill Module |

**Range Operations**

| | |
|---|---|
| **^KR** | Read named disk file (.SPT) |
| **^KW** | Write (.SPT) file |
| **^KS** | Save program and continue |
| **^KX** | Save program and exit to DOS |
| **^KQ** | Quit. Abandon edit session |
| **Alt D** | Display module names |
| **Alt P** | Print flowblocks |
| **Alt R** | Rename a flowblock |
| **Alt Q** | (Same as ^KQ) |

### Invoking SpeedIt

SpeedIt has two components: a flowblock editor (SP.EXE) and a Basic language translator (XLATE.EXE). The editor creates and maintains program files (which have the file extension SPT). XLATE translates SPT files into Basic source files with the BAS file extension. Both SP and XLATE are invoked with a single file name parameter (no extension), eg >SP UPDATE. The .SPT extension is always assumed.

Dates: September 25, 26, 27
October 14, 15, 16, 17, 21, 22, 23, 24
November 7, 8, 14, 15, 28, 29

Please indicate preferred dates to help our scheduling.

Name(s): .....

Company: .....

Address .....

.....

Tel: .....

Please send details of above courses.

Please contact me regarding demonstration/ purchase of SPEEDIT.

C/WP

## TRAINING SERVICES

■ Courses ■ Workshops ■ Surveys
■ Consultancy

**Courses available to the end of July:**

| | |
|---|---|
| June 21, July 12 | Lotus 1.2.3 Beginners. |
| June 25, July 31 | Getting started with the IBM PC (half day £60) |
| June 26 | DisplayWrite2 – Mailshots, Columns, Tables. |
| July 2, 30 | dBase III with emphasis on customer records. |
| July 3 | Mastering MailMerge (for WordStar users). |
| July 4 | Lotus 1.2.3 – Macros, Tables, Look-Up and other more advanced functions. |
| July 5 | Delta – Setting-up a record keeping system. |
| July 9 | WordStar 2000 Beginners. |
| July 10 | The Barefoot Engineer – a technical course for all practical people. Configuring hardware, software and options for the PC/XT. Diagnostics. |
| July 16 | Cashflow planning using Lotus 1.2.3. |
| July 17 | Technicians Course – Emphasis on PC/XT hardware for those with access to workshop tools. (£125) |
| July 18 | The whole picture – business graphics on screen and 35mm slides – via Polaroid Palette. |
| July 19 | WordStar 2000 – the more advanced features. |
| July 24 | DisplayWrite2 Beginners. |
| July 23 | Lotus 1.2.3 Users workshop. Bring your project. Tuition, consulting and group interaction. |

All Courses one day duration at a cost of £105 plus VAT, except as stated. All at Willow House (near Victoria station).

## C/WP COMPUTERS

Willow House Willow Place London SW1P 1JH Telephone: 01-828 9000



### DOT MATRIX

EPSON RX80 (illus.) **£221** inc. VAT



EPSON RX80 F/T Plus. **£255** inc. VAT

| | | | |
|---|---|---|---|
| Epson RX80 | £192.17 | + VAT | = £221 |
| Epson RX80 F/T Plus | £221.74 | + VAT | = £255 |
| Epson LX80 (with HLQ) | P.O.A. | | |
| Epson FX80 | £329.57 | + VAT | = £379 |
| Epson FX100 (132 col. width) | £511.30 | + VAT | = £588 |
| KDC FT5001 (Epson Compatible) | £164.35 | + VAT | = £189 |
| Kaga Taxan 810 (NLQ) | £277.39 | + VAT | = £319 |
| Kaga Taxan 910 (NLQ 132 col.) | £346.96 | + VAT | = £399 |
| RS232 Interfaces from | £27.83 | + VAT | = £32 |
| Printer cables (2 metres) | £13.04 | + VAT | = £15 |

### DAISYWHEEL



| | | | |
|---|---|---|---|
| Brother HR 15 | £323.48 | + VAT | = £372 |
| Juki 6100 | £329.57 | + VAT | = £379 |
| Daisystep 2000 | £230.43 | + VAT | = £265 |
| Uchida DWX-305 | £226.09 | + VAT | = £260 |

### PROCESSORS

| | | | |
|---|---|---|---|
| BBC Model B | POA | | |
| BBC B with DFS | POA | | |
| Amstrad CPC464 | £157.39 | + VAT | = £181 |
| Acorn Z80 Ext. Processor | £338.00 | + VAT | = £389 |
| Apricot F1 Plus Mono Monitor Plus Software pack | £1126.00 | + VAT | = £1295 |
| Apricot PC Twin 315K disks | £1300 | + VAT | = £1495 |
| Apricot PC Twin 720K disks | £1465 | + VAT | = £1685 |
| DEC 11/23 + 40Mb | £6086.96 | + VAT | = £7000 |
| DEC 11/73 + 170MB | £10434.78 | + VAT | = £12000 |
| Opus disk drives from ... | £86.09 | + VAT | = £99 |
| WS2000 modem inc. cable | £129.57 | + VAT | = £149 |

PHONE FOR OUR QUOTATION ON BESPOKE ACCOUNTING SOFTWARE INVOICING/LEDGERS/PAYROLL

### colour MONITORS



MICROVITEC 1451 QL Medium Res **£265** inc. VAT

| | | | |
|---|---|---|---|
| Amstrad CTM640 | £146.96 | + VAT | = £169 |
| Microvitec 1451 QL | £226.10 | + VAT | = £260 |
| Microvitec 1451 BBC | £239.13 | + VAT | = £275 |
| 1451 RGB/PAL/AUDIO | £286.96 | + VAT | = £330 |
| Microvitec 1441 (High Res. BBC) | £395.65 | + VAT | = £455 |
| Taxan Kaga Vision III (BBC/APPLE/IBM) | £326.09 | + VAT | = £375 |

### mono MONITORS

| | | | |
|---|---|---|---|
| Sanyo DM8112 ex (18MHz) | £88.69 | + VAT | = £102 |
| Zenith 12" (15MHz Green) | £66.96 | + VAT | = £77 |
| Zenith 12" (15MHz Amber) | £77.39 | + VAT | = £89 |
| ISL 20 Swivel 80 col. (20MHz tilt + swivel base) | £68.70 | + VAT | = £79 |

**micro FAST**

**The Experts**
57 Hoxton Square London N1

**01-729 1778**

Prices are correct at time of going to press
Access and Visa welcome
Open Mon - Sat 9am to 6pm

MAIL ORDER:
Carriage: Printers and Monitors £10
Phone Orders welcome






SOFTSEL®

**It's available from your local Softsel dealer.**

ADELPHI BUSINESS COMPUTERS LTD.
25 TRINITY STREET, COVENTRY,
WEST MIDLANDS CV1 1FJ. TEL: (0203) 553944.

ADVANCED MICRO PRODUCTS
200 COURT ROAD, ELTHAM,
LONDON SE9 4EW. TEL: (01) 851 3311.

COLIN GRACE ASSOCIATES LTD.
CLIFTON MEWS, 62 HIGH STREET,
SAFFRON WALDEN, ESSEX CB10 1EE.
TEL: (0799) 22532.

COMPUTER CITY
78 VICTORIA ROAD, WIDNES,
CHESHIRE WA8 7RA. TEL:( (051) 420 3333.

DEVERILL COMPUTER SERVICES LTD.
ITEC HOUSE, 34-40 WEST STREET,
POOLE, DORSET BH15 1LA. TEL: (0202) 684441.

FAIRHURST INSTRUMENTS LTD.
WOODFORD ROAD, WILMSLOW
CHESHIRE SK9 2L. TEL: (062) 5533741.

GATE MICROSYSTEMS LTD.
ABBEY HOUSE, 10 BOTHWELL STREET,
GLASGOW, STRATHCLYDE G2 6NU.
TEL: (041) 221 9372.

MBS DATA EFFICIENCY,
MAXTED ROAD, HEMEL HEMPSTEAD,
HERTS HP2 7EL. TEL: (0442) 60155.

PACE SOFTWARE SUPPLIES
92 NEW CROSS STREET, BRADFORD,
W. YORKS. TEL: (0274) 729306.

PERSONAL COMPUTERS LTD.
220-226 BISHOPSGATE,
LONDON EC2M 4JS. TEL: (01) 377 1200.

PROGRAMS UNLIMITED
19 IMPERIAL HOUSE, KINGSWAY,
LONDON WC1. TEL: (01) 240 9006.

RAVEN COMPUTERS
28-32 CHEAPSIDE, BRADFORD,
YORKS BD1 4JA. TEL: (0274) 309386.

STIRLING MICROSYSTEMS,
1 PARK ROAD,
LONDON NW1 6XE. TEL: (01) 486 7671.

TASHA BUSINESS SYSTEMS
191 KENSINGTON HIGH STREET,
LONDON W8. TEL: (01) 937 7896.

THAMES VALLEY SYSTEMS
GREYS HOUSE, 7 GREYFRIARS ROAD,
READING, BERKS RG1 1NU. TEL: (0734) 581829.

UNITED SUMLOCK LTD.
36 KING STREET, BRISTOL,
AVON BS1 4DZ. TEL: (0272) 276685.

MusicWorks™

HAYDEN SOFTWARE

"THE PHOTO SOURCE"



# Make it big with Musicworks.™

They had everything going for them. Good looks, determination and a great image.

But one thing stood between the Sydney Saunders Skiffle Duo and success in the music business. Talent.

But blessed with a good ear for a winner, Sydney laid out a few notes for Musicworks. A major development from Hayden Software.

## FOR BUDDING HOLLIES EVERYWHERE

Even if you can't read a note, Musicworks enables you to compose music directly on your Apple Macintosh,™ and hear the results instantly.

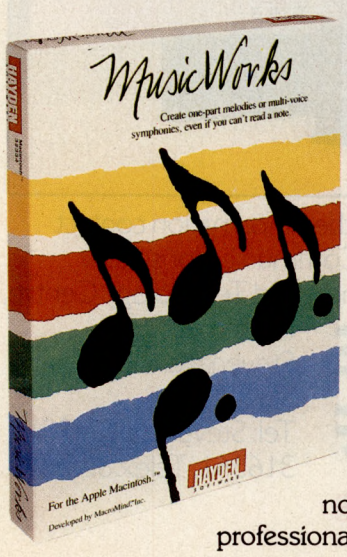


You compose on a seven-and-a-half octave grid. Just like the keys on a piano. As you put down your notes you hear them. All in the click of a mouse.

When you've got your latest masterpiece sounding just right, Musicworks transforms it into a musical staff, inserts the right notation and prints it in a professional format which any musician can follow. Even Sydney.

Now he can drum up any tune he likes. Change and edit notes. And then play back the whole melody whenever he wants.

## THE FAB FOUR

Another feature that Sydney likes to harp on about is Musicworks' built-in instrument selection.

Use up to four at a time from a total of 10 or listen to each one selectively. Musicworks also comes complete with templates which guide you through playing classical and popular selections.

It's available from your local Softsel dealer. Along with over 2,600 other titles from over 250 publishers.

However there's still one slight hitch in Sydney's rise to stardom. He's been charged under the Trade Descriptions Act over the name of his latest album – "Sydney Saunders Entertains".

Musicworks – A sound investment.

SOFTSEL®

**The number one distributor of software. In the world.**

Softsel Computer Products Ltd, Softsel House, Syon Gate Way, Great West Road, Brentford, Middlesex TW8 9DD.

MUSICWORKS IS A TRADEMARK OF MACROMIND INC. MACINTOSH IS A TRADEMARK OF APPLE COMPUTERS INC.

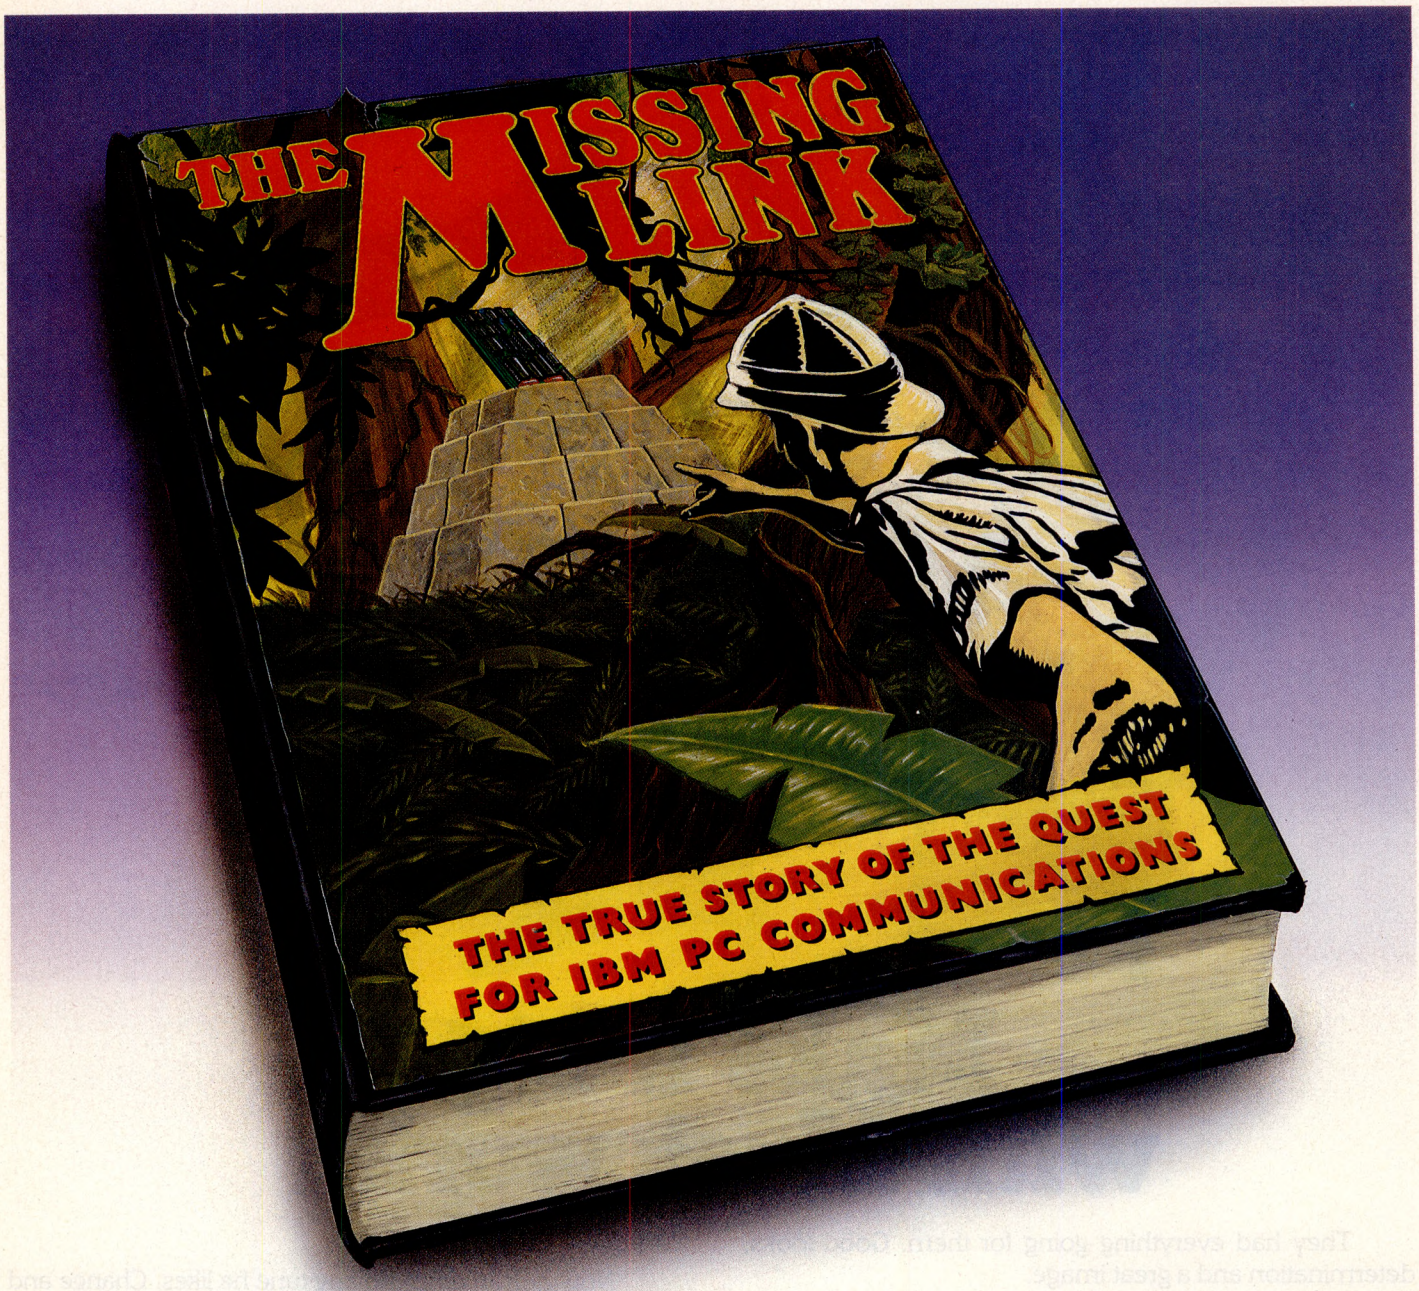


# The search is over.

At last, the only complete, BABT approved communication's package for IBM®PC, XT, AT and compatible micros. 'The Missing Link' is an internal modem which comes complete with a menu driven software package allowing auto-dial/auto-answer access to private and public VIEWDATA and DATEL services such as PRESTEL®, TELECOM GOLD®, PSS, ONE TO ONE and many more.




APPROVED for use with telecommunication systems run by British Telecommunications in accordance with the conditions in the instructions for use.

The British designed ⅔ size card plugs into any of the expansion slots and offers CCITT V.21 300/300 and V.23 1200/75, 75/1200 full duplex with selectable error detection and correction protocols.

The Missing Link is available from Jaguar Communications (0727 32983), Interface (0256 461191), K.P.G. Hardware (01 995 3573), First Computer (01 499 3046), and IBM Dealers at a price of £499+ VAT.




For further information contact PC Communications Ltd., Business and Technology Centre, Bessemer Drive, Stevenage, Herts. SG1 2DX. Tel: Stevenage (0438) 316561. Telex 825824

PC COMMUNICATIONS

IBM is a registered trademark of International Business Machines.
Prestel and Telecom Gold are trademarks of British Telecommunications.

# Lotus Jazz. Now the Mac's really in business.




Jazz is a stunning new 5-in-1 package, created by Lotus especially for the Macintosh.

Just imagine. All the power of Lotus software, with the accessibility of the Mac.

Adding up to one thing. Unbeatable computing power for every business.

Call First Software today for your nearest Lotus Jazz dealer.

**FIRST SOFTWARE**

**DISTRIBUTOR OF THE WORLD'S LEADING SOFTWARE**

First Software, Intec-1, Wade Road, Basingstoke, Hants, RG24 0NE.
Tel: 0256 463344. Telex: 859030 FIRSTG

Lotus, Jazz are trademarks of Lotus Development Corporation
Macintosh is a trademark licensed to Apple Computer Inc.

TABS
Business Centres

# One stop. accounting software...

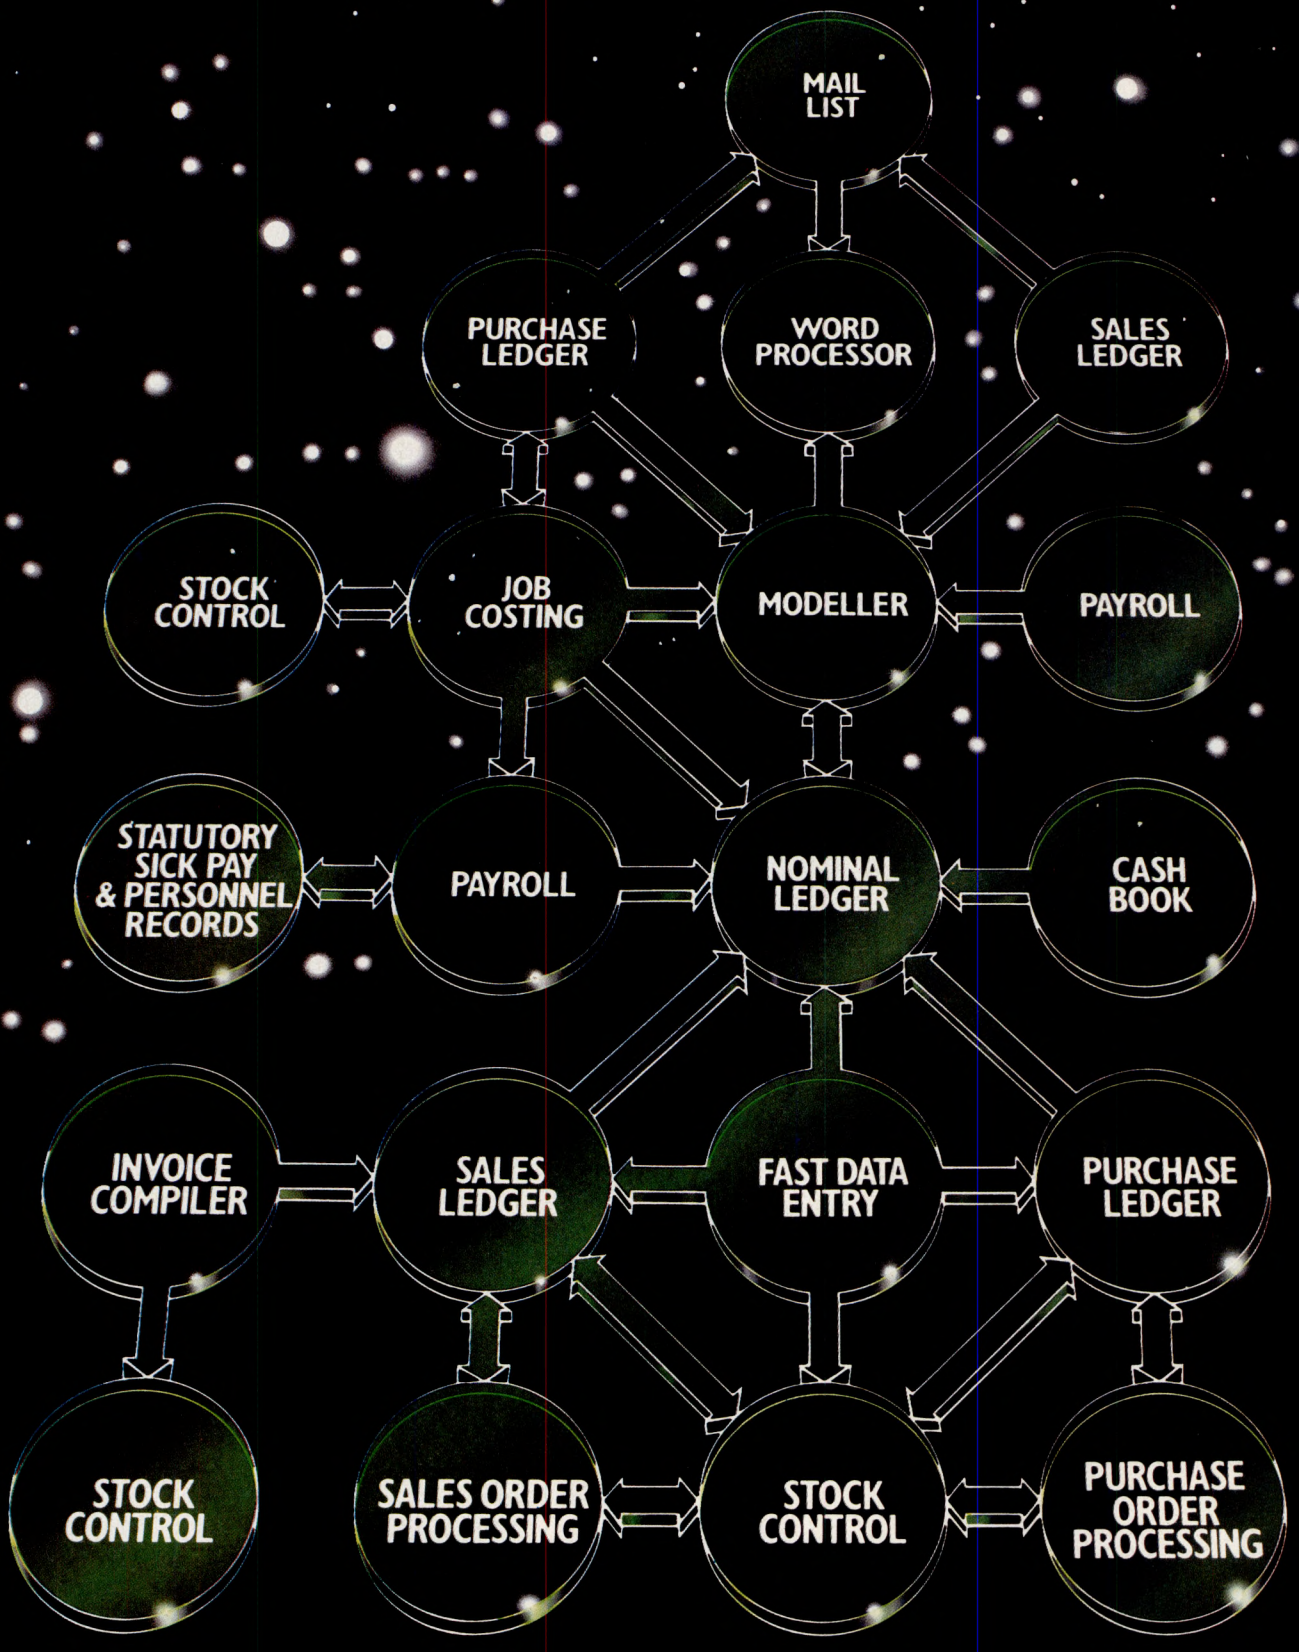


## ...quite simply, none better.

At a TABS Business Centre you'll get free advice, the best hardware and software, expert training and a professional installation service – all in one place.

Head Office: TABS Ltd., Dolphin House, New Street, Salisbury, Wiltshire.

For your nearest one stop Business Centre phone Salisbury

**0722-338668**



# WIN A SAFARI TO KENYA

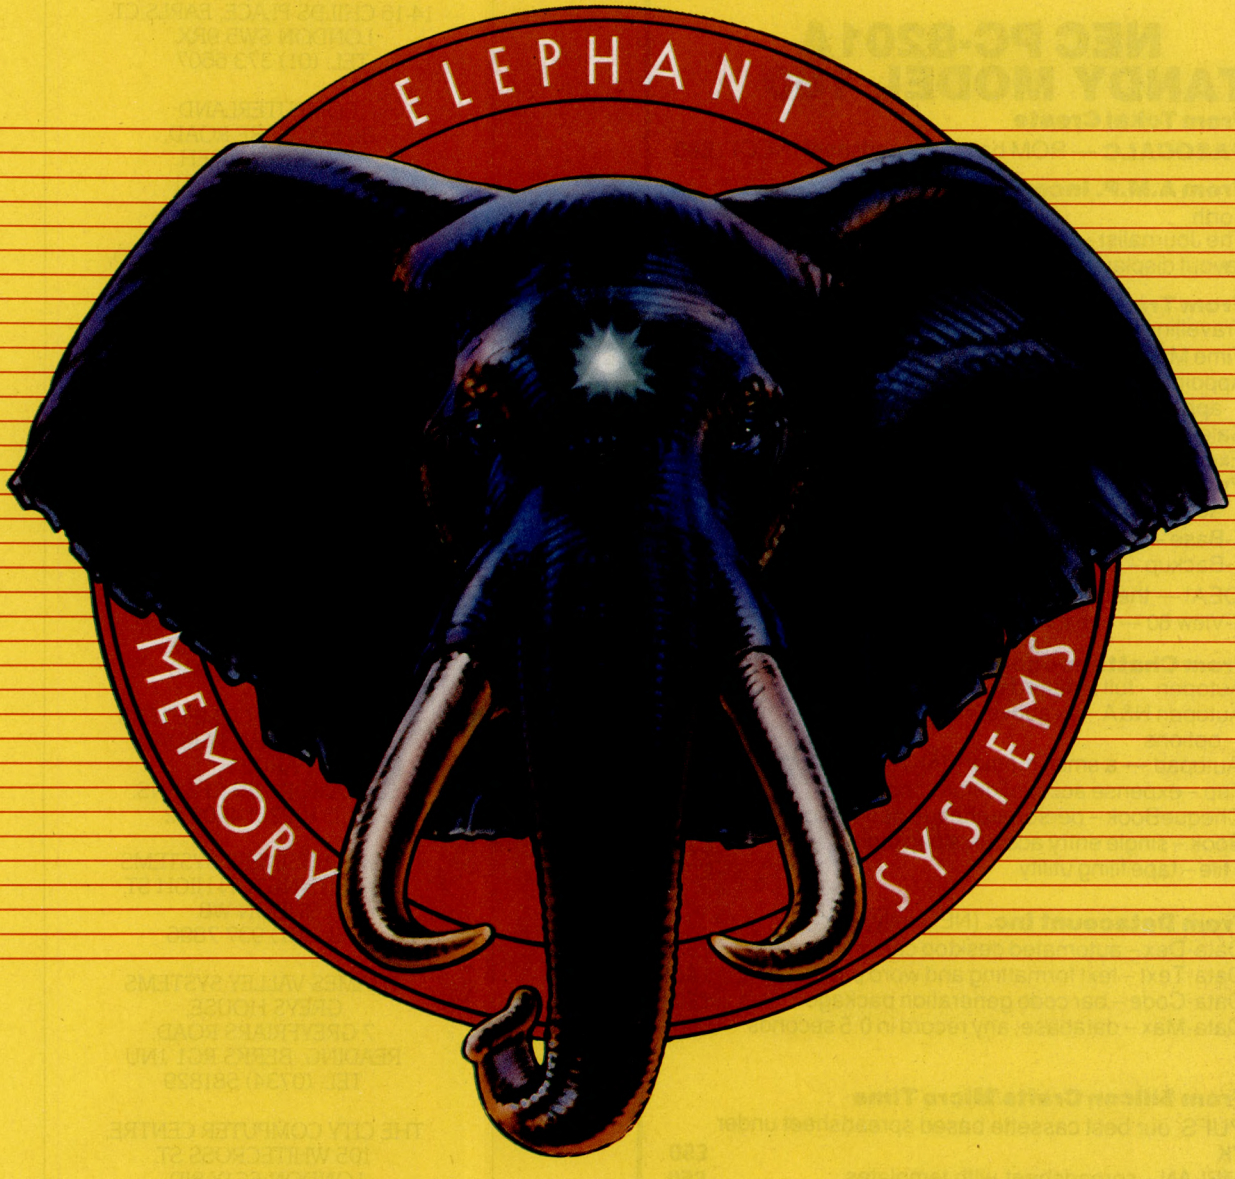




An opportunity to win a super ELEPHANT Safari for two persons – luxury accommodation, travel and all expenses paid – with every purchase of a 10-disk ELEPHANT pack made between 1st April and 30th June 1985!
Look for your participating ELEPHANT Dealer's special Competition Display and pick up a simple puzzle card with your purchase. Send it to us with an ELEPHANT 10-pack top to receive, completely free, an ELEPHANT 'T' shirt and an opportunity in this exciting competition. Each subsequent 10-pack purchase and completed puzzle card gives you another opportunity – there's no limit!
Should you have difficulty in obtaining ELEPHANT products, phone or write for details of your nearest Dealer.

Dennison

## ELEPHANT NEVER FORGETS

**Dennison Manufacturing Co. Ltd.**
Colonial Way, Watford, Herts WD2 4JY, Tel: Watford (0923) 41244, Telex: 923321

**France:** Soroclass, 45, rue de l'Est - 92100, Boulogne.
Tel. Réseau de Distribution: 605.98.99, Administration des Ventes: 605.70.78, Telex: EMS 206 436 E
**Germany:** Marcom Computerzubehör GmbH, Podbielskistr. 321, 3000 Hannover 51, Tel: (0511) 647420, Telex: 923818
**Other Countries:** Dennison International Company, 4006 Erkrath 1, Matthias-Claudius-Strasse 9, Telex: 858 6600

# MICROTIME INTERNATIONAL LIMITED

**106A BEDFORD RD, WOOTTON, BEDS MK43 9JB**
**Telephone (0234) 767758/766351**

## NEC PC-8201A
## TANDY MODEL 100

**From Tokai Create**

**PASOCALC** — ROM based spreadsheet (NEC) **£80**

**From A.M.P. Incorporated**

Forth **£90**
The Journalist – Unique text formatter with graphic layout display **£65**

**From Travelling Software Inc.**

Travelling Writer – acclaimed word processor **£50**
Time Manager – time costing for professionals **£55**
Appointment Manager – calendars & appointments **£50**
Sales Manager – sales activity/customer notes **£55**
Expense Manager – full expense accounting **£55**
Project Manager – budgets/actuals/costs/activities **£60**
T-Base – the ultimate relational database system **£90**
T-Backup – advanced tape filing utility **£25**
IDEA! — the revolutionary outline processor **£75**
T-View 80 — enhanced 60/80 col. display mode **£30**

**From Chattanooga Systems**

Autopen – full featured word processor **£30**
Autopen N&A – as above with name/address options **£40**
Autopad — a small memory (5K) spreadsheet **£40**
Trip – expense account details and trip log **£30**
ChequeBook – personal cheque book record **£25**
Book – single entry accounts package **£30**
Tfile – tape filing utility **£20**

**From Datacount Inc.** (NEC only)

Data-Dex – automated desktop card index system **£35**
Data-Text – text formatting and word processor **£40**
Data-Code – bar code generation package **£30**
Data-Max – database, any record in 0.5 seconds **£50**

**From Silicon Crafts/Micro Time**

PUFS our best cassette based spreadsheet under 7K **£50**
MPLAN – spreadsheet with templates **£50**
MSOLVE – equation solver with templates **£50**
MBRAIN – full RPN calculator with stacks/memories **£20**
MLABEL – general purpose labelling program **£30**

**From Custom Software**

80C85 Assembler — (in 3K machine code) **£40**
CBUG 80C85 Assembler De-Bugging tool **£35**

(all prices ex-VAT, 50p per item UK p&p, 2nd class post)

**SEND OR RING FOR DETAILS TODAY FROM MICROTIME**

**Approved NEC PC-8201A dealers**



SOFTSEL®

**It's available from your local Softsel dealer.**

ADVANCED MICRO PRODUCTS
200 COURT ROAD
ELTHAM, LONDON SE9 4EW.
TEL: (01) 851 3311

CALLHAVEN LTD
43 FIFE ROAD,
KINGSTON-UPON-THAMES
SURREY KT1 1SF.
TEL: (01) 549 5612

CLM MATMOS PLUS
14-16 CHILDS PLACE, EARLS CT.
LONDON SW5 9RX.
TEL: (01) 373 6607

COMPUTERLAND
38 EDGWARE ROAD,
LONDON W2 2EH.
TEL: (01) 723 3071

INFORMETRICS
THE FARMHOUSE, LOW ROAD,
KESWICK, NORWICH NR4 6TX.
TEL: (0603) 54805

PERSONAL COMPUTERS LTD.
220/226 BISHOPSGATE,
LONDON EC2M 4JS.
TEL (01) 377 1200

PILOT SOFTWARE
32 RATHBONE PLACE,
LONDON W1P 1AD.
TEL: (01) 636 2666

PEAR COMPUTING SYSTEMS LTD
129 QUEENS CRESCENT,
LONDON NW5 4HE.
TEL: (01) 267 0940

SOUTH WALES COMPUTERS
131 B & C ALBANY ROAD,
CARDIFF,
S. GLAMORGAN CF2 3NS.
TEL: (0222) 490572

TASHA BUSINESS SYSTEMS
191 KENSINGTON HIGH ST.
LONDON W8.
TEL: (01) 937 7896

THAMES VALLEY SYSTEMS
GREYS HOUSE,
7 GREYFRIARS ROAD,
READING, BERKS RG1 1NU
TEL: (0734) 581829

THE CITY COMPUTER CENTRE,
105 WHITECROSS ST.
LONDON EC1Y 8JD.
TEL: (01) 588 5537/8

VEGA COMPUTERS LTD
6 SUFFOLK HOUSE,
GEORGE ST.
CROYDON, SURREY CK0 1PH.
TEL: (01) 680 4484

Typing Tutor III™

**Simon & Schuster, Inc.**

THE PHOTO SOURCE




# Miss Carruthers beats the clock, thanks to Typing Tutor III™

Deer... Der..... Dear Sur..... Dear Sirr....

Miss Carruthers fumbled for her correction fluid once again. So much of the stuff was brushed on her letters, they had to be sent by parcel post.

It was costing Harry Armitage, her boss, a fortune.

So he decided to invest in Typing Tutor III.™ The revolutionary typing instruction program from Simon and Schuster.™

After all with a recently acquired computer in the office, she'd have to sharpen up her skills pretty quickly.

## TYPING TUTOR III – THE KEY TO BETTER COMPUTING

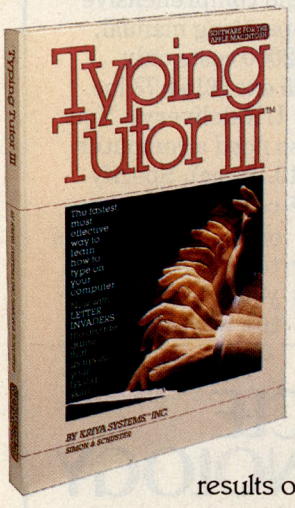


Available for the Apple II,™ Apple Macintosh,™ Atari,™ Commodore 64™ and IBM PC.™ Typing Tutor III allows professionals, students, writers and secretaries to utilize the power of a personal computer to the full.

It's composed of a series of self-paced custom designed typing lessons and tests. All of which are automatically adjusted to match your ability and progress levels.

Typing Tutor III contains a feature called Time Response Monitoring.™ TRM™ analyzes the results of each test and clearly shows your speed, accuracy, strengths and weaknesses. And to help you see the error of your ways your progress is reproduced in graph form.

## EXTRA TERRESTRIAL TYPING

Typing Tutor III also comes complete with Letter Invaders.™ An exciting arcade-style game in which you have to defend earth from invading fleets from outer-space. As each letter or symbol comes into view, blast it by typing it on the keyboard. As your typing gets faster the game gets faster.

Typing Tutor III is simplicity itself to use and comes complete with reference manual.

It's available from your local Softsel dealer along with over 2,600 other titles from over 250 publishers.

Miss Carruthers typing improved beyond all recognition. So much so that Harry Armitage entered her for the Typing World Championships.

And although she romped home with a top score of 160 wpm. he knows of one lady who could beat his secretary out of sight in the words-per-minute stakes.

His mother-in-law.

Typing Tutor III – A hands down winner.

SOFTSEL®

**The number one distributor of Software. In the world.**

Softsel Computer Products Limited, Softsel House, Syon Gate Way, Brentford, Middlesex TW8 9DD.

TYPING TUTOR III, LETTER INVADERS, T.R.M. AND TIME RESPONSE MONITORING ARE TRADEMARKS OF KRIYA SYSTEMS INC. APPLE & APPLE MACINTOSH ARE TRADEMARKS OF APPLE COMPUTERS INC. IBM IS A TRADEMARK OF INTERNATIONAL BUSINESS MACHINES CORP. SIMON & SCHUSTER IS THE TRADEMARK OF SIMON & SCHUSTER INC. ATARI IS THE TRADEMARK OF ATARI INC. AND COMMODORE 64 IS A TRADEMARK OF COMMODORE BUSINESS MACHINES INC.

NEW LOW PRICES

# WHY PAY MORE

NEW LOW PRICES

## QUALITY SS/DD AND DS/QD DISCS IN THEIR OWN LIBRARY BOX

We are able to offer these prices due to our policy of bulk buying and feel that we can offer you the customer a better deal. Why not take advantage of these low prices.

**48 HOUR DELIVERY SERVICE**
**24 Hr. ANSWERING SERVICE**




**PRICES INCLUDE DELIVERY PER BOX OF 10**

| | | |
|---|---|---|
| 1-5 | BOXES SS/DD 48 TPI | £12.50 + VAT |
| 6-10 | BOXES SS/DD 48 TPI | £12.00 + VAT |
| 10+ | BOXES SS/DD 48 TPI | £11.50 + VAT |

**PRICES INCLUDE DELIVERY PER BOX OF 10**

| | | |
|---|---|---|
| 1-5 | BOXES DS/QD 96 TPI | £18.50 + VAT |
| 6-10 | BOXES DS/QD 96 TPI | £18.00 + VAT |
| 10+ | BOXES DS/QD 96 TPI | £17.50 + VAT |

BARCLAYCARD VISA

PLEASE SEND PAYMENT OR PHONE TO USE CREDIT CARD
LARGE QUANTITY AND EDUCATION DISCOUNTS GIVEN

Access

# Micro Resources Limited

Southfield House, 11 Liverpool Gardens, Worthing, Sussex BN11 1RY
Telephone: Worthing (0903) 213174

# Modem WS2000: it's got everyone talking

Modems aren't just for businessmen.

A Modem WS2000 from Miracle Technology can put you and your home computer in touch with the world. Here's how:

Multi-speed, multi-standard Modem WS2000 not only gives you instant access to Prestel, Micronet, bulletin boards, public and private databases and electronic mail, but also lets you communicate with other computers around the world.

WS2000 is suitable for use with just about any home computer, and we can supply the necessary software for most.

WS2000 offers more add-ons than other modems.

For example, autodial and auto-answer options (now undergoing approval testing with BABT), and direct computer software control of the modem.

Because we appreciate that not everyone's an expert, our Customer Services and Technical Departments are happy to give help and advice.

With BT telephone lead, mains power supply and comprehensive operating manual, WS2000 costs only **£129.95** exc (£154.73 inc VAT & UK delivery). You may also need a computer lead (£10.35 inc). Specify computer when ordering. Talk to us today: tomorrow you'll be talking to the world.

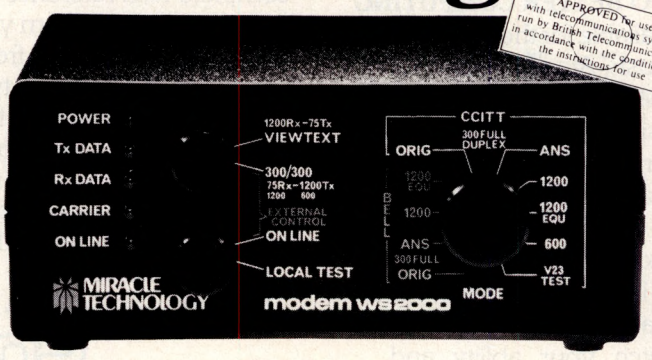


PERSONAL COMPUTER NEWS BEST BUY

To: Miracle Technology (UK) Ltd, St Peters Street, Ipswich IP1 1XB (Tel 0473 50304) PCW/7/85

Please send me ..... WS2000 modem(s) @ £154.73 inc + ..... computer lead(s) @ £10.35 inc for my ..... computer(s). Total .....

I enclose PO/cheque payable to Miracle Technology. Or charge my Visa/Access card no .....

Please send me details of Miracle Technology's full data comms range. .....

Name .....

Address .....

Post Code .....

Registered No 1756137. VAT No 368 4535 21

MIRACLE TECHNOLOGY
we thought of tomorrow, yesterday.

**LOGISTIX** (n) a powerful spreadsheet with an extensive database and containing truly superior presentation-quality graphics. *Logistix also includes:* the fourth dimension — (1) time management; (2) resource allocation; (3) task scheduling; (4) project planning. Commonly referred to as *'... the best idea in business software since the spreadsheet'.*



**THE INDISPENSABLE PLANNING AND DECISION AID**

No business remains static. You need to know not only what is going on today, but what should be happening next week, next month or next year. So you need the right kind of information in a form you can use and understand, you need to be able to analyse it in various ways and you need to be able to present it to others. Most important of all, you need to make decisions about the future. In short, you need to plan.

Logistix adds the all-important feature of time management to classic spreadsheet features, an extensive database capability and presentation quality graphics, to provide a versatile, powerful and easy to use planning and decision aid for managers and professionals.

**LOGISTIX – The best idea in business software since the spreadsheet.**

- DATABASE
- TIMESHEET
- SPREADSHEET
- GRAPHICS

GRAFOX

**Grafox Limited**
65 Banbury Road
Oxford OX2 6PE
Tel. (0865) 516281

# AKHTER FOR BUSINESS COMPUTERS

## SOFTWARE TRAINING

**BOTH 'ON SITE' AND ECONOMICALLY PRICED 'CENTRED' TRAINING COURSES ARE AVAILABLE.... RING FOR DETAILS**

AKHTER

## APRICOT COMPUTERS

**APRICOT PC** 256k RAM, dual 315k disc drives
. . . . . **AKHTER PRICE£1276 + VAT £1468**
**APRICOT PC** 256k RAM, dual 720k disc drives
. . . . . **AKHTER PRICE £1436 + VAT £1652**
**APRICOT XI10** 256k RAM 10 Mb Winchester
. . . . . **Akhter Price £2236 + VAT £2572**
**APRICOT XI10S** 512k RAM 10 Mb Winchester
. . . . . **AKHTER PRICE £2636 + VAT £3032**
**APRICOT XI20** 512k RAM 20 Mb Winchester
. . . . . **AKHTER PRICE £3036 + VAT £3492**
**APRICOT XI20S** 1Mb RAM 20 Mb Winchester
. . . . . **AKHTER PRICE£3436 + VAT £3952**

**APRICOT MONITORS**
High Resolution 9" Green Screen Mono
. . . . . **AKHTER PRICE £160 + £184**
High Resolution 12" Green Screen Mono
. . . . . **AKHTER PRICE £200 + VAT £230**

**APRICOT F1** - **NEW LOW PRICES**

**APRICOT F1e** 256k RAM, single 315k disc drive + **FREE Green Monitor**
. . . . . **AKHTER PRICE £595 + VAT £685**
**APRICOT F1** 256k RAM, single 720k disc drive
. . . . . **AKHTER PRICE £761 + VAT £876**
**APRICOT FP1** 256k RAM, single 720k disc drive, 64k Colour RAM
. . . . . **AKHTER PRICE £846 + VAT £973**
**APRICOT FP2** 512k RAM, single 720k disc drive, 128k Colour RAM
. . . **AKHTER PRICE £1186 + VAT £1364**

## SANYO

**SANYO MBC 550 SERIES**
16 bit 8088 CPU, MS DOS 2.11. 256k RAM. Expandable disc drives from dual 360k floppies to 10MB hard disc and 800k floppy. Built in full colour graphics. Free Hi-res green monitor. Free software - WordStar and CalcStar.

**SANYO 550-360x**
Dual 360k disc drives . . . . . **AKHTER PRICE £895 + VAT £1030**
**SANYO 550-800x**
Dual 800k disc drives . . . . . **AKHTER PRICE £995 + VAT £1145**
**SANYO 550-10MX**
Integral 10 Megabyte Winchester hard disc drive with single 360k floppy disc drive . . . . **AKHTER PRICE £1745 + VAT £2007**
with single 800k floppy disc drive
. . . . . **AKHTER PRICE £1795 + VAT £2065**

**NEW IBM COMPATIBLE 550**
Dual 360k disc drives, 256k RAM, MS DOS 2.11. Full IBM colour graphics (includes IBM compatible video board and GW Basic).
Runs Lotus 1.2.3. etc. . . . . **AKHTER PRICE £995 + VAT £1145**

**ADDITIONAL SOFTWARE FOR THE SANYO MBC 550 SERIES**
Full Info Star pack (including InfoStar, DataStar, ReportStar, Sort, Mailmerge and SpellStar) . . . . . **AKHTER PRICE £195 + VAT £225**

**AKHTER DISC DRIVE UPGRADE KITS FOR SANYO**

| | |
|---|---|
| Single 360k | £110 + VAT £127 |
| Dual 360k | £199 + VAT £229 |
| Single 800k | £129 + VAT £149 |
| Dual 800k | £239 + VAT £275 |
| Single 10MB | £895 + VAT £1030 |

**Akhter offer £25 as a trade in on your old Sanyo drives.**



All APRICOT machines include the following software:
Activity, ACT sketch, ACT diary, MS DOS 2.11., GW Basic Interpreter, Async Comms, IBM - PC Emulator

## APRICOT NETWORK SYSTEMS

**POINT 7 (FOR APRICOT XI ONLY)**
Cluster Controller (incl. Concurrent DOS and Documentation)
. . . . . **AKHTER PRICE £39€ + VAT £456**
10' Cable . . . . . **AKHTER PRICE £23 + VAT £27**
25' Cable . . . . . **AKHTER PRICE £45 + VAT £52**
50' Cable . . . . . **AKHTER PRICE £68 + VAT £79**

**POINT 32 (FILE SERVERS)**
32/10 256k RAM 10 Mb . . . **AKHTER PRICE £2396 + VAT £2756**
32/20 512k RAM 20 Mb . . . **AKHTER PRICE £3196 + VAT £3676**
32/80 512k RAM 80 Mb . . . **AKHTER PRICE £5096 + VAT £5861**

**ACCESSORIES**
Bank with 100 Mb Cartridge . . . . **AKHTER PRICE £1616 + VAT £1859**
Network Board and Tap Box . . . . **AKHTER PRICE £166 + VAT £191**
Network Cable 500' Red. . . . . **AKHTER PRICE £176 + VAT £203**

**SOFTWARE PACKS**
**Super Pack** Super Calc, Super Writer, Super Planner
. . . . . **AKHTER PRICE £81 + VAT £94**
**Educational Pack** CP/M - 86, Dr Logo, Tutorial
. . . . . **AKHTER PRICE £26 + VAT £30**

**NEW IBM COMPATIBLE PORTABLE WITH COLOUR MONITOR & COLOUR PRINTER**

**SANYO MBC 775 PORTABLE COMPUTER**
16-bit 8088 CPU, 256k RAM, MS DOS 2.11. Dual 360k disc drives, IBM Compatable Colour Graphics, Integral 9" colour monitor.
FREE software - Word Star and Calc Star.
FREE Colour Printer with screen dump software.
. . . . . **AKHTER PRICE £2150 + VAT £2473**

**SANYO MBC 775-10MX Portable Computer**
16-bit 8088 CPU 256k RAM MS DOS 2.11. Integral 10 Mb Winchester Hard Disc, Dual 360k disc drives, IBM compatible colour graphics Integral 9" colour monitor.
FREE software - Word star and Calc Star.
FREE Colour Printer with screen dump software.
. . . . . **AKHTER PRICE £2795 + £3215**

AKHTER

## IBM AND COMPATIBLES UPGRADE

**Hard Disc Drive** for IBM and compatibles. 10 and 20 Megabyte Winchester hard discs with fast controller, this upgrade includes all necessary cables. Will convert your IBM PC to XT capabilities at a fraction of the cost.

10Megabyte and controller . . . . . **£695 + VAT £799**
20Megabyte and controller . . . . . **£895 + VAT £1030**

# AKHTER FOR PRINTERS, MONITORS & DISC DRIVES

**SPECIAL EDUCATION DISCOUNTS**

**BULK ENQUIRIES WELCOME**

AKHTER

## DAISYWHEEL PRINTERS

**JUKI 6000** ..... **AKHTER PRICE £199 + VAT £229**
**JUKI 6100** 20 CPS. Bi-directional, logic seeking, 10, 12, 15 CPI and P.S. ..... **AKHTER PRICE £324 + VAT £373**
**JUKI 6300** 40 CPS. Bi-directional. 10, 12, 15 CPI and PS ..... **AKHTER PRICE £699 + VAT £804**
**JUKI 2200** Portable electronic daisywheel typewriter and R/O printer. 10 CPS. 10, 12 and 15 pitch. Bi-directional printing. 2k buffer ..... **AKHTER PRICE £259 + VAT £298**
Single sheet feeder ..... **£199 + VAT £229**
RS232 Interface ..... **£50 + £58**
Tractor Unit ..... **£129 + VAT £148**
Spare daisywheel ..... **£14 + VAT £16**
Juki 6100 ribbon ..... **£2 + VAT £2.30**
**QUENDATA DWP1120** 20 CPS. Bi-directional, logic seeking. Centronic Interface (Optional RS232-C) ..... **AKHTER PRICE £219 + VAT £252**

## COLOUR PRINTERS

**OKIMATE 20** Full colour, 40 CPS letter quality, variable width tractor feed, plain paper and acetate film printing. ..... **AKHTER PRICE £259 + VAT £298**

**CANNON PJ1080A** Seven colour printing. 37 CPS. Bidirectional .... **AKHTER PRICE £399 + VAT £459**

## DOT MATRIX PRINTERS

**EPSON**
**FX 80** 160 CPS 10 inch wide friction and pin feed. ..... **AKHTER PRICE £324 + VAT £373**
**FX 100** 160 CPS 15 inch wide friction and pin feed ..... **AKHTER PRICE £439 + VAT £505**
**RX80 F/T** 100 CPS 10 inch wide friction and pin feed ..... **AKHTER PRICE £239 + VAT £275**
**RX80** 100 CPS 10 inch wide tractor feed ..... **AKHTER PRICE £215 + VAT £248**
**RX100 F/T** 100 CPS Friction and tractor feed ..... **AKHTER PRICE £349 + VAT £401**
**LX80 NEW** Epson printer with NLQ - **PHONE FOR PRICE**
**8143** RS232 Interface for FX and RX printers ..... **£39 + VAT £45**
**8148** RS232 Interface with 2k buffers, X on X off ..... **£60 + £69**
**Ribbon Cartridge** for RX80, FX80 and MX80 ..... **£5 + VAT £6**
**Ribbon Cartridge** for FX100 and MX100 ..... **£7 + VAT £8**

**MP165** 165 CPS 10 inch wide friction and tractor feed. NLQ Epson compatible ..... **£239 + VAT £275**
**CANON PW1080A** 160 CPS 10 inch wide friction and tractor feed. NLQ. ..... **AKHTER PRICE £255 + VAT £294**
**CANON PW1156A** 160 CPS, 15 inch wide friction feed NLQ ..... **AKHTER PRICE £359 + VAT £413**
**SHINA CPA80** 100 CPS friction and tractor feed ..... **AKHTER PRICE £187 + VAT £215**

**SMITH CORONA**
**FASTEXT 80** 80 CPS 80 column friction feed ..... **AKHTER PRICE £129 + VAT £149**
**D100** 120 CPS friction and tractor feed ..... **AKHTER PRICE £187 + £215**

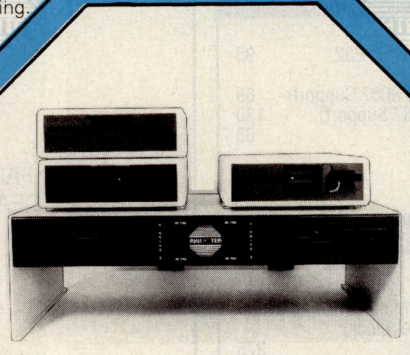

## AKHTER DISC DRIVES

**ALL AKHTER DRIVES ARE COVERED BY THE AKHTER GOLD STANDARD**
**A TWO YEAR WARRANTY AT NO EXTRA COST**

100% fully Acorn compatible. 5¼ inch floppy disc drives. Each drive comes fully cased & equipped with all necessary cables, formatting disc & User Guide.

**DUAL DRIVES WITH PSU & MONITOR STAND**
**MD802D** Dual drive 800k (2 x 400k) 40/80 switchable, double sided plus PSU plus monitor stand ..... **£286 + VAT £329.**
**MD402D** Dual drive 400k (2 x 200k) 40 track, double sided plus PSU plus monitor stand ..... **£260 + VAT £299**

**DUAL DRIVES, VERTICALLY STACKED WITH CABLES & FORMATTING DISC.**
**MD802C** Dual drive 800k (2 x 400k) 40/80 switchable, double sided. ..... **£225 + VAT £259**
**MD402C** Dual drive 400k (2 x 200k) 40 track, double sided ..... **£199 + VAT £229**

**SINGLE DRIVES, fully cased with cables & formatting disc.**
**MD400A** Single drive 400k 40/80 switchable, double sided ..... **£103 + VAT £119**
The power units used are highly efficient and reliable switch and mode power supplies.

**3M DISKETTES**
**744** Single sided, double density 40 track (box of 10) **£15.60 + VAT £17.95**
**745** Double sided, double density 40 track (box of 10) **£22.57 + VAT £25.95**
**747** Double sided, double density 80 track (box of 10) **£26.04 + VAT £29.95**

## MONITORS

SPECIAL OFFER
Sanyo CD3125 standard resolution monitor
£155 + VAT £179

**MONITORS**
**SANYO COLOUR MONITORS**
**CD 3125** Standard resolution ..... **£155 + VAT £179**
**CD3117** Medium resolution ..... **£299 + VAT £344**
**CD3115** High resolution ..... **£399 + VAT £459**

**SANYO GREEN MONITORS**
**DM8112** 12 inch 18 Mhz Hi-res ..... **£86 + VAT £99**
**DM9112** 12 inch 18 Mhz Hi-res with tilt stand ..... **£99 +VAT £144**

**PHILIPS**
**7001** Hi-res green screen with sound input ..... **£69 + VAT £79.**

**MICROVITEC CUB**
**1431 MS** 14 inch RGB standard res. col. ..... **£199 + VAT £229**
**1451 MS** 14 inch RGB med. res. col. ..... **£240 + VAT £276**
**1441 MS** 14 inch RGB hi-res. col. ..... **£399 + VAT £459**

All prices are subject to change without notice and are rounded up to the nearest pound.

AKHTER


**AKHTER COMPUTER GROUP**
**28/29 BURNT MILL HARLOW**
**ESSEX CM20 2HU U.K.**
**☎ 0279-443521 (10 lines)**
**Telex 818894 AKHTER G.**


**Opening Hours: Mon - Fri 9 a.m. - 6.30 p.m.**
**Sat 10 a.m. - 5 p.m.**
**CALLERS WELCOME AMPLE PARKING**
DELIVERY:
Securicor 'A' Service
£8.00 per parcel
Securicor 'B' Service
£5.00 per parcel
Postal Service £1.50 per parcel

VISA

## SANYO 550/5 now IBM PC Compatible

IBM/Lotus Video Board (MS-DOS 2.11 and GW-BASIC) 145
Video Board and Lotus 123 (req 256k) 445

## SANYO 550 Series

Memory Upgrades 64k (128-129k) 41
128k (128-256k) 75
Disk Upgrades 2×360k Internal 315
(All inc 2×800k Internal 355
Software) 2×800k External 429
10mb Internal Hard Disk 995
MS-DOS 2.11 39
Games/Business Send for list
Serial Interface (RS232) 49
Clock/Calendar Card Call

Graphic Specials:
(Grafiti:Freeze Frame:Joystick) 85
(Picasso:Freeze Frame:Joystick) 118
BASIC Manual 27
Joystick (2 Button) with ext cable) 25
Logitek Screen Handler (Ansi 3.64) 15
Screen Dump (Freeze Frame) 32
Select — Datastar:Report/Label Pgm 25
Desmet 'C' Compiler and 8086 Assem 155
Desmet 'C' Symbolic Debugger 55

## SANYO 550 Computers and Peripherals — Mail Order Specials

SANYO 550 (1×160k) 669
SANYO 550-3X (2×360k) 869
SANYO 550-6X (2×800k) 949
(All the above with MS-DOS 1.25, BASIC, WordStar, CalcStar and Monochrome Monitor)
MS-DOS 2.11 with the above add 35
SMUA membership with any Computer 27
SANYO CRT 36 Mono Monitor & Lead 120

ZENITH Mono Monitor & Lead 80
EPSON RX 80F/T with Centronics Cable 269
EPSON FX 100 with Centronics Cable 539
MANNESMAN TALLY MT 80 with Cen Cable 209
BROTHER HR15 399
BROTHER 2024L (100cps NLQ) (Diablo 630 & Epson Compatible) 999

## TURBO, PASCAL (IBM, Sanyo, Olivetti, Apple CPM etc)

Turbo Pascal 49
Turbo Toolbox (Isam, Quicksort etc) 49
Turbo Tutor 29
Sidekick (IBM & Full Compat Only) 49
Sidekick (Unprotected Version) 75
Graphics Toolbox 45
Superkey 65

Turbo, Gift, Pack } All 3 — Save £32 95
Turbo Pascal (With 8087 Support) 85
Gift Pack (With 8087 Support) 130
Turbo Pascal (v 3) 65

## IBM PC/XT Add Ons and Upgrades

20mb Internal Hard Disk 1095
Hard Disk Power Supply (Optional) 145
24mb Tape Streamer (No slot req) 975
Mouse Systems — Mouse Call
smARTWORK (PCB Design Package) 895

Memory Upgrades 64k RAM 48
128k RAM 83
AST Six Pack Plus Multifunction Card (RAM:Serial:Parallel:Clock)
AST with 64k RAM 275
AST with 384k RAM (Huge Saving) 395

All major Add Ons/Boards/Software Available — Call for prices

## UNBEATABLE VALUE FOR MONEY — THE IDEAL LOTUS 123 MACHINE OLIVETTI M24 Desk Top or M21 Portable (with 640k RAM) The SUPER Fast IBM Compatible — Is it faster than an AT?

M24 Desk Top or M21 Portable (with 2×360k drives, 640k RAM HiRes Mono Mon, Keyboard Serial/Parallel/Graphics MS-DOS 2.11) 1999
As above with 2×800k Drives 2199
As above with 1×800k Drive and 1×20mb Hard Disk 3199

OLIVETTI M21/M24 Upgrades
Memory Upgrades 64k (128k-192k) 55
128k (128k-256k) 99
512k (128k-640k) 299
Disk Drives 2×800k 325
1×20 mb Hard Disk 1095
Software as for IBM

## TELECOM GOLD/COMMUNICATIONS (SANYO/OLIVETTI/IBM)

Nightingale V21/V23 Modem 95
Cable-Modem to Computer 14

Software
Mi-Term (SANYO) 69
Crosstalk XVI (IBM, OLIVETTI etc) 155

FREE Registration for MicroLink Telecom Gold Box with every modem purchased

ADD: £10 P & P for each Computer/Printer/Monitor Purchased — Otherwise FREE Postage & Packing.
All prices plus VAT at 15%. Manufacturers Guarantees
*Send cheque with order to:*

**NORTHWEST COMPUTER SUPPLIES (PCC LTD)**
**82 School Lane, Didsbury, MANCHESTER M20 0RY**
**Tel: (061) 434 9747**

*RETAIL Premises — OPENING — June 1st*
Training Discount Vouchers with each computer purchased. Upgrade fitting service available

BARCLAYCARD VISA Access

SOFTSEL®
**It's available from your local Softsel dealer.**

ADELPHI BUSINESS COMPUTERS
25 TRINITY STREET,
COVENTRY,
W MIDLANDS CV1 1FJ.
TEL: (0203) 553944

CALLHAVEN COMPUTERS
43 FIFE ROAD,
KINGSTON UPON THAMES,
SURREY KT1 1SF.
TEL: (01) 549 5612

CLM MATMOS PLUS
14-16 CHILDS PLACE,
EARLS COURT,
LONDON SW5 9RX.
TEL: (01) 373 6607

COMPUTERLAND
114 CHARING CROSS ROAD,
LONDON WC2H 0JR.
TEL: (01) 379 0855

COMPUTERLAND
38 EDGWARE ROAD,
LONDON W2 2EH.
TEL: (01) 723 3071

FAIRHURST INSTRUMENTS LTD
DEAN COURT, WOODFORD ROAD,
WILMSLOW,
CHESHIRE SK9 2LT.
TEL: (0625) 525694

OFFICE INTERNATIONAL
12 COBHAM ROAD,
FERNDOWN INDUSTRIAL ESTATE,
WIMBORNE,
DORSET BH21 7PS.
TEL: (0202) 877 333

PERSONAL COMPUTERS LTD,
220/226 BISHOPSGATE,
LONDON EC2M 4JS.
TEL: (01) 377 1200

MICROCORE
5 BROOMFIELD ROAD,
CHELMSFORD,
ESSEX CM1 1SY.
TEL: (0245) 264230

SAVILLE AUDIO-VISUAL
MILLFIELD LANE,
NETHER POPPLETON,
YORK, YORKS Y02 6PQ
TEL: (0904) 782782

SOUTH WALES COMPUTERS
131 B & C ALBANY ROAD,
ROATH, CARDIFF, CF2 3NS.
TEL: (0222) 490512

**Maccessories™**

KENSINGTON™ MICROWARE



# There's still nothing to touch Maccessories™

A rival to Maccessories™? Impossible. But you'd be surprised at the strange computing aids some people dream up.

Take the "Crikey what's that?" cursor spotter.

A new invention that's designed to make cursor detection on your Apple Macintosh,™ simplicity itself.

But if you think accessories should help, not hinder, try the Maccessories range from Kensington Microware.™ Because Maccessories make using your Mac even easier.

**ABOUT TURN**
The Maccessories Swivel attaches to the base of your Macintosh, and allows adjustment of viewing angle through a full 360°. Fits inside Macintosh carrying case.

**DON'T FLUFF IT**
There are two Anti-static Dust Covers. One protects your Macintosh and keyboard. The other takes care of your Imagewriter.

**STAND AND DELIVER**
The Universal Printer Stand raises your Apple Imagewriter 1½" from the desk at the front and 4½" at the back, allowing you to monitor your printer's performance more easily. And because the stand creates a handy recess, up to 300 sheets can be stored underneath.




**FED UP WITH YOUR SOFTWARE BEING GRABBED?**
The Maccessories Disk Case provides ultrasafe storage for 36 Macintosh disks. (Comes complete with spare disk labels)

**KEEP A CLEAR HEAD**
The Disk Drive Cleaning Kit ensures the read-write head of your disk drive is kept clean and dust free.

**AN ACCENT ON ART**
Maccessories Graphic Accents are a collection of over 250 illustrations, covering business to holidays.

Ideal for reports, newsletters or greeting cards. Stored in standard Macpaint files, so you can adjust copy, cut and paste them just like your own illustrations.

**PROFESSIONAL TO THE LETTER**
Maccessories Type Fonts are styled on the most popular type faces like Helvetica and Times Roman, and give reports and correspondence a professional look.

Available in two formats. 16 fonts in sizes 12 to 24 point for text. And for headlines (512k Mac) the same fonts in sizes 24 to 72 point.

The whole Maccessories range is available from your local Softsel dealer. Along with over 2,600 other titles from over 250 publishers.

The "Crikey what's that?" cursor spotter is available from: Taken-for-a-ride Computer Products Ltd.

All cheques/postal orders to be made payable to Reg Hopeful.

Maccessories — Make the Difference.

SOFTSEL®

**The number one distributor of software. In the world.**

Softsel Computer Products Ltd, Softsel House, Syon Gate Way, Great West Road, Brentford, Middlesex TW8 9DD.

MACCESSORIES IS A TRADEMARK OF KENSINGTON MICROWARE. APPLE AND MACINTOSH ARE TRADEMARKS OF APPLE COMPUTERS.

# LOOKING FOR SOFTWARE?

* We hold a library of information on Software & Hardware.
* This library contains detailed information on business software for micros and minis.
* You can use it as a single impartial source of information to assist you finding the correct equipment.
* Our computer will list all the options that fit your requirements so you can be satisfied you have made the right choice.
* Once we have found what you're looking for we can then put you in contact with a supplier who is qualified to show you the software & hardware working.
* We can also assist you in finding peripherals, communications equipment, leasing, maintenance, training, and computer office furniture.
* OUR SERVICE IS FREE AND IS DESIGNED TO SAVE YOU TIME AND ENERGY IN UNNECESSARY RESEARCH.
* Phone this number and we will help you find the software & hardware you need.

# SOFTWARE INFORMATION LIMITED

# 01-831-0071
# (Five lines)

# 20Mb HARD DISK UPGRADE KIT

FITTING FREE!

FROM: £799. + VAT

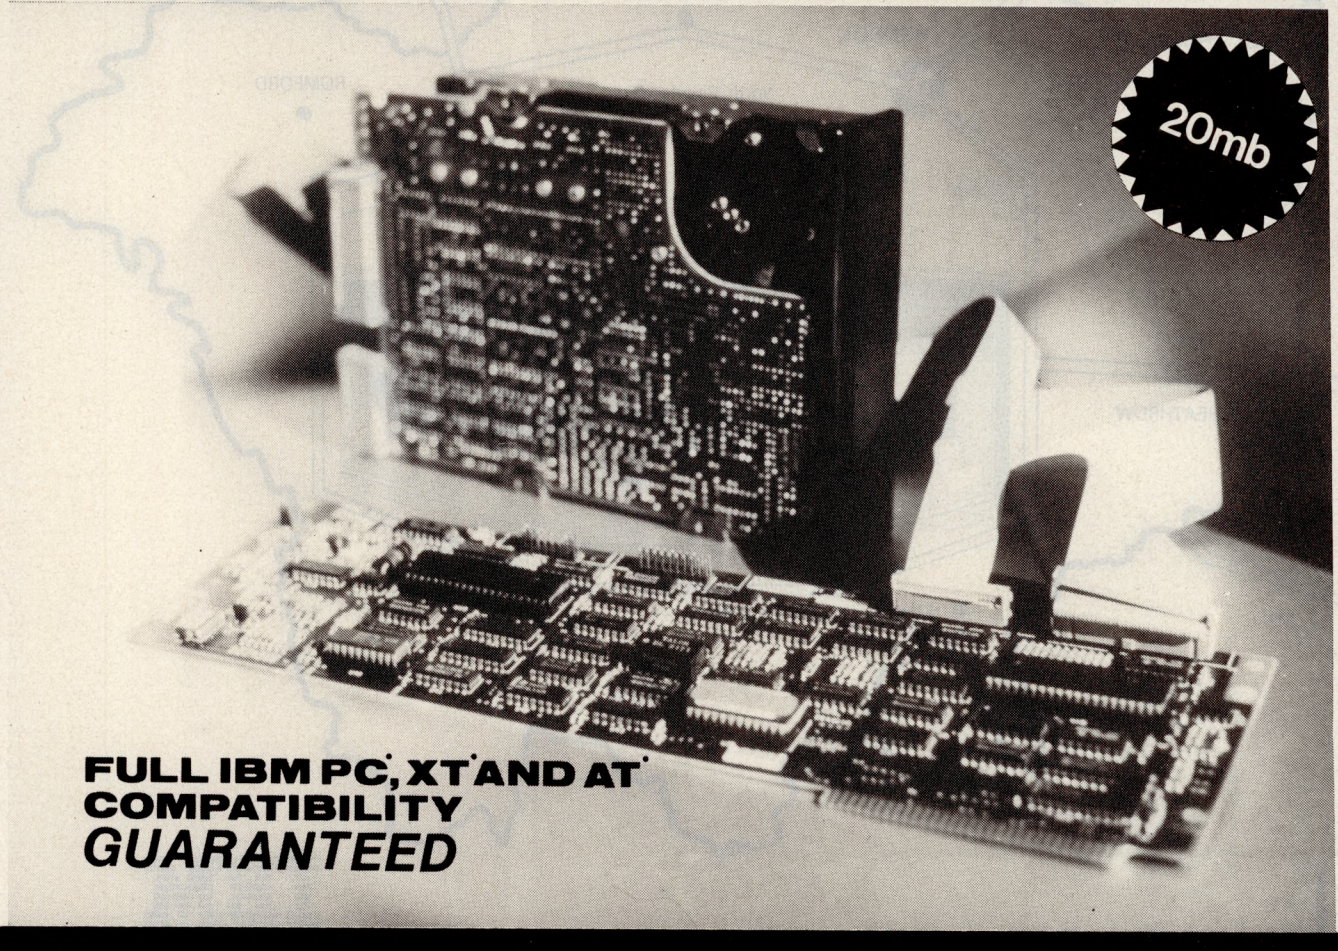


**FULL IBM PC, XT AND AT COMPATIBILITY *GUARANTEED***

# LIMITED OFFER!

## Please Phone Your Nearest Branch

NORTH LONDON 637, HOLLOWAY ROAD LONDON N19 5SS 01-281 2431
SOUTH LONDON 67, WESTOW STREET, UPPER NORWOOD LONDON SE19 3RW 01-771 6373
MIDLANDS 14, CHARLES STREET, HANLEY STOKE-ON-TRENT ST1 3AR (0782) 269 883

# MICROWARE

IBM Authorised Dealer

# CAP IT ALL

WITH

Da Vinci of London

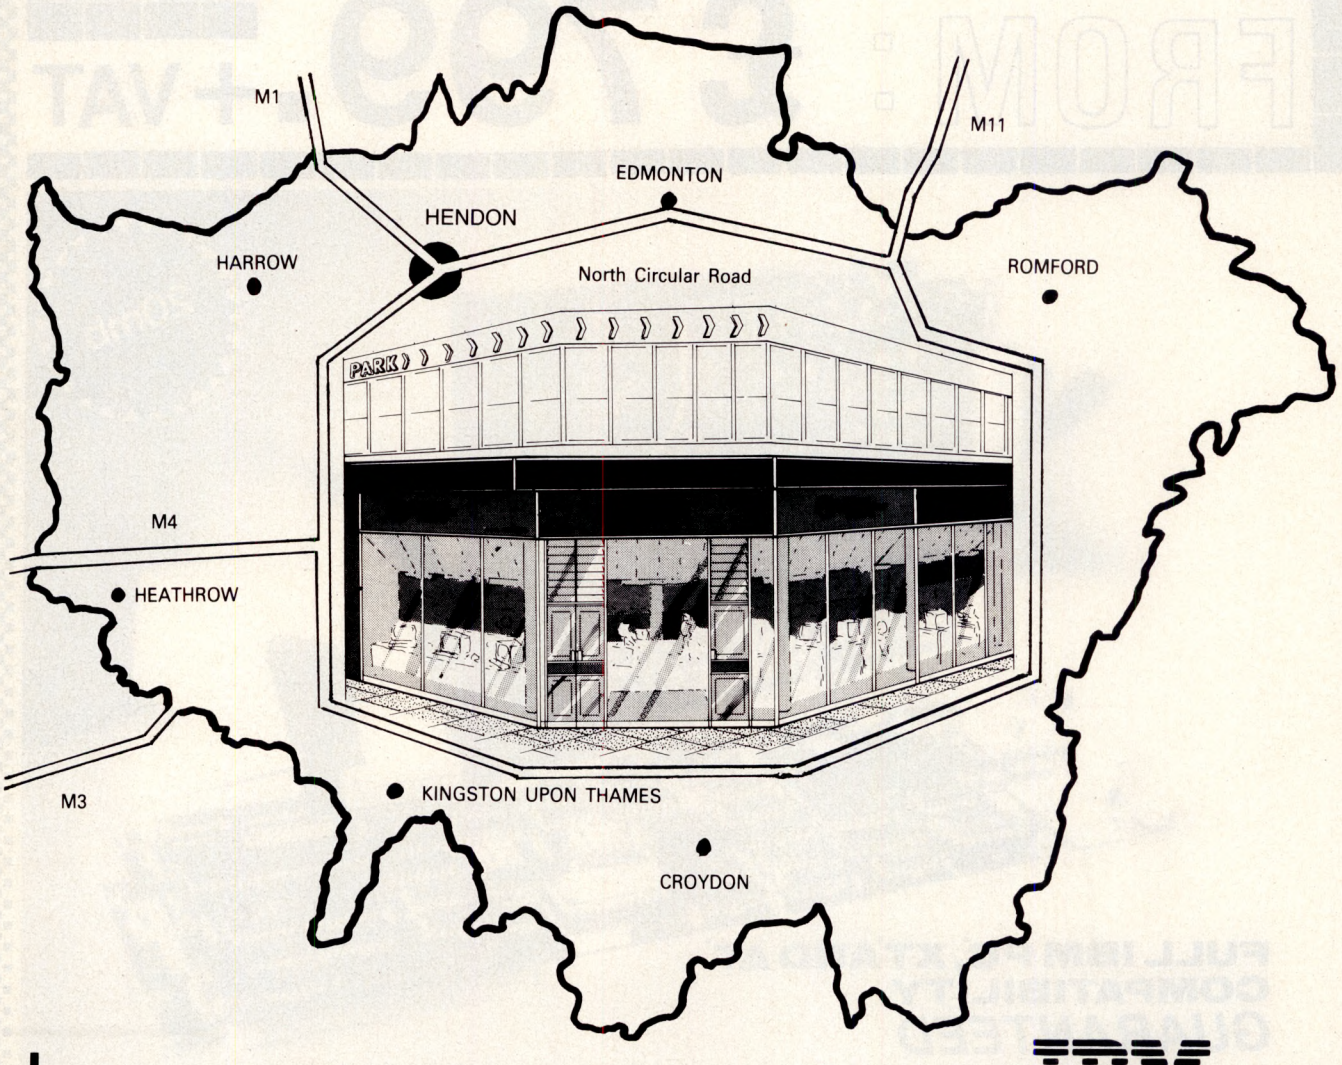


If you look at what is offered by other dealers, you'll find that Da Vinci "Cap It All" around London.

Established for over 6 years in the field of microcomputer sales we have a solid base. Our superb showroom - office - workshop complex is probably the best custom built facility currently available and essential for authorised dealers of all market leaders.

An enquiry to our company, will result in prompt attention from one of our knowledgable sales executives, and demonstrations can be carried out at either your HQ or ours.

Although not a "warehouse", we know you will find our quotations acceptable, and whether a first - time or repeat purchaser, our advice with regard to hardware and software selection, will always be based upon your individual requirements.

Installation and training can be scheduled precisely, so that your system is up and working for you with the minimum of delay. You'll find our expert maintenance division provides the back-up essential to successful continuity with a short-period call-out contract available, as well as stocks of parts and peripherals and repair service.

If all this sounds too good to be true, we would just like to mention accessibility; 2 minutes from the M1, A1, North Circular Road, A41, nearest Tube station or Brent Cross (drop the wife off); 15 minutes from the M25, 25 minutes from Central London, 40 minutes from Heathrow and an hour or so from the Midlands. We have easy Free car parking to the rear and are open Saturdays as well as weekdays.

We think you'll agree, - DA VINCI CAP IT ALL.

IBM PERSONAL COMPUTERS

apricot ACT PERSONAL COMPUTERS

WORDCRAFT

PEGASUS BUSINESS SOFTWARE



Da Vinci Computer Store

112 BRENT STREET HENDON NW4 Tel: 01-202 2272/3/4

Telex: 265871 (MONREF G) REFER TO 81 MMD102

TELECOM GOLD 81: MMD 102

EXPORT HOTLINE
01-281 2438

INCLUDES

# 640K Upgrade Free

With IBM-PC, XT And Compaq Complete Systems

Ser. Port, Par. Port, Clock, Calender, Spooler, Ram Disk, Games Adapter & Optional Ser. Support

| EXAMPLE PRICE | |
|---|---|
| 64K PC | 1207 |
| Keyboard | 185 |
| Second Drive | 266 |
| Mono Adapter | 181 |
| Mono Display | 186 |
| DOS. 2.1 | 59 |

Upgrade to 640K FREE

TOTAL COST £2084

Phone for your configuration quote




# LIMITED OFFER!

## Please Phone Your Nearest Branch

NORTH LONDON 637, HOLLOWAY ROAD LONDON N19 5SS 01-281 2431
SOUTH LONDON 67, WESTOW STREET, UPPER NORWOOD LONDON SE19 3RW 01-771 6373
MIDLANDS 14, CHARLES STREET, HANLEY STOKE-ON-TRENT ST1 3AR (0782) 269 883

# MICROWARE

IBM Authorised Dealer

# PICK UP THE PHONE FOR THE BEST PORTABLE PACKAGE.

# (0280) 816087

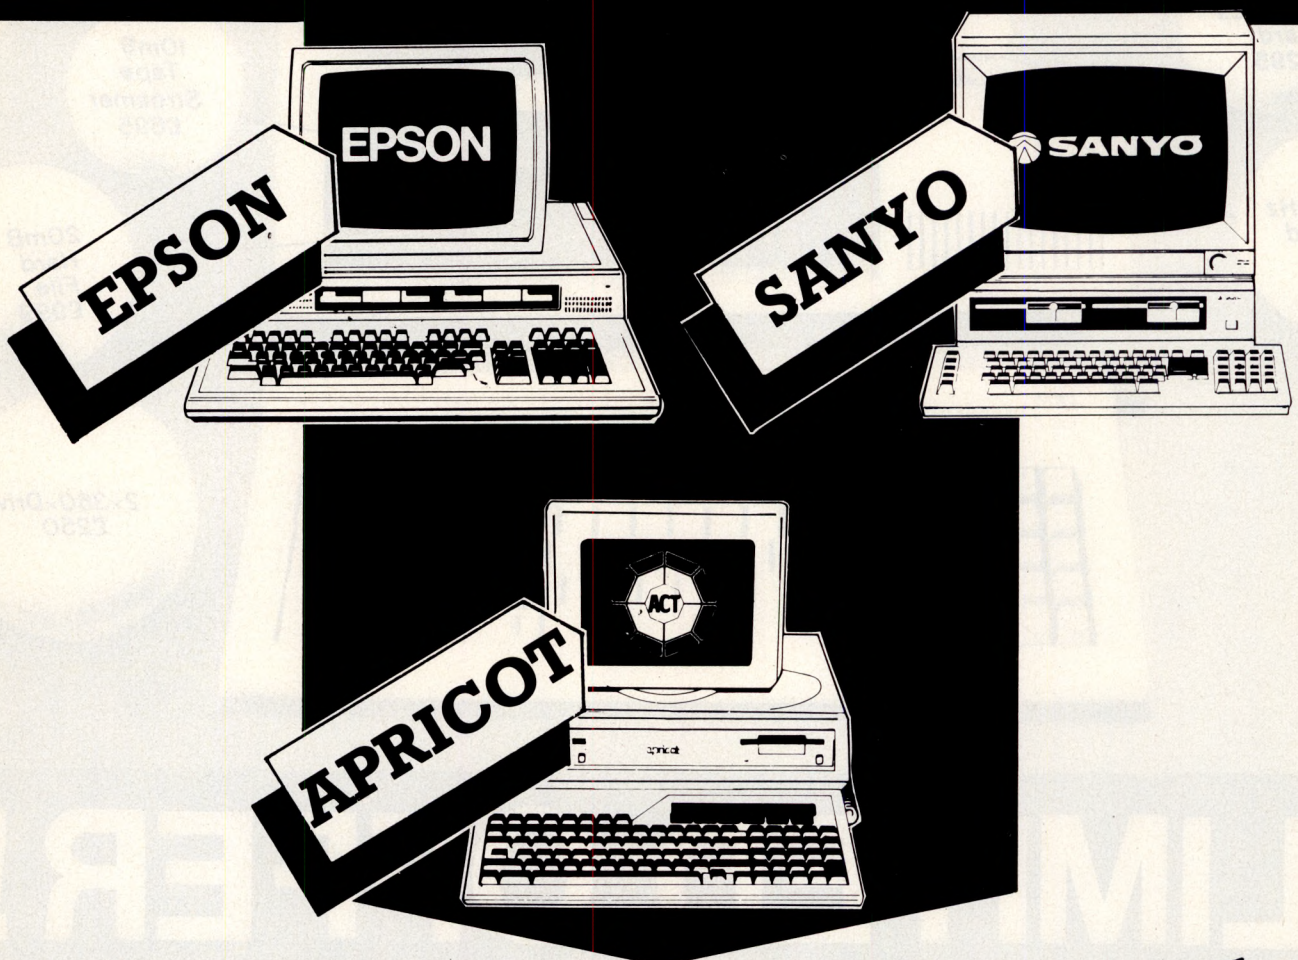


## FREE SOFTWARE & TRAINING WITH EVERY SYSTEM.

Authorised ACT, SANYO, EPSON & OSBORNE Service Centre.

(ALL PRICES + VAT)

- Impartial advice from trained consultants.
- On site training.
- On site servicing & fully equipped workshops.
- Complete After Sales telephone support.




**FRASER**
Associates Limited

Bristle Hill, Buckingham MK18 1EZ Telephone (0280) 816087

# PRINTERS



## JUKI PRINTERS

An exceptional range of high quality, low cost daisywheel printers.

- Juki 6300 ..... £699
- Tractor Feed ..... £135
- Juki 6100 ..... £350
- Tractor Feed ..... £125
- Serial Int ..... £50
- 2200 + Keyboard ..... £245



## EPSON PRINTERS

Market leaders in dot matrix printers, including the new JX80 colour printer and H180 plotter.

- FX100 + ..... £495
- RX100 ..... £399
- FX80 + ..... £399
- RX80 FT + ..... £255
- JX80 Colour ..... £445
- H180 Plotter ..... £399
- HP Int. for H180 ..... £99
- LQ 1500 ..... £995
- Feeder for LQ1500 ..... £365
- Tractor for LQ1500 ..... £52
- Tractor for FX80 ..... £38



## BROTHER PRINTERS

Highest quality medium speed daisywheel printers. Complete range of accessories. Superb letter quality on new 2024 NLQ dot matrix.

- HR15 Daisywheel ..... £399
- HR25 Daisywheel ..... £675
- HR35 Daisywheel ..... £999
- Sheetfeeders ..... £220
- Tractors ..... £99
- 2024 Letter Quality ..... £999



## CANNON PRINTERS

Value for money dot matrix NLQ printers. Feature reverse feed tractor for labels and forms.

- 156 Column ..... £359
- 80 Column ..... £299

## NEC PRINTERS

Top of the range hard wearing printers, suitable for long periods of continuous use.

- 3550 IBM Comp ..... £1,199
- 7700 High Speed ..... £1,595
- 8800 IBM Comp ..... £1,795
- T Switch ..... £79
- Printer Cables ..... £25

Full range of ribbons and wheels stocked. Ask about our unique genuine A4 continuous stationery.

# SOFTWARE



## WORD PROCESSING

Increase the efficiency and productivity of your paper flow. Standard letters, multilingual, multiple copy, spell checkers and address merging.

- Wordstar ..... £245
- Mailmerge ..... £125
- Spellstar ..... £125
- Microsoft Word ..... £245
- Mouse for above ..... £175
- Wordcraft ..... £399
- Disp/Write 1 ..... £82
- Disp/Write 2 ..... £250
- Writing Assistant ..... £95
- Easy Writer ..... £95
- Multimate ..... £375
- Perfect Writer ..... £45
- Typing Tutor ..... £49

## DATA BASES

Increase the accuracy and speed with which you can find facts, records and figures. We specialise in modifying DBASE to provide you with up to the minute management reports and information at the touch of a button.

- DBASE II ..... £295
- DBASE III ..... £450
- DBASE Programs ..... Call
- Delta ..... £455
- DMS ..... £175
- DGRAPH III ..... £295
- Cardbox Plus ..... £295
- Filing Assistant ..... £95
- Everyman ..... £395

## PROJECT MANAGEMENT

Produce resource scheduling/project plans. Create GHANT and PERT diagrams, critical path, cashflow forecasts and completion dates.

- Pertmaster 1000 ..... £525
- Pertmaster 2000 ..... £999
- Hornet 4000 ..... £2,500

## SPREADSHEETS

Produce financial reports and forecasts with graphical presentation, including 'What If' calculations and models. Full management accounts and statistical models can be compiled to your specification. A large range of standard models kept in stock.

- Lotus 123 ..... £345
- Multiplan ..... £137
- SuperCalc III ..... £295
- FT Moneywise ..... £325

## MULTIPURPOSE

Combine graphics, database, word-processing, spreadsheet and communications all in one program.

- Framework ..... £450
- Symphony ..... £450
- Open Access ..... £395

## ACCOUNTING

Pegasus Single/Multi-User
Market leaders in accounting software. This product is well proven with thousands of installations nationwide. All modules can be integrated for accuracy and time saving. A file tansfer utility allows you to use data from your accounts in a spreadsheet in order to create up to the minute forecasts and reports.

- Sales ..... £295
- Purchase ..... £295
- Nominal ..... £295
- Invoicing ..... £295
- Payroll ..... £295
- Jobcosting ..... £295
- Bill of Material ..... £295
- Stock Control ..... £295

Discounts for more than one module purchased at a time.

## UTILITIES

For communications or file handling:

- Sidekick ..... £69
- Xenocopy ..... £149
- Apple T/O ..... £249
- Crosstalk ..... £129
- Norton Utilities ..... £89

We stock hundreds of different software products in each of our stores. Demonstrations available by appointment our premises or yours.

# ADD ONS



## MULTIFUNCTION CARDS

Increase the power of your system with the latest state of the art hardware upgrades.

- 64K RAM Upgrade ..... £45
- Serial/Parallel Int ..... £87
- 384K RAM Card includes Clock, Battery + 64K ..... £249
- MAXI CARD includes Clock, Battery, Calendar, Games Port, 2 Serial + 1 Parallel Port, Spooler and Silicon Disk £275

## GRAPHICS

Use graphics in monochrome, or view Lotus/Symphony graphs before printing.

- Hercules Card ..... £350
- High Graph Card ..... £299
- Amber Mono Display ..... £225

For high resolution colour (640×400) pixels.

- Tecmar Card ..... £695
- Dazzler Card ..... £745
- Quadram Monitor ..... £769
- Microvitec Monitor ..... £640

## DISK UPGRADES

Upgrade your PC instead of replacing your system. All prices include fitting.

- Dual 360K Half HT ..... £295
- Dual 820K Half HT ..... £395
- 10 MB + Controller ..... £899
- 20 MB + Controller ..... £999
- 45 MB Tape backup ..... £1,495

## NETWORKING

Your stand alone systems can be networked to share data, programs and resources.

- IBM Cluster/Stn ..... £399
- PC Net/Stn ..... £450

## MODEMS

- Pace Multifunction ..... £137
- Datacom ..... £295
- Telebox ..... £1,295
- Braid System ..... £1,595

**ORDERING INFO:**

**MICROWARE**

**PLEASE SEND ME INFORMATION ON**

- SYSTEMS ☐
- PRINTERS ☐
- SOFTWARE ☐
- ADD ONS ☐

Name_____

Address_____

_____

_____

Tel:_____ PCW/7/85

**Midlands**
14 Charles Street, Hanley
Stoke-on-Trent
(0782) 269883

**North London**
637 Holloway Road
London N19 5SS
01-281 2431

**South London**
67 Westow Street
Upper Norwood
London SE19
01-771 6373

# DISK FORMAT COPYING SYSTEMS

A full range of systems available to copy between different computer formats. Select the system that YOU require from our modular range.

## FEATURES:

Easy, user friendly commands
In-built library functions
Full support of bad side select (BBC)
After sales updating service
Over 100 disk formats supplied
On-line help facilities
Interrogation/examination routines
On screen editing of data
Format any disk in the library
Support for many different disk drives and types.

## COMPATIBLE WITH:

IBM PCDOS, MSDOS, TORCH/BBC CP/N, CP/M 80, CP/M PLUS, CP/M 86, MP/M, MP/M 86, CONCURRENT CP/M, CONCURRENT PCDOS, DEC RT11, TURBODOS and many others.

Software available separately for most MAP80, NASCOM and GEMINI computers.

## CONTACT:

# MAP 80 SYSTEMS LTD

ACCESS AND BARCLAYCARD ACCEPTED.
CALLERS WELCOME BY APPOINTMENT.
RING FOR FURTHER INFORMATION.

**UNIT 2, STONEYLANDS ROAD, EGHAM, SURREY. TEL: 0784 37674**

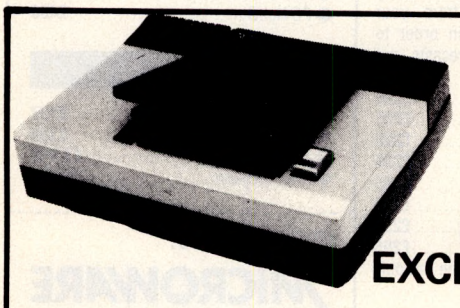

MICRO LINK



# PROUDLY PRESENT THEIR EXCITING NEW PRODUCTS FOR YOU THE MSX USER

***COMING SOON THE NEW MSX MOUSE***

**HARDWARE**

**QUICK DISK DRIVE . . .** £
The first real alternative to Micro-Cassettes.....**138.00**
(Software now being developed for this Quick Access Drive).

**PRINTERS . . .** £
J.P. 100a (100CPS-80COL) **199.00**
J.P. 130a (130CPS-80COL) **229.00**
J.P. 136a (130CPS-136COL) **389.00**
M.C.P. 80 (4 Colour Printer Plotter) **179.00**

Hardware prices are exclusive of VAT

Software prices are inclusive of VAT

Please tick the MSX Software required.

**TELEPHONE: 0730-895296**
**0730-895273**

**SOFTWARE**

**TITLES . . .** (incl. VAT) £
☐ ERIC & THE FLOATERS .....**5.95**
☐ DRILLER TANKS .....**8.95**
☐ BINARY LAND .....**8.95**
☐ BEAN RIDER .....**11.99**
☐ GHOSTBUSTERS .....**11.99**
☐ MANIC MINER .....**7.95**
☐ STOP THE EXPRESS .....**6.95**
☐ DOG FIGHTER.....**6.95**
☐ NINJA .....**6.95**
☐ JET SET WILLY .....**6.95**
☐ ANT ATTACK .....**7.95**
☐ HYPER VIPER .....**7.95**
☐ SUPER DOORS .....**8.95**
☐ NUTS & MILK .....**8.95**
☐ MAH NONG CRAZE.....**8.95**
☐ FIRE RESCUE .....**7.95**
☐ SUBMARINE SHOOTER.....**8.95**

PICK *ANY* 4 TITLES AND GET *1* **FREE**

**TITLE FREE** £
☐ _____ No charge

**BEAMSTICK** £
FED UP WITH SPAGHETTI JUNCTION COMING OUT OF YOUR MSX? MICRO LINK HAS SOLVED YOUR PROBLEM WITH THIS REVOLUTIONARY FAST ACTION, TWIN FIRE, INFRA-RED JOYSTICK .....Circa! **39.95**

**ONLY**
JOYCARD.....**7.95**

☐ **ORDER** **ENQUIRY** ☐

Name:_____
Address:_____
_____
Telephone:_____

Cheque/Postal Order made payable to:
MICRO LINK

Software £1.00 p&p (Total) £.....
Hardware £3.00 p&p (Total) £.....

**"BOWYERS", STEEP MARSH LISS, HANTS. GU32 2BJ**

# Introducing the new and improved IBM® PC.

# Introducing



# GEM.

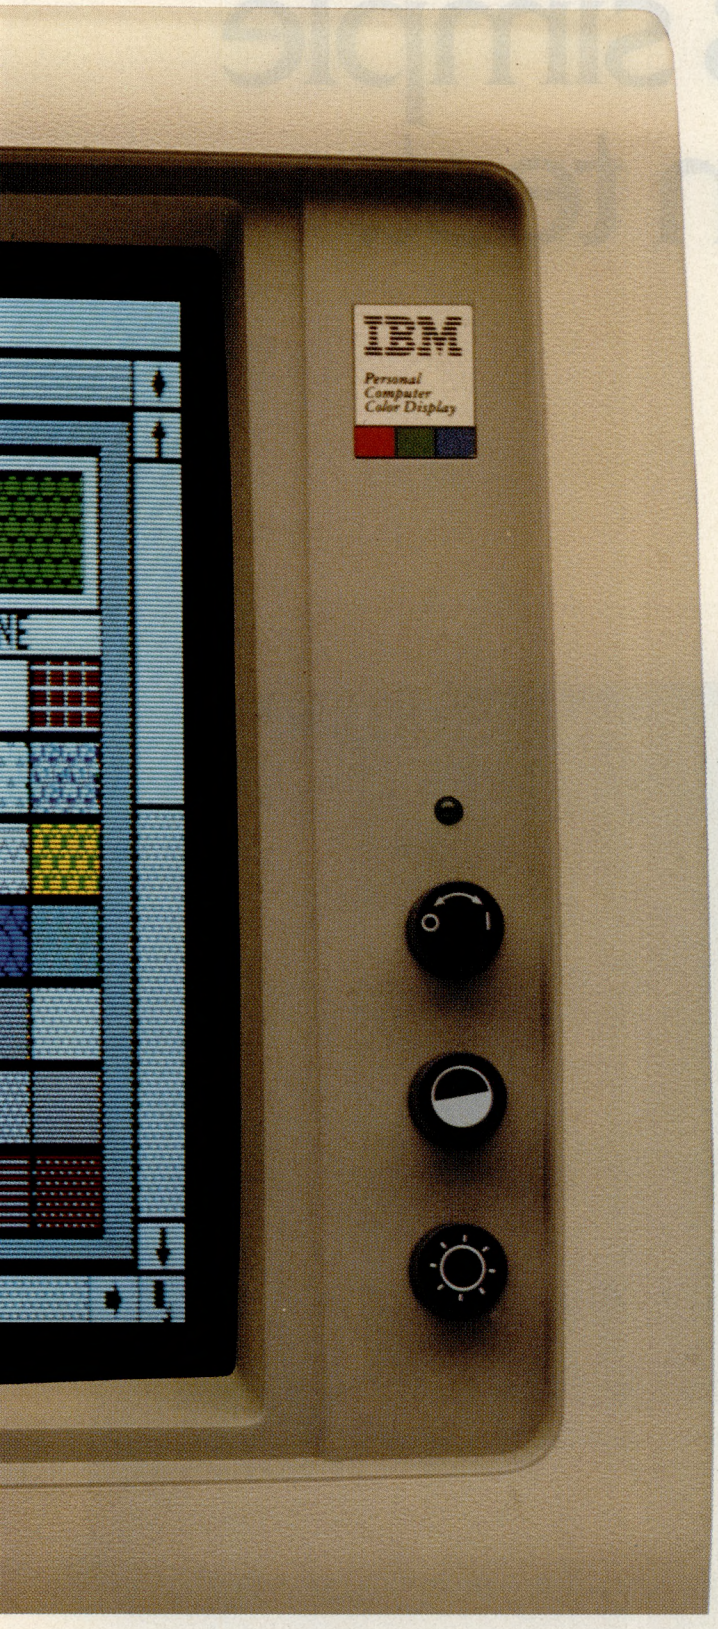


Congratulations.

You just found the perfect way to get a brand new and improved IBM® PC without buying one.

Get GEM™★ software from Digital Research instead.

And *voilà*, your IBM PC, PC/XT or AT will become something it's never been before.

Easy to use.

Now instead of getting lost in PC DOS, you can actually use your PC to get something done. (An astonishing idea, if ever there was one).

Just slip a GEM diskette into your disk drive. And the rigmarole of PC DOS is replaced by a way of working that's easy, effortless and altogether personable.

You see, GEM lets you work with a simple descriptive header menu, icons, drop-down menus, windows and a pointer.

Which means you can now use your computer to write, figure, draw and even think the way you used to. Before less-than-friendly computers made you change your way of thinking.

In other words, your tool for modern times has finally become a tool for modern times.

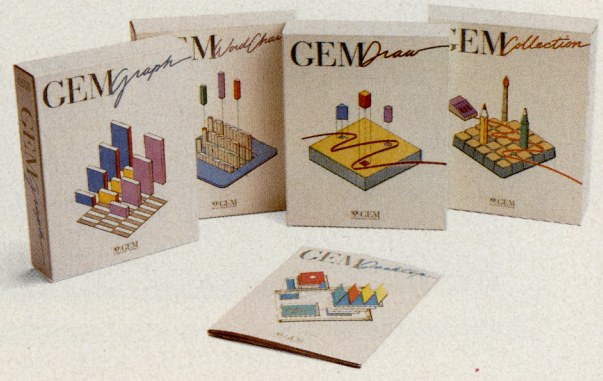

# To see how easy it is to use GEM, take this simple screen test.

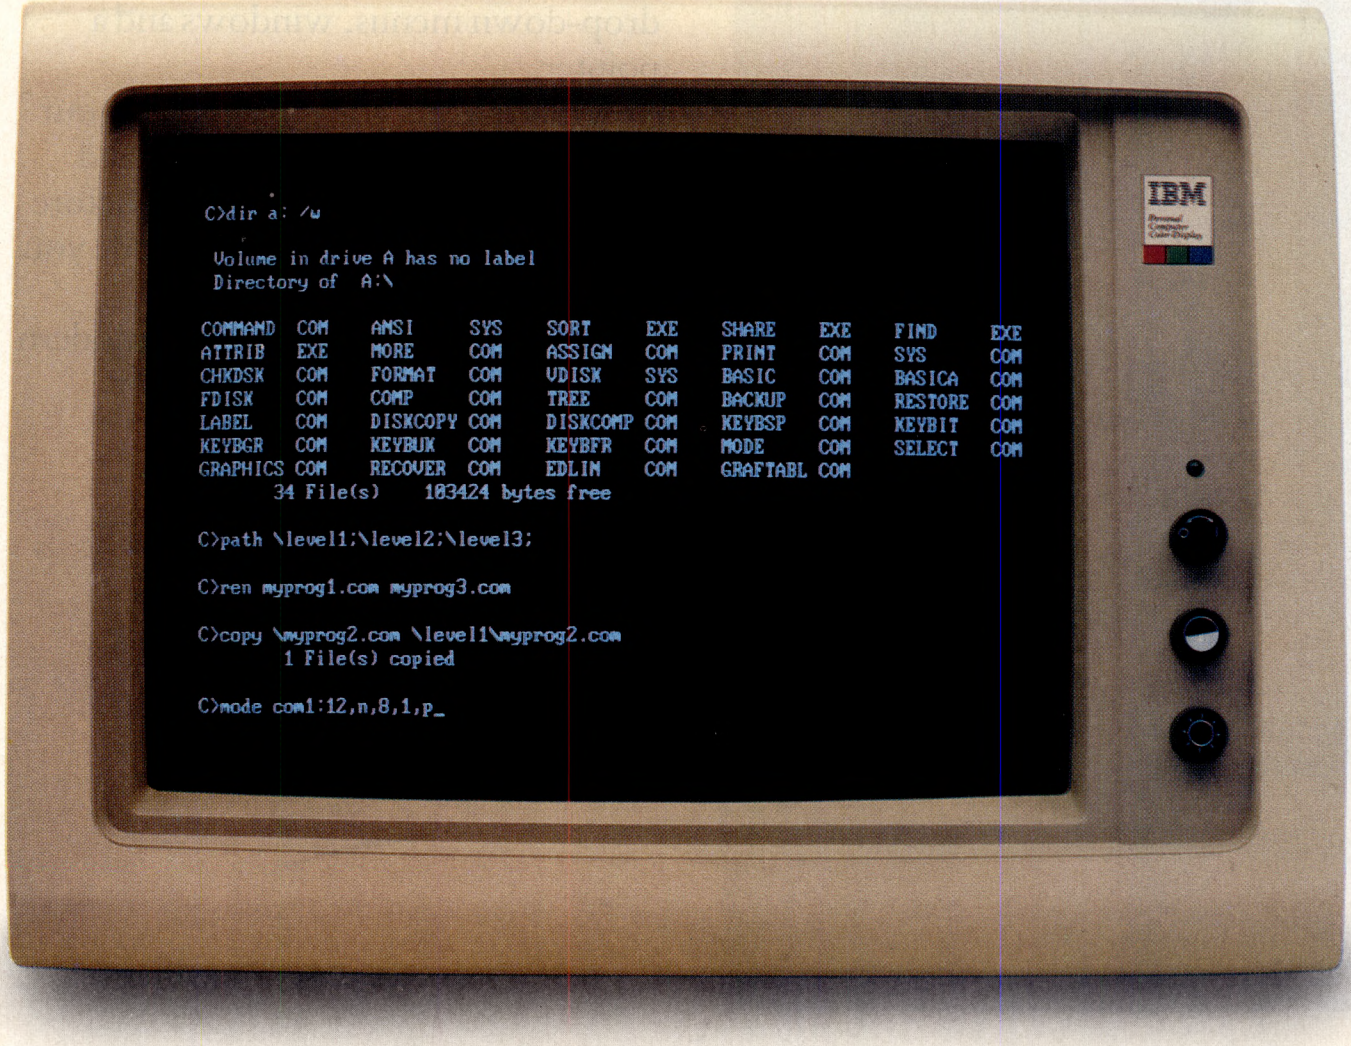

OK. Take a close look at these two screens.

One is an IBM PC with PC DOS. The other is an IBM PC with GEM.

You can work out which is which.

The PC DOS screen is the one that seems to be designed for an engineer. Or someone with a photographic memory.

It requires you to type and memorize nonsensical terminology like *c>copy \ myprog2.com \ level1 \ myprog2.com*. All just to copy a file.

But most people think in ideas. Words. And pictures.

Which brings us to the GEM screen.

It's the one with pictures of the things you use in your office. Like file folders. Diskettes. And a wastebasket.

Plus words describing the kinds of things you do in your office. Like OPEN FOLDER. SAVE FOLDER. And QUIT.

Copying a file is as easy as pointing with a mouse (or cursor key – if mice make you uneasy) to the file you want to copy. Then you just slide the file across the screen to the diskette you want to put it on.

Well, by now we've probably given it away.

If you guessed that GEM is on the right-hand screen, you're absolutely right. And if you think GEM looks easy to use, you're right again.

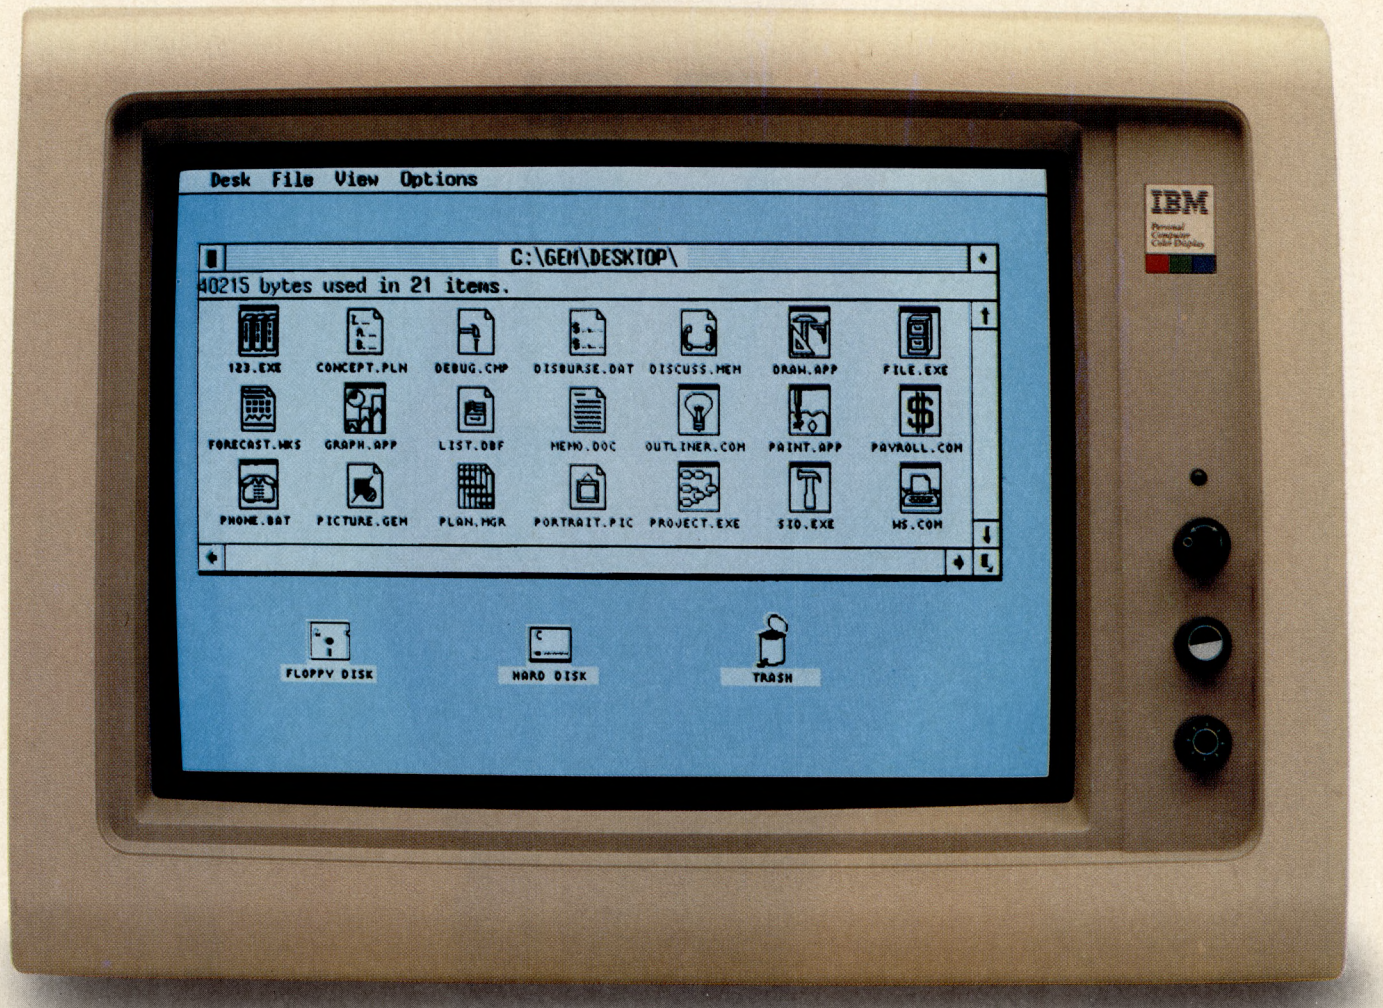

# Now, given a few pointers, anyone can use an IBM PC.

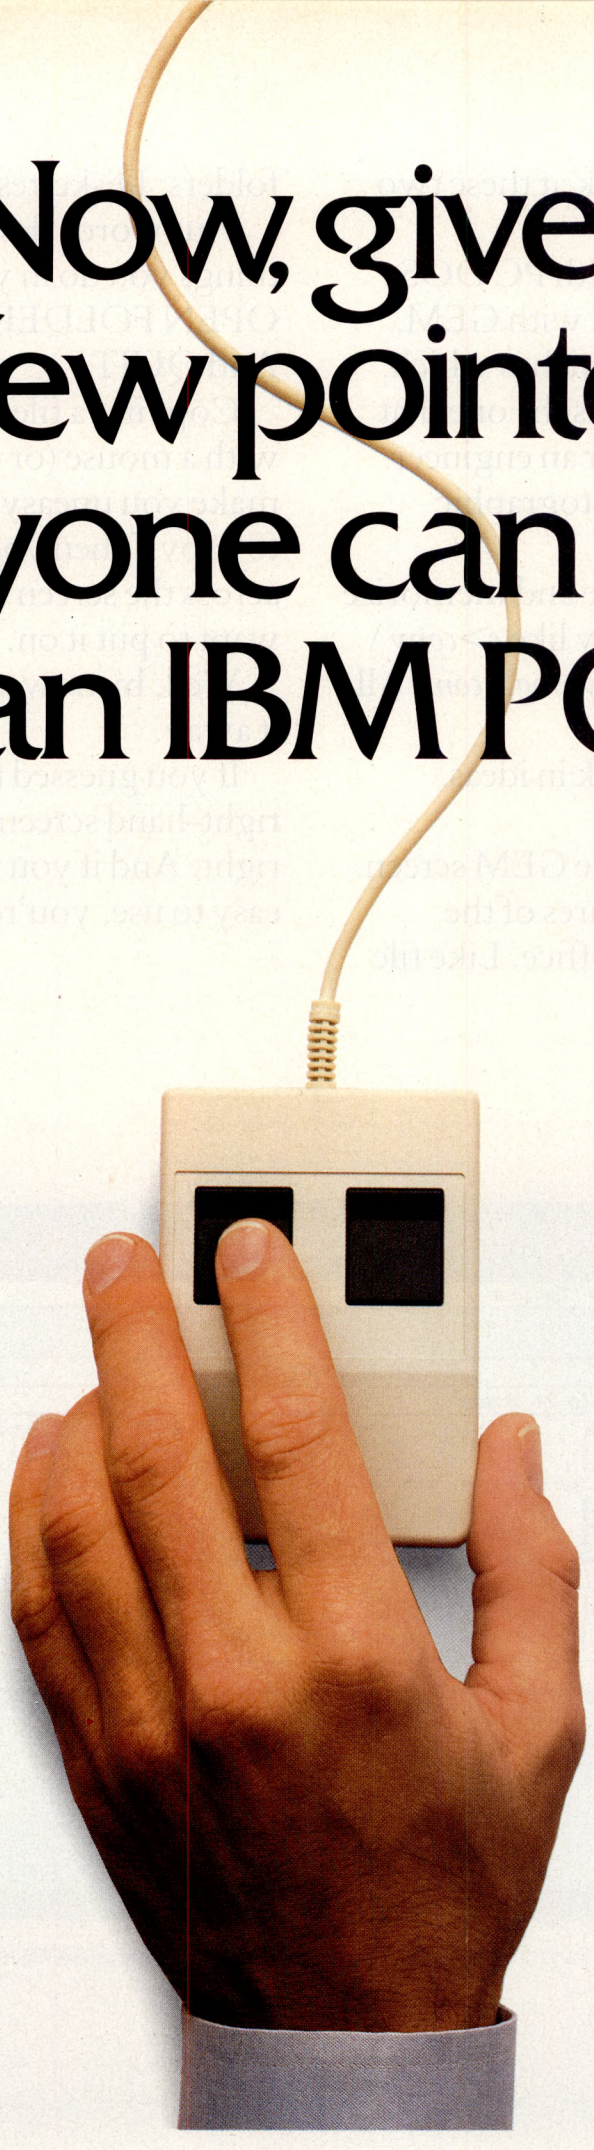

Have you ever noticed how people in your company get up from their PCs looking rather dazed?

That's called PC DOS anxiety.

And it goes away when GEM enters the picture.

Because with GEM everybody already knows everything they need to know to run a PC.

Like how to point.

Click.

Read a menu.

Open a file folder.

Or throw a bad idea in the wastebasket.

Who knows, GEM software could even turn people with deep-rooted PC-phobia into absolute PC-enthusiasts.

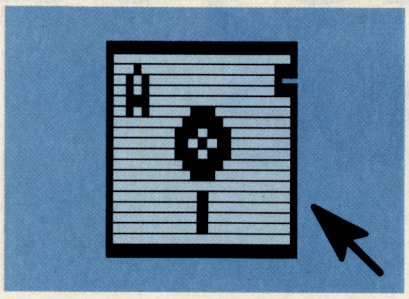

*With GEM software you don't have to switch gears to switch drives. You can just point and click your way from drive to drive. No matter how many drives or diskettes you're using.*

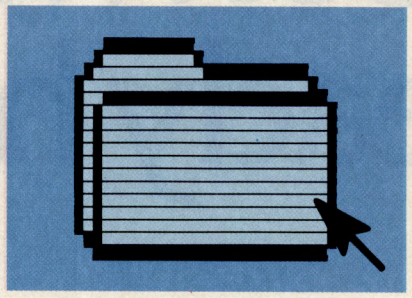

*GEM file folders hold whatever you put on a diskette. From entire software programs to reports, pictures and presentations.*

*In fact, GEM file folders can even hold other file folders. And so on.*

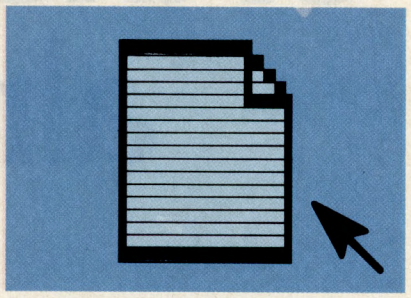

*GEM software even includes "generic" file folders, places to hold random ideas, memos, numbers and the like until you're ready to file them in a GEM folder. Or in the wastebasket.*

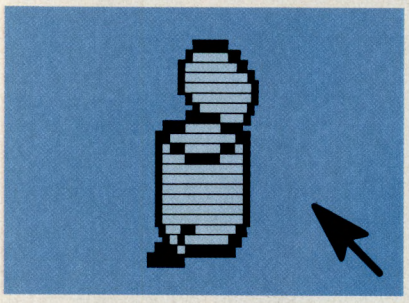

*Part of getting organized is knowing when to let go of out-dated files.*

*GEM can't tell you which files to get rid of. But it can help get rid of them.*

*And should you dispose of a file before its time, you even get a chance to change your mind.*

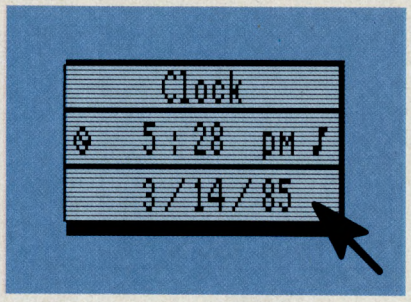


*If you're clever enough to read these words, you've no doubt figured out what the GEM clock is for. Staying on schedule, for instance. Keeping track of the time it takes to do specific projects. Or getting to your airplane on time.*

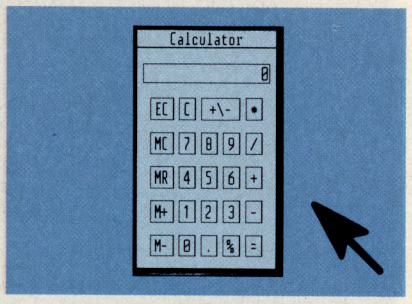


*GEM even includes a calculator, so you can tally up all kinds of important things.*

*Like the time and keystrokes you save by working with GEM software.*

# GEM already works with most of the software you already have.

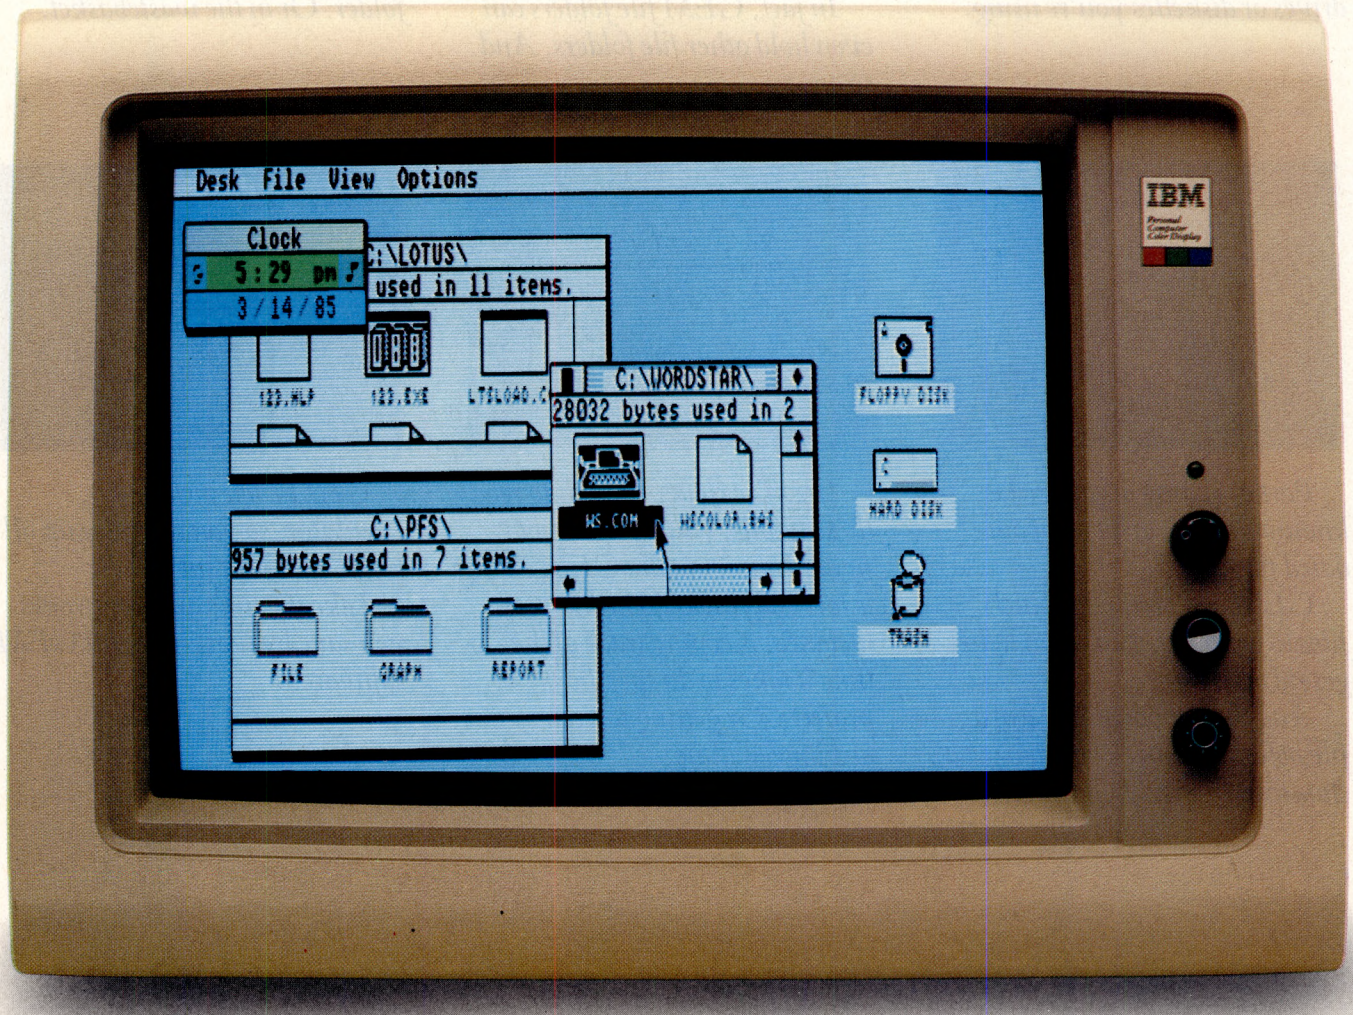

We know what you're wondering.

If GEM software is going to change the way you work with your IBM PC, will you still be able to work with your existing software?

Of course.

GEM works with most important programs that work with the IBM PC.

Like Lotus 1-2-3.™ Symphony.™ Multiplan®. dBASE III.™ Framework.™ And thousands more.

Technically, you see, GEM software doesn't actually change PC DOS. It just hides it.

So your software works just the way it always has. But without the long and cryptic PC DOS start-up procedures.



# But the best software for GEM is GEM software.

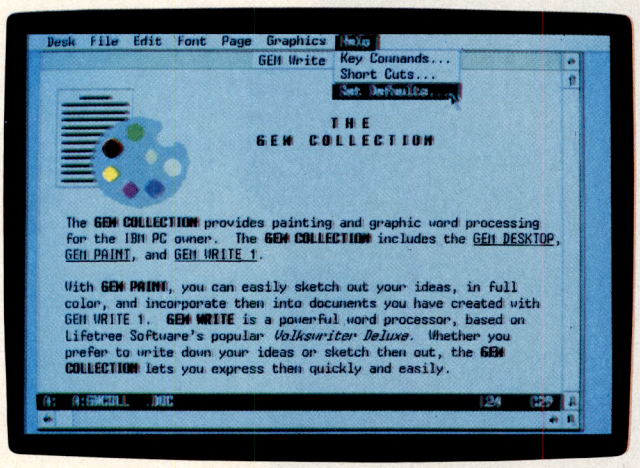


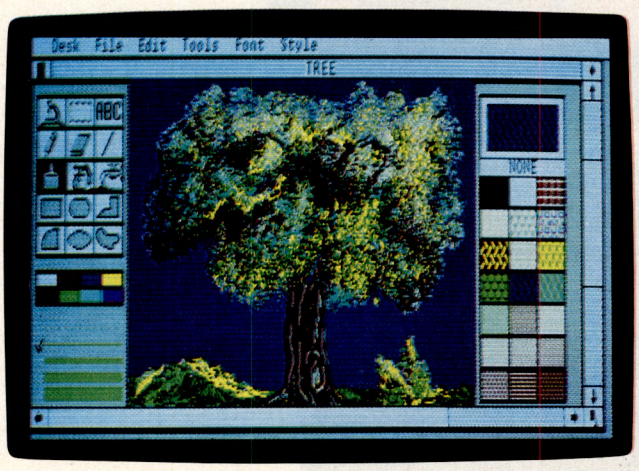


**The GEM COLLECTION**
*Now you can work with words and pictures together.*

The GEM COLLECTION™† is a bundle of three programs, GEM DESKTOP,™ GEM WRITE,™ and GEM PAINT.™

A part of all GEM software, GEM DESKTOP* is the mask that hides PC DOS. It includes the GEM pointer, menu headings, icons and drop-down menus.

So you can point and click your way through anything you'll ever want to use a computer for.

GEM WRITE, by Lifetree Software, Inc., is a word processing program featuring fast, clear and comprehensive editing. It lets you cut and paste, make multiple block moves or even create columns. All without memorizing a single command.

And when words alone won't express what you have to say, GEM PAINT gives you the tools to turn your ideas into pictures. Up to sixteen colours. Paint-brushes, pencils and a straightedge. Plus dozens of shapes and patterns.

*GEM DESK TOP is also avilable as a stand-alone product.
†GEM COLLECTION; available July 1985.

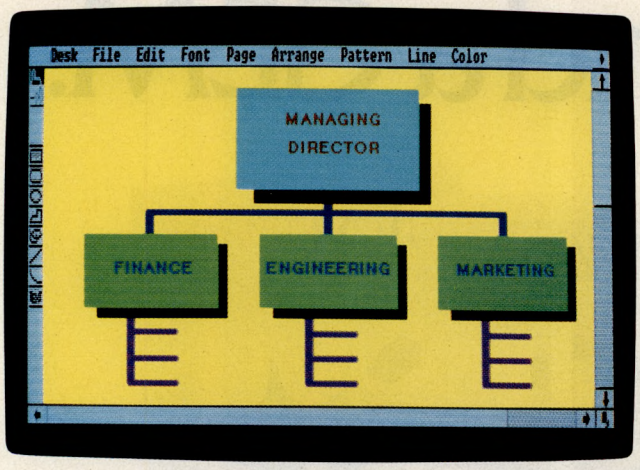


**GEM DRAW**
*A perfect illustration of the power of GEM software.*




**GEM WORDCHART**
*Present it with style.*

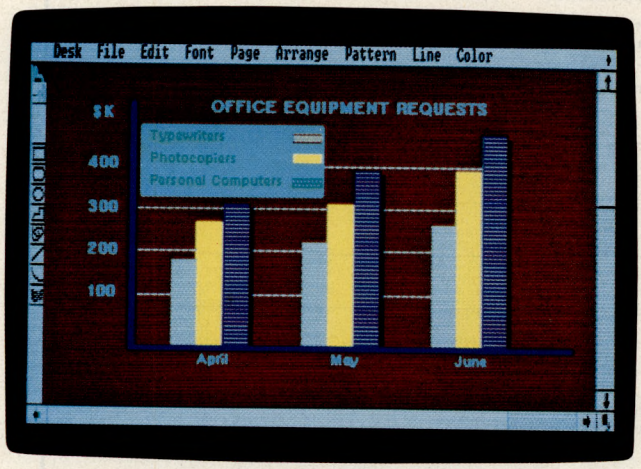


**GEM GRAPH**
*Let's look at the numbers.*

Best of all, GEM WRITE and GEM PAINT work together. So you can work with words and pictures on the same page.

You can also create anything from fine art to line art, whether you can draw or not.

Just put your hand on your mouse and point.

GEM DRAW™ gives you all the tools you need.

Like pencils, geometric patterns, a full palette of colours and an extensive gallery of art to use as you like.

And once you've created a GEM DRAW image, you can stretch it. Shrink it. Duplicate it. Or add text to explain it.

GEM WORDCHART™** is the perfect way to make your point in a big way.

With a choice of several type styles and sizes, plus up to sixteen colours, you can build charts that can be read from across your desk or from the far end of the conference room.

And to really drive your point home, your words can be combined with pictures from GEM DRAW.

The business of creating business graphics has just become a whole lot easier.

GEM GRAPH™** lets you turn numbers into something more tangible. Like pie charts. Bar graphs. Line plots. Even maps. All through the use of simple, well-designed templates.

Where do you get the numbers?

Directly from the business programs you're already using, like Lotus 1-2-3, Symphony, dBASE III or whatever.

**GEM WORDCHART and GEM GRAPH; available September 1985.

# Where to find a GEM.

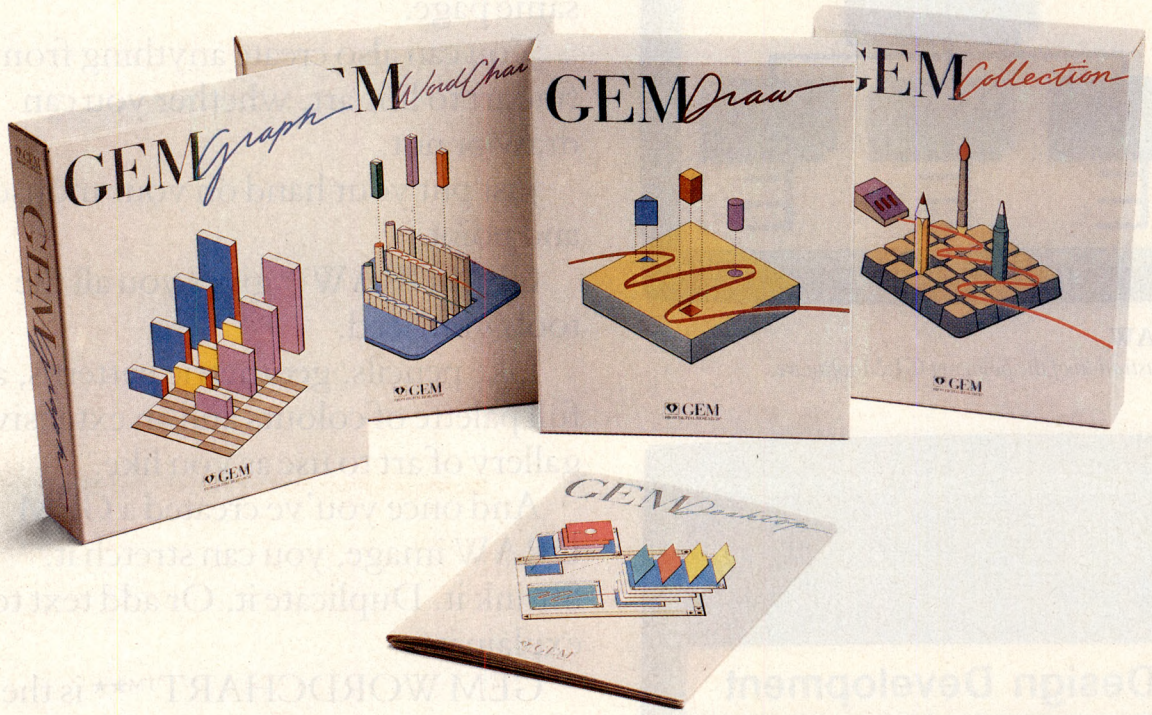


In the months ahead you'll be seeing GEM software on a lot of familiar faces. And not just IBM PCs.

Several leading computer manufacturers are building GEM software right into their hardware.

And with so many systems working with GEM, you'll soon see important GEM programs coming from a host of other major software houses.

GEM. From Digital Research.

It's not just software. It's a movement.

And it's as easy to buy as it is to use.

**1.** Just call (0635) 35354 and quote your credit card number.
or **2.** Post the order form with payment
or **3.** Contact your local IBM PC dealer

Because with GEM, the best new computer on the market isn't a computer at all.

Please supply the following:

| | *Price* | *P&P + VAT* | *Unit Cost* | *Qty.* | *Total* |
|---|---|---|---|---|---|
| GEM Desktop | £49.50 | £10.45 | £59.95 | _____ | £_____ |
| GEM Draw* | £129.95 | £22.37 | £152.32 | _____ | £_____ |
| GEM Collection* | £129.95 | £22.37 | £152.32 | _____ | £_____ |
| Hercules Graphics Card™ | £365.00 | £60.00 | £425.00 | _____ | £_____ |
| PC Mouse™ | £149.00 | £26.00 | £175.00 | _____ | £_____ |

I enclose cheque/postal order for £_____

Name_____

Company_____

Address_____

_____

_____ Post Code_____

*PCW 1*

*Special introductory prices. Offers close 30.9.85.
Available September: GEM Graph – £179.95 and GEM Wordchart – £129.95.
Prices exclude P&P and VAT as applicable.

Note: All GEM software includes a **FREE** GEM Desktop.
In addition, GEM Collection includes GEM Paint and GEM Write.

Post to: **GEM Software,** Digital Research (UK) Limited, Oxford House, Oxford St., Newbury, Berks. RG13 1JB. (Please allow 14 days for delivery)

GEM

DIGITAL RESEARCH®
We make computers work.℠

**GEM requires that your computer has appropriate graphics capability and that the pointing device is compatible. Call for exact requirements. GEM, GEM COLLECTION, GEM DESKTOP, GEM WRITE, GEM PAINT, GEM DRAW, GEM GRAPH and GEM WORDCHART are trademarks and Digital Research is a registered trademark of Digital Research Inc. Other computer and software names are tradenames and/or trademarks of their respective manufacturers.* *Copyright 1985, Digital Research Inc. All rights reserved.*

***Write programs to unlock the multitasking power of your QL!***
*Choose the language you need from Metacomco's unrivalled range of high-quality languages for the QL: The best selling **ASSEMBLER**; The language of the future, **LISP**; and two professional compilers, **BCPL** and **PASCAL**.*

# RELEASE THE POWER OF THE QL

## QL PASCAL £89.95 INC. VAT

**Newly available, a true Pascal compiler for the QL! Developed by Metacomco: leaders in Pascal - the first software house to achieve full ISO validation of a Pascal compiler for the 68000. QL Pascal is a high specification implementation of this popular language, endorsed by Sinclair Research for use on the QL.**

> True compiler producing native 68000 code: compact and efficient.
> Fast, single pass compilation without intermediate stages.
> Complete implementation of ISO 7185 - the international standard for Pascal - making it ideal for commercial and educational use.
> Direct addressing of the full QL address space.
> Key routines provided on ROM for extra speed and convenience.
> No run time licences required for commercial applications written using QL Pascal.
> Any length variable names and full 32-bit integers.
> Easy to use interfaces to QL windows, graphics, traps, screen handling, file operations, etc.
> Will handle very large sets and arrays.
> Approved by Sinclair Research for use on the QL.

NEW

## ASSEMBLER £39.95 INC. VAT

A high specification macro assembler supporting the full Motorola instruction set.

Features: external references; absolute, position independent, and relocatable code; linker; precise error messages; formatted listings; macro expansions; conditional assembly; and a large range of directives.

## BCPL £59.95 INC. VAT

A true compiler, ideal for systems programming - writing utilities, games and applications.

Features: generates native 68000 code; run time library includes easy QDOS interfaces; link loader links separately compiled segments; modules can be linked with Pascal or assembler.

## LISP £59.95 INC. VAT

A LISP interpreter for exploring "The language of artificial intelligence".

Features: Turtle graphics; compatible with LISP for the BBC micro; full support of QL features; structure editor; prettyprinter; garbage collector and tracer.

Every DEVELOPMENT KIT includes Metacomco's popular screen editor, and a detailed manual.

The Metacomco Development Kits are available from W.H. Smith, John Lewis, HMV, Menzies, Boots and other leading retailers, or direct from Metacomco.

METACOMCO

26 Portland Square, Bristol BS2 8RZ.
Tel: Bristol (0272) 428781

QL and QDOS are the trade names of Sinclair Research Ltd.

NAME _____

ADDRESS _____

_____

POSTCODE _____

TEL. NO. _____

SIGNATURE _____

Phone today or post this coupon to: Metacomco, 26 Portland Square, Bristol BS2 8RZ. Please send me:

Assembler Development Kit £39.95 ___
LISP Development Kit £59.95 ___
BCPL Development Kit £59.95 ___
QL PASCAL Development Kit £89.95 ___

I enclose a cheque for £_____ or debit my ACCESS/VISA Account No.

_____ CARD EXPIRY DATE: _____

Price includes VAT, postage and packing UK mainland only. Delivery, allow up to 28 days.

PCW9

# MICROCOMPUTER RENTAL

From Micro-Rent, Britain's top-value specialist in microcomputer rental.

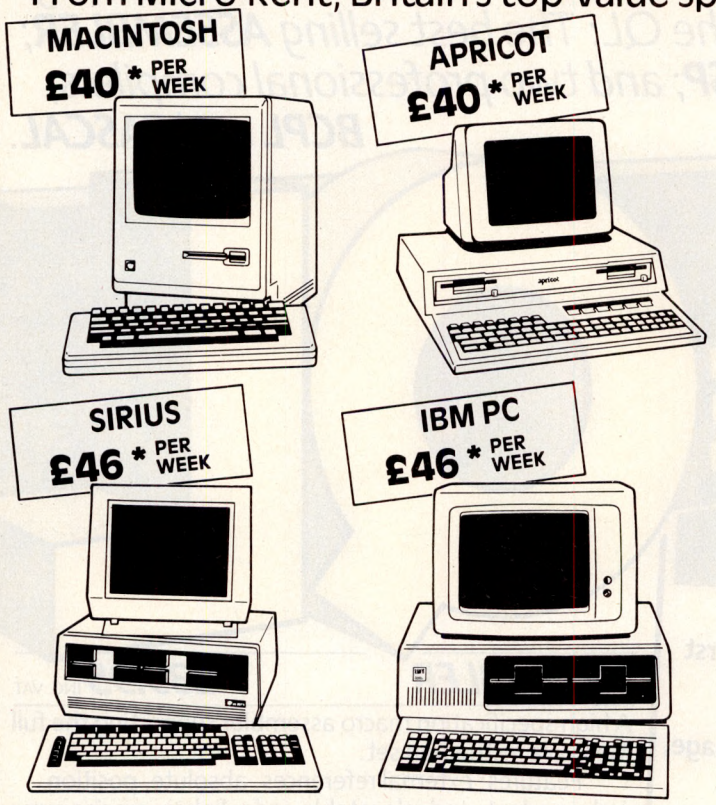


- **Try before you buy**
- **Flexible terms — weekly, monthly, annual**
- **No capital outlay/immediate delivery**
- **Purchase option with rebate of rental**

Micro-Rent is Britain's top-value microcomputer rental specialist. You can hire on a short term basis, and give the leading machines a thorough trial in your own office, before deciding on the right one for your needs.

If you already use a micro, Micro-Rent can supply additional machines for short-term projects, or to cover breakdowns. Extra printers or monitors also available.

Micro-Rent is independent of any manufacturer, and offers expert impartial advice on all aspects of microcomputer use.

**CALL TODAY 01-833 2531**

*Prices quoted are based on 3-month rental, excluding VAT.

**OSBORNE APRICOT**
**IBM PC APPLE IIe**
**SIRIUS LISA**
**MACINTOSH**

MICRO·RENT
**127 Cloudesley Road, London N1**

# MICRO-RENT

# Try a Macintosh for a month!




## Micro-Rent makes it easy to try the world's friendliest computer.

Macintosh is the personal computer that surprises everyone — because it is so easy to use, and so amazingly versatile with its range of software.

Now Micro-Rent makes your introduction to simple, fuss-free business computing even easier. Rent a Mac for a month from Micro-Rent for just £175 — including software!

This special offer lets you evaluate Macintosh in your own office and give it a full-scale trial before you decide whether to buy one.

And if you do decide to buy, Micro-Rent even refund your month's rental! Phone now — offer subject to machine availability, closes May 31.

**Micro-Rent, Britain's leading business computer rental specialists.**

**CALL TODAY 01-833 2531**

MacWrite **Word processing** MacPaint **Graphics**

MICRO·RENT **Authorised Apple Dealer.**
**127 Cloudesley Road, London N.1.**

dBASE II

dBASE III

Training
Programming
Software

ASHTON-TATE
FRAMEWORK
Framework. For Thinkers.

LANTECH
Information Systems
55 Peascod Street
Windsor, Berks
Tel: Windsor
58182/58013

**KINGSLEY ENTERPRISES**

*Organise your files on CenTech Colour discs*

*Specialists in all kinds of floppy diskettes*

ALL PRICES ARE EXCLUSIVE OF VAT

**Dot matrix Printers**

| | | |
|---|---|---|
| ADMATE | ADM-80 F/T Parallel | £185.00 |
| | ADM-0 RS232 I/Face Option | £41.00 |
| BROTHER | HR5 Portable Thermal Transfer (P) | £140.00 |
| | HP5 Portable Thermal Transfer (S) | £140.00 |
| | EP44 Thermal Transfer K.S.R. | £200.00 |
| | M1009 (P) 50cps | £165.00 |
| EPSON | P-40 Thermal Transfer (PX8) | £75.00 |
| | P-40 RS232 I/Face | £75.00 |
| | P-40 Parallel | £75.00 |
| | P-80 Parallel | £140.00 |
| | P-80 RS232 | £140.00 |
| | RX-80(T) 100cps | £220.00 |
| | RX-80(F/T) 100cps | £250.00 |
| | FX-80 160cps | £375.00 |
| | FX-100(F/T) 160cps | £500.00 |
| SEIKOSHA | GP-50A 40cps | £90.00 |
| | GP-100P 50cps | £135.00 |
| | GP-100S 50cps | £135.00 |
| | GP-100VIC 50cps | £135.00 |
| | GP-500A 50cps | £160.00 |
| | GP-250X 50cps | £190.00 |
| STAR | STX-80 Thermal Transfer | £135.00 |

**Daisywheel Printers**

| | | |
|---|---|---|
| BROTHER | HR1 Parallel 16cps | £260.00 |
| | HR1 RS232 16cps | £260.00 |
| | HR15 Parallel 20cps | £390.00 |
| | HR15 RS232 20cps | £390.00 |
| | HR25 Parallel 25cps | £660.00 |
| | HR25 RS232 25cps | £660.00 |
| | EM101 Typewriter (P) 20cps | £790.00 |
| | EM101 Typewriter (S) 20cps | £790.00 |
| SMITH CORONA | TP1 Daisywheel Parallel 12cps | £170.00 |
| | TP1 Daisywheel RS232 12cps | £170.00 |

**Disk Drives**

| | | |
|---|---|---|
| CUMANA | CSX 100K 40 Track SS (no PSU) | £100.00 |
| | CSX 200K 80 Track SS (no PSU) | £130.00 |
| | CS 100K 40 Track SS | £130.00 |
| | CS 200K 40/80 Track SS | £150.00 |
| | CD 200K 2×40 Track SS | £235.00 |
| | CD 400K 2×80 Track SS | £285.00 |
| | CD 800K 2×40/80 Track DS | £345.00 |

Please ADD £5.00 Postage on Printers, Disk Drives and Software.

KINGSLEY ENTERPRISES
87 Whitefield Road
Stockton Heath
Warrington
WA4 6NB

Tel: 0925 64207

**Diskette Prices per box of 10 Diskettes**

| | | 1 box | 2-4 | 5-9 | 10+ |
|---|---|---|---|---|---|
| 3" HITACHI | SS/DD 96 | 41.00 | 39.00 | 38.00 | 37.00 |
| 3.5" SONY | S/DD 96 | 32.50 | 29.20 | 28.40 | 27.60 |
| | DS/DD 96 | 44.60 | 40.00 | 38.80 | 37.70 |
| 5.25" BASF | SS/SD 48 | 13.13 | 11.81 | 11.48 | 11.16 |
| | SS/DD 48 | 16.25 | 14.63 | 14.22 | 13.81 |
| | DS/DD 48 | 19.38 | 17.44 | 16.95 | 16.47 |
| | SD/DD 96 | 20.63 | 18.56 | 18.05 | 17.53 |
| | DS/DD 96 | 23.75 | 21.38 | 20.78 | 20.19 |
| 5.25" CENTECH | DS/HD 96 | 41.88 | 37.69 | 36.64 | 35.60 |
| | SS/DD 48 | 18.29 | 16.46 | 16.00 | 15.54 |
| | DS/DD 48 | 24.25 | 21.83 | 21.22 | 20.61 |
| | SS/DD 96 | 24.25 | 21.83 | 21.22 | 20.61 |
| 5.25" CUMANA | DS/DD 96 | 32.06 | 28.86 | 28.05 | 27.25 |
| 5.25" DYSAN | DS/DD 96 | 16.25 | 14.63 | 14.22 | 13.82 |
| | SS/DD 48 | 18.13 | 16.31 | 15.86 | 15.41 |
| | DS/DD 48 | 26.50 | 23.85 | 23.19 | 22.53 |
| | SS/DD 96 | 26.50 | 23.85 | 23.19 | 22.53 |
| 5.25" NASHUA | DS/DD 96 | 33.63 | 30.26 | 29.42 | 28.58 |
| | SS/DD 48 | 11.65 | 10.48 | 10.19 | 9.80 |
| | SS/DD 48 | 12.44 | 11.20 | 10.88 | 10.57 |
| | DS/DD 48 | 14.74 | 13.27 | 12.90 | 12.53 |
| | SS/DD 96 | 15.55 | 13.99 | 13.61 | 13.22 |
| 5.25" SCOTCH-3M | DS/DD 96 | 17.09 | 15.38 | 14.95 | 14.53 |
| | SS/DD 48 | 15.63 | 14.06 | 13.67 | 13.28 |
| | DS/DD 48 | 19.38 | 17.44 | 16.95 | 16.47 |
| | SS/DD 96 | 23.13 | 20.81 | 20.23 | 19.66 |
| | DS/DD 96 | 25.00 | 22.50 | 21.88 | 21.25 |

1 Box — Postage Included
Please ADD the following Postage, per Diskette ORDER:—
2-4 Boxes £1.00, 5-9 Boxes £2.00, £2.50 per 10 Boxes
Also available 8", hard sector and preformatted diskettes

Sample Software Prices (IBM PC):

| | |
|---|---|
| Framework | £350 |
| Friday | £130 |
| dBaseII | £245 |
| dBaseIII | £350 |
| dBaseII/III | £100 |
| CIS Cobol 86 | £490 |
| Lotus 1-2-3 | £300 |
| Symphony | £415 |
| Wordstar Prof. | £275 |
| MS Chart | £180 |
| MS Project | £180 |
| MS Word | £275 |
| Multimate | £230 |
| Open Access | £330 |
| SuperCalc III | £205 |

**MAIL ORDER ONLY**

# Would you like to have Power?

While all the rest are in the dark.




Meet the POWER BANKS

**THE UNINTERRUPTIBLE POWER SUPPLY systems**

**that are the complete answer to ALL of your problems!**

**With the POWER BANK "BLACK OUTS" will not affect the operation of your computer system.**

**Micro Systems, Networks, Hard Disks, Printers, Telephone Exchange, Data Transmissions etc.**

* Output derived constantly from self contained sealed for life batteries.
* Sine wave shaped output – voltage and frequency closely regulated.
* Genuine "NO BREAK" unit with continuous output ratings of 500-250 & 120VA.
* Much more than a "spike and surge" suppressor.
* Far superior to a voltage stabilizer.
* Overload and short circuit (output) indication and protection.
* Bench or rack mounting (500VA).
* Battery level monitored – mains on – mains off indication.

**could you bank on that much power?**

MANUFACTURED BY:- **POWER TESTING (UPS) LIMITED**

23 Tallon Road, Hutton, Brentwood, Essex CM13 1TE Tel: Brentwood (0277) 233188. Telex 24224 MONREF 586

# *** CUT PRICE MICROS ***

PLUS



**PEGASUS BUSINESS SOFTWARE**

**APRICOT MICROCOMPUTERS**

ACT Xi 10 MEG £(VERY LOW!!)
ACT Xi 5 MEG £(EVEN LOWER!!)
ACT 2x720K £(LOWER THAN MAYFAIR)
ACT 2x315K £(LOW-LO-LO)
12" MONITORS AVAILABLE

## THE PEGASUS SYSTEMS

### SYSTEM 1

APRICOT WITH 2 x 720K PLUS 12" MONITOR
PLUS SUPERWRITER WORDPROCESSING PROGRAM
PLUS SUPERCALC FINANCIAL FORECASTING PROGRAM
PLUS SUPERPLANNER ELECTRONIC DIARY AND CARDBOX SYSTEM

PLUS PEGASUS SALES ORDER PROCESSING/INVOICING
PLUS PEGASUS SALES LEDGER
PLUS PEGASUS PURCHASE LEDGER
PLUS PEGASUS NOMINAL LEDGER

PLUS DATA CABLE TO LINK PRINTER TO COMPUTER
PLUS 20 3.5" DISKS
PLUS BROTHER HR15 DAISY WHEEL QUALITY PRINTER

**SYSTEM PRICE £2796.00**

### SYSTEM 2

APRICOT WITH 10 MEGABYTE HARD DISK DRIVE AND 12" MONITOR
WITH SUPERWRITER FOR WORD PROCESSING
WITH SUPERCALC FINANCIAL FORECASTING SPREADSHEET
WITH SUPERPLANNER ELECTRONIC DIARY SYSTEM

PLUS EPSON FX80 PRINTER
PLUS DATA CABLE TO LINK PRINTER TO COMPUTER
PLUS 10 3.5" DISKS
PLUS 1 BOX OF FANFOLD PAPER

PLUS ANY 4 MODULES OF PEGASUS ACCOUNTING SOFTWARE

**SYSTEM PRICE £3596.00**

WE CAN RECONFIGURE ANY PACKAGE TO SUIT YOUR INDIVIDUAL NEEDS. WE PROVIDE HOT-LINE SUPPORT, SERVICE, DATA INSURANCE & ON-SITE MAINTENANCE

## THE APRICOT SYSTEMS

| | |
|---|---|
| APRICOT Xi 10 MEG | APRICOT 2x720 |
| SUPERWRITER | 12" MONITOR |
| SUPERCALC | SUPERWRITER |
| SUPER PLANNER | SUPERCALC |
| BASIC/MS-DOS/CPM-86 | SUPER PLANNER |
| FX100 PRINTER & CABLE | ANY PRINTER |
| BOX OF DISKS | WORTH UP TO £400 |
| BOX OF PAPER | |
| £2800 | £1996 |

## SOFTWARE – UP TO 30% DISCOUNTS

| | |
|---|---|
| WORDSTAR | CARDBOX |
| FRIDAY | DBASE III |
| DBASE II | AUTOCODE |
| OPEN ACCESS | LOTUS 1-2-3 |
| SYMPHONY | SUPERCALC II |
| TOUCH & GO TYPING TUTOR | MULTIPLAN |
| SUPERCALC III | FRAMEWORK |

OUR FULL SOFTWARE RANGE IS FAR TOO LARGE TO INCLUDE HERE PLEASE CALL US FOR CURRENT PRICES ON ANY SOFTWARE PRODUCT

ALL ITEMS ARE FULLY SUPPORTED AND GUARANTEED. CALL NOW FOR FREE ADVICE FROM OUR APPLICATIONS EXPERT. TRAINING IS ALSO AVAILABLE ON ANY PROGRAM OR COMPUTER.

WE OFFER FREE TRAINING WITH ANY TOTAL PEGASUS SYSTEM BOUGHT FROM US. OUR SYSTEMS ARE SOLD ON AN INSTALLED AND WORKING BASIS. WE CAN DELIVER TO ANY PART OF THE U.K. OR COURIER TO ANY TRADING COUNTRY IN THE WORLD.
VAT NOT INCLUDED IN ABOVE PRICES.

**BUY RENT OR LEASE FROM THE PROFESSIONALS**



*We are authorised dealers for the above*

**TEL: 01-800 8182**
**78-82 KIRKTON ROAD**
**LONDON N15**

**MCS**

# BIZZELL'S BLOCKBUSTER BARGAINS

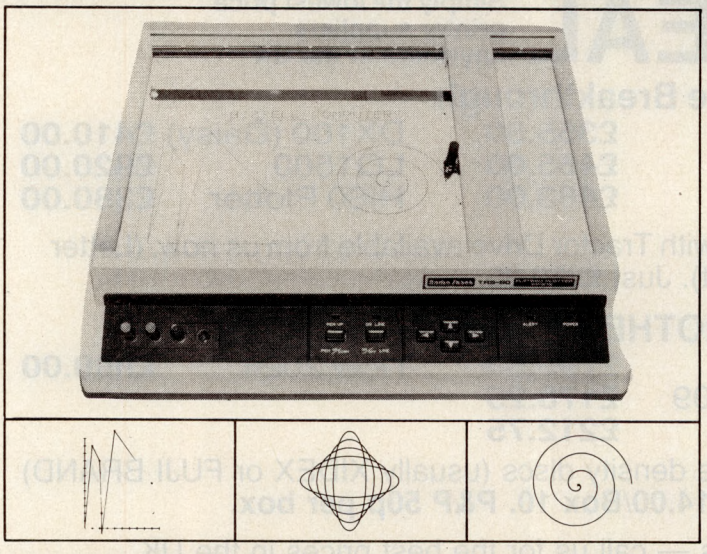

HIGH SPEED, HIGH QUALITY, FOUR COLOUR, FLATBED.

## PRINTER/PLOTTER Only £399

- Prints horizontally or vertically in text.
- Prints four directions and 255 sizes in graphics.
- Plotting area 298×216 mm.
- Plotting speed 100mm/sec.
- Step size 0.1mm.
- Self test and auto functions.
- Red, Green, Blue and Black.
- Parallel and RS232C interfaces.
- Full guarantee.
- BASIC ASCII command codes and parameters.
- Full manual (cassette and commands for BBC Micro).

Ideal for graphs, drawings, symbols, axes, geometric patterns, charts, diagrams, circuits, computer art, flowcharts, 3-D, contours etc.

## RD DIGITAL TRACER



Produce illustrations on your computer simply and easily using the tracer to copy existing material. Simply run the tracer head over anything you want to produce. Complete with full instructions, manual and software. BBC **£69.95** SPECTRUM **£59.50**

## MIDWICH DISC DRIVES

400k, Double Sided, 40/80T switchable.
Single drive **£175**
Dual drive **£295**

## UCHIDA DWX 305

Daisywheel printer **£295**

## LEADS

BBC Printer/Plotter **£10**
Commodore Vic 20 Interface **£40**
QL Interface **£30**

SEE US AT

THE THIRD OFFICIAL ACORN USER EXHIBITION

25th-28th July 1985
Barbican Centre
London EC2

## TEACHERS AND PARENTS

Send for FREE educational software catalogue covering all ages from pre-school to 'A' level. All programs listed and described.
All prices include VAT and delivery. UK mainland. Access card holders can ring to place order. Write with order and cheque (stating computer) to:

**BIZZELL COMPUTERS**
**WALNUT TREE HOUSE,**
**FORNCETT ST. PETER,**
**NORWICH NR16 1HR.**

**PERSONAL CALLERS WELCOME (10.00-5.00) Phone for appointment (095389-592)**

# Comprehensive Interface System

## for Apple II and IBM PC

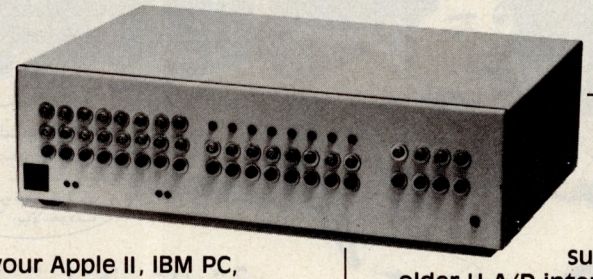

Our new comprehensive system includes 32 parallel I/O lines, timers, 8 or 16 channel 12 bit A/D and 4 channel 12 bit D/A but it only takes up one slot in your Apple II, IBM PC, U-MAN Series 1000 or compatible. It is modular and has advanced features such as software control of gain **and** channel. The complete system for the IBM PC costs £600 plus VAT.

We also offer a number of other interfacing cards including a 48 bit parallel I/F card for the PC, 8 port serial cards for the Apple and other items. Our new leaflet 'Interesting Interfaces' covers these and the Cif system.

### ACQSOFT

A complete data acquisition software suite for use with Cif (or our older U-A/D interface). Features include:

- Automatic measurement
- Flexible handling and powerful numeric processing of readings.
- Graphical presentation on screen, printer or plotter.

This package for the Apple IIe or Apple II+ costs £500 and is fully described in our new brochure 'Interesting Interfaces'.

# U-MICRO

**U-Sci Ltd.** Our software subsidiary produces both custom software and standard packages (GC and IR) for laboratory applications of micros.

U-Microcomputers Ltd. Winstanley Industrial Estate, Long Lane, Warrington, Cheshire, WA2 8PR.
Telephone: 0925 54117 Telex 629279 UMICRO G

# KIRKLANDS BUSINESS SYSTEMS LTD

## PRINTER

# SUPER DEAL

**Simply the lowest price printer suppliers anywhere in the UK**

### EPSON Price Breakthrough

| | | | | | |
|---|---|---|---|---|---|
| RX80 | **£210.00** | FX80 | **£355.00** | DX100 (Daisy) | **£410.00** |
| RX80FT | **£245.00** | FX100 | **£465.00** | LQ1500 | **£920.00** |
| RX100 | **£375.00** | JX80 | **£483.00** | HI80 Plotter | **£380.00** |

**STOP PRESS:** The new Epson LX80 with Tractor Drive available from us *now*. (Letter quality print). Just **£250.00**

### Beautiful BROTHER Printers

| | | | | | |
|---|---|---|---|---|---|
| HR5 | **£148.35** | HR35 | **£793.50** | New 2024 | **£900.00** |
| HR15 | **£378.35** | New M1009 | **£178.25** | | |
| HR25 | **£631.35** | EP44 | **£212.75** | | |

**LOOK:** Now Available. Double sided double density discs (usually XIDEX or FUJI BRAND) with our own labels. **ONLY £14.00/Box 10. P&P 50p per box.**

We also stock all printer peripherals — call us for the best prices in the UK

**All prices include VAT. P&P Next day: £12.00 or £8.00 for normal service. Educational orders welcome**

*All products carry a FULL 1 YEAR WARRANTY. Shop hours: 9.00-5.30 Mon-Fri*

## KIRKLANDS BUSINESS SYSTEMS LTD

**KIRKLAND HOUSE, 27 CITY ROAD, STOKE**

**Tel: 0782 414333**

---

# لتزويد منازلكم بوسائل حديثة للمعرفة

**٩٩٥ ريالاً**

أسعار جديدة

كمبيوتر عرب رام

اشر على الجواب الصحيح

DOOR ALSO
TAPE RICH
WEAK BELL

وصلت حديثاً..
- أجهزة (QL) بمبلغ ١٩٩٥ ريالاً سعوديًا
- عرب رام ٤٠٠ ريال سعودي
- ذاكرة سعة ٤٨ كي ٦٩٥ ريالاً سعوديًا

## أدخل وعائلتك عالم الوسائل التعليمية والترفيهية الحديثة..

باللغتين العربية والانجليزية.. باقتناء أجهزة الكمبيوتر سنكلير عرب رام الملونة الرائعة..
كمبيوتر سنكلير جهاز مدمج ومحكم الصنع.. يمكن لأى شخص استخدامه في المجالات التعليمية - العملية - الترفيهية..

**لغة كمبيوتر خاصة سعودية** يمكن توصيله بأى جهاز تليفزيون أو تسجيل.
ذاكرة سعة ٤٨ كي - مع كمية من عناصر البرمجة التشغيلية، الكتب، معدات إضافية لاستعمالات عديدة.

## سنكلير

أكثر أجهزة الكمبيوتر شعبية في العالم العربي

| | | | | | |
|---|---|---|---|---|---|
| الرياض | ٤٠٥٤٩٨٥ | بريدة | ٣٢٤٢٧٣٦ | الكويت | ٤١٢٤٠٤ |
| مكة المكرمة | ٥٤٤٥٦٢٣ | عنيزه | ٣٦٤٤١٩٢ | بيروت | ٣١٣٩٥١ |
| الخبر | ٨٦٤٦٧٨٧ | الطائف | ٧٤٥٣٢٨٧ | قطر | ٤٢٨٥٥٥ |
| الخبر | ٨٩٥٢٩٩٨ | الطائف | ٧٦٤١٥٦٠ | البحرين | ٢٥٣٤١٦ |
| الدمام | ٨٤٢٠٢١٥ | بريده | ٣٢٣٥٠٦٢ | دبي | ٢٣١٥٨١ |
| الخرج | ٥٤٤٢٦٦٦ | المدينة المنورة | ٨٣٨٦٦٨٣ | عمان | ٧٠٣٧٧٧ |
| | | | | طرابلس | ٦٢١٢٢١ |
| | | | | لندن | ٨٠٢١٢٣٨ |

تليفون خاص لاستفسار السيدات فقط مكة المكرمة: ٥٤٥٢٥٩٢

جهاز الكمبيوتر الوحيد عرب رام الذى يباع ويصان فى المملكة العربية السعودية والشرق الأوسط بواسطة

**يصدر من المملكة العربية السعودية فقط..**




ص ب: ١٤٧ جدة (٢١٤١١) المملكة العربية السعودية
تليفون: ٦٦٥٣٧١٥ (٠٢) تلكس: ٤٠٢٢٧٦

# olivetti M24

Compatible & faster
then IBM PC



**SAMPLE SYSTEMS**

Integral Hard Disk, 1×360K Disk Drive Monochrome Display, Keyboard, Bus Converter (7 Slots) and MSDOS.

PRICES FOR SYSTEMS WITH

**20MB** Integral Hard Disk **£2799**

**10MB** Integral Hard Disk **£2699**

All systems include Graphic Display serial and Parallel Interfaces.

**01-453 0123**

**T.F.H. COMPUTERS**

**6 Sunbeam Road, Park Royal NW10**



# SHARP MZ-700 SERIES

# S.U.N.

**SHARPSOFT USER NOTES** are published three times a year and are totally dedicated to the MZ700. They contain program listings, editorial articles, readers letters and plenty of tips and hints on using the MZ700.

**SOFTWARE** Sharpsoft have the finest range of programs for the MZ700 from machine code arcade action games to programming aids, utillities and business applications.

**HARDWARE** We specialise in all periphals and accessories necessary for expanding your MZ700 system: Printers, Disc Drives, Hi-Res Graphics, Interfaces, Cables, Pens, Paper Rolls, Monitors etc . . .

**SHARPSOFT 'WITH THE SHARP USER IN MIND'**

Please send me: PCW/JLY

☐ USER NOTES '84 (UK) £3.00 ☐ USER NOTES '84 (OVERSEAS £6.00

Please join me for:

☐ USER NOTES '85 (UK) £3.50 ☐ USER NOTES '85 (EUROPE) £6.00

☐ USER NOTES '85 (OVERSEAS) £7.50

☐ Please send me more information on HARDWARE and SOFTWARE.

I own MZ711, MZ721, MZ731 (Please delete).

I enclose a Cheque/P.O. for £ _____ Access/Visa ___ /___ /___.

Name: _____

Address: _____

**SHARPSOFT LIMITED, 86-90 Paul Street, London EC2A 4NE**
**Tel: 01-739 8559**



# Oasis Products

## PRECISE ANALOGUE DATA ACQUISITION

**Now available for the Sinclair QL**

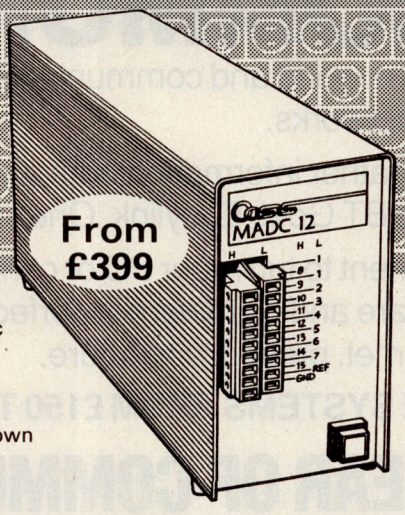


**Hardware and software systems for microcomputers: QL BBC IBM Apple**

Precision, fully programmable, calibrated and guaranteed hardware. 12 bit readings in 30usec – includes 4usec signal acquisition time – to 0.02 percent accuracy. 8 bit in 16usec.
16 high impedance inputs – 1Tohm – with 8 channel differential mode.
6 precision ranges as standard, + or – 10volt down to 1volt unipolar.
1mbyte per second data transfer rate.
Interface cards and cables provided

**Enhanced versions available:**
High speed version with 12 bit readings in 15usec, 8 bits in 10usec.
Analogue input isolation to 500Vrms maintaining full accuracy and speed.
32 channel systems.
Low cost Apple card based systems, from £349.

Full software support supplied:
– General purpose data acquisition package with easy user interface and interactive scan control and data file generation.
– Comprehensive product description to allow the hardware to de driven from your own software, either using the routines supplied or from your own low level routines to operate the analogue to digital process directly.
– Data file generation for export to existing spreadsheet or other post-processing software.

Custom hardware, software and systems solutions available on a consultancy basis.

**Peter Nelson**

**Design Consultancy**

The Street, Old Costessey, Norwich NR8 5DF Tel: 0603 747887

# I DON'T BELIEVE IT!!!!




***Save over £1000 on the***

## OLIVETTI M24

**+ 10 Meg Hard Disk**
**+ 640K RAM**

**ONLY £2450 (ex-VAT)**

Ask about our discounted software, delivered anywhere in the UK. Telephone for more information on York 0904 39449 — ask for David.

Why not visit us in York where history, culture and technology meet.

## MICRO-BRIDGE of YORK 0904 39449

**75 GOODRAM GATE, YORK, Nth YORKSHIRE**

# PC USERS

## DO YOU COMMUNICATE?

Turn your PC into a window on the world and communicate with the new world of electronic mail, databases and networks.

Send telexes around the world, gather information from a database and link to electronic mail networks such as BT Gold, Easylink, One to One, Prestel etc.

Modem House supply all equipment to turn your PC or compatible into a communicating machine. Software and Hardware is perfectly matched to ensure that all **YOUR** requirements are met, present and future.

**COMPLETE SYSTEMS FROM £150 TO £2500.**

## 1985 IS THE YEAR OF COMMUNICATIONS

**SO COMMUNICATE WITH MODEM HOUSE NOW!**

## MODEM HOUSE

IOLANTHE DRIVE EXETER DEVON EX4 9EA Tel: (0392) 69295

# The Disk to launch a thousand programs

Here it is at last. One disk that will prove to be the solution for many business problems. A disk which will allow you to develop your own programs. Exactly the way you want.

The disk contains one of the most revolutionary programs of the year. Sycero. No matter whether you are a computer novice or a seasoned programming professional, Sycero enables you to build any type of business program.

No matter what your business.

From traditional business applications like stock control, invoicing, database management and inventory to an unimaginable number of specific industry applications.

And the beauty of Sycero is that it takes no time at all to build a simple program for yourself. When you've built one, expanding it, or building other, more complex programs, is easy.

Once you start developing your own programs you'll wonder how you ever got on before. And no longer will you have to bend over backwards to make do because the program you bought off the shelf does things differently to the way you wanted.

No matter what your business, there's now one program for the job.

**SYCERO**

*The Businessman's Program Builder*




System C

System C Limited
Tel 0622 55142

TradeSoft
*The Progressive Software Company*

TradeSoft House
62 Weir Road, Wimbledon
London SW19 8UG
Tel: 01-879 1144 Telex: 8954072 TSOFT G

# LONDON COMPUTER CENTRE

# IBM PC, XT, AT

IBM Authorised Dealer

IBM PC, upgraded with 20 MB HARD DISK, 512 K RAM, CLOCK CALENDAR, SERIAL PARALLEL, MONO DISPLAY KEYBOARD **£2950**
OPTION AS ABOVE COLOUR **£3250**
25 MB EXTERNAL BACK-UP **£ 895**

## NorthStar™ DIMENSION



The IBM compatible
*Multi-user*
system (up to 12 users)
15Mb hard disk and 2 user stations
complete with VDU running IBM graphics
Each subsequent work station **£6,300**
(8088 CPU 128K RAM) **£1,450**

## apricot FULL RANGE

FI, X1-10, X1-10 S, X1-20 PRICES CALL
POINT 7 POINT 32

## SANYO

550: 2 x 160 K DRIVES + MONITOR **£ 795**
550: 2 x 800 K DRIVES + MONITOR **£1095**

FERRANTI: IBM COMPATIBLE
2 x 360 K DRIVES **£1249**
256 K RAM, MONO MONITOR

**PLOTTERS**

| | |
|---|---|
| HP 7470A 2 PEN | **£1125** |
| HP 7475 6 PEN | **£2085** |
| ROLAND DXY 880 8 PEN, HP COMPAT | **£820** |
| EPSON H1-80 4 PEN A4 | **£400** |

**MONITORS**

| | |
|---|---|
| KAGA 12" HI-RES RGB IBM | |
| IBM-PC | **£399** |
| ROLAND DG 14" COLOUR | **£375** |
| KAGA 12" MONO IBM | **£129** |

**HARD DISKS & STREAMERS**

**IBM, APRICOT, OLIVETTI, SANYO**
**External:-**

| | |
|---|---|
| 10 MB **£1295** | 30 MB **£2145** |
| 20 MB **£1545** | 40 MB **£2395** |
| Streamer 25 MB | **£895** |
| 20 MB + 20 Streamer | **£2950** |

**Internal:-**

| | |
|---|---|
| 10/20 MB | **£995/£1295** |
| 10 MB Streamer | **£850** |

**MODEMS**

| | |
|---|---|
| BUZZBOX | **£ 69** |
| MINOR MIRACLE | **£130** |
| THORN VX 433 AUTO DIAL/ANSWER | **£180** |

**LAP PORTABLE**

| | |
|---|---|
| NEC 8201 16 K | **£299** |
| EPSON RX-8 | **£795** |

## PRINTERS: PHONE FOR PRICES

| | | | |
|---|---|---|---|
| CANON PW 1080 | 160 CPS | JUKI 6100 | 18 CPS |
| CANON PW 1056 | 160 CPS | JUKI 6300 | 40 CPS |
| EPSON FX 80/100 | 160 CPS | TEC - 1500 | 25 CPS |
| EPSON RX 80/100 | 100 CPS | TEC - F 10 | 40 CPS |
| EPSON LQ 1500 | 24 PN | NEC - 2050 | 20 CPS |
| BROTHER 1024 | 24 PN | OUME 11-40/85 | 40/55 CPS |
| TOSHIBA 2100 | 24 PN | DIABLO 630 | 40 CPS |
| FUJITSU DLP 24 | 24 PN | FLOWRITER 1600 | 60 CPS |

**SOFTWARE:- WIDE RANGE OF CPM, PC DOS, MS DOS CALL FOR PRICES**

43 Grafton Way, London W1P 5LA (Opposite Maples)
Opening Hours: 10-7 Mon-Fri. 10.30-4 Sat.
01-387 4455 (4 lines) Telephone Answering Service After Office Hours
Telex: 8953742

DEMONSTRATIONS · SALES · SERVICE · SUPPORT



# MicroSight



**MicroSight I on the BBC model B includes:-**

- A CCTV camera with lens and tripod.
- MicroEye vision interface 256 x 300 resolution with 8 bit video plus all cables.
- Fully documented hardware and software.
- MicroSight software package with area perimeter routines as well as disk and printer dumps.
- Hi Res software package with mode O display, disk and printer dumps and thresholding.
- Package using mode 2 high quality display.

**MicroScale**
An image processing package with editing area and perimeter calculations, dimensioning, windowing, threshold and contrast setting.

**MicroEye**
Vision interface 256 x 300 resolution 256 grey levels with full documentation and software for BBC Sirius, IBM, Apple, RML, CBM etc.

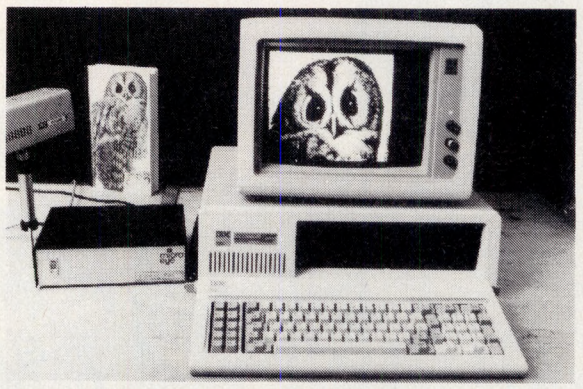

**MicroScale II**
Image analysis for the IBM PC with:-

- Object area measurement (absolute and %)
- Perimeter measurement to user defined scaling
- User definable and standard windows.
- Disk and printer dumps.
- Dimensioning and object counting.
- Fully documented C software.

Also available for Hewlett Packard and Sirius.

For further details contact:-

DIGITHURST The image analysis people

Digithurst Ltd.
Leaden Hill, Orwell, Royston,
Herts. SG8 5QH Telephone (0223) 208926

# THE UNIQUE MSX SYSTEM

Buy an MSX computer and you'll invest in the future system of home computing. MSX is the standard operating system that offers complete compatibility between the best names in computer hardware and software. As technology advances, MSX will be the computer link that keeps you right in touch.

# Five page feature...

As Sony continue to develop the latest in high technology products for your home, they have chosen MSX as the operating system for all their home computing products. They believe that any product which relies on software (record players, tape recorders, video recorders and computers) should, in the interests of both the consumer and the manufacturer, utilise the best system as the industry standard.

## THE SENSATIONAL SONY HIT BIT




A 64K MSX Computer with an exclusive, built-in Personal Data Bank (firmware). This handy facility enables you to enter, store, recall and up-date all kinds of personal information such as appointments, addresses, telephone numbers, etc.

Operation is simple, with instructions appearing on the screen every step of the process. **£299.95**

**KV1430 14" MONITOR STYLE, PUSH BUTTON CONTROL TRINITRON COLOUR TELEVISION** with front mounted RF terminal. **£239.95**

**JS 75 REMOTE CONTROL JOYSTICK** Play fast-action games from a distance without the encumbrance of cables with this quick-response remote control joystick. **£64.95**

**HBD50 MICRO FLOPPY-DISK UNIT** stores up to 360K bytes of information on a 3½" disk. Easily connected to the Hit Bit by using one of the expansion ports. **£349.95**

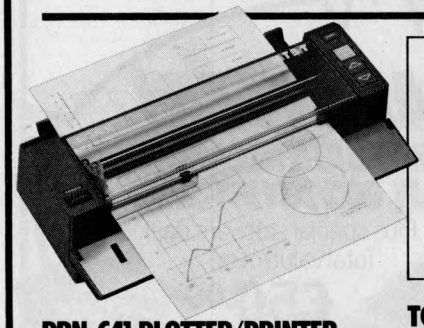

**PRN-C41 PLOTTER/PRINTER** This Plotter/Printer produces red, green, blue and black images and characters. Pen replacement is easy and it takes a wide choice of paper sizes.Including FREE 'greetings pack' software. **£249.95**



**TCM737 DATA RECORDER** A mains or battery operated recorder ideal for use with your home computer. **£39.95**

## DISK DRIVE OPTION

Upgrade any MSX computer for business applications with the addition of the Sony Disk Drive. Store up to 360k of information on each 3.5 inch disk and realise the fantastic potential of your MSX with this high speed data access facility.

**£349.95**




Data from the Personal Data Bank can be saved on any data storage facility including the **UNIQUE HB155 RAM CARTRIDGE**, available for **£39.95**



**JS55 JOYSTICK £19.95**

PRICES SHOWN INCLUDE VAT AND ARE CORRECT AT TIME OF GOING TO PRESS. E. & O.E.

**FOR DETAILS OF YOUR NEAREST STOCKISTS AND OTHER MSX PRODUCTS, SEE FOLLOWING PAGES.**

AXIS
AT HOME WITH TECHNOLOGY

# THE UNIQUE MSX SYSTEM ...unbeatable

The MSX system has been universally adopted by the major home electronics manufacturers. With the rapidly growing interest in the use of computers, each one

SANYO

With direct involvement in the growing use of computers in industry, Sanyo recognise the fantastic potential of the computer in the home.

Drawing on their vast experience in the provision of popular home electronic products, Sanyo have selected the MSX system as the new standard and immediately taken advantage of the superb graphics capabilities with the introduction of their unique light pen option.




## THE SUPERB MPC 100

This sophisticated piece of equipment offers all the advantages of 64K MSX computing. (Complete with 4 programme starter pack.) **£299.99**

Plus a unique optional feature –

**MLT001 LIGHT PEN** This provides you with unlimited flair and flexibility in colour graphics design. This feature comes complete with a software package containing some intriguing graphic facilities. **£89.99**

**CTP 4132 16" TELETEXT COLOUR TV MONITOR**
Advanced features include: black matrix 90° deflection tube, 30-function I.R. Remote Control, 8 programme tuning, AV terminals and Automatic Fine Tuning. **£349.99**

**DR202 DATA RECORDER**
Top of the range machine offering a host of high technology features. **£44.99**



**DR101 RECORDER** Specifically designed for use with personal computers, with phase shift switch, speaker monitor and AC/DC operation. **£34.99**

**DR201 DATA RECORDER** An AC only recorder styled for computer use with all controls conveniently placed on top of the machine for ease of use. **£34.99**

**JOYSTICK MJY 002** **£12.99**

## SPECIAL OFFER!

**SLIM 11 DATA RECORDER**
**MJY 002 JOYSTICK**
Plus special software pack.
Total value over:
**£50.00**




## FREE!

*When you purchase the Sanyo MPC 100 Computer.*

PRICES SHOWN INCLUDE VAT AND ARE CORRECT AT TIME OF GOING TO PRESS. E. & O.E.

**FOR DETAILS OF YOUR NEAREST STOCKISTS AND OTHER MSX PRODUCTS, SEE FOLLOWING PAGES.**

recognises the future potential of computer usage at home, for both entertainment and practical purposes.

That's why household names famous for superb quality and value have selected MSX as the one system to become the computer industry standard. Axis bring you the best names in MSX at the best possible prices.

# quality & choice...

**TOSHIBA**

Toshiba were the first to introduce MSX into the UK market. With their years of experience and their firm commitment to the home electronics industry, Toshiba recognise the potential of the computer in the home and have selected MSX as the realistic standard to work to.




**HX-P550 HIGH SPEED DOT MATRIX PRINTER** Printing at 105 characters per second, for fast copies of all information, including graphics symbols. Ideal for word processing and programme listing. **£349.00**

**HX-J400 JOYSTICK £12.95**

**140E MONITOR STYLE COLOUR TELEVISION** The perfect partner for the HX10, providing excellent picture and sound quality. **£189.95**

## THE STAR VALUE TOSHIBA HX10

Offering superb facilities and outstanding value for the first time user or enthusiast. 64K Ram, 16 colour graphics, RF, video and audio connectors, plus ports for printer, disk drive and data recorder. **£279.95** (For money saving offer see panel)

**HX-P570 PLOTTER PRINTER** Easily connected to the HX10 through the printer interface. This printer features image and character plotting in 4 colours – red, green, blue and black – making it ideal for colourful graphs, pie and bar charts. Plotting speed is 285 steps per second. **£249.00**



**SAVE £40**

off the normal Axis price of the Toshiba HX10 Computer

**PLUS 3 year guarantee**

**PLUS 3 Free software titles.**

*ALL FOR*

**£239.95**

DON'T FORGET TO ASK YOUR DEALER FOR DETAILS OF CREDIT FACILITIES, EXTENDED GUARANTEES, ETC. AVAILABLE ON CERTAIN ITEMS.

AXIS

AT HOME WITH TECHNOLOGY

# THE UNIQUE MSX SYSTEM ...unbeatable

The MSX System allows the experienced computer user to select, from a wide range of peripherals, all they need for any particular

## SAVE OVER £100**



## AXIS COMPLETE COMPUTING PACKAGE*

- **SANYO MPC 100** Computer
- **SANYO SLIM 10** Data Recorder
- **SANYO MJY 002** Joystick
- **SAMSUNG BT309K** B/W TV Monitor

**PLUS** £35 worth of software

**ONLY £324.95**

**Normal Axis price £425.75**

*Offers available only while stocks last ** AxisSaving refers to previous advertised prices or recommended retail prices.

## JVC

JVC invented the 'VHS' format for video recorders, so are well aware of the advantages of standardization.

They forecast MSX as the worldwide home computing standard and they see the video compatibility of their MSX as a key development path into the future.

## THE SPECTACULAR HC-7GB



The HC-7GB personal computer from JVC is a new MSX machine designed for total compatibility between other MSX machines and all MSX software. A highly advanced 64K machine, the HC-7GB has three display modes offering RF, composite video and RGB outputs.

The HC-7GB MSX personal computer from JVC is the final word in home entertainment. **£279.00**

**7255 GB 14" COLOUR TV MONITOR** A fully remote controlled TV, ideal as a computer monitor or alone as a second TV. **£259.00**

**HCJ 615 JOYSTICK £12.95**

**HC-R105 DATA RECORDER** The stylish designed HC-R105 data recorder is an example of a machine produced to offer superb user convenience, exceptional performance parameters and reliable data transfer. The HC-R105 is a high speed machine giving very short access times to data. **£89.00**

**FREE! JVC SOFTWARE PACK WHEN YOU PURCHASE THE AMAZING HC-7GB COMPUTER**




**"SPECIAL FOR VIDEO ENTHUSIASTS"**

*Add your own titles to your video films with the Character Generator included in the JVC free software pack.*

PRICES SHOWN INCLUDE VAT AND ARE CORRECT AT TIME OF GOING TO PRESS. E. & O.E.

**FOR DETAILS OF YOUR NEAREST STOCKISTS AND OTHER MSX PRODUCTS, SEE PREVIOUS AND FACING PAGES.**

application. But, in order to help those starting a new system, Axis have put together a special range of "Complete Package Deals" that contain everything needed to start in computing.

These "Complete Package Deals" are available to you at exclusive and unbeatable Axis prices.

# package deals



## SAVE OVER £115**

### AXIS COMPLETE COLOUR PACKAGE*

- **TOSHIBA HX10** Computer
- **TOSHIBA 140E** Colour TV Monitor
- **TOSHIBA HX-J400** Joystick
- **SANYO SLIM 10** Data Recorder

**PLUS** Assorted Software (value **£9.95**)

*Offers available only while stocks last
**Saving refers to previous Axis advertised prices or recommended retail prices.

**ONLY £399.95**

**Normal Axis price £517.75**

## AXIS BRINGS A GREAT DEAL TO THE INDEPENDENT DEALER

Axis is an organisation that brings you the best deals through your existing High Street dealer.

With an established reputation for personal service and care for their customers, Axis recommended dealers now bring you deals that no multiple can match.

Axis provide the resources to research and select high quality products and to make them available through the independent at unbeatable prices.

For "Exclusive Axis Deals" and the "Greatest Ever Care and Service", your nearest Axis recommended dealer is:

**AVON**

**BRISTOL** C.J. FREEMAN & CO. LTD. 47, High St., Portishead Tel: 0272 848180

**BEDFORDSHIRE**

**BEDFORD** TAVISTOCK HI-FI LTD. 21, The Broadway Tel: 0234 56323

**BERKSHIRE**

**SLOUGH** C.F. LAKE LTD. 37, Stoke Road Tel: 0753 38287

**WINDSOR** SONICS HI-FI LTD. 58 Grove Road Tel: 07535 60716

**BUCKINGHAMSHIRE**

**CHESHAM** D.L. CHITTENDEN LTD. 59-61, The Broadway Tel: 0494 784441

**HIGH WYCOMBE** C.F. LAKE LTD. 117/118 Oxford Road Tel: 0494 28605

**CHESHIRE**

**NORTHWICH** NORDIS LTD. 39, Chester Way Tel: 0606 3691

**CREWE** ROY TOWNSEND SOUND & VIDEO 2-4 Victoria Street Tel: 0270 213276

**CLEVELAND**

**STOCKTON N TEES** MCKENNA & BROWN LTD. 81, High Street Tel: 0642 679995

**DERBYSHIRE**

**DERBY** STUART WESTMORELAND 67, St. Peter's Street Tel: 0332 367546

**DURHAM**

**DARLINGTON** MCKENNA & BROWN LTD. 102, Bondgate Tel: 0325 59744

**EAST SUSSEX**

**EASTBOURNE** CLEARVIEW RENTAL 215, Seaside Tel: 0323 21646

**SEAFORD** CLEARVIEW RENTAL 34-40, High Street Tel: 0323 898989

**ESSEX**

**GRAYS** A.C.L. RADIO SERVICES LTD. 1, Northmall Tel: 0375 4666

**ILFORD** D. WOOLFMAN LTD. 76, Ilford Lane Tel: 01-478 1307

**CHELMSFORD** RUSH HI FI 5-6, Cornhill Tel: 0245 57593

**GRAMPIAN REGION**

**ABERDEEN** A & G KNIGHT 108, Rosemount Place Tel: 0224 630526

**LONDON & GREATER LONDON**

**WC1** HI-WAY HI-FI LTD. 67 Tottenham Court Road (Goodge Street) Tel: 01-637 9787

**W2** HI-WAY HI-FI LTD. 313–315 Edgware Road Tel: 01-723 5251 01-402 2441

**CROYDON** J & T ROBINSON LTD. 20, Norfolk House, George Street Tel: 01-681 2800

**SUTTON** LANDAU RADIO LTD. 195-197, High Street Tel: 01-643 0027

**HAMPSHIRE**

**BASINGSTOKE** SEWARDS 18, Paddington House, Bedford Walk Tel: 0256 65665

**KENT**

**GRAVESEND** BENNETT & BROWN 181-183, Windmill Street Tel: 0474 52919

**SHEERNESS** BRITTAIN & HOBBS. LTD. 22-24, High Street Tel: 0795 665551

**LANCASHIRE**

**PRESTON** GOODRIGHTS LTD. 1, Friargate Tel: 0772 57528

**BARNOLDSWICK** HARRY GARLICK (TV CENTRE) 1, Church Street Tel. 0282 813309

**BURNLEY** HARRY GARLICK (TV CENTRE) 10, Howe Walk Tel: 0282 37118

**LEICESTERSHIRE**

**WIGSTON** A.G. KEMBLE LTD. 63, Leicester Road Tel: 0533 881557

**LOUGHBOROUGH** STUART WESTMORELAND 33, Cattlemarket Tel: 0509 230465

**LINCOLNSHIRE**

**GRANTHAM** STUART WESTMORELAND 49, High Street Tel: 0476 78108

**NORFOLK**

**NORWICH** HUGHES TV & AUDIO 17-21, White Lion Street Tel: 0603 60935

**NORTHERN IRELAND**

**NORTH BELFAST** THE GRAMOPHONE SHOP 16 Donegall Square N Tel: 0232 240046

**NORTH YORKSHIRE**

**YORK** CUSSINS & LIGHT LTD. Kings Square Tel: 0904 55666

**NOTTINGHAMSHIRE**

**NOTTINGHAM** E.N.L. AUDIO VISUAL 116-118, Alfreton Road Tel: 0602 784015

**STAFFORDSHIRE**

**STOKE-ON-TRENT** ROY TOWNSEND SOUND & VIDEO 10, Trinity Street, Hanley Tel: 0782 289114

**STRATHCLYDE REGION**

**SALTCOATS** HARRIS OF SALTCOATS 104-106, Dockhead Street Tel: 0294 64330

**GLASGOW** ROBERT SMITH 136-140 Buchanan Street Tel: 041 248 5242

**SUFFOLK**

**IPSWICH** HUGHES TV & AUDIO 42, Buttermarket Tel: 0473 215093

**LOWESTOFT** HUGHES TV & AUDIO 62, London Road North Tel: 0502 85611

**SURREY**

**DORKING** DORKING AUDIO SYSTEMS 23, South Street Tel: 0306 882897

**W. GLAMORGAN**

**SWANSEA** RADIO SUPPLIES SWANSEA LTD. 80 Gower Road, Sketty Tel: 0792 204140

**WEST YORKSHIRE**

**HOLMFIRTH** FRANK PLATT ELECTRICAL Victoria House, 24, Victoria Street Tel: 0484 682036

**HALIFAX** FRED MOORE LTD. 15-17, Southgate Tel: 0422 67763

**BINGLEY** SPENCER & HILL LTD. 133, Main Street Tel: 0274 565161

Demand for some MSX products means supplies are limited. Please phone your dealer to check that he has stock available.

**Note: For your local stockists of particular products in this advertisement,**

## Ring Teledata 01-200 0200

**DON'T FORGET TO ASK YOUR DEALER FOR DETAILS OF CREDIT FACILITIES, EXTENDED GUARANTEES, ETC. AVAILABLE ON CERTAIN ITEMS.**

AXIS
AT HOME WITH TECHNOLOGY

# The complete computer store...

**Word Processing ■ Communications ■ Data Management ■ Business systems**

*Consultancy* *Installation* *Training* *Support*

| Business and Professional Systems (0223) 65334/5 | Engineering Support Group (0223) 316045 | Home and Educational Computing (0223) 358264 | Communications, Electronics, Supplies (0223) 68155 |
|---|---|---|---|

IBM apple digital ACORN COMPUTER hp HEWLETT PACKARD ICL

sinclair Tandy EPSON KAYPRO SANYO

**Cambridge Computer Store**

1 & 4 Emmanuel Street, Cambridge CB1 1NE




# HISOFT

## High Quality Microcomputer Software

**ULTRAKIT** is the most powerful interactive toolkit yet for ZX BASIC. All the features you will ever need:

AUTO BREAK COPY DELETE EDIT FIND GRAB HIDE INFORM JOIN KEY LOSE MOVE NUMBER ONERROR PUT QSEPARATE RAMTOP SUBSTITUTE TRACE UPDATE VARIABLES WARN CRUNCH1 CRUNCH2 REMKIL PACKER MAP UCASE LCASE CTIME ATIME ALARM PRINTER KMODE RESET and much more. It comes with a FREE tape header reader.

**C** combines high-level structuring with direct control over the machine, all at compiled speed. Our compiler is now available from good retailers, and has proved extremely popular. It supports all statement types (plus inline code) and over 40 operators; whilst char, int, unsigned and combinations using pointers, arrays, structures, unions, functions, and typedef are all allowed data types. External and static variables can have initializers, whilst auto variables support recursion. There are six preprocessor directives and over 60 library functions with a selective inclusion scheme.

**FONT 464** is an easy-to-use program enabling you to design, edit, and save your own characters and graphics for simple use in BASIC programs. There are 6 predesigned fonts and sophisticated printer-driving software which allows high-resolution screen dumps and letter writing on Epson compatibles or the DMP1.

**DEVPAC** is a complete machine code development package. It is the second one that many people buy, because after the first one they know what to look for! The 'front panel' debugger is the only way to really see programs in action, and assembly from multiple source files is fast enough to satisfy its most demanding users – ourselves.

**Pascal** is a valuable educational and development tool as well as running typically 40 times faster than a BASIC equivalent. Our compiler is an almost full implementation which compiles direct to machine code (no slow P-codes). Multiple file inclusion allows very large programs to be compiled.

**MON QL** is our latest product and our first on the QL; it was written by Andy Pennell, who has a great deal of experience on the QL. It is similar in style to the well-known MON 'front panel' in DEVPAC and includes additions like job control and multi-tasking support. It also catches system exceptions and includes fixes for QDOS.

**Product Price Table**

| | Pascal £ | DEVPAC £ | C £ | ULTRAKIT £ | FONT 464 £ |
|---|---|---|---|---|---|
| ZX Spectrum | 25-00 | 14-00 | 25-00 | 9-45 | |
| Amstrad CPC464 | 29-95 | 21-95 | | | 7-95 |
| MSX | 29-95 | 19-95 | | | |
| CP/M-80 | 39-95 | 39-95 | | | |
| Sharp | 39-95 | 25-00 | | | |
| Sinclair QL | | 19-95 (MON QL) | | | |

**All prices** are for cassette versions (except CP/M and QL) and include VAT and p&p in the UK. Please contact us for export orders, disc formats or detailed technical information packs. All products are available by mail order: please send a cheque or Postal Order. Sorry, we do not accept credit cards.

HISOFT

180 High Street North,
Dunstable, Beds. LU6 1AT
Telephone (0582) 696421



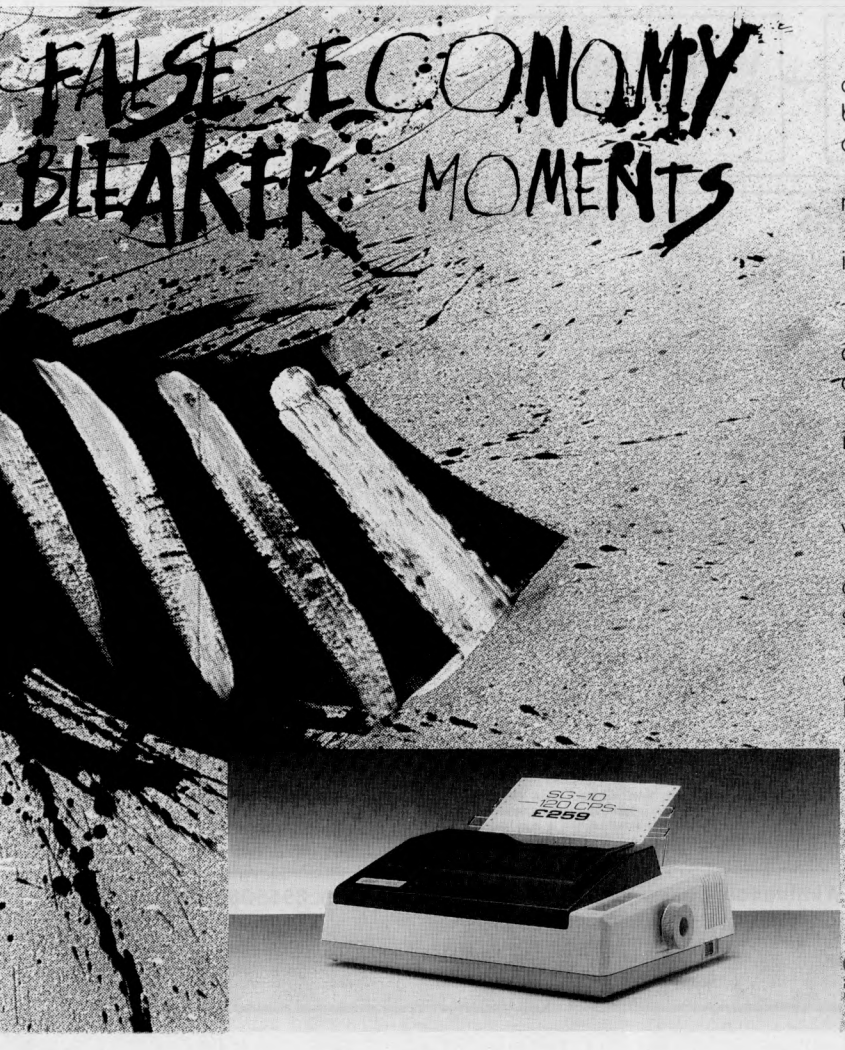


It can come as a rude awakening to a serious personal computer user that the printer he thought was such a bargain couldn't even handle his day-to-day correspondence.

Especially when £259 could have bought him Star's new SG-10.

A dot matrix printer that not only sets new standards in value and reliability, it offers outstanding print quality.

Compare the features for yourself:

☐ New Near Letter Quality font produces characters close to daisy wheel quality yet still offers a printing speed of 120 characters per second in draft mode.

☐ Easy interfacing with virtually all popular computers, including IBM PC's.

☐ Prints on single sheets and fan-folded paper.

☐ Printer memory of 2KB that can be expanded to 10KB with optional buffer board.

☐ Wide range of character sets and fonts. International characters, italics and proportional spacing can be selected on all modes.

Fill in the coupon for full details and see what made us one of the leading ranges of computer printers in the USA in only two years.

Please send me details of your comprehensive range of Star Computer Printers.

Name_____ Postion_____

Company_____

Address_____

CCI

star Star Micronics U.K. Ltd.,
Craven House, 40 Uxbridge Road, London W5

**WHEN WILL YOU BECOME A STAR WITH ONE OF OUR PRINTERS?**

# COMPUTERINE



ITALIAN FURNITURE

GAGLIARDI

**Gt Britain – Switzerland – Italy – U.S.**

- SEAT HEIGHT AUTOMATICALLY ADJUSTABLE
- COMPRESSED AIR ACTION
- BACK REST ADJUSTABLE, BOTH IN HEIGHT AND ANGLE
- EASY SPRING ACTION

**£115 plus P&P**

**509 KINGS ROAD, CHELSEA**
**LONDON SW10 0TX**
**Tel: 01-352 3663 Telex: 888142**

# PHONE Action line FOR

**MATRIX PRINTERS**

Mannesman Tally ■ NEC Pinwriter ■ OKI Microline ■ Epson ■ Digital Dataproducts Paper Tigers

**LETTER QUALITY AND LINE PRINTERS**

Uchida ■ Dyneer ■ Brother ■ NEC Spinwriter ■ Dataproducts full range

**VDUs AND MONITORS**

Televideo ■ Tatung ■ Digital ■ Hazeltine ■ Dyneer

**GRAPH PLOTTERS**

Hewlett-Packard ■ Gould

**PLUS A FULL RANGE OF COMPUTER FURNITURE**

GET ON OUR MAILING LIST— HUNDREDS OF GREAT BARGAINS EVERY MONTH

MANCOS COMPUTERS

TRADE WAREHOUSE Action line

0 1 8 4 0 5 6 6 6 0 6 1 8 6 1 0 7 5 7

TOP-LINE CHOICE / BOTTOM-LINE PRICES

Mancos Computers, Unit 3, Albany Road Trading Estate, Manchester M21 1BH

**NEED A COMPUTER** → **WHERE TO GO?** → **WORLDWIDE COMPUTERS** → **WHY?**

**THEY KNOW WHAT THEY'RE TALKING ABOUT**

IBM Authorised Dealer

**01-947 8562 & (0273) 609331**

## COMPUTERS

Apricot :-

| | |
|---|---|
| PC 256K RAM + 2 x 315K D/D | £1229.00 |
| PC 256K RAM + 2 x 720K D/D | £1379.00 |
| Xi10 256K RAM 10MB Winchester | £2099.00 |
| Fle 256K RAM 1 x 315K D/D | £799.00 |
| Fl 256K RAM 1 x 720K D/D | £899.00 |
| Point 7 512K RAM 10MB + Cluster | £2799.00 |
| Point 32 256K RAM 10MB F/Server | £2399.00 |
| Commodore C16 Starter Pack | £49.00 |
| Commodore Plus 4 | £79.00 |
| Commodore SX64 | £499.00 |
| Commodore PC | £1449.00 |
| Epson QX10 | £1299.00 |
| Epson PX8 | £649.00 |
| 128 K RAM Pak | £150.00 |
| IBM PC 64 1 x DD Mono | £1516.00 |
| IBM PC 64 2 x DD Mono | £1735.00 |
| IBM PC 64 10mbHD + 1 x DD Mono | £2366.00 |
| IBM PC 64 20mbHD + 1 x DD Mono | £2716.00 |
| IBM PC XT 10mbHD + 1 x DD Mono | £2822.00 |
| IBM Portable 1 x DD | £1699.00 |
| IBM Portable 2 x DD | £1950.00 |
| IBM Portable 10mbHD + 1 x DD | £2549.00 |
| IBM Portable 20mbHD + 1 x DD | £2899.00 |
| IBM PC AT 1.2mb x DD Mono | £2777.00 |
| IBM PC ATE 20mbHD + 1.2mb x DD Mono | £4734.00 |
| Sanyo MBC 550 1 x 160K D/D | £599.00 |
| Sanyo MBC 555 2 x 160K D/D | £699.00 |
| Sanyo MBC 5502 1 x 360K D/D | £799.00 |
| Sanyo MBC 5552 2 x 360K D/D | £1149.00 |
| Sanyo MBC 775 Portable 256K RAM 2 x 360K D/D | £1699.00 |
| Sinclair QL | £320.00 |
| Victor/Sirius 9000 inc. mon.:- | |
| 2 x 600K D/D + 128K RAM | £1650.00 |
| 2 x 1.2MB D/D + 256K RAM | £1899.00 |
| 1 x 10MB H.D + D/D + 256K RAM | £2499.00 |
| Wren | £899.00 |
| Commodore 64 ) -available for export | |
| Sinclair Spectrum ) in large quantities only | |

## DAISY WHEELS

| | |
|---|---|
| Brother HR15 | £315.00 |
| Brother HR25 | £555.00 |
| Brother HR35 | £695.00 |
| Daisy Step 2000 (20 CPS) | £219.00 |
| Diablo 630 (API) | £1310.00 |
| Epson DX 100 | £315.00 |
| Epson P-40 | £85.00 |
| Epson HI-80 4 pen plotter | £349.00 |
| Hitachi 672 plotter | £395.00 |
| Juki 6100 | £299.00 |
| Juki 6300 | £655.00 |
| Quen-Data | £225.00 |
| Qume 11/40 (RO) | £1175.00 |
| Qume letter Pro 20 | £450.00 |
| Ricoh RP 1300 | £875.00 |
| Ricoh RP 1600 8K | £1325.00 |
| Smith Corona TP 1 | £175.00 |
| Tec 10-40 | £845.00 |

## PERIPHERALS

| | |
|---|---|
| Colour Monitor for Apricot F1 | £350.00 |
| Cables from | £10.00 |
| Commodore 1702 Col Monitor | £175.00 |
| Epson Accoustic Coupler | £130.00 |
| Microvitec 20" Colour Monitor | £175.00 |
| Sanyo 3117 Col Hi Ress 600 PIX | £279.00 |
| Sanyo 3125 Col Med Ress 400 PIX | £175.00 |
| Sanyo 8112 Green Screen 18MHz | £85.00 |
| Monitor for QL | £235.00 |
| CRT 36 for MBC | £100.00 |
| **APRICOT High resolution Monitors** | |
| 9" | £170.00 |
| 12" | £212.00 |

## ACCESSORIES

**Keyboards, cables, interfaces, tractor feeds, sheet-feeds, disks, software, up-grades, listing paper, ribbons, daisy wheels available for most products.**

All prices excluding VAT and DELIVERY

## DOT MATRIX

| | |
|---|---|
| Anadex DP 9000 | £875.00 |
| Anadex DP 6500 | £2300.00 |
| Brother M1009(P) | £155.00 |
| Canon PW 1080A (NLQ) | £279.00 |
| Canon PW 1156A | £355.00 |
| Canon PJ 1080A (Colour) | £379.00 |
| Epson RX 80 | £190.00 |
| Epson RX 80 F/T | £215.00 |
| Epson RX 100 F/T | £325.00 |
| Epson FX 80 | £320.00 |
| Epson FX 100 F/T | £425.00 |
| Epson LQ 1500 | £895.00 |
| Epson JX80 | £455.00 |
| Hewlett Packard Laser Jet | £3250.00 |
| Mannesmann Tally MT80 | £195.00 |
| Mannesmann Tally MT160 | £449.00 |
| Mannesmann Tally MT180 | £549.00 |
| MP 165 NLQ Printer | £275.00 |
| Mannesmann Tally Pixy Plotter | £349.00 |
| OKI Microline 82A | £249.00 |
| OKI Microline 83A | £389.00 |
| OKI Microline 84P | £629.00 |
| OKI Microline 92P | £365.00 |
| OKI Microline 2350P | £1449.00 |
| Panasonic KP1091 | £255.00 |
| Shinwa CP80 F/T | £189.00 |
| Shinwa 40 (Colour) | £119.00 |
| Smith Corona DM 200(NLQ) | £375.00 |
| Tec 1550 | £459.00 |

**FREE COMMODORE STARTER PACK WITH EVERY PURCHASE OVER £3,000**
**(WHILE STOCKS LAST)**

JUNE

**Worldwide Computers Ltd, Spa House, 11-17 Worple Road, Wimbledon, London SW19 4JS. 01-947 8562 Telex:8955888 WOWICO**
**Also at 2 North Road, Brighton, Sussex BN1 1YA (0273) 609331**

WORLDWIDE COMPUTERS LTD

## CAMEL PRODUCTS

PRINT-SP ROM 81 PROMER 81 S MULTIPROM BLOPROM-SP DHOBI

PROMER 81 P10 81 NIKE P10 SP MEMIC CRAMIC-SP ROM SP CRAMIC 81 POLYPRINT PROMER SP

***NEW* POLYPRINT for Spectrum**

. . . The interface which likes to say . . . Ja and Oui and Si and of course YES! A Spectrum Centronics interface unit with up to 8 sets of characters displayed on screen, as per international set in EPSON FX80 printer. Printer driver also in EPROM.

**POLYPRINT** from Silicon City **£44.95**

## EPROM PROGRAMMERS

**BB-PROM**
For the BBC. With fast pgm'g, Vpp generator, ZIF socket. S/ware in SWR ROM incl. For 2764,27128 EPROMs. **£29.95**

**BLOPROM-SP**
**A uniquely sophisticated EPROM PROGRAMMER**



STATUS — NO OF SYSTEM —HEX
EPROM TYPE —27128
RAM START ADDR —4000
EPROM ST ADDR — 0000
JOB LENGTH — 4000
TASK — CHECK

WHICH TASK DO YOU WISH TO DO
W) CHECK THAT EPROM IS CLEAN
X) READ THE CONTENTS OF EPROM INTO RAM
Y) BLOW AN EPROM WITH DATA FROM RAM
Z) VERIFY THAT EPROM DATA IS THE SAME AS IN RAM
Q TO QUIT R TO RESTART
FAST CODES AVAILABLE
D H POR WXYZ

Eprom programmer for the 2516, 2716/32/32A/64/64A/28/128A, yes even the 64A/128A from Intel. Check, Read, Program & Verify all or part of Eprom. So immensely user friendly you'll hardly need the manual. Designed for the beginner but includes a single key entry route for the professional. Supplied as firmware, the m/c driver routine alone is worth more than the price of BLOPROM-SP. No Personality Cards, or other additions, just a Spectrum. Several inbuilt safety features. On-board Vpp generation. 28pin ZIF socket. Cabled connector and extender plug. ABS case. **£89.95**

**AT LAST!** for the Spectrum user. Put your programs, utilities, Assemblers into EPROMS for instant load from the unique ROM-SP




**ROM-SP** **for Spectrum**

Ingenious unit for Spectrum, with 2×28 pin sockets and a Reset button allows up to 16K of Basic or M/C program to RUN or LOAD instantly from EPROMS. Cabled connector and full extender card. NOTE: Does not disable Sinclair ROM. **£29.95**
2764's at **£5.50**, 27128's at **£8.50** × VAT

**PROMER-SP** **for Spectrum**
A brand new Spectrum programmer for 2764/128. Zero insertion force socket & software on tape. **£29.95**

**PROMER 81-S** **for Spectrum**
The very popular PROMER-81 for the ZX81 has been adapted to the Spectrum and the price kept low. **£24.95**

**ROM-81**
Provides two 24 pin sockets for up to 8K of EPROM memory in the 8-16K area. Can use 2516/32 or 2716/32 **£14.95**

**PROMER-81**
A low cost reliable programmer for 2516/32, 2716/32 EPROMS. Requires 4×PP3 batteries **£24.95**

**DHOBI 1** **UV ERASER**
Compact. Mains powered. Safe. Fully cased. Up to 3 EPROMS **£18.95**

**DHOBI 2** With automatic timer **£22.95**

**CRAMIC-SP** **NEW** **for Spectrum**
Ingenious software paged 16K non-volatile CMOS RAM to co-exist in the same area as Spectrum ROM. Easy storage and retrieval of BASIC, M/C or DATA on a 48K Spectrum **£89.95**

**PRINT-SP** **for Spectrum**
Centronics Interface with standard centronics Cable. Software on tape. See also Polyprint **£31.25**

**NIKE POWER BUFFERS**
for Spectrum, Atmos, ZX81 **£17.35**

**DREAM-81** **ZX81**
64K Rampack with link options to disable 0-8-16K. Plus a 28 pin EPROM socket for 2716, 2732/2764 and 27128. **£59.95**

**MEMIC-81** **for ZX81**
4K CMOS RAM with lithium battery. Easy SAVEing. 10yr storage and instant retrieval of programs. **£29.95**

**UK. VAT extra. No VAT on exports P+P UK Free Europe +5% — Overseas +10% TLX 81574 CML**
Cambridge Microelectronics. One Milton Road.

*Cambridge Microelectronics Ltd. One Milton Rd. Cambridge CB4 1UY. Tel: (0223) 314814*



## DISKS DISKS DISKS

***BEST PRICES - TOP QUALITY - FAST DELIVERY***

********** PRICE PROMISE **********
We will better any genuine delivered price advertised in the current issue of PCW for Boxes of Disks shown in the list below. Please Telephone for price.

QUALITY FACTORY SEALED DISKS NORMALLY SAME DAY DESPATCH

**5.25" DISKS**

| BOXES OF 10 DISKS | | | | | Prices per Box (£) 1-4 | 5-9 | 10-49 |
|---|---|---|---|---|---|---|---|
| **MEMRON Coloured Diskettes - Packed in Library Box** Red,Blue,Green,Yellow,White,Rainbow(2 of each colour) | | | | | | | |
| 1D | HR | S/side S or D Dens | 48tpi | 40Tr | 21.00 | 20.00 | 19.00 |
| 2D | HR | D/side S or D Dens | 48tpi | 40Tr | 26.00 | 25.00 | 24.00 |
| 1Q | | S/side Q Dens | 96tpi | 80Tr | 26.00 | 25.00 | 24.00 |
| 2Q | | D/side Q Dens | 96tpi | 80Tr | 31.50 | 30.50 | 28.50 |
| **DYSAN** | | | | | | | |
| 104/1D | HR | S/side D Dens | 48tpi | 40Tr | 16.50 | 15.90 | 15.30 |
| 104/2D | HR | D/side D Dens | 48tpi | 40Tr | 24.00 | 23.25 | 22.50 |
| 204/1D | HR | S/side Q Dens | 96tpi | 80Tr | 24.00 | 23.25 | 22.50 |
| 204/2D | HR | D/side Q Dens | 96tpi | 80Tr | 29.00 | 28.25 | 27.50 |
| **VERBATIM DATALIFE** (5 Year Warranty) | | | | | | | |
| MD525-01HR | HR | S/side S or D Dens | 48tpi | 40Tr | 14.95 | 14.70 | 14.20 |
| MD550-01HR | HR | D/side S or D Dens | 48tpi | 40Tr | 19.20 | 18.45 | 17.70 |
| MD577-01HR | HR | S/side Q Dens | 96tpi | 80Tr | 19.20 | 18.45 | 17.70 |
| MD557-01HR | HR | D/side Q Dens | 96tpi | 80Tr | 25.20 | 24.95 | 24.00 |
| 10 or 16 hard sectors at same price. Add £1.20 for library box. | | | | | | | |
| **MEMOREX** (5 year warranty) | | | | | | | |
| 3431 | HR | S/side S Dens | 48tpi | 40Tr | Please Telephone for | | |
| 3481 | HR | S/side D Dens | 48tpi | 40Tr | | | |
| 3491 | HR | D/side D Dens | 48tpi | 40Tr | MOST COMPETITIVE | | |
| 3504 | HR | S/side Q Dens | 96tpi | 80Tr | | | |
| 3501 | HR | D/side Q Dens | 96tpi | 80Tr | Prices | | |
| 5500HD | | D/side H Dens 1.6MB | | 80Tr | | | |
| **BASF** 1D | | S/side D Dens | 48tpi | 40Tr | 10.99 | 10.50 | 10.00 |
| **BASF** (Qualimetric) ** FREE Library Box with every 10 Disks ** | | | | | | | |
| 1X | HR | S/side S Dens | 48tpi | 40Tr | 14.10 | 13.70 | 13.30 |
| 1D | HR | S/side D Dens | 48tpi | 40Tr | 14.70 | 14.20 | 13.70 |
| 2D | HR | D/side D Dens | 48tpi | 40Tr | 18.65 | 17.90 | 16.65 |
| 1D/96 | HR | S/side Q Dens | 96tpi | 80Tr | 19.30 | 18.55 | 17.30 |
| 2D/96 | HR | D/side Q Dens | 96tpi | 80Tr | 22.00 | 21.25 | 20.50 |
| 5.25 2D | | D/side H Dens 1.6MB | | 80Tr | 37.00 | 36.00 | 34.50 |
| **CUMANA - Packed in Library Box** | | | | | | | |
| 2Q | HR | D/side Q Dens | 96tpi | 80Tr | 16.45 | 15.95 | 15.45 |
| HR denotes Disks with Reinforced Hub Rings. | | | | | | | |
| **ACCESSORIES** | | | | | | | |
| HCK5 | | Head Clean Kit with Fluid | | | 14.90 | 14.50 | 14.00 |
| LC5 | | 5.25 EGLY Library case | | | 1.90 | 1.80 | 1.70 |
| LB40-5 | | ABA Lockable Box 40 Cap inc Disk Pen | | | 13.50 | 13.00 | 12.50 |
| LB50-5 | | ABA Lockable Box 50 Cap inc Disk Pen | | | 14.75 | 14.25 | 13.75 |
| LB90-5 | | ABA Lockable Box 90 Cap inc Disk Pen | | | 16.50 | 16.00 | 15.50 |
| VCK-5 | | Verbatim 5" Head clean kit | | | 6.40 | 6.20 | 6.00 |
| VCD-5 | | Verbatim 5" H/c disks (per 10) | | | 12.50 | 12.30 | 12.10 |
| DPEN | | BEROL Quality disk pens (per 12) | | | 5.25 | 5.00 | 4.75 |
| DL-5 | | Disk Labels 100 (5 colours) | | | 4.50 | 4.25 | 4.00 |
| DM-5 | | Disk Mailers 4 disk cap (per 100) | | | 21.00 | 19.50 | 18.50 |

**3.5" DISKS**

| | | | | | | |
|---|---|---|---|---|---|---|
| **SONY** | | | | | | |
| OM-D3440 | S/side D Dens | | 80Tr | 33.00 | 32.25 | 31.50 |
| OM-D4440 | D/side D Dens | | 80Tr | 42.50 | 41.75 | 41.00 |
| **VERBATIM** | | | | | | |
| MF350 | S/side D Dens | | 80Tr | 34.00 | 33.25 | 32.50 |
| **BASF** (Qualimetric) | | | | | | |
| FD3.5 | S/side 80Tr | (Boxed in 5's) | | 17.00 | 16.50 | 16.00 |
| **ACCESSORIES** | | | | | | |
| S10-3.5 | SEE-10 Library Box | | | 2.30 | 2.15 | 2.00 |
| LB60-3.5 | ABA Lockable Box 60 Cap inc Disk Pen | | | 15.50 | 15.00 | 14.50 |

**8" DISKS**

| | | | | | | |
|---|---|---|---|---|---|---|
| **VERBATIM DATALIFE** (Five Year Warranty) | | | | | | |
| FD34-9000 | S/side S Den | | | 19.50 | 18.50 | 17.50 |
| FD34-8000 | S/side D Den | | | 19.50 | 18.50 | 17.50 |
| DD34-4001 | D/side D Den | | | 23.00 | 22.00 | 21.00 |
| **BASF** (Qualimetric) | | | | | | |
| 1X | S/side S Dens | | | 16.00 | 15.00 | 14.00 |
| 1D | S/side D Dens | | | 19.00 | 18.00 | 17.00 |
| 2D | D/side D Dens | | | 22.00 | 21.00 | 20.00 |
| **ACCESSORIES** | | | | | | |
| LB40-8 | ABA Lockable Box 40 Cap inc Disk Pen | | | 16.50 | 16.00 | 15.50 |
| VCK-8 | Verbatim 8" Head clean kit | | | 6.40 | 6.20 | 6.00 |
| VCD-8 | Verbatim 8" H/c disks (per 10) | | | 12.50 | 12.30 | 12.10 |

**PAPER-LABELS-CASSETTES**

| | | | | | | |
|---|---|---|---|---|---|---|
| PAP1 | 11"x9.5" | 60gsm | 2000 Sheets | Micro Perf | 11.00 | 10.50 | 10.00 |
| PAP3 | A4 | 80gsm | 2000 Sheets | Micro Perf | 24.50 | 23.50 | 22.50 |
| PAP4 | A4 | 90gsm | 1000 Sheets | Micro Perf | 13.50 | 12.75 | 11.50 |
| LAB1 | 89mmx36mm 2 on web 8000 labels | | | | 23.00 | 22.00 | 21.00 |
| C12 | C12 Quality Screw Assembly(10) | | | | 4.50 | 4.30 | 4.10 |

**RIBBONS - PRINTWHEELS - PRINTERS - SOFTWARE**
Telephone or write for very competitive prices on a large range of goods.

Please contact us for Quantity Discounts (50+ boxes) and Trade Accounts.
Official orders accepted from Government or Educational Establishments.

| Description | Quantity | Amount |
|---|---|---|
| | | |
| | | |
| | | |
| | | |

| | | |
|---|---|---|
| **Postage/Packaging (UK)** | | Post/Pack |
| 5.25/3.5 Disks,HCK5 | £1 /Box* (75p 5+, £5 Max) | Total exc VAT |
| 8" Disks,VCD8,C12 | £1.3/Box* (95p 5+, £5 Max) | |
| LC5,DL5,VCK5/8,VCD5,DPEN | 50p/pack (35p 5+, £5 Max) | Vat @ 15% |
| Lockable Box,Labels | £2.5/Box (£2 2+, £5 Max) | Total inc VAT |
| Paper,DM5 | £3.5/Box (£2 3+,£15 Max) | |

* Add 30p for First Class Post

Name _____ Tel.No. _____
Address _____
_____ Post Code _____
Access/Barclaycard/Cheque No. _____

TELEPHONE ORDERS ANYTIME --- WE DO THE REST
34 CANNONBURY AVENUE PINNER MIDDX HA5 1TS
01 868 9548

VISA **Pinner Wordpro**

# GPR·PLOTR

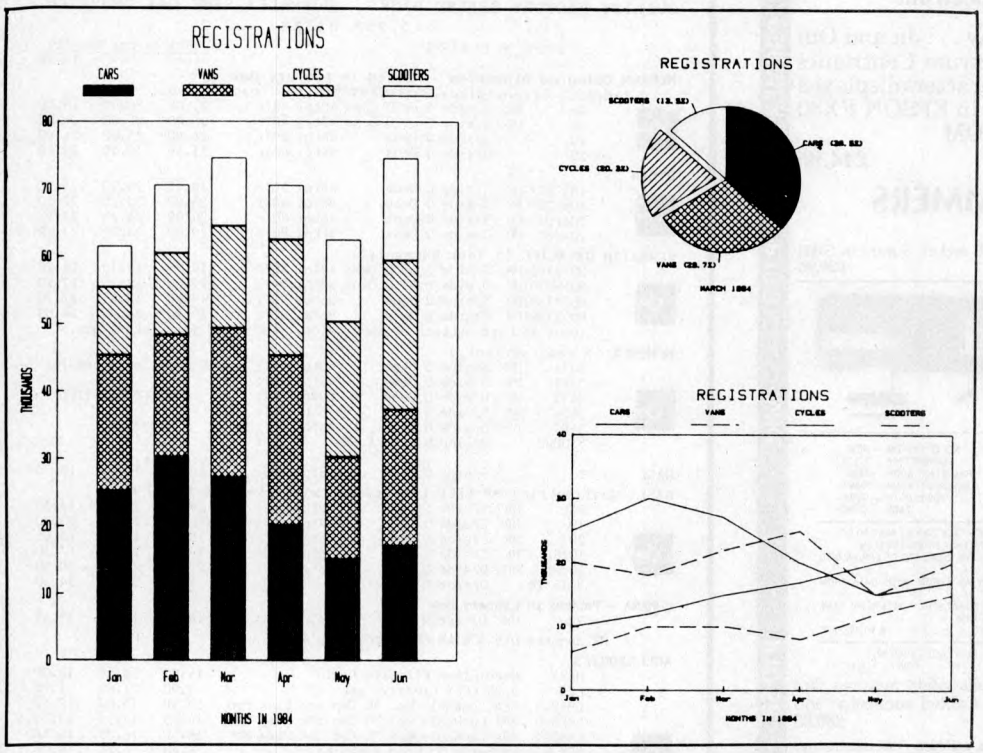


- Software for HP7470 and HP7475 plotters on CP/M micros.
- Direct or spreadsheet data entry. DIF format supported.
- Plot files can be saved for later amendment or plotting.
- Many default settings for ease of use.

**£65** incl. tutorial and full documentation

## GENERAL PROGRAMMING & ROBOTICS LTD.

**Contact: David Lacey, 14 Denmark Road, London W13 8RG. 01-840-2796**

# Centronics Parallel Interface for QL*

**0223 323302**

## CST announce the Q$\pi$ Centronics Parallel Interface for Sinclair's QL – available NOW for only

Cambridge Systems Technology can provide the missing link for your QL. The CST Q-PI is a Centronics Parallel Interface offering full Q.DOS device driver software. It will connect your QL to the wide range of printers and plotters which use the standard Centronics interface, and is fully compatible with Sinclair-supplied PSION software.

**£50 PLUS VAT**

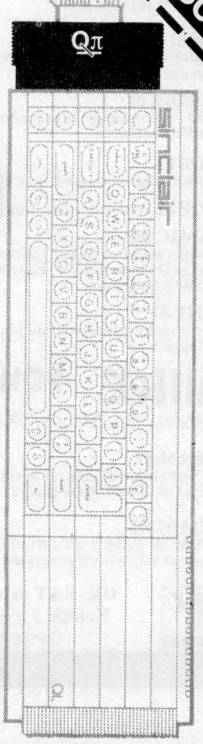


### ORDER FORM

Please send_____Q-PI units @ £86.25 incl VAT £_____
(and)_____Centronics cables @ £11.50 each incl £_____
(add post & packing @ £2.25 incl per unit) £_____

CHEQUE/P.O. NO REMITTANCE TOTAL £

Name_____ Address_____

_____

_____ Postcode_____

Phone_____ Date of Order_____

CUT AROUND BROKEN LINE AND DESPATCH WITH YOUR REMITTANCE TO: *pcw 7/85*

**CAMBRIDGE SYSTEMS TECHNOLOGY 30 Regent Street Cambridge CB2 1DB**

*QL IS A TRADEMARK OF SINCLAIR RESEARCH LTD.

# CUMANA Special Price Offers!

**SPECTRUM DISK INTERFACE**
Convenience of double density disk operation for only **£99.95**

**DELTA INTERFACE FOR YOUR DRAGON**
Dragon 32 Disk Controller for only **£49.95**

**DISK DRIVE SUITABLE FOR USE WITH APPLE MODELS II & IIE**
AS 501L disk drive only **£109.95***

**RS 232 BOARD FOR TANDY MODELS III/4** only **£39.95**

**EXTERNAL HARD DISK FOR TANDY MODELS III/4 (5MB)**
**WESTERN DIGITAL WD 1005.1 CONTROLLER CARD**
only **£895.00***

**Z 80 DISK PACK** Cumana price only **£649.95***

**CUMANA CSX 351** 3½" single drive without power supply only **£99.95***

**CUMANA CDX 352** 3½" dual drive without power supply only **£179.95***

**CUMANA 3½"** single sided double density diskettes box of 10 **£29.95**

**THE SUPER MCP 40 COLOUR PRINTER/PLOTTER***
compatible with the BBC/Dragon/Tandy only **£89.95**

**TH 1603 A Spectrum compatible data cassette recorder £29.95***

**TH 1603 C Commodore compatible data cassette recorder £29.95***

**TH 1603 H BBC compatible data cassette recorder £29.95***

**Cumana Special – All recorders come with a box of 20 C15 data cassettes!*
**Add £9.14 postage & packaging on these items.*
*Limited offer, all products are subject to availability. All prices are inclusive of V.A.T.*
E and OE

Apple is a registered trademark of Apple Computer, Inc.

**ORDER FORM**

To: CUMANA LIMITED, THE PINES TRADING ESTATE, BROAD STREET, GUILDFORD, SURREY GU3 3BH TEL: 0483 503121
Please rush me: ..... *Delete as applicable
I enclose cheque/PO* for ..... or debit my access/visa* card no. .....
NAME .....
ADDRESS .....

CUMANA® The best name in memory

# The world didn't need another portable.

# Just a better one.



The Bondwell 2 is a truly portable computer that offers instant computing power when you're on the move.

And it offers some pretty remarkable features.

**Small, light, powerful.**

The Bondwell 2 is a 64K RAM portable that is the size of an attache case and weighs just 5.5 Kg. The fold-up LCD screen offers 80 characters × 25 lines with a brilliant resolution of 640 × 200. It also tilts 0° — 180° to offer the best viewing angle in all light conditions.

*There's also a built-in 3½" microfloppy disk drive with a 360K formatted capacity. So you get maximum software flexibility without the limitations of built-in ROM programs on most portables.*

And because the Bondwell 2 has a CP/M 2.2 operating system you have access to a huge library of business programs.

*Five top programs are offered free with the Bondwell 2 — WordStar, Mailmerge, DataStar, CalcStar and ReportStar. As well a "Scheduler Plus" program is yours, free, for better organisation of executive time.*

**Features. Features. Features.**

Other Bondwell 2 features include a full-stroke keyboard with 8 user-defined function keys; ports for data transmission, printer and a second disk drive; expansion slots for modem, ROM/RAM card; a built-in battery which gives 8 hours of continuous use with each recharge.



## The Bondwell 2 Portable.

**Heavy in features. Light in weight.**
**And equally light on the pocket**

**AT £1575**

Barbatan Limited

35 – 38 High Street
Bristol BS1 2AW
Tel: Bristol (0272) 213928

Attractive trade discounts are available.
Dealer enquiries welcome.

# ATARI 600XL ENTERTAINMENT PACK

Great news for games addicts who appreciate high quality graphics and sensational arcade action gameplay. For Only £69, you can buy a 16K Atari 600XL Computer with two top arcade ROM cartridge titles and a joystick. These two ROM titles are the famous arcade hit Donkey Kong and another favourite Qix (We only have a limited number of packs with Qix. When these run out, Qix may be substituted for an arcade entertainment cartridge of the same value). The 600XL Entertainment Pack offers real value for money and enables you to save £63.96, nearly half of the normal RRP's of the pack items when purchased individually. Silica Shop have a wide range of ROM cartridges available including arcade favourites such as Asteroids, Centipede, Missile Command, Popeye, Q*Bert, Star Raiders, Super Cobra for only £9.95 each! The 600XL is a programmable home computer with the Basic Programming Language built in and if you later add a 1010 Program Recorder (XLP 1010 - £34), a range of hundreds of cassette programs will become available to you. The Atari 600XL is recommended as a first class games machine.

**ATARI PACKS - POWER WITHOUT THE PRICE!**



**ATARI 600XL ENTERTAINMENT PACK**

| | |
|---|---|
| 16K Atari 600XL | £99.99 |
| Donkey Kong (R) | £14.99 |
| Qix (R) | £9.99 |
| Single CX40 Joystick | £7.99 |
| Total (if purchased separately) | £132.96 |
| Less Discount (approx 48.1%) | £63.96 |
| **PACKAGE PRICE** (XLC 1600) | **£69.00** |

**£69**

# ATARI 800XL AND RECORDER PACK

The 64K 800XL is packaged here with the 1010 recorder, an economical storage and retrieval unit, a smash hit arcade game and programming aid, all for a package price of only £129 (ref: XLC 1010), a saving of £65.96 off the RRP's of the individual items which total £194.96. The game included in this pack is Pole Position. Now on cassette from Atari, Pole Position is an accurate reproduction of Atari's own highly successful arcade driving game which has all the thrills and spills of the grand-prix racetrack. On the reverse of this cassette is a demonstration program of Atari's amazing sound and graphics capabilities giving an example of the high quality performance of the Atari 800XL. Also included is an Invitation to Programming 1 cassette which takes you step by step through the first stages of programming in Atari Basic using Atari's unique soundthrough facility which allows pre-recorded human speech to be played through your T.V speaker. All you need is a joystick (ATJ 0400 - £7.90 for Pole Position), to be up and running with this package. The Atari 800XL in this pack comes with a Silica two year guarantee.

**ATARI PACKS - POWER WITHOUT THE PRICE!**



**ATARI 800XL + PROG. RECORDER PACK**

| | |
|---|---|
| 64K Atari 800XL | £129.99 |
| 1010 Program Recorder | £34.99 |
| Pole Position + Demo Prog (C) | £9.99 |
| Invitation to Programming 1 | £19.99 |
| Total (if purchased separately) | £194.96 |
| Less Discount (approx 33.8%) | £65.96 |
| **PACKAGE PRICE** (XLC 1010) | **£129.00** |

**£129**

# ATARI 800XL AND DISK DRIVE PACK

This pack includes the 64K 800XL with a 1050 Disk Drive for mass storage and speedy information retrieval as well as a brand new adventure game and a powerful home help program, all for only £249 (ref: XLC 1050), a saving of £115.96 off the RRP's of the individual items which total £364.96. The first of these programs is The Payoff on disk, a new adventure game which is a fantasy simulation in which you play the leading role. An exciting introduction to adventure programs which are always popular (with a demonstration program of Atari's amazing sound and graphics on the reverse). Also included in this pack is Home Filing Manager to help you organise your files. It allows you to catalogue and file details of birthdays, books, your stamp collection or anything else which would normally require you to use filing cards. The instructions for Home Filing Manager are on the reverse of the disk and all the disks which come in this package are in protective paper wallets. You get an extended two year guarantee on the 800XL and 100 free programs with the disk drive when you buy this package from Silica.

**ATARI PACKS - POWER WITHOUT THE PRICE!**



**ATARI 800XL + DISK DRIVE PACK**

| | |
|---|---|
| 64K Atari 800XL | £129.99 |
| 1050 Disk Drive | £199.99 |
| Home Filing Manager (D) | £24.99 |
| The Payoff + Demo Prog (D) | £9.99 |
| Total (if purchased separately) | £364.96 |
| Less Discount (approx 31.8%) | £115.96 |
| **PACKAGE PRICE** (XLC 1050) | **£249.00** |

**£249**

# NEW ATARI 130XE NOW IN STOCK £169

Atari's new 128K computer, the Atari 130XE offers an enormous 131,072 bytes of RAM for only £169. The 130XE comes with built in Basic and full operating instructions and is now in a newly designed case with a modern full stroke keyboard. The XE is fully compatible with both the 400/800 and the XL ranges of machines, this means that it can run approximately 90% of all Atari Computer software on the market. This provides a range of over 1,000 software titles as well as a large selection of accessory and peripheral items. Initial stock of the 130XE will be limited, so it's first come first served.



## SILICA SHOP

**WE ARE THE UK'S No1 ATARI SPECIALISTS**

Since the introduction of Atari Video Games into the UK six years ago, Silica Shop has been selling Atari products and supporting Atari owners with a specialist mailing service which we believe is unbeatable. We stock over 1,000 Atari related product lines and have a mailing list including over 300,000 Atari 2600 VCS owners and over 50,000 Atari Home Computer Owners. Because we specialise in Atari, we aim to keep stocks of all the available Atari hardware, software, peripherals and accessories. We also stock a wide range of Atari dedicated books and through us, the owners on our list can subscribe to several American Atari dedicated magazines. We can provide a full service to all Atari owners and are now firmly established as the UK's NUMBER ONE Atari specialists. Here are just some of the things we can offer you:

**FREE POST & PACKING ON MAIL ORDERS**
**FREE CLUBS & INFORMATION SERVICE**
**HIGHLY COMPETITIVE PRICES**
**AFTER SALES SUPPORT SERVICE**
**REPAIR SERVICE ON ATARI PRODUCTS**

If you would like to register on our mailing list as an Atari computer owner, or just because you are interested in buying an Atari machine, let us know. We will be pleased to keep you up to date with all new developments on the Atari scene free of charge. So, post off the coupon with your order or enquiry and begin experiencing an Atari service that is second to none.

**01-309 1111**

**SILICA SHOP LTD, 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX Tel: 01-309 1111**

**ORDER NOW-OR SEND FOR OUR FREE ATARI BROCHURES**

**To: SILICA SHOP LTD, Dept PCW 0785, 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX Telephone: 01-309 1111**

**LITERATURE REQUEST:**

☐ Please send me your FREE brochures on Atari Home Computers.

☐ I already own a ..... Videogame ☐ I already own a ..... Computer

Mr/Mrs/Ms: ..... Initials: ..... Surname: .....

Address: .....

..... Postcode: .....

**ORDER REQUEST:**

**PLEASE SEND ME:**

| | | |
|---|---|---|
| ☐ | 16K 600XL Entertainment Pack | £69 |
| ☐ | 64K 800XL & 1010 Recorder Pack | £129 |
| ☐ | 64K 800XL & 1050 Disk Drive Pack | £249 |
| ☐ | 128K 130XE Home Computer | £169 |

*All prices include VAT*

*Post & Packing is Free Of Charge*

☐ I enclose Cheque/P.O. payable to Silica Shop Limited for the following amount: £.....

☐ CREDIT CARD - Please debit my: Access/Barclaycard/Visa/American Express/Diners Club My Card No is: .....

· THE NEW AMSTRAD CPC 664 WITH BUILT-IN DISC DRIVE

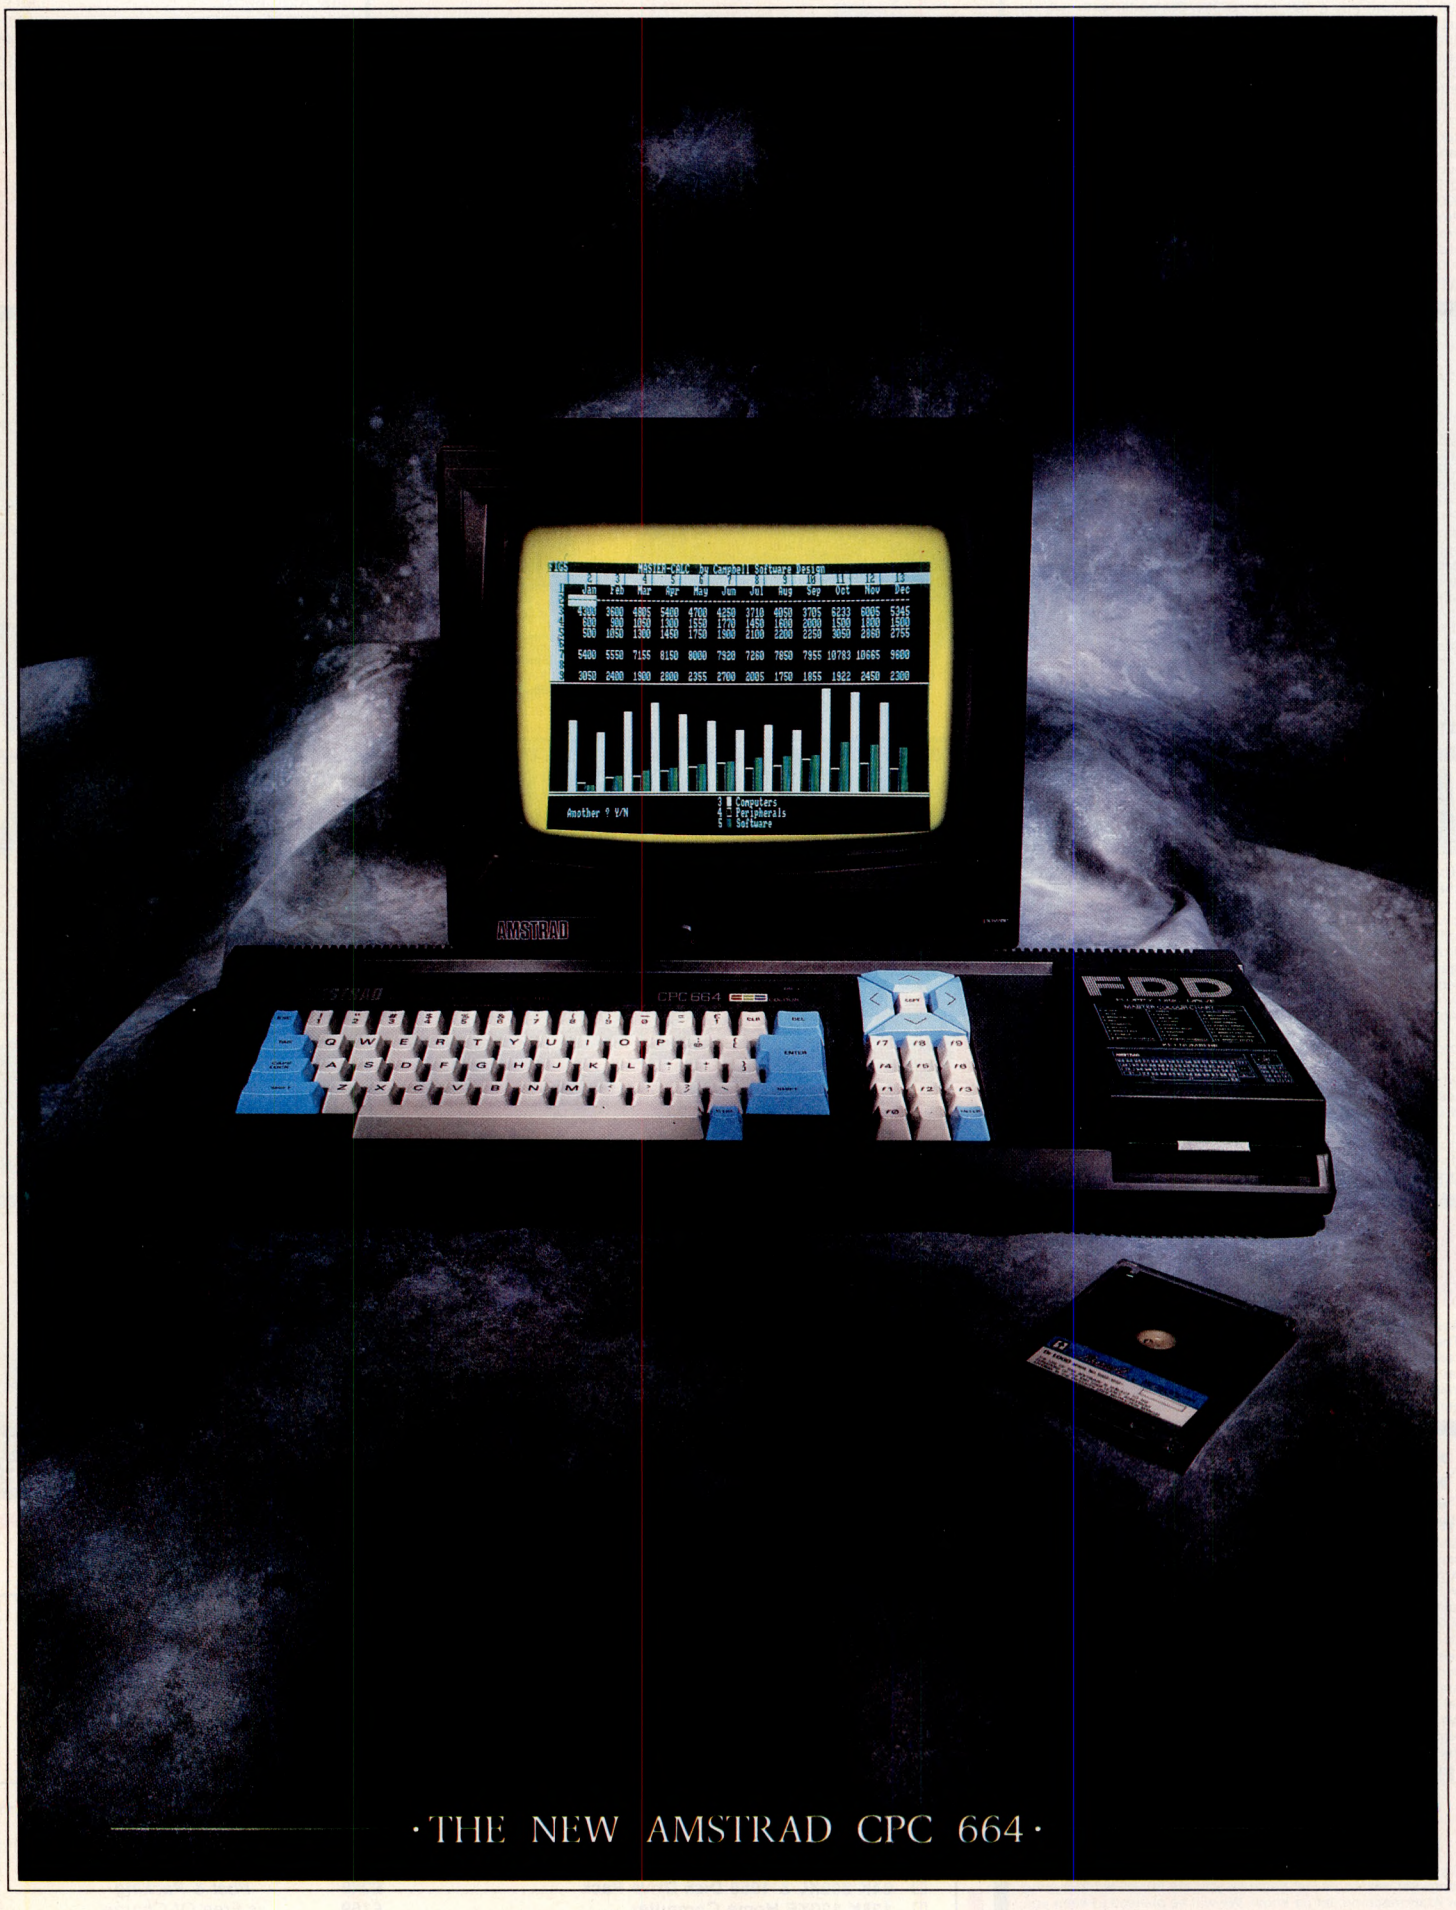


· AVAILABLE AT BOOTS · COMET · CURRYS · DIXONS · GREENS · JOHN MENZIES · RUMBELOWS




WITH COLOUR MONITOR AROUND

**· £449 ·**

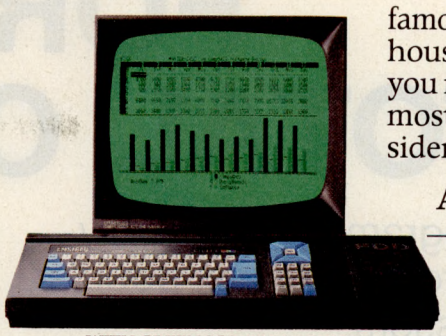

WITH GREEN SCREEN AROUND

**· £339 ·**

# THE HOME COMPUTER THAT MEANS BUSINESS.

If you know anything about computers you'll know that disc drives are up to fifty times faster than cassette when you're loading and saving programs. In fact, a disc drive makes computing faster, more reliable, more efficient and more fun. But up till now the only way to gain these advantages for a home computer was to buy a separate disc drive attachment. Now Amstrad are pleased to announce the first complete home computer with built-in disc drive: The Amstrad CPC 664.

And when you buy a CPC 664 you'll find it's not just the disc drive that's built-in.

You'll get everything you need, including a monitor (green screen or full colour). We'll even give you a free CPM and Logo disc, so all you do is plug in and you're in business.

## BUSINESS OR · PLEASURE ·

Although a disc drive will make games more fun (and there are loads of them to choose from) it also makes the CPC 664 a serious proposition for the business user.

There are accounting, word-processing, spread-sheet and data-base programs (to name but a few).



**Amsoft Business Control, is a complete suite of programs for integrated sales invoicing, stock control and sales ledger for around £99. (Requires an additional FD-1 disc drive around £159 and DL-2 cable around £7).**

The CPC 664 is also supplied with CP/M* to help make your business more efficient and effective by providing access to the famous range of CP/M* software.



**Wordprocessing with Amsword can improve the productivity of everyone from unskilled typist to trained secretary. Around £23.95.**

## HIGH PERFORMANCE · LOW COST ·

The one thing you won't need a computer to work out is that the Amstrad CPC 664 represents outstanding value for money.

You only have to check the cost of buying all the elements separately (64K computer, disc-drive, monitor) to realise that the Amstrad package is very hard to beat.

With a green screen monitor the cost is just £339. With a full colour screen it costs £449. And after you've saved money on the price of the computer itself, you go on saving on the price of software.

There are hundreds of programs for business or pleasure available on disc (and cassette) to CPC 664 users. Many from Amsoft, others from other famous-name software houses. Few will cost you more than £49 and most will cost you considerably less.

## AN EXPANDING · SYSTEM ·

There is a complete range of peripherals available to CPC 664 users which plug directly into the built-in interfaces.

These include a joystick, additional disc drive (to double your on-line storage) and the Amstrad DMP-1 dot-matrix printer. (There's also a cassette interface so that you can use CPC 464 programs on tape). And there are many more peripherals from Amstrad and other manufacturers which can be used to enhance the CPC 664.

## · AMSTRAD USER CLUB ·

Join the optional Amstrad User Club and we'll keep you informed with our monthly user magazine, and information on all software as it is introduced. Your membership details will be recorded on your personal club card, which entitles members to various privileges and offers.



**Figure analysis made easy with Microspread. An easy to use spreadsheet with pull-down menus and a wide range of mathematical options. Around £49.**



Please send me more information

Name_____

Address_____

_____

_____

# Amstrad CPC 664

Amstrad, P.O. Box 462, Brentwood, Essex CM14 4EF.

PCW/664/2

*CP/M is a trademark of Digital Research Inc.

# FORTH = TOTAL CONTROL

**FORTH** programs are instantly portable across the most popular microprocessors.

**FORTH** is interactive and very fast.

**FORTH** programs are structured, modular, and easy to maintain.

**FORTH** gives control of all interrupts, memory locations, and i/o ports.

**FORTH** gives full access to DOS files and functions.

**FORTH** appliation programs can be converted to turnkey programs.

**FORTH** Cross Compilers can generate ROMmable code for: 6502, 6809, 68000, 8080, Z80, 8086, 6800, 6801/3, 1802, Z8, 8070, Z8000, 99xxx, LSI–11

**Application Development Systems** include **FORTH** with virtual memory, multi-tasking, assembler, full-screen editor, decompiler, utilities, and full documentation.

| | |
|---|---|
| **LMI Z80 FORTH** – CPM 2.2 | **£95** |
| **LMI 8086 FORTH** – CPM-86, MSDOS | **£110** |
| **LMI PC/FORTH** – PC/DOS | **£110** |
| **MPE-FORTH 6809** – FLEX, 0S9 | **£175** |
| **LMI 68000 FORTH** – CPM 68K | **£225** |

**FORTH+** has 32-bit stacks and directly accesses the whole address space of the processor.

| | |
|---|---|
| **PC FORTH+** | **£225** |
| **8086 FORTH+** | **£225** |
| **68000 FORTH+** | **£225** |

**Extension Packages** include floating point, cross compilers, 8087 support, colour graphics, interactive deluggers . . . . . .

We are the **FORTH** specialists, we also stock a large range of books, listings, and implementations for machines ranging from Spectrums to Macintosh to VAX.



**MicroProcessor Engineering Ltd**

21 Hanley Road, Shirley
Southampton SO1 5AP
Tel: 0703 780084



# PCW SHOW FOCUS

The 8th Personal Computer World Show

*The 8th PCW Show takes place at Olympia, London, 4-8 September. It's the biggest event of its kind in the UK, appealing to personal computer users in business, in the home, and in education. Here's the first detailed look at what's in store.*

## Making the most of the show

A day at PCW Show presents an ideal opportunity for first-time buyers in particular to see for themselves what's available in small business micro systems. The hard part, of course, comes later, choosing the one that's right for your individual business. As well as the stands on which companies will be demonstrating and displaying their products, and staff will be ready to answer questions, there are also some extra features which we've added to the show, both to help you make the most of your visit and to make that all-important decision afterwards.

The first two days are reserved for business and trade visitors, so they will probably be less crowded than the Friday, Saturday and Sunday. But whatever day you plan to come, if you're a business or professional user, you can apply for a complimentary ticket. This enables you to register in advance, to obtain a personalised VIP visitor pass which means you can walk straight in at the entrance to Olympia without having to fill in the registration form at the desk.

If you know the companies or the types of product you want to see, it also makes sense to use the product locator service. Just fill in the form and we'll give you a plan of the show, showing the location of the relevant stands. That way you can go straight to them, and avoid any wasted time and effort.

Anyone wanting to know what software is available for their specific application has two key sources of advice and information. On the Upper Level of Olympia 2 is the consultancy area, which brings together a number of specialist consultants with a wide range of experience, and the PCW Show Applications Software Advisory Service. This is a database system which lists every available piece of business software, identifying the application, supplier, operating system and other details — whether or not it is being demonstrated at the show.

On the ground level, look out for the NCC Microsystems Centre near the foot of the up escalator. The Microsystems Centre offers impartial advice and information, trying, in the words of senior consultant Eric Bagshaw "to educate the business user into a mood of cheerful scepticism. Cheerful, in the knowledge that, if he gets it right, the system will pay for itself in under a year, and sceptical in the knowledge that some of the salesmen he may deal with were selling used cars until last year."

Running on the stand will be the NCC Directories on Disc, which provide up-to-date information on microsystems, hardware, software and training: more than 5000 business software packages, 3000 different systems and 2000 training courses avilable throughout the UK. Next door in the PCW Show lecture theatre, a team of consultants from the Microsystems Centre will be running daily seminars on how to choose your system.

These sessions cover the main issues involved, starting with the question why use a micro at all? The NCC view is that one business in four needs a computer "like a hole in the head" while for the other three the difference between a successful, effective system, is one part discipline, one part training and operation, and one part dealer support. Other topics include the pre-conditions for success, choices and trade-offs (this can mean ease of use v flexibility and power as well as the more obvious price or performance decision), criteria for choosing a dealer as well as a system, and finally security, back-up and contingency planning (summed up by Bagshaw as "if it can go wrong — it will.")

The seminars will be given at 10.30 and 2.30 on Wednesday, Thursday and Friday, September 4, 5 and 6, and at 2.30 only on Saturday September 7. The fee at the door wil be £25 + VAT, but for those booking in advance there will be a 50% discount, making the fee £12.50 plus VAT.

*NCC Microsystems Centre, 11 New Fetter Lane, London EC4A 1PU. Phone 01-353 0011/5.*



*The busy scene at last year's PCW Show: this year's will be even bigger.*

## Room with a view

"Very nice, dear . . . but what does it do?" For every home computer user whose demonstration of treasured system has brought this response from girlfriend, wife or mother, the National Hall at PCW Show has the answer.

Tomorrow's Micro Home at PCW Show brings together all the latest in home electronics and computing — TV, video, hi-fi and computer-linked videodisc, all in a futuristic "living room of the future" setting. Sponsored by Toshiba, the feature also includes the home control system recently unveiled in Japan which can answer the phone, adjust the heating and even control burglar or fire alarms. Final development of the system is still under way, to add a number of extra devices including one which will turn off the taps to stop the bath overflowing.

Although videodisc has had little or no impact in the home market so far, it does have its uses. The advantages of disc over tape for video are the same as for computers: speed of response and the ability to access frames in any sequence, including step-forward and step-back, which makes it useful for computer-aided learning and Toshiba believe that, as home computers develop, so will the interactive videodisc.

The setting will be more than a show stand. It will be a "room set" with furnishings by one of London's most exciting interior designers, providing a fitting setting for the new technology. Look out for further details nearer show time.

# PCW SHOW FOCUS

## Coming in from the cold

Teachers involved with computers in the classroom often complain that they feel "out in the cold" without much genuinely useful help and advice. Over the years many of them have found that visiting the show is a useful way to keep abreast of developments so we have now decided to give them some specific help through the PCW Show Computers in Education feature. Located in the main National Hall, this new centre will be manned by a team of specialists — teachers or former teachers with first-hand experience of using computers in primary and secondary schools, and in higher education. They will be able to answer questions, help in solving problems, and demonstrate some of the projects undertaken with their pupils and students.

The stand is sponsored by Computers in Education Journal, the specialist publication, which operates a comprehensive database listing thousands of educational hardware and software products, all listed and cross-indexed by age, subject and other parameters including operating system. The system will be operating on the stand so that teachers and others involved in the education world, such as advisers, trainers and local authority support staff, will be able to identify the products which meet their needs.

Complimentary tickets for individual teachers are available in advance from the show organisers and these are valid for any day of the show. Admission at the door is £2.00; groups of 10 or more (including school parties) can obtain a discount of 50p per head by booking in advance but these are only available for Friday-Sunday, 6-8 September.

## Commodore debut

Commodore's new 128k machine will debut at PCW Show and will go on sale at about the same time. Full details are still under wraps, but it will be upwards compatible with the C64. The new machine will sell alongside the 64, which the people at Corby say is still selling well. Further developments are promised for the show, which will be available in time for the Christmas period.

As well as the serious home user, the new 128 is expected to appeal to small businesses and the self-employed, using CP/M software which Commodore say is comparatively cheap, still widely avaialble — and familiar to many users who want to upgrade their existing machine.

The big push for the business market, of course, comes with the Commodore PC, for which a lot of development work is under way, particularly in the field of multi-user and multi-tasking systems. The first results of this effort will be seen at the show, as part of what is promised to be a determined campaign to re-establish Commodore as a big name in the business computer market.

## Faster printer

A letter-quality printer which can output 10 pages a minute, retailing for less than £2000 is one of more than a dozen new products to be launched at the show by Micro Peripherals. First deliveries to customers are expected "within a couple of weeks" after the show, according to Micro P director Ian Donaldson, who forecasts increasingly fierce competition at the quality end of the printer market.

Also new from the Basingstoke-based distributor is a range of 1024 x 1024 high-resolution monitors for graphics applications and a series of modems including an auto-answer machine for mailbox use, which will accept messages unattended.

## Answers to the Organiser question

When the Psion Organiser hand-held computer first appeared at last year's PCW Show, a number of people commented: "Great idea — but what's it for?" At Olympia in September, they should be able to see at least some of the answers to that question in the shape of Organiser packages for a number of different applications. David Potter, Psion's founder and chairman, says that specialist contracts already announced are worth well in excess of £1 million and several others are on the way.



*Finding a use for the Organiser in the construction industry, performing quantity and cost calculations on site.*

The most visible of these applications is for charge-card validation at Marks & Spencer stores. The card validation list, held on an M & S mainframe, is downloaded and then copied on to EPROM datapaks which are distributed overnight to each store, where they are plugged into point-of-sale Organisers, ready for immediate use. When a customer presents his card, the assistant keys in the number and the computer display signals "OK" or "Call Supervisor" if the card is not valid. At the end of the day, datapaks are returned to the central office and erased by UV exposure.

Of more widespread interest is the Wessex Materials Computer, a development of the Organiser for cost-estimating in the building trades. This allows a builder or quantity surveyor to perform quantity and cost calculations on site, storing the information in an EPROM datapak. The software includes calculation formulae for all the major construction trades, including concrete, brick and block, woodwork, steelwork, roofing and finishing trades.

This points the way in which further applications for the Organiser are likely to be developed. The initial software was produced by Psion on its powerful VAX-based in-house development system. Further enhancements will be provided by Wessex's own programmers, using the Forth Development System from Psion, which enables customers to emulate the Organiser on an IBM PC and which will be demonstrated at the show.

The Organiser itself uses a simple programming language called POPL. This is designed to enable even inexperienced users to write and store programs but is obviously unsuitable for developing specialist applications and that's where FDS comes in.

The virtues of Forth are that the programming system itself can be very small, as little as 8K and it produces extremely fast and compact code. Anything you can do in machine code or C, you can do in Forth, often faster and, as in Basic, you can write and immediately test parts of a program, allowing a "suck it and see" approach which makes for fast development and debugging.

When programs have been completely developed and debugged, they can be sent back to Psion for final processing on the VAX master system. This, the company says, gives a reduction of at least 20% in the size of the code before it is copied on to program packs.

# PCW SHOW FOCUS



*Now being shipped at a rate of 2 000 a month, the Xi is ACT's best-seller in the Apricot range.*

## ACT broadens its appeal

At the past two PCW Shows, ACT have provided two of the main attractions, first with the Apricot PC and then the Apricot Portable, both, incidentally, winners of the Standard Micro-Business Awards in their respective years. This is a hard act to follow, but ACT are confident they will have no shortage of new products at Olympia again this year, appealing to the whole spectrum of customers, from first-time computer users in small firms to large organisations needing advanced multi-user installations.

Since the last show the availability of software for the Apricot has increased dramatically, so widening its appeal. And from ACT itself have come important enhancements such as Communique and the Telecom Gold-based Micromail, as well as several additions to the Apricot range of machines at various levels of sophistication. Using ACT's on-board modem, Communique enables an Apricot user to obtain a range of information such as commodity, foreign exchange and stock market prices from organisations such as Extel and Datastream, plus detailed company data from Dun & Bradstreet, and to access the Textline and Datastar databases. These include articles from hundreds of international newspapers and journals including the Financial Times, providing a valuable source of background information on company, industry and market developments. The package also includes a full incoming and outgoing telex facility via Telecom Gold.

Although the initial interest in the system came from some larger organisations, many small and medium-sized companies are also now starting to realise its potential. Tony Bryan, managing director of ACT Computer Services, explains: "Business is increasingly competitive and increasingly international and that means that companies need rapid access to various kinds of commercial information." At one time, this kind of information was the preserve of big companies with established "connections" and research facilities — now it is readily available on the desktop. The telex facility is also attractive to smaller companies: Tony Bryan says it is more cost-effective than purchasing a conventional telex machine, even for firms which do not already own an Apricot.

Another aspect of the Communique package which will increasingly prove popular is the PIPS and BACSPAY service which offers complete automation of company payroll, including automated payment of wages and salaries through the Bankers Automated Clearing Service — again a facility once regarded as the province of the large organisation which is now more widely available.

The Apricot range is widening and prices of several machines are being reduced. In addition to the PC and portable, the range now includes the F1 machine for small businesses with a more friendly front-end, and the low-cost F1E for schools and colleges.

The original Apricot Xi hard-disk machine has now been enhanced and is available in three versions, of which the most powerful, the Xi20S has 1Mbyte of RAM, 20Mbyte Winchester and 720K double-sided floppies. All of these are expected to be demonstrated at the show but it is not yet clear if they will be joined by the newest product in the ACT line-up, the F2. First deliveries are bound for the United States during the summer and it may therefore not be available in the UK until much later.

## New luggable on its way

Interquadram, a company which until now has been best-known for its range of PC add-on boards, is now planning the launch of the Dataview 25, one of several new portables which will be seen at the PCW Show. Like several other luggables, it has a 25-line LCD screen and can run on mains or battery. What makes this one different is that it is fully compatible, using standard 5¼ in. disks, so it can run commercial software which is copy-protected.

Trevor Sutton, marketing director of Interquadram, sees the full-size disk as a big plus point in the portable market, or at least certain sectors of it: "If you want a machine for portable data-entry, or simple word-processing, the disk factor may not be particularly important. But if you are looking at a machine to run your standard software while you are away from base, you want to be able to move freely from desktop to portable and if your portable uses 3½ in. disks you could have problems."

As well as the busy executive who spends much of his time out of the office, Sutton believes that the Dataview 25 will appeal to a range of users who need its specific features. These include, for example, consulting engineers and similar specialists who may need to undertake complex calculations while they are actually on site, who will probably also appreciate another of the machine's features, the hefty 640kRAM provided as standard.

In addition to the new portable, Interquadram will also be showing the full range of add-on boards and taking the opportunity to demonstrate how easily they can be installed. Other new products include Asher, a device which enables simultaneous speech and data transmission over the same phone line and a new colour ink-jet printer for high-quality graphics.

## Write it yourself

An easy-to-use development system for companies which want to write their own applications programs is being launched at the show by Satellite Computing, which combines full on-screen help with advanced facilities for design, information retrieval, reporting and integration with other software.

Satellite director Kathy White says the package draws on the company's experience in producing custom applications software for business and industrial uses over the past four years: "We had very clear ideas about what a development system had to do, and we also knew that several existing packages were not really satisfactory for end-users. For example, some of those which claim to be simple don't have on-screen help facilities. We believe that the manual is something you keep on the shelf as a reference book — not something you have to consult every few minutes whenever you are using the system."

The new package is intended both for experienced programmers and for those who want to develop new applications for their existing systems but have no previous

# PCW SHOW FOCUS

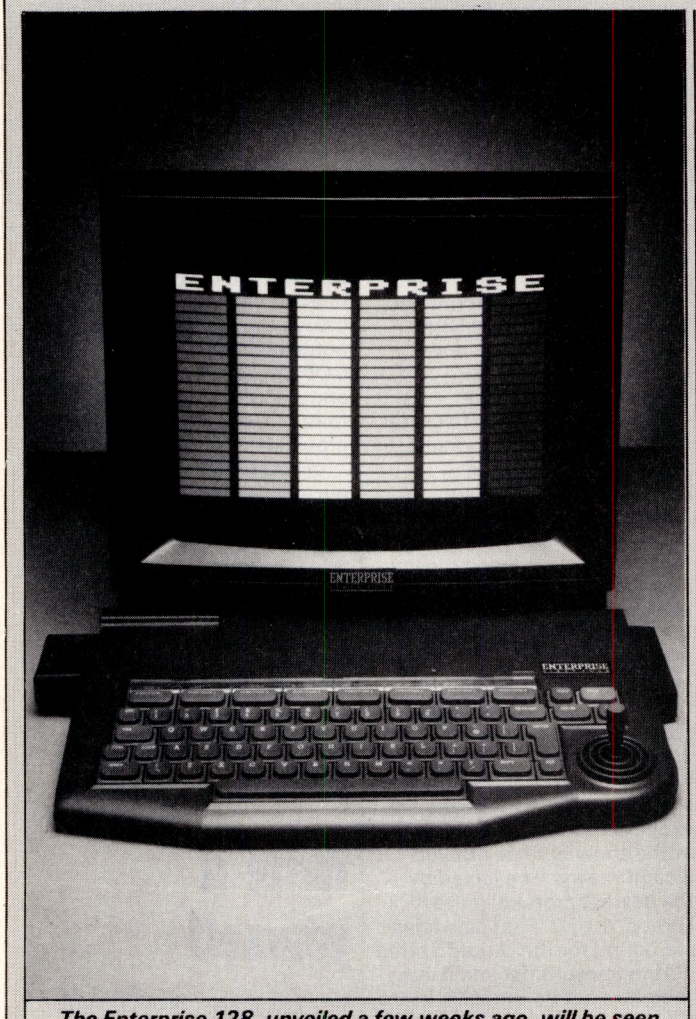


***The Enterprise 128, unveiled a few weeks ago, will be seen running a variety of disk software at the show. The new disk controller, to be launched at Olympia, will run both 3½in. and 5¼in. drives.***

***Software to be seen on both the 64 and 128 includes arcade, adventure and strategy games, educational programs, utility and small business application packages.***

programming experience. Satellite is also keen to see it used to develop vertical market applications.

Other new products which will be shown at PCW Show include software which allows data from a NEC lapheld to be transferred into application software running on an Apricot. Satellite is also using the show to promote its custom software business, which Kathy White describes as "for people who make and sell things rather than the insurance, banking and commercial sector," covering both minis and micros. Such as the sales management system recently developed for a large confectionery firm, including orders, sales ledger, analysis and reporting functions, which runs on a Sirius network.

## Awards attract

Entries are already coming in for the 1985 Standard Micro Business Awards, as announced in the May edition of PCW. Sponsored by The London Standard newspaper, the awards are given for innovations in hardware and software which offer "outstanding contributions to business efficiency and profit."

Now in their third year, the Awards are attracting entries both from some of the industry's big names and from some of the smaller specialised firms, particularly in applications software.

Last year's winners were ACT for the Apricot Portable and Torus Systems for the ICON network product. The other finalists included Macintosh, Amstrad's CPC464 small business system, and the hand-held Psion organiser. Three software products were shortlisted by the judges — all of them integrated business packages: Lotus Symphony, Ashton-Tate's Framework and Psion's Xchange.

This year's entries will again be judged by a panel drawn both from the computer industry and the world of business and finance. Anthony Hilton, City Editor of The Standard is chairman, and other members include Eric Bagshaw of the NCC Microsystems Centre, Dave Tebbutt, software author and consultant who edited the Business Computing Survival Guide published recently by PCW, and Graham Cunningham, editor of PCW. The closing date for entries is 15 July and judging of the finalists takes place in late August.

The shortlisted products will be featured at PCW Show, and the Awards presented to the winning companies at an industry luncheon which is held at Olympia on the opening day of the Show, 4 September.

Entry forms and further details: The Standard Awards, PCW Show, 11 Manchester Square, London W1M 5AB.

## How to find it

For anyone who missed PCW Show last year when it moved to its new Olympia home, the venue is easy to find in Kensington, West London.

Olympia has its own Underground station so it can be easily reached from all parts of the capital. Travel to Earls Court on the District or Piccadilly Lines and look out for the special PCW trains running throughout the show. If you are travelling by car, Olympia is readily accessible from the M3, M4, M40 and North Circular Road. There is ample parking for cars and coaches within a few minutes walk of the exhibition halls. Anyone flying into Heathrow can take the Underground from the airport direct to Earls Court and change there; from Gatwick, train to Victoria then Underground.

If you want to stay overnight, special discounts have been arranged for PCW Show visitors at hotels in all price categories from budget to 5-star. For details phone the Expotel hot-line on 01-741 4411.

## Times and tickets

From Wednesday to Saturday, 4-7 September, the Show is open from 10.00 to 19.00 daily; hours on Sunday are 10.00 to 17.00.

Admission at the door is £2 and tickets are also available in advance from PCW Show Ticket Office, 11 Manchester Square, London W1M 5AB. Cheques should be made payable to PCW85/Montbuild Limited.

For organised groups of 10 or more admission is £1.50 per head; this is obtainable only in advance and not at the door.

Business, professional, education and trade visitors can obtain complimentary tickets in advance; application must be made on official letterhead or enclosing a business card.

The 8th Personal Computer World Show

**4-8 SEPTEMBER 1985**

**OLYMPIA, LONDON**

**Sponsored by Personal Computer World**

PACE
Micro Technology

# NIGHTINGALE – THE MODEM

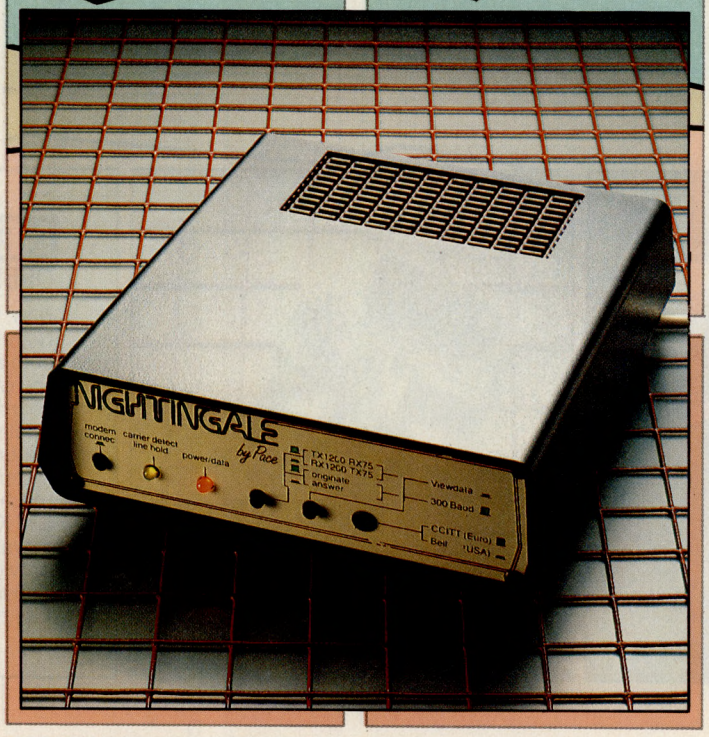


The Nightingale modem is now established as the most popular multi-baud rate modem in its class. Nightingale lets you get on with the job. Whether you need to extract information from Prestel©, send telexes via Telecom Gold, download telesoftware or simply swap files with a colleague. Did you know that you can search British Library records through their on-line system BLAISE, or access your bank account through homebanking services. The possibilities are endless.

Nightingale operates at the two most popular baud rates, 1200/75 as used by both private and public viewdata systems, and 300/300 baud for communication with remote mainframe, mini or micro systems. Also included is 'reverse viewdata mode', 75/1200 and an optional auto-answer/auto-dial board.

Approved for use in the UK and several other countries, Nightingale can be supplied with quality software for a variety of the most popular micros. If you own or use any micro with a standard RS232 interface, including the BBC micro, IBM PC, Apricot, Sirius or an Apple //e, //c or Macintosh, etc, then we may be able to help you.

With the increasing number of valuable information systems coming on-line, how much longer can you afford to be incommunicado?

**Nightingale modem £119 plus VAT**

Payment accepted by Cheque, Access or Visa.

Prestel is registered trademark of British Telecommunications Plc.
Pace Micro Technology, a division of Pace Software Supplies Ltd.

**SPECIAL OFFER**

For a limited period we are offering **FREE** registration to **MicroLink** + **TELECOM GOLD** with every Nightingale modem.

APPROVED for use with telecommunication systems run by British Telecommunications in accordance with the conditions in the instructions for use.
S/2592/3/E/500065

PACE
Micro Technology

# THE BBC COMMUNICATIONS COLLECTION




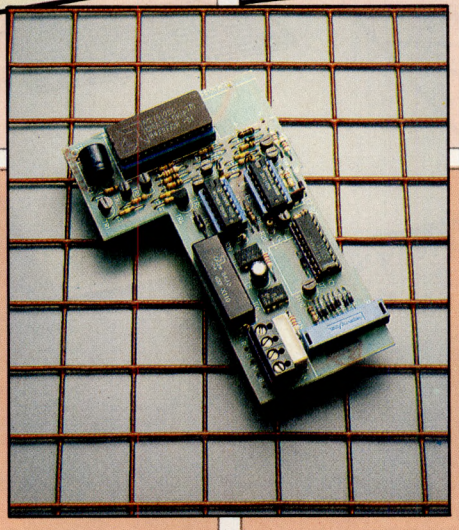

## NEWS RELEASE

### OBBS Bulletin board software

Now, with OBBS and the Nightingale modem fitted with auto-answer accessory board, you can run your own bulletin board on a BBC micro. The entry level system includes many features normally only found on systems costing ten times as much. Full message searching and XMODEM uploading and downloading of software are provided along with unique colour teletext graphics and text facility. **£21.74 plus VAT**

**COMMSTAR** Nominated for the 1985 British Microcomputing award, Commstar is an outstanding piece of software. With it's powerful combination of Viewdata and ASCII terminal capabilities, Commstar is probably the only communications software you will ever need.

Developed specially for the BBC in an 8K eprom, Commstar once fitted, is always ready to use. Although it is unusually versatile Commstar is also very easy to use. Full advantage is made of the BBC's function keys and a comprehensive manual describes each of Commstar's features in simple terms. In addition to preprogrammed functions, items such as logon strings and passwords can be placed under the function keys to facilitate automatic access to the vast range of services which are available. When used in conjunction with the Nightingale modem or other multi-standard modems, Commstar opens up a host of possibilities. Did you know that you could access your bank account from your own home or search British Lending Library's records through their on-line system, BLAISE. Accessing Prestel for the latest news or downloading telesoftware from Micronet is just the beginning. . . .

**NIGHTINGALE ACCESSORY BOARD** This new accessory for Nightingale offers three new facilities on a single card. The auto-dialler now means that you can dial any number without using the telephone. Software designed for use with Commstar will dial a specified number or sequence of numbers once or more until a connection is established, each call being optionally monitored through a loud speaker. Any number of directories can be created and for each telephone number in a directory you may specify a series of attributes which allow Commstar to configure itself automatically for that particular system. Nothing could be easier. Any baud rate may be configured under software control including two new operating speeds 1200 and 600 half duplex which were not previously available. Finally, if you hope to set up your own database or bulletin board, the accessory board includes auto-answering.

Nightingale and accessory board, a complete solution.

**Nightingale modem £119, Accessory board £49, Commstar £29.57,**
**Commstar dialling software available on disc for £10 plus VAT**
**Commstar & Nightingale Combination £139**

All prices exclude VAT. Payment accepted by Cheque, Visa or Access.

**For further details about Pace communications products contact your local dealer or call:**

Pace Micro Technology
92 New Cross Street
Bradford BD5 8BS
Telephone 0274 729306
Telex 51564
Overseas orders and dealer enquiries welcome.
International tel. no.
+44 274 729306

Prestel is a registered trademark of British Telecommunications Plc.
Pace Micro Technology, a division of Pace Software Supplies Ltd.

PACE
Micro Technology

# APPLE COMMUNICATIONS COLLECTION




**MASTERCARD II** Mastercard II is a combined asynchronous RS232 serial and 8-bit parallel interface card for the Apple II+ and //e. The serial port is fully software configurable for baud rate and data format. It is one of the few interfaces which allows true split baud rates (eg 1200/75) for use with viewdata systems like Prestel. Other rates from 150 to 9600 baud are available for full duplex communication with other computers. The parallel port facilitates the use of the autodial/answer board which is available for Nightingale or can be used to drive parallel printers.

**DATA HIGHWAY** Data Highway is arguably the most versatile communications software available for the Apple // series. It is powerful and simple to use. Two main modes of operation, Viewdata and Terminal mode, allow access to a huge variety of public and private viewdata systems, to Telecom Gold, One to One, and many other information services. Data Highway 2.0 offers the ultimate Prestel displays when used in conjunction with a colour monitor and the new Teletext Palette from Pace. Alternatively, if you have //c or //e with an extended 80 column card, Data Highway 2.0 will use the double resolution graphics mode to give the best quality graphics available without the Palette.

**TELETEXT PALETTE** The new Teletext Colour Palette from Pace is a unique piece of hardware. It is designed to give genuine, full colour, viewdata text and graphics on the Apple II+ or //e and it succeeds admirably. The secret is its on-board teletext descoding chip set which generates the full teletext character set including double height, flashing and reveal/conceal features. Use the card with Data Highway 2.0 to access private and public viewdata systems or call the card from Basic to build your own colour graphics frames. RGB colour is generated on the card itself and does not rely on the Apple's colour. The result is crystal clear, brilliant colour displays.

**NIGHTINGALE ACCESSORY BOARD** Enhance your Nightingale with this 3-in-one accessory. Auto-dial, auto-answer and software control in a single package. Data Highway 2.0 can now be used in conjunction with Mastercard II to control your modem automatically. Select from the usual baud rates or gain access to 1200 and 600 half duplex rates which are now available.

**Data Highway V2.0 £75, Mastercard ii £80, Teletext Colour Palette £89, Accessory board £49**

All prices exclude VAT. Payment accepted by Cheque, Visa or Access.

**For further details contact:**
Pace Micro Technology
92 New Cross Street
Bradford BD5 8BS
Telephone 0274 729306
Telex 51564

Overseas orders and dealer enquiries welcome.
International tel. no.
+44 274 729306

Prestel is a registered trademark of British Telecommunications Plc.
Pace Micro Technology, a division of Pace Software Supplies Ltd.

# NO TEETHING TROUBLE.

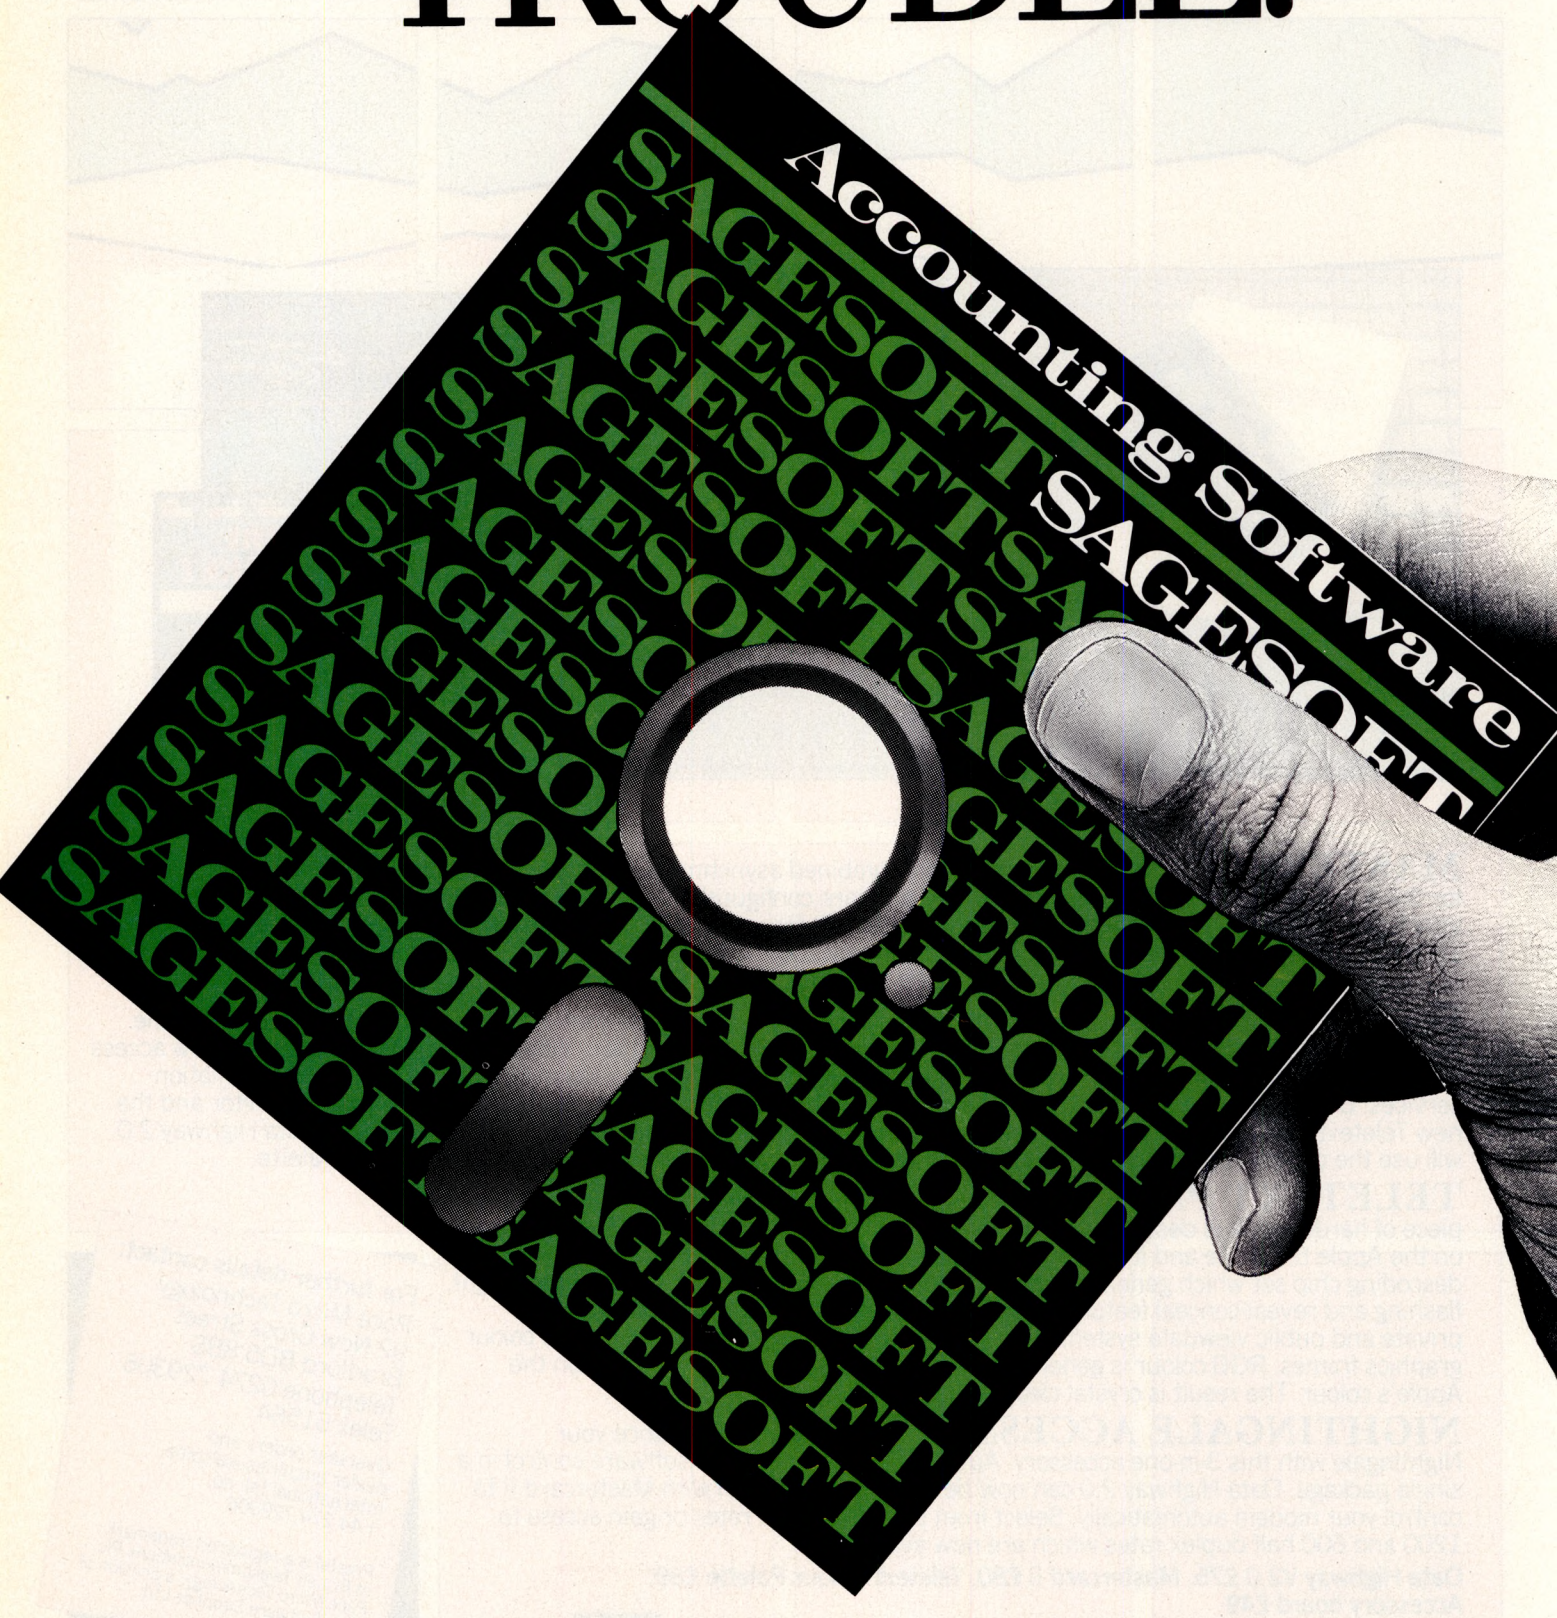

# NO GROWING PAINS.

Most accounting programs fall between two stools - too complex for the fledgeling business, too basic for the growing concern. But not Sage.

Our new, improved family of compatible computer programs will take your brainchild through from first steps to full maturity.

You can cut your teeth on a system that's simple to learn and use, then upgrade easily as you grow bigger and stronger.

It's the most up-to-date accounting program on the market - the result of extensive research and improvement, embodying three years of customer feedback.

We've made computer operation even easier and incorporated colourful graphic displays, yet each program still uses only one disk!

It's Sage ingenuity at its best.

At a price that won't stunt your growth!

SAGE BOOKKEEPER £295 + VAT
The computer program which keeps books for small businesses and cash traders. Start here and grow with SAGE.

SAGE ACCOUNTANT £495 + VAT
A full feature bookkeeping/accounting system to put you in full control of your business.

SAGE ACCOUNTANT PLUS £695 + VAT
The next step up from the Accountant, for the small to medium size business with an above average invoice output.

SAGE FINANCIAL CONTROLLER* £995 + VAT
Top of the Sage range of computer accounting programs. Bring the full power of a hard disk computer to bear on your business.

SAGE PAYROLL £196 + VAT
A full-feature payroll/personnel system which will completely automate the payroll function for companies of all sizes.

## NEW, IMPROVED ACCOUNTS PACKAGES FROM SAGE

*Available 4th qtr. '85

**SAGESOFT**

Please send me more details of Sage Accounting Programs and my nearest dealer

Name: _____ Position: _____

Type of Computer: _____

Company: _____

Address: _____

_____ Tel: _____

Sagesoft plc., NEI House, Regent Centre, Newcastle upon Tyne NE3 3DS
Tel: 091 284 7077. Telex: 53623 SAGESL G.

**BETTER SAGE THAN SORRY**

PCW1

# MEET GRADUATE BRILLIANT AT LASK

**Exclusive to Laskys** – the new Torch Graduate

Convert your BBC-B computer to a fully compatible IBM system with this competitively priced new add-on unit. It consists of a powerful 16-bit processor complete with the latest MS-DOS operating system, providing both software and hardware compatibility with the IBM PC.

A 256K Ram is standard. Coupled with its twin 5¼" 320K disk drives, it has the power to run the most advanced IBM business software such as Lotus 1-2-3 and framework.

With BBC-B computer and green screen or colour monitor, the system includes colour graphics, serial and parallel ports. In conjunction with a BBC-B without disk interface, the Graduate can be used for saving and loading BBC BASIC programmes.

**ONLY £999.13** + VAT

**Plus Free Software**

Set of Psion XCHANGE business software:
Quill – a fully featured word processor,
Abacus – a financial planning spread sheet,
Easel – a business graphics program,
Archive – a powerful database programming language.
Data is transferable between all applications.

New Torch Z80 Disk Pack

Upgrade your BBC-B/D computer for serious business use at relatively little cost with this new add-on unit. (BBC-B with disk interface required.)

Pack includes Torch Z80 card, twin 400K disk drives and system disks.

**ONLY £608.69** + VAT

**Plus Free Software**

Set of Perfect business software:
Perfect Writer – a word processor,
Perfect Speller – a spell checker,
Perfect Calc – a spreadsheet,
Perfect Filer – a database.

Also see our selection of IBM compatible software which can be demonstrated on the Torch.

Torch products are exclusively available at the Laskys branches listed below.

**UP TO £1,000 INSTANT CREDIT.** Ask one of our sales staff for full details. Laskys Credit Brokers. Typical Budget Account A.P.R. From 31.3% variable.

All credit offers subject to acceptance by Laskys Credit Brokers. Ask for written details. Typical APR 31.3% subject to status. Prices correct at time of going to press. All offers subject to availability.

Torch products are exclusively available at the following Laskys branches: Central London (42 and 257 Tottenham Court Rd., W1), Aberdeen, Birmingham, Brent Cross, Brighton, Cardiff, Cheltenham, Croydon, Ealing, Edinburgh, Enfield, Glasgow, Leeds, Manchester, Newcastle, Nottingham, Peterborough, Preston and Sheffield.

# THE AND FOUR BROTHERS IS NOW!

**Best price promise on Brother Printers**

Brother M-1009 compact dot matrix printer
Ideal for most business and home computers. Full 80 column printing on sheet, roll or fan-folded paper. 50 cps. Bi-directional text printing. In two versions: Centronics (Epson compatible).
**ONLY £156.51** + VAT

Dual Centronics Parallel and RS-232C (Epson compatible).
**ONLY £173.90** + VAT

Brother HR-15 daisy wheel printer
Offers 2-colour printing (black and red), shadow printing, proportional spacing, super/sub-script and auto underlining 3K buffer memory. Print speed 18 cps. Centronics parallel or RS-232C interface – compatible with most business computers.
**ONLY £347.74** + VAT

New Brother HR-10 daisy wheel printer
Delivers superb bi-directional letter quality printing at around 12 cps. Centronics or RS-232C interface means it is compatible with virtually every computer on the market.
**ONLY £243.47** + VAT

BROTHER PRINTERS AVAILABLE AT MOST LASKYS STORES

**Best price promise**
If, after purchasing ANY ITEM at LASKYS you discover that you could have bought the same product cheaper locally and call back within 7 days, we promise to pay the difference.

**Best products**
TOP BRANDS: All the leading brand names. BIGGEST RANGE: See the latest models in Hi-Fi, Video, Computers, Microwaves and Accessories.

**Best service**
HEAR any combination of our Hi-Fi Separates.
SEE our range of TV's and Video's in action.
FREE 14 day exchange period.
FREE GUARANTEE up to 2 years with the option to extend up to 5 years for a small premium.*
INSTANT CREDIT up to £1,000.†
PAYMENT OPTIONS: cash, cheque, major credit cards.
Plus expert after-sales service from our Servicepoint network engineers.

*2 year parts and labour Guarantee on Hi-Fi and TV. 1 year on VCR's, portables, video cameras, computers and peripherals. †Ask one of our sales staff for full details. Laskys Credit Brokers, Typical Budget Account A.P.R. From 31.3% variable.

LASKYS
MORE ON OFFER - MORE TO OFFER

# NEW AND DEMO STOCK AT MORGAN

**(All plus VAT)**

**APPLE** — software

| | |
|---|---|
| Apple Writer | £45 |
| Apple Quickfile | £35 |
| Multiplan | £43 |
| Visicalc | £43 |
| 80 Col Card for 11e | £35 |
| Parallel Card | £30 |
| Serial Card | £45 |
| UHF Modulater | £15 |
| Visiterm/Visished | £35 |
| Visiplot | £35 |
| Extended 80 col(11e)+64k | £75 |
| Business Graphics | £45 |
| Systematics 11e | £xx |
| Purchase Ledger | £65 |
| Sales Ledger | £65 |
| General Ledger | £65 |
| Stock | £65 |
| Invoicing | £65 |
| Disk Controller | £45 |
| INTEGER Card | £50 |
| Apple Pascal II & III | £45 |
| CCA Database | £35 |
| DBASE 11 | £150 |

**HARDWARE**

| | |
|---|---|
| Apple Disk Drive | £135 |
| Apple Monitor | £75 |
| Apple 111 | £750 |
| Apple EUROPLUS | £225 |
| Apple llc Drive | £200 |
| Centronics Card | £30 |
| Serial Card | £45 |
| I-EEE Card | £85 |
| Silentype Printer | £45 |
| Joystick | £15 |
| Grappler Card | £70 |
| Mackintosh | £1200 |
| Apple 111 disc drives | £95 |

**IBM**

| | |
|---|---|
| IBM PC Complete | £1200 |
| IBM Graphics Printer | £295 |
| AST Megaplus Cards | £250 |
| Tallgrass Hard Disk | £600 |
| Dbase 11 IBM | £150 |
| IBM Colour Mon | £350 |
| F.T. Moneywise | £200 |
| Framework | £295 |
| Symphony | £350 |
| SDLC | £90 |
| AT Serial Cable | £45 |
| AT Parr/Ser Cable | £80 |
| IBM Portable | £1400 |
| IBM Expansion Unit | £1000 |
| Displaywriter 11 | £195 |
| Lotus 123 | £225 |
| HMS PC,AT,XT,PORT | £50 |
| PFS series each | £50 |

**ACT**

| | |
|---|---|
| Apricot Twin Drive 256k inc Monitor | £1100 |
| ACT printer 15 | £225 |
| Apricot Portable | £1250 |
| DBASE 11 | £150 |
| Wordstar | £150 |
| Most Pulsar Grey | £65 |
| Citoh Plotter | £400 |
| Spare Monitors | £100 |

**EPSON**

| | |
|---|---|
| HX 20 | £295 |
| QX 10 | £800 |
| CX21 | £125 |
| Sheet feeder LQ1500 | £250 |
| Keyboard DX 100 | £100 |

**Many Cable RIBBONS ECT**

**OLIVETTI**

| | |
|---|---|
| M10 Modem | £70 |
| Olivetti Jet Printer | £125 |
| Colour Mon. M24 | £300 |
| MIO Portable | £250 |

**MISC**

| | |
|---|---|
| HR 25 | £450 |
| PR1 Acou Coup | £90 |
| Atari 600xl | £50 |
| Microvitec Mon | £150 |
| HP 86 cpu | £495 |
| Honeywell L32 | £295 |
| NEC spinwriter | £700 |
| Rioch 1600 'S' | £550 |
| Seikosha GP 100 | £90 |
| VTX modem | £50 |
| Taxan Col mon | £150 |
| Dragon 32 | £45 |
| Kaga mon from | £50 |
| Juki 6100 | £250 |
| Microwriter | £195 |
| HP 7470A | £600 |
| HP 7475 | £995 |
| Buzz Box Modem | £75 |
| Oric Atmos | £45 |
| Oric 4pen Plot | £60 |
| Compaq Port | £1300 |
| Hyperion 256 | £1100 |
| Enterprise 64 | £150 |
| Sharp MZ 80B | £395 |
| Sharp P6 printer | £195 |

**SANYO MBC 2000**

12″ GREEN SCREEN twin 320k drives cpm ..... £395

**SANYO MBC 1000**

12″ GREEN SCREEN single 320k drive CPM ..... £325

# MORGAN CAMERA COMPANY

**179 TOTTENHAM COURT ROAD, LONDON W1 Tel: 01-636 1138**

**PEGASUS ACCOUNTING**
Regarded by many accountants as the very best accounting software available. Pegasus comprises eight modules, most of which will operate alone or will work together in a totally integrated system. We have professional staff, in London and the Midlands, fully trained to install and support Pegasus. Prices and details on request.
We are authorised Pegasus dealers.

**COMPUTER-AIDED DESIGN**
As specialist consultants in this field we can supply either software only or a total system configuration with full support. We are suppliers of AUTOCAD, DOODLE and a number of other CAD packages. The productivity benefits of CAD are enormous – the cost of a system is almost certainly much less than you would expect. In most cases our clients have found a system pays for itself within 3 to 12 months!

**MULTISOFT ACCOUNTS**
A system offering top-level functionality at a very reasonable price. Recent press reviews have highlighted Multisoft as one of the most powerful micro-based accounting systems currently available. We concur. Very impressive indeed! Please telephone for further information. We are officially appointed Multisoft dealers.

**CHIT-CHAT**
The new telecommunications package from Sagesoft which we feel represents outstanding value for money.
★ Micro-to-micro file transfer.
★ Top of the range EMI Datatek modem.
★ Free subscription to Telecom Gold (worth £100).
★ Access to Viewdata and Prestel.
★ Electronic mail, telecommunications and telex.
List price **£399** our price **£325**

# BEST U.K. SOFTWARE PRICES?

## TRISOFT LTD. 0629-3021

Whether you are seeking specialist advice or simply wish to buy your software at a competitive price we believe that Trisoft Ltd offers a service second to none. Apart from offering over 350 software packages, covering most machine formats, we are also dealers in ACT Apricot, Olivetti and North Star Dimension (IBM-compatible, multi-user), computers.

**NEW VERSION**
**DBASE II £239**
**WORDSTAR PROFESSIONAL £265**

| | | | |
|---|---|---|---|
| LOTUS 1-2-3 | £289 | MULTIMATE V.3.3 | £265 |
| FRAMEWORK V.1.1 | £325 | DR C COMPILER | £225 |
| DBASE III V.1.1 | £325 | MULTIPLAN | £145 |
| SUPERCALC II | £145 | OPEN ACCESS | £325 |
| DMS DELTA 4 | £375 | ENERGRAPHICS | £265 |

★★★

# There's mor

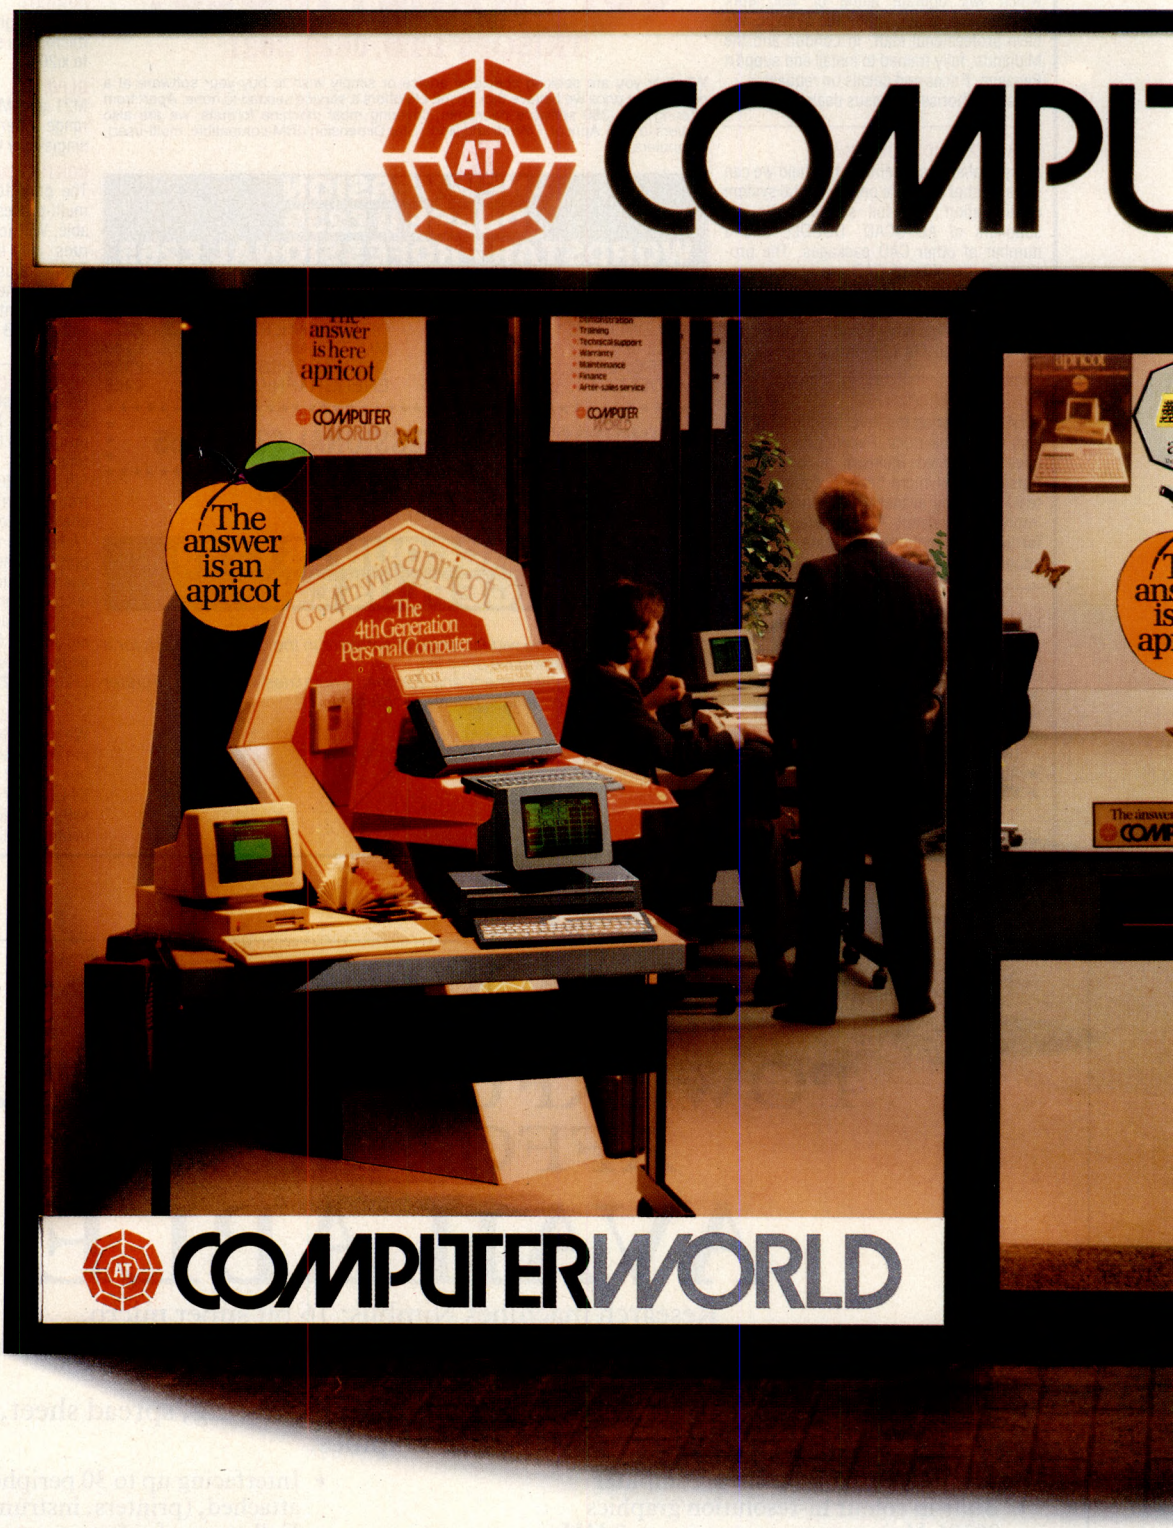


AT ComputerWorld – the UK's leading business computer chain – designed to help you and your business. With a pedigree like ours – we are a joint venture company owned by ACT (over 25,000 Apricots successfully installed) and the Tandy Corporation (the world's 3rd largest micro manufacturer) – you'd expect to find the best.

We don't think you'll be disappointed.

To find out how the superb Apricot and Tandy micro computers could benefit your business please join us at one of our major customer seminars being held over the coming weeks. This nationwide programme of business events is designed to provide progressive companies with free professional advice as to the best choice of system for their particular needs. To obtain your COMPLIMENTARY tickets simply fill in the coupon and return it to us immediately. Numbers must be restricted – so don't delay.

If you can't make any of the seminars, please call into one of our ComputerWorld business centres. Our experienced consultants are always on hand to discuss your computing requirements.

# e in store at

# TERWORLD




COMPUTERWORLD

## COMPLIMENTARY SEMINAR TICKETS

## AT ComputerWorld Stores now open at:-

| | | | |
|---|---|---|---|
| BIRMINGHAM | 021-643 5362 | LONDON EC2 | 01-283 9283 |
| BRADFORD | 0274-728431 | LONDON WC2 | 01-836 1327 |
| BRISTOL | 0272-277104 | LONDON NW1 | 01-388 8484 |
| BRISTOL | 0272-214721 | LONDON EC4 | 01-248 5313 |
| CAMBRIDGE | 0223-66444 | LONDON SW1 | 01-828 1423 |
| CHELTENHAM | 0242-515152 | MANCHESTER | 061-832 8322 |
| CARDIFF | 0222-45859 | NEWCASTLE | 0632-615161 |
| COVENTRY | 0203-23582 | NORWICH | 0603-612553 |
| CRAWLEY | 0293-543301 | NOTTINGHAM | 0602-412144 |
| CROYDON | 01-680 1852 | READING | 0734-508787 |
| EDINBURGH | 031-337 9870 | SHEFFIELD | 0742-752858 |
| GLASGOW | 041-221 8413 | SHREWSBURY | 0743-68167 |
| HULL | 0482-28811 | SOUTHAMPTON | 0703-336344 |
| LEEDS | 0532-433411 | SWINDON | 0793-762449 |
| LEICESTER | 0533-550661 | TELFORD | 0952-506664 |
| LIVERPOOL | 051-236 1112 | WILMSLOW | 0625-584727 |
| LIVERPOOL | 051-708 0133 | WOLVERHAMPTON | 0902-712121 |

Please send me details of a customer seminar at a venue near to me.

NAME: _____

POSITION: _____

COMPANY: _____

ADDRESS: _____

_____

_____ TEL. NO. _____

Return To: COMPUTERWORLD

AT ComputerWorld Ltd., 43 Calthorpe Road, Edgbaston, Birmingham B15 1TS.
Telephone: 021-455 8484.

PCW 7/85




Top row KX1203, K12SV3, KX1201. Bottom row K12R3, K12R2. Optional 'tilt and swivel' stand shown with certain models.

# Aim straight for a Taxan

When you're aiming for the best monitor around, set your sights on a Taxan.

Because Taxan are quite simply the biggest selling range of monochrome and colour monitors in Britain today.

And that's hardly surprising since every Taxan Monitor is designed and engineered for superb style and maximum performance.

Take a look at the KX1201 and KX1202 for example.

High quality, high resolution 12 inch monitors offering a choice of Green or Amber display with a long persistence option on the Green phosphor model.

With the latest non-glare flat tube for easier viewing and more than 20MHz video bandwidth, you can't do better than a Taxan monochrome monitor.

Taxan also produce a range of 12 inch RGB colour monitors that give you unbeatable price performance.

Like the medium resolution K12R2 (Vision II) and the high resolution K12R3 (Vision III).

Compact professional monitors, suitable for all popular micros. Built-in switchable RGB interface for added versatility and both suitable for 80-column text display.

Finally, the K12SV3 (Super Vision III). A 12 inch, RGB, super-high resolution, colour monitor with three different monochrome modes. Fully compatible with IBM PC, Apple, BBC and most other personal computers it is simply the most versatile monitor on the market today.

Taxan Monitors retail at around:

| | |
|---|---|
| KX1201G | £109 (plus VAT) |
| KX1202G (P39 Phosphor) | £119 (plus VAT) |
| KX1203A | £119 (plus VAT) |
| K12R2 | £285 (plus VAT) |
| K12R3 | £399 (plus VAT) |
| K12SV3 | £429 (plus VAT) |

Ring us on Ascot (0990) 28921 for the name of your nearest dealer. And find out why you should aim straight for the best-selling range of monitors around.

DDL

5 King's Ride Park,
Ascot, Berks. SL5 8BP
Tel: 0990 28921
Telex: 846303 DD LTD G.

**THE NEW FORCE IN DISTRIBUTION**

# Tailored Business Systems

Including Training, Installation, Software and Hot Line Support for all your technical queries

From £2,500

## COMPLETE BUSINESS PACKAGES

- Analyse your needs
- Select a cost effective & efficient system for you
- Demonstrate the recommended equipment & software
- Install the equipment and software
- Train your staff
- Supply software & hardware maintenance
- Supply systems allowing for future growth and expansion

We only recommend leading name products including:

COMPUTERS - ACT APRICOT PC & XI, ACT APRICOT POINT 32 Network, SPERRY MODELS 10 to 50, SPERRY Network up to 63 Terminals, ICL Model 36 & 46 (Multi user), COMPAQ, IBM all models.

PRINTERS - BROTHER · CANON · MICROLINE · EPSON ·

SOFTWARE - INTEGRITY Multi user accounts, TBS ACCOUNTS (Single user), PADMEDE ACCOUNTS, SUPERCALC 3, SUPERWRITER, D Base 2&3, WORDSTAR 2000, LOTUS 123 etc.

MODEMS - Integrated Modems for ACT, SPERRY, IBM and all IBM Compatibles

**Authorised SPERRY & ACT BLUE RIBBAND Dealers**

*Full Maintenance available ■ Leasing Facilities arranged*

## Tailored Business Systems Ltd

2nd Floor, Gate House, The High, Harlow, Essex CM20 1OU

Ring Round 3116

CONTACT US ON... **0279 413893** (10 lines)



# Herbie Briggs has just destroyed the myth that all floppy discs are created equal.

They seem equal. Until you look at the seams.

That's where equality ends.

Most companies seal their discs with a spot here, a spot there. Leaving most of each seam not sealed at all.

Sooner or later, the seams might do what comes naturally: they bulge. Warp. Pucker. Open up.

Pens, pencils, fingernails—even a four-year-old's, like Herbie—can catch and snag in those wide open spaces.

That's sloppy. And dangerous. Because if you put a sloppy floppy into your disc drive, it can jam your drive. Ruin your drive head. Lose your data.

So much for their seams. Ours are different.

**THE SLOPPY FLOPPY:**
Sealed with a spot here, a spot there. Leaving unsealed seams everywhere.

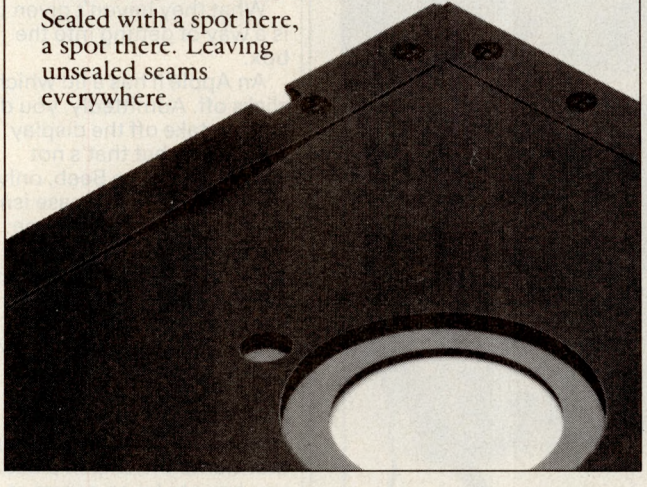

Memorex uses a process we developed, called Solid-Seam Bonding.

Solid-Seam Bonding seals shut every inch of every seam of every Memorex® floppy disc. Tight as a drum. That makes the Memorex floppy stiffer. Stronger. And your data safer.

To resist bulging, warping, puckering, or opening up.

**MEMOREX SOLID-SEAM BONDING:**
Every inch of every seam is sealed shut. Tight as a drum.

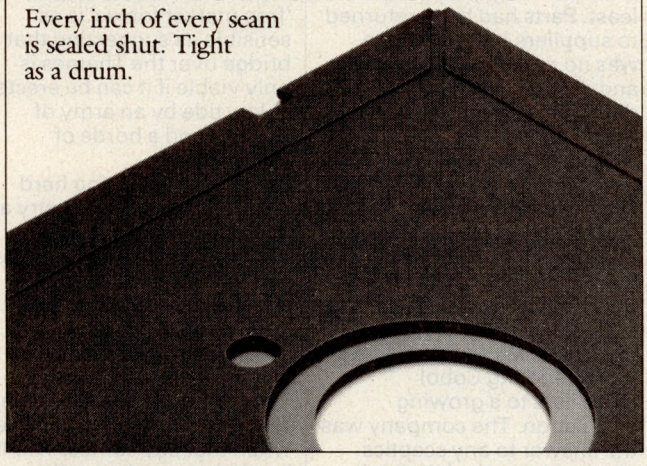

To resist all the things that can jam your drive, ruin your drive head, or lose your data.

Which proves that a Memorex floppy disc isn't equal to all the others. It's better.

Solid-Seam Bonding is just one example of the extra care that goes into every Memorex floppy disc. Be it 8," 5¼" or the new 3½." Extra care that lets us guarantee every Memorex disc to be 100% error-free.

The next time you're buying a floppy disc—or a few hundred of them—just remember this:

It's always better to be safe than sloppy.

For more information on the full line of Memorex quality computer media products, including computer tape, call Memorex U.K. Ltd., 96-104 Church Street, Staines, Middlesex. Tel: 0784 51488




Your Data. When it matters, make it Memorex.™

# MEMOREX

Memorex is a registered trademark of Memorex Corporation.
© 1984 Memorex Corporation



*Bowler and brolly at the ready, Guy Kewney goes to the City to reveal Sinclair's financial problems. He also knows about the new Enterprise and Atari's latest 400/800 lookalike. Read on . . .*

## In the City

No-one is pretending that Sinclair has no financial problems. At the time of writing, the only thing I couldn't establish was just how bad they might be. Sales of the Spectrum were low and sales of the QL were disappointing, to say the least. Parts had been returned to suppliers because there was no point in keeping them, and also because Sinclair didn't have the money to pay for them.

Yet a mere 12 months ago, the company was riding high on enormous profit figures, and people were actually hoping that Sinclair Research would go public, soon, so that they could buy shares.

Over in a different part of the forest, Micro Focus has been peddling Cobol compilers to a growing population. The company was the answer to any sceptics who said that the UK didn't have a micro industry, and indeed, the day its shares halved — more than halved — in value, I was on the phone to someone saying exactly that.

City analysts, like myself, don't like to feel foolish, and they were enraged to find that the company which they had been recommending as a safe bet in high technology was suddenly changing its accounting system, and their recommendations of the day before suddenly made them look ignorant and uninformed.

Neither Sinclair nor Micro Focus is in any doubt of long-term success — if they can get the money they need. With Micro Focus, the need for money isn't crippling; the City's reaction to the change is plain daft and the shares will be back soon.

In Sir Clive Sinclair's case, however, there are several secret but important projects on the boil in Cambridge which absolutely must have, now, a lot of capital.

When I worked in the construction business, I visited many sites where large structures were being built in muddy river beds.

You just can't start building on a river bed by taking a space and pouring concrete into foundation trenches. You can if the tide is out, but when the water comes back it will obliterate everything you have done. Civil engineers build caissons (dry pits surrounded by metal) in which the main engineering work can take place.

To suggest that the possible failure of Sinclair Research is justifiable because it must be able to withstand the play of 'free market forces' is as sensible as suggesting that a bridge over the Thames is only viable if it can be erected at low tide by an army of navvies and a horde of brickies.

The tide is running hard against the micro industry at present. It will turn, and we will need the products of the industry of 1990. But at the current rate, there just won't be one in this country.

I only hope all you shareholders in British Telecom and Aerospace, and TSB, feel proud of yourselves when that day comes. You'll be able to use the profit you've made on your shares to buy some of the nicest Japanese and American technology you've ever seen.

As for help from the Government, well, I have a nice little story from Metacomco in Bristol to illustrate just how helpful government machinery can be.

Metacomco sells software — systems software such as operating systems, languages, and so on — for 68000 machines. It sells a Pascal compiler for the QL, in particular, and the software is supplied on a microdrive cartridge (that's the only way of getting it into the machine).

Imagine the company's delight to be given a contract to supply some to overseas customers! And imagine its pleasure at being told by Customs officials that it had to apply for an export licence for each order for a microdrive cartridge.

The microdrive cartridge, you see, is smaller than a diskette. Therefore, it must be 'higher technology' and so must be subject to the laws that prevent us equipping the Russians with missile control systems.

Clever, eh?

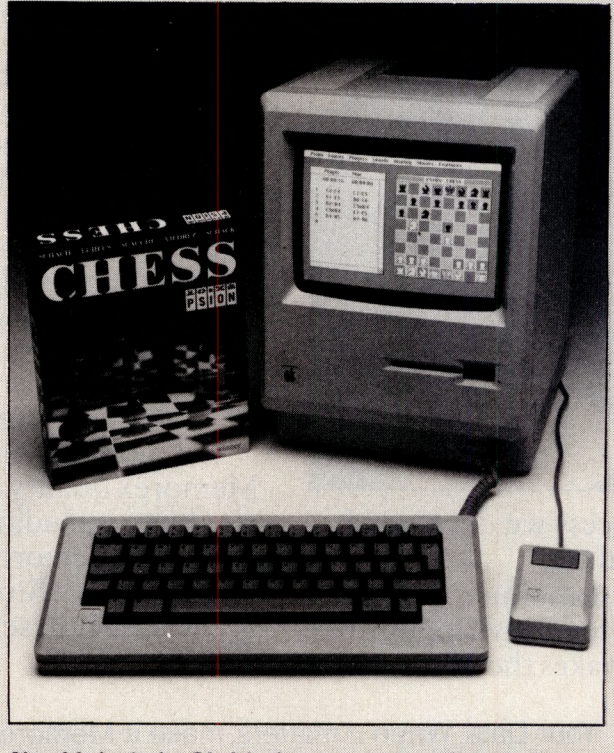


***No, this isn't the QL. It's the same game of chess that Psion originally wrote for the QL, yes, but this is a Macintosh screen. It costs £50.***

## Opening the box

Technically, there's little to expand on about the new BBC B+.

The disk operating system is now capable of being upgraded because at last, the Intel 8271 diskette controller has been abandoned.

The new chip, which has been available for nearly four years, is programmable. Theoretically, the BBC can now be used to read diskettes from other machines such as the IBM PC, and so on. In fact, this ability is going to have to wait; the file system is still just a rewrite of the old DFS, with 31 files per diskette.

The other thing the BBC badly needs is space to plug in ROM software.

The designers have given us sockets for bigger chips, taking the potential of plug-in word processing programs such as Wordwise and View up several steps. There are also six sockets, not five, and the Acorn-supplied software takes two, not three of them.

What they haven't given us is a way of getting into the box.

An Apple II has a lid which clicks off. Admittedly, you do have to take off the display screen first but that's not necessary on the Beeb, only because the Beeb's case isn't strong enough to hold one.

On the Beeb, you have to get your screwdriver out and take the case apart. This involves turning the thing upside down, which usually means first unplugging everything like disk drives, modems, and so on. Then, instead of sockets with levers that clamp the chip in place, you have to be an expert at putting chip packages into sockets — and, less likely, at getting them out again if you change your mind about their priority. The fact that you no longer have to undo the keyboard as well is welcome, but not really enough.

All these little niggles were previously always in the back of your mind when comparing the Beeb with the Apple. But you said to yourself: 'Ah, well, it's quite a

bit cheaper, isn't it?' and muttered under your breath something like 'and anyway, it's a British design, and we're as good as those California freaks any day'.

The price comparison isn't so exciting any more. There's nothing like VisiCalc for the Beeb, and the Apple's price has dropped remarkably.

Perhaps we should all take up bee-keeping instead. At least bee-keepers don't expect progress, so they won't be disappointed at getting the same amount of honey from each bee every year. And they expect to get stung every now and then. I just had a different kind of dream in mind when I got involved with micros, that's all . . .

## Amstrad denies nothing

I think (I'm not sure, mind you, I just think) that it is official: Amstrad will *not* be launching a 68000-based micro this year.

The company has said, many times, that it isn't in the business of driving ahead with new technology, that it wants to take tested technology and package it in the way that it (uniquely, it seems) understands. That is, in a nice-looking box with a price tag of less than it looks.

The Amstrad is, strangely enough, living proof of the fact that I was wrong in suggesting that MSX stood no chance. It is as close to MSX as you can imagine, but better packaged. MSX would have stood a chance packaged in the same way: that is, with a built-in screen and tape drive, and with a few cost savings to pull down the price.

There is now a new version of MSX called MSX II. That looks as likely to succeed as the previous version, which is to say, not at all.

However, not far down the road is MSX III. It looks likely to be around for Christmas 1986, and it looks likely to be a dual-processor Z80 and 68000 system.

That is where Amstrad's futuristic leanings are headed at the moment, and as soon as it has a chance to study MSX II, you can expect the company to make a decision.

Either it will imitate it, or, more likely, it will find one or two cost savings, a good gimmick and a neat packaging idea, and do something similar that looks much better.

But I think (again, I'm not sure) that rumours of a 68000-based system are based on the reluctance of senior Amstrad executives to play Twenty Questions. As one of them said to me: 'If you ask what we're doing, I obviously won't say. Then you ask me if I'm doing an 8086, and I say no, then you say what about a 68000 and I say no, and after a few questions like that, you will have a pretty good idea of what we're doing. So I'm not going to deny a thing.'

## Silicon Office junior

The very first 'integrated' software I saw was not Lotus 1-2-3 but Silicon Office, and there is now a smaller version of that product available for machines like the Apricot F1E.

It provides integrated word processing, database management, a calculator, plus its own programming language which is said to be easy for the untrained business user to learn. It costs £295 plus VAT.

## Olivetti to market Unix system

Olivetti has done well, if only in terms of public exposure, with its IBM-like M24. It recently did a deal, for example, with Rank Xerox (and its parent, Xerox Corporation) whereby Xerox will join American phone giant AT&T in selling the M24 under its own label.

The other side of the AT&T coin has just flipped over, and that is almost certain to give Olivetti a harder time because AT&T now wants Olivetti to sell its Unix machine in Europe.

Olivetti will market the 10-user Unix system under the B2 label in Europe, and is trying hard to persuade ordinary computer stores that they can sell this.

'We recognise that one problem will be raising the finance,' said an Olivetti executive, 'since the average PC sale involves a £1800 price tag, and with the Unix system we're talking about £20,000. So we're prepared to help finance sales from our own resources.'

Unix is as close to reality as it has ever been, but that still doesn't mean it will ever be a personal computing tool. And computer stores do sell personal computing, retail, to

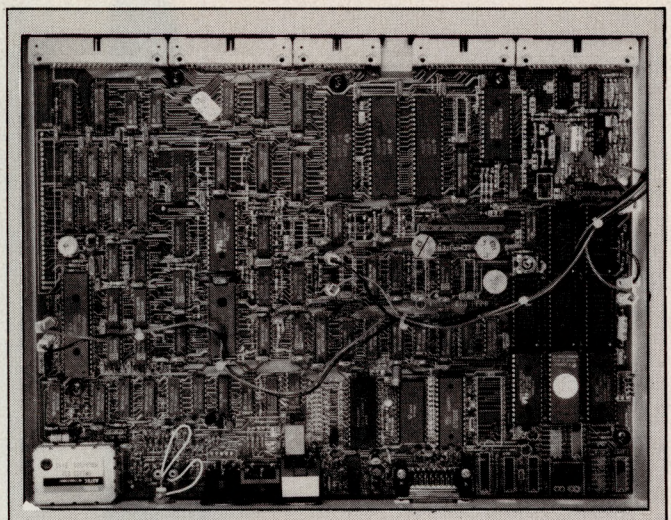

***Acorn didn't announce the new version of the BBC Micro, the B+, back in January because it is widely known that it is stupid to announce details of a new, faster, nicer product when you're still trying to sell off thousands of the old, expensive, creepy one.***

***If only it had been candid in January! All it had to say was: 'Don't get excited about the rumours of a new BBC Micro because you only get an extra 32k of memory, and the price will go up £100 to cover the disk controller chips which will be thrown in.'***

***Instead, Acorn pretended there was no 'release X' board (everyone had seen it, inside the ABC business computer) and that there were no plans to release an improved Beeb.***

***Everyone assumed, logically enough, that the new machine must be a real whizzer, and I'd really like to know how many unsold BBC Micros and Electrons remained unsold on that account, leading, as we all know now, to the collapse of the company's finances.***

***The new BBC B+, whose board is pictured above, doesn't even have the BREAK key disabled. This is 1985, and Apple learned not to have the RESET key where you could bump it by accident, five years ago. Acorn still hasn't worked this one out. The result: machine code programs that contain priceless information taking hours to work out (a game which has just reached level 20, a word processing program with hard-won information, and so on) can be literally wiped out by pressing function key 10 instead of function key 9.***

***All the signs are that this isn't the ultimate Acorn machine, and that work continues in the (vain, I think) hope of being ready for Christmas, with a real winner. But the signs are also there to suggest that very few of the remaining Acorn staff really believe in this project. Those who do have been leaving, apparently discouraged by the lack of firm direction.***

***What firm direction there is, it seems to me, is firmly committed to the ideas put forward in public by Alex Reid — that Acorn can't compete in the toy market, that there is a big untapped market for 'superior' hardware, and Acorn has the best machine in the world.***

***A BBC Micro system with two disks and a colour screen still fetches so close to £1000 that there isn't any point in counting what it does give you by comparison with other £1000 systems, such as the Atari 520ST or the Commodore Amiga. All it has today, over those systems, is availability and an analogue-to-digital conversion circuit.***

***They, on the other hand, have very high-res displays, very fast 16-bit processors, enormous memory maps, and multi-tasking operating systems — plus things like Midi interfaces to synthesisers, mouse interfaces, and proper word processing, spreadsheet and database software.***

***How can 32k of 'shadow' memory plus a DOS that gives you 31 files per disk in a machine that turns itself off when you touch a button, compare?***




**Extra Compatibility** The A-200 is fully compatible with the IBM PC, giving access to the world's widest range of software and peripherals. It uses MS-DOS, the industry-standard operating system, and GW-BASIC, the most popular language. So it's totally in step.

**Extra Speed** Unlike many other PC's, the A-200 has the 8086 processor and uses a 16-bit data bus. So it's quicker thinking.

**Extra Memory** The A-200 has a basic memory of 256 K, expandable to 512 K, plus twin 360 K disk drives. So it's harder working.

**Extra Expandability** The A-200 has built-in Centronics and RS 232C interfaces, leaving 4 expansion slots for optional extras such as Winchester disks up to 140 MB and local area networking. So it grows with your business.

**Extra Desk space** The A-200 has a tilt and swivel, high resolution screen and an IBM compatible keyboard layout. It's not only quieter and better looking than most PC's, but smaller and lighter too. So it won't cramp your style.

**Extra Quality** Canon's unrivalled expertise in optics and micro-electronics, plus a world-wide reputation for excellence in business machines, is the ultimate guarantee of quality in the A-200. So you know it won't let you down.

**Extra Value** At £1,875 for the A-200 monochrome package, all these extras are standard. So you do get more for your money.

IBM is a trade mark of International Business Machines Corporation.
MS-DOS and GW-BASIC are trademarks of Microsoft Corporation.
Centronics is a trade mark of Centronics Data Computer Corporation.

# A-200
## PERSONAL COMPUTER

# As sure as the sun rises in the East, this is a better value personal computer.

# Because so many extras are standard.




TO GIVE YOU GUARANTEED IBM® COMPATIBLE MORE SOFTWARE

POST TODAY

To: Canon (UK) Ltd., Computer Systems Division, Canon House, 2 Manor Road, Wallington, Surrey SM6 0AJ. Tel: 01-773 3173. Facsimile: 01-773 2156.

PCW 7/85

Please send me extra information about the A-200 Personal Computer.

I'd also like to know more about other Canon Computer products.

**TX-50 Counter terminal** ☐
**HT-5000 Handy terminal** ☐
**LBP-8 Laser printer** ☐

Tick boxes

Name_____
Company_____
Position_____
Address_____

_____ Telephone_____

**Canon** COMPUTER SYSTEMS

Canon
LEAGUE
*Official Business Machines of The Football League*

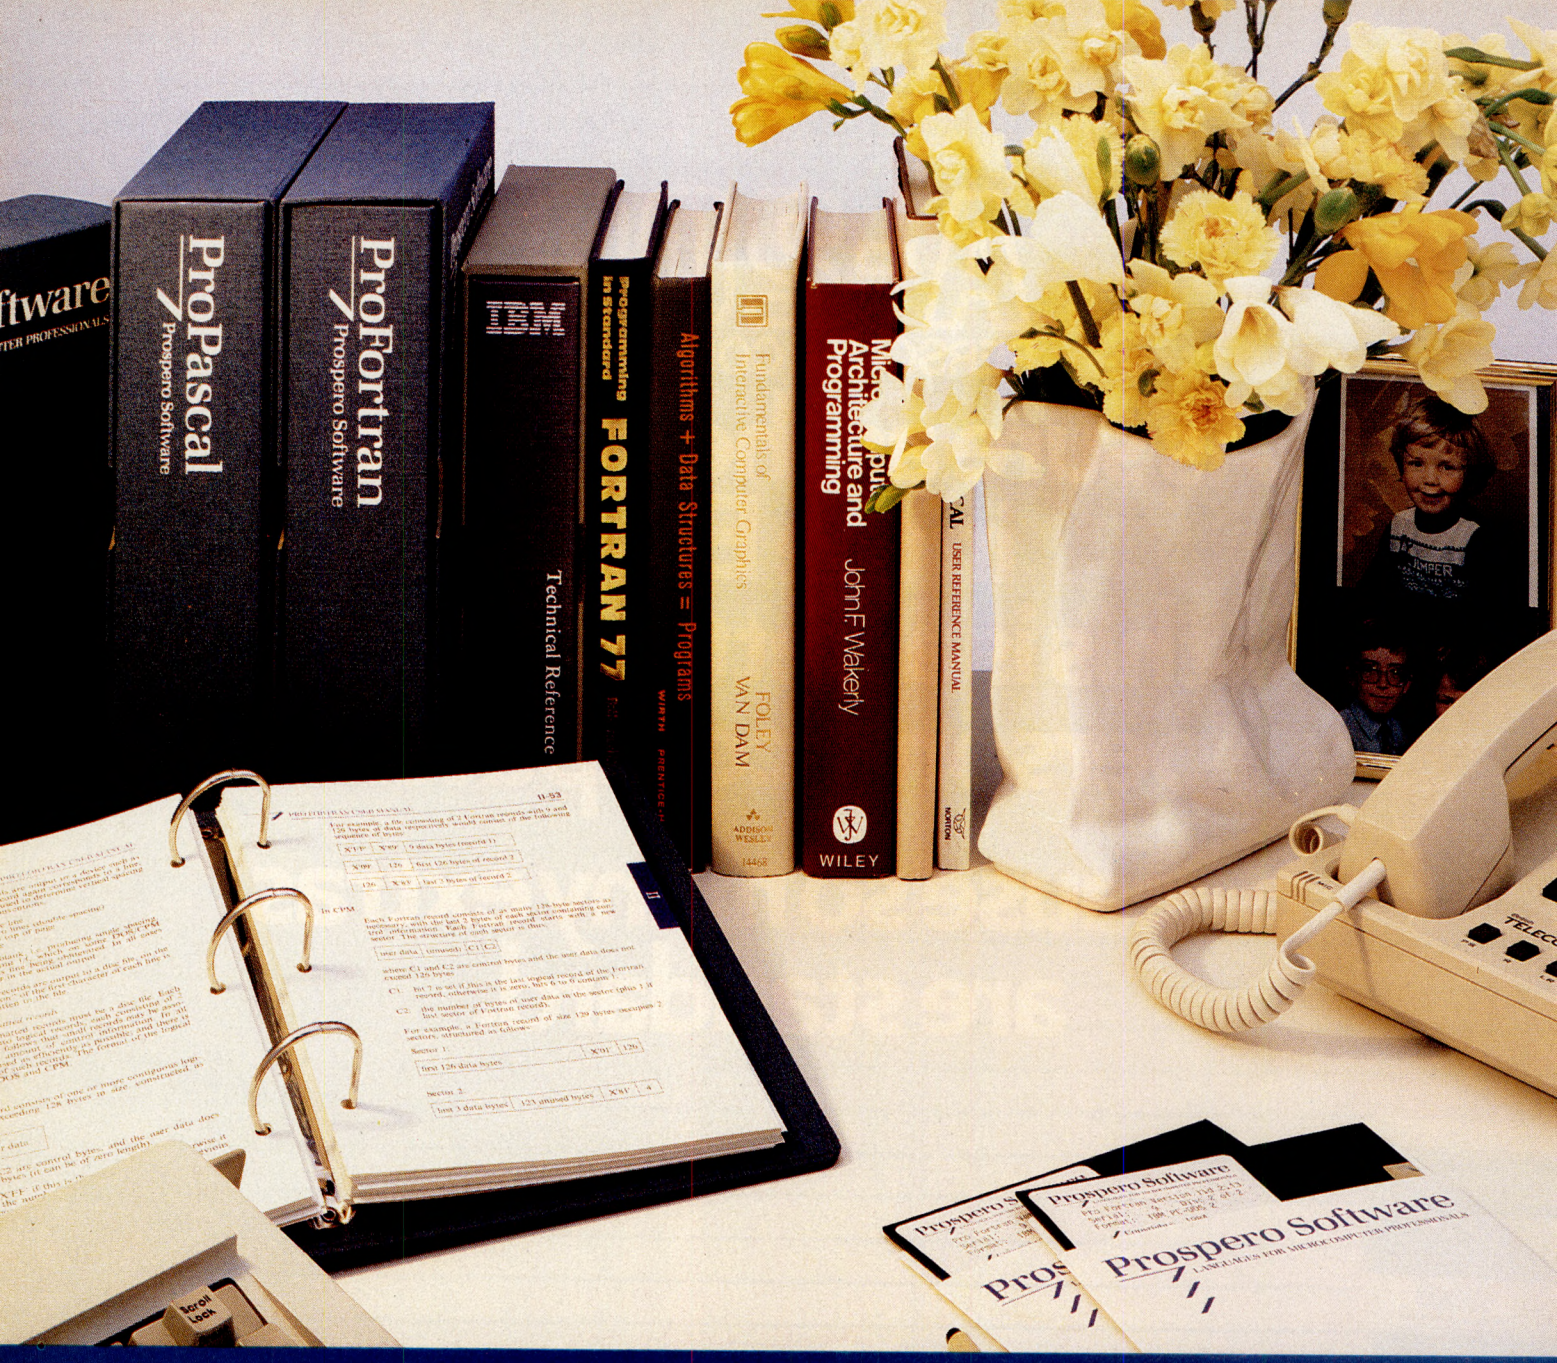


# Prospero Software

## 7 LANGUAGES FOR MICROCOMPUTER PROFESSIONALS

As a professional programmer you need a language that's standardised (so you can work on any hardware), a compiler that conforms to standard and behaves the way you expect, excellent documentation, and responsive support. That's what you get from Prospero Software.

Prospero's Pro Fortran and Pro Pascal compilers are used by over 3,000 microcomputer professionals working on Z80 and 8086 hardware in 5 continents. They're fast, clean, efficient and easy to use.

Pro Pascal was the first microcomputer Pascal compiler to be validated to ISO 7185 by the British Standards Institution. Pro Fortran is 66-with-extensions which compiles Fortran IV source. The new 8086 releases of both include a symbolic debugger and support for programs and/or data over 64K. A full Fortran 77 compiler is under development.

*Prospero software is distributed by Xitan, Tradesoft, MPI and Software Ltd. in the UK, Lifeboat Inc. in Japan and Lifeboat Associates in the USA.*

**Prospero Software Limited,**
190 CASTELNAU, LONDON SW13 9DH, ENGLAND.
TEL: 01-741 8531. TELEX: 8814396 PROSOF G.

To: PROSPERO SOFTWARE LIMITED,
190 CASTELNAU, LONDON SW13 9DH, ENGLAND.

☐ *Please send information on Pro Fortran/Pro Pascal.*

*NAME* _____

*POSITION* _____

*COMPANY* _____

*ADDRESS* _____

_____

*POSTCODE* _____ *TEL* _____

PCW 7·85

single buyers. It remains to be seen whether people will really go into a store and ask for a 10-user Unix system to be installed in their department, but Olivetti insists: 'We have no direct sales force, and are committed to selling through dealers.'

## Tiny Tripos

Anyone planning to make a lot of money from systems software, here's my tip: get into the property business.

I got this tip from Metacomco, the Bristol company which is quietly polishing up a multi-tasking operation system, Tripos, for the 68000. In order to borrow money from the bank (to finance future projects) the company has actually bought and paid for a splendid period mansion in the city (Bristol) because that's the only security that investors understand. Buying the place, of course, wasn't a problem — the company is quite rich. The fact that it has some of the best people in the business working for it doesn't appear to matter a damn.

For reasons which will become apparent with the passing of a little time, Tripos could turn out to be a very important operating system indeed.

Metacomco licence it from the original developers in the Cambridge Computer Unit, and has managed to fit it all into around 50k of portable code. For a multi-tasking operating system, that's tiny.

## Zenith board compatibility

In a long-term, informal test of compatibility, I'm currently using a Zenith as my IBM software test bed, and so far have found no problem in persuading programs that they are running on a genuine PC.

The Zenith has tackled Lotus Symphony, Flight Simulator, PC-DOS 2.00 and PC-DOS 3.00 without any difficulty, plus things like Spotlight, Missing Link (communications), PC to Mac and Back (more communications), WordStar, Wordvision, Volkswriter, and a long list of other programs not guaranteed to work on anything except a genuine IBM. Even Dunzhin, which makes the thing talk . . .



***After the Opus launch of a diskette interface for the Sinclair Spectrum, these disks have become popular — or at least, respectable.***

***Cumana, previously best-known for its BBC disk units, has now produced a £99 interface to connect the Spectrum to its standard 3½in drives and 5¼in units.***

***And Kempston, the joystick king, has also released a disk interface for almost exactly the same price which 'will work with any standard BBC disk drive'.***

***All these people have gone their own way, with no sign of agreement on disk standards. Clever.***

***Kempston has also announced a QL disk interface, which (like many) is compatible with QDOS (we'll have to commission a survey to find out if all these Tony Tebby-written operating systems are compatible with each other). The price of this one is £129.95.***

***Details of the Kempston units (including a QL Centronics printer interface) on (0234) 856633. Cumana is on (0483) 503121.***

What is turning out to be worth consideration, however, is the question of compatibility at board level.

There are machines on the market (the Zenith isn't one) with faster-running 8086 chips inside them which make them 'significantly faster' than the original IBM PC with its 8088. But the 16-bit data bus means that several add-on boards just won't talk to these systems.

At the moment, the Zenith is away visiting Ashley Ward of Intelligence Research to sort out compatibility problems with the Hyperram board. Hyperram is the best-looking price-performance memory board available in the UK for the PC. Ashley Ward is leading his company back from hard times with this add-in board for the IBM (and others, too), and because you have the option of buying the board with only 64k and plugging in chips (cheap) it really can save a lot of money.

The only trouble is, so far, I haven't been able to persuade the Zenith that the Hyperram has memory in it.

The jury is out on this one until next month, when we will discover whether I've been particularly clumsy-fingered with the DIP switches, or whether the board is genuinely incompatible with the 320k that Zenith provides as standard in its PC.

But the general principle remains, especially when you look at the wide range of popular boards for the IBM such as the Six Pack, and the Hercules, and timers, and go-faster Express boards . . .

The Missing Link communications board works fine on the Zenith, by the way, giving the machine a passable Prestel capability as well as ordinary teletype capability. And it is really easy to use.

The problem is: it won't work with the thousands of American programs that specify a Hayes-type modem.

The Hayes design has become a 'standard' in the market; certain signals sent to the modem are instructions to it, telling it how to dial, what number to dial and when to disconnect.

Some programs that expect a Hayes modem can be fooled. You plug in your non-dialling modem, plug in an ordinary phone and dial the number by hand. Then you tell the program that it is 'online' and it goes ahead.

You can't do this with the Missing Link because the modem plugs into the phone direct, and into the PC at the other end. There's nowhere to plug in a phone.

It's a nice modem but a bit pricey for 300/1200.75, and why would anyone launch a non-Hayes modem in 1985?

## Neat handling

No matter how good it sounds, a new database like Infoscope is often greeted with a shrug of the shoulders by users because 'we already have all our data stored in dBasell format'.

Infoscope gets round that one quite neatly: it can handle those files with names ending in .DBF, and also the .DIF and SYLK files produced by Lotus 1-2-3, VisiCalc, and Microsoft products, as well as dBasell files.

Why you might want to abandon an expensive program like dBasell is fairly simple to explain: Infoscope can give the user access to eight databases simultaneously. And it can transfer files to the other software packages if need be.

The authors, Davidson Richards, claim high-speed sorting as a major feature of Infoscope. More significant for many users will be the speed advantage from quite another feature, however, and that is the 'hop' feature.

The system allows users of PC-DOS version 2.0 (or later) to hop out of Infoscope, use the diskette file manager or other programs, and then hop back into Infoscope with all work still intact.

'Typical uses for Infoscope,' says Nigel Jesty, software products manager, 'include

mailing lists, employee records, parts inventory, customer lists and appointments book — all of which can be displayed on the screen simultaneously.'

Infoscope's own files are simple ASCII strings, with commas as the field markers.

The program occupies 192k of memory (minimum) and costs £195 plus VAT. Details on (0332) 382321.

## Apricot Viewdata

You could set youself up as a rival, in a small way, to Prestel, providing you have the £10,000-odd it takes to buy ACT's Apricot-based Viewdata system.

The system involves a special bit of hardware known as the 'cheese wedge', which has eight serial ports coming out of it and which is driven from an Apricot Xi 10S with a hard disk, holding around 8000 'pages' of Prestel-style information.

The software is from Metrotel, and the only problems faced in the transfer from the original Z80 involve the rather inefficient code translation. In a nutshell, the system worked OK in the demonstration but used up phenomenal amounts of memory.

However, since the previous price for this type of system started at six to 10 times as much than the £10,000 needed for the Apricot Viewdata system, it's bound to attract one or two buyers in the next few months.

## Upgrade assurances for 'flaky' drive

The cheapest disk in town for the BBC now sells at £60 plus VAT, and comes from RCS Computer Services.

The company will upgrade your ordinary BBC B with a kit of parts to provide DFS plus disk drive, for £168.50 including VAT.

The only caveat I have is that the drive is the Olivetti drive, which (when I knew it a couple of years ago) was the flakiest in town, but perhaps that has changed.

Get assurances in writing by phoning (01) 844 1333.

## Pegasus database

Why has an accounting program suddenly acquired a database management module? I think I can tell you.

To my dismay, when I originally tested the Pegasus accounting system (the best-seller in the market), I found that it couldn't tell you the account number of a given company. You had to keep a card index with names and account numbers next to a computer which was (theoretically) capable of doing the same thing 100 times faster.

Pegasus executives rubbed their cheeks reflectively when I complained, but said nothing much.

Today, they have announced 'Information Manager', a database/applications generator module which works with the Pegasus range.

It's not their own invention, it's a specially adapted version of SoSoft's Tomorrow's Office.

Details on (0536) 522822.

## The Enterprise 128 — ideas and surprises

Doubling memory and getting a 30 per cent increase in speed sounds like a nice idea, and it's what Enterprise is offering with its 128k machine. With no changes to the operating system, the new Enterprise is running both Basic and machine code programs faster.

The speed is achieved by making sure that the most-used of the 128k machine's 16k pages are the ones most readily accessible to the good old Z80 processor. And just to prove the point, an old 64k Enterprise expanded to 128k will also be 30 per cent faster.

Enterprise, the company, is also offering a monitor and printer, and is trying very hard to provide a reasonable amount of software. Like Amstrad, it has signed up a number of software houses, US Gold and Ocean among them, to produce programs which are then sold under the Enterprise label.

But surprisingly, it has dropped plans to produce an Enterprise disk drive in favour of producing a disk drive controller and allowing users to choose their own drives. This may give users lots of choice, but it's likely to discourage software houses from developing software on disk.

The Enterprise 128 sells for £249.95, while the original Enterprise 64 takes a drop in price to £179.95. With Atari, Commodore and perhaps even Sinclair producing 128k machines, the Enterprise is up against some stiff competition. But having said that, it's worth noting that it's the only machine designed from the beginning to take more than 64k and use it properly, and its internal architeture is considerably more advanced.

## Reading is believing

The fact that Apple's shipments to retail stores in the States 'jumped dramatically from February to March' is the kind of interesting information that American surveys occasionally reveal.

Another is that although dBaseIII, the database package from Ashton Tate, was number two in the software charts for April (after Lotus 1-2-3 and in front of Lotus Symphony), the other Big White Ashton Tate Hope, Framework (a rival to Symphony) didn't feature in the top 10 for that month at all.

This type of information is available from various information-gathering consultancies. The top 10 software list, for example, is published by Management Information Software Co in New York. The analysis of Apple's jump in sales is from IMS America of Ambler, PA.

The IMS America figure shows the fascinating detail that Apple's total share of the

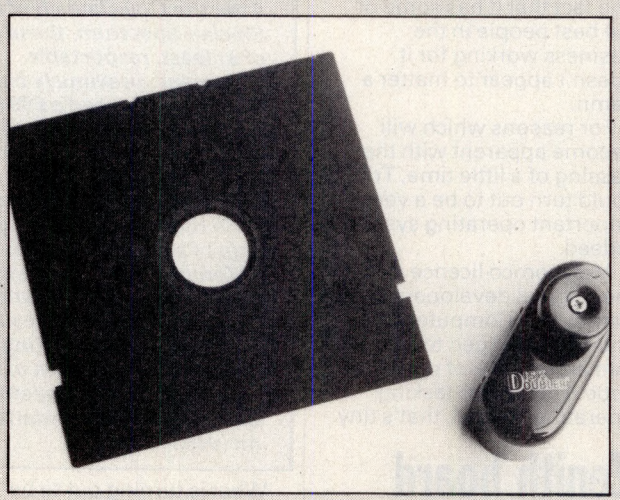

***Should you be tempted to try and use both sides of a diskette in your single-sided disk drive by buying a 'positioning guide' from Disk Doubler (through Associated Compuer Marketing), you should be warned of two things.***

***Firstly, the good news: you don't need double-sided diskettes. I've yet to find a single-sided diskette which had a faulty second side. Mind you, I've found three certified double-sided diskettes which were dud.***

***Secondly, the bad news: not all diskettes take kindly to being spun backwards. The inside of those black envelopes is a smooth cleaning fabric. Like all fabrics it has a 'nap'; some of them have very pronounced nap directions, and will scrape the disk if ground backwards.***

***Details of the £15 gimmick on (0252) 330100.***

***I have to admit that a device for putting an index hole in the other side of the diskette would be more help. Anyone can usually cut the slit in the side to enable writing to a disk, but locating the index hole is quite a trick.***

***This little template/cutter doesn't worry about that — it assumes you're using an Apple, Atari, Commodore or Sirius drive which ignores the index hole. Ah well, don't say you weren't warned.***

# APRICOT WINDFALLS AT MORSE

We've pruned our Apricot prices at Morse, and we now offer stunning discounts across the entire range. Morse are ACT Blue Riband dealers, and we'll give you better support and value than anyone else. Call today!

**Apricot PC,** 2 315K drives, (RRP £1595): **£1125**
**Apricot PC,** 2 720K drives, (£1795), now: **£1375**
**Apricot Xi,** 10Mb, 720K drives, (£2795): **£2030**
**Apricot F1,** 720K drive, software, (£1090): **£995**
**Portable,** 720K drive, software, (£1695): **£1390**
Monitors: 9" £200, 12" £250, 10" colour £385





SANYO Superdeals at Morse! Special prices on MBC 550 series mean 16-bit computing for the cost of a home computer! Includes WordStar and others worth over £1000, MSDOS & 128K RAM.

**Sanyo MBC 550,** Single disk , (RRP £795): **£569**
**MBC 555,** 2 disks, extra software. (£995): **£749**
**MBC 555-2,** 2 320K disks, software (£1395): **£945**
Monitors: CRT36 12" £127, CRT70 colour £395
All Morse prices exclusive of VAT at 15%, E. & O.E.



**DECMATE II**, the famous wordprocessing system, includes system unit, 2 drives, display, software, RRP £3190. Ex display: **1690.00**
Brother EP44 (£249) .... **199.90**
Casio PB700 (rrp £110) **79.00**
Casio FP200 32K (£299) **215.00**
Casio FX450 Sci (£19.95) **12.95**
Casio PF3000 data (£39) **29.90**
Casio PF8000 touch (£49) **39.95**



**Televideo TS1605,** full IBM PC compatible, runs Flight Sim, 1-2-3, Framework. 2 360K drives, 128K memory, (512K for £400 extra), 14" display, RRP £1990 **1290.00**
Epson JX80 7 col. (£569) **540.00**
Epson HI80 plotter (£395) **375.00**
FX80 used, 1 only (£438) **250.00**
PFS Graph IBM (£99) .... **59.90**
PFS Report IBM (£95) ... **57.50**




**LOTUS 1-2-3,** the most popular software package in the World is now available in Apricot and IBM formats. RRP now £440: **375.00**
**WordStar 3.4** Professional, CorrectStar & Merge (£399) **299.00**
VisiCalc IBM (£195) ..... **115.00**
VisiFile IBM (£219) ..... **145.00**
VisiSchedule IBM (£219) . **145.00**
dB Master IBM (£445) ... **270.00**

# MORSE

**MORSE COMPUTERS** 78 HIGH HOLBORN, LONDON WC1V 6LS. 01-831 0644. TELEX 916509.

PC market was 27 per cent in March, and, in spite of what all the 'experts' inside American and British businesses have been telling us, most of this was due to sales of the Macintosh.

Mac sales rose from $18m at wholesale prices in February to $29m for March. These sales are through stores, not the direct-to-business sales which account for so much of IBM's business.

Interesting, nonetheless.

## View from the top

Programs 'which are not now, or in the near future going to be supported under TopView, include Lotus 1-2-3, Symphony, all Microsoft products, Multimate, dBase, Framework and R:Base 4000,' comments American industry observer Gerald Garvey in the American *MIS Newsletter*.

TopView was first seen on the IBM PC/AT, and was widely assumed to be written for that super-micro. It has now been revealed in the UK, six months later, as IBM's own operating system for all PC family machines — using windows. The stampede that has resulted seems unlikely to cause many casualites — there is a strong smell of indifference from the market.

It is a genuine operating system, despite the fact that some people have called it an 'operating environment' for the PC family, but many observers see it as being more bother than it's worth.

The problem isn't whether users find it easier to use. They do, mostly, but that hardly helps if the programmers can't use it, and it seems that largely, they don't think they can. The aforementioned list of unsupported programs is heavy condemnation of the product in its current form.

The trouble seems to be that it doesn't offer them enough, but does ask for a lot more work. An operating system like TopView has two parts: the visible part, which looks like a vague imitation of the Macintosh; and the invisible part, which looks a little bit like a multi-tasking version of PC-DOS.

Most software for the IBM isn't written in horrible detail by hot-shot assembler programs. Instead, it links in to existing code, sitting in the machine, which does the hard work of sorting out which sector of the disk the next data will be recorded on when there is enough information to fill a sector; or where in memory your program will keep its operating data; or how to calculate the delay before transmitting the next character — and all that is the task of the 'invisible' part of the operating system.

Unfortunately, the routines that you call under PC-DOS are in different places, and do different things, from what many programmers find they now have to do to work with TopView.

IBM and Microsoft say this isn't their fault. People have been writing programs for the IBM PC which ignore PC-DOS routines, and do so from scratch. They shouldn't — this is 'badly behaved' software.

It is a fact that much successful software is successful because it runs faster, does more, and is simpler to understand than well-behaved software because the designers of the DOS didn't foresee many of the requirements of programmers writing things like Lotus.

There is also the fact that many programs don't expect windows, and they have to before TopView will work. And Microsoft has its own windows standards which are different from TopView, hence the list excluding Microsoft applications.

TopView, like a rival product Desq (from Quarterdeck) is multi-tasking. That is, it tries to keep more than one application program running, juggling their attempts to use the DOS like an acrobat. Irritatingly, it seems that IBM has chosen a strange way of doing this — described as 'time-slicing' — which means that you can't use TopView for communications programs, or so say my friends at Digital Research. Worse, in a world where graphics are daily becoming more important to PC users, TopView can't cope with graphics.

Desq is text-only, like TopView, but according to Garvey's report, Desq is very much better at coping with the kind of program you're likely to buy than TopView.

The major advantage Desq has, today, over TopView is that it will run programs, even if they aren't Desq compatible. That means that Lotus 1-2-3 will run, even though Desq can't manage its windows. The result, says Garvey, is that a 1-2-3 user with Desq can take part of his spreadsheet and easily put it into a WordStar document. 'If you want to do this with TopView, you will have to wait until Lotus rewrites 1-2-3 (and others do the same) to be TopView compatible.' And he adds: 'It seems that a windowing environment program should be a help to the user today, not, maybe, a year down the road.'

Neither Desq nor TopView is for the user with 256k. Currently, TopView will leave you 80k free; Desq will leave you about 25 bytes.

The market wants multi-tasking, and it wants windows, and it wants graphics. People have seen the Macintosh, and they want their IBM PC to do the same thing.

But it looks as though they will wait for Microsoft's Windows (June? September? Which June?) or Digital Research's GEM, already out in early versions.



***This is a computer with a radio in it. It costs $2295 which is a fierce price, especially when you realise that you need at least two of them to start working. You can, of course, get the modem alone, which will set you back just over $1100 for a low-power battery version, or just under $100 for the mains-powered model.***

***It has an operating radius of about a mile (bet on less in cities) but it will work at speeds of up to 2400 baud.***

***In the words of the company president, a man by the name of Kitchner: 'The Quest, like the modem, is not for everyone. We foresee it being used in places like large warehouses where inventory can be directly input through the Quest into the company's central computer. We also see it in forestry work, ranching, or anywhere mobility and computing are important.'***

***Well, it's a start. Details on (0101) 509 735 9092 from Electronic Systems Technology in Kennewick, WA 99336, USA.***

## Mega memory for the PC

The main advantage of the IBM AT over its earlier relatives is the amount of memory it can look at — 8Mbytes instead of 640k — and the disk size.

Lotus has decided to kill off half this advantage by announcing, with Intel, a way of expanding IBM PC memory up to 8Mbytes.

Intel is the chip maker which designed the IBM's processor, the 8088, so the specification worked out by the leading software producer and the 'horse's-mouth' hardware designer is likely to become the standard solution.

A version of Lotus 1-2-3 to take advantage of the expanded memory is due out later this year, but the really vital thing was for Lotus to expand Symphony, and an expanded Symphony will be available very soon.



**"My portable micro is IBM compatible."**



**"My portable micro is IBM compatible. And it has a colour screen."**

There were once two businessmen in the market for a portable micro computer.

The first, a proud and somewhat shortsighted man, snapped up the first IBM compatible machine he encountered. Thinking he'd done wonderfully well.

The second, a wise old bird, considered the options carefully and settled on the Sanyo MBC 775.

His patience was admirably rewarded.

Not only did his chosen machine have full IBM compatibility, with twin 360K disk drives, 256K RAM expandable to 640K RAM, but also a colour screen.

The only portable micro with a colour screen.

The price of £2,150 included not only the monitor but £500 of free software like Calcstar, Wordstar, and GW Basic.

And he was given the opportunity to join the Sanyo Micro-Users Association, giving direct access to product and software information.

For full details ring Sanyo Business Systems on 0923 46363.

And remember the moral of the story is, see Sanyo, then decide. SANYO

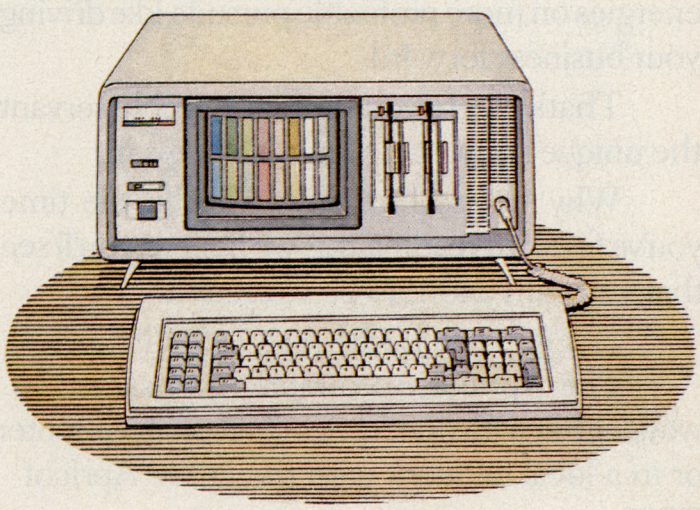

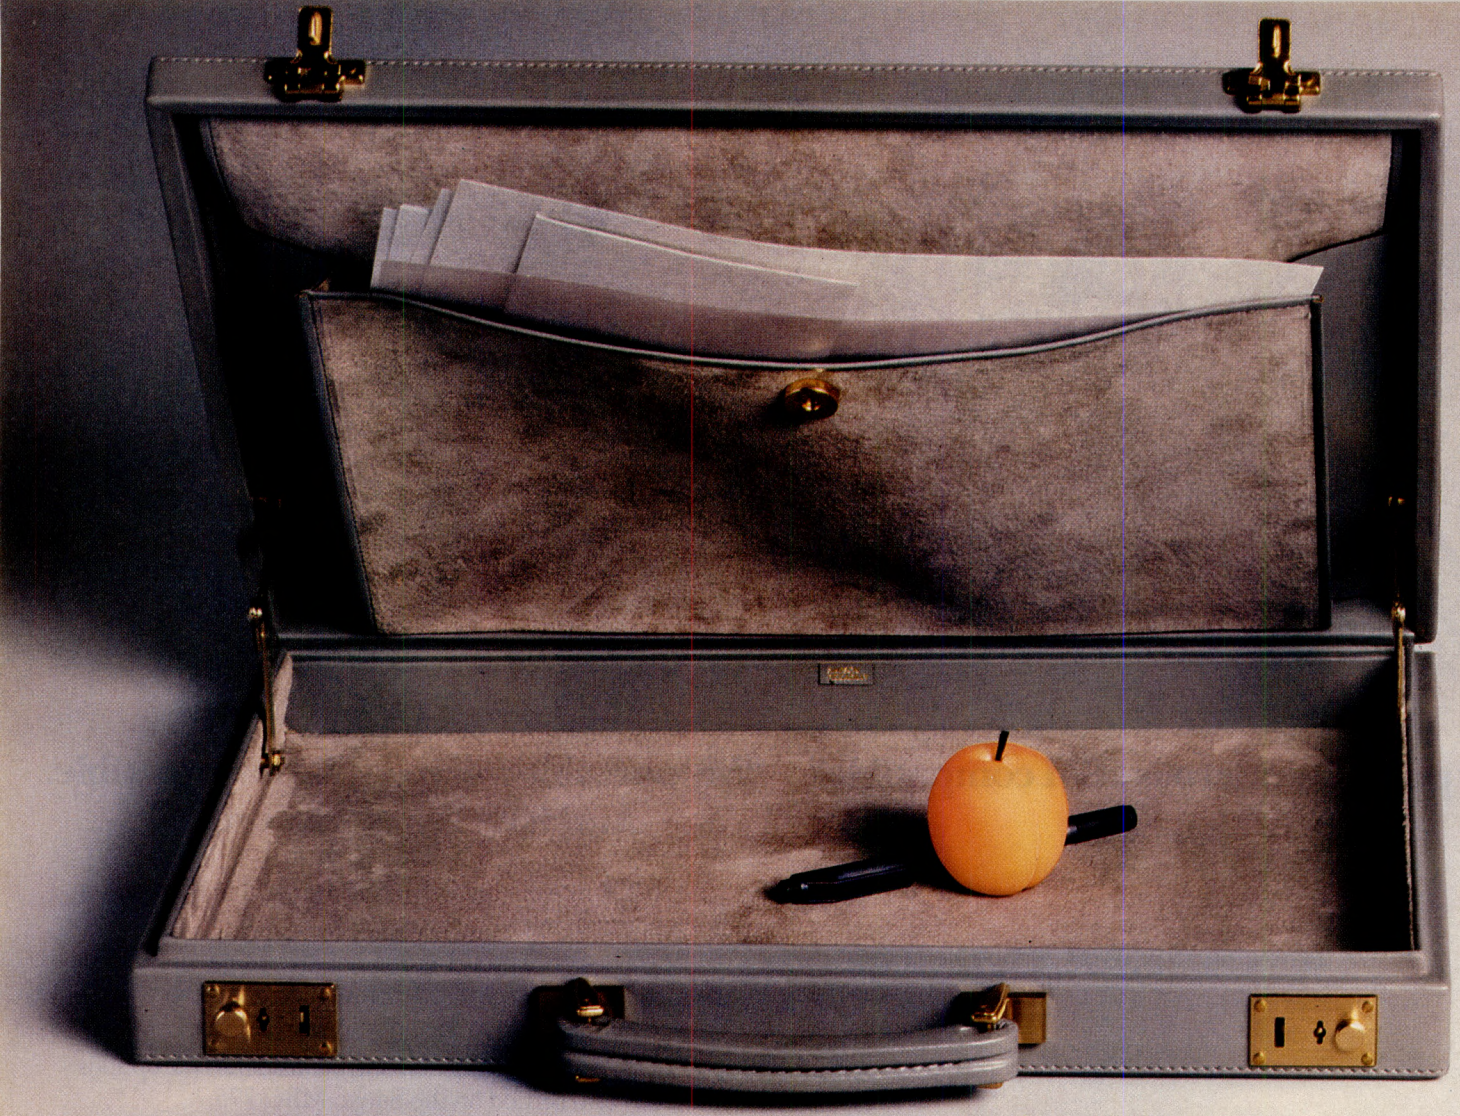

# Food for thought if you're about to do your accounts.

A constant diet of sales ledgers, payrolls, stock control, invoicing (and that's just for starters) is almost guaranteed to damage the health of your business.

You'd be far better off concentrating your energies on more profitable pursuits, like driving your business forward.

That's where your not-so-humble servant, the unique Apricot Accountant steps in.

Why 'not-so-humble'? Well, by the time you've finished reading this we believe you'll see that you can't afford to be without it.

FRUITFUL RELATIONSHIPS.

The Apricot Accountant is designed to work either with one Apricot personal computer or in a local network with the entire Apricot range.

Already, we're the most widely used range of business micro's in Great Britain.

A dynamic duo, without doubt.

Apricot Accountant, as you can see to your right, is as easy on the eye as it is to use.

Each slim module or Apricot Dataslate is dedicated to one particular accountancy function: Invoicing, Payroll, Stock Control, Sales Ledger, Purchase Ledger, Nominal Ledger and Data Analysis.

Apricot's Dataslates allow you to build your own compact desktop filing system.

Every slate has its own manual and file to house the 3.5in. micro floppy program disk.

A PLAIN DIET.

All the instructions are written in plain

English. So, if this is your first introduction to computers, Apricot protect you from the verbal fog of computer-speak.

Equally, if your staff aren't fully conversant with accountancy terms, they will more than welcome our plain speaking.

They'll also welcome the release from the drudgery of every-day routine.

Our expertise in accountancy is hardly surprising when you consider that as a company we have been writing accounting software for smaller businesses for 20 years.

Many of our dealers have been selling it for almost as long.

We've even thought about your stationery for use with the Accountant. A specially designed range of invoices, statements, payslips etc. are available from your dealer.

But if you'd rather use your own designs, we can organise that as well.

## INTELLIGENT APRICOTS.

The Apricot Accountant is fast, efficient, thorough and clever.

Unlike other software packages it can be tailored to suit your business needs.

If you need analysis of data, for instance, the keyboard brings a speedy automatic answer.

We collate the information you feed in and automatically update the other relevant modules.



APRICOT Xi 10. 256K RAM, 10MB WINCHESTER. £2,795*

Our software complies with all current legislation and should the law change we'll up-date your system.

The system also knows how to keep a secret. Only specific password holders are allowed access to your information.

## AN APRICOT CALLED GEORGE?

The Apricot Accountant has a unique, built-in autopilot called George.

(It has to be better than something with a name like a 'double faceted nerd fangler.')

George carries out certain regular procedures for you, such as producing a weekly stock report.

Switch your Apricot computer onto 'auto-Q', step through the procedure once, give the job a title and next time round George will handle it all for you.

He'll also train new staff by simplifying their role to a few simple keystrokes until they've got the hang of things.

## APRICOT'S MAXI MICRO'S.

Whichever Apricot micro you choose you can rest assured you've chosen from the pick of the crop. Not only do we offer the largest compatible range in the world, but they can all be locally networked.

They are also fully capable of interfacing with mini and main-frame computers.

To top that lot, the Apricot software library is the absolute cream. We have the largest, published library in the UK.

And that includes the best-selling business package in the world, Lotus 1-2-3 as well as Symphony, their new all-in-one system for managers and professionals.

All the other famous software names are there also: Micropro, Ashton-Tate, Microsoft, Digital Research and so on...

Finally, for those of you hungry for the latest facts and figures there is nothing to touch Communiqué.

Services such as Prestel and Pergamon Infoline as well as Telecom Gold and Easylink, our telex service, are yours at touch of a button.

Call in on your nearest Apricot dealer so you can get all the facts to chew on.

apricot ACCOUNTANT

TO FIND OUT WHERE YOUR LOCAL DEALER IS, OR FOR MORE INFORMATION ABOUT APRICOT COMPUTERS OR THE APRICOT ACCOUNTANT, EITHER CALL US ON 0454 617617 OR WRITE TO ACT LIMITED, FREEPOST (BS4251), PATCHWAY, BRISTOL BS12 4YZ. YOU CAN ALSO REACH US ON TELECOM GOLD-SYSTEM 81-JET 077. *PRICE EXCLUDES MONITOR OR VAT AND IS CORRECT AT TIME OF GOING TO PRESS.

The problem there was very simple: due to the enormous extra applications in Symphony (a big database, a big word processor and powerful graphics, plus communications) there just isn't memory space enough for the big 1-2-3 spreadsheets. Users who switched from 1-2-3 to Symphony have complained, very loudly, that they've upgraded, only to get a smaller spreadsheet.

It should be added that the AT will, of course, run faster than a PC or XT, even with expanded memory.

Meanwhile, taking advantage of the interest created, Mega-Omega Systems has announced that 'enhanced Lotus 1-2-3 needs a companion,' and has released a memory board for the IBM PC that can be expanded to 2Mbytes. The company doesn't claim that it is compatible with the Intel-Lotus standard, but neither does it admit that it isn't, which is just about forgiveable on the grounds that perhaps it didn't know the standard was coming when they prepared the literature.

The card is useful for providing a RAM disk, and Mega-Omega is on (0101) 214 828 0960. But it won't run Lotus version 1.1 — the Intel Above Board /PC is the first expanded memory board certified by Lotus as compatible with Symphony, and will be available shortly.

## Gem Write for the IBM

Giving IBM users the chance to catch up (!) with Macintosh, the authors of Volkswriter have written Gem Write.

It works like MacWrite, under GEM on the IBM. It will be marketed by Digital Research which does GEM (the Macintosh-like environment for what Lifetree calls 'generic' personal computers).

Lifetree has received mad adulation for Volkswriter, which has tested out very well in 'objective' assessments of word processing. I have to confess that I found it hard to use, but it was quite powerful.

This new program isn't compatible with Volkswriter, but it should be very much easier to use. It will be sold for $199 as a package with GEM Paint and GEM Desktop from June, says Lifetree. Contact that company on (408) 373 4718 in Monterey, California.

## Remote response

'I don't know the address,' said the voice on the other end of the phone, 'but it's on my IBM database back home. Just hang on, I'll dial through and see.'

The voice belonged to a hacker of the old school, who had written a routine to let him control his home system from his office. Within a minute, he'd logged on, retrieved the information and displayed it on his office machine. And ever since, I've been jealous.

Microstuff's answer to the problem, Remote, is said to work with any PC program 'except those that use colour graphics, and those that require you to change disks,' and that appeared in the UK earlier this year. Inevitably, it requires a Hayes-style auto-answer modem.

Software Synergy's Respond PC Host goes one better in that it can be active, not just passive. That is, it can call a remote computer automatically, as well as respond to a call from the remote unit. But, unlike Remote, Respond doesn't let you run the host programs — it just lets you download files.

There are times when your desire to watch a 3Mbyte file scrolling across the screen at 1200 baud is limited.

## Scraping for profits

You may think that cutting the price of the ACT Apricot F1E was effectively aiming a large cannon at Acorn.

After reading this little analysis, however, you may wonder whether the weapon is pointing at Apple in Cupertino, or at least Hemel Hempstead. Consider:

If you think £500 is rather steep for an ageing BBC+, how about saving up the extra £100 needed for a 16-bit Apricot F1E? Today, that's the difference. What do you get?

You get a 256k memory, a 16-bit 8086 processor and a 3½in floppy disk (not just a disk file system) with 320k capacity. The filing system is MS-DOS, which these days opens up a path to running complex programs such as Symphony. But more significant for BBC users languishing with 31 files per disk, this is DOS 2.1. That means a hierarchical file structure — several directories on a single disk, each with sub-directories (and so on) if you like.

ACT has, as you will have deduced, cut the price of its bottom-end Apricot. But the comparison with the BBC+'s idiotic new price doesn't stop there. ACT has rubbed it in.

'Also available is a £30 program called B-Tran, which enables the Apricot F series and PC models to run virtually all programs written in BBC Basic.'

The claim obviously requires your programs to use no illegal POKEs or machine code. But most teacher-written code falls neatly into that category, and it is teachers who ACT is out to impress. Anyone who likes writing Basic, by the way, will quickly find that there are several things to get excited about in Microsoft's GW-Basic, even without procedures.

The really sad thing about it is that the gun isn't aimed at Acorn at all.

Oh, I know, the managing director of ACT (Brian Androlia) made the necessary gesture of patronising pity in Acorn's direction. Who could resist it? 'Since Acorn launched the BBC Micro, the requirements of educational computing have changed enormously,' he said sadly. 'Students are now demanding access to the greater sophistication offered by the 16-bit MS-DOS world. They need the experience of using serious industry-standard software, which normally will not run on 8-bit micros such as Acorn's BBC and the Apple II series.'

We're not going to actually mention the Apple as a serious contender, he hints casually, but just in case the thought did occur to you, dismiss it (he implies).

Not so. Apple is selling its IIe and IIc *very* hard indeed into the schools market, under a program called Our Kids Can't Wait. Acorn is not trying to sell in the States (at the time of writing, sanity prevails in Cherry Hinton at least so far) but Apricot Inc is. And Apricot Inc is using a picture of an Apricot, next to an Apple, to emphasise the fact in the American market.

Quite how well Apricot is doing in the Sates isn't clear. The word on the streets, when I was there for the Atlanta Comdex show, is that Apricot is looking good — especially with the launch of the 512k F1 at $999. But it's really too early to say.

Apple is not pleased, and is doing its best to chop down the Apricot tree at home in the UK. In retaliation, of course, ACT is going after the education market as hard as it can, keeping Apple out.

Included in the new low-cost F1E is software. It's possible to use Asynch to communicate with remote time-sharing systems such as Telecom Gold, but I wouldn't



***These are the winners of the John Menzies Young Programmers of 1984 competition. I show them here not just to fill space, but because the picture inadvertently gives a rare opportunity to see Tom Hartnell, one of the judges. Hartnell runs a publishing company, and I've never seen him in a suit before. Also in the picture is artifical intelligence pundit Donald Michie.***

***The real reason for printing the picture, however, is to encourage other girls by drawing their attention to Cathryn Dew, who won the Under 12 category. Don't believe boys who shoulder you aside from the computer on the grounds that girls can't do it. They can.***




*As this photograph shows, the original Atari machine has seen the inside of a good few boxes. First there was the 400/800, then there were the XL models, and now there's the 130XE.*

*The 130XE is yet another version of the six-year-old Atari 400/800, repackaged in a sleeker and smaller case to match its 16-bit brother the ST, and offering 128k of RAM.*

*Inside, the chip count has been reduced from the XL, which itself was a reduction from the original machine. A new memory controller chip called 'Freddy' organises the extra bank of 64k RAM into four blocks of 16k, which is accessible by a switch at some obscure memory location in the operating system.*

*The machine has two standard joystick ports, a cartridge slot, a serial port, composite monitor output, television output and an additional, surprisingly small expansion port not found on the previous machines. The serial port will take all existing Atari peripherals. The cartridge port has been moved to the rear of the machine, with two weak plastic pins projecting from it that are in danger of breaking when a cartridge is inserted.*

*Also on the debit side, the keyboard has deteriorated slightly from the earlier machines, although it's still better than the one on the Spectrum + and it is full-sized.*

*Some jiggery-pokery with the video signal has occurred with the 130XE: the graphics are now far sharper and a little less bright, which makes programs such as Atariwriter and VisiCalc easier to read at the cost of games being rather dull.*

*Atari has also cured the television problem that has plagued it for years, the sound and picture being slightly apart on the tuning wheel.*

*The XE's operating system is the same as in the XL: that is, the original 400/800 bugs have been corrected so some of the old software won't run on the new machines. Atari supplies a translator program that loads the old operating system, complete with bugs, into RAM and switches out the ROM, allowing all software to run. For disk drive owners the first program to use that extra 64k of RAM will be DOS 2.5, Atari's new disk operating system. This will replace DOS 3.0 which was far too friendly and hence infuriating to use. DOS 2.5 returns to the old DOS 2.0-type menu with the additional feature of allowing you to set up a RAM disk in the extra memory. Whether DOS 2.5 will support double-density on the Atari 1050 disk drive wasn't clear at the time of writing.*

*The Basic in the 130XE is unchanged so it looks somewhat long in the tooth now, although Atari has taken the opportunity to insert Revision C Basic which should mean no more locked-up programs after hours of editing.*

*It's disappointing to see that there's a grand total of 37k available for Basic programs on this 128k machine. You can make the extra 64k available with a series of POKEs, but then you'd only be able to use it to store data, once again using POKEs, as the Basic knows nothing about this new-fangled bankswitch RAM. Obviously it's an open question as to how long it will take before commercial software that uses the extra RAM is available in any quantity, as software houses won't want to ignore 400, 800 and XL users. However, Atari is planning extended vesions of Atariwriter and VisiCalc which will use the extra memory.*

*As there's probably about 2000 'old' Atari programs already on sale in the UK, you won't go short of software. Some of this software is being sold at silly imported-from-America prices, but the likes of US Gold and Ariolasoft are now selling good American software for much less.*

*And there's some good serious software around, such as the Atariwriter and Homeword word processors, VisiCalc's spreadsheet, and many high-quality assemblers and programming languages.*

*The manual included with the 130XE couldn't be much worse than the 12-page pamphlet supplied with the XL. Although it isn't inspiring, the 132-page ring-bound manual is adequate as a teaching guide for anyone new to computing, and contains some very useful appendices including pin-outs of all the external ports.*

*At £169 the Atari 130XE is currently the cheapest of the 128k 8-bit machines, so in those terms it's good value. Inevitably, though, there must be some reservations about Atari's commitment to supporting its old 8-bit family in the light of the new ST range. And both machines in* PCW*'s offices suffered from problems with the function keys, with one of the keys on each machine eventually giving up altogether. This is unfortunate as previous Atari machines have had a good reliability record.*

*Atari claims that 3½in disk drives, a new range of printers and lots of good serious software is on the way, but with the dropping of other machines in the XE range and of the wonder business package Infinity, it is difficult to judge how committed the company really is. Having said that, it obviously makes sense to have a cheaper machine sitting alongside the ST in the shops, especially one that looks so similar to the ST, so hope for Atari users' sake that the company continues to support both machines.*

recommend it to a beginner. I haven't played with ACT Diary and Sketch yet, and Activity is an icon-driven 'Macintosh-like' interface of which I've heard both enthusiastic and disgusted reports, so it's clearly a matter of taste. And Gee-Whizz (GW-) Basic is very good, especially the editor.

There is one other comment that can't be avoided. The £600 price tag for the Apricot does make the £400 QL look rather steep for a 128k machine without disks, doesn't it? Even including the Psion software. The fact is that Sinclair Research desperately needs every scrap of profit it can get out of that box.

# Tramiel's 'millions' fall short: new ST for merchandisers

Jack Tramiel told me that he would sell 'millions' of Atari 800s at the new, low price. That was in February.

But in May, at the Comdex show in Atlanta, he gave me an opportunity to gloat — I had told him in February that the days of the 8-bit, single-tasking box were over. 'The users,' Jack confirmed at Atlanta, 'are cleverer than we are. They saw the 800 as an old-fashioned box, and they didn't buy it the way we thought they would.' Just how many boxes the 800 has been in makes an interesting story in itself — see the caption story on page 123 for more details.

Anyway, Jack's solution to all this was to invent a new machine. To the astonishment of the assembled industry observers, he began by spending 10 minutes talking about the evils of selling machines through 'mass merchandisers' and the wisdom of selling through computer stores, only to then start discussing what would happen when the mass merchandisers got hold of the product.

One polite observer tentatively remarked that he had trouble following this apparent contradiction. 'I'm quite used to the Press having trouble understanding me,' said Tramiel cheerily. 'What I'm referring to is the version of the ST which we will have specially for the mass merchandisers.'

Yes, another machine. It will have the same chip (Motorola 68000) as the ST, but no disk, no screen, no keyboard, and 'will therefore appear to be cheaper'. But by the time you've bought the bits to turn it into the ST, it will cost more, he promised.

The machine itself was on open demo at Comdex, which gave me my first chance to push the mouse around. Its colours and high-resolution definition are brilliant, and the drawing and drafting software is amazing.

But it is also clear that the price hasn't been finalised Once you build-in variables like a colour screen, software, and so on, I suspect you will have to find around £1000 for a working system. Above that Atari cannot go, because that would be to give the Macintosh, with its ready-to-go software, too much of an edge.

Tramiel still insists there will be hundreds of STs in September.

However, to my surprise, Atari appears to be letting American software writers believe that the machine is already available in the UK. One producer of programs told me (in the first week of May) that 'there are already machines on the shelves of shops in Britain, according to Sig Hartmann'. Hartmann is director of software.

Sig, on being asked whether he did say this, told me: 'Please, would you mind going in at the other door and signing the visitors' book so we have your details?' — and when I returned to the exit door where he had been, he was there no longer.

Anyone who knows of a store where Atari STs are actually on sale (not just up for demo) do let me know. My Prestel number is at the end of this Newsprint section.



***While you are waiting for your IBM PC/AT (and if you ordered one, you are almost certainly still waiting for it), Compaq distributor MBS Rentals suggest that you consider a Compaq Deskpro.***

***The reason, apparently, is that you rent the Deskpro until the AT is delivered, and there's no penalty for sending it back if the AT arrives early (fat chance!); and, should you decide to keep the Deskpro, MBS will take half of what you've already paid in rental off the price.***

***Details from Philip Ely on (0990) 28921.***

# PCII competition a gamble

Everyone and his uncle is now launching imitation IBM PC/ATs (the biggest version, with the big disks and big memory capacity, and the 80286 chip).

The list in the last month or so includes Televideo, Zenith, Compaq, Kaypro and many others, some as well known, some you've never heard of.

The question that hasn't been answered, however, is: can these machines compete with the new PCII?

It seems fairly certain to many observers that IBM has postponed the PCII launch, which was due in May. The reason is simple: the boss got himself promoted to a salt mine, and the new boss put the whole scheme on ice while he sorted out who was who in the organisation.

If it turns out that the PCII does use the 80286, then a lot of these AT clones are going to look sick.

Worse, there are signs that IBM hasn't yet quite made up its mind whether the AT is a finalised design. There may still be changes, which may leave all the imitators high and dry.

Compaq's attitude to the problem seems dangerously similar to hubris-inspired mania.

One of the company's executives recently said that 'the IBM standard isn't really an IBM PC standard at all, it's the IBM-Compaq standard'. Asked to explain this, he offered the perfectly accurate observation that the Compaq design left out several things that the IBM design included, and that no software worth speaking of tried to use these IBM specials (things like the Professional Graphics board, for example).

There is, of course, a difference between the unique hold that Compaq acquired in the market by producing a portable PC clone, and its chances of getting a similar, unique hold of the AT clone business. I hope Compaq isn't betting on winning because it's quite a gamble. **END**

*Guy Kewney can be contacted on electronic mail. His numbers are Source TCK 106, and Telecom Gold 81: JDS018.*
*The Prestel mailbox number is 01-802 2679.*

# COMPUTER DISCOUNT STORE

# VALUE AND SERVICE

SYSTEM · 1

## APRICOT XI

Hard Disk + Free Printer
+ Free Integrated Accounts Software
including Payroll Training & Installation



**£2495** + VAT

SYSTEM · 2

## COMMODORE PC-10

(IBM Compatible)
256K RAM Free
Accounting Suite
including Payroll



**£1395** + VAT

SYSTEM · 3

## APRICOT F1

720K Disk 256K Memory
includes Free Integrated Accounts
Software or Printer



**£1195** + VAT

SYSTEM · 4

## OLIVETTI M24

Twin Floppy
+ Free Accounts Software

ALSO AVAILABLE
10 Megabyte Hard Disk
£2895 + VAT



**£1645** + VAT

SYSTEM · 5

## APRICOT TWIN DISK

+ Free Word Processor
+ Free Printer



**£1445** + VAT

SYSTEM · 6

## IBM XT

Hard Disk + Accounts Package
including Payroll + Free Printer



**£3645** + VAT

SYSTEM · 7

## ZENITH Z150

(IBM Compatible) Twin Floppy + Free
Accounts Software
ALSO AVAILABLE 10 Megabyte Hard Disk
£2845 + VAT



**£1645** + VAT

SYSTEM · 8

## EVALUATION SYSTEMS

AVAILABLE FROM £100 per week
ALSO AVAILABLE
RENTAL SYSTEMS
FROM
£40 per week

**£100** + VAT


COMPUTER DISCOUNT STORE
58 Mount Stuart Square, Cardiff CF1 6DR
Tel: (0222) 488650/488641

# YANKEE DOODLES



*The best-dressed desk-top will soon be wearing a cellular array processor to provide mainframe power, and Lotus isn't sitting on its laurels — David Ahl brings you the latest news Stateside.*

## Cell power

A cellular array processor (CAP) under development at the ITT Advanced Technology Centre has the potential to provide a desk-top computer with the processing power of a large mainframe, and to replace a mainframe with one a hundred times as powerful.

Compared to a conventional processor which performs operations sequentially (multiplication, for example, is a series of additions), a CAP does many operations simultaneously and in parallel. One of the main CAP parts is a VLSI array chip which contains one-bit processors; each one-bit processor has its own set of 32 general-purpose registers and its own memory of from 16k to 64k-bits. These processors can be duplicated as many times as will fit on a chip. Currently a chip with 16 processors has been fabricated, but the number is expected to rise as VLSI design and manufacturing techniques continue to improve. The CAP chips themselves can be wired together to form processing arrays of virtually any power and speed.

Flexibility results from the way the processors are programmed. For example, a 16 by 16 array of one-bit processors could do 32 simultaneous 8-bit additions or a single 256-bit addition.

Along with simplicity, flexibility and speed, the CAP design boasts high fault tolerance. As the technique is relatively inexpensive, it should result in inexpensive systems with high processing capability and excellent reliability.

As it can perform many simultaneous operations, the CAP is particularly suited to solving problems that involve large quantities of similar data, such as speech recognition, robotics and office automation.

## The Lotus eaters

Lotus is a busy company these days — out on the acquisition trail while expanding its range of current products. It has signed a letter of intent to acquire Software Arts and hire its two founders, Dan Bricklin and Bob Frankston. Bricklin and Frankston are the inventors of the original spreadsheet, VisiCalc.

The decision to be acquired by Lotus, acknowledged Bricklin, was a result of a sharp reversal of Software Arts' fortunes. Software Arts had licenced VisiCalc to Personal Software (later renamed VisiCorp) to market and distribute. However, as the sales of VisiCalc declined the two companies came to legal blows from which neither fully recovered. In the face of mounting losses, VisiCorp was acquired last September by Paladin Software Corp, while Software Arts' revenue plunged to $3 million in 1984 from about $12 million a year earlier. Software Arts currently holds the licences for VisiCalc, TK!Solver and Spotlight.

In its first move into hardware, Lotus has signed a letter of intent to acquire Dataspeed Inc, a vendor of portable stock quote radio receivers. Dataspeed's two products, Quotrek and Modio, receive data transmissions from FM radio sidebands that carry stock quotations. The hardware can also load this information into Lotus spreadsheet programs. The transaction was valued at $6.5 million.

Lotus also announced new releases of its Symphony and 1-2-3 programs which will take advantage of up to 4Mbytes of RAM. The new releases use the new Lotus/Intel RAM spec which has an eventual capacity of 8Mbytes, and up to four 2Mbyte boards can be added to an IBM PC or PC-compatible to reach the specified 8Mbyte capacity. The specification has been made available to over 30 board makers and software developers.

In addition to utilising additional memory, Symphony 1.1 can also interface with 8087 and 80287 maths co-processors which should dramatically improve the computational speed of the software. Symphony 1.1 has a minimum memory requirement of 384k and is priced at $695. The revised 1-2-3, which will be available later in the year, will be priced at $495.

## The final comeback?

Xerox has introduced five desk-top computers, two laser printers and related software programs in an effort to regain its position in the office automation market. An internal study indicates that Xerox must look to computers and related products for at least one half of its sales by 1990, but previous efforts to enter the market have been largely unsuccessful.

The new machines are not major technological breakthroughs. More significant is the marketing strategy which includes more aggressive pricing, an integrated approach to office automation (which Xerox calls 'document creation and distribution'), and marketing through a newly-merged 4200-man copier/computer sales force. In fact, the new computers and printers will not be sold through retail computer stores but will be sold only by the integrated sales force. Analysts feel this will put pressure on Wang and other vendors, but especially Apple which does not have a central sales force for large corporate accounts.

In another departure, the new computers will run IBM PC software and will communicate with local area networks other than Xerox's Ethernet. Analysts consider this to be important, but that success really depends upon the newly-combined sales force.

## Random bits

Watch for the introduction later this year of a 10Mbyte hard disk on a single IBM PC board; the entire assembly is less than 1in thick . . . The Corporation for Science and Technology approved a $3.5 million contract with Int1 CMOS Technology and Purdue University for the development of an advanced erasable/programmable non-volatile memory product that incorporates 'technology which is expected to dominate the semiconductor industry for the next 10 years' . . . The Honeywell Physical Sciences Centre has announced an optical interconnect consisting of a gallium arsenide laser diode with its associated drive circuit and an optical detector and amplified on a single chip, coupled to an optical fibre. The interconnect, with transmission rates in the gigabit range, is ideal for short communications links between silicon chips, circuit boards, and processors in a distributed network . . . IBM has announced its intention to do battle with Japan in the low-end printer markets, and it has introduced two units. The $549 dot-matrix Proprinter offers three print speeds and near letter quality. A unique paper-feed mechanism allows it to handle both single sheets and envelopes while continuous form paper is left in the machine. The Color Jetprinter prints in seven colours on standard bond paper, coated stock and transparencies. The inks are stored in easy-to-change, no-mess cartridges . . . Abacus Software has announced two interesting products for the Commodore 64, Xper and Super C. Xper is said to be an expert system, although it sounds to me as though it is simply a database with an efficient search algorithm. Super C is a C language compiler which produces 6510 machine code from source files up to 41k in length . . . ITT has announced a repositioning of the ITT Xtra computer. 'Repositioning' in this case seems to mean a 41 per cent price reduction from $4395 to $2595 for the 256k Model III with a 10Mbyte hard disk. Similar price reductions were announced on other configurations . . . END

# QUME

## 'originals'



## Best for the Qume family of printers

Qume ribbons, developed and refined by Qume and made in Britain for use with all Qume Printers here in the U.K. and in Europe.

Why gamble with imitations, when, for a very small premium you can get Qume Originals. The best ribbons for all Qume Printers without a doubt.

Be sure your printer sees "red" when you fit your next Multistrike I, Multistrike II, or Multistrike IV.

Qume®

**Qume (UK) Limited,**

**Marketing and Sales**
Park Way, Newbury, Berkshire RG13 1EE
Telephone: (0635) 31400 Telex: 846321

**Service and Training Centre**
Bridgewater Close, Reading, Berkshire RG3 1JT
Telephone: (0734) 584646 Telex: 849706

A British Company of ITT

# The DMP-51/52 MP Series:
## A Breakthrough in Plotting Power

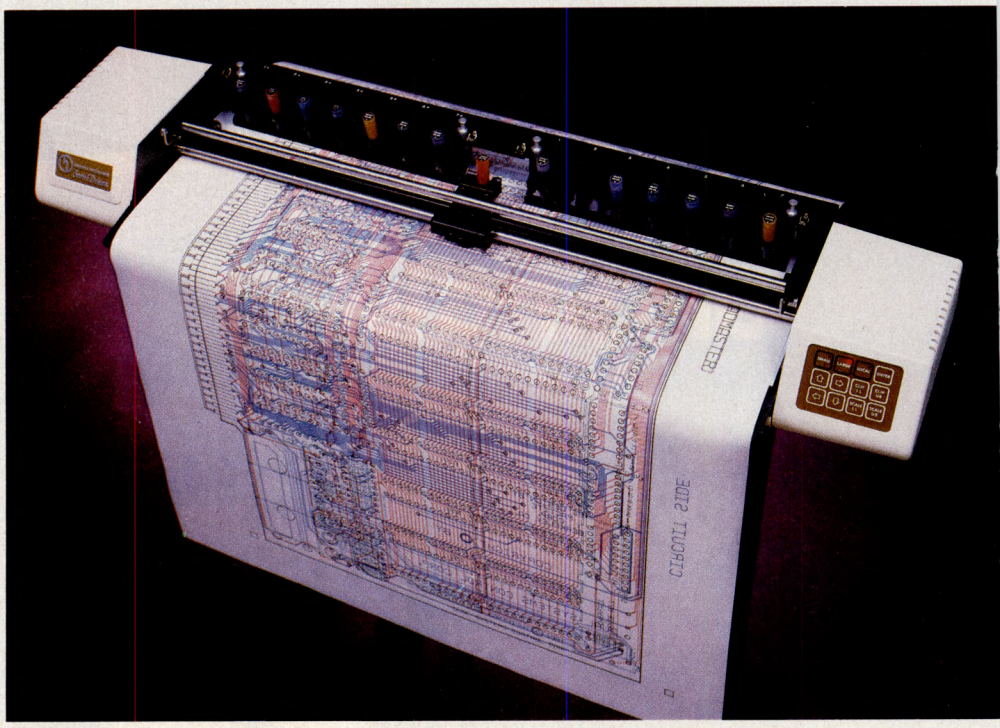

Houston Instrument's DMP-51/52 MP precision drafting plotters are designed to dramatically increase your firm's productivity. Built to be fast, quiet, accurate and intelligent, these new plotters offer:

### CUSTOMIZED PEN PERFORMANCE

Holding 14 pens in two removable pen stables, the DMP-51/52 MP series puts an end to time-consuming manual pen changes. So when your plots require multiple colors, varying line widths or differing types of pens, you can custom-configure the 51/52 MP's 14 pens just the way you need them. This 14-pen flexibility adds a creative new dimension to your plotting productivity. The 51/52 MP's easy-to-use pen stables can quickly be set up in many combinations of pen type, color or width to best produce any given plot.

### ADDED VALUE

The DMP-51/52 MP series offers features usually found on very expensive plotters. Constant velocity control has been added to ensure uniform inking regardless of the angle of pen movement. Liquid ink pens are capped automatically to help prevent them from drying out.

### VARIED APPLICATIONS

Whatever your application, the DMP-51/52 MP series is designed to accomplish the task efficiently. The sturdy plotter produces clean, crisp, C and D size drawings on paper, vellum or polyester film. Its precise resolution of .001 inches is suitable for producing the most complex jobs, such as detailed architectural and engineering drawings as well as circuit board layouts. Furthermore, there are now more than 200 popular graphics and CAD software packages available to run Houston Instrument products.

### SLEEK HARDWARE

Built on the established technology and reputation of Houston Instrument's successful DMP-51/52 series plotter, the multi-pen versions offer you the performance you need to be competitive. By combining a maximum plotting speed of 22 inches per second and a user-selectable acceleration rate of up to 4 Gs with a compact design and servo drive, Houston Instrument has developed a very fast and capable drafting plotter that doesn't require a lot of precious floor space.

### EASE OF OPERATION

A key advantage of the DMP-51/52 MP series is its user-friendly command menu. With the 51/52 MP series, it's simple to select and change plotting parameters such as acceleration, velocity, resolution, pen up/pen down time, paper size, character set, font, parity and baud rate.

### PLOTTING POWER

With Houston Instrument's built-in Digital Microprocessor Plotting Language [DM/PL™], the 51/52 MP series can execute complex functions from simple commands. This resident firmware intelligence means the 51/52 MP series is designed to handle these difficult tasks without tying up the host computer. By coupling this feature with our strong software support program, Houston Instrument has developed a plotter that is the ideal complement to any computer-aided drafting system.

### QUALITY PRODUCTS

Founded in 1959, Houston Instrument has earned a reputation over the years as a quality manufacturer of computer peripherals at reasonable prices. Each Houston Instrument plotter undergoes rigorous testing and hours of systematic plotting and pen changing. Although we don't expect you to have any problems with a Houston Instrument product, our worldwide sales and support network is ready to respond quickly and efficiently if you ever do.

Houston Instrument products are manufactured at our Austin, Texas headquarters and in our facilities in Belgium.

At Houston Instrument, we're committed to changing the way the world uses graphics . . . and the DMP-51/52 MP series is just another example of that commitment.

**Represented in the U.K. by SINTROM PLC, 14 ARKWRIGHT ROAD, READING, BERKS RG2 0LS**

# A TOUGH NEW BREED




☐ 3% MODULATION
☐ 60°C HEAT-RESISTANT JACKET

☐ SUPER HUB RING
☐ OVER 20 MILLION PASSES

Fuji's achievements in Floppy Disk research and development have defined new industry standards for safety, durability and data capacity.

Each twice tested, certified disk is guaranteed for at least 20,000,000 passes. The revolutionary integral super-thin hub ring means that off-tracking could now be a thing of the past.

The 1.6 MB 5¼" disk indicates just how far Fuji technology has advanced. And Fuji's unique sensitizing processes have cut signal modulation down to an astounding 2.3% – unmatched by rivals. To summarise, Fuji have developed a range of disks unsurpassed in the UK. Available today – with tomorrow in mind.

**FUJI FILM FLOPPY DISK**

Cresta House, 125 Finchley Road, Swiss Cottage, London NW3 6JH. Tel: 01-586 5900

DEFINING THE STANDARDS

# FUJI FILM FLOPPY DISK
# MASTER DISTRIBUTORS




CAVENDISH DATA SYSTEMS LTD. 74 Portland Road, South Norwood SE25 4PQ. Telephone 01 654 9211

EPIC BUSINESS SYSTEMS 40-46 Edward Street, Belfast BT1 2LP. Telephone 0232 237274

HYWIN MEDIA TECHNOLOGY LTD. Hywin House 277-279 Pershore Road South, Kings Norton, Birmingham B30 3EX. Telephone 021 458 5444

LOADPLAN LTD. Tranley Mews, Fleet Road, Hampstead, London NW3 2QX. Telephone 01 485 0665

MAGNUM MEDIA LTD. Unit 7, Hogwood Industrial Estate, Finchampstead, Berks. Telephone 0734 734849

SCOTMEDIA COMPUTER SUPPLIES LTD. Unit D, 46 Bavelaw Road, Balerno, Midlothian EH14 7AE. Telephone 031 449 5557

HVL COMPUTING 812 Ecclesall Road, Sheffield S11 8TD. Telephone 0742 661328

TH STRALFORS DATA PRODUCTS LTD. 11 Techno Industrial Estate, Swindon, Wilts SN2 6HB. Telephone 0793 37837

ZIADATA LTD. Hudson House, Terenure Road East, Dublin 6, Ireland. Telephone 0001 901172

MARTINVEST LTD. 63 Buckingham Street, Aylesbury, Bucks. Telephone 0296 661856

FREE ROSE LTD. 24 St. Cross Street, Hatton Garden, London EC1 Telephone 01 405 1430

**FUJI FILM FLOPPY DISK**

Cresta House, 125 Finchley Road, Swiss Cottage, London NW3 6JH. Tel: 01-586 5900

DEFINING THE STANDARDS

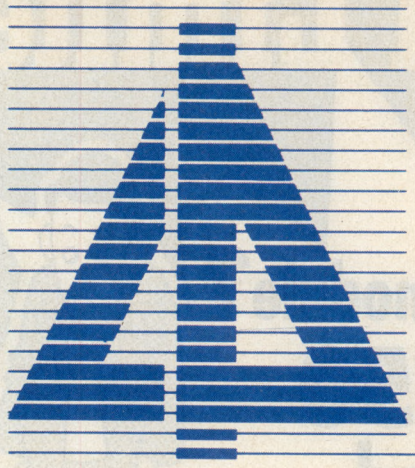

# COCKING & DRURY LTD.

# A SINGLE SOURCE FOR APL

- Consultancy & Programming
- APL*PLUS software
- Education
- Support
- Packages
- Turnkey Systems

Please send me information on:

- ☐ Consultancy & Programming
- ☐ APL*PLUS/PC
- ☐ APL*PLUS/UNX
- ☐ APL*PLUS for the mainframe environment
- ☐ Turnkey Systems
- ☐ My need is urgent - please phone me
- ☐ APL Courses
- ☐ APL Packages
- ☐ Hot-line support
- ☐ Statgraphics, PC Statistical Graphics Software

Name _____

Address _____

_____

_____

Postcode _____

Phone _____

Please send to: **COCKING & DRURY LTD, FREEPOST 34, LONDON, W1E 7QZ**

# TBS Distribution Limited

## Paying £250 for a single module?




# Our Super £250
## Total Integrated Business Accounts Package



**includes**

***SALES LEDGER, SALES INVOICING, STOCK CONTROL, PURCHASE LEDGER and NOMINAL LEDGER plus all manuals and documentation***

**yes all for an unbeatable £250 + VAT**

Runs on all APRICOT, IBM, SPERRY, SANYO & SIRIUS MACHINES
(Payroll available at extra cost)

**Also**



HIGH RESOLUTION

## 12" Monochrome MONITORS

FOR APRICOT, SPERRY, IBM or IBM COMPATIBLES AND MOST BUSINESS & HOME COMPUTERS

***From* £159 +VAT**

**Plus**

## brother PRINTERS

**M-1009 Centronics Compact Dot Matrix**

**£169 +VAT**

**FOR MOST BUSINESS & HOME COMPUTERS**

## TBS Distribution Limited

2nd Floor, Gate House, The High, Harlow, Essex CM20 1OU

## Tel.(0279) 22323

# ORIENT EXPRESS

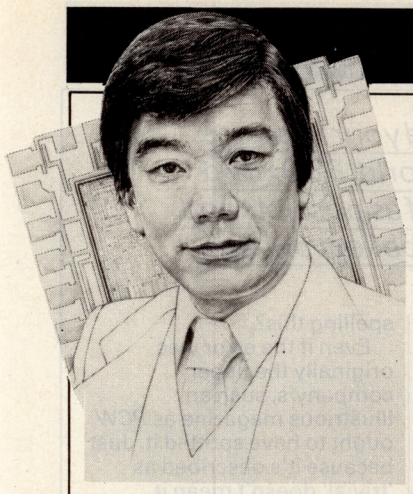

*Shinichiro Kakizawa diagnoses IBM Japan's terminal problems and tries his hand at forecasting the weather in this month's news from the Far East.*

## The trouble with IBM . . .

All is not well with IBM Japan, despite the launch of the 5540 business machine (described in the caption story on this page) which attempts to bridge the gap between the company's bottom-end JX micros and the struggling 5550.

The Japanese market has been a difficult one for IBM over the past 10 years. Unlike the situation in other countries, IBM Japan is not the top supplier here: Fujitsu has the biggest share of the market, with NEC following close behind. IBM is fighting a losing battle against Hitachi for third place.

IBM was once at the top, having more than 70 per cent of the Japanese market, but it has been steadily losing the market to Japanese suppliers in the last decade. This downward trend applies not only to one market sector but to all of them, including mainframes, small-business computers and micros.

The reason for IBM's failure is simple — it couldn't cope with the increasingly demanding user requirements. Until recently, IBM didn't even grasp the full extent of the ever-changing Japanese market.

Where does IBM Japan stand now? None of the IBM PC models are available here: IBM Japan created its own — the 5550, the JX and now the 5540. When the 5550 was introduced, the market was already dominated by NEC which had more than a 50 per cent share. But IBM's hopes ran high. It envisaged a repeat performance of a successful entry into a new market, and quick control of the dominant position was its ultimate goal.

But it didn't happen. While IBM was trying to sell the 5550 which featured just one model, NEC, Fujitsu and other local manufacturers began to expand their entire product ranges. The 5550 had achieved moderate success, primarily as a 3270 emulation terminal cum PC in the IBM mainframe user market, but had never taken off as a business micro. IBM pushed the 5550 fruitlessly for over a year, but finally realised that a new machine was imperative.

Last September a series of new-model JX machines was announced to fill the demand in the lower-end market (JXs are PCjr lookalikes and very cheap). IBM was confident that this time users would appreciate the real power of IBM, but again, to the company's surprise, things went wrong. While IBM was developing the JXs, its competitors had also strengthened their products.

IBM had to try something else so it announced the 5540, but this is a stripped-down version of the 5550: same 8086 chip, same MS-DOS operating system. Everything in the 5540 is identical to the 5550 except that a colour display and hard disk are not supported.

The market has reacted cooly. Many micro retailers in Akihabare — Japan's electronics bazaar — have ignored the 5540's launch. Now, with this product line considered unconvincing even by existing dealers, IBM Japan faces a difficult task — to gain a prominent position in a market where the users do not dance to IBM's tune.

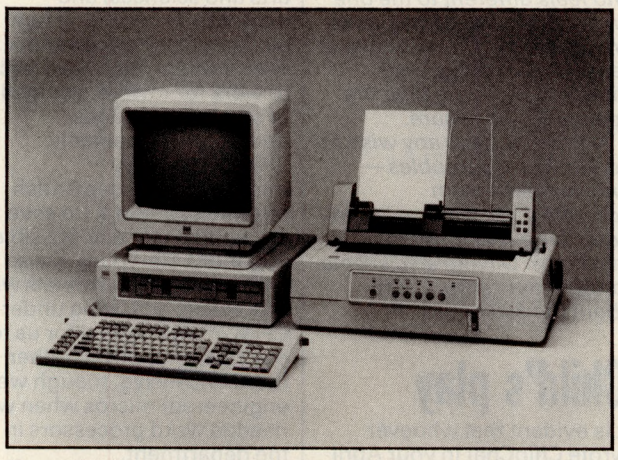

***If you think this machine looks less than exciting you'd be in agreement with many Japanese users. It's the IBM 5540 which consists of an 8MHz 8086 cpu, 256k main memory expandable to a maximum 640k, two 720k double-density 5¼in floppy disk drives and an amber-coloured display screen.***

***List price for the basic configuration is £1460, which does not include the display, but my IBM salesman unofficially suggested that I should be able to get 20 per cent discount.***

## DIY weather forecasts

IBC, a Kyushu software house, has developed a DIY weather forecast program. The program analyses data from the Japanese weather satellite 'Himawari' (Sun Flower) and apparently continually presents highly accurate forecasts.

Satellite data is captured through a parabola antenna on the roof; the data is analysed by the program and displayed on a VDU. With this DIY system, users can forecast the local weather and answer questions such as: 'How much rain should I expect in my garden half an hour from now?'

IBC says with a straight face that the DIY system provides a useful guide for setting up short and long-term marketing strategies for many service and leisure industries such as football stadiums, open-air children's parks, zoos, exhibitions, and catering services for these facilities. Farmers and other weather-dependent industries can also benefit.

The program runs on many popular 16 and 8-bit micros; the only functional difference between the two versions is that the latter displays the temperature on an eight-level scale while the former can do it on 64 levels.

To run the program, you need a parabola disc antenna of a small diameter and a down converter which is basically an A/D converter. Weather data transmitted from the satellite is captured by the antenna, converted to digital form and stored in a floppy disk; this data is then analysed by the program.

A moving picture of clouds, similar to those seen on TV weather programmes, can also be shown on the VDU. The picture can be enlarged up to 16 times the original size in order that the user can zoom in to a particular point on the map. IBC suggests that simply by watching the clouds moving on the screen, users can make a fairly accurate forecast themselves.

IBC also says that two to three weeks self-training will be required before users can enjoy the full benefits of the DIY system. As for the satellite data, anyone can use it provided he submits an application form to the Government Weather Authority, which owns the satellite.

The program is called 'Weather Man' and costs £6600, inclusive of parabola antenna, A/D converter and interface cards.

## Floppy converter

A unique stand-alone floppy disk converter has been released from Iwasaki Engineering in Kyoto. The machine has two drives, for 5¼in and 8in disks, and performs two-way copying of either-size floppy disks in a mere 160 seconds. Setting copy parameters is done through prompt messages on the single-line LCD screen located on top of the box. Entire disk or file-by-file copying is supported for any sequential files.

Iwasaki claims that the unit is useful in an IBM business data processing environment where 5¼in and 8in drives often co-exist. END

# LETTERS

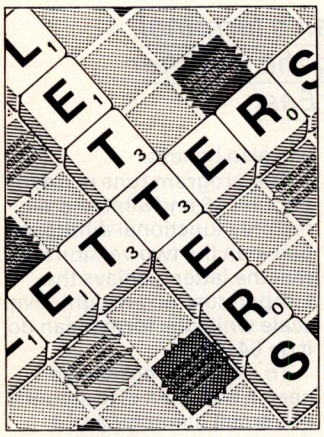


*This is the chance to air your views — send your letters to Communications, Personal Computer World, 62 Oxford Street, London W1A 1HG. Please be as brief as possible and add 'not for publication' if your letter is to be kept private.*

## Bravery . . .

In Guy Kewney's report on Tapestry, the network management product which he saw at the PC Trade Show (May 1985 issue) he claims to be confused by the PC Network and its software.

The situation is quite straightforward. The IBM PC Network was announced in September 1984, and became available in April this year. IBM offers a choice of two software programs to run the network: Torus' Tapestry or the IBM PC Network Program.

The report claims it is 'yet another non-standard IBM network standard'. This is not so — it is IBM's stated intention to connect the PC Network and IBM's planned industrial network to its future token ring local area network. Each network will have the ability to communicate with IBM System/370 host computers and applications.

**MD Stott, Information and Services Manager, IBM United Kingdom Ltd**

*It takes a brave man to say that anything to do with networking is 'quite straightforward'. We remain sceptical: after all, bugs are still being discovered in PC-DOS. For example . . .*

## . . . and bugs

We have found a bug in PC-DOS/MS-DOS version 2.1 when copying more than 255 files using the wild card option (*).

If you attempt to copy files from one sub-directory to another, on a hard disk machine, using a command such as COPY *.* or COPY *.EXT and this results in more than 255 files being copied, the 256th file is not copied. This also applies to the 512th file (and probably all multiples of 256). The screen message tells you that the file is being copied, but this is not so.

The file count is reset to zero after 255 files and restarts counting from one as more files are copied. Therefore, when copying is complete, the screen message 'File(s) copied' gives you the true number of files copied — 255.

Since finding this fault two months ago, we have scanned the computer press to see if anyone else has reported it. Having notied with some surprise that no-one seems to have found it, we felt that we should report it to you.

**W Clewlow, Bass Computer Services, West Bromwich**

*You're right — small though it may be, it's there in DOS 2 and 2.1. If it's any consolation, IBM says it's been fixed in DOS 3.0.*

## In the eye of the beholder

Having read Peter Bright's 'review' of the ABC 310 in the April issue, I feel I must redress the balance.

Firstly, the ABC's size. Who was it who said: 'Beauty is in the eye of the beholder'? If Mr Bright subscribes to this view (and I'm sure he does) why does he then make such a song and dance about the 'sheer ugliness' of the machine? I like the ABC, not because I like 'slab grey' (Mr Bright's words, not mine), but because I think that the all-in-one approach is much neater and more ergonomic (so did Mr Bright in his review of the C/WP Cortex in December 1983).

Next, the keyboard. Mr Bright may think it 'chunky' and 'dated', but did he notice that it is virtually the same as the BBC Micro's (except that the ABC's is 'slab grey', only it isn't, it's beige). Anyway, how does the colour of the keyboard (or, for that matter, of the computer) affect its performance?

Having expressed my opinions of its appearance, now for the computer itself. Has it not occurred to Mr Bright that, like the PCB, the OS chip might have been redesigned? (This, incidentally, is why the Electron has a 1.0 OS rather than a 1.2 OS.) Also, Mr Bright says, in the same issue, that the RM Nimbus being '. . . the third fastest we have ever tested, beaten only by a couple of Motorola 68000-based machines'. 68000-based machines like the Sage p-System, TDI Pinnacle, ABC 310 . . . ABC 310?! Yes, the ABC 310, which uses a humble 6502 and an Intel 80286, is timed with every test faster than the Nimbus, and an average 1.63 seconds less than the Nimbus.

I used to think that a Benchtest was a fair, unbiased review of a computer. Recently, though, I have had my doubts. Surely Acorn is in enough trouble already without being subjected to an unnecessarily bad review?

**Hugh McLaren, Great Ayton, North Yorkshire**

*Redressing the balance is fine, and we obviously can't claim a monopoly on interpretation, but it's hard to agree with some of your points. We are in agreement about the all-in-one approach — Atari is also promising a neat monitor with built-in drive for its STs — but the ABC is a much bigger machine than the Cortex.*

*As for the keyboard, it looks and feels different to the one on the BBC. The Benchmarks are instructive, but we have to repeat the message that there's more to life than the speeds they measure.*

*Nor do we have any wish to add to Acorn's troubles — only to report them accurately, as is our policy in describing and assessing machines. Olivetti also seems to share our reservations about the 300 range.*

## Child's play

It is evident that whoever wrote ChipChat in your April issue, or at least the 'Trivial Fact no 437', has either forgotten all the O Level Physics he or she ever learnt, or never took it in the first place. As any schoolchild will tell you, the unit of electrical charge is not the farad but the coulomb — or wasn't the author in question quite up to spelling this?

Even if the error was originally the paper company's, such an illustrious magazine as *PCW* ought to have spotted it. Just because it's described as 'trivial' doesn't mean it shouldn't matter. We don't want to know about static measured in picofarads because it don't exist. Funny perhaps, but it would be helpful (and credible) if a few basic facts were right.

**Thomas M Hawkins, Southampton**

*We could, of course, pretend that it was an April Fool's joke. On the other hand, we could admit that we got the unit wrong. By the way, the figure itself was correct.*

## Don't buy British!

Normally I am a gentle, kindly person but recent experience forces me to voice strong opposition to M Hamer's recent invocation to 'Fly the flag' (Letters, *PCW*, April 1985) and buy British micros. My general advice is not to buy British unless forced to at gunpoint, and even then ask for a second opinion. The Brits are marvellous at design and invention (I include the arts and sciences) and generous in providing free services (such as computer user groups), but when forced to work for reward, the quality of service and goods deteriorate remarkably.

Our laboratory minicomputer uses British terminals, brand X (to save embarassment and possible litigation). Company X also sells intelligent terminals with disk drives operating under CP/M. It was natural for us to buy this company's (rather more expensive, though well engineered) micros when we needed word processors in the department.

The company was reluctant to sell us a fourth X micro directly, and we were forced to buy the machine from an even more reluctant dealer many miles away. It was true we were demanding more than just a micro. We wanted WordStar, dBasell, a daisywheel printer and

accoustic hood as well. We also wanted the system to work! Instead of company X first installing and checking the system in its own premises, the goodies arrived accompanied by two nice blokes who did not know how to get the printer or programs to work (this is called software support!). They did not appreciate that a special printer cable was required, although we were ale to teach them from our own experience on the other X brands. This is called on-site training!

The dealer sent another expert (remember the experts were travelling at least a hundred miles a day to install the system) who decided they needed help from the X manufacturer. A software man from company X eventually got the goodies cobbled together. There are still bugs in the WordStar implementation and dBasell has an unresolved problem. Public money (yours and mine) has been spent on a British system which has cost more in terms of wasted time than would have been necessary if a local dealer had sold and installed a system which he understood.

The distant dealer, who was forced to sell us brand X, complained that he did not get the software support from the parent company. This is probably true — our dealings with company X has revealed the usual discrepancies between the real machine and the documentation. Company X felt that it was not worth investing support in a small customer, and any information it did provide was done as a great favour. It was wrong. We are not naive computer users who need constant hand-holding. If the company provided us with reasonable and prompt support it could have access to in-house software which could be used by other laboratories. At present I must advise my colleagues in other NHS laboratories to avoid brand X.

This and similar experiences with other commercial companies has revealed some common failings. Sales and support staffs are separated, each ignorant of the other's activities. In general, technical and support departments appear to be pushed into back rooms and are less well paid. May I prescribe the following treatment before departing in my rusty but reliable (Japanese) car?
1) Reduce the sales staff.
2) Use the money to provide better goods, services and information for the customer.
3) The satisfied customer will do your selling.

**Dr C Weinkove, Bramhall, Stockport**

# Temperature rules

Fahrenheit/Celsius conversions need not be as cumbersome as Mr Khatir's formula (Letters, *PCW*, May). The simplest rule, taught to me some 60 years ago, is based on the fact that −40 is the same temperature in both systems, so the rule is:
Add 40 : Multiply by 9/5 or 5/9 : Subtract 40 : END

For C to F you use 9/5ths; for F to C 5/9th (you are expected to remember that Celsius degrees are larger than Fahrenheit).

**RA Fairthorne, Farnborough, Hants**

# Getting it taped

The Department of Trade is considering a levy on audio and video tapes to recompense for the alleged loss of royalties due to pirates. This is spelt out in the Green Paper *The Recording and Rental of Audio and Video Copyright Materials*, Published by HMSO.

The DOT has been impressed by the amount of support which has no doubt been produced by the trade lobbies. It also quotes an 'International trend towards a tape or equipment levy'. which all suggests that the levy will be introduced although it is claimed that no decision has been reached as yet.

A levy of 10p on an audio tape and 25p on a video tape may not cripple the innocent but it is a bad principle. The way it has been proposed assumes that pirating is related to the music and video industry because that is where the strong lobbies exist, but it is not going to be long before the computer industry wants a share of the cake. This will lead to an increase on the levy and eventually to applying it to disks. Even a person who never even thought about pirating will still be penalised on the grounds that he could have if he had wanted to.

Now we all know that pirating goes on but the figures are wrong. a person who pirates a copy of WordStar for a pound or two would not pay out £250. A business user would not bother to pirate software because the support and manual are worth more than the cost (or they should be). The same applies to all popular home pirating. All pop pirates that I have met seem to spend most of their money on records and they tape music that they cannot afford to buy, therefore the industry does not lose as much as it would like us to believe and much of its reduced income is due to the reduced purchasing power of the market.

Commercial pirating is just plain stealing and should not be glamourised by an exotic title. We should not have a levy on the innocent — it is like charging you 50p to walk the streets because you might mug someone.

If enough people protest it will have a balancing effect on the trade-sponsored lobby which is pushing the matter despite early government doubts. If this levy does come about it will spread, and could be applied equally to magnetic disks. A more ominous threat is that the levy could be applied to equipment. Eventually it could be applied to plain paper because it's used to photocopy sheet music. Whatever the outcome, it is likely to be effective for a long time because no government misses a trick to raise money.

**D Taylor, Hornchurch, Essex**

*As far as we know, only a levy on video tape is being considered now, which doesn't alter the fact that penalising the 'innocent' along with the 'guilty' doesn't make much sense to us either.*

# Knowing about Aslib

I read with interest Stephen Farr's article 'In the Know', *PCW*, April. I was surprised, however, that there was no reference to the fact that there is a national centre in the UK which was set up specifically to give information and advice about online databases.

The Online Information Centre, which is now part of Aslib, can provide detailed information about the systems which are available and the equipment and training needed. An annual subscription covers a monthly newsletter and gives access to an advisory/information service, but new contacts can usually be helped with their initial enquiries with no obligation to subscribe. The centre has over 800 subscribers in the UK and overseas, and answers over 2000 enquiries every year.

The Online Information Centre can be contacted c/o Aslib, The Association for Information Management, 26/27 Boswell Street, London WC1N 3JZ. Tel: (01) 430 2671.

**Dr D A Lewis, Aslib**

# Printers, problems and praise

I have previously written to you regarding the problems I had correctly connecting the Spectrum Interface 1 with the Brother HR-5 printer, and would now like to inform you that Brother's service department in Audenshaw, Manchester, sorted out the difficulties. Some of the wires from the RS232C port from the printer's side have to be linked together before it will work correctly. The correct linkage is:

| ZX IFI | HR-5 |
|---|---|
| 2 | 2 |
| 3 | 3 |
| 4 | 20 |
| 5 | 5 |
| 7 | 7 |

The 4, 6 and 8 wires should be linked on the Brother's side.

Although this printer and the Spectrum are normally linked via an extra Centronics interface, it seems a good idea for those who normally have the ZX Interface for their Microdrives to obtain normal-sized printing using the HR-5 with the RS232C interface.

Furthermore, the HR-5 switches should be set to eight bits and the Spectrum baud rate to 300 (FORMAT "t";300 : OPEN #4;"t": REM for text: FORMAT "b";300 : OPEN#5;"b" : REM for control characters). Text can the be printed using the fourth channel (PRINT#4; "text";), control characters (underlining or emphasised characters using the fifth channel (PRINT'#5; CHR$ ;), which is rather more complicated than the method mentioned in the manual.

**Henk van de Pol, Geneva, Switzerland**

*It's good to know that some suppliers can be helpful. We've also received words of praise for Pace Software Supplies of Bradford and DGR Computer Products of Tonyrefail in mid-Glamorgan.* END



## BANKS' STATEMENT

# Picture talk

*Martin Banks muses on the impending significance of graphics and networks in the small-business market.*

As I sit here in front of my machine, it is the middle of April. I mention this for no other reason than by the time you read this, it will be the best part of June and the world will probably have changed.

For a start, we'll be a lot nearer the day (which I'm sure you've all been waiting for) when you can actually buy Microsoft's Windows and IBM's Topview. Both packages are relevant to my first theme — graphics front ends to applications programs. My second theme is networking, especially small, tolerably cheap networks. These two mark what is likely to be the dominant thrust in the small-business marketplace, and any manufacturer of hardware or software which does not have at least a stated position on them may well have no position at all in the near future.

The reason that these two are going to be significant has nothing specifically to do with them being explicitly used together, though this will almost certainly be the case. Rather, it is that they represent a growing industry trend to make all this clever technology do something that the user can not only understand, but can see a simple reason for using. Of such philosophies are sales made.

It is the potential arrival of MS-Windows that is prompting my interest in graphics. According to Bill Gates, who, as boss of Microsoft really should know, Windows is going to be the greatest graphical thing since sliced bread. Users and software authors will be able to do things with it that will make you thrill with excitement. The trick, as first developed by Xerox in the US and followed by Apple with the Lisa (sorry — the Macintosh XL) and the Mac itself, is to put graphics at the human interface to an applications program. This has the remarkable effect of making the program understandable in operation and easy to use.

I appreciate that some computing devotees will find such an idea heretical, but the users like it. There is no reason why someone can't walk up to an applications program that has not been encountered before and rapidly get it going in a usable fashion; that is what these graphics front ends can do.

Digital Research was quick to spot the opportunity and produced GEM (Graphics Environment Manager). This adds the same type of Macintosh facilities to a wide range of machines, not least of which is the IBM PC. GEM, though disparaged by Microsoft's Bill Gates when compared to the upcoming Windows, has one distinct advantage — it is available and working. For those who had one particular reservation about the Macintosh, GEM can also work in colour.

The sneaky Japanese have now got in on the act too — Epson recently launched its QX16 PC-compatible machine. As hardware, it is a fairly average box with not too much to distinguish it from the general PC throng. But it has one special feature — a graphics front end called Taxi, a package developed by Epson UK and currently on sale only in Europe. If it is pushed hard in the US as well it could prove quite a sales aid in that important market. Taxi offers the usual Macintosh facilities and can be added to any standard MS-DOS applications package in about a day. (It should only take a beginner a couple of days to fit up a package, according to the company.)

*'Getting the cost of networking down by using the latent intelligence of the hardware more wisely makes a great deal of sense, not least to the user who gets a cheaper network that is easier to work with.'*

Once seen, the advantages of all these graphics front ends are obvious, and you begin to wonder why you ever felt at home with the dear old A> prompt as the only intro to anything.

With a bit of lateral thinking, however, graphics can be taken much further than just as a helpful front end to applications: it can become the application itself. For example, I recently saw a demonstration of a Macintosh program which is ideal for any small publisher. Called Pagemaker, it allows the operator to take words prepared on any Mac-oriented word processing program and paste them down onto a 'page' format onscreen. Headlines can be written, typefaces can be tried out, and different sizes and shapes of article can be toyed with on the page until the user is happy with the result. When the job is complete, the idea is that the user will then fire the page round the AppleTalk network to the new LaserWriter, which is a dashed clever (if expensive) box of tricks that can print fancier and better than most micro owners would feel they have a right to expect. (Pagemaker is not yet available.)

Mention of AppleTalk neatly brings in theme two — networks. Currently, networks are an adequate solution for some people, but users have to be prepared to pay large amounts of money. AppleTalk is one of the first systems to attempt to keep the interconnection costs low by putting most of the network's required intelligence in the hardware rather than the interface. The LaserWriter, for example, has a 68000 processor and 2Mbytes of memory built into it. The file server will be similarly equipped. The idea is that connection charges, for a simple twisted pair cable and a connector box, will be around the £50 per station mark.

This can be achieved by making use of the processing power available. For example, instead of trying to transmit a full bit-map to the printer, the network is used to send only enough data for the internal system of the printer, which uses the Linotype-developed PostScript language to reconstruct what is required.

Getting the cost of networking down by using the latent intelligence of the hardware more wisely makes a great deal of sense, not least to the user who gets a cheaper network that is easier to work with. The British Micro Manufacturers' Group is seeking a similar end, with its recent requests to the Department of Industry for development funds for a network scheme. This, if and when it gets off the ground, could be even better because it will work with more than one type of hardware. Sometimes, technology can be made to look quite reasonable, really. END

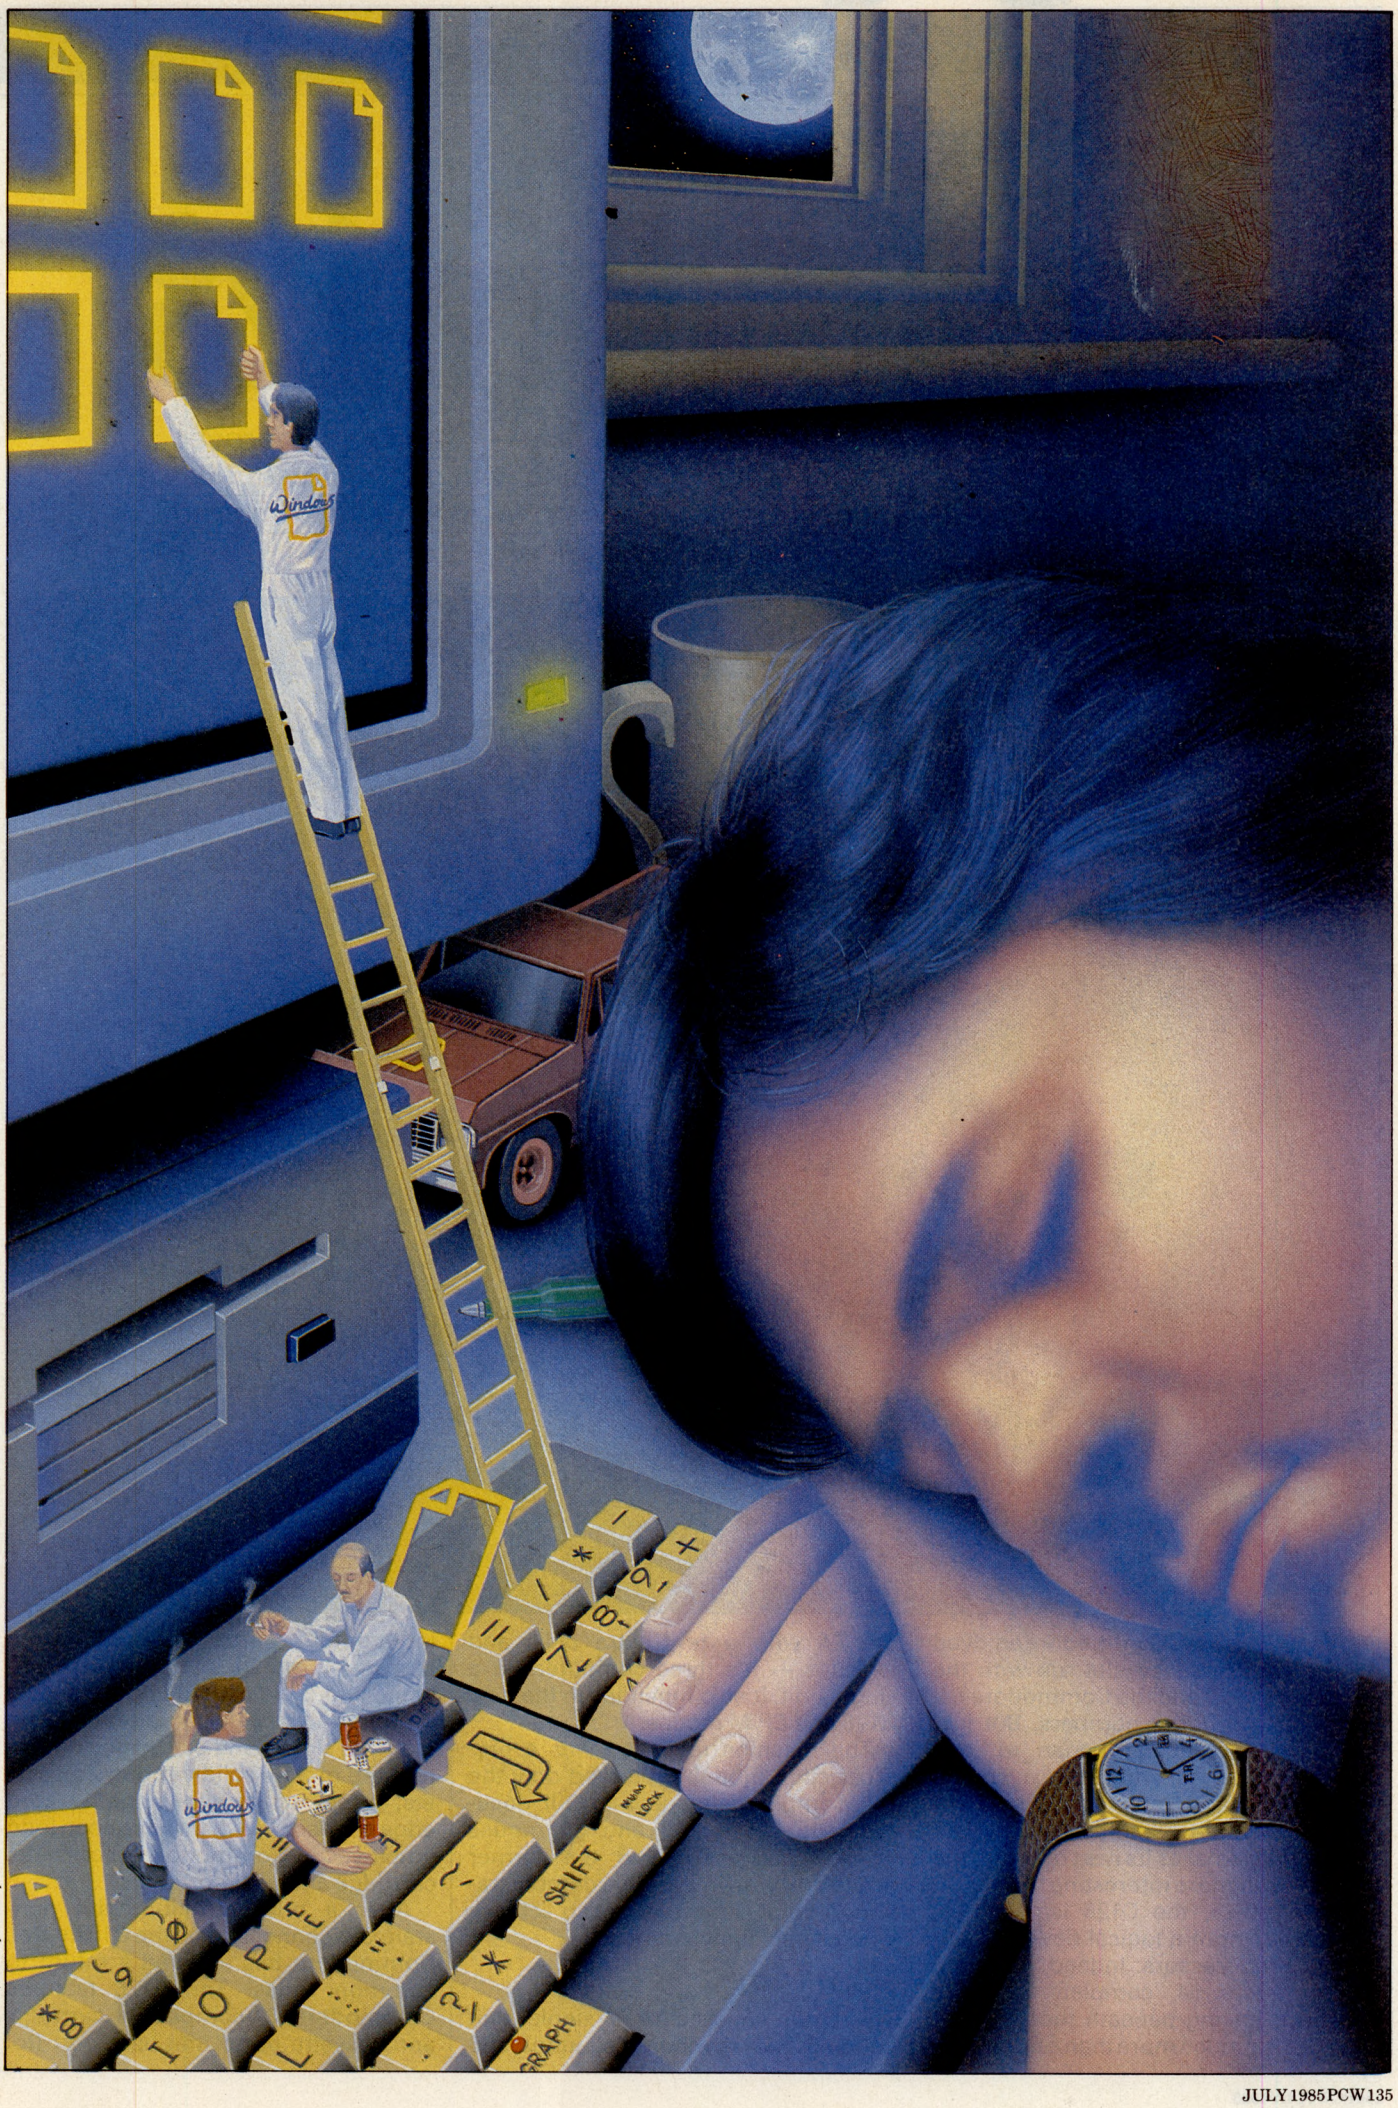


Illustration by Tony Randell

# Commodore 128

*The C128 is Commodore's answer to its critics — it sports an improved Basic, and Commodore 64 compatibility coupled with originality. But has it come too late in the light of strong competition from Atari and Amstrad? Peter Worlock takes a look.*



In its earliest days Commodore enjoyed a remarkably successful run with the Pet, the Vic-20 and the Commodore 64, all selling in large numbers. But just when the company began to look invulnerable, it stumbled over the launch of the C16 and Plus/4 models in the crucial pre-Christmas period of last year, which makes its next offering, the C128, even more interesting.

In a sense, the C128 isn't a new machine, more a logical development of its predecessors. Indeed, there's a Commodore 64, complete in every respect, lurking beneath the skin. But the C128 is much more than a Commodore 64 with a few extra bells and whistles — it's three computers in a single unit. It also functions in the new C128 and CP/M modes.

The machine reviewed was a pre-production model but lacked only the CP/M implementation and full documentation. The 128 and 64 modes worked flawlessly, and the former proved to be an impressive demonstration of what Commodore can achieve when it gets things right.

## Hardware

The C128 consists of a single unit housing the keyboard, circuitry and input/output ports. The unit is an attractively-styled low wedge in off-white and grey, with the power switch and interfaces neatly tucked away at the rear and right-hand side. The connectors are mostly solidly-mounted sockets, except for the familiar gold-plated edge connectors which have been long employed by Commodore for cassette, cartridge and user ports.

After a brief flirtation with non-standard connectors on the C16 model, Commodore has enjoyed a return to common sense. The C128 features Commodore 64-compatible cartridge and cassette ports; the user port (for

modem and IEEE devices) is the same as that on the Pet, Vic-20 and Commodore 64; the two joystick ports are also standard 9-pin D-types; and the standard Commodore serial port for printers and disk drives is also present, plus the composite video output port.

However, there are two new features, both welcome and long-overdue on Commodore's machines — a reset switch and an RGB monitor interface. The reset switch is set into the casing so accidental operation is avoided, but neither is it necessary to dig around with the end of a ballpoint or the like.

The RGB interface is required for the 80-column display as Commodore's standard composite monitors lack the necessary resolution.

The keyboard looks large although it isn't much wider than that on the Commodore 64; the impression of width comes from the addition of a numeric keypad on the right-hand side. Other new features include the moving of the four programmable function keys from a vertical strip on the right to a horizontal strip above the numeric keypad. They have been joined by 12 other dedicated function keys, including four cursor keys, although the traditional Commodore arrangement of cursor control from two keys next to the right-hand SHIFT key is retained.

*'In a sense, the C128 isn't a new machine, more a logical development of its predecessors. Indeed, there's a Commodore 64, complete in every respect, lurking beneath the skin.'*

The other function keys include ESCAPE, TAB, ALT (a kind of secondary CONTROL key), HELP, LINE FEED, 40/80 COLUMN DISPLAY, CAPS LOCK and NO SCROLL. The LINE FEED key looks as though it's there just to make up the numbers since the same effect is achieved with SHIFT/RETURN, but CAPS LOCK is welcome to word processor users, and the HELP key is a boon to programmers, identifying the location of program errors.

Overall, the keyboard is as good as any on machines costing less than £1000. It's pleasantly sculpted, has a light but positive feel, and once again emphasises the point that there's no excuse for supplying computers with unprofessional keyboards.

Getting inside the machine is difficult. Six screws hold the casing together, with the circuit board fixed to the lower half and the keyboard fixed to the upper. Two bundles of connecting wires link the two sections. The circuit board is covered with a metal shield, and removing this reveals a neat board design which takes up the whole of the available space.

On the review machine nearly all the major components were on EPROMs with the exception of the RAM block and two interface controllers, the latter handling all I/O including keyboard, cartridge and user ports, and joysticks.

The C128 has two main processors — the 7510 (another development of Commodore's line of 6502-compatible chips) and the Z80 for CP/M operation. The 7510 is an upgrade of the Commodore 64's 6510, and allows the C128 to completely emulate that machine while also providing the ability to handle the extra bank of 64k RAM and the new ROMs. (An examination of the C128 memory map should prove an interesting exercise as the machine is obviously doing some very sophisticated memory paging.)

Graphics and sound are handled by two custom chips — VIC (Video Interface Chip) and SID (Sound Interface Device), both inherited from the Commodore 64. SID is arguably the most powerful sound synthesiser available on any micro, giving three independent sound channels, full ADSR enveloping, filtering, hard sync and ring modulation, and four waveforms — pulse, sawtooth, triangle and white noise.

In addition to normal alphanumerics, the C128 features the full range of Commodore block graphics characters which can be displayed in either 80×25 or 40×25 text mode. The advanced graphics features are available in 40-column mode only and include eight programmable sprite graphics, 320×200 high-resolution graphics mode, and 160×200 multi-colour mode.

The C128 offers 16 colours, available from the keyboard, and can display all 16 at once in text mode. In the highest-resolution mode, two colours can be displayed in each 8×8 character 'cell', and in multi-colour mode four colours can be displayed in each cell at the cost of half the horizontal resolution.

## System software

CP/M's movement into the home market continues with the C128, but whereas Acorn, Amstrad and others have offered it as an upgrade, the C128 features CP/M as standard. The C128's other plus is that it features CP/M version 3.0, not the older version 2.2.

*'If Commodore had got this machine to market before last Christmas, instead of the Plus/4, it would almost certainly have wiped the floor with its major competitors. The market's a tougher place now.'*

Commodore has further customised the operating system to take advantage of the 128k of RAM and the machine's sound facilities, although how this affects operation remains to be seen. However, CP/M was not implemented on the pre-production review machine, which may indicate problems in installing the software.

The inclusion of CP/M should be a distinct advantage and widens the scope of the C128 considerably. CP/M holds out the promise of access to an enormous range of applications programs, and already Thorn-EMI has announced that it will convert its Perfect suite of business software — word processor, spreadsheet and database — to Commodore disk format.

In 128 mode, the machine holds no surprises for anyone familiar with




*View from the side: two standard joystick ports, the reset button and power on/off*

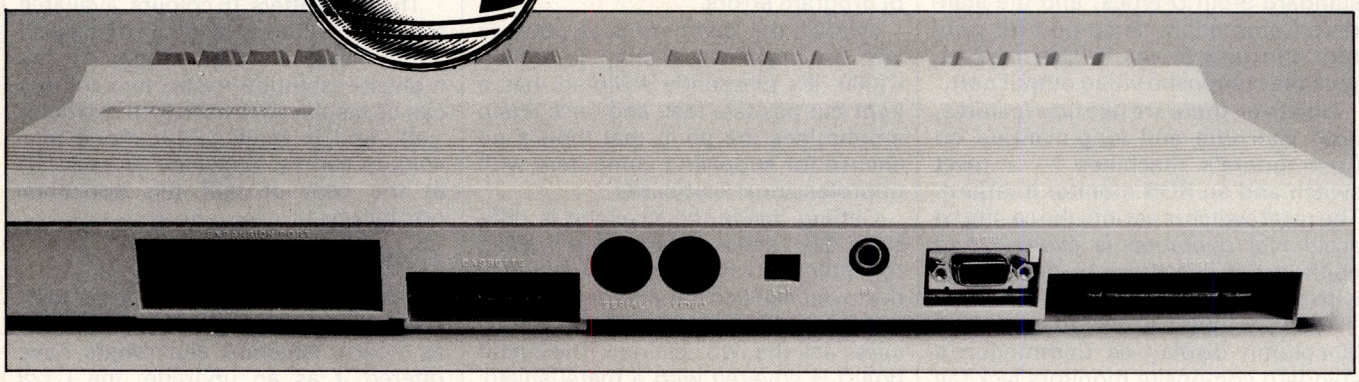

*The cartridge and cassette ports, the user port, the standard serial port and the RGB interface*

Commodore machines, with the possible exception that disk commands are now built into Basic. The unwieldly syntax of LOAD "$", 8: LIST simply to get a disk directory is now replaced by the DIRECTORY command, and other disk functions are similarly catered for.

The addition of an ESC key is welcome since escape codes for, for example, printer operation can now be generated direct from the keyboard. Another development involves the 'programmable' function keys; on the Vic-20 and Commodore 64 these were programmable only through interrupt-driven machine code. The C128 features a KEY command that allows you to define each key to perform any desired function. This can either print a string, an oft-used Basic statement for example, or a direct command can be issued by adding CHR$(13) — a carriage return — to the key definition.

One other welcome surprise awaits — the inclusion of a sprite-definition program in ROM. Simply issuing the command SPRDEF calls up a sprite grid which gives control of sprite design, mode and colour. The definition is placed in sprite memory with SPRSAV, and all definitions can be saved to tape or disk with the BSAVE command.

## Applications software

The new version of Basic on the C128 is one of the most attractive features of the machine. Although its line of descent is clearly traceable from the Vic-20's Super Expander Basic through the version implemented on the C16 and Plus/4, it is a good deal more comprehensive than any Commodore Basic to date although it is still short of the standards set by Acorn's BBC Basic and Amstrad's Locomotive version.

There are a host of new commands and functions, largely covering the areas of graphics, sound and disk control. It remedies most, if not all, of the shortcomings of programming on the Commodore 64.

Sprite control is easy with new commands such as SPRITE for turning on, colouring and positioning each sprite; MOVSPR which allows you to determine the direction and speed of movement of each sprite; and COLLISION which is interrupt-driven and transfers program control to a specified subroutine when a sprite-to-sprite or sprite-to-background collision is detected. Sprites can also be drawn on the high-resolution screen and transferred by means of the SSHAPE and SPRSAV functions.

The convoluted manner of high-resolution graphics on the Commodore 64 is also gone. A GRAPHIC command allows you to set up one of five screens: text, high-resolution, multi-colour and two split screens of either text and high-resolution, or text and multi-colour. The split screens default to a five-line text window, but this can be altered by the addition of an extra parameter to the GRAPHIC command.

Others include DRAW and BOX with the ability to rotate the object drawn, CIRCLE which caters for arcs, ovals and elipses, a PAINT command for solid colour fills, and CHAR which displays text and block graphics on the high-res screen. The system now features automatic clipping so that out-of-range values don't crash your program — the operating system 'clips' them to fit the screen.

In text mode a WINDOW command allows you to define an active text area, which means that user input and messages can be displayed without destroying a previously-defined screen made up of block or user-defined characters.

The other main bugbear in Commodore 64 Basic is controlling the machine's sound facilities. Again the C128 goes a long way towards putting things right with four new commands: SOUND takes the arguments voice, pitch, duration; PLAY sounds a string of notes; TEMPO allows you to control the duration of each note in a PLAY

### Benchmarks

| | |
|---|---|
| BM1 | 2 |
| BM2 | 11.8 |
| BM3 | 22 |
| BM4 | 23.3 |
| BM5 | 26.5 |
| BM6 | 42.4 |
| BM7 | 67.3 |
| BM8 | 126 |
| Average | 40.1 |

***All timings in seconds. For a full listing of the Benchmark programs, see page 185, January issue.***

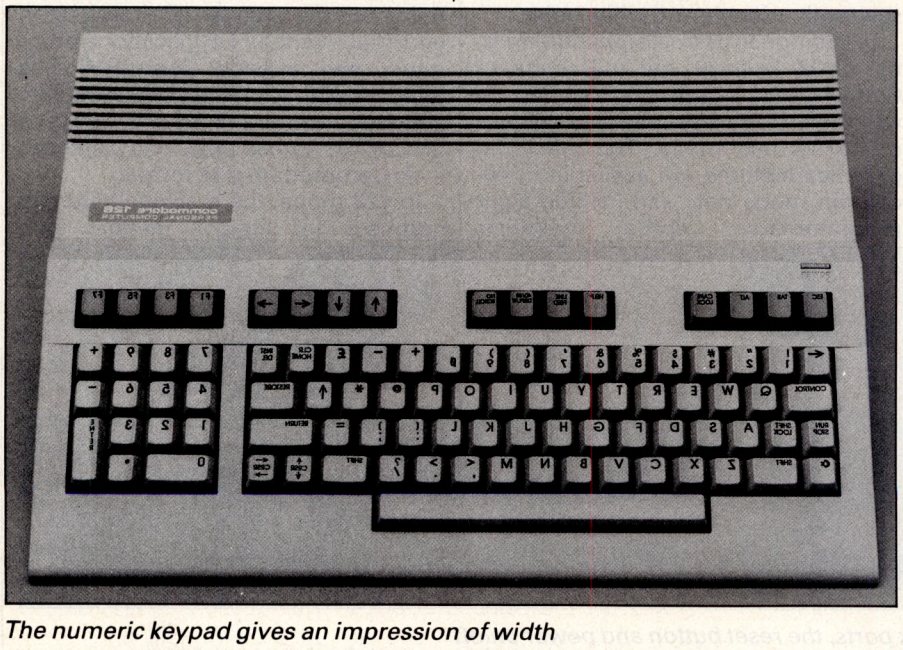

*The numeric keypad gives an impression of width*

# KGB
# THE PRICEBREAKERS!

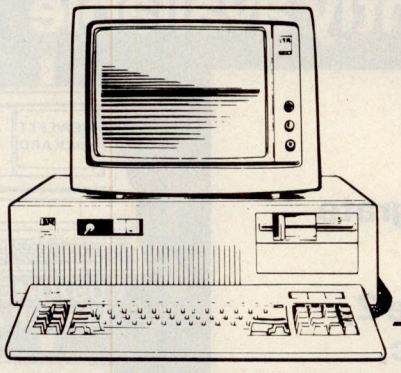

## IBM AT, XT AND PC

**IBM AT** Enhanced 512K RAM, 20MB Winchester. Screen. Keyboard. 1·2MB Floppy. **From £4514·40** ex VAT

**Contact the KGB for details of other models.**

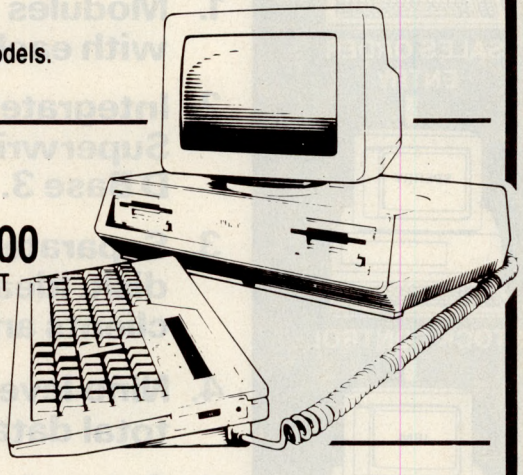

## APRICOT PC, Xi, PORTABLE AND POINT 7

**PC** 256K RAM, 2 x 315 Floppies, 9 inch Screen. Keyboard, Supercalc. Superwriter. Superplanner. DOS. **From £1470·00** ex VAT

**Xi** As PC but with 10MB Winchester. **From £2470·00** ex VAT

**Contact the KGB for details of other models.**



## OLIVETTI M24 AND M21

**M24** 128K RAM. 2 x 360K Floppies, Screen. Keyboard. DOS. **From £1615·50** ex VAT

**M24** As above but with 10MB Winchester **From £2875·50** ex VAT

**M21** Transportable. As M24 **From £1615·50** ex VAT

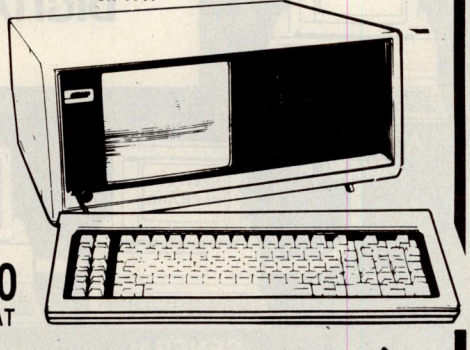

## COMPAQ AND COMPAQ PLUS

**COMPAQ** Transportable. 2 x 360K Floppies, 256K RAM. Keyboard. Integral Screen. DOS **From £1975·50** ex VAT

**COMPAQ PLUS** As COMPAQ but with 10MB Winchester **From £3550·50** ex VAT

***PLUS A GREAT RANGE OF SOFTWARE FOR A WIDE VARIETY OF APPLICATIONS!***

**FREE CAD SEMINARS — RING WINDSOR 50111 FOR DETAILS**

KCB MICROS LIMITED

106 St Leonards Road, Windsor, Berkshire, SL4 3DD
Tel: Windsor (07535) 50111 Telex: 848521

Authorised dealer for **olivetti**

IBM *Personal Computer*

Specialists in Computer Aided Design

**To KGB Micros Ltd., 106 St Leonards Road, Windsor, Berkshire SL4 3DD**
**Please Send Free Literature Pack.**

Name _____
Position _____
Address _____
_____
_____ Tel: _____

PCW/7/85

# Integrity Multi-User Accounting Software

## The most powerful currently available




SALES ORDER ENTRY




STOCK CONTROL




ACCOUNTS RECEIVABLE




ACCOUNTS PAYABLE

### FEATURES

1. Modules can stand alone or integrate with each other.
2. Integrates with Lotus 123, D Base 2, Superwriter, Wordstar, Supercalc, D Base 3.
3. Separate companies accounts on same disk. Ideal for accountants with many clients and companies with subsidaries.
4. Nine levels of password control for total data security.
5. Caters for 4 levels of operator experience.
6. Runs FAST on APRICOT POINT 7, APRICOT POINT 32, SPERRY NET, IBM NETWORK, ICL MODEL 36, HEWLETT PACKARD, ALTOS, DIGITAL, NEC etc.




CUSTOMER ENQUIRY




STOCK ENQUIRY




INVOICING




CASH POSTING




GENERAL LEDGER




CASH BOOK




ACCOUNT ENQUIRY




LOTUS




D BASE 2

★ ICL, ACT & SPERRY APPROVED PRODUCT ★

Dealer Pack & Demo Available On Request

Sole UK Distributors for Integrity Software

## Tailored Business Systems Ltd

2nd Floor, Gate House, The High, Harlow, Essex CM20 1OU

CONTACT US ON... **0279 413893** (10 lines)

command; ENVELOPE gives control of ADSR envelope and waveform; and FILTER implements some of the SID chip's advanced features.

The PLAY command is enormously flexible and powerful. Notes are given simply by name, for example A,B,G with # and $ signifying sharps and flats, and envelope, waveform and filter can be altered with the inclusion of single-letter controls. A musical piece of some length, with three voices and several waveform and envelope variations, can be created with just a few PLAY statements.

As mentioned, disk control is fully implemented in Basic. There are new commands for formatting disks (HEADER), saving and loading to disk, and deleting a file (SCRATCH), as well as a RECORD function which makes the handling of random access files much easier than on the Commodore 64.

The new Basic features improved program control with the addition of DO LOOP . . . WHILE and UNTIL and multiple IF . . . THEN clauses through new BEGIN, BEND and ELSE functions. There are error-trapping commands, functions for reading joystick, light-pen and game paddle input, programmer's aids like AUTO, RENUMBER, TRON and TROFF, a facility to save and load machine code and data with BSAVE and BLOAD, and extra functions for number and string manipulation. The single, major ommision is the facility for procedures with parameter-passing.

The last new feature is the inclusion of a built-in machine code monitor, accessed by the simple MONITOR command. This offers all the usual features of an advanced monitor including assembler, disassembler, memory fill and display, hex dump, block moves, block compare, and the facility to save and load from tape and disk.

## Documentation

The review machine was accompanied by a bundle of photocopied sheets which form only part of the eventual documentation. In its final form this is likely to comprise two manuals to be supplied with the machine, with a third, the *Programmer's Reference Guide*, to be supplied separately.

The material supplied looked like an introduction to programming, covering the new Basic with comprehensive sections on sound and graphics, plus appendices on using the machine in 64 mode. The manual will also include a brief guide to machine code and CP/M. Although the manual was well written and should serve newcomers to programming quite well, the *Reference Guide* should prove essential reading.

## Prices

Commodore has not yet announced final pricing on the C128, although when the machine made its European debut at the recent Hanover Fair it was quoted at around £300.

Pricing will be crucial. Although Atari is offering the 128k XE at £170, the C128 is sufficiently better to hold a price higher than that — but not too much higher. On the other hand, the price difference between the Commodore 64 and the C128 will have to be substantial, otherwise you'd be a fool to buy a Commodore 64 with the C128 offering so much more. This indicates a price cut on the Commodore 64, perhaps to around £150, with the C128 coming in at the £225 level.

Although the C128 is compatible with the full range of Commodore 64 peripherals, including the 1541 disk drive at £220 and the 1701 colour monitor at about the same price, Commodore is promising a new range featuring the high-resolution RGB monitor which will be essential for 80-column and CP/M applications, and a faster drive. No pricing has been announced on these products, but expect to pay the same or slightly more than for the current range.

## Conclusion

Commodore at last appears to have listened to its critics. When Commodore 64 owners decried its abysmal Basic, Commodore responded with the C16 and Plus/4 — better Basic certainly, but at the expense of much of the hardware that made the Commodore 64 such a great machine.

In the C128, Commodore has solved the old problem of maintaining compatibility while offering a great deal that's new, and the Basic is better than many could have hoped.

The pity now is one of timing. If Commodore had got this machine to market before last Christmas, instead of the Plus/4, it would almost certainly have wiped the floor with its major competitors. The market's a tougher place now. Although I would strongly argue that the C128 is better than any 'home' machine available as I write this, it's open to question how it will fare against the likes of Atari's forthcoming ST series.

The C128's main strength is compatibility with the enormous range of Commodore 64 software — and that's a range that includes some of the best packages available for any machine, covering everything from games to serious business applications. Upgrading those applications to take advantage of the extra memory should not be difficult, and that, coupled with CP/M, could win it a lot of friends among small-scale business and professional users, while the combination of the hardware and new Basic make it an excellent programmer's machine.

The C128 is an outstanding product. Provided Commodore does not get pricing outrageously wrong, it deserves to be one of this year's most successful machines. END

## Technical specifications

| | |
|---|---|
| Processor: | 8502 (6502 compatible) plus Z80A |
| ROM: | 64k |
| RAM: | 128k (two banks of 64k) |
| Screen: | 40/80×25 text, 320×200 graphics |
| Keyboard: | 91-key, full travel with numeric keypad, cursor keys, four programmable function keys, eight dedicated function keys |
| I/O: | Serial I/O, user port, cartridge port, cassette, composite and RGB monitor, two joystick ports |
| DOS: | Commodore Basic 7 and CP/M 3.0 in ROM |

## In perspective

The C128 shapes up very well against the current competition, specifically the Amstrad machines and the Atari XE. The XE competes with its 128k of memory, but loses in comparison with the C128's implementation of Basic, the keyboard and facilities such as CP/M, the built-in machine code monitor and sprite-definition utility.

The Amstrads have a distinct price advantage, offering colour monitor and tape deck at £340 or 80-column monochrome monitor and disk drive at the same price. Even if Commodore keeps the machine price down to around £200, a comparable C128 system is going to cost around £600 which probably awards the victory to Amstrad, although Commodore 64 compatibility gives the C128 a better chance than it would otherwise have had, and in the small-business market buyers may prefer to deal with a company of Commodore's standing. In the longer term, the new range of Atari ST machines stand an excellent chance of capturing a significant part of the C128's natural market.

However, for many Vic-20 and Commodore 64 owners, the C128 represents the ideal upgrade.



## SCREENTEST

# ISO Pascal

*Adam Denning roots out the advantages of an ISO standard Pascal compiler over other, non-standard packages with the aid of comparison Benchmark results.*

There's a Unix utility called yacc, which stands for 'yet another compiler compiler'. Perhaps there should be one on the QL called yapc—'yet another Pascal compiler' — as there are now three different packages for the machine. However, the one reviewed here differs from the rest mainly by virtue of its ISO (International Standards Organisation) standardisation, which brings it up to the level Pascal programmers have been told they should adopt.

What advantages does an ISO standard Pascal compiler have over its non-standard brethen? The main point is that any program which you write on one machine will compile and work without alteration on another machine, as long as it too has an ISO compiler. A laudable idea, except that in my experience there's not much you can do efficiently in Pascal unless you extend, and therefore break, the standardisation rules.

This package is from Metacomco of Bristol, the company which has already provided QL owners with a macro assembler, a BCPL compiler and a Lisp interpreter. It costs £89.95, which is over twice as much as the competition from Computer One, and £10 less than the p-System plus UCSD Pascal compiler from TDI.

The package comes as two microdrive cartridges, an EPROM cartridge and a hefty manual. The microdrive cartridges contain most of the compiler, a screen editor, the linker and a few 'include' files. The EPROM cartridge contains the rest of the compiler and needs to be plugged in only during compilation. It goes into the socket which used to house the 'dongle' on very old and dodgy QLs, but has the virtue of being rather more attractively packaged than that dongle.

The screen editor is the usual Metacomco product, as supplied with all the company's products and the Sinclair assemblers, and is a version of the BCPL editor used on BBC Micro and Sage Tripos BCLP systems. It supports all the usual screen editing facilities, and also allows the use of command lines to execute complicated exchanges in one easy go. It has the slight disadvantage of allowing its files to be only RAM-based, but that hasn't been a problem to date.

### The Pascal compiler

In common with all Metacomco products, the Pascal compiler is written in BCPL, a high-level systems language that *PCW* reviewed in June. This highlights one of the shortcomings of Pascal — why program in Pascal at all when it simply cannot do the things BCPL (and C) can do?

*'Pascal is undeniably an extremely popular language, and this ISO compiler is probably a dream come true for those who remain exponents of the language. I'd prefer a nice C . . .'*

A further advantage of having the compiler written in BCPL is that the end result of each compilation is simply a BCPL binary module, which means that it can be linked with sections of programs written in BCPL and 68000 assembler. If you thought that some sections of code would be better expressed in Pascal than in BCPL or assembler, you could write that bit in Pascal and link it with the rest of the program written in BCPL: the best of both worlds with very little effort. The end result is unlikely to compile on the average ISO Pascal compiler, however!

To reverse the saying, every silver lining has a cloud, and the one here is that the Pascal compiler is huge. Leaving out the EPROM, there are four program sections (three overlays); the largest of these is over 42k. This leads to a couple of related problems. As the compiler is overlaid, each overlay has to be loaded into RAM during compilation. This is fine if you have floppy disks or a lot of RAM (more slave blocks, you see), but the standard QL with microdrives is almost as slow at compiling a program as the IBM PC is with Digital Research's MT+ compiler.

Nevertheless the compiler is one-pass, which means that it generates its binary file with only one read of the source file. The result is a surprisingly small BCPL module, comprised of native 68000 machine code and some linkage details. This is processed by the linker, Paslink, which combines it with any other subject files you choose to include and then transfers the executable code to a named file. The linkage process naturally links in the run-time system at the same time, but this is one of the bad parts. In common with the BCPL compiler there is no selective library linkage, so the entire run-time system and library is always linked into each file. This isn't significant if the program is fairly large, but it does mean that each Benchmark program is approximately 22k long!

A further side-effect of the compiler's size is the workspace used during compilation. Without expansion RAM it uses most of the screen to store its working tables, resulting in a pretty selection of green, red and white squiggly lines all over the screen. It initially gives the impression that the system has crashed, but when you get used to it the idea doesn't seem that odd.

When the compiler is invoked you are given the option of producing listing and code files, which may be given any

valid file name, and then you're asked if you want to omit the range-checking code. The answer to this would normally be 'no' (the default) until a program has been fully developed and debugged. The range-checking code slows down the speed of the resultant code quite considerably.

You are then asked whether you want to include extensions to the ISO standard. If you reply 'no' and your program contains non-standard routines, calls, and so on, a compile-time error results.

Finally, you are asked for the size of the workspace the compiler can use. The default is 20k which is enough for the average compilation, but for any more you really need a RAM extension.

Compilation then proceeds at a fairly respectable rate, and details of the amount of workspace used are printed. At the end of each compilation, you are asked whether you want to compile any more files. This saves repeated loading of the compiler, which is very handy if you're stuck with microdrives.

## Documentation

The manual provided has the mandatory 'How to use it' section, along with a brief description of how to install the compiler to use floppy disks rather than microdrives. Following this is a complete reference section detailing the syntax of the language, with numerous examples. There are also explanations of each predefined identifier (built-in procedures, functions and variables) and a list of compile-time and run-time error messages. This is followed by details of the available extensions to ISO along with QL-specific material dealing with windows, multi-tasking, and so on. There is even a special function called QTRAP which allows you to access any of the QDOS internal trap-invoked routines from within Pascal.

## Comparisons

Given that there are three different Pascal compilers available for the QL, which compiler do you buy? If price is your sole consideration, there's no question — Computer One's. At £39.95 it's a bargain, although it isn't ISO approved and only compiles to an interpretive p-Code (for more details, see February's review).

The TDI p-System compiler and operating system costs £99.95 and comes complete with an assembler, but I was unable to examine this at the time of writing as it wasn't quite finished. The compiler on this system obviously conforms to the UCSD standard rather than ISO, so some aspects of it are going to be different from those on ISO products.

The main advantage of this ISO package is that it compiles to native 68000 machine code, which means that programs written in it will generally execute far faster than those produced on the other two systems. The speed advantage is not stunningly noticeable until you remove the range-checking code, when ISO Pascal roars ahead of the rest. It suffers slightly in its handling of reals (floating-point numbers), even though (or possibly because) it uses the internal floating-point routines built into QDOS.

If you look at the *PCW* Benchmark results in Fig 1, you will see that the averages at the bottom of each column confuse the issue. Only Acornsoft ISO Pascal (reviewed last December) is consistently awful, but even the £500 MT+ 86 compiler from Digital Research shames itself when running the real arithmetic Benchmarks. Both QL Pascals follow a fairly uniform execution rate, but QL ISO Pascal wins in the end. If the Benchmarks are run without range-checking code, the figures diverge more, with QL ISO Pascal being much faster than Computer One's except for reals. For more details on the Benchmark programs, see the December 1984 issue.

The Spectrum compiler looks good in any comparison, with only the MT+ and unchecked QL ISO Pascal beating it in the integral tests. Considering the £25 price tag on Spectrum Pascal and £500 for MT+, not to mention the difference in machine prices, you may wonder why people buy PCs in the first place!

## Conclusion

QL ISO Pascal is a very good package, and even at £89.95 proves to be excellent value for money. Perhaps Borland could be convinced that it would be worth doing a Turbo Pascal for the QL in addition to the implementations reviewed in April, but I can't see it being that much cheaper.

The problems with Metacomco QL Pascal are not insurmountable. The first step should be a selective linkage editor, following the Sinclair standard format. Then a way to avoid the necessity of an EPROM should be found, as this must considerably increase the price. At the same time, it shouldn't be impossible to cut down the size of the compiler. All this would mean yet another trip through the ISO evaluation suite, which is gigantic and often well over the top, but the step must be worth thinking about.

Pascal is undeniably an extremely popular language, and this ISO compiler is probably a dream come true for those who remain exponents of the language. I'd prefer a nice C with structures, floats, and so on, or a BCPL compiler.

Metacomco is one of the few companies with enough confidence in Sinclair to continue taking the QL seriously, and with the impending release of the Lattice C compiler through the company, Sinclair should get its marketing together and sell the QL to the right sector. It is not much more than adequate as a business PC-style machine, but it's damn good as a development system for Atari STs.

By the time you read this it will be one year since the real launch of the QL, and for a machine that's only sold 60,000 at £400, it has a good deal more development software than most. If you bought a C compiler (I'm talking real C here, not one of those toy Cs with none of the language's useful features), a BCPL compiler, an assembler and an ISO Pascal compiler for the PC, you would need to spend in the region of £1200, while £290 will get you the lot on the QL. That range of software alone (remember the 'ISO' tag on the Pascal compiler) makes the QL an ideal machine for further education. END

| | QL ISO | QL Comp. 1 | DR MT+ | Acorn ISO | Hisoft ZX |
|---|---|---|---|---|---|
| Magnifier | 0.70 | 1.00 | 0.10 | 2.38 | 0.85 |
| Forloop | 12.21 | 11.00 | 3.0 | 31.27 | 7.10 |
| Whileloop | 13.20 | 45.10 | 3.0 | 126.50 | 8.90 |
| Repeatloop | 10.92 | 40.10 | 2.80 | 127.07 | 7.80 |
| Literalass | 13.49 | 22.00 | 3.80 | 52.60 | 7.50 |
| Mem access | 13.50 | 20.70 | 4.00 | 53.00 | 7.80 |
| Real arith | 52.30 | 43.80 | 391.70 | 60.80 | 20.70 |
| Real algeb | 49.10 | 37.90 | 317.60 | 58.25 | 21.40 |
| Vector | 21.32 | 77.50 | 9.30 | 202.50 | 17.00 |
| Equalif | 16.53 | 42.50 | 5.20 | 107.00 | 10.60 |
| Noparams | 9.20 | 15.30 | 1.99 | 31.10 | 6.50 |
| Unequalif | 15.78 | 40.50 | 5.20 | 106.00 | 10.60 |
| Value | 10.51 | 18.70 | 2.50 | 36.10 | 7.20 |
| Reference | 9.91 | 17.50 | 2.70 | 35.20 | 7.20 |
| Maths* | 10.50 | 10.20 | 328.30 | 35.07 | 9.30 |
| Average | 17.28 | 29.59 | 72.03 | 70.99 | 10.03 |

All compilations were done with no special compiler options (for example, removal of range-checking code)
Benchmark 15, maths, has been run with an iteration count of 1000 rather than 10,000 as it is by far the slowest test
Digital Research's MT+ 86 compiler was run on a Zenith Z-150 PC, which is an IBM PC compatible

*Fig 1 Pascal compiler Benchmark results*

# Epson QX-16

*Epson has entered the 16-bit league with the QX-16, a sturdy if standard machine which boasts IBM compatibility and a friendly user interface. But are these features enough to ensure Epson's success in this PC-dominated market? Peter Bright has the answer.*



Epson made its name in microcomputing as purveyor of printers to the masses, then made its break in producing micros with the 8-bit QX-10. This was widely regarded as one of the nicest CP/M-80 machines around. However, it was overpriced, and was launched at a time when 16-bit machines were establishing their supremacy.

Now Epson has launched its own 16-bit machine which boasts IBM compatibility, an 8088 processor and Epson's unique Taxi friendly user interface.

## Hardware

Physically the Epson QX-16 is very similar to the older QX-10 8-bit machine. The main unit is 20 ins wide by 13 ins deep by 4 ins high. While the unit is quite broad this gives it a pleasing low-line appearance which reduces its visual impact on your desk. The casings are constructed from high-quality plastic with rounded edges on most of the surfaces to further enhance the lines of the unit.

The overall colouring is also standard Epson — predominantly cream with touches of grey on the disk drives, monitor and some of the keys.

The front panel houses the twin half-height 5¼in disk drives, the DIN keyboard socket, the reset switch and a little red power-on LED. The power switch lives at the right-hand side of the back panel.

On the rear panel from left to right we have: power-in, monitor-out, eight system DIP switches, speaker volume control, a Centronics printer port and an RS232 serial port. There are also four covers which may be for expansion cards — we'll find out later.

It isn't immediately obvious how to get inside the QX-16, but it is, in fact, a two-stage affair. Most people want to get inside their machine to fit a new expansion card. To make this as easy as possible, the QX-16 has a special hatch which you can remove to gain access to the expansion slots. When you have removed this cover, you also gain access to two of the four screws which hold the main cover in place. The other two are below the lever-off caps on the top of the main casing.

When you have removed the four screws, you have to undo an earth strap before you can lift off the top casing and disk drives as one unit.

*'Overall, the construction quality of the casings and the PCBs is very high. The casings feel solid, and the PCBs look well made . . .'*

Despite the size of the system box, the internal electronics are tightly packed. The disk drives live in the top casing while the bottom casing houses the digital electronics and the power supply. The main PCB runs along most of the width of the system box, stopping just short of the power supply circuitry. Two extra heavily-shielded PCBs piggyback onto the main board; one of these handles the display via two very small, densely-packed, surface-soldered custom chips.

The main PCB also acts as a motherboard for up to three plug-in expansion cards. Strangely, the casing has space for four cards but the PCB has only three slots. On the review machine two of these slots were in use, leaving just one available for future use. If you need the extra space, one of the cards is only used by the Z80 processor so can be removed when you are running 16-bit software.

The QX-16 comes with two processors: an 8-bit Zilog Z80 and a 16-bit Intel 8088. In addition to running modern 16-bit software, it can also run general-purpose CP/M-80 software and programs written for Epson's 8-bit QX-10.

The base model QX-16 comes with 256k of RAM which is internally expandable to 512k. It also has 24k of ROM.

Overall, the construction quality of the casings and the PCBs is very high. The casings feel solid, and the PCBs look well made with no signs of last-minute patches. Although everything inside the system box had obviously been well screened for RF emissions, some noise was still audible on my radio.

The review machine was supplied with twin half-height 5¼in floppy disk drives which can work in two modes — either 360k IBM compatible or 720k native mode. 10Mbyte hard disk versions of the machine will be available in due course.

The review system was supplied with a green-on-black monochrome monitor which plugs into the back of the main unit via a short cable and a couple of DIN plugs. In monochrome mode, the QX-16 displays 80 characters by 25 lines and 640 × 200 pixels in IBM mode, or 640 × 400 pixels in native mode. This is put to very good use by the Taxi software. Also, like Epson's older 8-bit machine, the QX-16's graphics are 'soft' and can be specially programmed.

Colour is achieved by plugging a colour monitor into the same port on the back of the system box. The Epson's

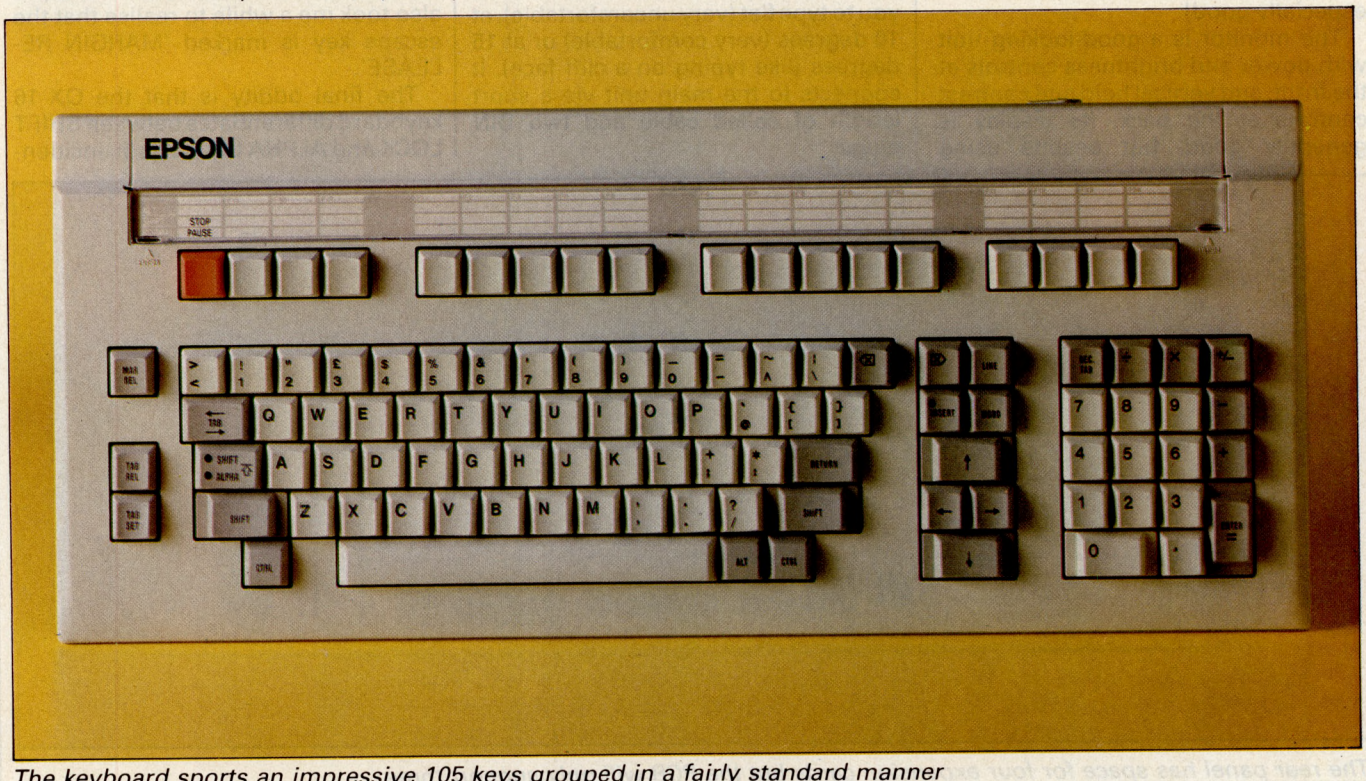


*The keyboard sports an impressive 105 keys grouped in a fairly standard manner*

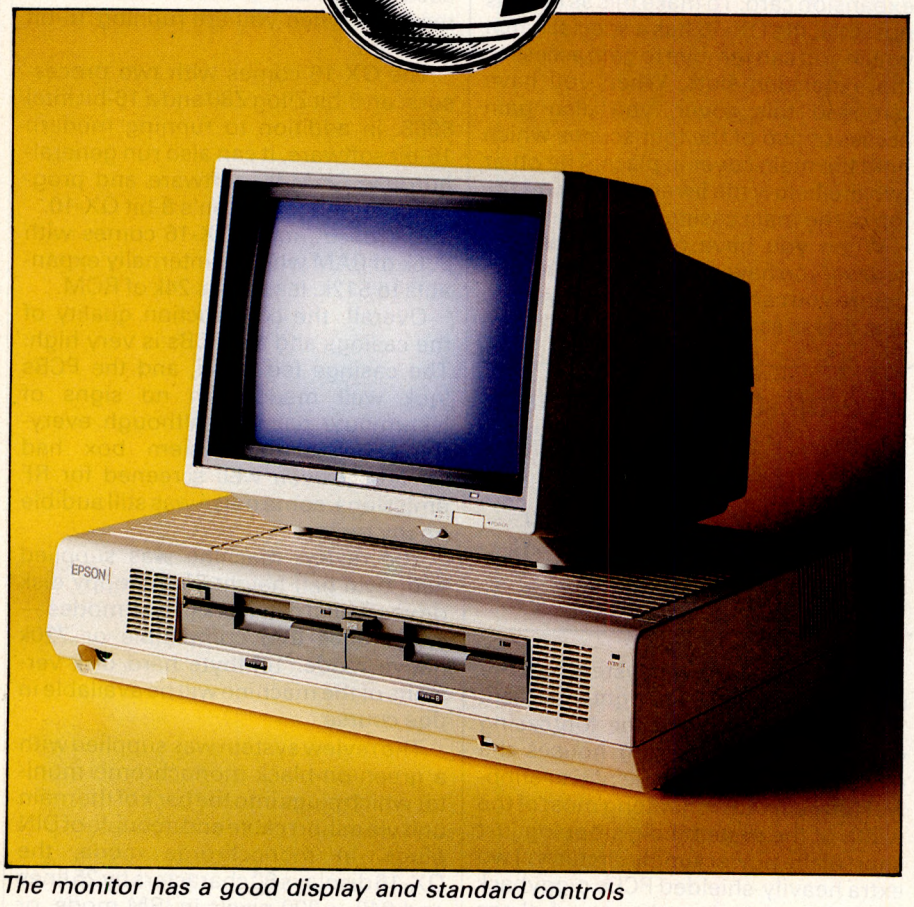


*The monitor has a good display and standard controls*

colour graphics specifications are exactly the same as those on the IBM PC.

As it stands, the system character set on the QX-16 is the best I have seen on any micro. Each character is extremely well formed and easy to read without becoming bloated like the characters on the IBM PC. The letter 'G' is especially good!

The monitor is a good-looking unit with power and brightness controls at the front, and vertical hold and contrast controls at the back. Its display is generally good, but despite using long-persistance phosphor onscreen, there was still some evidence of flicker on displays where most of the pixels are switched on.

The keyboard is decidedly non-IBM compatible. It is a very slim unit, but it covers a large area. It has two adjustable feet on its underside which allow you to type flat (very uncomfortable), at 10 degrees (very comfortable) or at 15 degrees (like typing on a cliff face). It connects to the main unit via a short length of coiled cable and two DIN plugs.

Even if the processing power of the QX-16 doesn't win you over, Epson is certainly going for a win in the keyboard stakes with an impressive tally of 105 keys. These include a big red button marked 'STOP' in the top left-hand corner. The last time I saw one of these was on the system console of an IBM System 370 mainframe at college — a friend pushed it just to see what would happen . . .

Luckily the effects of pushing the QX-16's STOP button range from midly boring to nothing at all.

The rest of the keys are grouped in a fairly standard manner, although the individual postioning is rather idiosyncratic. Most of the space is occupied by the main qwerty typing area; to its left are three keys which set and release tabulations and margins. The margin key doubles as the ESCape key.

To the right of the qwerty typing area are the editing keys with the usual cursor keys, plus INSERT, DELETE FORWARD, LINE and WORD keys. To the right of this is the numeric keypad which features all the usual arithmetic operators.

Running along the top are 17 programmable function keys and the STOP key.

All the keys auto-repeat very fast, resulting in a supersonic DELETE key which happily outran my reactions and ate hundreds of words I wanted to keep.

As mentioned, although the general layout of the keyboard is fairly standard, the individual placement of keys is sometimes rather odd. The main culprit is the ALT key which hides down by the space bar next to the CTRL key. It also took me a while to realise that the escape key is marked 'MARGIN RELEASE'.

The final oddity is that the QX-16 keyboard differentiates between SHIFT LOCK and ALPHA LOCK. Both, inciden-

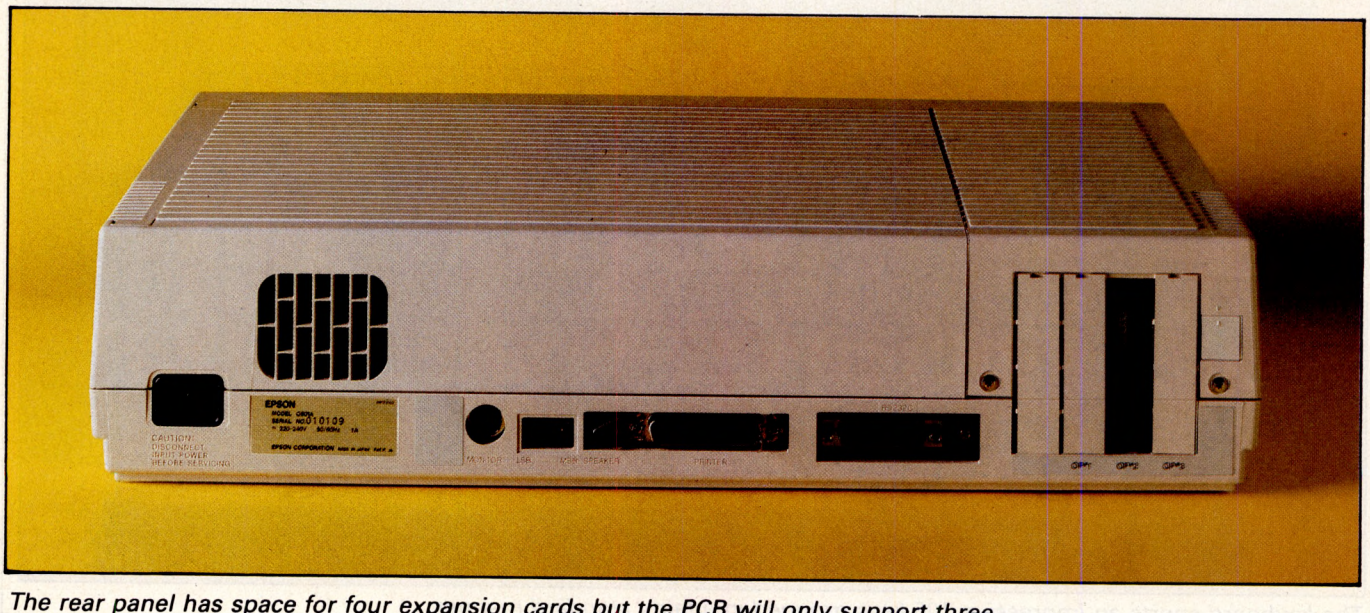


*The rear panel has space for four expansion cards but the PCB will only support three*

# EPSON QX16



## YOU CAN GET ONE AT A SUPER PRICE

**01-337 4541** *from* **01-337 4541**

## CONCORDIA COMPUTERS

**6 CENTRAL ROAD, WORCESTER PARK SURREY KT4 8HZ**

# SYSTEM SCIENCE

### C Compilers

| | | |
|---|---|---|
| **DeSmet C** | PC/MS-DOS | **£135.00** |
| **Lattice C** | PC/MS-DOS | **£450.00** |
| **C86 & optimiser** | PC/MS-DOS | **£365.00** |
| **Microsoft C** ver 3.0 | PC/MS-DOS | **£475.00** |
| **Aztec C86** | PC/MS-DOS | **£225.00** |
| **C80** requires LINK | PC/MS-DOS | **£50.00** |
| **Aztec C ][** | App-DOS | **£175.00** |
| **Aztec C II** | CP/M-80 | **£175.00** |
| **C/80** Software Toolworks | CP/M-80 | **£50.00** |
| **C/80** Mathpak — floats and longs | CP/M-80 | **£30.00** |
| **BDS C** | CP/M-80 | **£125.00** |
| **ECO-C** for Z80 Code | CP/M-80 | **£185.00** |
| **VENIX-86** full Unix for IBM PC-XT and PC-AT | | from **£850.00** |

### LISP Interpreters

| | | |
|---|---|---|
| **LISP-80** Software Toolworks | CP/M-80 & MS/PC-DOS | **£45.00** |
| **MuLISP/MuSTAR** | CP/M & MS/PC-DOS | from **£175.00** |
| **MuMATH** | CP/M & PC/MS-DOS | from **£215.00** |
| **IQ LISP** | PC-DOS | **£160.00** |

### FORTH-83 from Laboratory Microsystems

| | |
|---|---|
| **Z80 Forth, PC-FORTH, 8086-FORTH** | **£89.00** |
| **Floating point extensions** | **£89.00** |

### Editors

| | |
|---|---|
| **SEE Editor** for IBM-PC and Apricot | **£50.00** |
| **EC** Editor (windows and DOS calls) PC-DOS | **£125.00** |
| **PMATE IBM-PC** and Apricot | **£225.00** |
| **FirsTime C** (with syntax checker) | **£295.00** |
| **FirsTime Pascal** (with syntax checker) | **£245.00** |
| **Final Word** for IBM-PC, Apricot and CP/M-80 | **£295.00** |
| **Tools — many C tools available** | |
| **dBase to C conversion package** | **£995.00** |
| **Crosstalk XVI communications** | **£165.00** |
| **Pascal Compilers incl Turbo 3.0** | **£ call** |
| **Fortran Compilers** | **£ call** |
| **Assemblers and cross-assemblers** | **£ call** |

**HSC 16 bit Co-Processors for Z80 CP/M systems**
— choice of 8086 or 68000 — 6MHz clock
— MS-DOS, CP/M-86 and CP/M-68K — 256Kb to 1.25Mb memory
— use as RAM DISK under CP/M — fit most Z80 systems
— simple to install, simple to use. Prices from **£625.00**

Prices are exclusive of VAT and postage.

**6-7 West Smithfield, London EC1A 9JX Tel: 01-248 0962**

# SANYO Micro users association



## Important News for SANYO micro owners

**EXTENDED OFFER.**
**FREE GETTING STARTED PACK, VALUED AT £49.99. LIMITED NUMBER ONLY**

★ The SMUA has been formed to support YOU and your computer

★ Our services include unlimited telephone support for the software supplied with your Sanyo micro

★ For further details dial 100 and ask for FREEPHONE SMUA

# DRIVE A TAXI FREE

## (INC. TIPS)

**IBS HAVE IN STOCK A NUMBER OF EPSON QX-16s FOR YOU TO TEST DRIVE— ABSOLUTELY FREE.**

**ALSO IN STOCK**
**WE HAVE THE WHOLE RANGE OF EPSON PRINTERS AND COMPUTERS FOR IMMEDIATE DELIVERY. PAYMENT IS POSSIBLE BY ALL THE MAJOR CREDIT CARDS.**

**CONTACT US FOR FREE TAXI RIDES AND GREAT DEALS ON PRINTERS.**

**WE'LL GET YOU TO WHERE YOU WANT TO BE.**



**IBS**

**Immediate Business Systems plc**
3 Clarendon Drive, Wymbush, Milton Keynes
Buckinghamshire. MK8 8DA England

tally, are on the same key, which may be confusing. If you select ALPHA LOCK, you get what I usually refer to as 'shift lock': that is, you get capital letters but the numbers on the top row remain the same.

To select SHIFT LOCK you simultaneously press one of the SHIFT keys and the ALPHA LOCK key. This gives you capital letters, but instead of giving you numbers on the top row, you get '!', '&', and so on.

This is probably what all you typists out there prefer, but I prefer the normal computer version.

The feel of the QX-16 keys is quite soft but still positive. This isn't to my taste; I prefer the IBM PC or Apple MacIntosh feel, but I know many people will appreciate this keyboard.

*'Like the other friendly systems, Taxi makes heavy use of windows, ikons, mice and pull-down menus . . . Epson hasn't gone quite as far as GEM . . .'*

## System software

When you first switch on the QX-16, it displays the not-particularly-friendly message: 'IPL Version 3.0A Testing RAM'. It then sits around for a while pretending to be doing something useful before it asks you if you would like to put a disk into the drive. When you do this it says: 'Power on self test in process' and tries to amuse you by flashing the keyboard LEDs. Eventually it boots the operating system.

The QX-16 cleverly decides which processor to use. If you put a CP/M-80 boot disk in the drive, it automatically uses the Z80; if you use an MS-DOS 2.11 disk, it uses the 8088.

Assuming that most people buy a 16-bit machine to run 16-bit software, I'll concentrate on MS-DOS and its applications. In the case of the QX-16 this means MS-DOS version 2.11 with some special help from a utility called Taxi.

1985 is very much the year of the friendly user interface. No longer is the Apple Macintosh the lone voice in the dark of the mass market. Now the big software guns appear to have cottoned on to the fact that there may be more to life than the A> prompt. The first on the market was Digital Research with its GEM user-friendly user interface. This sits on top of the operating system and gives a graphical user interface which is reminiscent of the Macintosh. GEM has the potential to run on a wide range of machines, and currently can be found on the Atari 520ST, ACT Apricot and IBM PC.

Next is Microsoft with its oh-so-long awaited Windows package. This isn't quite as friendly as GEM, but it does give the operating system lots of bolt-on goodies in the way of multi-tasking.

Instead of licencing GEM or Windows, Epson developed its own user-friendly user interface package, Taxi.

When Taxi is first booted, you are greeted with — you've guessed it — a black London cab. This doesn't stay on the screen for long.

Like the other 'friendly' systems, Taxi makes heavy use of windows, ikons, mice and pull-down (or in this case pop-up) menus. However, Epson hasn't gone quite as far as GEM in terms of user interface.

In the case of Taxi, there are a maximum of two windows on the screen at one time. Both windows are fixed in terms of size and position onscreen, primarily because it takes a lot of calculation to track and resize multiple windows so the speed overhead can be quite high. Also, for much the same reason, it isn't possible to drag ikons around the screen as you can with GEM or the Mac. This makes copying files less intuitive, but it does make the system fast.

The first things you see on the screen (when the picture of the taxi has gone) are two disk ikons running down the left-hand side of the screen. It must be said that the quality of the ikon drawings is very high, certainly much better than, say, GEM on the IBM PC. A nice touch is that the disk ikons show the actual names of the disks rather than just the drive letters A or B.

To open an ikon, you use the mouse to move the pointer to the desired disk and hit one of the mouse buttons; this opens a window which shows ikons representing the files and directories on the disk.

Sub-directories are represented by a picture of a filing cabinet, general executable files by a piece of paper tape. All Taxi system files are stored in a sub-directory called 'Garage', represented by a picture of a garage. When asked why, I was told that taxis live in garages . . .

To run an applications program you first double-click its ikon; this writes the name of the program to a command line at the top of the screen. You can then add any necessary parameters to the command line. You then use the mouse to move the pointer to the command line and click the mouse again, and the program will be run. This can be rather long-winded, but it does give you the flexibility of being able to add parameters.

Whenever an error occurs, a dialog box is displayed in the middle of the screen telling you what has gone wrong and what to do about it.

*'The QX-16 is a pleasant, fairly IBM-compatible machine which is being marketed as part of a competitive package. The friendly user interface is useful.'*

As well as having ikons and windows, Taxi also provides a pop-up menu which runs along the bottom of the screen. This has five headings: Disk, File, Window, Help and Accessories.

Disk has two options — 'Change' and 'Rename'. Change tells Taxi that you want to change the disk in one of the drives, but it isn't strictly necessary to use this because Taxi will re-read the name eventually. Rename allows you to change the name of a disk.

File contains the options 'View', 'Print', 'Make', 'Copy', 'Rename', 'Remove' and 'Run'. View lets you see the contents of a text file on the screen; Print lets you print it; and Make lets you create a new sub-directory. Copy will copy a file from one window to another, so you need to have the right windows open before you can use it. Rename renames a file; Remove deletes a file; and Run is the same as double-clicking an ikon.

Window contains the following options: 'Where' displays the MS-DOS pathname of the current window; 'Tidy Up' rearranges the ikons in a window; 'Switch' transposes the active and inactive windows; 'Open' opens a file; 'Close' closes the active window; 'Desktop' closes all the sub-directories in the current window and then closes the window; and 'Close All' closes both windows.

Help has two options: 'Describe' prints a predefined text about a prog-

### Benchmarks

| | |
|---|---|
| BM1 | 1.4 |
| BM2 | 4.7 |
| BM3 | 10.1 |
| BM4 | 10.4 |
| BM5 | 11.4 |
| BM6 | 20.1 |
| BM7 | 31.3 |
| BM8 | 33.1 |
| Average | 15.37 |

***All timings in seconds. For a full listing of the Benchmark programs, see page 185, January issue.***

ram file, and 'Get Info' displays statistics about the disk or file selected.

Accessories is probably the most useful of the pop-up menus. It contains utilities for installing printers and useful accessories such as a calculator, clock calendar and note pad. These are all selected using the mouse, and are displayed onscreen over whatever else might be there. The Accessories heading also includes an Othello game so you can while away the hours.

Taxi differs from GEM in that GEM stops as soon as you call an applications program. It doesn't matter how friendly GEM is, if you run WordStar you are stuck with the WordStar commands.

Taxi is different in that it goes some way in allowing you to modify standard applications programs. This is possible because part of Taxi is co-resident, it stays in memory when you load the applications program. This allows Taxi to exercise some control over the applications program while it is running.

You can usually modify the appearance of a program in two ways. Firstly, you can use the mouse to move the cursor; and secondly, you can install your own pop-up menu on the 25th line of the display.

If you want to alter a standard package in this way, you have to install it into Taxi by creating an .INF file for the program. This describes the ikon to be used for the program as well as the system details needed to control it. I had hoped to be able to play around with installing applications programs, but unfortunately the manual refers users to their dealer and I couldn't find a utility that would let me edit an .INF file.

## Applications software

Luckily, Epson supplied three packages for which it had written the necessary .INF files. These were Enable — an integrated program, GW-Basic and good old WordStar.

WordStar is a good test of this kind of thing as it is notorious for not liking simulated keyboard input — it usually can't keep up. Epson overcame this problem by using the new revised and presumably faster WordStar 3.4.

WordStar usually displays its own function key assignments on the 25th line of the display which, of course, is where Taxi wants to display its pop-up menu. To get around this, the middle button on the mouse is used to select the Taxi pop-up menu which, in turn, has an option to return to WordStar's own status line display.

Mouse control of the cursor works well. WordStar's usual habit of not keeping pace is signalled by exclamation marks all over the screen. There was certainly no sign of this, even with the most vigorous mouse movement.

Having said that, I don't think the mouse was any great improvement over the cursor control in this case. The problem is that packages which weren't specifically designed for use with a mouse can't handle the quick diagonal movements you often want to make. A bottom-left to top-right movement ends up as up-a-line, right-a-bit, up-a-line, right-a-bit-more, and so on, which can be exasperating.

The pop-up menus were more successful and could make life easier for a first-time user, although being used to WordStar I didn't use them very much.

As far as IBM compatibility is concerned, the QX-16 willingly booted PC-DOS out of the box and ran Lotus 1-2-3 quite happily.

## Documentation

The documentation supplied with the system was very pre-production — it consisted entirely of photocopies of the drafts of the manuals. These were quite helpful, but it would not be fair to discuss them in detail as they will change when they are printed.

## Prices

Unlike most other machines, the Epson QX-16 is being sold as part of a package rather than just as a piece of hardware. Three packages are available. The first is the 'Business System' which sells for £2750. This includes the QX-16 with 256k of RAM, twin disks, a monochrome monitor, an RX100 printer, Taxi and the Enable integrated business system.

The 'Word Processing System' replaces Enable with a customised version of WordStar and substitutes a DX100 daisywheel printer. It cost £2650.

The Graphics System comes with the Logistics graphics package as the applications software and an HS80 colour plotter instead of a printer. This costs £2550.

## Conclusion

The Epson QX-16 is a nice machine; not wonderful, just nice. The hardware is well built if unspectacular in terms of its performance.

The QX-16's main claim to fame is its Taxi friendly software, which again is useful rather than wonderful. As far as its user interface is concerned, it is closer to Microsoft's Windows than to Digital Research's GEM. Like Windows it doesn't go in for processor-intensive graphics, but unlike Windows it doesn't have multi-tasking.

The QX-16 is a pleasant, fairly IBM-compatible machine which is being marketed as part of a competitive package. The friendly user interface is useful. The fact that it is non-standard need not be a problem because no standard has yet emerged. END

## Technical specifications

| | |
|---|---|
| Processor: | Zilog Z80, Intel 8088 running at 5.3MHz |
| RAM: | 256k expandable to 512k onboard |
| ROM: | 24k |
| Mass storage: | Twin 360/720k 5¼in floppy disks |
| Keyboard: | 105 keys typewriter style |
| Size: | 20ins × 13ins × 4ins |
| I/O: | RS232, Centronics, three expansion ports |
| DOS: | CP/M-80, MS-DOS version 2.11 plus Taxi |

## In perspective

In terms of hardware, there is nothing unusual about the Epson QX-16. It is a fairly standard IBM-compatible machine. But in terms of packaging, the machine is quite different.

The most notable feature is the way Epson is selling the machine as part of a package that is designed to run out-of-the-box. Usually it would be up to the dealer to fill out the details of printer, software, and so on. This makes sense from Epson's point of view because it means the company shifts more printers and software, and it creates a nice, integrated image.

But it may not be so good from the dealer's point of view: he might have preferred to discount the machine and sell a high-margin printer and software. It all depends on the deal Epson is offering its dealers.

Another interesting point is Epson's decision to go it alone with the Taxi user interface rather than licence GEM from Digital Research or Windows from Microsoft. I'm not sure if this is a good idea from a marketing point of view.

At present the decision doesn't lock Epson out of any IBM software, but if software houses write for the GEM or Windows environments in the future, it could be a problem. I can't see major software houses rewriting their software for the Taxi environment for what, after all, is just an IBM-compatible machine.



# The new DATA GENERAL/One. The only IBM®-PC compatible computer you can use up a tall tree.

You can use the new DATA GENERAL/One portable wherever you happen to find yourself.

Apart from operating on mains electricity, it runs for up to 8 hours on rechargeable batteries. And the DATA GENERAL/One only weighs around 10lb. However don't run away with the idea that its performance is lightweight too.

This briefcase size portable offers industry-standard performance that includes access to a tremendous range of IBM® PC. software that includes Wordstar,® Lotus 1-2-3™ and dBase II.®

It has a full-size 25-line high definition screen. A 512KB memory. Almost 1.5MB of integral disk storage. And the ability to communicate with mainframes.

True, there are other portables around claiming that you can carry them wherever you like.

The fact that the DATA GENERAL/One is the only IBM® PC compatible portable of its kind that you can also use wherever you like rather brings them down to earth.




For full details and the name of your nearest Dealer post this coupon to: Dealer Operations, DATA GENERAL Limited, 7 Kenrick Place, London W1H 3FF. Or telephone Pat Cunningham on 01-935 9461.

Name

Company & Address

Phone

PCW T

Data General. a Generation ahead.

IBM is a registered trademark of International Business Machines Corporation. Wordstar is a U.S. registered trademark of Micro Pro Int'l. 1-2-3 and Lotus are trademarks of Lotus Development Corp. © 1983. dBase II is a registered trademark of Ashton-Tate.

# Fast timing

*Tests for measuring the speed and accuracy of standard Basic functions and operations on nine popular machines — presented by Dusko Savic and Ninoslav Cabric*

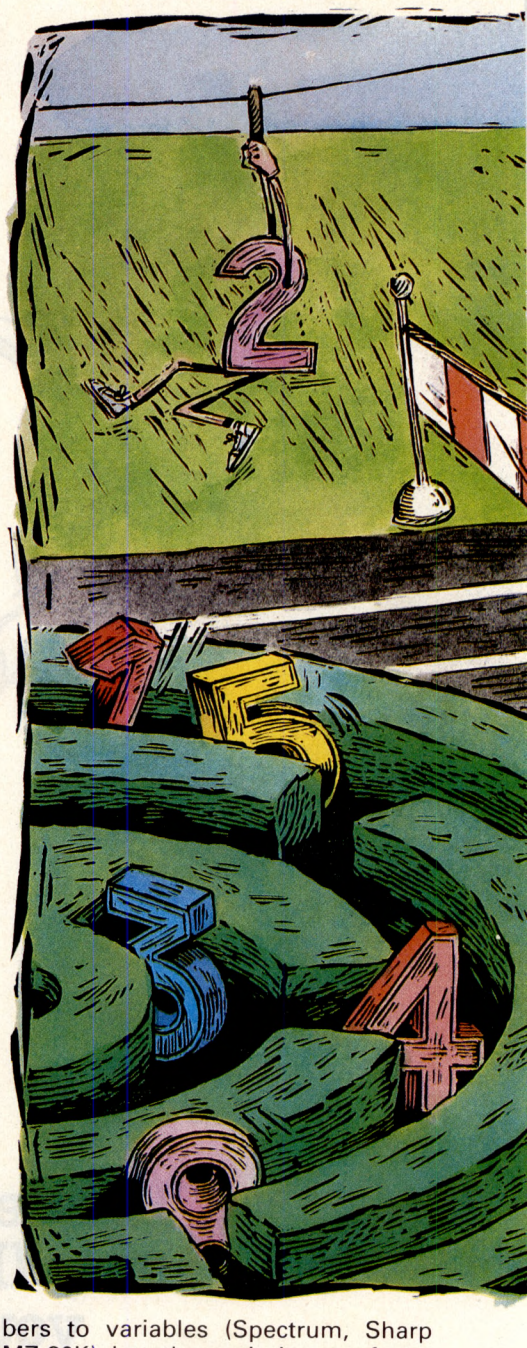

Illustration by Jo Lawrence

Many people think that the word 'computer' is a synonym for speed and accuracy. When compared to human methods of operation it certainly is, but it is also true that computers vary greatly. To form a complete picture of the value of a computer, many elements must be taken into account (available memory, peripherals, existing commercial programs, price, and so on), but here we'll concentrate on the speed of execution and numerical accuracy of usual Basic functions and operations.

We have measured the speed of execution of 37 elementary Basic instructions on nine different computers. Our results show that virtually all versions of Basic have at least one 'blind spot', and there are also many programming bugs. The knowledge we gained from the tests enabled us to fully exploit the Basic/hardware combinations that we regularly use.

Programs written in different dialects of Basic and run on the same computer are executed at different speeds. For example, on the Sharp MZ-80K, the calculation of the square root of 5 in SP-5025 Basic takes 12.2 milliseconds(ms) and in Xtal Basic 3.1 it takes 43.4ms, although the latter works with one significant digit less than the SP-5025 Basic.

## Measuring speed

For the purpose of our tests, we used a program called Speed Test (Fig 1), which can be easily rewritten in any Basic dialect. The FOR . . . NEXT loop was measured first; then, instead of the REM statement in line 40, operations from Fig 2 were inserted in the program. From the measured time we subtracted the timing of the FOR . . . NEXT loop, which gave us the net time for certain operations. Timing is measured from the first BEEP signal (line 20) to the second BEEP signal (line 60); these BEEPs are convenient if the time is measured with a stopwatch.

Alternatively, if the Basic supports a real-time clock, that can be used: the BEEPs are replaced by the corresponding clock initialisation and reading. This concept is very different from other speed-testing methods, and gives the possiblity of analysing every command individually. There were five basic groups of statements; for every group, an average timing is also given (Fig 2).

The results show that the computer's clock does not crucially influence the final speed of execution, although with the same CPU (Z80A) the Spectravideo and Spectrum are much slower than the Sharp MZ-700. The Apple II, which has an older CPU and a slower clock, the BBC Model B and the Commodore 64 (which only has a 1MHz clock) are also faster than the Spectrum. The speed of the Olivetti M20, and especially the PDP 11/34, should be considered separately. They have 16-bit processors, and both their prices and program support cannot be compared with other (home) computers that were tested.

Further analysis of the results in Fig 2 shows a great dispersion inside these five groups of statements. Some computers are faster when assigning numbers to variables (Spectrum, Sharp MZ-80K) but the majority are faster when assigning constants. A similar trend applies to arrays and matrices.

```
10  DIM X(20),Y(20),A(20,20),
    B(20,20)
20  K=5:(15)=7:B(5,10)=3:BEEP
30  FOR I=1 TO 1000 :REM can be
                     greater than
                     1000 for fast
                     computers
40  REM Here you insert one of the
        operations from Fig 2
50  NEXT I
60  BEEP:END
200 RETURN
```

*Fig 1 The Speed Test program*

The fastest arithmetic operation on all the tested machines is addition and the slowest is division (except for the PDP 11/34); therefore, it is better to multiply with 0.5 than to divide by 2. Any great difference in the speed of multiplication and division indicates bugs and weaknesses in a computer's architecture, or in the system support.

## Mathematical functions

To write a program for computing elementary mathematical functions, a programmer must have, apart from an excellent knowledge of programming, a thorough knowledge of numerical mathematics, something which doesn't appear to be a strong point of the system programmers who designed these nine Basics. There is no other explanation for the catastrophically slow algorithms for calculating a square root on the Spectravideo and

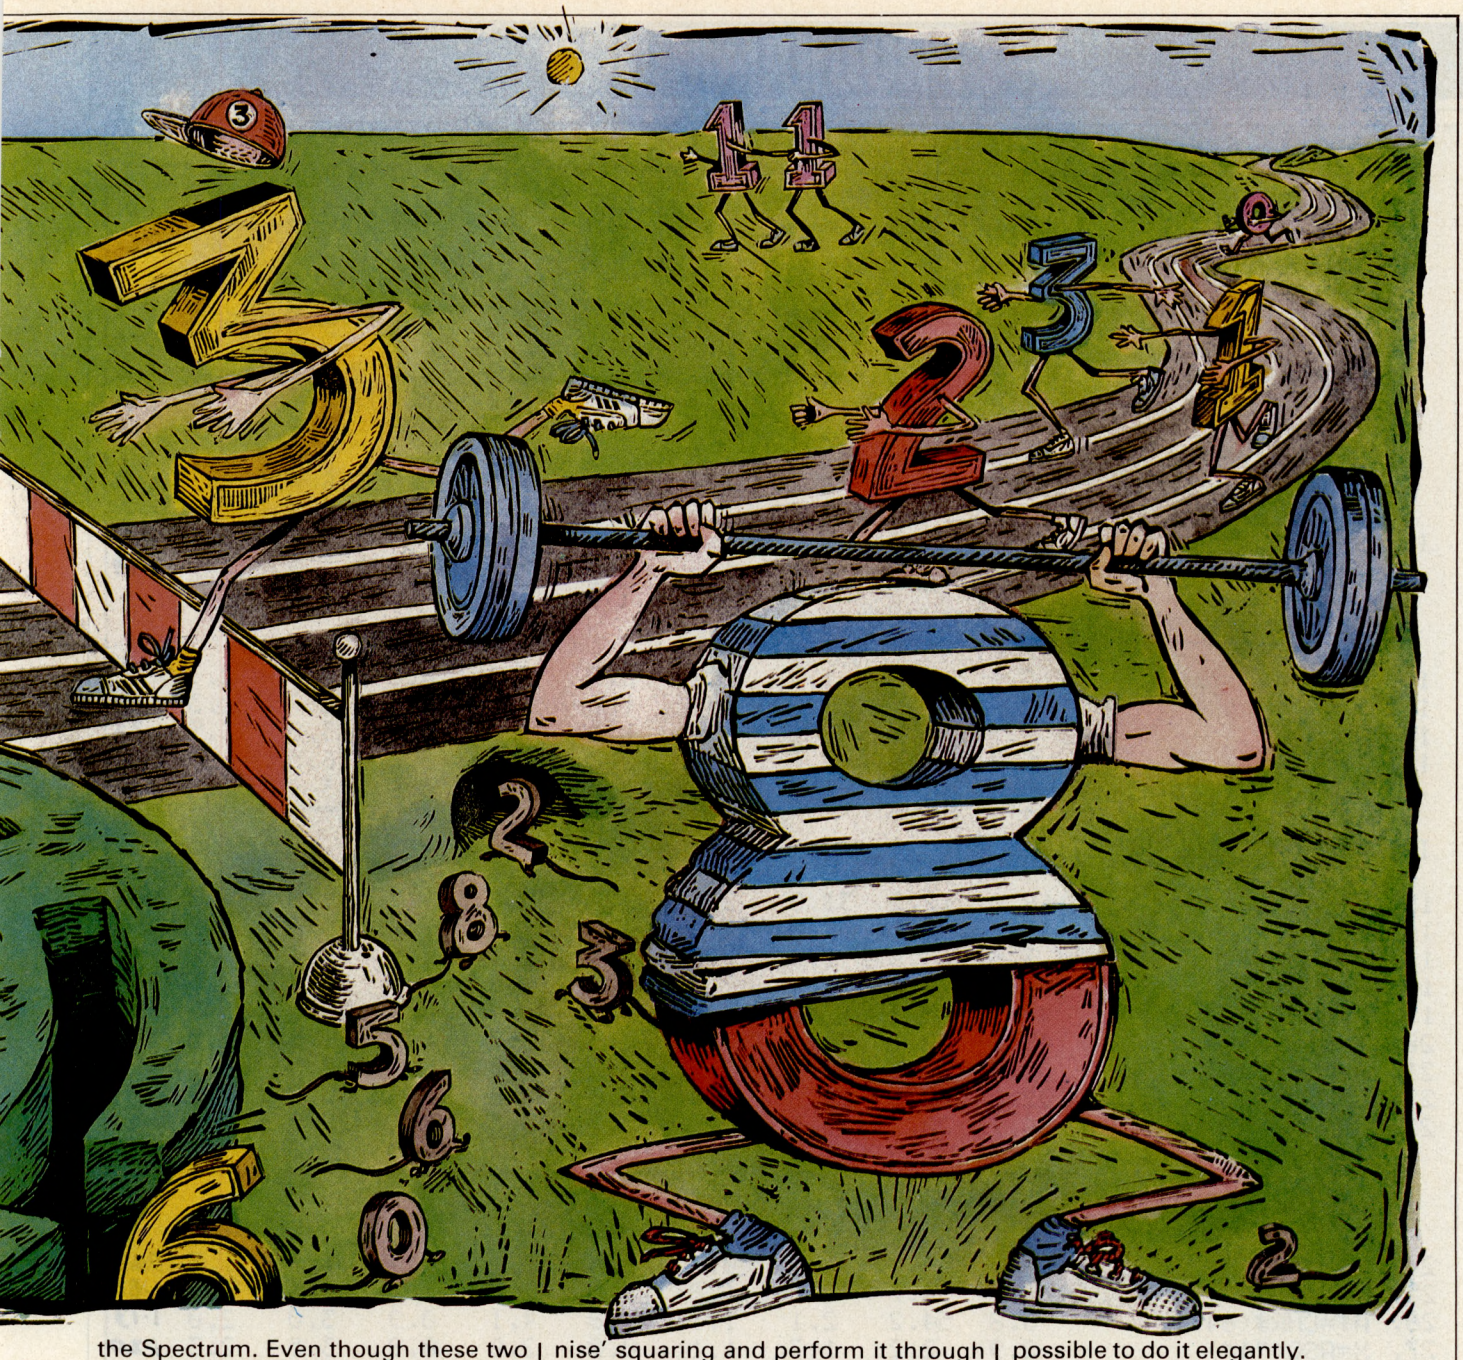

the Spectrum. Even though these two machines work with the greatest number of significant digits, this cannot be used as an excuse. In Hu-Basic, which is an alternative language for the Sharp MZ-80K and works with 16 digits, the square root is taken in a mere 29ms — compare this with the Spectrum's 118ms or the Spectravideo's incredible 164ms! (With regard to Sharp, it is surprising that the new S-Basic on the MZ-700 does not use that excellent algorithm from the older MZ-80K.)

A usual programmer's dilemma is whether to save memory space or to gain in speed, but it seems that the majority of the tested computers' programmers have decided to save space. Let's take a very common operation as an example — squaring a number. There are two ways to do it: by ordinary multiplication, or by means of logarithms. The former is faster but is not general, which means that the other must reside in memory at the same time. Of the models tested here, only the BBC B and the Spectravideo 'recognise' squaring and perform it through multiplication; the others square a number as if it were an exponent.

The Speed Test program reveals that the BBC B is a very professionally designed machine, but there is a bug in the algorithm for computing SIN(X). Normally, computers have a detailed program for computing one trigonometric function, while other functions are calculated by means of the resulting formula. If you know the value of COS(X), then you can easily find SIN(X) using the formula SIN(X)=COS(90−X): that is, one subtraction, one assignment and a call of COS(X). This is just a little slower than the computation of COS(X).

As one mistake leads to another, the computation time of TAN(X) also becomes unnecessarily slow as it is always found by means of division — SIN(X)/COS(X). This can also be used as an example of when the advantages of Basic in ROM become disadvantages; the average programmer might be able to remedy the situation, but it isn't possible to do it elegantly.

Of all the tested computers, only the Sharp machines load Basic from cassette and place it into RAM. Each loading thus wastes two-three minutes, but the Basic can be changed and a new version saved for later use. The use of disks is an ideal solution to similar problems as disk Basics easily lend themselves to internal changes.

As far as string operations are concerned, most computers work at approximately the same speed as for numbers. The only exception is the Sharp MZ-80K, which takes 51.8ms for a simple string assignment such as A$="A". The speed of string operations is, of course, important when writing games in Basic.

In all other commands the tested computers achieve enviable speeds, but the differences present, although initially appearing small, cannot be regarded as unimportant. All these commands are frequently used, and even a slight deficiency is multiplied many times in a program. Top marks

| Micros (see key below). | (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) | (10) |
|---|---|---|---|---|---|---|---|---|---|---|
| 1. FOR...NEXT | 5.8 | 1.4 | 1.7 | 1.0 | 0.7 | 1.9 | 1.1 | 2.5 | 2.5 | 1.3 |
| ASSIGNMENT | | | | | | | | | | |
| 2. X=5 | 2.3 | 2.7 | 1.0 | 0.7 | 0.7 | 1.5 | 0.3 | 2.0 | 1.9 | 0.7 |
| 3. X=K | 3.0 | 1.1 | 1.7 | 0.6 | 0.6 | 1.3 | 0.2 | 2.0 | 1.3 | 0.6 |
| 4. X=Y(15) | 4.6 | 4.9 | 2.8 | 1.2 | 1.1 | 3.9 | 0.7 | 3.2 | 2.1 | 1.2 |
| 5. X(7)=K | 5.1 | 4.8 | 2.5 | 1.1 | 0.9 | 3.9 | 0.7 | 2.5 | 1.8 | 1.15 |
| 6. X(7)=5 | 3.5 | 6.0 | 2.1 | 1.2 | 1.0 | 4.2 | 0.9 | 2.6 | 2.2 | 1.25 |
| 7. X(7)=Y(15) | 6.0 | 8.6 | 3.9 | 1.7 | 1.3 | 6.5 | 1.4 | 3.7 | 2.4 | 1.7 |
| 8. A(1,12)=B(5,10) | 9.4 | 13.7 | 6.1 | 2.7 | 2.6 | 14.1 | 3.0 | 6.9 | 4.7 | 2.86 |
| 9. A(1,12)=K | 6.0 | 7.2 | 3.7 | 1.6 | 1.6 | 7.3 | 1.6 | 4.3 | 2.7 | 1.7 |
| 10. A(1,12)=5 | 5.4 | 8.6 | 3.2 | 1.7 | 1.7 | 8.3 | 1.8 | 4.3 | 3.1 | 1.8 |
| average..... | 5.0 | 6.4 | 3.0 | 1.4 | ~~1.4~~ 1.3 | 5.7 | 1.2 | 3.5 | 2.5 | 1.44 |
| II ELEMENTARY MATHEMATICAL OPERATIONS | | | | | | | | | | |
| 11. X=5+6 | 3.1 | 5.3 | 1.7 | 1.1 | 0.9 | 3.2 | 0.8 | 2.5 | 2.3 | 1.13 |
| 12. X=5-4 | 3.3 | 5.5 | 1.8 | 1.1 | 1.0 | 3.6 | 0.8 | 2.7 | 2.3 | 1.14 |
| 13. X=5*4 | 3.5 | 5.9 | 2.0 | 1.1 | 1.1 | 4.0 | 0.9 | 3.8 | 2.5 | 1.23 |
| 14. X=5/4 | 5.4 | 6.6 | 2.6 | 1.5 | 2.6 | 4.9 | 0.7 | 6.5 | 6.7 | 2.55 |
| average..... | 3.8 | 5.8 | 2.0 | 1.2 | 1.4 | 3.9 | 0.8 | 3.9 | 3.4 | 1.51 |
| III MATHEMATICAL FUNCTIONS | | | | | | | | | | |
| 15. X=SQR(5) | 118.0 | 12.2 | 32.8 | 2.0 | 10.2 | 55.1 | 1.7 | 49.0 | 164.0 | 25.78 |
| 16. X=5↑2 | 113.3 | 45.7 | 32.0 | 1.8 | 4.0 | 53.7 | 1.4 | 49.0 | 2.7 | 2.78 |
| 17. X=ABS(5) | 3.3 | 3.3 | 1.6 | 1.0 | 0.9 | 2.5 | 0.5 | 2.7 | 2.2 | 1.01 |
| 18. X=LOGe(5) | 69.4 | 24.6 | 17.7 | 2.9 | 17.6 | 24.3 | 0.9 | 24.5 | 128.5 | 13.15 |
| 19. X=EXP(5) | 44.1 | 22.4 | 17.1 | 1.0 | 12.4 | 27.4 | 0.9 | 23.9 | 105.5 | 13.78 |
| 20. X=SIN(5) | 49.2 | 22.2 | 20.1 | 2.6 | 30.3 | 30.0 | 1.0 | 21.5 | 89.5 | 14.99 |
| 21. X=COS(5) | 50.2 | 21.6 | 19.5 | 2.7 | 19.2 | 28.9 | 0.9 | 22.5 | 94.5 | 14.74 |
| 22. X=TAN(5) | 92.2 | 42.8 | 39.7 | 4.5 | 45.0 | 53.6 | 2.6 | 45.5 | 197.5 | 30.46 |
| 23. X=ATN(.5) | 66.2 | 20.2 | 19.5 | 2.7 | 22.7 | 43.5 | 1.5 | 27.5 | 119.5 | 10.27 |
| average..... | 67.3 | 23.9 | 22.2 | 2.4 | 18.0 | 35.4 | 1.3 | 29.6 | 100.4 | 15.89 |
| IV STRING OPERATIONS | | | | | | | | | | |
| 24. A$="A" | 3.6 | 51.8 | 1.2 | 0.7 | 0.5 | 1.1 | 0.4 | 1.9 | 1.5 | 0.67 |
| 25. X=VAL("1") | 7.8 | 4.7 | 2.7 | 1.8 | 1.0 | 2.0 | 1.2 | 4.5 | 2.7 | 1.81 |
| 26. A$=CHR$(64) | 5.8 | 54.2 | 2.1 | 1.1 | 0.8 | 4.1 | 0.9 | 3.0 | 2.0 | 1.13 |
| 27. X=ASC("1") | 2.9 | 2.2 | 1.7 | 1.1 | 0.8 | 2.0 | 0.9 | 3.5 | 2.3 | 1.20 |
| 28. A$=STR$(1) | 13.6 | 59.2 | 5.2 | 1.5 | 6.6 | 11.1 | 2.2 | 4.7 | 3.9 | 1.48 |
| 29. A$=INKEY$ | 3.6 | 3.5 | 1.6 | 0.8 | 1.2 | 1.4 | 0.6 | 2.4 | 1.2 | 0.88 |
| average..... | 6.2 | 29.3 | 2.4 | 1.2 | 1.8 | 3.6 | 1.0 | 3.3 | 2.3 | 1.20 |
| V MISCELLANEOUS | | | | | | | | | | |
| 30. CLS(not in average) | 64.2 | 32.3 | 67.1 | 31.4 | 4.2 | 43.3 | ? | 17.0 | 18.5 | 126.91 |
| 31. GOSUB200 | 2.4 | 3.0 | 0.6 | 0.6 | 0.4 | 1.4 | 0.1 | 1.2 | 0.7 | 0.38 |
| 32. GOTO 50 | 1.4 | 1.7 | 0.2 | 0.2 | 0.2 | 0.6 | 0.1 | 0.7 | 0.5 | 0.02 |
| 33. IF K=14 THEN X=1 | 3.0 | 3.0 | 1.7 | 1.4 | 1.0 | 3.7 | 0.7 | 3.3 | 2.8 | 1.37 |
| 34. PLOT 3,4 | 2.4 | 5.8 | 1.9 | 2.5 | 1.0 | 6.5 | ? | 2.0 | 2.0 | 1.17 |
| 35. X=RND | 15.6 | 4.7 | 2.3 | 0.7 | 1.5 | 6.3 | 0.5 | 4.5 | 2.1 | 1.67 |
| 36. X=PEEK(32000) | 3.3 | 1.9 | 1.8 | ? | 1.2 | 6.9 | ? | 2.7 | 2.5 | 0.95 |
| 37. POKE 32000,0 | 3.0 | 3.6 | 1.9 | ? | 1.0 | 6.5 | ? | 2.0 | ? | 0.47 |
| average..... | 4.4 | 3.4 | 1.5 | 1.1 | 0.9 | 4.6 | 0.4 | 2.3 | 1.5 | 0.86 |
| Processor | Z80A | Z80 | Z80A | Z8001 | 6502 | 6510 | ? | Z80A | Z80A | |
| Clock (MHz) | 3.6 | 2 | 3.6 | 4 ? | 1 | 1 | ? | 2 | 3.6 | |
| Average timing | 20.5 | 13.8 | 7.5 | 1.1 | 5.7 | 12.5 | 1.0 | 10.0 | 27.6 | |

Key to micros: (1) Spectrum 48k, (2) Sharp MZ-80K, (3) Sharp MZ-700, (4) Olivetti M20, (5) BBC B, (6) Commodore 64, (7) PDP 11/34, (8) Apple II, (9) Spectravideo SV328. (10) AMSTRAD CPC 664

*Fig 2 Operations for speed measurement (all timings in milliseconds)*

here to the BBC B, which is, in the last group of statements (Fig 2), even faster than the more expensive Olivetti.

There aren't many people who would continually erase the screen in each program, but nevertheless it cannot be said that the Basic authors put a lot of effort into this area. The exception is, again, the BBC B. The Spectrum should do it faster: the Spectravideo has the same processor and screen resolution as the Spectrum but erases the screen at three times the speed. (Incidentally, the Olivetti does it only twice as fast.)

Average values are not always the most respectable measure, but there's no harm in comparing them. It would also be interesting to compare values from our tests with 'official' test methodologies, for example Benchmarks. Although Benchmarks are often used, they do not help you to get the most from your computer, but they are nonetheless a competent guide to machine performance. Before buying a computer, a new Basic or any other language (say, Pascal), you should try the battery of tests featured here to ensure that your money is well spent.

## Accuracy comparison

There are two reasons why a computer might perform 'incorrect' calculations. Firstly, not every decimal number can be accurately represented; this is particularly evident where 8-bit computers are concerned. Secondly, and more important, is the choice of non-optimal algorithms by firmware writers. Different writers use different algorithms, instead of drawing from others' good experiences. Beginners' solutions are common: they approach the problem with the attitude 'Here's what I can do' instead of 'Here's the best solution'. Let's see how this looks in practice by comparing eight computers (the PDP 11/34 is omitted).

Sixteen expressions were used for testing; variables take values from a predefined interval with a predefined step. The expressions were chosen with the criteria they should all be 0 — or, at least, 0 in normal mathematics. But, using the Accuracy Test program (Fig 3), the result will frequently be different from 0; the value of this declination is shown in Fig 4. The results measured are the biggest absolute errors within the interval, and show the given step.

```
10 DEF FNY(X):REM insert an
                 expression from
                 Fig 4
20 M=0:PI=3.14
30 FOR X = lower limit TO upper
                 limit STEP step
40 Y=ABS(FNY(X))
50 IFY>M THEN M=Y: J=X
60 NEXT X
70 PRINT"Error is ";M;" for X=";J
80 END
```

*Fig 3 The Accuracy Test program*

A manufacturer would proudly show you the data from expressions 4 and 15 (Fig 4): due to the nature of functions ATN and TAN, as well as LN and EXP, the appliance in given order cannot produce any significant error. But you need only change the order of these functions and, immediately, errors start to creep in (see the results for expressions 1, 2, 3 and 16).

The errors that occur with the Apple II (using Microsoft Basic) when calculating large arguments in expressions 2 and 3 are a consequence of the fact that the argument of TAN(X) must be within the interval −90° to +90° (in radians). This Basic cannot produce an angle from this interval so a programmer must do it: it's a slow, tedious operation if done in Basic source code instead of machine language.

The results of expression 8 are very interesting — who would have thought that there are computers (the Spectrum, Olivetti M20 and Spectravideo) which cannot divide exactly with an integer number such as 255? To make the mystery greater, the number 255 has a finite binary representation and there cannot exist a conversion from base 10 to base 2: the error surely originates from the division routine. Sinclair was at least honest — it is well known that the division routine in the Spectrum ROM contains a bug which gives a wrong end result. Perhaps the other two machines suffer for the same reason.

Expression 13, X*X−X↑2, contains another surprise. Is it true that for all integers from 0 to 100, the value of that expression is not 0? The Apple II's error is no less than 0.005. Not even an error of two magnitudes less, as with the Sharp MZ-700 and the Spectrum, can be tolerated.

The right-hand side of expression 14 is known as Heron's Formula. It computes the value of a square root but in an ideal way: in every iteration, it doubles the number of significant figures compared to the previous value. It's a shame that no other systems programmer has used it; the result of such negligence is a slow, error-prone algorithm for computing the square root.

Testing the expressions 9 to 12 lets you select which is most appropriate. The expression of type 12 will run faster, but note that it will not give the most precise values for all tested computers.

## Conclusion

A computer is only as powerful as a programmer makes it. To get the most from your machine, it is essential that you know what it does quickly and accurately (in order to use those features), and, conversely, to be aware of things it cannot do (in order to avoid them). You will soon start to use your computer as a computing tool, which will be a real test of its capabilities.

Know your Basic — it will save you time and cut down on frustration.

We leave the pleasure of further research to you! END

| | Expressions | Interval | Step | (1) | (2) | (3) | (4) | (5) | (6) | (8) | (9) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | TAN(ATN(X)) − X | (0,1) | 0.01 | 1.2E−9 | 1.5E−8 | 2.8E−9 | 1.8E−7 | 1.6E−9 | 4.7E−10 | 1.2E−7 | 2.0E−10 |
| 2 | TAN(ATN(X)) − X | (1,50) | 0.5 | 8.0E−7 | 1.2E−6 | 4.9E−7 | 3.7E−4 | 6.6E−7 | 7.5E−7 | 50 | 1.0E−9 |
| 3 | TAN(ATN(X)) − X | (50,100) | 10 | 3.9E−4 | 4.5E−4 | 1.7E−4 | 1.5 | 2.2E−6 | 2.4E−4 | 999 | 7.8E−8 |
| 4 | ATN(TAN(X)) − X | (−PI/2,PI/2) | 0.01 | 7.0E−10 | 0 | 2.1E−9 | 1.2E−7 | 7.0E−10 | 4.7E−10 | 7.2E−7 | 9.6E−11 |
| 5 | SIN(X)*SIN+COS(X)*COS(X)−1 | (0,100) | 1 | 9.3E−10 | 5.0E−8 | 2.4E−8 | 1.2E−7 | 4.7E−10 | 2.2E−8 | 5.6E−6 | 3.0E−14 |
| 6 | ABS(SIN(X))−SQR(1−COS(X)*COS(X)) | (0,100) | 1 | 2.3E−8 | 4.0E−7 | 3.1E−8 | 8.9E−7 | 1.5E−8 | 2.2E−8 | 7.1E−6 | 1.4E−12 |
| 7 | ABS(COS(X))−SQR(1−SIN(X)*SIN(X)) | (0,100) | 1 | 2.2E−8 | 1.2E−6 | 3.1E−8 | 3.7E−6 | 3.5E−8 | 3.3E−8 | 1.7E−5 | 1.4E−12 |
| 8 | X − X/255*255 | (0,100) | 1 | 3.0E−8 | 0 | 0 | 7.6E−6 | 0 | 0 | 0 | 2.0E−12 |
| 9 | X − (SQR(X)↑2) | (0,100) | 1 | 1.8E−7 | 0 | 7.2E−7 | 7.6E−6 | 6.0E−8 | 2.1E−7 | 6.1E−5 | 4.0E−12 |
| 10 | X − SQR(X↑2) | (0,100) | 1 | 1.8E−7 | 0 | 4.8E−7 | 0 | 0 | 7.3E−8 | 3.1E−5 | 0 |
| 11 | X − SQR(X)*SQR(X) | (0,100) | 1 | 1.2E−7 | 0 | 5.1E−7 | 7.6E−6 | 6.0E−8 | 5.0E−8 | 3.8E−5 | 4.0E−12 |
| 12 | X − SQR(X*X) | (0,100) | 1 | 1.5E−7 | 0 | 5.1E−7 | 0 | 0 | 3.4E−8 | 4.6E−5 | 0 |
| 13 | X*X − X↑2 | (0,100) | 1 | 2.7E−5 | 0 | 4.6E−5 | 0 | 0 | 6.4E−6 | 4.9E−3 | 0 |
| 14 | SQR(X) − 0.5*(SQR(X)+X/SQR(X)) | (1,100) | 1 | 1.1E−8 | 0 | 4.6E−5 | 9.5E−7 | 0 | 3.7E−9 | 2.9E−6 | 0 |
| 15 | X − LN(EXP(X)) | (1,100) | 0.1 | 3.7E−9 | 0 | 3.7E−9 | 6.0E−8 | 3.7E−9 | 4.8E−10 | 2.9E−6 | 5.0E−13 |
| 16 | X − EXP(LN(X)) | (1,100) | 0.1 | 7.4E−9 | 0 | 1.9E−8 | 9.5E−7 | 7.5E−9 | 5.1E−9 | 4.8E−7 | 2.0E−12 |
| | No of digits onscreen | | | 8 | 8 | 8 | 6 | 9 | 9 | 7 | 14 |
| | Maximum number (approximately) | | | 1E+38 | 1E+18 | 1E+38 | 1E+38 | 1E+38 | 1E+38 | 1E+38 | 1E+64 |

Note: a usual mathematical notation is used throughout these tables.
For example, 1.2E−7=0.00000012.

Key to micros: (1) Spectrum 48k, (2) Sharp MZ-80K, (3) Sharp MZ-700, (4) Olivetti M20, (5) BBC B, (6) Commodore 64, (7) PDP 11/34, (8) Apple II, (9) Spectravideo SV328.

*Fig 4 Accuracy tests*

# Go Forth and prosper

*Keith Bowden argues the case in defence of the much-maligned Forth language, and presents a comprehensive Benchmarks update for various Forth systems.*

Forth is a much misunderstood language, and few writers in the popular field have ever put over its true power to the reader, preferring to emphasise its apparently peculiar syntax. But if my experience is anything to go by, this neglect is undeserved.

Initially I discovered Algol 68 and all was happiness. I could define matrices, and I could define my own operators to add them together, multiply them, read them in and print them out. In the statement A=B+C*D, the symbols + and *, and indeed =, would do different things depending on the types of the operands B, C and D. If they were real or integer, then ordinary scalar multiplication and addition would be performed, or, if they were arrays, then the rules of matrix algebra would be followed, or any set of rules the user cared to define for a particular type, for example set theory. But the true beauty of Algol 68 is its 'orthogonality' or context independence, which is the way that any sensible syntax will work in any context, provided it is not ambiguous.

After purchasing a Commodore 64, I started to look for a language which had the aforementioned features, but which would run on my new machine and let me define all the sound and graphics commands that Commodore had omitted from its own Basic. I had previously come across Forth, but had been frightened off by the use of Reverse Polish notation.

As a 'stack-orientated' language, Forth performs the (Basic) operation PRINT B+C in the order in which it is written in the language: that is, B C + . (where . is Forth for PRINT). This says 'put B on the stack, put C on the stack, add the top two things on the stack together and put the answer on the stack, print out the value on the top of the stack'. This has three main consequences: it is fast (most languages convert to Reverse Polish themselves anyway); it makes brackets unnecessary; and it makes the language very difficult to read and write (it takes a lot of practice to overcome this problem). This is not helped by the almost deliberately obscure notation used by Forth (for example, '.' for PRINT).

All Forth syntax is reversed (with the single exception PRINT "string"—."string"). For example, a statement of the form IF 1>0 THEN PRINT 2 ELSE PRINT 3 becomes 1 0 > IF 2 . ELSE 3 . THEN. Note how this can be shortened to 1 0 > IF 2 ELSE 3 THEN. as 2 just means 'put the integer 2 on the stack'. This is typical of the economy of expression available within an orthogonal language.

I could not, however, see the point of a language in which the user has to do work which the computer could well do itself. I spent a considerable amount of time working on a 'front-end processor' to convert ordinary notation into Reverse Polish as a program is typed into the Forth interpreter. The reason why this type of front end is not more popular is that it actually decreases the power of the language. Infix (ordinary) notation only allows two operands and one result for each operator (consider A=B+C). Even procedure-based languages such as Pascal only allow one result (consider A=MAX(A,B,C)). Stack-orientated languages allow as many operands and results of one operation as the user desires, as they are pushed onto the stack ready for such time as they are needed. Indeed, use of variables is rare in good Forth programs.

What is good about Forth? It is orthogonal; all grammar is independent of context; and it is extensible — you may define your own operators and your own syntax. If you don't like the control statements provided in the

## Forth Benchmarks update

| **Package** | **Artic Forth** | **48/80 Forth** | **Z-80 Forth** | | **Wycove Forth** | **Premier FIG Forth** | **80 Series Forth** |
|---|---|---|---|---|---|---|---|
| **Compiler** | Artic | East London Robotics | Laboratory Microsystems | | Wycove Systems | Premier Software | HP Users' Group |
| **Machine** | Spectrum | Spectrum | Vector 4 | Pericom 7800 | TI/994A | Superboard II | HP-85 |
| **Processor** | Z80A | Z80A | Z80B | Z80 | 9900 | 6502 | n/a |
| **Clock rate** | 3.5MHz | 3.5MHz | 5.1MHz | n/a | 3MHz | 1MHz | n/a |
| **Benchmark** | | | | | | | |
| Magnifier | 1.7 | 1.4 | 1.1 | 1.0 | 1.18 | 2 | 2 |
| Do loop | 14.3 | 11.3 | 8.6 | 7.8 | 9.28 | 15 | 19 |
| Literal | 20.1 | 15.2 | 12.0 | 10.7 | 14.00 | 24 | 26 |
| Literal store | 29.6 | 22.0 | 17.7 | 15.6 | 23.57 | 40 | 40 |
| Variable | 18.8 | 14.2 | 11.1 | 9.9 | 13.60 | 24 | 24 |
| Variable fetch | 24.4 | 18.0 | 14.4 | 12.7 | 18.58 | 32 | 31 |
| Constant | 20.2 | 14.8 | 11.8 | 10.6 | 13.87 | 24 | 26 |
| Dup | 24.6 | 18.4 | 15.0 | 13.2 | 18.87 | 31 | 32 |
| Increment | 43.1 | 32.7 | 14.8 | 13.1 | 17.72 | 53 | 34 |
| Test > | 49.5 | 39.6 | 20.7 | 18.1 | 43.27 | 63 | 47 |
| Test < | 32.1 | 26.0 | 20.4 | 17.9 | 36.72 | 42 | 47 |
| While loop | 53.0 | 41.5 | 21.1 | 18.1 | 41.70 | 69 | 50 |
| Until loop | 36.8 | 30.5 | 23.4 | 20.1 | 38.15 | 70 | 55 |
| Nest | 14.2 | 10.8 | 8.8 | 7.9 | 9.95 | 14 | 14 |
| Arithmetic | 16.5 | 40.3 | 24.4 | 21.6 | 8.62 | 57 | 47 |
| **Average time** | 26.5 | 22.4 | 15.0 | 13.2 | 20.61 | 37 | 32.9 |

language, you may define your own versions of IF, LOOP, REPEAT, and so on, to your heart's content. This is the whole philosophy of the languge, that rather than writing pages of code for one subroutine, each new bit of code has its own name. You may build up a graphics library with commands such as CIRCLE, LINE and FILL. You can design a language entirely to your own specification — a 'super-language', but entirely in Reverse Polish. As your familiarity and experience with Forth grow, you will build up libraries of Forth words which can be incorporated into later programs. You never have to write the same bit of code twice.

To define your own words in Forth, you must use defining words such as : and VARIABLE. The first word following : must be a new word and the sequence following that, up to a semicolon, is a definition of the new word. For example, : SQR DUP * ; defines a word which will square the number at the top of the stack. (DUP is the Forth word which duplicates the object at the top of the stack.) Similarly, VARIABLE defines a new Forth variable.

New Forth defining words may themselves be defined. Definitions of new defining words come in two parts: one to be carried out at compile (define) time, and one to be carried out at run time. The Forth brackets <BUILDS and DOES> provide this facility. It is not unusual for a Forth program to create new words while it is running, and it may be necessary for a particular action to be taken each time a certain form of word is defined.

SMALL BEAUTIFUL IS (and FAST): the two outstanding features of Forth are its speed and size. It has all the advantages of an interpretive language yet it runs faster than many compiled languages. A complete Forth interpreter, with screen editor, assembler and all the words you need to start programming, will fit into an 8k RAM cartridge leaving plenty of addressing space for your program on the average micro.

| | |
|---|---|
| >BLKS | Transfers video screen to current editing screen; translates from screen code to program code |
| n BLOCK | Transfers screen n from disk to a buffer |
| EMPTY-BUFFERS | Empties buffers without copying to disk |
| LOAD n | Begins interpretation of screen n |
| UPDATE | Marks the most recently referenced block as updated — automatically transferred to disk if its buffer is required |

*Fig 1 FIG Forth standard commands*

Like its cousin Lisp, Forth is a 'threaded interpretive language' (TIL): much of the computer's work is carried out while the program is being typed in (or loaded). Each Forth word is stored in a 'dictionary' as a sequence of other Forth words. A Forth program consists of just one word which is typed in to execute it. At run time, the Forth interpreter looks to see which words are used to define the program word, and then which words are used to define these words, and unwinds — or unthreads — the sequence until it arrives at words which are defined in machine code, which are then executed. These core words, which are supplied with the Forth system, are the kernel of the language. (More strictly, the kernel is the minimal set of words needed to implement the language.)

Interpretive Basic systems tend to be incredibly slow compared to compiled languages, as the computer spends most of its time running the interpreter and hardly any time running the user's program. Threaded interpreters, due to the stack-based nature of the languages they are running, attain speeds of the same order of magnitude as machine language programs — it is possible to implement the kernel of Forth in only 40 bytes!

It is little known that there are two possible implementations for threaded languages, known as 'direct threaded' and 'indirect threaded'. Indirect-threaded Forth dictionaries are stored as a list of pointers to subroutines: for example, the SQR word defined earlier would be compiled, by :, into the dictionary as

DUP
*

where DUP and * are the addresses of the routines in question. This list is then interpreted as a series of subroutine calls by the tiny inner Forth interpreter.

Direct-threaded Forth is stored as a sequence of machine language subroutine calls: for example, SQR would be stored as

JSR DUP
JSR *
RTS

and is thus essentially a compiled program. Direct-threaded systems are often called Forth compilers and run up to 10 times faster than indirect-threaded systems, although they take up more space and in some ways are not as flexible. FIG Forth is indirect threaded (this is the Forth standard defined by the Forth Interest Group).

The FIG Forth editor and assembler are both written in Forth and can be extended in exactly the same way as the rest of the language. All editor and assembler words are part of the Forth language and can be used as such. Naturally, Forth assembler mnemonics must be expressed in Reverse Polish and look something like this — 22 # LDA — rather than LDA #22.

| **Series 80 Forth** | **83 Standard Forth** | **X Forth 2** | **C64 Forth** | **Tiny Forth** | **Romik Forth** | **Forth 64** |
|---|---|---|---|---|---|---|
| HP Users' Group | Added Dimension Software | n/a | Handic | Abacus | Romik | Audiogenic |
| HP-86A | n/a | Torch Unicorn | CBM 64 | CBM 64 | CBM 64 | CBM 64 |
| n/a | 8088 | Z80 | 6510A | 6510A | 6510A | 6510A |
| n/a | 5MHz | 6MHz | 1MHz | 1MHz | 1MHz | 1MHz |
| 2 | 0.34 | 1 | 2 | 2 | 2 | 1 |
| 19 | 3.16 | 5 | 17 | 17 | 17 | 10 |
| 26 | 4.45 | 6 | 25 | 25 | 27 | 14 |
| 40 | 8.16 | 9 | 45 | 55 | 43 | 25 |
| 24 | 5.33 | 6 | 25 | 30 | 26 | 35 |
| 31 | 6.93 | 7 | 35 | 40 | 34 | 30 |
| 25 | 5.34 | 7 | 26 | 28 | 25 | 25 |
| 31 | 5.93 | 7 | 34 | 35 | 33 | 14 |
| 33 | 5.73 | 7 | 56 | 60 | 57 | 15 |
| 47 | 7.88 | 16 | 67 | 85 | 68 | 35 |
| 47 | 7.88 | 10 | 45 | 60 | 46 | 30 |
| 50 | 9.30 | 10 | 75 | 94 | 75 | 28 |
| 55 | 8.63 | 9 | 90 | 109 | 90 | 40 |
| 14 | 3.75 | 4 | 16 | 19 | 16 | 3 |
| 47 | 2.40 | 13 | 65 | 66 | 65 | 30 |
| 32.7 | 5.68 | 7.8 | 42 | 48 | 44 | 24 |

Forth source is stored in 1024-byte blocks, each of which may be displayed and edited on the computer screen. The FIG Forth standard uses a virtual memory or paged system for storing source. Only a small number of blocks, or screens (typically six), are held in RAM at any one time, in 1k buffers; these are automatically paged on and off disk when needed, but this is invisible to the user (although he may hear his disk drive whirring).

Each buffer contains a register which holds information regarding the length of time since that screen was last used. When all the buffers are occupied and a screen is needed that is not currently in RAM, then the least recently used screen is automatically transferred to disk and replaced in memory by the one required. When an edit session is finished, all remaining updated buffers which have not been transferred to disk can be so moved by using the FLUSH command.

Unlike Basic systems, the FIG Forth system only uses a relatively tiny amount of memory for storing source; the rest is reserved for the dictionary. This is a linked list of threaded object code which is produced when compiling words such as : are used. The commands in Fig 1 are FIG standard and handle the virtual memory system.

Forth treats text from the disk and text from the screen in an identical manner. One of the buffers is the editor screen, and can be edited using the rather old-fashioned line editing system. Only on the editor screen can Forth commands be used in direct mode. The Forth editor screen is defined as 16 rows of 64 characters which is fine on an 80-column screen, but causes problems on the Commodore 64. Modern implementations usually provide a full cursor-controlled screen editor.

Each screen can be linked to the next by the —> symbol. On large computers (like the Commodore 64) you can define so many words when writing a package that you lose track of what's going on. Further, it's easy to find yourself trying to define one word to do two different things in two different contexts.

To eliminate these difficulties, a two-level hierarchical word definition structure is used. For example, the command VOCABULARY GRAPHICS causes all words on succeeding pages to be defined into a special area with the name GRAPHICS. When interpreting, the meaning of a word is always first looked up in the 'current vocabulary', so a number of different word libraries can be built up and used whenever the need arises.

## Implementations

I looked at four packages for the machine which sparked my interest — the Commodore 64. The first two are cartridge-based — C64 Forth from Handic at £35, and Forth 64 from Audiogenic at £30.

The Handic implementation was written by Dataprint AB in Stockholm and is based on the old Pet Forth. It is the largest of the four systems and probably the truest to the FIG standard, with a full virtual memory implementation using disks without directories. It is also the only one of the four systems with a resident assembler (although the source of this is available from FIG and is only an hour's work to install on other systems). The manual supplied with the system is nothing more than a list of FIG Forth commands, and to get any implementation details it is necessary to purchase the Pet Forth manual with 322 glossy A4 pages from Handic. This increases the price of the system somewhat and the manual is not even fully compatible, but it is nonetheless very good. For a FIG Forth expert this system is ideal, but a beginner would be absolutely lost with only the manual supplied.

The Audiogenic system is a direct-threaded system, and as such is about twice as fast as any of the other systems. The loose-leaf 82-page manual is reasonably clear, even for a beginner, and includes most of the information you will need to know. Despite the fact that this is the only non-FIG standard system I looked at, it is the only one that sticks to the 16 by 64 screen format. It gets around the problem of only having a 40-column screen by scrolling the text left and right across the page; this is OK once you get used to it, and it does leave a convenient space at the bottom of the page for system information.

The system includes a powerful text compression algorithm for storing the source code; this is essential as all source code is stored in memory at once. There is no virtual memory management scheme. The SSAVE command saves the whole of the source to disk, and the SLOAD command loads and appends. The compiled code grows up from the bottom of memory, and the source code expands down from below the Forth cartridge to meet it. 255 screens are available, although this is probably dependent on the density of the source.

A number of special words for the Commodore 64, including IEEE commands and function key definitions, are included.

The review copy of the third system, Romik Forth, came on cassette so it was difficult to test the virtual memory system to the full. A disk version is also available at the same price, £15. The 'temporary' manual is a tiny 64-page affair that, like the Handic one, contains nothing but a list of FIG Forth commands. The powerful screen editor has pattern-matching and searching.

The last package, Tiny Forth from Abacus in the US, is distributed by Adamsoft in the UK, also for £15 on tape or disk, and is a subset of FIG Forth with simplified paging. The GET and PUT commands must be used to transfer screens manually between disk and buffers. The SYS command which jumps to a machine code routine is a neat addition. The 45-page A5 manual is very clear and includes most of the necessary information, and full instructions are given for producing your own superset of Forth and saving it as a separate system. Tiny Forth is not so tiny! There are more words built into the Abacus implementation than there are in Romik Forth.

In January 1983 (updated in December 1983) *PCW* published Benchmark timings for a number of Forth systems. I carried out the Benchmarks on the four Commodore 64 packages, and confirmed the general trend that the three FIG Forth systems ran at about the same speed (which is hardly surprising as the code is supplied by FIG), and the Audiogenic system runs approximately twice as fast. The results are shown here, along with timings for other systems submitted since the previous articles were published.

## Conclusion

Forth is a difficult language, but in my view it is the most powerful generally available on microprocessors. Of the four systems looked at here, each has its place in the market. If money were no object, it would be worth buying both the Handic and the Audiogenic cartridges. The former is the most powerful system available for the Commodore 64 and is full FIG standard. The latter is much faster and has a number of other advantages, not the least of which is that it should be possible to take the compiled code out of the system and run your program on a machine without the cartridge. The Romik system is a cheaper implementation of the FIG standard, and Tiny Forth is undoubtedly the easiest system for the beginner.

*Thanks to Roger Beaumont, Dr MA Slifkin, Gerard O'Toole, DH Long, Wycove Systems and Added Dimension Software for sending in their Benchmark timings. Any other results are welcome.*

*Dave Middleton (author of Audiogenic Forth) points out that the* PCW *Benchmarks are biased against direct-threaded Forth systems in that all but one of the tests are very low-level routines, thus Dave's package does very well on the dictionary search which is very heavily nested. In real applications, direct-threaded Forth could well be 10 times as fast as indirect-threaded.* END

# The Great British Laboratory Micro System!




## The CED 1401, real time heart of professional laboratory systems

High performance hardware
and
Full laboratory software – including FFTs – is standard
Demonstration programs include Spectrum Analyser, Signal Averager

The 1401 is made in Cambridge, England–and runs just as fast with Apples and IBMs too!

CED Real-time Computers

Tel: Cambridge (0223) 316186

Science Park,
Milton Road,
Cambridge,
CB4 4BH

· PROFESSIONAL · CAD · FOR · PROFESSIONAL · RESULTS ·

# New Robo Bitstik 2 tunes in to the BBC...

## At last a full Computer Aided Drafting System for your BBC Model B Micro.




Introducing Bitstik 2, the first system to bring sophisticated CAD techniques to the desk of the BBC Model B user.

Bitstik 2 is the affordable solution to your technical drafting problems. Designed to take full advantage of your BBC's powerful graphics facility, the system is easy to learn and fast to operate.

Bitstik 2 incorporates a range of impressive functions, clearly displayed on-screen as Menus and Palettes. These are selected via the Bitstik hand controller, which also controls the dynamic 'rubber-banded' drawing cursors.

Among the system's impressive list of capabilities are:

- Auto Dimensioning
- Adjustable Curves
- Precision Grids & Angle Locks
- Powerful Zoom And Pan
- Scale Drawing & Text
- Graphic Library Index

These advanced features represent a significant step forward from the existing and very successful Bitstik Graphics System. Yet Bitstik 1 users can obtain Bitstik 2 at a Special Upgrade Price.

Bitstik 2 is produced in the UK by Robocom, the people behind the best-selling Robosystem family of CAD packages for the Apple II (+ or e) micro. To run Bitstik 2 you will need a BBC Model B with 6502 Secondary Processor, Twin Disk Drives and colour or monochrome monitor. Quality hard copy can be produced from a wide range of supported plotters.

So whether you need to produce complex architectural plans, detailed circuit diagrams or simply teach CAD on a fully implemented CAD set-up (with scope for advanced project work) you ought to be tuning into Bitstik 2 for your BBC...

### Hotline Support

What's more, with Robo, advice doesn't stop when you've purchased a system. A small yearly subscription ensures that lifting your phone puts you in touch with expert help on any drawing or technical problem.

### Test draw a Bitstik

See for yourself how the Bitstik 2 system can make your drafting projects easier. Just try it out, with no obligation to buy. Ask your local Robocad Centre for details of our free Test Draw a Bitstik Offer.

**DIAL 100 AND ASK THE OPERATOR FOR FREEPHONE ROBO. WE'LL PUT YOU DIRECTLY IN TOUCH WITH YOUR LOCAL ROBOCAD CENTRE.**

ROBO SYSTEMS

Robocom, Clifton House, Clifton Terrace, London N4 3TB.
Telephone 01-263 8585/272 8417. Telex 297137 ROBO G

# KODE

Kode Limited

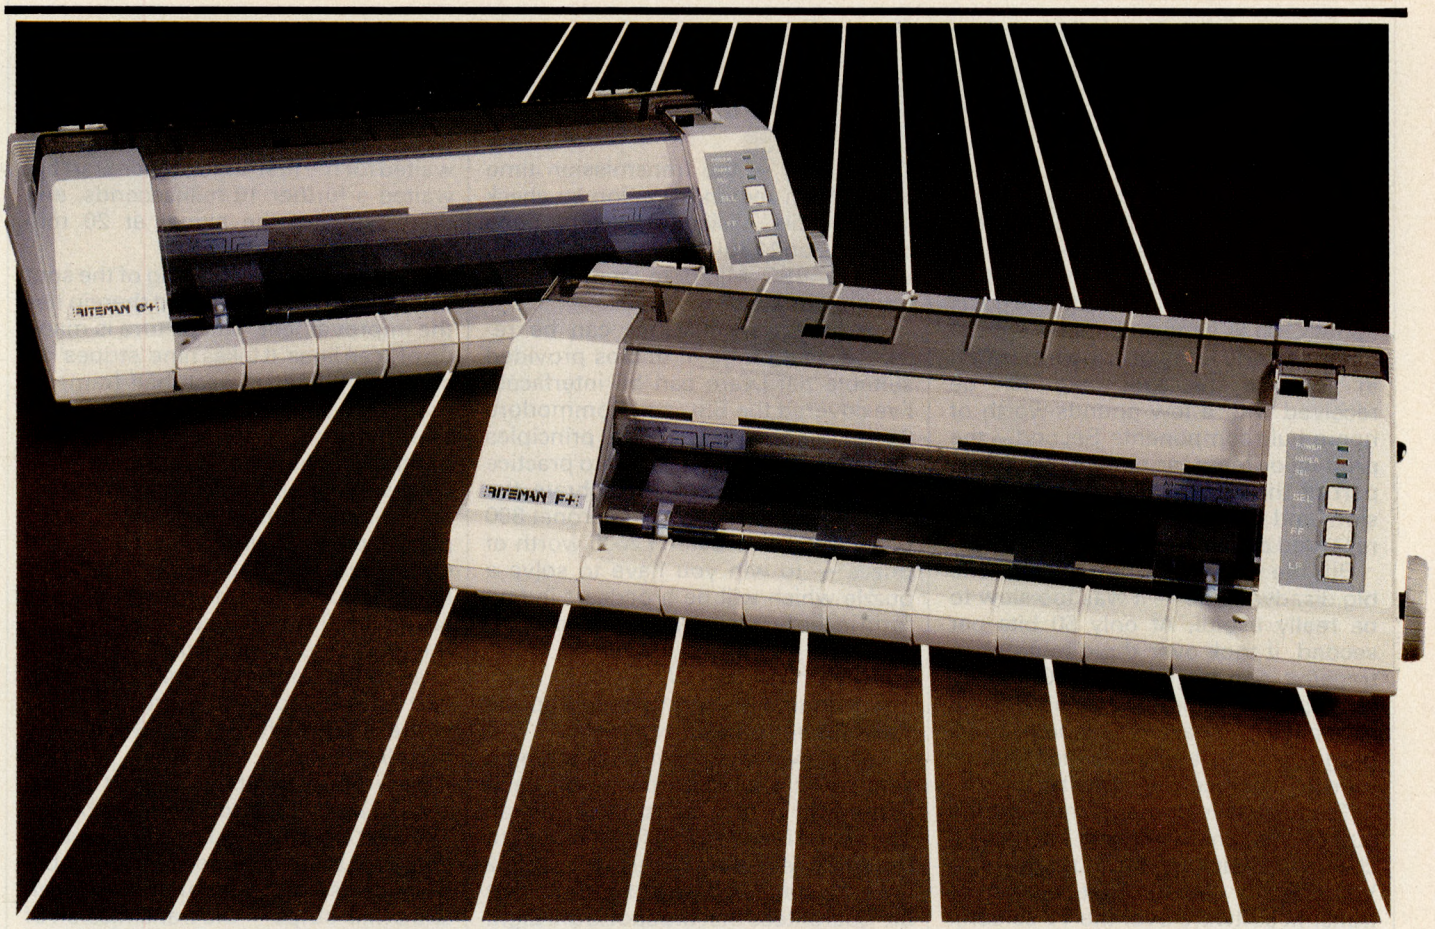


## RITEMAN F+

**The new near-letter-quality dot matrix printer with front-loading convenience.**

- Fully compatible with Epson FX* software
- 105 characters per second
- Unique front-loading design
- Built-in stand
- Single sheets
- Any thickness
- Front-loading operation

## RITEMAN C+

**A front-loading dot matrix printer, plug compatible with Commodore***

- Print all 82 Commodore graphics characters
- 96-character ASCII
- Built-in Commodore interface
- Unique front-loading design
- Paper of any thickness
- Single sheets
- 105-character-per-second print speed

## Specifications for the Riteman F+ and C+.

**Print Method**
Wire dot matrix

**Print Head**
9 pins (user replaceable head)
Print head life expectancy: 50 million characters

**Front-Loading Paper-Feed System**

**Line Spacing**
⅛in, 1/9in, 7/72in, programmable n/72in and n/216in

**Paper Feed**
Tractor feed: Fan-fold paper (4in–9½in)
Friction feed: Roll-paper and cut sheet (4in–10in) post cards

**Buffer Size** (1 line standard)
a. pica – 80 characters
b. compressed – 132
c. expanded – 40

**Paper Thickness Control**
2 sheets (including original)
40 g/m² pressure sensitive paper train

**Ink Ribbon**
Reinking compact black ribbon
Ribbon life expectancy: 1 million characters

**Size**
3⅞in(H) x 11⅜in(D) x 15⅜in(W)

**Weight**
8⅜ lbs.

**Power Supply**
AC 120, 220, 240 volt, 50/60 Hz

**Power Consumption**
30 VA

**Noise Level**
60 dB or less

*Epson FX is a registered trademark of Epson America, Inc.

*Commodore is a registered trademark of Commodore Business Machine, Inc.

KODE
Kode Limited
A member of the Kode International Group

Station Road, Calne, Wiltshire SN11 0JR
Telephone (0249) 813771
Telex 449335

# Television tune-in

*Visicode is a new method of receiving software via your television. John Billingsley explains how you can use your Commodore 64 or BBC Micro to receive the TV transmissions and join in this software revolution.*

In recent experiments shown on Channel 4's *4 Computer Buffs,* software was transmitted in the form of a spot in the corner of the television screen. The TV team tried the experiment for two reasons. Firstly, a teletext adaptor costs about £100 as it must contain a special tuner and a quantity of its own storage; in contrast, the spot data can be received with a few pounds-worth of home-built components. Secondly, the production team can build in the spot as part of the picture tape for transmission, and the spot and its data can be recorded at home on a video.

But the first spot suffered from one big disadvantage — it was too slow to be really useful. At only 50 bits per second, it took over three minutes to transmit one page of text. Only one short program for one machine could be included in each *4 Computer Buffs* programme to allow viewers time to tune in their receiving circuits.

The new developments made by the author and Jim Crowther of Thames TV change all that (and introduce the term Visicode for using light pulses to transmit software over the TV screen). The new receiver circuit is much more reliable, has no knobs to twiddle, and costs much less in components than the previous one. A new technique allows a byte of data to be transmitted on each half-frame, 50 times per second. The data rate is much improved, and a full page of text now takes a mere 20 seconds to send. Extra control bits allow end-of-file markers to be sent so that machine code programs can be broadcast, too.

To get round the construction problems some users had with the first experiment (*PCW* March, 'Light Fantastic') an electronics company, Magenta Electronics, is offering a ready-built receiver unit. Details of the components and circuitry are included in this article for readers with construction experience. Combine the receiver unit with the programs published here and you'll be ready to receive Visicode transmissions.

The first transmissions take place during the *Database* TV show on 4 July, preceded by programmes about Visicode on 20 and 27 June. *Database* is at 10.30pm on Thursday evenings on Thames TV — the transmission time varies from region to region so check local details. Visicode transmissions continue on 11 July, 18 July and 25 July, using a BBC Micro to generate the transmitted pattern.

Visicode transmissions can be received on a range of micros provided suitable hardware can be interfaced. I've covered the BBC and Commodore 64 in this article, but the principles explained here can be put into practice on other machines. To celebrate the first Visicode broadcasts Micronet 800 has agreed to provide £2000 worth of prizes — to win you have to solve a puzzle which will be broadcast in text form in the first four transmissions.

## Speed-up technique

The techniques used to speed up the transmissions are fairly simple.

The previous system uses a single spot, which is either on or off each half-frame of the transmitted signal. The signal is coded in a form similar to the ASCII teletype code used in RS232 links. To start each byte of data, a 'start bit' guarantees that the spot is on. Eight more data bits follow, least-significant bit first, where the spot is on for a 1 or off for a 0. A final 0 'stop bit' ends each byte, so there will be an off-to-on transition at the next start bit. The old circuit included a retriggerable monostable to stretch out the pulses received from the photocell into a waveform resembling a teletype signal. The receiving program waited for the first edge of each start bit, waited a further 10 milliseconds, and then sampled the signal at 20 millisecond intervals.

It is hard to avoid thinking of the spot as a single on-off blob, and therein lies the improvement. The picture is made up of scan lines. It takes nine 'stripes' on successive lines of each half-frame to make up a spot of the size transmitted, therefore the signal received by the photocell consists of not one but nine pulses each half-frame. There are over 60 microseconds between these pulses, plenty of time in which to build up the byte from the train of bits. After the electron beam has passed, there are again 20 milliseconds to wait before the next byte starts. This time can be used to advantage, permitting a large part of the receiving software to be written in Basic for simplicity and easy modification.

Now you can obtain a start bit by always setting the top stripe to be on. The next eight stripes can represent the data, and there is no need for a stopbit. But there is a more important use for an extra final stripe — the transmission of control codes.

If the picture just above the window is rather bright, the photocell could pick up pulses before the blob has started: this would, of course, wreck the data received. I suggest you use two more lines at the top of the blob, forming the pattern 101 before the data bits: now the chances of accidentally picking up

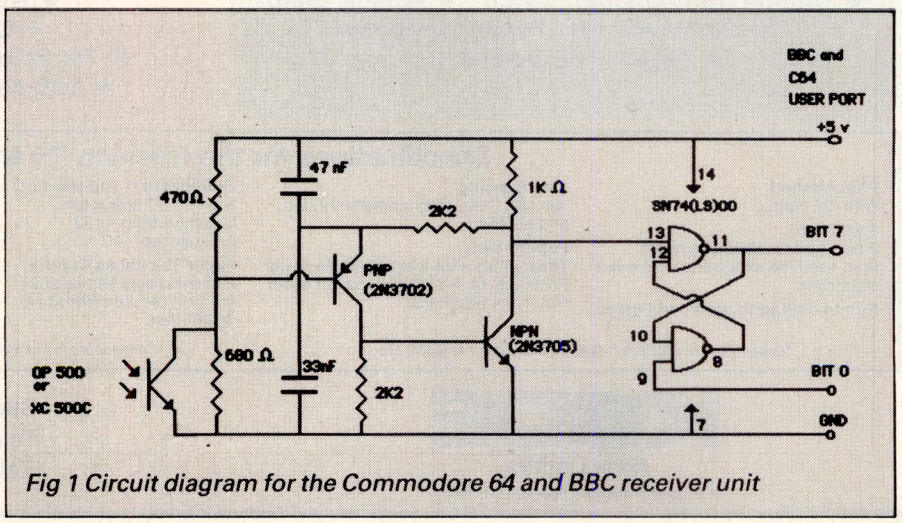


*Fig 1 Circuit diagram for the Commodore 64 and BBC receiver unit*

this pattern are much less. A splodge of bright picture would give 111, and at the second 1 the computer would go back and look again for the start pattern. If the cell catches just the bottom of the surroundings, reading 100, then the program will again loop back to search for the start code. As long as there are at least three blank lines above the blob, the software will be in time to find it correctly.

## Control codes

The old system was restricted to sending Basic or text so that the end of the data could be detected as three successive zero bytes, or whatever, depending on the computer being used. If an end-of-file signal is included any data can be sent — machine code programs, binary data, start addresses and so on. The bytes can be in the same form received from a floppy disk driver routine and anything is possible.

The bottom stripe will indicate that the blob is a control code. A continuous train of codes for tuning will be sent before the start of the data to allow the photocell to be correctly placed and the brightness on the set to be adjusted. When you are satisfied, press the space bar and the program will be ready to load the data. The saving software waits for the first non-control code before beginning. As bytes are received, they are saved until another control code is received to end the data.

With 256 codes available there are a lot of possibilities — but the allocation of codes can quickly mount up. For tuning up, a suitable code is <$> where the brackets imply 'control'. Together with its start code the stripe pattern would be 101001001001 — a hard pattern to miss! It corresponds to hex 124.

As I mentioned, only text will be transmitted in the first series. In the future, sets of software for a variety of machines might be sent in a single procession. How will each machine know which section of the data stream it should load? That's where the codes come in. For example, before Amstrad software there will be a stream of <A>s; at the end of the section there will be some <$>s, the tuning signal. Then might follow a string of <B>s, to wake up the BBC Micros, and again <$>s to end the section. <C> tells the Commodore to load, <S> the Spectrum, <Q> the QL, and other letters for other machines. At then end of the stream some <&FF>s will tell everyone to stop. As text files are Universal, any machine will load a section starting <U>.

Very long programs might require time-out breaks to save them to disk. The code <5> signals that there is a break of five seconds in the data and will be sent continuously, counting down to <0>. Another code <T> is used to signify a title, and is followed by a string of letters (not codes) indicating the machines for the software that follows. For a single machine, three multidigit numbers indicate the number of bytes, load address and execution address, all separated by returns. In all cases, the title will then follow, terminated by <$>. As the title can be of any length, this can be used to put text and instructions on the screen without saving them.

Other codes will certainly be found to be necessary, and it is important for everyone to maintain the same standard. The safest proposal is to write to Nick Walker at *PCW* so that codes can be noted as they are claimed.

**Resistors ¼ watt carbon film 5%**
470R, 680R, 1k, 2 x 2k2 ..... 2p each
Capacitors — miniature polyester 20% type rated 63 volts or more
33nF & 47nF ..... 8p each
**Transistors**
BC213, or use BC178 or 2N3702 PNP type ..... 11p each
BC183, or use 2N3705 or BC108 NPN type ..... 11p each
Phototransistor — OP500 or XC500C ..... 78p each
**Integrated circuits**
SN74LS00 ..... 40p each
4-way ribbon cable two metres ..... 60p/2m
20-way IDC socket — BBC ..... £1.74 each
12+12 way 0.156in edge connector — Commodore 64 ..... £1.66 each
0.1in plain perforated board 1in x 2ins (BBC & Commodore 64) .... 26p each
Prices quoted are from Magenta Electronics, which is also supplying complete kits and ready-built units.
*Magenta Electronics Ltd, 135 Hunter St, Burton-on-Trent, Staffs DE14 2ST. Tel: (0283) 65435*

*Fig 2 Components list for Commodore 64 and BBC Micros*

## The receiver unit

The old circuit cannot be used, as its 20-millisecond monostable obliterates any fine detail, but some means must be used to stretch the thin pulse which arrives each time a bright line is written under the phototransistor. The answer is to use an 'R-S flip-flop' which will be set any time a pulse is received, and which can be reset by the computer when it has seen the result.

The R-S flip-flop is simply made by cross-coupling two gates of an SN74LS00 quad NAND gate chip (SN7400 or any equivalent will do). It is now connected to two bits of the user port (in the case of the BBC or Commodore — see Fig 1). One bit inputs the state of the flip-flop while the other is used to reset it.

With the increased data rate, phosphor persistence can be a problem. When the top slice is written on the screen, there is a sharp increase in the photocell current. The photocell itself will take five microseconds or so for the signal to fall, but the screen might glow for many tens of microseconds more. A middle 'off' stripe could therefore 'fill in' if its predecessors are lit. The answer is to look at the rate of change of the signal as the stripe is written, rather than at its DC value, then persistence and photocell time-constance lose their importance.

By adding two amplifying transistors to the phototransistor, an auto-biasing arrangement can be found which will tolerate an enormous range of brightness. This brings the total component count to one SN7400 (or SN74LS00), one OP500 phototransistor (or similar), one PNP and one NPN general-purpose transistor (such as 2N3702 and 2N3705), two small capacitors of values .047 and .033 microfarad, and five resistors (values 470 ohms, 680 ohms, 1k and two at 2k2. The total cost should be small (Fig 2).

The circuitry can comfortably be mounted on a 1in x 2ins unclad 0.1in perforated circuit board, and with a couple of metres of instrument wire you only need add the user port connector.

The components should be available at your local electronics store, but Magenta Electronics can supply any that you have problems finding. Its address is 135 Hunter Street, Burton-on-Trent, Staffordshire DE14 2ST, or call (0283) 65435. This is a mail-order service only and payment is needed with each order — cheque, postal order, Access or Visa are accepted (for details of Magenta's prices, see Fig 2). Only users able to work out wiring layouts from the circuit diagram published here are advised to buy the components individually. Magenta will also supply complete kits including wiring layouts, a case and a drilled, tinned, printed circuit board or ready-built Visicode receiver units. The kits cost £5.44 for the Commodore 64 and £5.52 for the BBC. The Commodore 64 version of the ready-built unit costs £7.10 and the BBC £7.20. All prices include VAT; postage and packing is 60p extra for each order.

## Receiving transmissions

You'll need two televisions or one television and a monitor to receive Visicode: tune one into your computer and one to the TV station. Insert the Visicode receiver in the user port of your computer and load up the receiving software ready for the transmis-

```
 10 REM ****************************  :Do not enter the comments
 20 REM *                          *  : on this side of the page.
 30 REM *        VISICODE          *  :They are intended to be useful
 40 REM *  BASIC receive routine   *  : both to those using BBC micros and
 50 REM *  (C) Jim Crowther 1985   *  : those who wish to work out a receive
 60 REM *                          *  : routine for different computers.
 70 REM ****************************  :Remember that the timings are critical
 80                                    : and that a TV line is 64 microseconds.
 90 *KEY10O.!M                        :Not essential but useful.
100 byte=&70                          :Location of received byte.
110 control=&71                       :Contains the control bit.
120 count=&72                         :Contains number of bits received.
130 tries=&73                         :No. of times we ignore duff syncs
140 store=&3000                       :Start of text store in RAM.
150 DDRB=&FE62                        :Data Direction Register B
160 IRB=&FE60                         :I/O port B
170 osasci=&FFE3                      :Prints on screen.
180 osargs=&FFDA                      :Performs various filing functions.
190 oscli=&FFF7                       :Executes a line of text.
200 DIM command 30                    :This is where we store this text
210 code=&900                         :Can be changed if required.
220                                   :
230 PROCassemble                      :Assemble machine code
240 IF NOT FNcheck THEN PRINT         : and check it's correct,
    "Machine code not set up":END     : if not exit program.
250                                   :
260 REPEAT                            :Main loop.
270   PROCinit                        :Display menu and act on it.
280   UNTIL FALSE                     :For ever!
290 END                               :End of main program.
300                                   :
310 DEFPROCassemble                   :Assembles machine code.
320 FOR N=0 TO 2 STEP 2               :Two pass assembly.
330   P%=code                         :Location of code.
340   [                               :Start of assembler language.
350   OPT N                           :Screen listing disabled.
360 .get_byte                         :Start label.
370   sei                             :No time to service interrupts.
380   ldy #0                          :Preset control to "0" to enable
390   sty control                     : a tally if no sync sequence found.
400   lda #8                          :Preset locations "count" & "tries".
410   sta count                       :No. of bits in received word.
420   sta tries                       :No. of times we ignore duff syncs.
430 .duff                             :Loop for checking duff reception.
440   sty IRB                         :regY=0
450   inc IRB                         :Reset interface flip-flop.
460   dec tries                       :If we get duff reception more than
470   beq out                         : eight times, exit this routine.
480 .wait                             :Wait until a "1" is received.
490   lda IRB                         :This loop takes 7 machine cycles
500   bpl wait                        :i.e. 3.5 micro-secs.
510   ldy #9                          :Padding to make up a half-line
520 .half                             : delay.
530   dey                             :This loop takes 46 machine cycles
540   bne half                        : i.e. 23 micro-secs.
550   jsr clear                       :Reset flip-flop, takes 24 m-cycles.
560   ldy #17                         :Preset delay in get-bit routine.
570   jsr get_bit                     :Returns next bit in carry flag.
580   bcs duff                        :We want a "0".
590   ldy #17                         :As above.
600   jsr get_bit                     :Get next bit.
610   bcc duff                        :We want a "1".
620   jsr gbend                       :6 microsecond delay.
630 .loop8                            :Main loop to receive a byte.
640   ldy #15                         :Preset delay in get_bit routine.
650   jsr get_bit                     :Get next bit.
660   ror byte                        :Rotate carry flag into byte.
670   dec count                       :Find how many times we have looped.
680   bne loop8                       :If not 8 times, loop again.
690   ldy #15                         :As above.
700   jsr get_bit                     :Get control bit.
710   rol control                     :Put it in control location.
720   inc control                     :Add 1
730 .out                              :This is exit point for "duff" routine.
740   dec control                     :Subtract 1. "control"=&FF if duff.
750   cli                             :Enable interrupts again.
760   rts                             :Return to BASIC.
770                                   :
780 .get_bit                          :Routine to get a bit at a time.
790   nop                             :Delay padding.
800   nop                             :  "     "
810 .line                             :Rest of line delay i.e. 64 micro-secs.
820   dey                             :"Y" has been preset above.
830   bne line                        :Each of these loops takes 5 m-cycles.
840   lda IRB                         :Get bit from interface.
850 .clear                            :Reset flip-flop.
860   sty IRB                         :regY=0
870   inc IRB                         :Set bit 1 (o/p bit) to "1".
880   aslA                            :Shift bit 7 (i/p bit) into carry flag.
890 .gbend                            :Label for end of code.
900   rts                             :Return to main routine.
```

*Fig 3 BBC Visicode receive routine*

*Fig 3 (continued)*

```
910                                   :End of assembler language.
920   ]
930   NEXT                            :Two pass assembly.
940 ENDPROC                           :End of assembly.
950                                   :REM
960 DEFFNcheck                        :This is a check to ensure
970 B%=0                              : machine code is set up correctly.
980 FOR P%=get_byte TO gbend          :We add up all the machine-code
990   B%=B%+?P%                       : bytes and make sure the total
1000  NEXT                            : is what we expect.
1010 IF B%=11362 THEN =-1 ELSE =0     :Returns "TRUE" or "FALSE".
1020                                  :
1030 DEFPROCinit                      :Menu routine.
1040 CLS                              :Tidy screen.
1050 X%=&80                           :Find filing system in use
1060 Y%=0                             : by using the routine
1070 A%=0                             : provided in the OS ROM.
1080 T%=USR osargs AND &FF            :We want the contents of regA.
1090 IF T%=1 OR T%=2 THEN T$="tape"   :Filing systems other than tape
1100 IF T%=4 THEN T$="disc"           : or disc are not provided for.
1110 PRINT"1 Save text to "¡T$        :Print menu on screen.
1120 PRINT"2 Load text from "¡T$      :  "   "   "   "
1130 PRINT"3 View text"               :  "   "   "   "
1140 PRINT"4 Receive VISICODE         :  "   "   "   "
     transmission"                    :  "   "   "   "
1150 REPEAT                           :Wait for a key to be pressed.
1160   A=GET                          :
1170   UNTIL A>&30 AND A<&35          :If not what we want, try again.
1180 IF A=&31 OR A=&32 THEN INPUT     :For a LOAD or SAVE we need
     "FILENAME ",F$                   : to know the filename.
1190 IF A=&31 PROCoscli("SAVE "+F$+   :If you have BASIC II or HIBASIC
     "3000 "+STR$~(store)):ENDPROC    : you can use the command OSCLI
1200 IF A=&32 PROCoscli("LOAD "+F$+   : instead of the procedure below.
     "3000"):store=&3000+!&2F8        :Location &2F8 contains length
     :ENDPROC                         : of loaded file.
1210 IF A=&33 PROCview:ENDPROC        :Views text from &3000 to store.
1220 IF A=&34 PROCreceive:ENDPROC     :Receives the VISICODE data.
1230                                  :
1240 DEFPROCoscli(C$)                 :This routine is only
1250 $command=C$+CHR$13               : necessary for those with
1260 X%=command MOD 256               : BASIC I. It executes
1270 Y%=command DIV 256               : a line of text pointed to by
1280 CALL oscli                       : regX and regY.
1290 ENDPROC                          :
1300                                  :
1310 DEFPROCview                      :Outputs text received to screen.
1320 IF store =&3000 ENDPROC          :If no text received then exit.
1330 PRINT"Press SHIFT to scroll"     :We are going into paged mode.
1340 VDU14                            :Thus!
1350 *FX15                            :Flushes all buffers.
1360 FOR P%=&3000 TO store            :P% points to text.
1370   A%=?P%                         :A% contains byte for output.
1380   CALL osasci                    :Prints byte, linefeeds for A%=&0D.
1390   NEXT                           :Keep on going till end of text.
1400 VDU13                            :Cancel paged mode.
1410 REPEAT                           :Wait for another press
1420   UNTIL INKEY(-1)                : of the SHIFT key
1430 ENDPROC                          : before returning.
1440                                  :
1450 DEFPROCreceive                   :Main receive routine.
1460 store=&3000                      :This is where we store text.
1470 PROCassemble                     :Cassette users have to re-assemble.
1480 ?DDRB=1                          :Bit1 of IRB as o/p, rest as i/ps.
1490 CLS                              :Tidy screen.
1500 REPEAT                           :This is the IDLE loop.
1510   PROCfetch                      :We wait until we receive the
1520   IF A%<>&24 OR B%<>1 THEN       : STANDBY code "U" for
       PRINTTAB(0,0);"Not receiving   : "Universal text"
       correctly" ELSE PRINTTAB(0,0); :Also tells us if the sensor is
       "Receiving correctly  "        : not picking up the correct code.
1530   UNTIL A%=ASC"U" AND B%=1       :When we receive "U"
1540 ?(wait-1)=0                      : we disable the "duff" routine,
1550 CLS                              : tidy screen,
1560 PRINT"STANDING BY"               : inform of standby mode
1570 REPEAT                           : and enter a loop which waits
1580   PROCfetch                      : for the STANDBY mode
1590   UNTIL A%<>ASC"U" AND B%<>1     : to finish.
1600 VDU15,30                         :Page mode off, cursor to top.
1610 REPEAT                           :Main data receive loop.
1620   CALL osasci                    :Print text on screen,
1630   ?store=A%                      : and store in in RAM.
1640   store=store+1                  :Increment RAM pointer.
1650   PROCfetch                      :Get next byte.
1660   UNTIL A%=&FF AND B%=1          :Until End Of Text code.
1670 store=store-1                    :Adjust RAM pointer
1680 ENDPROC                          :Return to menu.
1690                                  :
1700 DEFPROCfetch                     :We have time to make this
1710 CALL get_byte                    : a separate procedure,
1720 A%=?byte                         : and it does make the program
1730 B%=?control                      : tidier!
1740 SOUND&13,-7,A%,1                 :We can hear the data arriving, use
1750 ENDPROC                          : *FX210,1 to turn sound off.
```

sion. When the standby signal is transmitted, proceed as follows:

**BBC Micro** Run the program and select option four from the menu, and position the Visicode receiver in the bottom left-hand corner of the screen over the transmission area. Re-position the receiver until the computer displays 'OK', and secure the receiver with sellotape or, preferably, Blu-Tac.

The software will automatically load and return to the main menu when finished, where you can save and view the transmission. You can test out the receiver hardware by running the test routine program and following the same procedure for positioning the receiver.

**Commodore 64** Run the program and wait for the screen to go blank, and position the Visicode receiver in the bottom left-hand corner of the screen over the transmission area. Press the space bar and view the computer display. Re-position the receiver and hit the space bar until the computer displays 'OK'. Secure the receiver with sellotape or Blu-Tac and press 'R' to receive. The software will now load and return to a menu which allows you to save or view the transmission. If you have access to a BBC Micro you can test the system beforehand using the test routine for the BBC Micro and the receive software for the Commodore 64.

## Receiver software

The receiver routine for the BBC (Fig 3) is fully annotated to show users of other machines how to set about conversion, so the comments at the side don't need to be typed in. The routine is compatible with Basic I and II. If you have Basic II, the assembler routine can be put on multi-statement lines, and PROCoscli becomes redundant.

The test routine (Fig 4) allows you to check your Visicode receiver unit ahead of transmission, while the receive routine is the one you actually use for the transmissions. The test listing has nearly the same assembly language as the receive routine, so by typing in the test routine first, with the judicious use of DELETE and RENUMBER, the receive routine is easier to enter. The comments for the receive routine apply to both. The machine code for the test routine can be checked with the following program line:

B%=0: FOR N=receive TO tx3+5: B%=B%+?N: NEXT:PRINT B% and B% should be 14976!

If you are writing a routine for your own micro, remember that timings are critical. The delay loops have to be accurate to within better than five per cent to receive the last line of Visicode data correctly. The BBC is able to do this easily, having an internal clock frequency of 2MHz, but programming for slower machines will need a lot of care. Interrupts must not occur while the machine code routine is being called.

The best way to test the main delay loops is to point the sensor at a TV screen at peak white, preferably from an off-air transmission such as a test card, and observe the timings on an oscilloscope. Although you may be used to thinking that machine code routines are incredibly fast, it's quite instructive to see the effect of just one more NOP in the delay loops! Remember that a TV line is exactly 64 microseconds in duration, and your timing has to be accurate over 11 lines after the first start bit.

The briefer Commodore 64 routine needs a little more explanation. As shown on the BBC routine, the receiver software is most easily arranged by combining machine code with Basic. The machine code routine waits for a spot, reads its value and checks whether it has the control bit set. It plants the byte value in the first Basic variable, A%, and plants 1 in the second variable B% if a control bit is sensed (A% and B% must be declared in the first line of the program). If it objects to the spot, it sets B% to 255.

The Basic program can now control the saving of the data by first POKEing it into a safe region of memory. In the case of the Commodore 64 it must also switch off the display, as this steals memory cycles and confuses the timing. This might leave you guessing about the quality of the input, so the sound channel has been called into action. The machine code plants the value of each received byte into the pitch 1 high byte. The decay is set to give a brief 'ping' as each byte arrives, scattered up and down in pitch. Every time a control bit is found, the second sound channel is strobed. This is set to give a long deeper 'plung', so that you can easily hear when the set-up blob is being correctly decoded. When you are happy with it, press the space bar and the program will wait for the data to start. It will save it and restore the display when the final control code is received. The rest is up to you.

```
   10 REM ************************
   20 REM *                      *
   30 REM * VISICODE test routine *
   40 REM * (C) Jim Crowther 1985 *
   50 REM *                      *
   60 REM ************************
   70
   80 DDRB=&FE62
   90 IRB=&FE60
  100 byte=&70
  110 control=&71
  120 screen=&72
  130 count=&74
  140 tries=&75
  150 X=0
  160 Y=30
  170 c=&5800+X*8+Y*320
  180 ?screen=c MOD 256
  190 ?(screen+1)=c DIV 256
  200 ?DDRB=1
  210 PROCassemble
  220 MODE4
  230 VDU23,255,255,255,255,255,255,255,
255,255
  240 PRINTTAB(0,28);CHR$255;CHR$255;
CHR$255;CHR$255
  250 PRINTTAB(0,29);"    ";CHR$255
  260 PRINTTAB(0,30);"    ";CHR$255
  270 PRINTTAB(0,31);"    ";CHR$255;
  280 A%=&55
  290 REPEAT
  300 A%=A% EOR &FF:CALLtx
  310 CALL receive
  320 SOUND&13,-7,?byte,1
  330 IF?byte=A% AND ?control=1 THEN
PRINTTAB(0,10);"O.K." ELSE
PRINTTAB(0,10);"DUFF"
  340 UNTIL FALSE
  350
  360 DEFPROCassemble
  370 FOR N=0 TO 2 STEP2
  380 P%=&900
  390 [
  400 OPT N
  410 .receive
  420   sei
  430   ldy #0
  440   sty control
  450   lda #8
  460   sta tries
  470   sta count
  480 .duff
  490   sty IRB
  500   inc IRB
  510   dec tries
  520   beq out
  530 .wait
  540   lda IRB
  550   bpl wait
  560   ldy #9
  570 .half
  580   dey
  590   bne half
  600   jsr clear
  610   ldy #17
  620   jsr get_bit
  630   bcs duff
  640   ldy #17
  650   jsr get_bit
  660   bcc duff
  670   jsr gbend
  680 .round
  690   ldy #15
  700   jsr get_bit
  710   ror byte
  720   dec count
  730   bne round
  740   ldy #15
  750   jsr get_bit
  760   rol control
  770   inc control
  780 .out
  790   dec control
  800   cli
  810   rts
  820
  830 .get_bit
  840   nop:nop
  850 .line
  860   dey
  870   bne line
  880   lda IRB
  890 .clear
  900   sty IRB
  910   inc IRB
  920   asl A
  930 .gbend
```

*Fig 4 BBC Visicode test routine*

*Fig 4 (continued)*

```
  940   rts
  950
  960
  970 .tx
  980   sta control
  990   lda #255
 1000 .tx1
 1010   sta c-313
 1020   sta c-315
 1030   sta c+320
 1040   ldy #7
 1050 .tx2
 1060   lda #0
 1070   rol control
 1080   bcc tx3
 1090   lda #255
 1100 .tx3
 1110   sta (screen),Y
 1120   dey
 1130   bpl tx2
 1140   rts
 1150 ]
 1160 NEXT
 1170 ENDPROC
```

The 'pseudocode' version of the machine code is as follows. The Commodore version is given, but apart from lines 15 to 18 the method is common to most micros.

1 Inhibit interrupts.
2 Pulse bit 0 of the port down and up to clear the latch.
3 Load COUNT and TRIES with 8, set B% to zero.
4 Decrement TRIES; if zero then flag B% is 'no good', enable interrupts and return to Basic.
5 Input the port, if no pulse go to 5 (wait for start bit).
6 Wait half a line, clear the latch.
7 Call GETBIT — bistable sense bit is bit 7.
8 If bit 7 is set, go to 4 to try again.
9 Call GETBIT.
10 If bit 7 is clear, go to 4 to try again.
11 Call GETBIT.
12 Combine the input bit with the byte so far.
13 Decrement count; if not zero, loop back to 11.
14 Call GETBIT; if bit 7 is set then B%=1 (control).
15 Save the byte in A% — STA (VARPTR),Y where (Y)=3.
16 Save the byte in sound pitch channel one high-byte.
17 If B% is non zero, pulse sound channel two.
18 Pulse sound channel one.
19 Enable interrupts, return to Basic.

GETBIT:

20 Wait for one-line period.
21 Read the input port.
22 Toggle bit 0 of the port to clear the bistable.
23 Return.

## Spectrum dilemma

After a week of frantic effort, the question still hangs in the balance: 'Will the Spectrum be able to receive Visicode?'.

After an uncomfortable experience trying to get the timing loop correctly balanced on the Commodore 64 — solved by killing the screen display — I was a little cautious in claiming that Visicode would work for the Spectrum. But a brief two-liner which planted and ran a simple machine code loop gave a beautifully clean signal on the oscilloscope, so I felt safe in predicting success.

The assembler routine worked out rather neatly, and a prod to the ULA produced a gratifying stripe of colour and a click as each byte was received. To save effort, I tacked the receiving optics onto the Spectrum's own screen to line up the timing, and in no time had it balanced. Next came a live test on data transmitted from the BBC computer's screen — and then my troubles really started.

The machine code is loaded from a Basic program which then tests the received byte for quality. If it matches the test pattern, the screen shows 'OK'; if not, you have problems. The relative display timing of the two computers is not exact. The point at which the photocell received the spot was rolling slowly on the Spectrum's screen. While it corresponded with the part of the screen which shows text, all was well. As soon as it rolled to the border area, the timing was too far in error. A quick bodge to the machine code changed all that. Now the spot was perfectly decoded in the borders, but went to pieces in the text area. Just as in the case of the Commodore 64, the display was causing trouble.

During display output, the ULA in the Spectrum rations out the clock pulses to the processor, leaving itself time to drag display bytes out of memory. Program execution therefore speeds up in the gaps. There were a number of possibilities: kill the display altogether, as in the Commodore 64; persuade the ULA to stop stealing cycles; persuade the ULA to steal cycles the whole time; or hope that the two screens stay in step, perhaps bending the clock rate to lock them.

Clearly I needed to know more about the innermost workings of the Spectrum. Where better to look for help than Sinclair Research? I am sure it is easier to telephone the headquarters of the CIA, but I eventually obtained a number and a name to contact. 'No, you can't disable the display. All you need to do is move your machine code to the top of the 48k memory.' Hopefully I tried it. It didn't work. What had looked like a clean oscilloscope trace was hopelessly dependent on the part of the display in which it was triggered, although I still believe that I once got a completely clean pulse when the machine crashed.

Back to the telephone: 'I'll ask a hardware man.' Soon a determined, anonymous voice was advising me to pull one of the expansion port pins high so that the ULA could not see the I/O request. It didn't work. From the circuit diagram I then saw that the pin was already pulled high for the particular address I was using.

Perhaps a reader has the answer. The ULA has a write line to the memory, so it could use memory locations to keep track of byte and line count — and these could be nobbled. If you have the answer, please let *PCW* know.

In the meantime, an Amstrad is waiting in my hallway to be given the treatment. I do hope it's easier!

## Micronet prizes

Once you've received the Visicode transmission, you can start to ponder the puzzle which makes up the four broadcasts. Each of the four 'clues' will take approximately 6k of memory and they will all piece together to give a final answer. Put them together correctly and you could win one of 30 free yearly combined subscriptions to Prestel and Micronet 800 (together worth £2000).

In addition to being transmitted via Visicode on the four *Database* programmes (4, 11, 18 and 25 July), the competition will also be run on the Prestel/Micronet 800 database and on the Prestel Free Access Area (a special database available to modem owners and Micronet demonstration retailers at a local phone call rate).

To access this second service, dial 100 and ask Freefone Prestel Service for your area telephone number, then key in 4444444444 as an identity number and 4444 as a password.

To round off the competition, the winners will be announced on the *Database/PCW* special that will be transmitted from the *PCW Show* on 5 September.

```
READY.


10 POKE56,29:CLR:REM PROTECT STORE AREA
15 A%=0:B%=0:MC=30*256:I=0:DL=36:CU=85:P=32*256:Q=128*256
20 GOSUB1000: REM LOAD MACHINE CODE
25 POKE54273,80:POKE54280,32:POKE54296,15:POKE54277,2:POKE54284,7:REM SOUND
30 VD=53248+17:VO=PEEK(VD):POKE VD,VO AND 239:REM SCREEN OFF
35 SYSMC:SYSMC:GETA$:IFA$=""THEN35
40 IF A%<>DLOR B%<>1THEN POKE VD,VO:PRINT"■NOT HAPPY !":GOTO30
42 IF A$<>"R" THEN PRINT"■OK":POKEVD,VO:GOTO 30
45 POKE54280,40:SYSMC:REM CHANGE PITCH, SYNCHRONISE BLIP
46 SYS MC:IF B%<>1 OR A%<>CU THEN46:REM WAIT CONTROL U
50 SYSMC:IFB%THEN50:REM WAIT FOR DATA
60 FOR I=P TO Q:POKE I,A%:SYS MC:IF B%=0 OR A%<>255THENNEXT
70 R=1:I=Q:NEXT
80 POKE VD,VO:PRINT"■■":D=3:REM CLEAR SCREEN, SET WHITE TEXT
100 OPEN1,D:FORI=PTOR-1:PRINT£1,CHR$(PEEK(I));:NEXT:CLOSE1
110 INPUT"3 FOR SCREEN, 4 TO PRINT";D:GOTO 100
1000 I=MC: PRINT"■ LOADING MACHINE CODE"
1005 PRINT"■PRESS SPACE TO TEST, R TO RECEIVE"
1010 READ A$:IF LEN(A$)<>2 THEN RETURN
1020 A=ASC(A$)-48+7*(A$>":")
1030 B$=MID$(A$,2)
1040 A=16*A+ASC(B$)-48+7*(B$>":")
1050 POKE I,A:I=I+1:GOTO1010
2000 DATA A9,01,8D,03,DD,A0,00,8C
2010 DATA 01,DD,8D,01,DD,78,A9,08
2020 DATA 8D,84,1E,8D,85,1E,CE,85
2030 DATA 1E,F0,47,AD,01,DD,10,FB
2040 DATA A0,01,20,73,1E,20,6E,1E
2050 DATA 30,EC,20,6E,1E,10,E7,20
2060 DATA 71,1E,CE,84,1E,D0,F8,8A
2070 DATA A0,03,91,2D,8D,01,D4,20
2080 DATA 71,1E,A2,00,09,00,10,0A
2090 DATA E8,A0,20,8C,0B,D4,C8,8C
2100 DATA 0B,D4,8A,A0,0A,91,2D,A0
2110 DATA 20,8C,04,D4,C8,8C,04,D4
2120 DATA 58,60,A0,0A,A9,7F,91,2D
2130 DATA A0,03,91,2D,58,60,EA,EA
2140 DATA EA,A0,04,88,D0,FD,AD,01
2150 DATA DD,8C,01,DD,EE,01,DD,0A
2160 DATA 8A,6A,AA,60,XXX

READY.
```

*Fig 5 Commodore 64 receive routine*

---

*Many thanks are due to Jim Crowther for his enthusiastic collaboration, and to Michael Feldman and the rest of the* Database *team for their encouragement. Thanks will also be due to readers who join in the experiment, helping to bring about a change in public domain software. Receive routines and circuit diagrams for machines other than those covered here are obviously welcome. Send them to Nick Walker at* PCW *so that they can be checked and published.*

END

# your next product

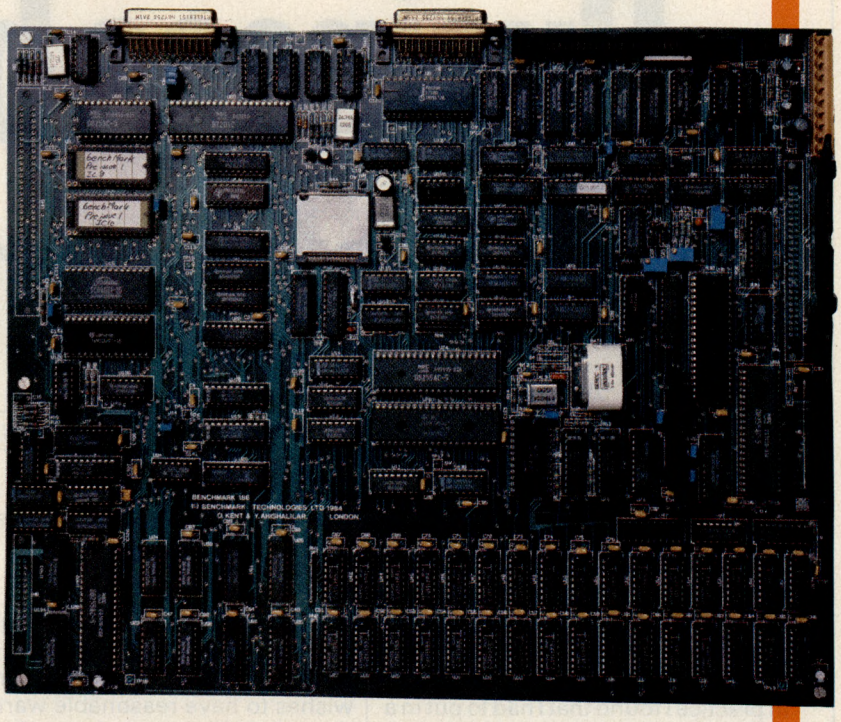

Right now you are probably planning your next product. A workstation. An intelligent terminal. A network file server. Or perhaps an embedded control system.

Whatever your application, benchMark 186 is the computer you need never design.

Because we've done it for you.

It is so resourceful, you are only bound by your imagination. It is blessed with an elegant architecture and abundant computing power. Its superb high resolution graphics and text display are unheard of in this price range. Yet it only costs around £750 in quantity.

And while we are taking care of quality and the production, you can be spending more on your new application.

But our support does not end there.

We also provide you with an excellent software development environment. With many languages, libraries and tools to match. So you need not invest in expensive development systems.

We even throw in a multitasking real-time executive, and a concurrent debugger with each board we sell.

And if you are not really looking forward to interfacing that laser printer, ask us. We can probably do it for you. We may even go out of our way to customise the board if your order is a large one.

We can also save you precious time with our training programme. In hardware. Software. Or both. Servicing should not be a worry either. With our specially designed tools we will show you how to test your product quickly.

Because we know your success is ours, we work harder when you do. So before that important exhibition you can contact us round the clock on a special hot-line we provide.

And as we are a British company we are never more than a short journey away. If it cannot be said over the phone, we will come to you to help.

At benchMark we pledge loyalty to our customers. In fact, convince us, and we may even give you an exclusive deal in your immediate field.

So if you are interested and want to get on board fast, contact us.

We will talk to you.

**benchMark Technologies Ltd**
11 Victoria Road, Kilburn
London NW6.
Tel: 01-624 5681

## benchMark 186 single board computer for OEMs

**HARDWARE SPECIFICATIONS**

| | |
|---|---|
| CPU | 80186 6 or 8 MHz |
| EPROM | 32K |
| | RAM128K to 1M on board. |
| VIDEO | 16K separate character buffer. |
| | upto 1280 x 800 pixels bit resolution. |
| | upto 160 x 60 characters text resolution. |
| | upto 16 x 32 bits character resolution. |
| | Fully bit mapped graphics. |
| | Soft character set of upto 2000 characters. |
| | Full attributes and soft scroll. |
| | Composite or direct video drive. |
| COMMUNICATIONS | Two full RS232 channels with independent baud rate generation and with loop-in loop-out capability. |
| | Asynchronous and synchronous protocols. |
| FLOPPY | Controller for a upto 4 double sided, double density 8.5.25 or 3.5 inch drives. |
| HARD DISC | On board SASI bus and support for 2 hard disc drives. (fixed + removable). |
| KEYBOARD | Parallel or serial keyboard interface. |
| PRINTER | Centronics compatible parallel keyboard interface. |
| REAL-TIME CLOCK | Battery backed clock with time, calendar and alarm functions. |
| CMOS RAM | 50 bytes of battery backed RAM. |
| IEEE 488 | Full electrical implementation of the IEEE 488 instrument control bus. |
| DMA CHANNELS | 2 floating DMA channels. Most peripherals can be DMA and/or interrupt driven. |
| TIMER COUNTERS | 3 uncommitted timer counters with external trigger and clock inputs. |
| EXPANSION BUS | Fully buffered expansion bus with access to interrupts, DMA channels and TIMERs. |
| ADD-ONs | 8087 floating point module (November 84). |
| | Proximity string correlator module (January 85). |
| PCB | CAD/CAM 4 layer PCB (330mm x 280mm). |

**SOFTWARE**

| | |
|---|---|
| MS-DOS 2.11 | Multitasking implementation of MS-DOS operating system. The operating system itself also runs as a task. |
| 'C' COMPILER | Specific support for the Lattice 'C' compiler and tools with benchMark specific libraries. |
| bRTX | benchMark multitasking real-time executive. |
| bCD | benchMark concurrent debugger. |
| bVT220 | benchMark VT220, VT100, VT52 emulation. |
| bSAS | benchMark signature analysis stimuli. |
| bDEF | benchMark hardware definition libraries. |

MS-DOS is a trademark of Microsoft Inc.
Lattice is a trademark of Lattice Inc.
benchMark 186, bRTX, bCD, bVT220, bSAS, bDEF are trademarks of benchMark Technologies Ltd.
Prices and specifications are subject to change without notice.

benchMark
TECHNOLOGIES • LIMITED

# Business begins at home

*At last — the definitive way to make sure you don't overspend. Impossible? Bob Hinton shows you how, using Psion's Xchange suite on the QL.*

Only a small minority of people who buy a Sinclair QL will immediately plunge happily into programming in SuperBasic. Most will turn first to Psion's Xchange, the four software packages called Quill, Abacus, Easel and Archive that are bundled with the computer for ease of use.

In practice I found that I had to put in a lot of hard work before I could make use of the programs. Probably the best way to learn is to work through a practical example. There are several of these in the QL's manual and they are certainly useful, but I learned more about Abacus and how to display some of its results with Easel from the exercise described here.

## Anticipating risks

The exercise is not very sophisticated, but it should be useful to anyone who needs to live within his income and who wishes to have reasonable warning of the risk of failing to do so. For this I wanted a system which could:

— list planned spending month by month;
— compare it with likely income;
— compare it with actual spending as it occurred;
— forecast the peaks and troughs of over and under-spending likely over the course of the year; and
— warn when spending is beginning to overshoot this forecast and so prompt action to avoid disaster.

The heart of the system is the chart showing the income and expenditure for each month of the year. The chart for January is shown in Fig 1, the other months following the same basic pattern. Both income and expenditure have information in four columns. Alongside each item of income is the estimate of what it is likely to be, and next to that a column to record the actual income when received. The end column records the difference between the two. Items of expenditure are treated in the same manner.

All the columns are totalled and income is compared with expenditure to produce the monthly summary figures at the bottom. The summary shows how well or badly you have done over the month, but more importantly it forms the basis for the chart in Fig 2 which builds up the picture for the year as the figures for each month are transferred to it.

At the start of the year, the estimate for each month can be fed into the top line of Fig 2 for the whole 12 months. This automatically produces a line of figures in the fourth line ('Estimated to date') which tells you how you are likely to stand overall at each stage of the year. A + sign indicates that your income is estimated to exceed expenditure at that stage; a − sign means you are likely to spend more than your income.

This highlights the times in the year when you might have cash-flow problems, and by warning you in advance enables you to do something about it: for example, plan economies, earn extra income, withdraw savings or defer payment of bills.

As the year goes by, the actual result for each month is transferred from the monthly summary to line two, and this

| | A | B | C | D | E | F | G | H |
|---|---|---|---|---|---|---|---|---|
| 1 | | | | HOUSEHOLD BUDGET | | | | |
| 2 | | | | ================ | | | | |
| 3 | January | | | | | | | |
| 4 | -------- | | INCOME | | | | | |
| 5 | | | ------ | | | | | |
| 6 | Item | | Estimate (£) | | Actual (£) | | Difference (£) | |
| 7 | ---- | | ---------- | | ---------- | | ---------- | |
| 8 | Salary | | 820 | | 820 | | | |
| 9 | Expenses | | 25 | | 45 | | 20 | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | ------ | | ------ | | ------ | |
| 15 | Total Income | | 845 | | 865 | | 20 | |
| 16 | | | ------ | | ------ | | ------ | |
| 17 | | | | | | | | |
| 18 | | | EXPENDITURE | | | | | |
| 19 | | | ----------- | | | | | |
| 20 | Item | | Estimate (£) | | Actual (£) | | Difference (£) | |
| 21 | ---- | | ---------- | | ---------- | | ---------- | |
| 22 | Mortgage repay't | | 120 | | 120 | | | |
| 23 | Water rate | | 15 | | 15 | | | |
| 24 | General rate | | 43 | | 43 | | | |
| 25 | Insurance | | 15 | | 15 | | | |
| 26 | Housekeeping | | 300 | | 310 | | -10 | |
| 27 | Barclaycard | | 30 | | 26 | | 4 | |
| 28 | Entertainment | | 20 | | 44 | | -24 | |
| 29 | Personal Expenses | | 90 | | 90 | | | |
| 30 | Gas | | 80 | | 125 | | -45 | |
| 31 | Electricity | | 90 | | 85 | | 5 | |
| 32 | Contingency | | 30 | | 21 | | 9 | |
| 33 | | | | | | | | |
| 34 | | | | | | | | |
| 35 | | | | | | | | |
| 36 | | | | | | | | |
| 37 | | | | | | | | |
| 38 | | | | | | | | |
| 39 | | | | | | | | |
| 40 | | | | | | | | |
| 41 | | | | | | | | |
| 42 | | | ------ | | ------ | | ------ | |
| 43 | Total Expenditure | | 833 | | 894 | | -61 | |
| 44 | | | ------ | | ------ | | ------ | |
| 45 | | | | | | | | |
| 46 | MONTHLY SUMMARY | | | | | | | |
| 47 | ---------- | | | | | | | |
| 48 | Estimated result for month: | | | | 12 | | | |
| 49 | Actual result for month: | | | | -29 | | | |
| 50 | Variation from estimate: | | | | -41 | | -41 | Ref:HBJFMA |

*Fig 1 January income and expenditure*

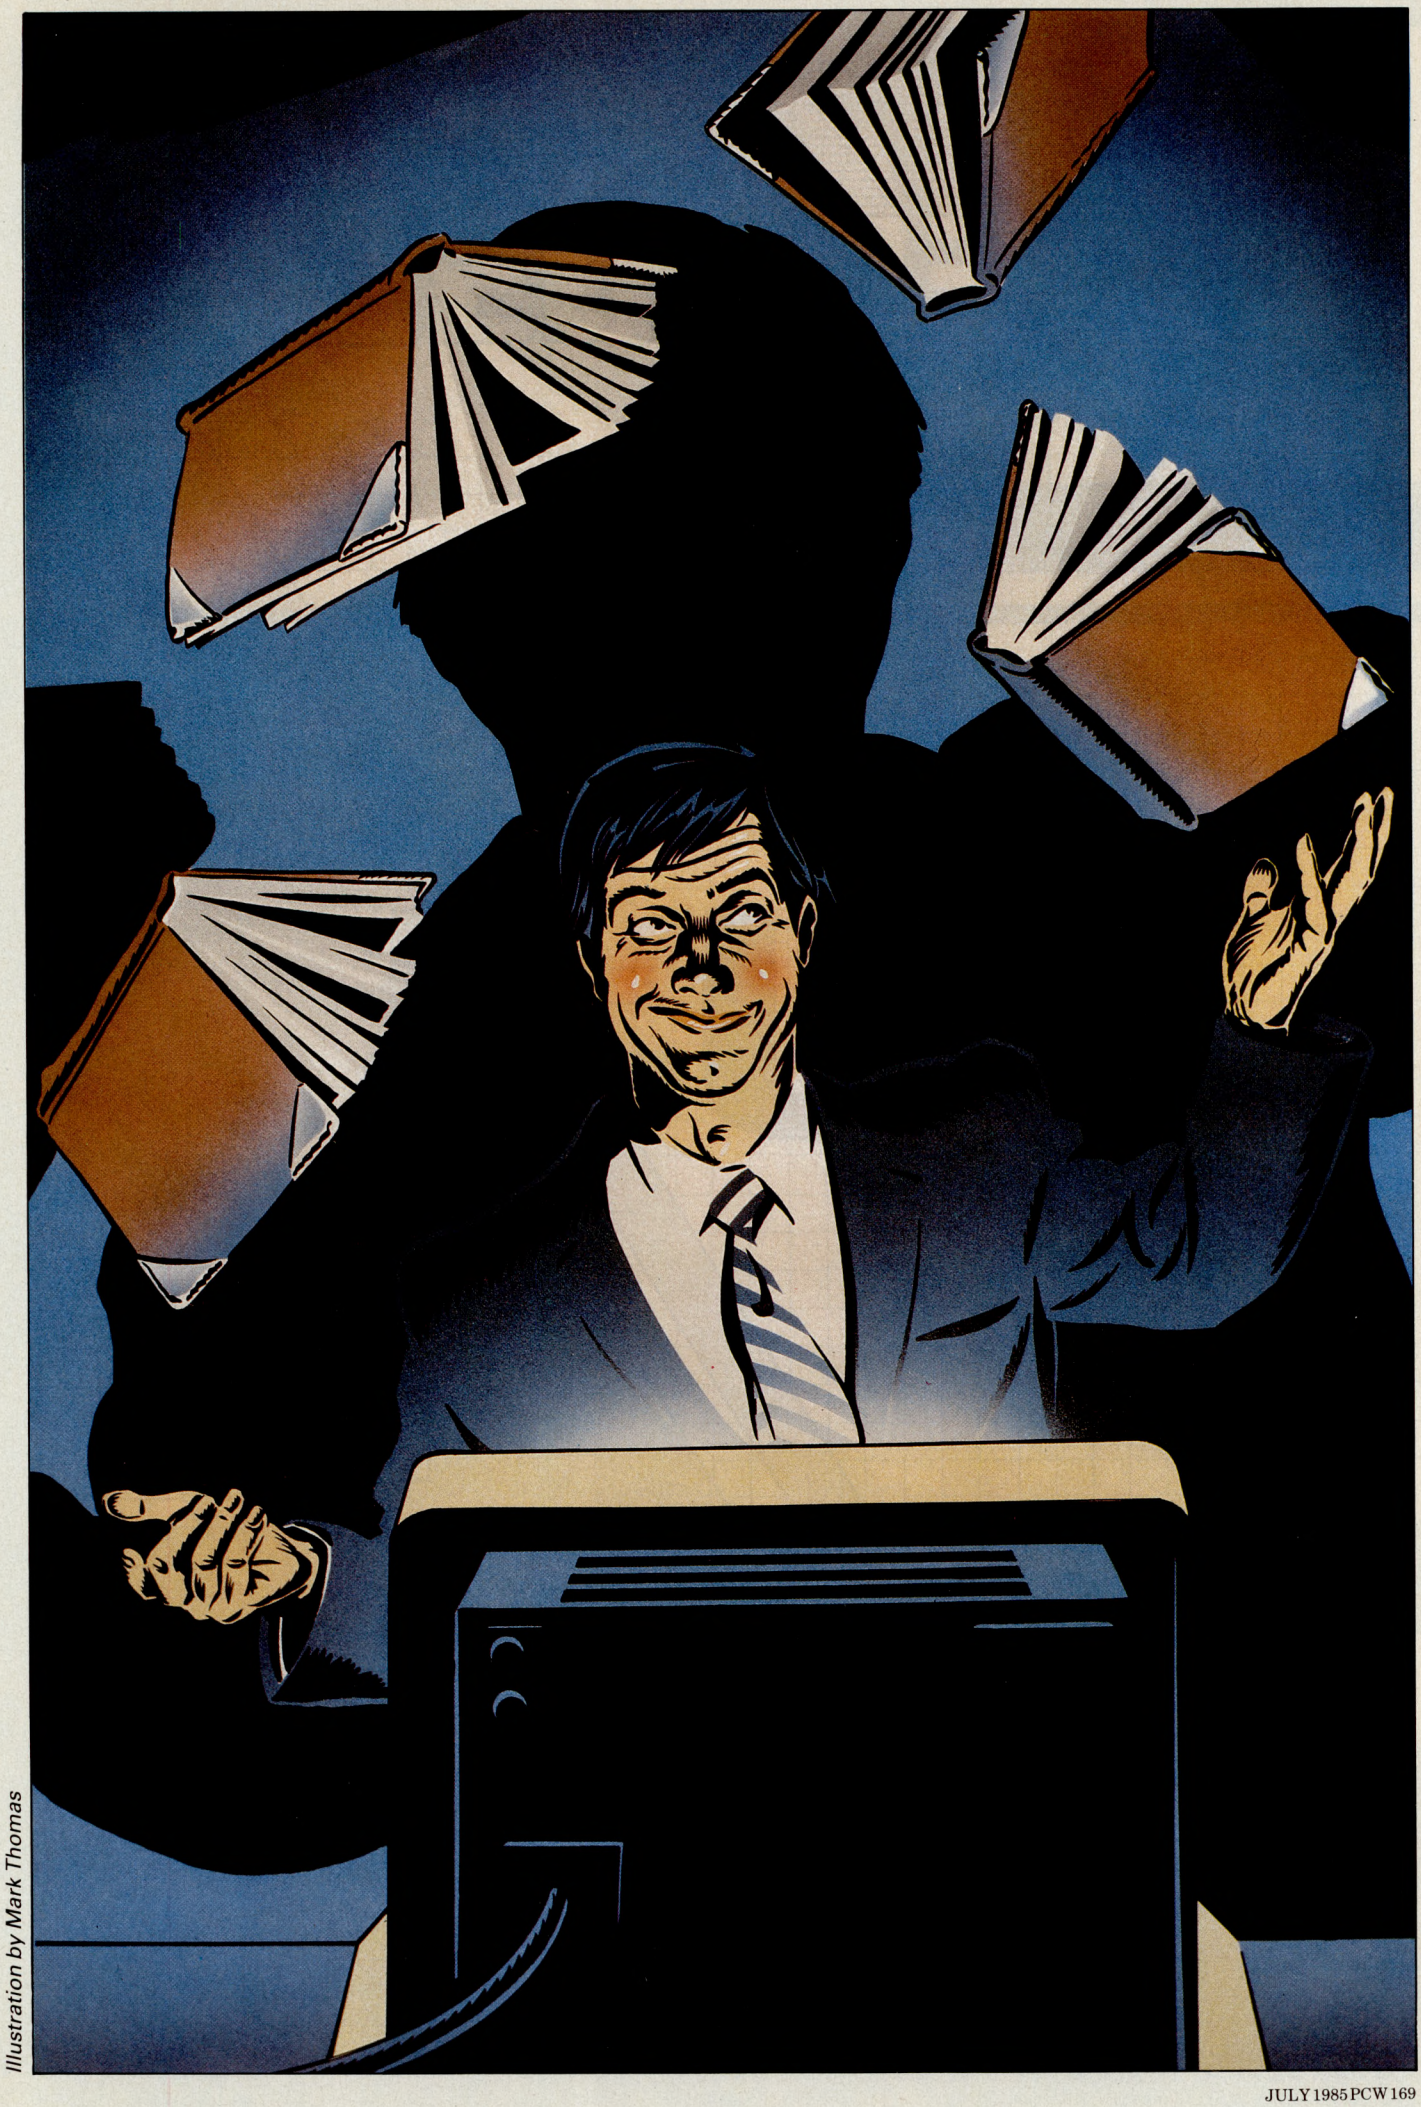

Illustration by Mark Thomas

# A DISTRIBUTORS STRENGTH IS IN ITS RETAILERS

# FREEROSE

FUJI

## BACKS

# FUJI

CERTIFIED AND TESTED 100% ERROR FREE

## AND YOU?

**Join us: Ring 01-405 1430/01-405 9565**
**or visit us at our showroom between 10am and 5pm — Monday to Friday**

**FREEROSE LTD** Computer Division
24 St Cross Street
Hatton Garden
London EC1N 8DX

MAIN DISTRIBUTORS
OF FUJI, MAXELL,
3M FLOPPY DISKS

★ MAXELL 3" CFZ-D DISKETTES IN STOCK ★
★ SONY 3½" SINGLE AND DOUBLE SIDED DISKETTES AT RIDICULOUSLY LOW PRICES ★

in turn automatically produces the row of figures in line five ('Actual to date'). This builds up a picture of the year to compare with the expected figures in line four. It will tell you whether your planned efforts to avoid disaster are working, or, if there seemed to be nothing to worry about at the start of the year and your control has been slack, this line will act as a warning as, for the months yet to come, it projects the new pattern now developing from the actual results.

In case you should want an overall assessment of whether it will be a good year or a bad one, the year-end forecast is added at the bottom.

## The monthly chart

After loading Abacus, the first thing to do is to adjust the width of the columns to suit the chart. Column A should be 16 characters wide to allow room for the words of the items. If you adjust column B to one character, you can position the main income and expenditure headings slightly out of line with others to make them stand out. Columns C, E and G will hold the figures — six characters should be enough for most people's monthly income! D and F are spacing columns and eight characters should be sufficient (note that the column headings spill over into them so they should not be less than this).

The widths are adjusted by the GRID command by choosing the width option and following the prompts to get the result you want.

The following are the cell references in sequence and the content to insert:

D1 "Household budget (you may wish to add the year to the text of this heading).

D2 Here you have a choice. You may feel it is simpler to add the underline by inserting "=======. If you prefer to use a formula, you will find the pattern at A4.

A3 "January

A4 rept ("–",len(A3)) (Here you must use the formula linking the length of the underline to the text in A3 in order that it adjusts to different months when you insert these in the copies of the chart you will make later.)

B4 "Income

B5 "------ (This six-character underline will be useful and can be referred to as B5 whenever needed.)

A6 "Item (The other column headings go in row 6 followed by the underlines in row 7.)

C8 and E8 It might be a good idea to put numbers in these cells *pro tem* just to test the operation of the formulae you will now insert.

G8 Diff = Est – Act (from 8 to 13) (This uses the excellent facility whereby Abacus recognises cell labels in formulae and applies the facility to a range of cells. It gives you space for six items of income.)

C14 B5 (Remember? And in C16, E14 & 16 and G14 & 16.)

A15 "Total income

C15 Row = sum(col) (from 8 to 14) (from C to G).

This entry totals the rows, but it may worry you to see stray Os in columns D and E. Not to worry, we can shift these with the DESIGN command later on.

B18 & 19 Entries for expenditure like B4 & 5.

A,C,E,G20 Enter A6 C6 E6 & G6 respectively to repeat headings, followed in row 21 by the underlines from row 7.

G22 Diff = Est – Act (from 22 to 41) This will give space for the entry of 20 items. Adjust if you think you need more or less.

C42 B5 (Again! And five more times as in rows 14 & 16.)

A43 "Total expenditure

C43 Row = Sum(col) (from 22 to 42) (from C to G).

With this entry the basic monthly grid is complete. If you now add a few trial figures in columns C and E, you can test the operation of the whole grid and go on to create the display and formulae for the whole grid. Then you can create the display and formulae for the Monthly Summary.

A46 "Monthly summary (followed by underline at A47 ).

In the next three lines in column A insert the three items under that heading in the chart.

E47 "£ (This will be centered with the JUSTIFY command later on. Until then it will be out of line with the figures below it.)

E48 C15 – C43 (As an alternative you could use the cell labels here, but as they are long I prefer the cell references.)

E49 E15 – E43

E50 E49 – E48

G50 G15 + G43 (This should produce the same figure as E50, and so is a check that you have entered the formulae correctly. If it does check,

| | A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| 1 | | HOUSEHOLD BUDGET - TABLE OF MONTHLY AND CUMULATIVE PERFORMANCE | | | | | |
| 2 | | ========== | | | | | |
| 3 | 1984 | | January | February | March | April | May |
| 4 | | | | | | | |
| 5 | Estimated result | | 12 | -20 | -109 | 44 | 106 |
| 6 | | | | | | | |
| 7 | Actual result | | -29 | -49 | -87 | -23 | 126 |
| 8 | | | | | | | |
| 9 | Variation | | -41 | -29 | 22 | -67 | 20 |
| 10 | | | | | | | |
| 11 | CUMULATIVE | | | | | | |
| 12 | ========== | | | | | | |
| 13 | Estimated to date | | 12 | -8 | -117 | -73 | 33 |
| 14 | | | | | | | |
| 15 | Actual to date | | -29 | -78 | -165 | -188 | -62 |
| 16 | | | | | | | |
| 17 | | | June | July | August | September | October |
| 18 | | | | | | | |
| 19 | Estimated result | | -73 | 112 | -150 | 126 | 23 |
| 20 | | | | | | | |
| 21 | Actual result | | -33 | 134 | -120 | 126 | 23 |
| 22 | | | | | | | |
| 23 | Variation | | 40 | 22 | 30 | 0 | 0 |
| 24 | | | | | | | |
| 25 | CUMULATIVE | | | | | | |
| 26 | ========== | | | | | | |
| 27 | Estimated to date | | -40 | 72 | -78 | 48 | 71 |
| 28 | | | | | | | |
| 29 | Actual to date | | -95 | 39 | -81 | 45 | 68 |
| 30 | | | | | | | |
| 31 | | | | | | | |
| 32 | | | November | December | | | |
| 33 | | | | | | | |
| 34 | Estimated result | | -58 | 44 | | | |
| 35 | | | | | | | |
| 36 | Actual result | | -58 | 44 | | | |
| 37 | | | | | | | |
| 38 | Variation | | 0 | 0 | | | |
| 39 | | | | | | | |
| 40 | CUMULATIVE | | | | | | |
| 41 | ========== | | | | | | |
| 42 | Estimated to date | | 13 | 57 | | | |
| 43 | | | | | | | |
| 44 | Actual to date | | 10 | 54 | | | |
| 45 | | | | | | | |
| 46 | | | | | | | |
| 47 | | | | | | | |
| 48 | YEAR END FORECAST | | | | | | |
| 49 | ========== | | | | | | |
| 50 | Original estimate | | 57 | | | | |
| 51 | | | | | | | |
| 52 | Current forecast | | 54 | | | | |
| 53 | | | | | | | |
| 54 | Performance forecast | | -3 | (A plus figure is better than originally forecast, a minus figure is worse) | | | |
| 55 | | | | | | | |
| 56 | | | -3 | | | | |

*Fig 2 Building up a picture of the budget for a year*

# Fatten up your Mac

*Soldering iron and pliers at the ready, David Burns presents a step-by-step guide to expanding the Macintosh — four times the memory for a third of the price.*

When Apple produced the first Macintosh computers, the new 256k RAM chips were not widely available. So, rather than be late into the marketplace, the company fitted 64k memories as a temporary measure. Although promoted as 128k computers, they are, in fact, only 64k word machines and much of this memory is taken up by the Mac's own software. Users of programs such as MacWrite and MacPaint soon became aware of the limitations of this memory — a mere seven A4 pages when word processing.

The new, larger memories were introduced and the 'Fat-Mac' was born: four times the memory and a boon to those sick of waiting for the Mac to dump to its clattery old disk drive so that they could add a bit more text or do another doodle. The problem, though, is the cost of the upgrade — around £800. The cost of the memories themselves, however, has recently fallen rapidly, and the 16 256k RAMs needed to 'fatten up' your Mac can now be obtained for around £15 each — a total of less than £250. With the other few items required, the whole job can be done for well under £280, or a third of Apple's price.

Needless to say, Apple is not keen to be done out of sales of its new Fat-Mac boards. DIY upgrades will certainly invalidate any warranty, but if the machine is a year or more old then this should be of little consequence. Doing it yourself may involve a small risk to the computer, but the task is not difficult (if a little fiddly) for anyone who is reasonably competent with a soldering iron. The £500-plus saved will buy a lot of extra software or hardware — or a service contract for that matter!

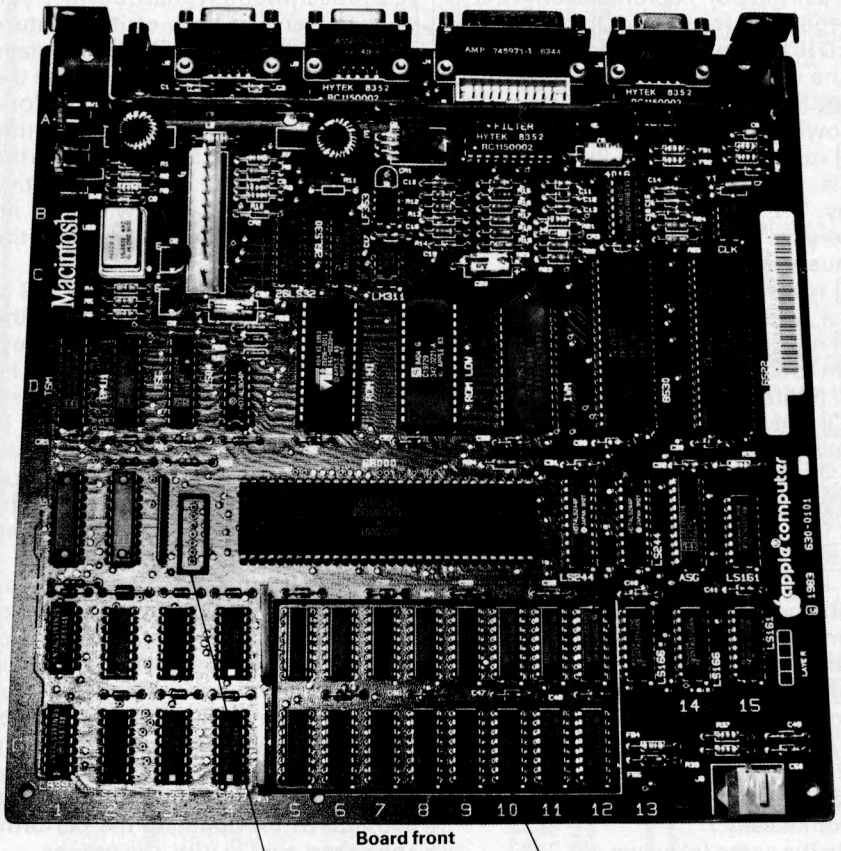


*Fig 1 The Macintosh board*

## Requirements

The main additional components are the 16 256k dynamic RAM chips. A suitable device is the Hitachi HM50256P-15, although equivalents are available from several sources; both Semi-Components, tel: (0932) 241866 and Happy Memories, tel: (054) 422 618 stock these at about £15 each. It's worth shopping around as prices (at the moment) are dropping all the time.

You will also need another IC — I've specified the type used by Apple, the 74F253 — to act as the address multiplexer required by the larger RAMs. It's important that this device is fast — Fairchild's FAST or the Texas Instruments Advanced Shottky series — don't use ordinary TTL or low-power Shottky. They may work but cannot be guaranteed to do so. Other, similar multiplexer chips could be substituted, but it seems reasonable to use the device already used by Apple to multiplex the other address lines.

The only other components required are a 47-ohm, ⅛watt resistor, a small piece of circuit board (Veroboard will do), solder and some solid wire. Necessary tools include a good, small soldering iron of reasonable capacity (25 watts minimum), a small screwdriver, and pliers. You'll also need an efficient desoldering tool — the chips aren't socketed. A small solder-sucker such as the miniature one sold by RS Compo-

*Photograph by Peter Smith.*
*Sports goods courtesy of the Syndale Country Club*

nents (order number 547 391) which costs a little over £7 is ideal, although there are several types available from other dealers.

Finally, you need a 3/32in Allen key with a long (six inches or so) handle to open the Macintosh. If you can't get a long-handled one, it's easy enough to make one by cutting the bent end off a short one and soldering the resultant key into the end of a nut spinner or similar. The total cost of these 'extras' should not be more than £15.

## Memories

Dynamic RAMs generally have multiplexed address lines to save on pin connections and hence package size. With the original 64k RAMs 16 address lines are needed, but the 16-pin package only allows for eight address connections: A0-A7. Consequently, the address is loaded in two 'chunks'.

Firstly, half of the microprocessor's 16 low-order address lines are switched to the memories' A0-A7 pins, and a signal called $\overline{RAS}$ (row address strobe) is activated. Next, the other half of the low-order address lines are switched in, and a signal called $\overline{CAS}$ (column address strobe) is activated. This is achieved in the Macintosh using 74F253 mutliplexer chips. With 256k RAMs you obviously need two more address lines but, because of the multiplexing system, only one more pin is required; this is pin 1 which is unused on the 64k device.

On the Mac board, all the pin 1s of the memory chips are connected and taken to a row of pads on the printed circuit next to the microprocessor chip shown in Fig 1. I've called this signal 'RAM A8' in Fig 2a. This pad is next to the one marked '+5 volts', and on the 'thin' Mac these two pads are connected; they will have to be disconnected. The other pads in this set of seven are: 0 volts (ground); A17 and A18 from the computer address bus (these are the two extra address lines — for some reason

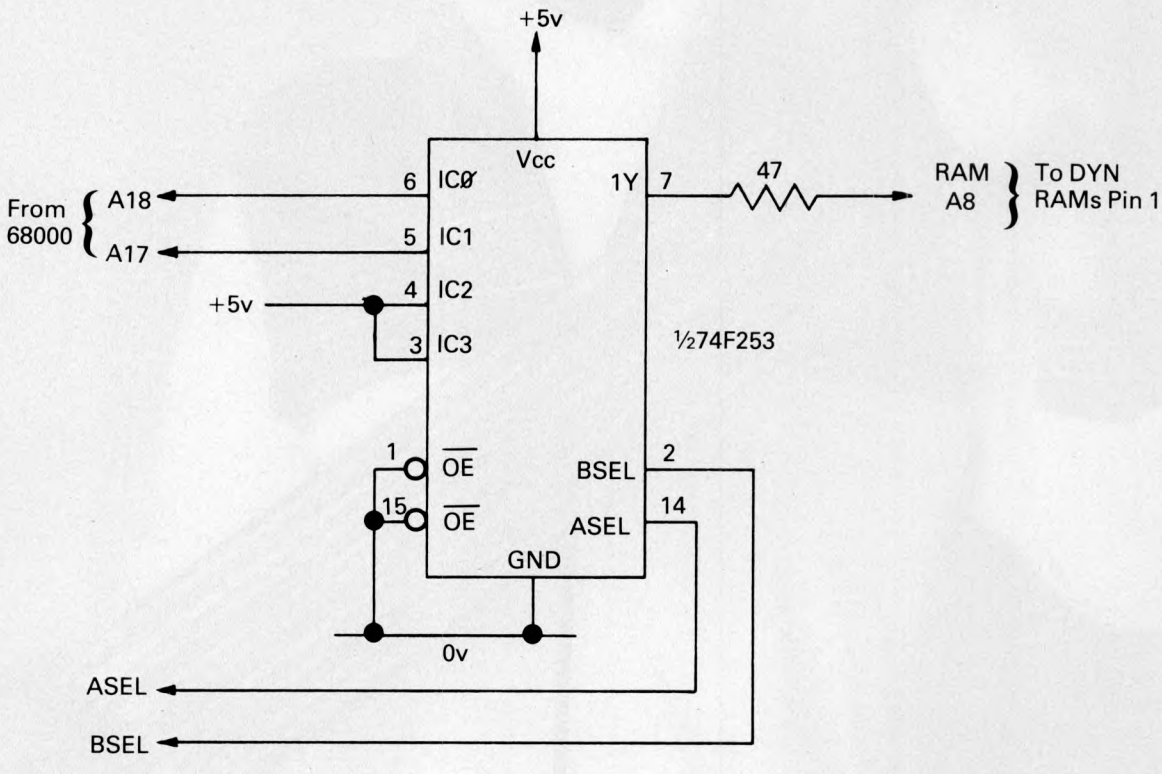


*Fig 2a A diagram of the pad layout*

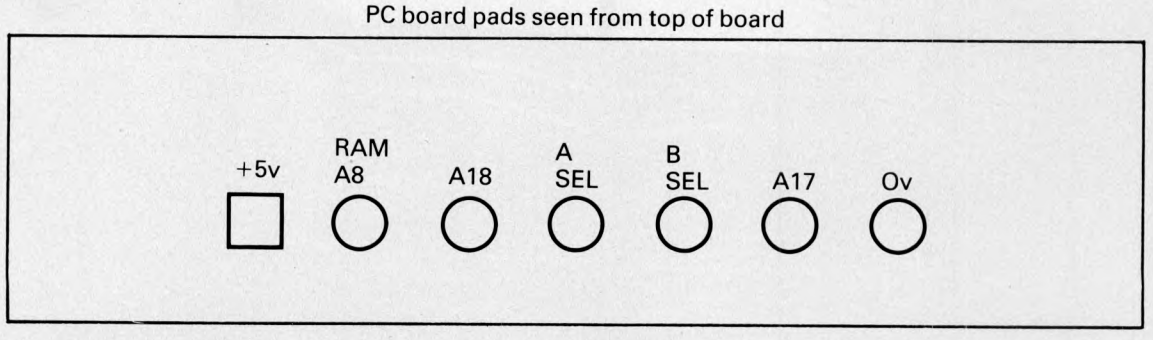


*Fig 2b The circuit required for multiplexing*

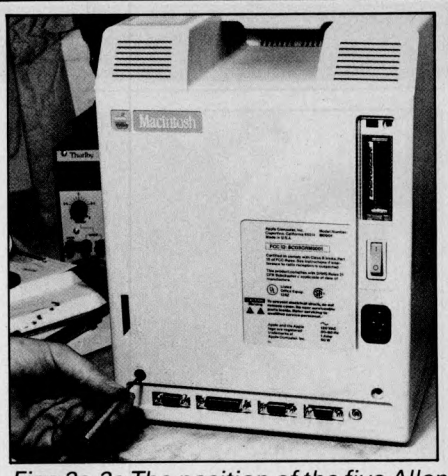







*Figs 3a-3c The position of the five Allen screws which hold on the back of the Macintosh*

Motorola starts counting its addresses at A1 and not A0); and 'A select' and 'B select' (my signal names) which are the two multiplex control signals that allow you to switch between A17 and A18, and, incidentally, the register which controls the memory refresh. A diagram of the pad layout is shown in Fig 2a, and the circuit required to do the multiplexing is in Fig 2b. Note that the output of the 74F253 is connected to the RAM A8 signal via a 47-ohm resistor. This circuit can be made up on a small piece of Veroboard or home-made printed circuit (as mine is) for direct mounting on the Mac board. (I suspect that Apple has a small hybrid or similar circuit that slots in at this point — our upgrade will have to be a more modest affair.) The pad spacing is 0.1ins and the +5-volt end is identified by a square printed circuit 'land', while all the others are round. It's important that pins 3 and 4 of the 74F253 are connected to +5 volts as shown or the circuit will not work properly. When you've made up this small board, you're ready to do the rest of the upgrade.

## *Making a Fat-Mac*

The best way to approach this job, as is often the case, is step-by-step.

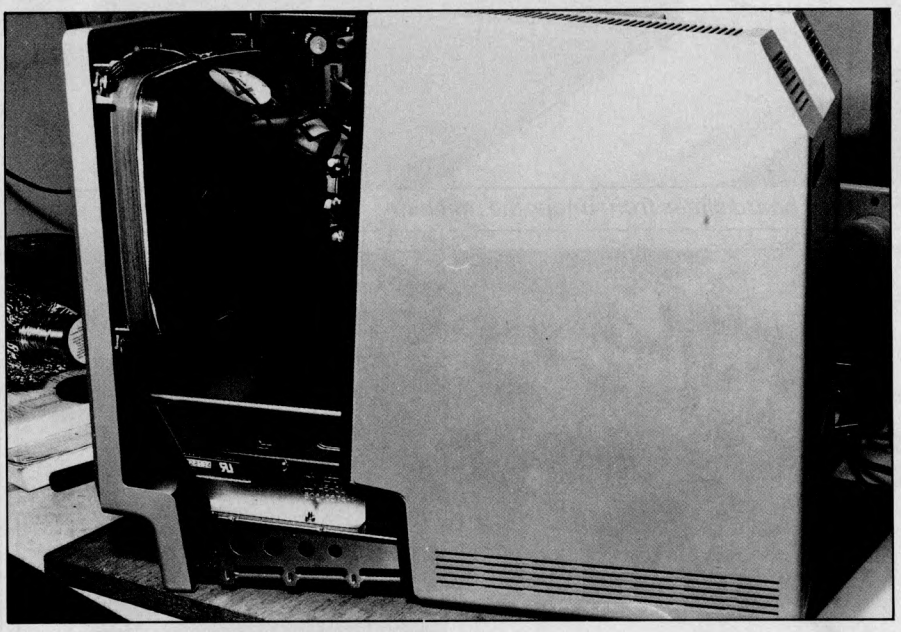

*Fig 4 The front and back separated*

1) Unplug everything — especially the mains! Find yourself an uncluttered area and get all the tools and parts to hand. Read the previous instructions thoroughly to make sure you haven't forgotten anything.

2) Remove the reset push-button from the lower rear left-hand side of the case (looking from the front) by gently prising it out. It should come out quite easily — whatever you do, don't force it.

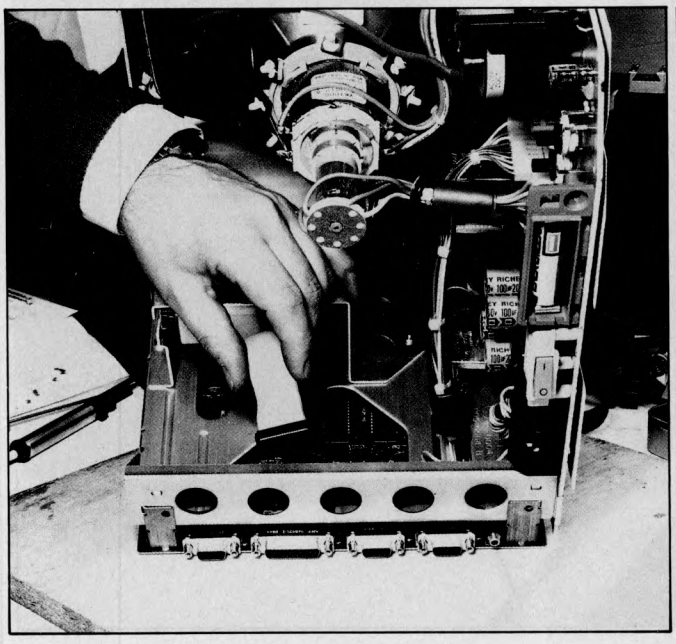

*Fig 5a The removal of the disk drive cable*

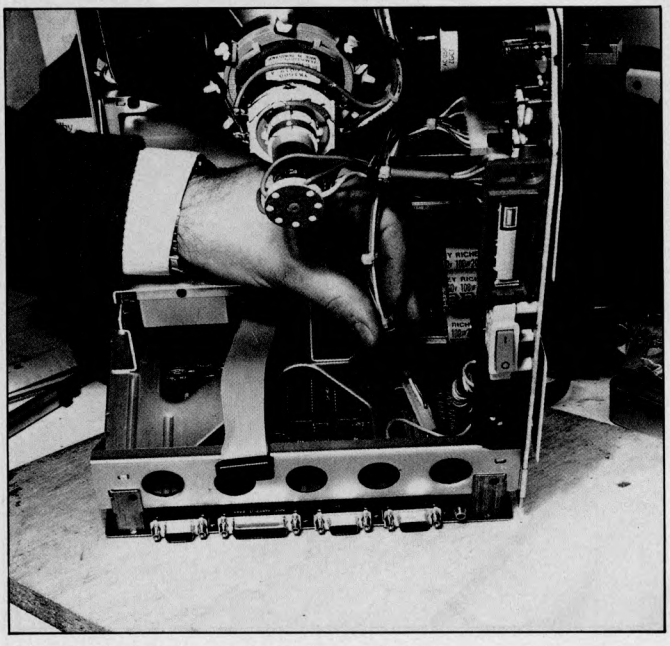

*Fig 5b The power and video connector*

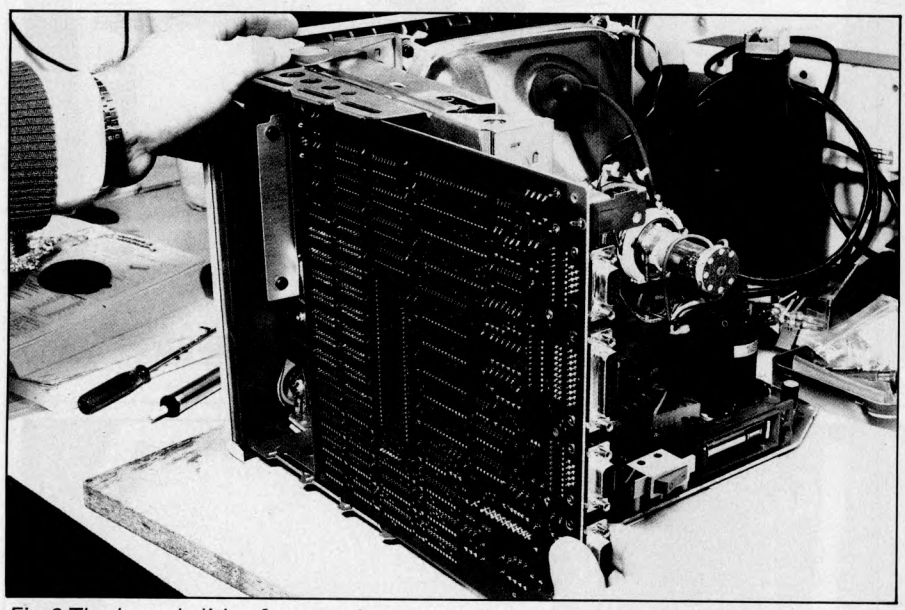

*Fig 6 The board slides from under the machine*



*Fig 7 Sucking the solder from the same side of the board as the iron*

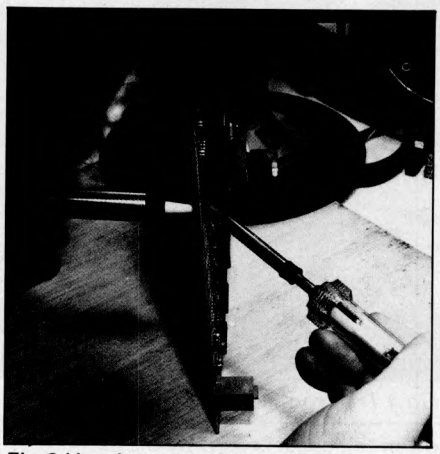

*Fig 8 Heating one side of the board and sucking from the other*

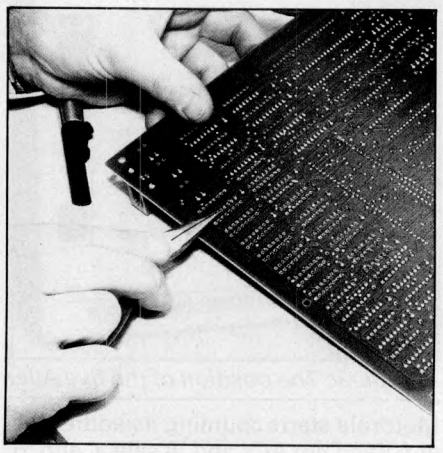

*Fig 9 Straightening the IC pins*

Use as broad-bladed a screwdriver as possible so as not to damage the plastic case. Take off the battery cover from the back of the case and remove the battery which powers the real-time clock.

3) You can now unscrew the five Allen screws which hold on the back, all of which are at the rear. Two are at the bottom corners, one is under the battery cover, and two are under the lip which forms the carrying handle (that's the reason for the long-handled Allen key). Figs 3a-3c show these positions.

4) Now comes the bit which at first seems impossible, but is really quite simple. The rear of the case slides off to give access to the interior. *Do not* try to prise the two apart by sticking a screwdriver into the gap just behind the front of the screen — you'll only ruin the case. Simply work out the front by pressing the screen surround forward while pushing into the battery compartment at the rear. It may also help to push gently on the mains plug inserted into

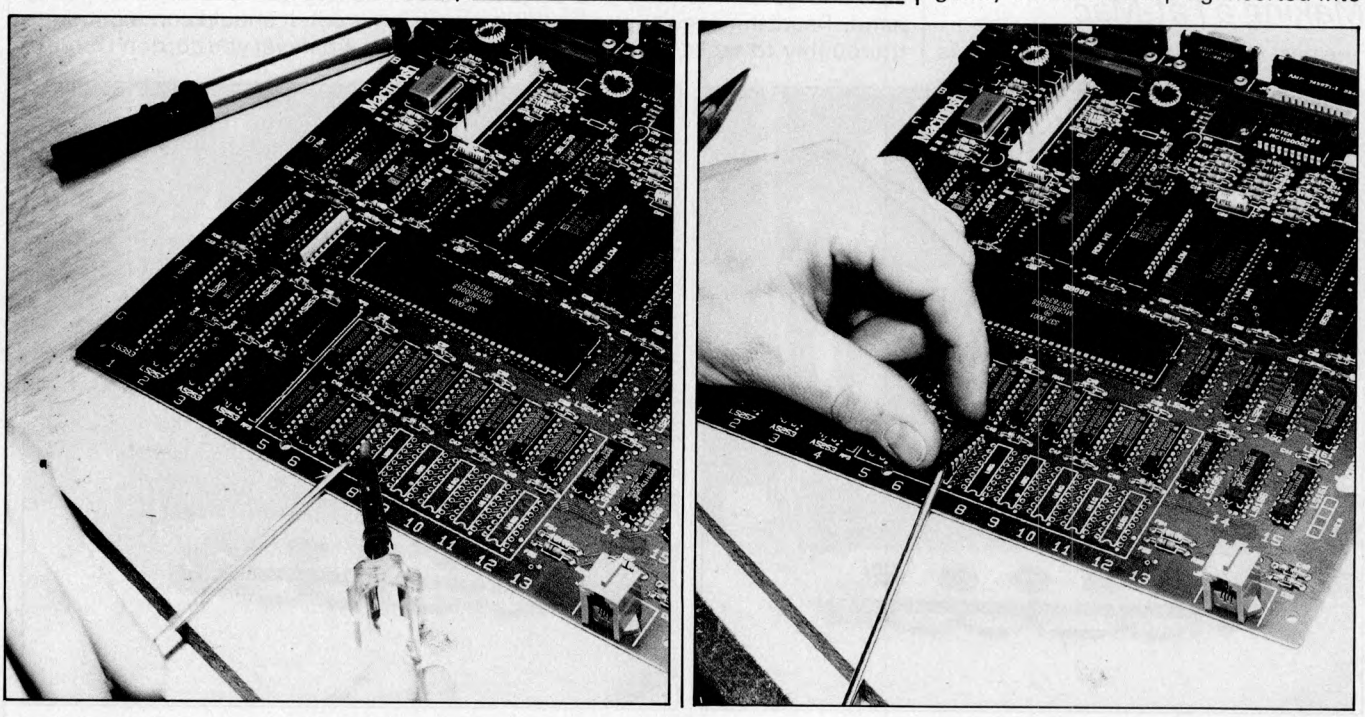

*Figs 10a & 10b Care should be taken when lifting the pads*

the rear mains inlet, bearing in mind the following warning. Above all, don't be too forceful — the case *will* come apart.

**Warning**: don't poke your fingers into the back of the mains inlet unless the Mac has been powered-down for some time. Apple has been rather naughty with the design, in that some time after the computer has been unplugged there is sufficient charge remaining on internal power supply capacitors to give you an unpleasant shock from the mains connector. It's wise to either switch off the Mac for some time before doing this upgrade or to discharge these capacitors (*if you know what you're doing*) through an appropriate resistance.

5) Eventually the back cover should slip off quite easily. Fig 4 shows the two parts separated.

6) Pull out the two connections to the main board. Fig 5a shows the removal of the disk drive cable and Fig 5b shows the power and video connector. There is also a metallised screen which normally sits over the rear serial I/O and printer connectors; this may have stayed in the back of the rear casing. Put this to one side.

7) The board should now easily slide from under the Mac (Fig 6).

8) You can now proceed to unsolder all the RAM chips shown in Fig 1. There are 16 altogether and numbers such as MCM6665 or 4164 will be inscribed on them. Make sure you don't take out anything else — you'll have enough of a job getting out the 16 correct ones. You can use several techniques to desolder these devices. If you're using a desolder gun you can try sucking the solder from the same side as the iron (Fig 7), or, holding the board vertically, you can heat one side and suck from the other (Fig 8). If you're not interested in the continued well-being of the 64k RAMs you're removing, then you can simply cut the legs off them and remove each pin separately. You should also clear the seven holes where your extra address decode circuit will go.

The Mac printed circuit board comprises four layers, with the two internal ones carrying +5 volts and ground. Consequently, there will be a significantly greater heat-sinking effect when you're trying to desolder the power pins of the memories (pins 8 and 16), so don't be surprised if this is the case and it's harder to melt the solder satisfactorily. Whatever happens, don't overheat the pads too much, and allow 'difficult' lands to occasionally cool down otherwise they will lift from the board.

9) Fig 9 shows the straightening of the IC pins under the board to ensure that they are not still soldered to the sides of the plated through-holes.

10) *Gently* work each old memory chip from the board. *Don't prise against the tracking which runs under the chips or you'll damage them*: lever against the edge of the board itself. Some holes may still require a little heat to loosen

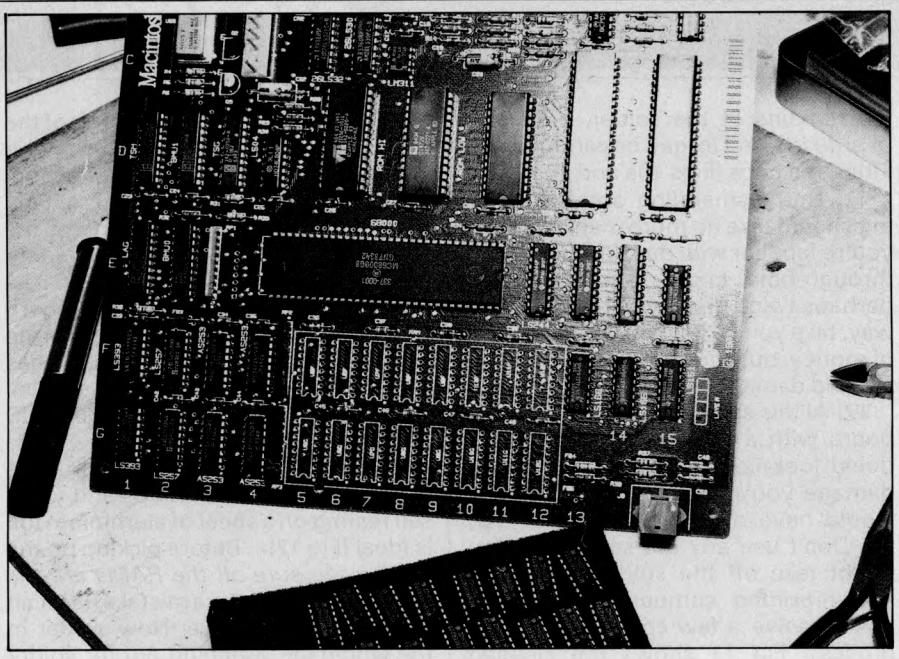


*Fig 11 The cleaned board ready for new RAM chips*

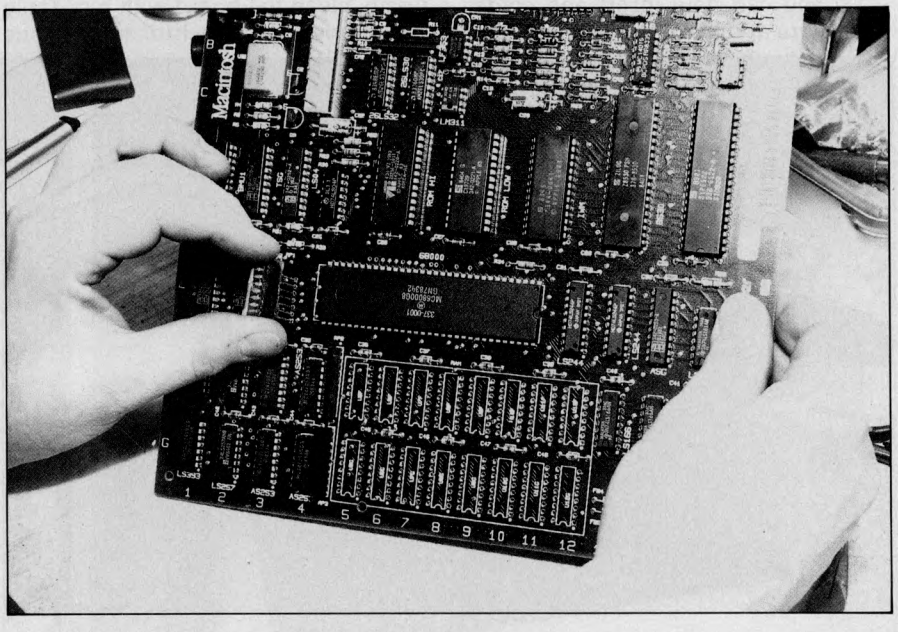


*Fig 12a Inserting the extra address decode circuit*

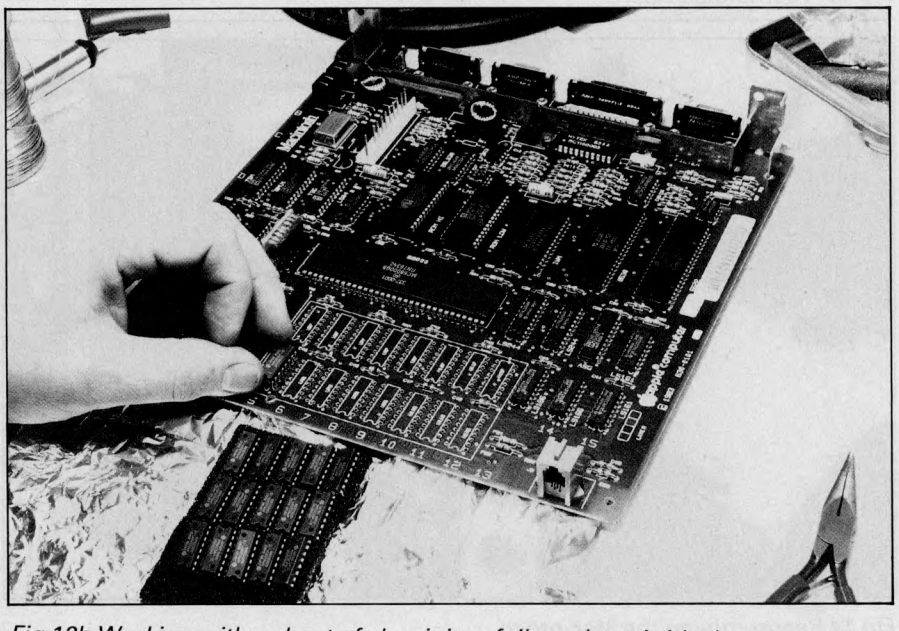

*Fig 12b Working with a sheet of aluminium foil as a base is ideal*

the remains of the solder, *but don't overdo it*. Don't forget, be careful when lifting the pads (Figs 10a and 10b).

11) This dismantling and desoldering should take no more than an hour if you're familiar with desoldering plated through-hole boards, but will take perhaps twice that if you're not. Either way, take your time. You're saving a lot of money, but you won't if you rush the job and damage the board.

12) At this stage, it's best to clean the board with a flux remover. Not only does it look nicer, but it will show up any damage you might have done which would have otherwise been covered up. Don't use any old solvent — you might take off the solder resist, the screen-printed component markings and dissolve a few connectors in the process. Fig 11 shows the cleaned board ready for the new RAM chips.

13) You can now insert and solder your extra address decode circuit into the row of seven holes on the left of the microprocessor chip (Fig 12a). Use wire links or pins to make the connection, and check the orientation of this circuit. Cut the track on the underside of the board between the +5 volts (square land) and the RAM A8 line next to it — *this is important*. A scalpel or sharp Stanley blade is suitable. Now insert the new RAM chips (don't put the old ones back in!) bearing in mind the usual precautions for dealing with MOS integrated circuits.

Working with the whole board, the packaging of the new chips and yourself resting on a sheet of aluminium foil is ideal (Fig 12b). Before picking up the iron, *make sure all the RAMs are the correct way round* — a mistake here can prove very expensive. Now solder in the whole lot, watching out for solder bridges between tracks in particular. Again, clean the board with a suitable flux remover and check for any obvious bridges or missing solder joints. Most importantly, make sure that no IC legs are folded under the chips instead of being inserted in the holes. Fig 13 shows a completed board.

14) When you're satisfied that all is well, you can reassemble the Mac by reversing the disassembly procedure. Take note of Fig 14, and ensure that the small tags on the back of the printed circuit board fit into the slots on the main frame. Now push back the disk drive and power connectors, making sure they are properly seated. Tilt the whole computer forward and drop the metallised foil screen over the rear connectors. Check whether the power supply and video board which sit vertically to the right (viewed from the rear) are seated in the slots down the front of the casing. You should now be able to slide on the back of the case. Make sure no wires are snagging and, above all, don't force anything. The five Allen screws can now be replaced along with the battery, its cover and the reset switch which simply pushes back into position.

15) Plug everything back in — mouse, keyboard, and so on — and switch on. If there's no smoke, breathe your first sigh of relief. Fat-Mac should now be asking for a disk. Put one in and shortly after, your new, enlarged Mac should be smiling its usual smile and pinging its usual ping. Another sigh of relief. Now check if *all* the memory is working; use a program that you know uses up a lot of memory. For example, if you have MacWrite, load some text and copy it continually to see how soon the computer fills up. Originally, this should have occurred after only seven or so A4 pages; now it should allow you to go much further. If it does, go out and celebrate with some of the money you've saved. If it doesn't, it means that the microprocessor is not 'seeing' all the extra RAM. Firstly, check your additional circuit; and did you cut the track between +5 volts and RAM A8 properly? If there's no response whatsoever from your Mac, you will have to check things a little more closely. Look especially at the soldering to the RAMs and their orientation.

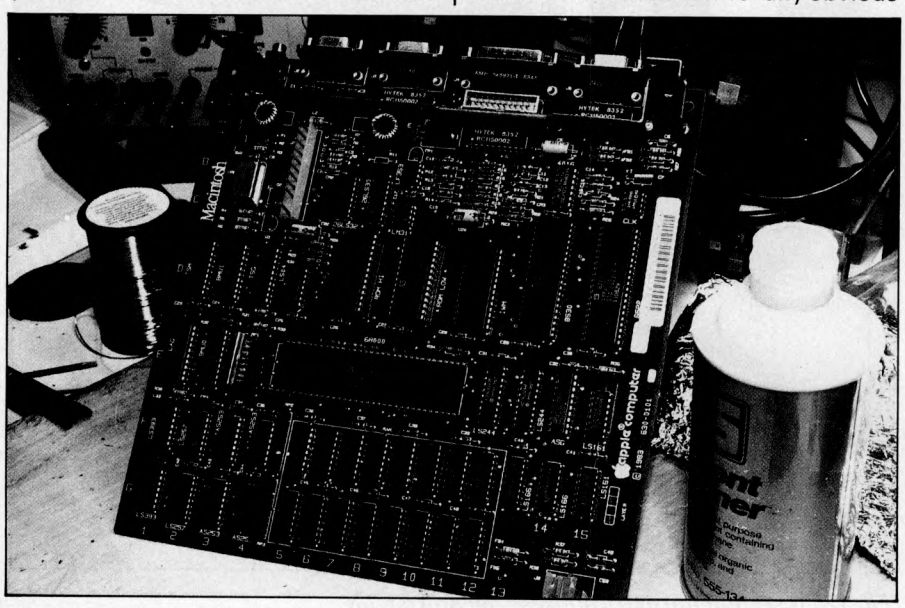


*Fig 13 A completed board*

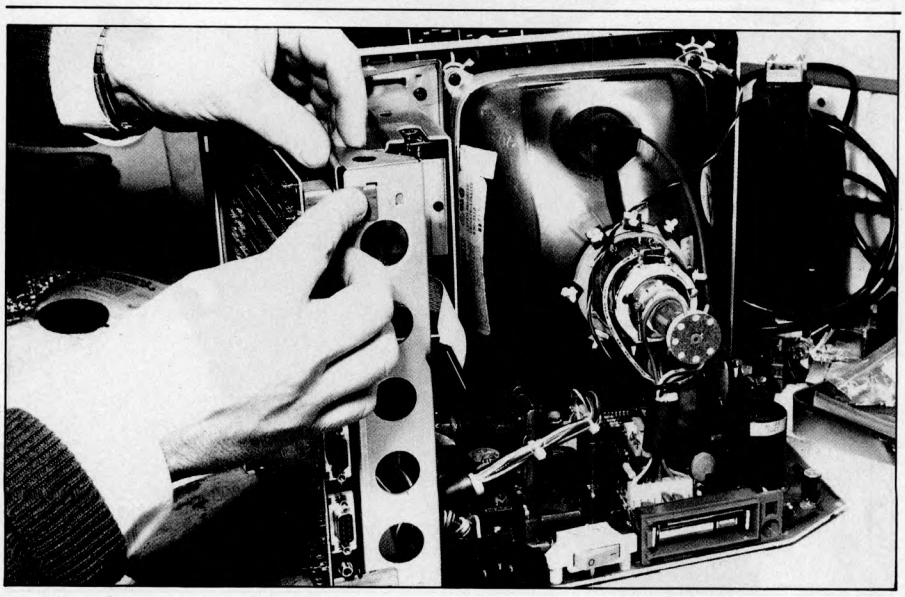

*Fig 14 Reassembling the Macintosh*

## *The finished product*

Don't be put off by some of the more dramatic warnings in this article. With patience the whole job should not take more than a couple of hours, and with care should not unduly threaten the health of your Macintosh. Apple and its dealers, however, will more than likely say that the job is too risky — but then they would, wouldn't they? After doing three upgrades without problems I'm convinced that it isn't too risky, although I have to add that *PCW* cannot accept responsibility for any damage caused by following this advice. **END**

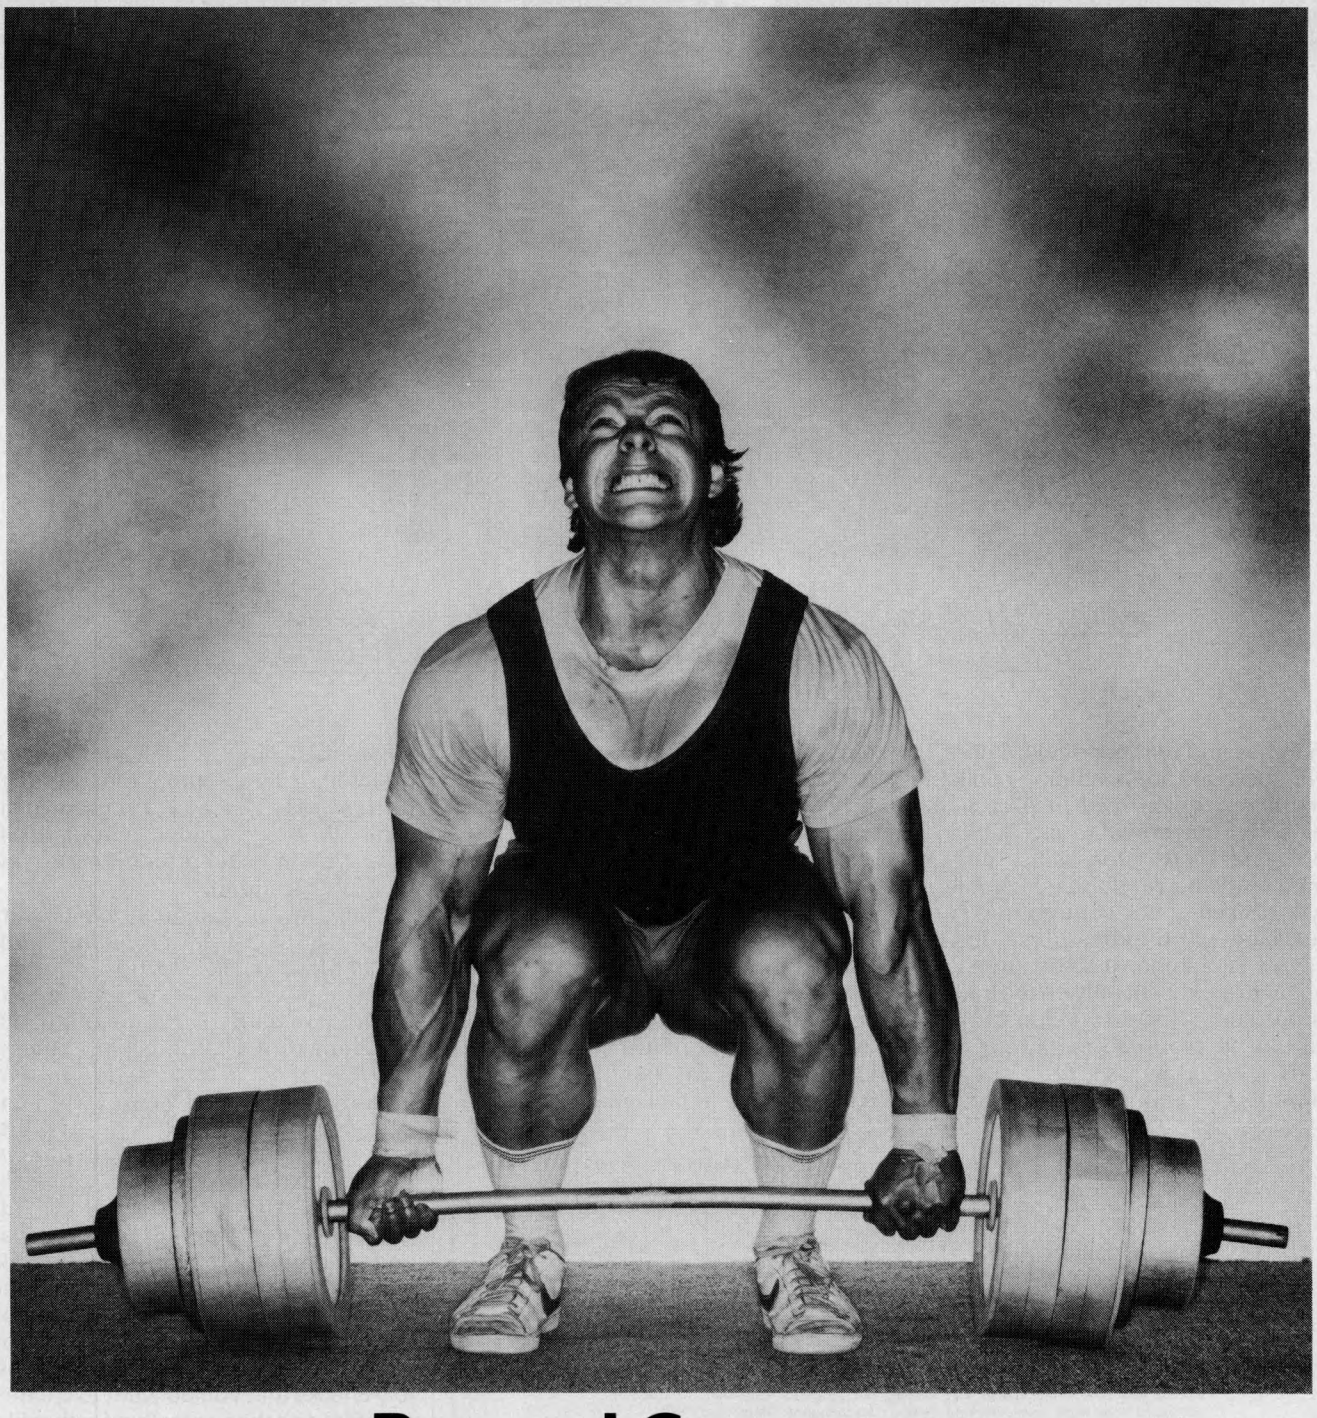

# Personal Computers. Are you taking on more than you can manage?

Some companies make the mistake of allowing their computer system to outgrow them. As a result they discover that they've taken on more than they can handle.

With an ICL Personal Computer you can build a system in your own time and at your own pace.

It can accommodate up to four people, each with their own screen and keyboard.

They're able to work alone, but still very much part of a team sharing common facts and information.

Each user can also have as many as four applications running at any one time, so a person can switch from task to task, at the touch of a button.

Nowadays, people tend to choose a computer by looking for their software first.

We can show that to get the best from software, your choice of hardware can be just as important.

We have over 100 expert dealers who'll demonstrate, or let you try out for yourself some of the thousands of programmes available on the ICL Personal Computer. And not only that. Staff training, and a complete back-up service unit are all ready to support you when needed.

To find out more about our personal computers and your nearest dealer, simply post the coupon.

We'd be very happy to take some of the weight off your shoulders, when it comes to personal computers.

I'd like more details on the ICL Personal Computer.
Please send me a free colour brochure ☐
Please contact me to arrange a demonstration with an independent dealer ☐
Phone ICL Infopoint on 01-788 7272 or post to ICL House, Putney, London SW15 1SW. PCW 7 85

Name_____
Position_____
Company_____
Address_____
_____
_____ Tel:_____
Nature of business_____
_____

THE PERSONAL COMPUTER

ICL IS A MEMBER OF THE STC GROUP OF COMPANIES.

**We should be talking to each other.** ICL



# SCREENTEST

# Samna+

*Kathy Lang looks at Thorn EMI's Samna+, an impressive word processing package with the capabilities to rival other dedicated systems on micros.*

An increasing number of word processing packages are becoming available for micros which rival in power and flexibility the software available on dedicated word processors. Indeed, some of the newer packages provide a level of facility not common even on dedicated word processors. Such a system is Samna, a word processor available at present only on the IBM PC. Samna comes in four versions: Samna I, II and III are increasingly powerful word processing packages, while Samna+ is Samna III word processing plus two extra features—a spreadsheet and a document indexing facility.

Samna III requires a minimum of 256k memory; Samna+ needs 384k. Samna is not cheap — Samna III is £490 while Samna+ is £640 (you can upgrade from one to the other for the difference between the two prices) — but, as you will see, an impressive set of facilities is provided for your money.

Installing Samna is straightforward: you just run a program called Instal that is provided with the package. This carries out the initialisation procedures such as installing a printer, and sets up a directory called Samna, together with (on hard disk systems) a program in the root directory which automatically takes you into the right directory and loads the program.

Unlike most systems, you are immediately placed in an editing mode rather than having to go through a menu option first — all functions in Samna are carried out as commands within the ambit of the editing mode. The screen displays the word READY! in the top left-hand corner and the current column, line and page number in the top-right, together with the name of the document being edited. Initially, this will be the so-called 'scratchpad'. You can start typing this in right away and create a file in which to store the text later, or print out what you have typed without storing it. Alternatively, you can set up a file by pressing a function key and naming the file (Samna sensibly checks that you do want to create a new file) and then enter text for that file. If the file already exists, you can enter its name rather than the name of a new document — you have access to directory information at this point if you need it. Another option is to go into spreadsheet mode and create a model, but more about this later.

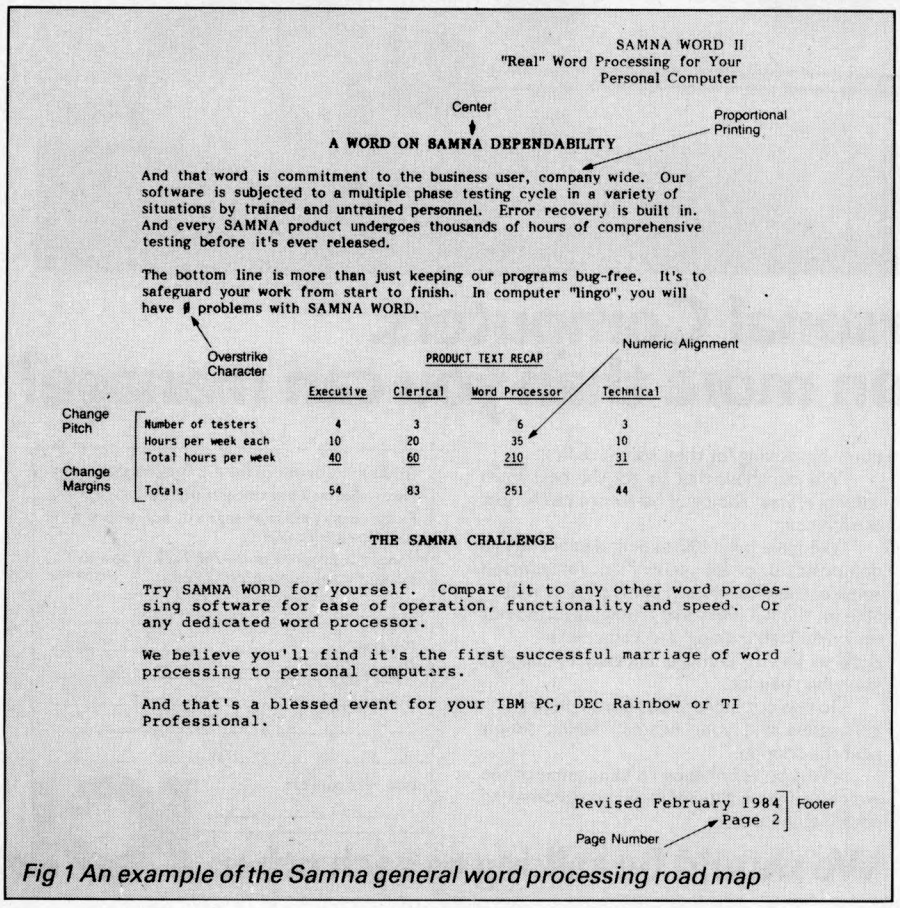


*Fig 1 An example of the Samna general word processing road map*

## General editing

Once into creating or editing a document, Samna provides a good range of features for amending text. The cursor can be moved by character, line, word, sentence, paragraph and page, to a particular page number and to the start and end of the document. All except the character move are circular: that is, moving a word left at the start of a line moves to the last word on the previous line. You can also place marks into the text to which the cursor will jump, but these are identified only by their

relative position, so you can go forward or backward to the 'next' marker but not to a particular marker. When adding text at the end of a document, you can scroll the text so that some blank screen is in view; this avoids the common problem of having to enter new text on the bottom line, with the whole screen being refreshed after each line.

Samna is usually in Overtype mode: that is, any text entered replaces what is already there. To insert new text, you must enter Insert mode. In this mode, no cursor movement is allowed except backspace (which deletes the character preceding the cursor), so if you want to make several small insertions you have to take the rather tedious approach of invoking and cancelling Insert mode each time. Text may be deleted either by using backspace, or by pressing the DELETE key and then using the cursor movement keys to shade the area to be deleted. This works well, and saves having a lot of special, separate functions keys for cursor movement and for deletion, as do most packages. There is also an UNDO command which restores the most recent deletion—a most useful feature.

Powerful automatic search and replace features are provided, allowing you to search and replace forwards and backwards by exact match or ignoring case and emphasis, and by whole words or parts of words. Replacement can be automatic or with confirmation from the keyboard.

Samna allows you to copy or move sections of text, either lines or columns. However, if the amount you want to move is more than a paragraph or so, you must name a temporary file to act as a working area to hold the text being moved. The same mechanism allows copying of text between documents.

One of Samna's most unusual features is the ability to use a number of different sets of keyboard characters; these include several foreign language sets with accented characters which display correctly on the screen, as well as a Greek/Maths symbol set. Invoking a different character set involves just a couple of keystrokes. Another unusual and helpful feature is the ability to draw lines around tables and boxes on diagrams, although the exact representation of these on your printer will depend on the print wheel you use.

When you have finished typing, you save your file with a function key. According to how your package defaults are set up, Samna will either keep no back-up copy of your text, or two (so that you have grandfather-father-son copies) — there doesn't seem to be a way to keep just one back-up copy! If you have made a complete mess of your editing session, you can exit without saving your changes, but Samna will ask you to confirm that you really want to do that. There is no way to save an interim copy of your document and then continue editing without re-specifying the file name.

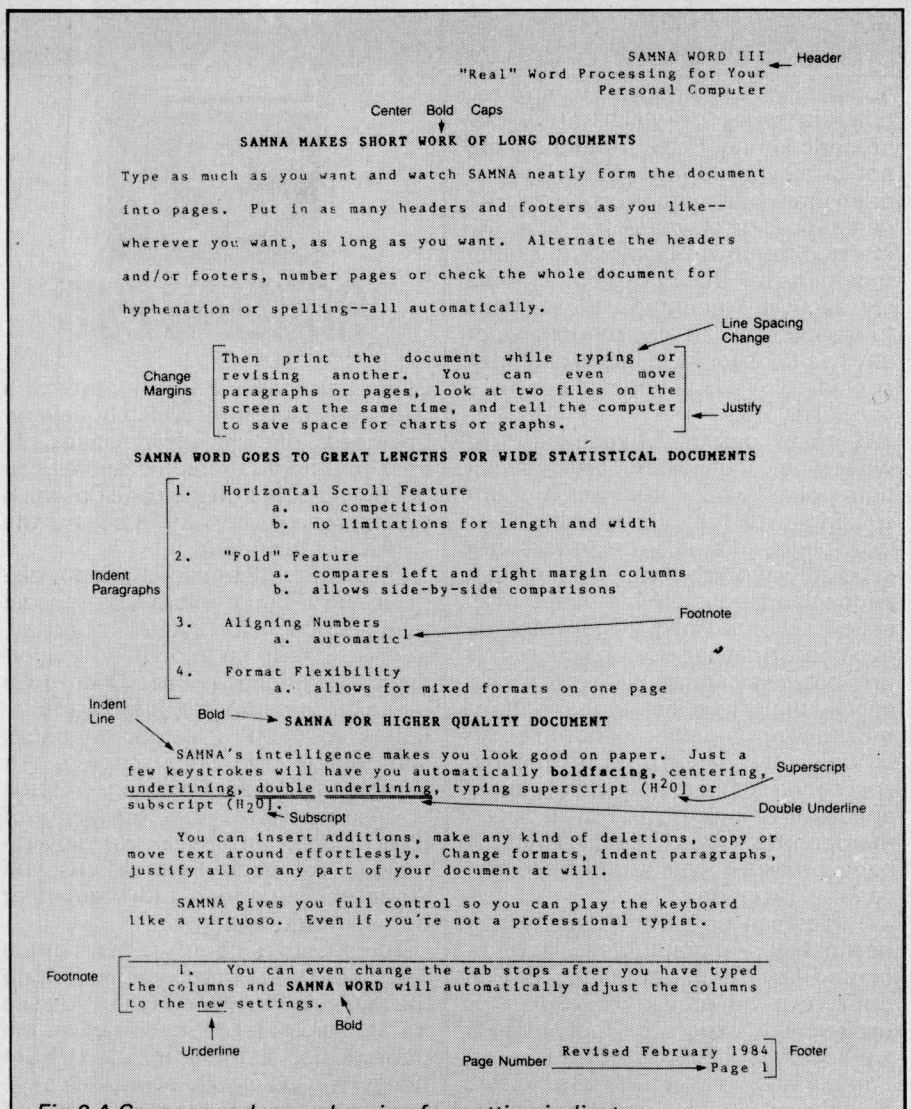


*Fig 2 A Samna road map showing formatting indicators*

## Text formatting

Samna displays on the top of the screen a ruler which shows the left and right margins, and tab positions. You can change these at any time while typing a document; changes are stored with the text and automatically activated as the cursor moves around the document. The package also displays a border around your text so that you see the text plus two hashed borders covering the area which would otherwise be blank—I found this quite a helpful approach, but you can turn off the border display if you don't like it. The same shading is used to show page breaks. Unlike many packages which mimic dedicated word processors, Samna treats a document as a continuous whole, so that you can at any time see the end of one page and the beginning of the next together on the screen, with the shaded boundary between.

Text is formatted to the current margins onscreen, including justification if that is set on — again, many packages do not show text justified on the screen. As text is inserted and deleted, reformatting automatically takes place. Sometimes Samna seems to get in a muddle with the reformatting and spreads a line out with far too many spaces, but invoking and cancelling Insert mode puts the problem right.

Samna allows you to have lines of text spaced in increments of 1/48th of an inch if necessary, but this is specified in units of lines where a line is 1/6 of an inch. So, if you want one-and-a-half line spacing, you ask for 1.5 spacing and that's fine; but if you want something a bit more complicated, it is less easy to work out what is needed. This should not worry the average user, who tends to think in terms of single, one-and-a-half, double-line spacing, and so on. More esoteric requirements are harder to specify, but at least you can specify the full range of daisywheel printer capabilities, unlike the majority of packages of this type which prevent you from exploiting the printer's abilities to the full. Samna is a little less generous with pitch variation—you can choose 8, 9, 10, 12 or 15 pitch, again more than most packages will allow, but a smaller range than most word processing printers can handle.

You can indent paragraphs to tab markers, either directly or by using the Section Outline feature. This is a very useful facility for anyone who has to prepare long, numbered documents like manuals, as it allows you to specify up to six levels of numbered indenta-



# SCREENTEST

tion (1, 1.1, 1.1.1, and so on), using three different styles of which the wholly numeric is one. Section numbers are not displayed during editing, only at print time, but the corresponding indentation is displayed. As sections are inserted, removed or moved to different parts of the document, Samna automatically renumbers the sections to match. You can also mark these or any headings for inclusion in a table of contents, for which you can specify a special layout.

Samna does not hyphenate text while typing, but will suggest hyphenation points while proof-reading (for spelling errors) if you request it. Awkward page endings can be prevented in several ways. You can specify that widows and orphans (single lines at the start or the end of a page) must be avoided, or that page breaks must occur only between paragraphs. You can also specify that a specific number of lines must be kept together, either to avoid an unwanted page break or to allow space for a separate figure which must appear on a single page. You also have the opportunity to dynamically adjust page breaks if you request the Repagination option.

Tables can be typed using text or decimal tabs, and automatically reformatted if the tabs are changed. Columns can be moved or copied as desired. For extra-wide tables which will not fit within the width of the screen, Samna has a useful feature called 'folding' which allows you to see the left-hand side of the table (where you usually enter the titles) together with the right-hand side, and with the middle 'folded' away. There is also a Calculator mode which allows you to carry out arithmetic operations, using a totalling register plus two user registers which can store intermediate results; the effect is rather like a pocket calculator with two memories.

Headers and footers can be created, to be printed on every page or just on specified pages, and you can have several in the course of one document.

Samna also allows true footnotes, a very unusual feature which not everyone needs, but which is indispensable for some applications. Footnotes can be printed either on the page on which the reference occurs, or in a list at the end of the document.

Formatting instructions are not displayed in Samna unless you request them, although you can tell by inspection if text is to be underlined (underlined text is shown underlined on a monochrome monitor, and in a different colour on a colour monitor), subscripted or superscripted, or emboldened; forced carriage returns are also shown. As marks for change of pitch and so on are shown only on request, you don't get problems with the marks interfering with formatting during normal typing.

The upshot of all this is that Samna has, in my view, succeeded in getting the extent of WYSIWYG (what you see on the screen is what you get on the printer) just about right. Apart from things you physically cannot display, such as changes in character size and true porportional spacing, the major omission is in displaying changes in line spacing, and here it seems that the disadvantages of showing double-spaced text as such onscreen outweigh the advantages.

## *Printing*

Samna supports a wide variety of printers, and allows you to specify six different printwheels for use with each one. If you want to change printwheels within the text — for instance, to use a different character set — you must place a 'change wheel' mark in the text, and Samna will stop printing for you to make the change. When printing, text can be emphasised by single or double underlining or emboldening, or you can overstrike text.

If you want to type short letters or if you are a beginner, there is a Typewriter mode which simply echoes what is typed on the screen directly to the printer.

## *Repeated text*

Samna allows you to store up to 10 abbreviations which are accessed by pressing a function key followed by a digit. The total length of all 10 items accessed in this way may be a maximum of 500 characters, which should allow sufficient scope for most needs. The stored characters can include instructions as well as text, so you can use the abbreviation facility to put together sequences of commands which you frequently execute.

For longer sections of text which are used in many places in one document or in several documents, you can create standard paragraph libraries, called 'glossaries' in Samna. These consist of sets of named paragraphs or longer sections of text, recalled by name from named glossary files.

Samna also provides a mail-merge facility, which allows you to create a template document to be merged with variable information to create several different copies of the same basic letter or report. Variables to be entered in the template document are referred to by name; you can then use the same names to create a form, to be filled in, for each set of values to fill those variables. This approach is much easier for novice users than simply entering strings of names and addresses interspersed with commas, as most micro packages require, and quicker than those which oblige you to use variable names in each record but do not use a form with these already provided. Records are stored in order by the first field in each so that you can retrieve




*Fig 3 The Samna keyboard layout*

individual records for editing. You can also specify start and end points for the values of this field if you want to print just a subset of your letters; this provides a very primitive selection capability.

You can request that the records be reordered by any one field before merging — useful if, for instance, you want to output labels by post office sorting code. However, I couldn't find a way to get multi-column labels printed — there is a simple multi-column feature, but I could not see how to apply it to automatic merging.

## Housekeeping

Documents can be copied within Samna; you can also copy whole directories, or parts of them, using the same wild code facilities as those provided in DOS. Files do not need to be in the Samna directory — you can set up path names, and edit documents from other directories. Samna allows you to import ASCII text files, and to output documents in ASCII format.

Samna+ provides an extremely powerful method of finding documents which meet particular criteria. You can use a feature called Word-base to create an index of all the documents in one directory, or just some of them. If you did this with, say, a set of reports on individual projects, you could then use the index to find all the projects with deadlines in the next three months or with a priority greater than a specified lower limit. Or you could index all committee minutes for the last three years, and then pull out all references to a particular discussion topic. Word-base thus provides simple, text-oriented data management features within the context of a word processor. Like many of Samna's more sophisticated features, not everyone will need it — but in many applications it could justify the cost of the software by itself.

Samna also provides a spelling checker, which is invoked from within the package. You can use your own dictionary in addition to that provided with the package, and add words to your dictionary. You can only have one dictionary of your own on each disk, so on a hard disk system you would, if you needed more than one dictionary, have to store all but one under pseudonyms until you needed them. Again, not a problem for most people, but irksome if you do not have this requirement. While checking, the speller offers alternatives to misspelled words if it can, and Samna automatically reformats paragraphs as words are corrected.

You can create a printable index based on the contents of any document. Most packages which allow this expect you to mark every occurrence of words to be indexed. Samna takes the opposite approach of allowing you to enter a list of words to be indexed; it then creates an index, showing the page numbers on which each reference occurs. This index is an ordinary Samna document which can be edited in the usual way.

## Spreadsheet

The Samna+ spreadsheet works in partnership with the word processor so there is always a text 'view' of the spreadsheet, and you can take copies of it or parts of it and insert them in the text as needed. These copies can be kept in step with changes in the calculation version of the spreadsheet if you wish. You can also specify 'floating' cells for insertion within the actual text of the document, which can also be kept up-to-date as the cell values change — perhaps to include varying figures such as total profits in textual descriptions.

The maximum size of the spreadsheet is 6400 cells, with a maximum of 250 characters on each row. The usual range of arithmetic features is included, plus a number of functions such as net present value, loan rate, standard deviations and variances. Recalculation may be automatic or manual, and you can determine the order in which recalculation takes place.

## In use

Samna commands are invoked by function keys, or by a function key followed by a character key. Throughout, extensive help is provided for beginners, although you can decrease the level of help as you become more experienced. If the prompts provided are insufficient, you can access more information by pressing a help key — surprisingly, this is the ESCape key. When you need to cancel commands, the ALT key, rather than ESCape, is used. The modes of use are the same for both the word processing and spreadsheet parts of the package, including cursor movement, block copying and moving, and so on, so it's quite easy to move between the two.

Other aspects of the package will be of particular interest to experienced users. You can have two windows open at once, allowing you to view either two parts of the same document or a section of each of two documents. I've mentioned the fold facility; if you have a graphics board, you can also zoom pages of a text document to see the shape of a complete page on the screen (though of course without being able to read the text).

Samna comes complete with a reference manual, a reference summary and a set of stickers to identify the special keys. There is no tutorial guide as such, although there is a 'Read Me First' booklet to get you started, and a tutorial disk is provided which contains a set of self-paced lessons. These allow you to select sections of the package which you want to learn about, and provides a reasonable way of getting started with the word processor. There are however, no tutorials on the spreadsheet.

## Conclusion

Samna III provides a powerful range of word processing facilities with a high degree of WYSIWYG, and includes a spelling checker, the ability to create an index for a document, and some unusual formatting features such as outlining and true footnotes. It is remarkably easy to use for such a powerful package. Not surprisingly there a few small glitches, but these should not affect its use to any significant degree.

The spreadsheet which forms part of Samna+ also has a good range of features, and is well integrated with the word processor. The Word-base facility would be invaluable in a wide range of applications.

All in all, other packages providing word processing facilities on micros to rival the dedicated systems had better look out.

---

*Supplier: Thorn EMI Computer Software, Thomson House, 296 Farnborough Road, Farnborough, Hants GU14 7NF. Tel: (0252) 543333.* **END**

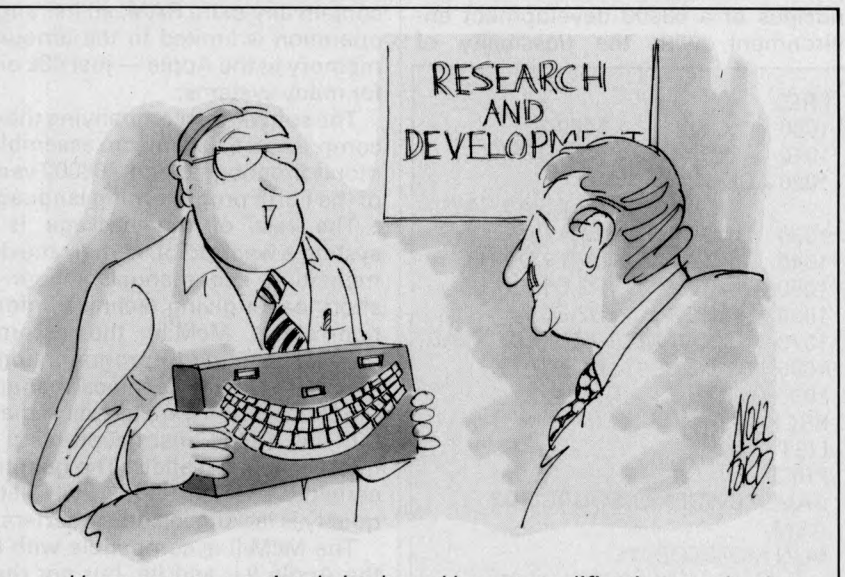


*'. . . and here, you see, a simple keyboard layout modification emphasises the user-friendly aspect'*




# McMill 68008 card

*The McMill package for the Apple II+ and the Apple IIe comprises an economically-designed 68008 processor card, software and a variety of books and manuals. Mike Liardet looks at this ideal aid to learning 68000 code.*

A co-processor card transforms the Apple II into a different machine. The card contains a processor with as many support chips as is necessary to interface it to the Apple, and can be inserted into the Apple via one of the expansion slots. When the machine is activated, the processor mounted on it takes over the running of the system, replacing the Mostek 6502 processor that is normally in control. The processor is the most fundamental component in a computer, so the effect of installing a co-processor card is quite profound — the computer equivalent of a transplant.

With the exception of the Z80 and super-6502 cards, most of the co-processor cards offer access to only very limited software. They are aimed more at the assembler programming and hardware enthusiast rather than the applications user.

This is the thinking behind the McMill 68008 card. With the assembler included in the package, it provides an excellent vehicle for learning 68000 assembly language. Utilising the Apple's versatility, it can also form the nucleus of a 68000 development environment, with the possibility of 'downloading' the code to 68000-based home computers such as the Sinclair QL. The McMill's name implies that it offers the same 'mill' (processor) as the Apple Macintosh, and broadly speaking this is true, but be warned: it does not enable you to run Macintosh software on the Apple II.

```
PR£3
1000     .OR        $4000
1010     .TF        PCWDEMO
1020 ADD64
         MOVEM.L    D2-D3/A0,-(A7)
1030     MOVEA.L    12(A7),A0
1040     MOVEM.L    (A0)+,D0-D3
1050     ADD.L      D3,D1
1060     ADDX.L     D2,D0
1070     MOVEM.L    (A7)+,D2-D3/A0
1080     ADDI.L     £16,2(A7)
1090     RTS
PR£1
LIST
PR£3
SAVE PCWDEMO.SOURCE,D2
ASM
RUN MONITOR,D1
```

*Fig 1 Setting up a simple 68000 subroutine*

## The McMill package

In addition to the co-processor card, the McMill package includes a number of manuals, books and software: everything you need to develop, test and run 68000 code, plus a little more besides.

The McMill card is surprisingly small, about the size of an Apple disk controller card, and contains just eight socketed ICs which are dwarfed by the giant 68008 processor. It was designed by an ex-Apple engineer, Ron Nicholsen, and has an economy of design worthy of Apple originator Steve Wozniak himself. Unlike some 68000 co-processor options, all the circuitry is on a single card (half a card, really) and there is no need for a separate power supply. The only snag is that the card doesn't contain any extra RAM, so its range of operation is limited to the amount of memory in the Apple — just 48k or 64k for many systems.

The software accompanying the card comprises a 68000 macro assembler, a monitor/debugger and a 68000 version of the Forth programming language.

The rest of the package is the system's weak point, namely the documentation and manuals. There is a short leaflet giving technical information about McMill; the assembler manual; a guide to programming the 68000; a hardware technical manual for the 68008; a software technical manual for the 68008 instruction set; and miscellaneous leaflets. The quantity is certainly present — it's just that the quality is lacking in some quarters.

The McMill is compatible with both the Apple II+ and IIe, but not the IIc. Installation is very simple — you just slide it into a vacant slot in the Apple. The McMill does not affect the normal operation of the Apple until it is activated under software control. In particular there were no problems with a Microsoft Z80 card alongside it: both cards operated normally, ignoring the presence of the other, and both remained 'off' for normal 6502 operations. With the two cards in place it was possible to run CP/M applications, normal Apple programs and 68000 software without once opening up the Apple or flicking any switches. All three processors can be activated under the appropriate software control embedded in the application programs.

All disks supplied with McMill are in Apple DOS 3.3 format and can be copied in the normal way using Apple DOS utilities. There are no instructions for doing this, but anyone contemplating work with the 68000 assembler ought to be enterprising enough to manage this with instructions from Apple's own manuals. When the disks are copied, any one of them can be booted in the same way as any other Apple DOS disk. It is natural to choose the macro assembler disk first.

## The macro assembler

The macro assembler was produced by S-C Software, and one of its most surprising features is that it does not actually use the McMill card at all. It is implemented in 6502 code and will operate even if the McMill card is not present, but of course the output-executable object code is only usable by a 68000 processor such as the one on the McMill.

When the macro assembler disk is booted it presents a menu which includes the option to 'load the assembler into l/c'; attempting to discover the meaning of 'l/c' introduces the manual. Although the assembler manual is well written it only documents the S-C 6502 macro assembler, and the only 68000 acknowledgement is a few short introductory pages. This is not as bad as it seems: about 75 per cent of the

assembler is unchanged for 68000 operation and the other manuals in the package make up the shortfall, but it is still not easy to get started. Eventually you will find that 'l/c' stands for 'language card', and this is the preferred option (if you have one) as it frees more of the main board memory for the text of the program, allowing bigger programs to be created.

One of the most appealing features of the S-C assembler is that the input, editing and other activities involving the creation of an assembly source program are as similar as possible to the normal Applesoft DOS procedures for developing an Applesoft Basic program. This makes it very easy for seasoned Applesoft programmers to adjust to the new system.

The assembler contains some powerful facilities such as conditional assembly and macros, and can respond to a number of directives embedded in the code; these can control the assembly process. The most notable omission is the lack of facilities for referencing labels defined in other files. If an assembler source file gets too big and must be split, the management of external label references between files falls on the programmer. More sophisticated 'relocatable' assemblers can automatically deal with external references. As the assembler source must be fully loaded into the Apple's limited memory space for editing, this could become a problem for the development of medium-to-large applications.

## Coding and debugging

Due to space restrictions, it is not possible here to give a full assessment of all the features and facilities of the 68000-range processors, or of the assembler and monitor provided with McMill. But in order to give a flavour of the complete system, I'll present a short session to develop a simple routine to add two 64-bit integers. This will give some idea of the power in the 68000 instruction set.

Using the S-C assembler we can enter the sequence shown in Fig 1. Except for the actual program content in lines 1000 to 1090, this session should be familiar to regular Applesoft users. PR£3 activates an 80-column display card in slot three (assuming one is present — it is not essential to have one), then the lines of code are entered in the normal way. All the normal conventions for line-numbering and editing apply, and the familiar Applesoft screen editing facilities can be used in an almost identical fashion. PR£1 activates the printer, and the next statement, LIST, lists the program on the printer. PR£3 reselects the screen for output, and SAVE saves the program in a file called PCWDEMO .SOURCE on the disk in drive two. (In CATALOGs the program is listed as an integer-Basic type, which it is not, but this is a difficulty caused by the Apple DOS filing system which only allows four types of file.)

ADD64 is called by

```
JSR ADD64
.DA $12345678,$9ABCDEFO
.DA $99999999,$AAAAAAAA
. . . . . .
```

and resumes execution at '.....', with all data and address registers preserved except D0 and D1 which hold the result of adding the two 64-bit numbers following the JSR call to the subroutine.

Line 1020 saves the values of data registers D2 and D3 and address register A0 on the stack. This single instruction can be used to save any combination of registers. Address register A7 is the normal stack pointer, used automatically by JSRs for holding the return address. The '.L' in the instruction means that long (that is, 32-bit) values are to be used. In common with most instructions, '.W' and '.B' for word and byte values are also available.

Line 1030 reads the subroutine return address from the stack into address register A0. This is the location where the numbers are stored.

Line 1040 reads the two numbers into data registers, D0 to D3, and 1050 and 1060 adds them together, with the result in D0 and D1.

Line 1070 restores D2, D3 and A0 from the values held on the stack.

Line 1080 adjusts the return address on the stack so that the return point is after the numbers and not at the start of them, and 1090 causes return from the subroutine with the result.

The ASM command assembles the program at the M68000 address of 4000 hexadecimal, saving the executable code on the disk in a (binary executable) file called PCWDEMO (the 'assembler directives' in lines 1000 and 1010 cause this to happen). The RUN command runs a normal Applesoft program that loads the monitor and the PCWDEMO program, and then enters the monitor.

At this stage it is useful to use the monitor to run the program for two reasons: firstly, because the program may need debugging; and secondly, because the monitor handles all the details of activating the 68008 processor so that it can execute the code. If the monitor were not used, the executable file would have to start with a few 6502 instructions in order that when it was BRUN from Apple DOS, it could switch on the 68008 and start it running on the right piece of code. This does not involve many instructions, but as the McMill's addressing of the Apple memory is different from the 6502 some careful thought is needed, and this is a complication best avoided in the early stages.

Using single-letter commands, the monitor allows the user to view and change memory locations and registers, start program execution, and so on. The more powerful facilities include the setting of break points (to stop the program executing at a pre-determined point) and a single-step facility (to execute one instruction at a time). Using these monitor commands, it is possible to set up the registers to test the loaded ADD64 routine.

There is one undocumented facility in the monitor which I only hit upon by accident. It has a 'reverse assembly' facility that unscrambles a block of code into a close approximation of the original assembler source. With reverse assemblers it is not possible to be fully accurate, but the output is close enough to help you find your way around if you compare it to the original source.

## Conclusion

For any Apple owner with a tight budget but who wishes to start 68000 coding, the McMill package should prove invaluable. An obvious alternative would be to buy a Sinclair QL with a 68000 assembler (for example, Metacomo's), which would mean sacrificing the keyboard and disk drives of the Apple for the QL keyboard and microdrives.

Seasoned Apple programmers will quickly grasp the workings of the S-C assembler as it is similar to Applesoft DOS, and they can save all their energy for learning the intricacies of the powerful 68008 processor. The assembler offers some very powerful features and is a delight to work with, for the simpler programs at any rate.

The package's only significant letdown is the rough edges in the documentation. The Forth manual must be ordered separately, but otherwise all the required information is there — it just takes some effort to find it. Any budding 68000 programmer worth his salt should be able to get round this obstacle, but it does slow things down initially. In the long-run it is worth it — the 68000 processor is a generation ahead of its contemporaries. **END**

## The McMill package contents

McMill card for Apple II+ or IIe with 68008 processor
Three disks: S-C macro cross-assembler 68000; monitor/debugger; version 1.0 Fig Forth
*S-C assembler Manual*
*McMill Operation Guide*
*Programming the M68000* by Tim King and Brian Knight; Addison-Wesley 1983
*S68000 User's Guide*; Signetics Corporation 1982
MC68008 microprocessor (Motorola 1983)
Price: $295
Contact: Stellation Two, PO Box 2342, Santa Barbara, California 93120. Tel: (805) 569 3132

# Slicing the pie

*Create pie charts, bar charts and graphs on your IBM PC — Phil Cohen delves into the more artistic realms of Basic programming.*

Business graphics — the drawing of charts and graphs based on business statistics — is becoming commonplace these days. Spreadsheet and database packages, and even printing pocket calculators, are producing bar and pie charts to order.

But there are cases where the abilities of a package are not enough. As they have to be user-friendly, they stick to standard forms of graphics (bar, line, pie) and often do not give enough flexibility to produce quite what you want.

On the other hand, there is Basic. Although nowhere near as easy to use as a package, this will give you exactly what is required and will allow your imagination to run riot. This article looks at Basic's graphics capabilities.

## Graphic Basic

At the heart of Basic graphics is the SCREEN command; this lets you select from three screen modes. SCREEN 0 gives the normal 80-column non-graphics screen that you get when you first enter Basic. SCREEN 1 gives a 320 × 200-dot screen on which you can use limited colour (all the programs in this article use screen mode one). SCREEN 2 gives a higher-resolution screen (640 × 200) which is limited to black and white.

Having chosen mode one you have a choice of three colours, the option to change the background colour, and to change the palette (the particular set of three colours used on the screen).

COLOR sets the background colour, and also specifies the palette.

LINE draws a line from one position on the screen to another. 'LINE (10,20) — (40,55)' draws a line from the point (10,20) — that is, 10 from the left and 20 from the top of the screen — to the point (40,55), 40 from the left and 55 from the top. The screen in mode one is 320 × 200, so (319,199) is at the bottom right-hand corner of the screen.

```
10                                  REM Squaring the circle
20 SCREEN 1
30 CIRCLE (50,50), 20
40 LINE (50,50) - (70,50)
50 LINE (50,50) - (50,70)
```

*Fig 1*

```
10                                  REM Program to draw a bar chart
20                                  REM First, reset the screen for input
30 SCREEN 0,0,0
40 DIM A(10)
50                                  REM Now input the data
60 FOR I=1 TO 10
70 PRINT "POINT";I;
80 INPUT A(I)
90 IF A(I)>10 OR A(I)<0 THEN BEEP : GOTO 70
100 NEXT I
110                                 REM Now set the screen for display
120 SCREEN 1
130 KEY OFF
140                                 REM Draw the axes
150 LINE (25,10) - (25,180)
160 LINE (25,180) - (300,180)
170                                 REM and the axis 'ticks'
180 FOR I=1 TO 10
190 LINE (25,180-I*17) - (20,180-I*17)
200 NEXT I
210                                 REM Finally, draw the bars
220 FOR I=1 TO 10
230 LINE (I*25,180) - (20+I*25,180-A(I)*17),1,BF
240 NEXT I
250                                 REM and wait for a key to be pressed
260 IF INKEY$="" THEN GOTO 260
```

*Fig 2*

By adding a number to the end of LINE you can make it draw lines in different colours. 'LINE (10,20) — (40,55), 1' produces a line in colour one.

Adding the letter 'B' to the end turns the line into a box. 'LINE (10,20) — (40,55), 1, B' produces a box in colour one, which has its top left-hand corner on (10,20) and its bottom right-hand corner on (40,50). If instead of 'B' you add 'BF', the box will be drawn and then 'filled in' — the whole area covered by the box will be turned into colour one.

For pie charts you need circles as well as lines, and the CIRCLE statement produces just that. 'CIRCLE (40,55), 20' produces a circle with its centre at (40,55) and a radius of 20.

## Deviations

This is where Basic becomes devious. As the screen is not square, a circle drawn normally would look squashed. This is because a radius of 20 units horizontally appears as, say, one centimetre, but the same radius vertically would be 1.16 centimetres due to the shape of the screen.

Basic assumes that when you tell it to draw a circle, you want it to automatically make allowance for this. The circle it draws will look circular, but if you start to draw lines around it in Basic they will be in the wrong place.

Try the program in Fig 1. The first line will meet the edge of the circle as you would expect it to, but the second will end outside the circle. Although the circle looks round on the screen, it is (in terms of its coordinates within the computer) smaller from top to bottom than it is from side to side.

You will find when you come to look at the pie chart program that all distances vertically have to be squashed by a factor of five or six in order to fit with a circle drawn on the screen.

The first step in drawing a bar chart is to draw the axis lines. Drawing these is a simple matter once you have decided where to put them. Putting 'ticks' on the axes to show the actual scale is a little more difficult, but can be handled with a FOR loop (Fig 2, lines 140 to 200). Line 190, although it looks complicated, just puts 10 ticks (short line segments) at equal intervals along the axis.

The LINE statement can also be used

```
10 SCREEN 0,0,0
20                              REM  Program to draw a line graph
30 DIM A(10)
40                              REM  Input the data
50 FOR I=1 TO 10
60 PRINT "POINT";I;
70 INPUT A(I)
80 IF A(I)>10 OR A(I)<0 THEN BEEP : GOTO 60
90 NEXT I
100                             REM  Now set up the screen
110 SCREEN 1
120 KEY OFF
130                             REM Draw the axes
140 LINE (25,10) - (25,180)
150 LINE (25,180) - (300,180)
160                             REM Axis ticks
170 FOR I=1 TO 10
180 LINE (25,180-I*17) - (20,180-I*17)
190 LINE (25+I*25,180) - (25+I*25,185)
200 NEXT I
210                             REM Draw the line - first the first point
220 PSET (50,180-A(1)*17)
230                             REM now the rest
240 FOR I=2 TO 10
250 LINE - (25+I*25,180-A(I)*17)
260 NEXT I
270                             REM And wait:
280 IF INKEY$="" THEN GOTO 280
```

*Fig 3*

to draw the actual bars of a bar chart (lines 220 to 240) using the BF parameter introduced earlier. The rest of the program in Fig 2 is fairly simple: it asks for 10 numbers (with values between 0 and 10) and produces a bar chart based on them.

Line 30 sets the screen to mode 0, which clears any old graphics so that the data can be entered more easily.

Lines 60 to 100 input the data and load it into the array, checking for out-of-range values. Lines 150 to 200 draw the axis (the vertical one having 10 ticks corresponding to the values 1, 2, 3, and so on, in the input data).

Lines 220 to 240 do the real work of the program, drawing the bars onto the screen using the LINE statement with a BF at the end to draw the bars. Line 260 sits and waits for a key to be pressed so that you can look at the bar chart before the 'OK' prompt appears.

A limitation of the program in Fig 2 is that only figures between 0 and 10 can be input, which means that you have to know the maximum figure the program is likely to have to accept when you write the program. The alternative is to keep a constant watch on the input and pick up the maximum value as it is entered, and then to 'scale' the whole chart accordingly. The following program segment inputs the data and finds the maximum value, M:

```
30 DIM A(10)
40 M=0
50      REM Input the data — M is the
  highest value
60 FOR I=1 TO 10
70 PRINT "POINT";I;
80 INPUT A(I)
90 IF A(I)<0THEN BEEP : GOTO 70
100 IF A(I)>M THEN M=A(I)
110 NEXT I
120 M=10/M
```

Line 120 converts M from the maximum value into a 'scaling factor' so that after each value is multiplied by it (as in line 210 below), the maximum any of them can reach is 10.

```
190      REM Draw the blocks
200 FOR I=1 TO 10
210 LINE (I*25,180) — (20+I*25,180-
  A(I)*17*M),1,BF
220 NEXT I
```

Line graphs are almost as simple as bar charts — again, the LINE statement is used. This time, however, it is used in a slightly different form. You've already seen how these two lines can draw two axes:

```
150 LINE (25,10) — (25,180)
160 LINE (25,180) — (300,180)
```

If you omit the first point on the second statement:

```
150 LINE (25,10) — (25,180)
160 LINE — (300,180)
```

it will still work.

LINE followed by a dash and the coordinates of one point draws a line that starts where the last line finished, in this case at 25,180. Now take a look at lines 240 to 260 of the program in Fig 3, which draws a line graph.

Each successive execution of line 250 will draw a LINE which starts at the end of the previous one, producing a graph that joins one point to the next.

Starting from the end of the previous line is all very well for every case except the first point because there was no previous line to it. That's why line 220 uses the PSET statement (which puts a single dot on the screen) to give the first LINE statement a starting point.

The rest of the program is straightforward, the only major difference between it and the bar chart program being that it has ticks on both axes.

Both types of graph covered so far have been fairly simple, and for variations you can easily add your own 'bells and whistles' such as different width or colour blocks on the bar chart, or annotations.

## *Pie charts*

The next most common type of graphic is the pie chart, but this is not so simple. The program has to deal with the possibility that less than 10 numbers will be fed in. The example program (Fig 4) will do this by asking the user to end the list of numbers with a negative value; the same technique could also be adapted for line and bar charts, the only problem being the automatic adjustment of the width of the bars and the spacing of the line points to accommodate the different number of inputs.

The next problem is the shape of the chart — after all, with the bar chart and line graph the LINE statement does most of the work. But the use of the CIRCLE statement to draw the outside of the pie chart produces the problems of circle-squashing mentioned earlier.

Pie charts must have their pie 'slices' filled in in different colours. There is really only one way to do this, and that is to use the PAINT statement.

To use a PAINT statement you give it a starting point, a colour to paint in and a border colour. PAINT starts from the starting point and fills in around it, stopping only when it finds the border colour. PAINT can fill in an area (surrounded by the border colour) of almost any shape.

To fill in the slices of the pie you have to make sure that they are drawn round in a border colour, and then give PAINT a starting point which you are sure is inside the slice.

The program in Fig 4a is not complex. Lines 50 to 130 take in the data, setting N to the number of points (when line 90 jumps out of the loop, N will be set to the last value of I for which data was input) and T to the total value so far, which is used to scale the input so that it makes one complete pie.

Line 170 sets A which is the 'squash ratio', the ratio that Basic uses in the CIRCLE command to make it look circular on the screen. If you are using a Basic other than the one this article covers (Basic-A), then you may have to alter line 170 to give a different value for A. You will be able to tell that A is the wrong value because the straight lines along the edges of the pie slices will not stop at the edge of the circle.

Lines 190 and 200 draw the circle and the first straight line (which is at the three o'clock position).

Lines 230 to 290 draw the pie slices, or at least, the straight line that defines the clockwise edge of the slice. Note that the last pie slice is not drawn (see line 230): this is because the last slice will just be the space left in the pie after the other slices have been drawn.

Line 240 keeps a running total of how far around the circle you are, using T to scale the values in order that the total will be 6.283 or twice pi. For the mathematically-minded, R is the angle in radians from the horizontal for each line, and will reach twice pi for the full

circle. The non-mathematically minded can use the method shown as a 'black box'.

Line 250 draws the line along the edge of the slice. It starts at the centre of the circle (150,000) and goes to a point which is calculated from the coordinates of the centre, the radius of the circle (which is 70), the value of R (which goes from 0 to 6.283 to go all the way round the circle), and A.

Line 260 chooses a colour: it uses colours in the sequence 1, 2, 3, 0, 1, . . . finishing on a 0 for the last slice.

Line 280 does the painting, starting at a point which is halfway between the centre and the outside of the circle (which is why the radius of 70 in line 250 has been replaced by 35 here) and *just* anti-clockwise of the edge of the slice (which is why R in line 250 has been replaced by R-0.1 here).

With very thin slices this may cause PAINT to start painting in the previous slice, but this does not cause problems as the colours chosen are arbitrary. If you jazz up the program to include, say, a key to what the colours mean, then you may have to be more careful: for example, reducing the 0.1 to something smaller and not filling in very small slices.

As the slices have not been colour-coded in this example, you will need a way of identifying them. The program segment shown in Fig 4b, when MERGEd with that in Fig 4a, will put a number beside each slice.

The heart of the segment is the subroutine that starts at line 450. This puts a string at a particular position on the screen, the position being given in terms of the coordinates used for LINE, CIRCLE, and so on, effectively coordinating the graphics and text.

The part of the program that calls the routine calculates a position for the string (lines 360, 370), sets the string to a representation of the number required (line 340) and then calls the routine to print the string on the screen.

Basic has two powerful commands which allow you to alter the 'dimensions' of the screen (as far as your program is concerned) and which may simplify your programming a little.

VIEW lets you limit the part of the screen onto which graphics can be drawn. 'VIEW (20,30) — (100,100)' will shift the top-left of the picture down to (20,30) so that a point which would previously have appeared at (40,40) now appears at (60,70). At the same time, it will prevent graphics from appearing anywhere except in the rectangle from (20,30) to (100,100), effectively limiting the size of the screen's graphics area.

VIEW SCREEN does much the same except that the points on the screen are not shifted. 'VIEW SCREEN (20,30) — (100,100)' only has the effect of limiting the graphics to the rectangle, so the point (40,40) would still appear at (40,40) but the point (10,10) would not appear at all.

WINDOW is more useful — it lets you redefine the measurements of the screen. For example, 'WINDOW (0,0) — (1,2)' will make the screen appear (to your program) as one unit wide and two units high, so the point (0.5,1) would be in the middle. Also, the screen is 'inverted' so that (0,0) will be at the bottom-left of the screen; the screen coordinates now correspond to the conventional Cartesian system (x increases as you go up, y increases as you go to the right). WINDOW SCREEN does the same as WINDOW except that there is no inversion.

```
10 SCREEN 0,0,0
20                              REM Program to produce a pie chart
30                              REM First, input the data:
40 DIM A(10)
50 PRINT "INPUT A NEGATIVE NUMBER AFTER YOUR LAST SLICE"
60 FOR I=1 TO 10
70 PRINT "SLICE";I;
80 INPUT A(I)
90 IF A(I)<0 THEN GOTO 150
100 T=T+A(I)
110                             REM N is the number of slices:
120 N=I
130 NEXT I
140                             REM Now set the screen
150 SCREEN 1 : KEY OFF
160                             REM A is the 'squash' ratio:
170 A=5/6
180                             REM Draw the circle:
190 CIRCLE (150,100),70,3
200 LINE (150,100) - (220,100)
210                             REM R totals how far round we are:
220 R=0
230 FOR I=1 TO N-1
240 R=R+A(I)/T*6.283
250 LINE (150,100) - (150+COS(R)*70, 100+SIN(R)*70*A)
260 C=I-INT(I/4)*4
270                             REM Now fill in the slice:
280 PAINT (150+COS(R-.1)*35, 100+SIN(R-.1)*35*A),C,3
290 NEXT I
300                             REM And wait:
310 IF INKEY$="" THEN GOTO 310
```

*Fig 4a*

```
300                             REM Now add the annotations
310 R=0
320 FOR I=1 TO N
330 DR=A(I)/T*6.283
340 S$=STR$(I)
350                             REM Work out the positions
360 X=150+COS(R+DR/2)*85
370 Y=100+SIN(R+DR/2)*85*A
380                             REM Use the subroutine to print them
390 GOSUB 450
400 R=R+DR
410 NEXT I
420                             REM And wait:
430 IF INKEY$="" GOTO 430
440 END
450                             REM Subroutine to print a string
460                             REM S$ at a position (X,Y) on
470                             REM the mode 1 screen
480 XC=X/320*40
490 YC=Y/200*25
500 LOCATE YC,XC
510 PRINT S$
520 RETURN
```

*Fig 4b*

## *Implementations*

One option is to use graphics in presentations with a monitor set up so that the audience can see it. If you do take this route it is a good idea to be able to call up the graphics-drawing programs in any order, so write down the program names with a brief description of what they are.

Another possibility is to use one of the very good screen cameras available. These generally take an RGB input and produce standard colour 35mm slides. If you have access to a graphics printer (or, even better, a colour graphics printer) then you can copy the contents of your screen by using the PrtSc key.

Business graphics are definitely here to stay. There's no better method for presenting statistics in an eye-catching way, as you will discover for yourself by using these routines. END

# Ask the right people first.

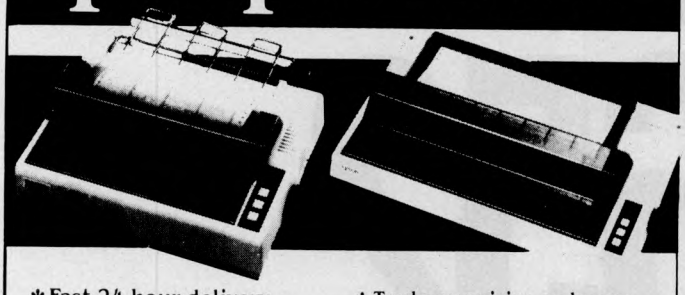

* Fast 24 hour delivery
* Full range of Epson Printers and Interfaces
* Ask for our Price Lists, Brochures and Print Samples
* Trade enquiries welcome (ask to be added to our Mailing List)
* Full Technical Support and Service Contracts available.

**EPSON** Versatile and Reliable. The Fastest Movers around

## Westwood Distribution

Distributors to the Computer Trade

**DIAL 100 AND ASK FOR FREEFONE WESTWOOD TO GET FULL DETAILS**

Westwood Distribution Ltd., 116/118 Tennant Street, Five Ways, Birmingham B15 1EY. Tel: 021-643 8680.

---

MAIL ORDER ONLY

The BEST DIRECT PRICES

# cerac disks

Cerac Computer Supplies Limited

**3M Authorised Distributor Data Recording Products**

| 5¼" DISKETTES | CODE | BOXES 1-9 | 10-49 | 50+ |
|---|---|---|---|---|
| DOUBLE DENS/S.S | 744 | £14.40 | £13.40 | £12.40 |
| DOUBLE DENS/D.S | 745 | £19.60 | £18.20 | £16.90 |
| QUAD DENS/S.S | 746 | £22.00 | £20.50 | £19.00 |
| QUAD DENS/D.S | 747 | £25.50 | £23.80 | £22.00 |
| **5¼" TDK SPECIALIST DISTRIBUTOR** | | | | |
| DOUBLE DENS/S.S | M1D-S | £14.50 | £13.50 | £12.50 |
| DOUBLE DENS/D.S | M2D-S | £20.60 | £19.20 | £17.80 |
| QUAD DENS/S.S | M1DX-S | £21.20 | £19.70 | £18.30 |
| QUAD DENS/S.S | M2DX-S | £25.10 | £23.40 | £21.60 |
| * HIGH DENS | | £51.00 | £47.50 | £44.00 |
| * For Olivetti M30 and IBM PCAT | | | | |
| 3½" DBLE.DENS/S.S | MF1DD | £36.30 | £33.80 | £31.30 |
| **5¼" NASHUA COPYCAT** | | | | |
| DOUBLE DENS/S.S | MD1D C/B | £13.40 | £12.50 | |
| DOUBLE DENS/D.S | MD2D C/B | £15.90 | £14.80 | |
| **3½" RHONE POULENC** | | | | |
| DOUBLE DENS/S.S | – | £42.10 | £39.20 | |
| DOUBLE DENS/D.S | – | £54.50 | £50.80 | |
| POST and PACKING PER 10 DISKS | | 75p | FOC | FOC |

LIBRARY CASES 5¼" Capacity 10 £1.69 + 75p p&p Capacity 50 £14.99 + £1.75 p&p

**01-773 0641**

**ACCESS/BARCLAYCARD welcome!**

Allow 7 days for delivery

ANSWERING SERVICE AFTER 5.30PM 44 Wallington Square, Wallington, Surrey

**ADD 15% VAT TO ALL ORDERS please!**

---

MM

# PC PRICE BONANZA

***PROFESSIONAL SERVICE*** ***EXPERT ADVICE*** ***PROMPT DELIVERY***

| PC's & COMPATIBLES | EX VAT |
|---|---|
| APRICOT PORTABLE 256K 1 x 720K Drive | £1295 |
| APRICOT 256K 2 x 315K Drives & Monitor | £1295 |
| APRICOT 256K 2 x 720K Drives & Monitor | £1545 |
| APRICOT Xi 256K 10MB & Monitor | £2195 |
| APRICOT Xi 512K 10MB & Monitor | £2595 |
| APRICOT Xi 512K 20MB & Monitor | £2995 |
| COMPAQ 2 2 x 360K drives | £1795 |
| COMPAQ PLUS 10MB | £3195 |
| ERICSSON 256K 2 x 360K Drives | £1645 |
| ERICSSON 256K 10MB | £2695 |
| MACINTOSH | £1495 |
| OLIVETTI M24 256KB 2 x 360KB Drives | £1690 |
| OLIVETTI M24 256KB 10MB | £2810 |
| OLIVETTI M21 256KB 2 x 360KB Drives | £1590 |
| OLIVETTI M21 256KB 2 x 720KB Drives | £1810 |

| EXTERNAL STORAGE DEVICES | |
|---|---|
| PLUS 5 20MB + 5MB CARTRIDGE | £2325 |
| PLUS 5 30MB + 5MB CARTRIDGE | £2845 |
| PLUS 5 40MB + 5MB CARTRIDGE | £3059 |
| CIPHER CARTRIDGE TAPE STREAMER | £795 |
| SIMONS 20MB TAPE STREAMER | £895 |

| MEMORY BOARDS | |
|---|---|
| 128K MEMORY EXPANSION | £149 |
| 256K MEMORY EXPANSION | £219 |
| 512K MEMORY EXPANSION | £549 |
| PC NET STARTER KIT | £795 |

| PC SOFTWARE | EX VAT |
|---|---|
| CAXTON CARDBOX | £165 |
| DBASE II | £265 |
| DBASE III | £325 |
| DMS DELTA 4 | £375 |
| DMS + | £155 |
| DR FORTRAN 77 | £199 |
| DR PASCAL | £250 |
| DR ASSEMBLER Plus Tools | £125 |
| FRAMEWORK | £325 |
| FRIDAY | £135 |
| KNOWLEDGEMAN | £380 |
| LOTUS 1 2 3 | £345 |
| MICROSOFT WORD | £240 |
| MULTIMATE | £295 |
| MULTIPLAN | £125 |
| MULTIUSER ACCOUNTS per Module | £295 |
| OPEN ACCESS | £325 |
| PEACHPAK | £150 |
| PEGASUS LEDGER MODULE | £200 |
| R. BASE 4000 | £295 |
| SAGE ACCOUNTS | £250 |
| SAPPHIRE DATAMASTER | £395 |
| SMART SOFTWARE SYSTEM | £495 |
| SYMPHONY | £425 |
| TK SOLVER | £245 |
| VOLKSWRITER DELUXE | £235 |
| WORDSTAR | £195 |
| WORDSTAR PROFESSIONAL | £260 |
| WORDSTAR 2000 | £295 |

| PC PRINTERS | EX VAT |
|---|---|
| ANADEX DP-6500 500cps | £2295 |
| DRE 8850 300lpm | £2065 |
| EPSON LQ 1500 200cps (NLQ) | £895 |
| HEWLETT PACKARD LASER PRINTER | £2895 |
| JUKI 6300 40cps | £749 |
| MANNESMANN MT180 160cps (NLQ) | £549 |
| MANNESMANN MT400 400cps (NLQ) | £1595 |
| NEC 2050 20cps | £625 |
| NEC 3550 35cps | £955 |
| NEC PINWRITER P2(P) 180cps | £535 |
| NEC PINWRITER P3(P) 180cps | £595 |
| OKI 84A 200cps | £645 |
| OLI 2350 (P) | £1435 |
| OLIVETTI DY450 45cps (P) | £765 |
| PANASONIC KX-P1091 120 cps + NLQ | £269 |
| QUIME 11/55 RO IBM 55cps | £1745 |
| RICOH FLOWRITER 1600 46k | £1349 |
| TOSHIBA TH2100H 192cps (P) | £1350 |
| TREND 930 200cps NLQ 80cps | £1350 |

**NEXT DAY INSURED COURIER DELIVERY AVAILABLE**

## MAYFAIR MICROS

BLENHEIM HOUSE, PODMORE ROAD, LONDON SW18 1AJ

TEL: 01-871 2555 / 870 3255

We accept official orders from UK Government and Educational Establishments. Mail Order and Export Enquiries welcome. Callers by appointment.

# 93,652*

## PERSONAL COMPUTER WORLD BUYERS

# CAN'T BE WRONG

**SUBSCRIBE NOW–SAVE POUNDS!**

*ABC Jan-Dec 1984 93,652

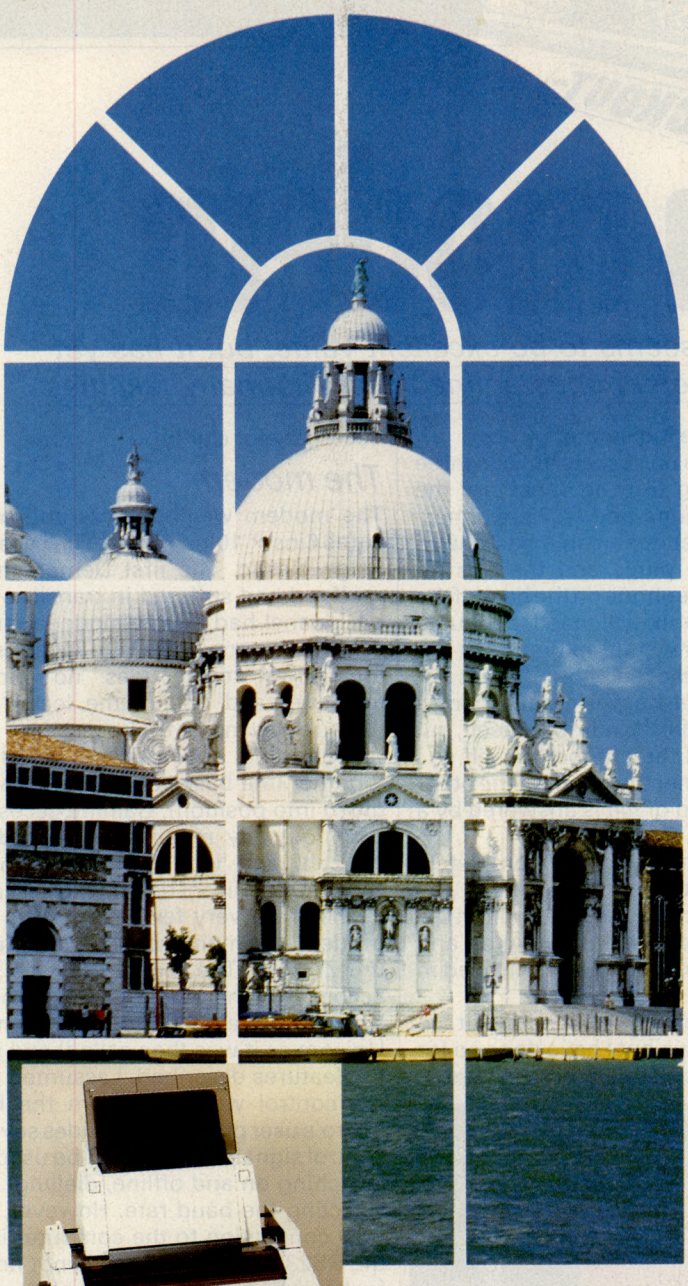

# Look through C. Itoh's window and find today's answer to low cost PC printing

Although compactly designed and low in price, the range of PC printers from C. Itoh includes many features normally found on more expensive models.

Take the Y10 daisywheel printer, with its 20 cps print speed. Drop-in encapsulated daisywheels are easy to change, and a snap-on interface pack permits a simple changeover of standard interfaces, giving you full flexibility to meet your printer requirements. The Y10 is also code-compatible with our other daisywheel printers.

The 7500 series dot matrix printer is a product designed for optimum reliability, and its low profile makes it ideal for today's PC user. It offers a full range of character sets, and is equipped with parallel or serial interfaces.



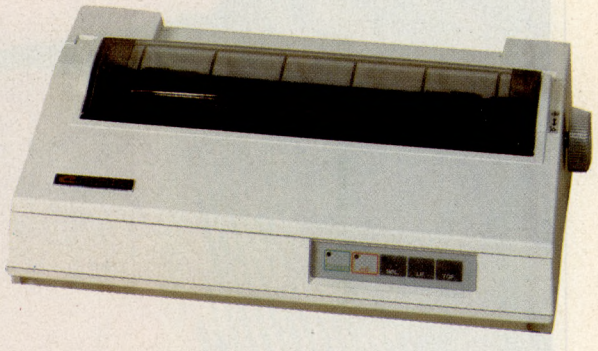

C.Itoh

C.Itoh Electronics Co. Ltd., Beacon House, 26-28 Worple Road, London. SW19 4EE. Tel: 01-946 4960. Tlx: 8955616.




# Demon modem

*The Demon multi-mode modem seems to be excellent value, but it has yet to receive BABT approval. Ralph Peters goes online to test its many facilities.*

Notwithstanding with the way prices have been falling, the arrival of the Demon multi-mode modem at £50 (excluding VAT) is a remarkable event, especially when it has auto-answer and auto-dial facilities.

The Demon is surprisingly light (it weighs less than a pound), partly due to the fact that it has a separate power supply built into the mains plug. It gives the impression of having been 'built to a price': the case appears to be glued together, and there's no apparent way in.

The modem's front panel has three push-button switches and five LEDs. One of the switches is used to select CCITT (European) or Bell (US) modem frequencies. The other two are for auto-answer use.

Four of the LEDs on the front panel indicate the chosen baud rate (300 originate, 300 answer, 1200/75 originate and 1200/75 answer), the fifth is labelled 'carrier'. There are no data or modem online indicators.

The rear has no sockets but has three cables coming from it; these are the power, telephone and RS232 connections. The telephone cable has one of the new-style plugs and there is no socket for a telephone on the back of the modem, so you will need a double adaptor if you want to plug it in at the same time as the telephone. This is not strictly necessary as the modem can be instructed to dial the numbers itself, but I prefer to dial the number myself so I can hear whether the phone at the other end is engaged or if it is answered by a modem tone.

The Demon is almost completely dependent on the software in the computer (in this case, the Zromm) — changing baud rate, switching on and offline and dialling are all controlled in this way.

For this reason it is difficult to separate the two but I have done so for this review, cross-referencing where necessary for clarity.




## The modem

The modem weighs 15ozs and measures 6ins × 10ins × 2ins. The case is a beige plastic. The first Demon that I received had suffered in transit — the back panel had been dislodged, probably by the power supply. As a result, the power cable was no longer anchored and one of the leads had pulled away inside the case.

Everything appeared to be glued together (the back panel was certainly glued into position). Gaining access to carry out any repair work would be difficult, and would probably mean causing significant damage to the case.

There are very few controls on the modem, the main work being done by the Zromm. The technical notes that accompany the modem are very brief. When I first read about the Demon (or Unicom as it was then called) and saw the features described, I assumed that the control would be from the BBC Micro's user port. This provides several control signals which could be used for switching on and offline, dialling, and selecting the baud rate. However, the only connection to the computer is to the RS232 port. The Beeb is not noted for having a full range of signals, and all the control is done by pulsing the RTS line.

The secret is in the length of the pulses. Short pulses (100 microseconds) step the baud rate. A pulse of about 300 microseconds will reset the baud rate to its default (1200 receive, 75 transmit). Pulses of more than 1000 microseconds cause a relay to pulse the line, which is used to dial telephone numbers. The manual doesn't tell you how to use this, but just states that care must be taken to ensure the correct pulse duration and inter-digit delays. If RTS is held high, the modem goes online.

It should be possible to use the modem with other computers provided you are capable of writing your own software, but it didn't work with the standard terminal programs. There may be problems in the signals communicated to the micro by the modem, but the documentation gives no details of these. Nor does it specify the connections on the RS232 plug:

these are the same as for the BBC Micro, except that the CTS pin is used for carrier detect. The manufacturer intends to produce software for other micros such as the Commodore 64, Amstrad, and IBM PC compatibles, but these are unlikely to be available before early autumn. However, one Commodore 64 user already reports success with the modem.

## The Zromm

The software for the review model was in ROM, called the 'Demon Zromm'. Installation instructions are provided which are adequate — most BBC Micro owners will be familiar with installing ROMs. There are certain restrictions regarding the ROM sockets that the Zromm will work in, but these are explained in the installation instructions.

Having fitted the Zromm and powered up, the message 'Demon Zromm 1.0' appears on the screen as confirmation that it is present. Unfortunately *HELP doesn't produce a list of the available commands as it does with, for example, the DFS ROM (that would apparently occupy too much program space).

The ROM provides 23 commands. There are three basic terminal modes: a simple dumb terminal mode (with limited facilities); a smart terminal mode; and a Prestel mode.

## Modes

Using the software to access bulletin boards or Prestel is basically simple: you set the baud rate and then type '*TERMINAL' or '*PRESTEL' followed by a telephone number. The number is dialled and when the remote system answers, the modem is switched online and you proceed from there. '*PRESTEL' automatically sets the baud rate, selects Prestel mode, and dials 618 (which is the Prestel access number in many areas) and '*PSS', which does the same for PSS except that it dials the Slough PSS phone number, but it will be of limited use to most PSS subscribers. With all these options you can store your name or account number in function key 11, and the information will automatically be transmitted to the system when requested.

If you prefer to dial the phone number to determine whether the number is engaged, or if a voice answers, then the terminal modes are more difficult to use. You can use the Zromm to dial the number, but you then have to issue three commands to go online. The first is the baud rate selection, which can be done before you dial. The next two are '*ON' to put the modem online, and '*TERMINAL' or '*PRESTEL' to select the terminal mode. This is rather clumsy and, with some systems, you have to be fairly quick or you may lose the connection. You could use the function keys which, although used by the Zromm, are still available to the user by pressing SHIFT/function key.

*CHAT mode is a very simple terminal program but does have the advantage of allowing full graphics to be sent from Beeb to Beeb. The *TERMINAL mode filters out graphic data.

There are a number of other commands provided by the Zromm that enable the modem to automatically answer the telephone and carry out a number of other tasks. These include *ANSWER, *DETECT, *CARRIER, *HOST, and *TIMEOUT. They work by returning errors to Basic which can then be trapped by an ON ERROR GOTO statement in a Basic program. For example, the *ANSWER command generates a code of 60 and the message 'Rrrring!'.

## Drawbacks

Although the modem and software combination generally work well, there are one or two areas where there are drawbacks. There is no online indicator on the modem, so there is no way of telling whether it is online or not. There is a *STATUS command which should tell you (it also shows the selected baud rate, answer and detect status), but I found this to be unreliable (possibly due to hardware problems). The safest thing to do is to type '*OFF' each time you finish online. Accidentally leaving the modem online could result in you continuing to pay telephone charges, so an online indicator on the modem would help.

Another omission is a method of selecting parity and word length. Apparently the Zromm uses eight bits/no parity in *TERMINAL mode, and seven bits, even parity in *PRESTEL mode. Problems might arise if you use *TERMINAL with a system that tests what you send for parity (most don't). Most smart terminal software allows you to reset word length, and so on, but in practice I had no problems.

The worst omission is the ability to spool to tape. The manual states that the modem will go offline if you try to spool with tape as the filing system; this is due to the way the BBC Micro's RS232 and cassette interfaces are set up, the same circuitry being used for both. The option to spool to a memory buffer and then to dump the buffer to tape after going offline could be provided. Also, you ought to be able to load the buffer from tape before going online, and then send it to the remote system during the online session.

The omission of these facilities means that tape users cannot prepare messages offline, or download or upload software. The software is only of real use if you have disks.

## Documentation

The documentation that came with the review modem was provisional and just about adequate (the bulk of it is concerned with the software — the hardware section is very brief) and the software section mentions commands that are not described. However, it is still a lot better than some so-called 'final' documentation that I have seen.

The software section lists the commands in alphabetical order, which I found confusing. It would have been better to group them by function — the terminal commands in one place, and the ones that you would only need to use in connection with auto-answer and running a bulletin board in another.

## Conclusion

The Demon and Zromm are very aggressively priced. To use the Demon with computers other than the BBC Micro, you will either have to wait for the software to be written or write your own. I have doubts about the standard of construction, the possibility of repairing the modem and back-up support from the manufacturers. The lack of spooling to (and from) tape makes the Zromm of doubtful benefit to tape-based users. With the exception of the auto-baud detect and the BBS-type commands, and the other reservations previously mentioned, the software is very well constructed and simple to use. It is apparently possible to use it with other modems such as the Nightingale and the WS2000. It is significantly cheaper than Commstar, for example, but this offers more terminal features, especially for tape users.

The Demon's main drawback at present is that it doesn't have BABT approval, and it is illegal to connect it to British Telecom phone lines. As the law stands, the Demon cannot be recommended unless, and until, an approved version is produced, except for those who want to use it on private lines or who wish to export it to a country where different regulations apply. The manufacturer takes the position that it can sell plenty of Demons without approval, so why should it go through the hassle (and expense) of getting it approved. It would almost certainly mean changes in design (perhaps leading to increased cost). Part of the problem is the law that allows something to be sold, but not used. It isn't just illegal to use guns, it's illegal to sell them, too.

Modem manufacturers who go through the BABT procedure have a legitimate grumble when it is so easy for other companies to flout the spirit, if not the letter, of the law. Paradoxically, it can be argued that part of the benefit to the user of BABT approval is exactly the cost and procedural hassle. A company that has the will and financial stability to go through the legal procedure is more likely to be able to support its products in the long-term.

---

*Thanks to Data Exchange in Birkenhead for providing the BBC and disk drives used for the review.*

*Prices (including VAT and p&p): Demon £61, Zromm £24.*

*Demon Products Ltd, Lex House, 3-6 Alfred Place, London WC1. Tel: (01) 930 3619.*

END



# SCREENTEST

# Sycero

*Kathy Lang looks at System C's Sycero, a powerful and flexible program generator which is ideally suited to software developers.*

Sycero bills itself as the businessman's program builder, so I thought it would be interesting to see how a program generator with a host of file-handling facilities compares with more conventional data management systems as a tool for the average business user. The major advantage claimed is that you get far more power for your money, without any increase in the difficulty of use.

Sycero is menu-driven, so you can construct a program entirely on a question-and-answer plus options basis. The main menu is shown in Fig 1. When a program is constructed, you must generate it using a menu option; this results in the production of Basic which you can inspect with your Basic interpreter if you wish. The generated program is then run, either from within Sycero or direct from the operating system. You don't need Sycero present to run generated programs, and no royalties are charged on such programs.

The major difference between a program generator of this type and a conventional system is that you have two levels of building blocks to construct. In a data management system the basic features of file maintenance, reporting, and so on, are already there; all you have to do is set up file, screen and report formats and handle them with the modules already provided. In Sycero, you must create these modules (as programs) for yourself, but the package gives help with creating the main types of program needed in most data management applications.

Five standard types of program are available: file maintenance, enquiry, posting, report and menu. In the first three, a powerful facility for processing displays enables you to carry out a variety of tasks such as validation, and if necessary to include the full gamut of Sycero commands. In addition, you can write complete Sycero programs yourself using the Batch facility, which effectively gives you the full power of Basic plus indexed file-handling in a reasonably palatable form. For novices, however, it is possible to create quite powerful systems without using the batch features at all.

Sycero is produced by a British company, System C, which, in addition to sales in this country, is currently engaged in substantial contracts with suppliers in Germany and Spain.

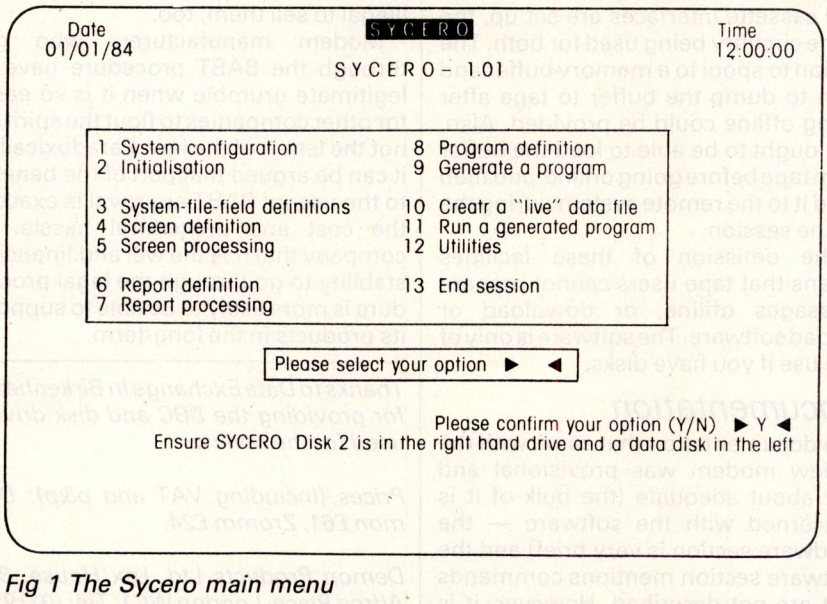


*Fig 1 The Sycero main menu*

## Constraints

The major limitations are set out in Fig 2. For most people, these limits will cause no problems. Areas of difficulty could be the maximum length of text fields, and the restriction in file maintenance programs to a single key for retrieving files when editing. Dates may be in either British or American numeric format. Validation is adequate at the level supplied — for example, type is checked, and you can force the operator to enter a field value — but can be much more powerful if you exploit the screen processing features.

## File creation and indexing

Sycero permits four different types of file organisation: sequential, random (stored by record number), indexed and transaction. Random and indexed files can have extensions associated with them to improve the efficiency of file-handling, and to permit sets of linked records larger than the limit imposed on record length for a single file. Transaction files are associated with indexed files in such a way to establish a master/slave relationship between the two files. For example, in a stock control file you might have a single entry for each item of stock in the main file, with a transaction entry for each order for stock items; these would then be kept in order by the stock code item in the transaction file so that a complete set of transactions could be retrieved together.

| | |
|---|---|
| Maximum file size | NS |
| Max record size (ch) | 5000 |
| Max no fields | 100 |
| Max field size | 78 |
| Max digits | 14 |
| Max prime key length | 111 |
| Special disk format? | N |
| File size fixed? | Y |
| Link to ASCII files? | Y |
| Data types | N,C,D,Array |
| Fixed rec structure? | Y |
| Fixed record length stored? | Y |
| Amend rec structure? | CO |
| Link data files? | Y |
| No data files open | NS |
| No sort fields | 14+ |
| No keys | 14 |
| Max key length (chars, fields) | 111,UL |
| Subsidiary indexes kept up-to-date? | UTD |
| Data validation | G |
| Screen formatting | P |
| Unique keys | OP |
| Report formatting | P |
| Store calculated data | IN,BA |
| Totals & statistics | Y,T+ST |
| Store selecn criteria | N |
| Combining criteria | A |
| >1 criterion/field? | Y |
| Wild code selection? | SW |
| Browsing methods | AK |
| Interaction methods | M,C,FT |
| Reference Manual+ | *** |
| Tutorial Guide+ | ** |
| Reference Card+ | N |
| Online Help+ | * |
| Hot-line? | P |

*Fig 2 Features and constraints*

Each index uses a key which may be formed from one or more fields. Every indexed file has up to 14 keys which are used to determine the order in which the file may be retrieved during enquiry, or printed in reports, as there is no physical sorting as such within Sycero. Primary keys may be unique or duplicate, but Sycero automatically allows duplicate values for all other keys.

The first step in setting up a Sycero system is to define the parameters such as printer page size, and then to define the files and fields you need for the system. For each field you enter name, type, length and extra parameters where necessary, such as the number of digits after the decimal point for numeric fields. Types of field include character (letters only, letters and digits, or digits in character format only), numeric (which may be used in calculations), date and array. Arrays may be one or two-dimensional and are useful for storing groups of variables of the same length and type, such as the four lines of an address. You then define the keys to be used to access the file, if any, and the links, if any, to other files. As links are established, so are the paths used to link the files. Links between transaction and master files are a special case in Sycero, since the posting program type is provided to facilitate their creation and updating of transactions and the aggregation of data from transaction records onto the corresponding master record.

Once a file has been set up, if you change your mind and decide, say, to alter the definition of index keys, you must write a batch program to carry out the task. The same procedure is needed if you find that your initial specification of the number of records to be stored in the file is inadequate; the file must be copied, and you have to write your own routine to do it. In either case, there is a helpful utility which permits the old file definition to be copied for modification before the data is copied across.

If there are calculated fields in the file, these are not defined during file creation but as part of the screen definition process. This means that you have greater control over calculation than is often possible.

The next phase is to create one or more screen definitions in which the fields from your files are laid out appropriately.

## Data input and updating

Sycero allows you to create file maintenance programs to permit the entry and amendment of records, using a standard Sycero program type. Alternatively, you can use the batch facilities to provide more flexible processing should this be needed. File maintenance programs are created using an option from the main menu. When this option is invoked, Sycero asks you which files are to be used, and the names of the screens with their associated processing definitions.

The possible ways of putting together screens and processing are varied. Within the basic file maintenance option, records are always retrieved for maintenance by the primary key. Partial entry of this key is allowed — Jo will find records about Jones, Johnson and Jonas — and once a particular record has been accessed, you can browse forwards or backwards in the file on order by primary key. Screens for file maintenance may include data from more than one file, but in normal circumstances only one file will be updated in one file maintenance program generated by Sycero (although experienced users can get round this if they need to, or use the batch facility instead).

In addition to interactive updating, you can, of course, use a sequence of commands in a batch program to update records as a group.

## Screen display

Sycero's facilities for creating display areas on the VDU screen are powerful and flexible. Screen displays are created using a paint-a-screen approach; text and field markers are entered, and the positioning of each field is shown by entering a control character and the name of the field. I've deliberately used the term 'screen display' rather than 'screen' because the output produced by several screen descriptions can be displayed on one physical screen at a time. In fact, 'screen' in Sycero actually means 'the display of one or more records from one or more files', since a screen is a processing entity rather than a physical object. Screen displays may contain either a single record, or a set of records in what is known as a 'page display'; this is usually used for enquiry programs to facilitate, for example, the display of several related records together, perhaps one per line or with each record spanning two or three screen lines.

Display and processing in screen-handling use screen line numbers to locate individual items for display. Within a screen, using screen processing, you have seven processing options: display of help messages; evaluation of the data entered; display of error messages when incorrect data is entered; warning messages (as error messages, but processing of that particular field entry is allowed — this is used to warn of unusual values rather than definitely incorrect entries) conditions (which arrange for entry of specified fields to be skipped if appropriate, for example to avoid asking for spouse's age if the person is unmarried); and statement processing. Statements may be processed either before or after screen entry, and this facility has a wide range of uses. Such statements may be written in Sycero's own command language, in Basic, or both.

## Printed reports

As with screen displays you first create a format for a report, then arrange for Sycero to generate a report-processing program. Report layouts are also drawn using paint-a-screen techniques. Report processing statements may be of three kinds — conditions, and statements before and after printing. These work in a similar way to the corresponding processing statements in screen display. The Sycero report generator provides the ability to total up to 40 fields as part of the report, and to have up to 10 levels of sub-totals. Reports may consist of header and footer lines, total lines, and body lines which contain the detail of the report.

## Selection and sorting

When browsing through records on the screen using an enquiry program, you can access records via any one key or, for random files, via the record number. When a record has been retrieved you can browse through the file, forwards or backwards. Other than by using the batch features, there did not seem to be any way to set up searches which did not use indexes. There is, however, on enquiry processing an option to exclude records which meet certain criteria. This facility can be used, for instance, to suppress printing of the detail of records if you simply want totals displayed on the screen. For reports, you can set up a maximum of



# SCREENTEST

five conditions which must all be met before a record will be included in the report; these conditions are entered when the report program is run. You can apply a number of tests to individual fields, including the ability to use wild codes to represent one character or a group of characters.

Reports can be printed in order on any key field; this is the only form of reordering Sycero provides—there are no sorting facilities. This would not be a major drawback were it not that to re-index a file using different keys, you must copy it with a batch program written for the purpose. There is an example program in the manual which you could adapt, but it would still have to be done. This seems to be a high price to pay to occasionally get out reports in an order you had not originally envisaged.

## Calculation

The screen processing facilities allow you to specify calculations to be performed either before or after fields are displayed or entered; this permits a wide degree of flexibility in this area. A powerful range of calculating functions is provided — the usual range of arithmetic and comparison operators, string-handling functions which provide the equivalent of Basic's Left$, Right$ and Mid$ in a simplified form, and the ability to sum numeric arrays. You can also process the system date, although I could not find a way to get at the time of day. Date arithmetic is handled correctly—all dates are stored internally in Julian format, and you can either access this or the current display format for the date. If you really want to go to town, any of the Basic string and numeric functions can be included, using the conventional Basic syntax. Sycero also provides the ability to use one file as a reference for another, giving a 'table look-up' facility which in some circumstances can replace the need for calculation.

## Multiple files

Links between files are of two kinds: those between indexed and transaction files, and those between random or indexed files and other indexed files. You can link random files to indexed files by storing the record number of the linked random record in the indexed file, thus permitting one-to-many processing by allowing several indexed records to be linked to the same indexed record. Transaction-master links are also one-to-many. However, within the basic Sycero facilities many-to-many links did not seem to be possible. Where two indexed files are linked by a field which can have duplicate values, when the link is made to retrieve the appropriate record in the second file, only the first record which matches is retrieved. You could use the batch facilities to process linkages of the many-to-many kind if necessary.

## Links with outside

Sycero sequential files use the DIF[tm] format created by Software Arts for spreadsheets and used by popular programs such as VisiCalc and SuperCalc, so it would be possible to import and export files in that format. Alternatively, the internal formats used for the other forms of file are shown in the *Reference Manual*. For the Benchmark I was able to create a file in Sycero's random format through a Basic program, and then write a short Sycero batch program to copy it to an indexed file I had previously created. The reverse process would permit export of Sycero data to other programs. For export, you could simply add some Basic statements to a generated Sycero enquiry or report program to send the output to a file in whatever format you wished.

## Tailoring

The tailoring features of Sycero are extremely extensive, to the point where you can include Basic statements within programs before or after generation. Sycero provides several levels of sophistication in its tailoring facilities. Inexperienced users could combine the various program types provided, including the very powerful screen processing together with the facilities for generating menus automatically, to produce quite powerful and flexible systems. Such systems could exceed in power all but the most sophisticated data management packages now available, although not those packages which provide their own command languages and permit full interaction between records, including the handling of many-to-many relationships.

When setting up screen processing and when generating the five types of

| Package | Cost (£) | Summary |
|---|---|---|
| Sensible Solution | 565 | Powerful multi-user, multi-file system based on central data dictionary which holds all record definitions. Menu-driven for beginners but no default formats, so lots of work to do to get started. Tailoring powerful but tedious to implement. |
| Knowledge-Man | 450/545/850 | Powerful data management system, few software limits on processing. Spreadsheet included, word processing and business graphics as add-ons, all loosely integrated. Features for experienced users and system developers excellent, rather complex for novices. |
| Sycero | 595 | Powerful and flexible program generator with good facilities for screen-handling and processing; powerful command language; ability to incorporate Basic statements if desired. Rather complex for novices: better for software developers. |
| The Complete Manager | 530/130 | Three-level package with top level as run-time system for third level. Full system is command-driven: has multi-user, multi-file facilities, up to 10 keys per file kept up-to-date, macros with parameter substitution, operating system commands and paths. |
| dBaseIII | 495 | More advanced version of popular dBaseII package. Allows max 10 files open at once, which can be interrelated as you wish on a DIY basis. Flexible indexing. Command based: can store sets of commands to get close to programming. Only on IBM PC and clones. |

*Fig 3 Comparison of similar data management packages*

programs provided, you can include any Sycero commands at a variety of entry points. For example, in addition to any processing statements attached to individual screens, a file maintenance program can include commands to be processed before and after records are amended, added to and deleted from a file. (Such commands might be used to carry out tasks which did not directly interact with screen display or which were specific to this particular type of file maintenance, rather than to every use of the screen format in question.)

Where the user requires features which are not available through the five program types provided, batch programs can be constructed using any of Sycero's extensive range of commands. Basic statements can also be used where necessary. For the application where most of the work is straightforward, the true programming aspect could be confined to a few small areas of the system, rather than the whole system being programmed in Basic or the language in use.

## Housekeeping

Files can be deleted within Sycero; file, screen and report definitions can be copied. DOS commands can be executed from within Sycero, but this facility is not available to generated programs. Programs must go through a generation phase before being run; this is usually automatic unless previously unidentified errors are found. Generated programs can be run within Sycero, either in their full mode of running or in a test mode. Once tested, programs can be run independently of Sycero. The manual does not explain how to do this, but an extra typed sheet supplied with the package gives the necessary information.

To run the programs you need two files supplied with Sycero. System C does not charge you for the privilege of using these on other systems, so there are no royalties to pay to software developers who write systems for sale using Sycero.

## User image

Sycero is a menu-driven system. Every part of the package can be run using menus, but there are times when an experienced user will find this rather tedious especially as in many cases you can find yourself pressing the Exit key many times to work back up through the levels of menu.

In some parts of the package, extensive use is made of special key sequences and of function keys. As the manual has been written to be applicable to all the systems on which Sycero runs, these keys are referred to by generic names, and, in the absence of a keyboard template, the strain on the memory can be considerable. (*The Installation and Configuration Guide* does give details of the generally applicable key sequences, but it is not as easy to use as a template would be, nor does it cover the use of function keys or the Apricot microscreen. These references are all embedded within the *Reference Manual*.)

## Documentation

The system comes with two main manuals. The *Reference Manual* covers the full range of Sycero facilities in a reasonably comprehensible way, but it would have been much better to have a more extensive introduction to the overall approach. The *Example Manual* takes the user through two complete, worked examples, and should be a very effective way of learning about the system. Unfortunately it has 36 pages of *errata*: many of these contain only one error and often this is simply a typo, but not always, so you would have quite a bit of work to do to get started with the example and I doubt if many would have the patience required.

System C provides support for the package through an unusual route: buyers are offered an annual maintenance contract for £185, which includes a modem and a subscription to BT Gold. This means you can use the mailbox system to communicate with the software support people — an imaginative move which should be cheaper for most people than a maintenance contract plus telephone charges.

## Conclusion

Sycero is a powerful and flexible program generator which should perhaps appeal more to system developers than ordinary users. I suspect that many people will be wary of its approach simply because it obviously has a lot of power and capacity.

There are some areas which novices will find particularly difficult — the need to copy your files if they exceed their initial size specification, and to write a routine for the purpose, even if it can be done by adapting an example in the manual, is a real disadvantage. There are also some surprising gaps in the functionality of the five predefined program types. The difficulties produced by creating a report in an unusual order is one obvious example, and the barriers to creating linked files where many-to-many relationships are possible is another.

I see Sycero as being of most interest to people who need a powerful application which can be almost completely programmed in Sycero with the addition of a small number of Basic statements. For this type of work, it should prove a considerable aid to productivity. **END**

| | | |
|---|---|---|
| BM1 | Time to add one new record | 3secs |
| BM2 | Time to select record by primary key | 5secs |
| BM3 | Time to select record by secondary key | 5secs |
| BM4 | Time to access 20 records from 1000 sequentially on three-character field (same field as in BM2 key) | NT |
| BM5 | Time to access record using wild code | 5secs |
| BM6 | Time to index 1000 records on three-character field | 35min 30secs* |
| BM7 | Time to sort 1000 records on five-character field | NP |
| BM8 | Time to calculate on one field per record and store result in record | 36mins 15secs* |
| BM9 | Time to total three fields over 1000 records | 9mins 35secs* |
| BM10 | Time to add one new field to each of 1000 records | 33mins 45secs* |

Time to import a file of 1000 records: 32mins 15secs

Notes: NT=Not tested NP=Not possible +=including scrolling. Where two times are given, first is access to first record, second is access to each subsequent record. *=estimated from time to process 200 records.

*Benchmark times recorded on :Apricot/H*

## Summary

| | |
|---|---|
| Supplier | System C |
| Tel | (0622) 55142 |
| Cost (£) | 595 |
| Systems | PC,MS |
| Version reviewed | 1.08 |
| Type | S,E |
| Features | Program generator — permitting the setting up of a variety of systems based on file-handling. Powerful screen-handling and processing, adequate report generation, good keyed access to single or linked files including transaction processing. |
| Drawbacks | Rather cumbersome ordering and selection facilities. Limited ability to relate linked files within basic system. |
| Ease of use | Quite difficult for novices to learn about and use. Could be tedious for expert users, but should save time. |

# Primitive Logo

*Harvey Mellar looks at Logo operations, variables, arithmetic and co-ordinate geometry, and presents a 'cat-and-mouse' program to illustrate the facts.*

Some Logo primitives have an effect, and are called 'commands', whereas others simply return a value and have no effect — these are called 'operations'. FORWARD is a command: it causes the turtle to move on the screen. HEADING, on the other hand, is an operation: it returns the value of the turtle's heading, but does not cause anything to 'happen'. In order to find out what the turtle's heading is, we must give the value returned by HEADING as the input to a command, as for example in PRINT HEADING; PRINT is a command that causes the value of its input to be displayed on the screen. It follows from this that the first procedure or primitive on a line must be a command, otherwise a value would be returned without anything to 'use' it.

All the procedures discussed in the previous article (*PCW*, June) were commands; they had an effect, but they did not return a value. To get a procedure to return a value, we use the primitive OUTPUT. As a very simple example, here is a procedure that returns the square of its input:

```
TO SQR :A
  OUTPUT :A * :A
END
```

To find the square of 6.7, we type PRINT SQR 6.7.

A procedure stops execution and returns control to the procedure that called it (or to the top level) as soon as it executes an OUTPUT. The next example illustrates this; it is an operation to calculate the absolute value of its input.

```
TO ABS :X
  IF :X < 0 THEN OUTPUT ( 0 - :X )
  OUTPUT :X
END
```

If :X is less than 0 then the first OUTPUT is obeyed; Logo then stops obeying this procedure and returns control to the next higher level. Otherwise, Logo goes on and obeys the second OUTPUT.

What I am calling an 'operation' in Logo is usually called a 'function' in other languages. One feature of a function is that it returns a single value, but in Logo that single value can be a list structure of any degree of complexity.

Lisp is a language which works purely in terms of functions, whereas you must include the word OUTPUT to make your Logo procedures into functions. Despite its origins in Lisp, Logo departs from it in one of its most fundamental features and so remains a 'procedural' rather than a 'functional' language. There is dispute in the Logo community about the correctness of this approach, and one company, TLC, (The Lisp Company) is producing versions of Logo which are 'functional'.

The majority of Logo primitives (and all procedures) are prefix in form: that is, the procedure is followed by its inputs, as in FORWARD 20. However, there are also a small group of 'infix' operations which are used because of their familiarity. 4 + 5 is an example: the + is an infix operation, so called because it is written between its inputs.

*'. . . in Logo that single value can be a list structure of any degree of complexity.'*

Some versions of Logo also include prefix forms for these operations, so 4 + 5 can also be written as SUM 4 5.

## Calculations

Logo might not be your first choice of language for number-crunching applications, but it does have a basic set of arithmetic and trignometrical functions much the same as those you would expect to find in Basic.

Operations enable us to write neat definitions for mathematical problems. Here's a procedure that returns the distance between two points:

```
TO DISTANCE :X1 :Y1 :X2 :Y2
  OUTPUT ( SORT ( SQR ( :X1 - :X2 ) )
    +   ( SQR ( :Y1 - :Y2 ) )
END
```

To find the distance between the points (50,60) and (90,70), type PRINT DISTANCE 50 60 90 70. DISTANCE uses the primitive operation SQRT as well as the procedure SQR.

It is worth looking closely at the way brackets are used here. The brackets in ( :X1 - :X2 ) ensure that the subtraction is done before any squaring; they include the operation and its operands, which is the standard approach in many languages. When brackets are used with prefix primitives or procedures, they include the procedure name together with its inputs, so you write (SQR :X) or ( SQR ( :X1 - :X2 ) ). This is in contrast to the situation in Pascal and Basic where it is just the arguments (the inputs) that are bracketed together.

Many mathematical applications require the generation of random numbers, and Logo uses a primitive RANDOM for this task. RANDOM takes an integer input — n — and returns a random integer between 0 and n-1. To get the turtle to make a random right turn of between 0 and 89 degrees, put:

```
RIGHT RANDOM 90
```

As a slightly more complex example, the following makes a random right turn between -90 and +90 degrees:

```
RIGHT ( ( RANDOM 181 ) - 90)
```

## Co-ordinate geometry

In order to make use of the DISTANCE procedure that has been defined, you need a way of dealing with co-ordinate geometry (that is — the usual school geometry in terms of x and y co-ordinates).

The geometry looked at in the previous article was 'turtle geometry', which is defined in terms of FORWARD and RIGHT and is a 'relative' geometry in that everything is measured with respect to the turtle's present position. This form of geometry has great importance — it offers a number of new insights into geometry, and is better suited to solving certain kinds of problems than is co-ordinate geometry. However, there are problems for which co-ordinate geometry is the better way of expressing a solution.

Logo has a number of primitives for dealing with co-ordinate geometry. The origin of the co-ordinate system is taken to be at the centre of the screen and you can set the position of the turtle with SETX, SETY or SETXY. SETX and SETY take one input, the value of the x or y co-ordinates respectively. SETXY takes two inputs. If the pen is down, the turtle will draw a line as it moves from its old position to the new. The heading can be set with SETH. These primitives are commands.

There are a corresponding set of operations that return values. HEADING has already been mentioned; XCOR returns the value of the turtle's x co-ordinate; and YCOR its y co-ordinate.

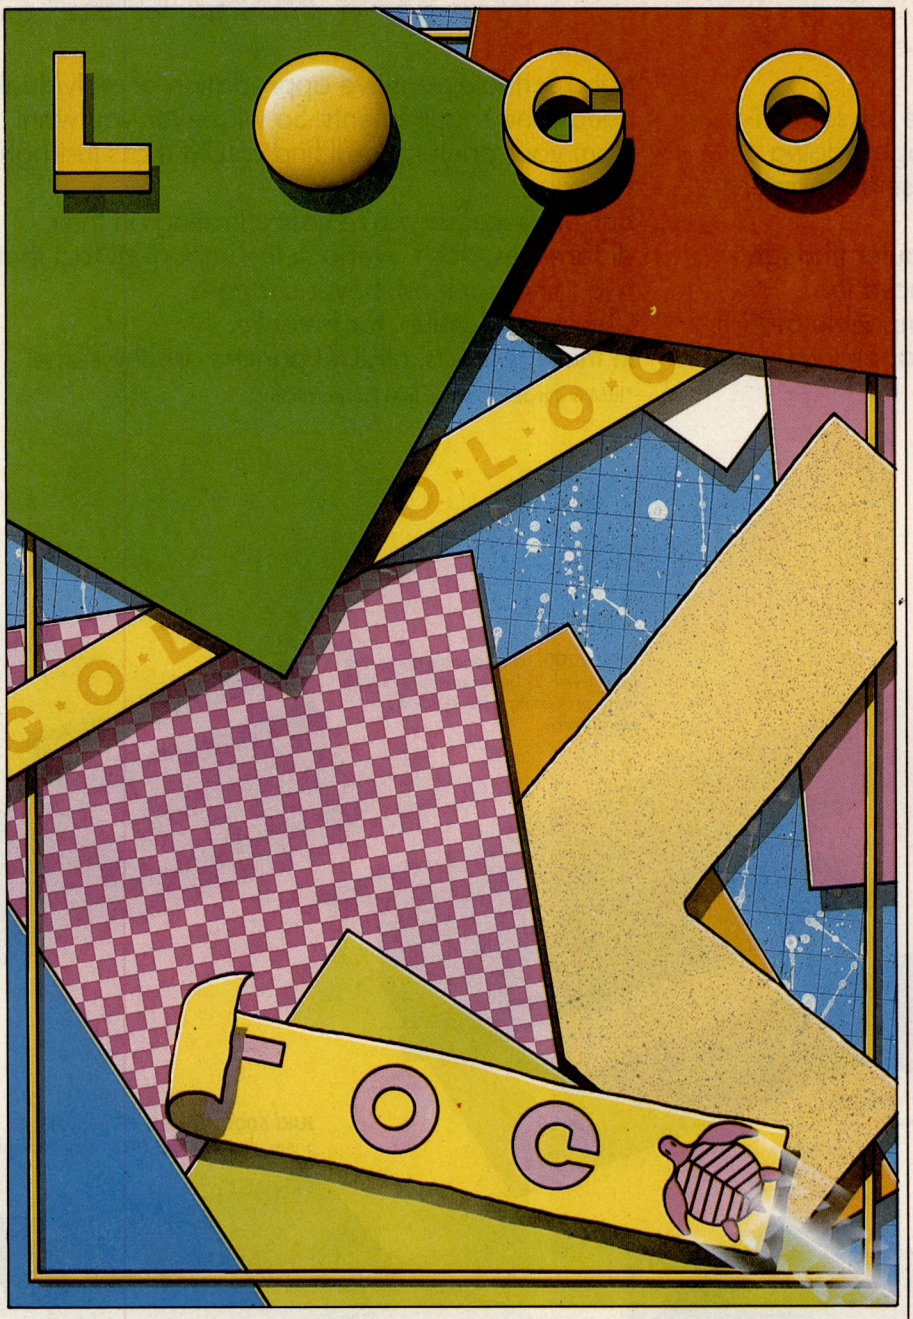


Illustration by Mark Watkinson

## Variables

The only variables seen so far have been 'local' variables in the form of inputs to procedures. These variables are preserved as long as the procedure that uses them is still active, but disappear as soon as it is completed.

It is sometimes useful to have variables that can be shared by a number of procedures and that do not disappear after the procedures have finished running. Such variables are usually called global variables, and in many versions of Basic all variables are global.

To create a global variable you use the primitive MAKE. For example, MAKE "XPREY 5 assigns the value 5 to the variable named XPREY. To find the value of the variable, you could type PRINT :XPREY.

A point to bear in mind when using variables in Logo is that they are not 'typed' so there is no distinction, for example between numeric variables and string variables, as there is in Basic. You can say MAKE "XPREY 3, then later MAKE "XPREY "THREE or MAKE "XPREY [1 2 3].

In the last article I discussed, and have now introduced, another punctuation mark,". These symbols are very important in Logo for there are three different ways of using words, and these symbols are used to differentiate these uses:

XPREY (with no preceding punctuation) is a call to a procedure (or a primitive) named XPREY; it causes the procedure to be obeyed.

"XPREY with preceding quotes (but not following) is the word XPREY itself. This could be the name of a variable, the name of a procedure or simply a 'word' (the same as a 'string' in Basic).

:XPREY with preceding colon is the value associated with the name XPREY; it is the contents of a 'box' whose name is XPREY.

MAKE "XPREY :XPREY + 1 increases the value of the variable XPREY by 1. At first sight this notation seems unnecessarily complicated, but the idea behind the notation is that the two different uses of XPREY should be clearly distinguished. In Basic, the statement LET XPREY = XPREY + 1 uses XPREY in one place as the value of the variable and in the other as the name of the variable. This is a source of potential confusion that Logo tries to avoid.

The colon notation in :XPREY is a shorthand for the fuller Logo syntax of THING "XPREY. THING is an operation which returns the value associated with a variable name. A colon can be used in place of THING if they are followed by the actual variable name.

To show how THING works, consider these examples:

```
MAKE "OTHERNAME "ROSE
MAKE "ROSE "SWEET
```

Then PRINT :ROSE prints SWEET

PRINT :OTHERNAME prints ROSE

PRINT THING :OTHERNAME prints the value associated with :OTHERNAME, in other words the value associated with "ROSE — that is, it prints SWEET.

This in itself is often a useful feature, but it is made even more useful by the fact that you can create variable names during the running of a procedure. To make a word, you use the primitive WORD which takes two inputs and outputs the word formed by putting these together: WORD "X "PREY outputs XPREY. You could also write THING WORD "X "PREY in place of :XPREY. This facility becomes useful if one of the inputs is a variable, for example:

```
TO FINDX :ANIMAL
  PRINT WORD "X :ANIMAL
END
```

FIND X "PREY prints the contents of XPREY while FINDX "PREDATOR prints the contents of XPREDATOR.

How does Logo organise its memory to hold procedures and variables? The memory is described as a 'workspace' and is composed of 'nodes'. Procedure and variable definitions use up nodes. As procedures run workspace is used up, and from time to time Logo must stop, examine its workspace, decide which parts are still needed and free the rest of the memory for reuse — this process is known as garbage collection. Logo will hesitate for a second or so from time to time as it performs a garbage collection. Most Logos have commands which will enable you to see how many nodes you have free at any time, and to force garbage collections so that they do not occur during time-critical parts of programs.

You can save the whole workspace to disk (or tape) and reload it later. In this way, procedures and global variables are saved together as one file. There are a variety of commands to organise the workspace, for deleting procedures and variables, and listing names of procedures and variables. In some

# Why can't all our printers be like the JUKI 6100?

Because every business is different.
Not everyone, for instance, needs the full sophistication of our remarkable 6100. (Though judging from the fact that it's one of the best-selling printers in the UK, quite a few people do).
And not everyone has an IBM* computer (though for those that have we've just introduced the brand-new, IBM* graphic printer compatible 6100-I).
No, not for us the 'take it or leave it' approach, but a sensible, sensitive appreciation of individual needs and requirements. So whatever you want from your printer, you'll find a JUKI that's just right for you.
But just because you're concentrating on their differences, don't overlook the important fact that two things, at least, never change.
Quality and value, for instance.
In these respects, all JUKI printers are the same.

*IBM is a trade-mark of IBM Corporation.

**JUKI 6100:** one of the best-selling letter quality daisywheel printers in the UK. Graphic mode and full word processing support.



**JUKI 2200:** fully portable daisywheel printer with 2k buffer memory and full word processing support. Ideal for use at home.






**JUKI 6300:** high speed (40 cps) daisywheel printer with 3k buffer memory and full word processing support.

**JUKI 6000:** letter quality daisywheel printer designed specifically for home use.

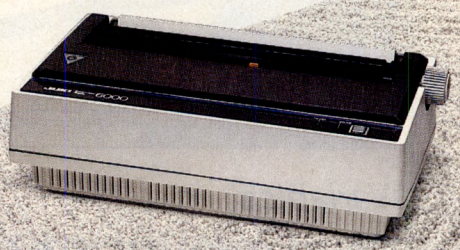

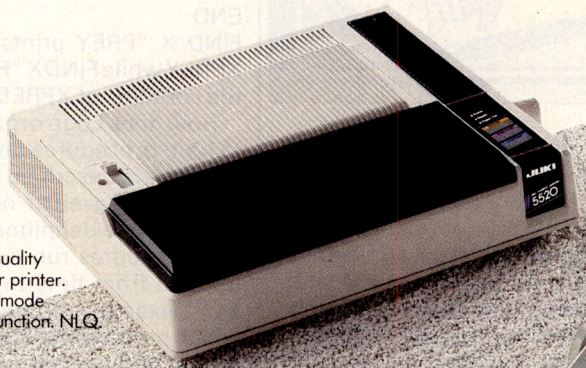


**JUKI 5520:** low-cost, high quality dot matrix personal computer printer. High speed (180cps), graphic mode and optional 4-colour print function. NLQ.




**JUKI 6100-I:** brand-new, IBM* -compatible version of the best-selling 6100. Graphic mode and full word processing support.

# JUKI

Technology true to type

**JUKI (EUROPE) GMBH** · Eiffestr. 74 · 2000 Hamburg 26 · F. R. Germany
Tel.: (0 40) 2 51 20 71-73 · Telex: 2 163 061 (JKI D) · Fax.: (0 40) 2 51 27 24.

Sole distributor: Micro Peripherals ltd Intec Unit 3, Hassocks Wood, Wade Road, Basingstoke, Hants, RG 24 ONE.
Tel.: (0256) 47 3232 (32 lines) · Telex: 8 59669 MICRO PG, Facsimile (0256) 46 1570

systems you can 'package' groups of procedures and 'bury' them so that their definitions can't be accessed.

The exact commands used vary slightly from version to version, but the important idea to grasp is that of the workspace as it is a different concept to a program in Basic.

## The hunt

You can put all these ideas together in a program to investigate how a predator chases its prey. This example is adapted from Abelson and diSessa's excellent book, *Turtle Geometry* (MIT Press 1981).

The predator has a rudimentary sense of smell. The smell of his prey gets stronger as he gets closer, and weaker as he gets further away. If he finds the smell getting weaker, he turns right through a given angle. The prey, on the other hand, moves at random in an attempt to throw off any attack. Amazingly, with this crude attack strategy the predator usually gets his prey, but then the prey is not too intelligent either! This is a powerful example of the value of feedback: a simple mechanism with feedback will often succeed in the long-run.

The program has to control two animals at once:

```
TO DO
  INIT
  EXECUTE.TOGETHER
END
```

INIT sets the original position of the two animals and ensures the pen is up. DISTANCE.LAST.TIME is a global variable that will be used to keep track of the distance between the two animals.

```
TO INIT
  PENUP
  MAKE "XPREY 0
  MAKE "YPREY 0
  MAKE "HPREY 0
  MAKE "XPREDATOR ( - 100 )
  MAKE "YPREDATOR ( - 100 )
  MAKE "HPREDATOR 0
  MAKE "DISTANCE.LAST.TIME 100
END
```

EXECUTE.TOGETHER causes two processes, a prey movement and then a predator movement, to occur 'simultaneously' (actually one after the other in small steps). The procedure also checks if the two animals are close enough together for the predator to grab its prey, and if so it stops.

PREY.STEP and PREDATOR.STEP each require two inputs, one giving the length of each step and the other giving the angle through which the animal turns on each step.

```
TO EXECUTE.TOGETHER
  PREY.STEP 4 40
  PREDATOR.STEP 10 50
  IF DISTANCE.TO.PREY < 10 THEN
    STOP
  EXECUTE.TOGETHER
END
```

(Note: DISTANCE.TO.PREY is an operation and so returns a value that can then be compared with 10.)

The prey moves forward its step-length and then makes a random turn. As the same turtle is being used for both animals, you need to restore the turtle to the place it was last at when it was tracing the path of the prey before making the move, and save the new position before leaving the procedure.

```
TO PREY.STEP :SPEED :TURN
  RESTORE.STATE "PREY
  MOVE :SPEED
  RIGHT (RANDOM 2 * :TURN )
- :TURN
  SAVE.STATE "PREY
END
```

The predator makes a right turn only if the smell is getting weaker. The other details of this procedure are similar to that for the prey.

```
TO PREDATOR.STEP :SPEED :TURN
  RESTORE.STATE "PREDATOR
  MOVE :SPEED
  IF SMELL = "WEAKER THEN RIGHT
    :TURN
  SAVE.STATE "PREDATOR
END
```

The two procedures for saving and restoring the state of the turtle make use of the ability to create variable names during program execution.

```
TO SAVE.STATE :ANIMAL
  MAKE ( WORD "X :ANIMAL ) XCOR
  MAKE (WORD "Y :ANIMAL ) YCOR
  MAKE ( WORD "H :ANIMAL )
    HEADING
END

TO RESTORE.STATE :ANIMAL
  SETX THING ( WORD "X :ANIMAL)
  SETY THING (WORD "Y :ANIMAL)
  SETH THING (WORD "H :ANIMAL )
END
```

You have to use MOVE rather than FORWARD so that lines are only drawn when one animal or the other moves, and not when the turtle swaps from one to the other.

```
TO MOVE :X
  PD
  FD :X
  PU
END
```

DISTANCE.TO.PREY is an operation which outputs the distance between the two animals.

```
TO DISTANCE.TO.PREY
  OUTPUT SQRT ( ( SQR ( :XPREY -
    :XPREDATOR ) ) + ( SQR ( :XPREY
    - :YPREDATOR ) ) )
END
```

SMELL is another operation. It uses the operation DISTANCE.TO.PREY to determine whether the prey is closer or further away, and the global variable DISTANCE.LAST.TIME to keep a record of the distance.

The fact that a procedure stops when an OUTPUT is obeyed is rather inconvenient here, and to simplify the programming I have used an alternative form of the conditional test. TEST evaluates the expression on that line and returns TRUE or FALSE. This value is then used by any following IFTRUE or IFFALSE statements.

```
TO SMELL
  TEST DISTANCE.TO.PREY > :DIS-
    TANCE.LAST.TIME
  IFTRUE OUTPUT "WEAKER
  IFFALSE OUTPUT "STRONGER
END
```

This program illustrates one of the uses to which Logo is well suited. You have a very simple model of a predator's behaviour, but you can now refine one part of the program (PREDATOR.STEP) in an attempt to get a more efficient predator, or devise avoidance strategies for the prey, run the programs and see what happens. It is this ability to easily alter the model that separates this type of program from a simple simulation.

*This is part two of a six-part series.* END





# TJ'S WORKSHOP

*Our monthly pot-pourri of hardware and software tips for the popular micros. If you have a favourite tip to pass on, send it to TJ's Workshop, PCW, 62 Oxford Street, London W1. Please keep your contributions concise. We will pay £5-£30 for any tips we publish. PCW can accept no responsibility for damage caused by using these tips, and readers should be advised that any hardware modifications may render the maker's guarantee invalid.*

## ORIC SOFTWARE TIP

This simple and short machine code routine is designed to stop the cursor flashing. Why you would want to do this is arguable, but I find it a little distracting and occasionally annoying!

It works by re-vectoring the fast interrupt vector located at #229 to the start of the machine code (in this case#400, but the code is relocatable to any area in memory where it is safe from being overwritten by Basic).

The code continually stores zero at location #0274. A ROM-based routine uses the timer at #0274/#0275 to decide how long has elapsed between the cursor having been flashed on and off. When zero is reached, the cursor is flashed on. Therefore, as this routine continually zeros the timer, the cursor is permanently on.

Flashing can be restored to normal by entering DOKE#229, #EC03 as a direct command.

*J M Wright*

**Assembler listing**

```
#400   PHA :TXA:          (Preserve registers)
       PHA: TYA: PHA
#405   LDA £#00           (Load accumulator with zero)
#407   STA#0274           (Store Acc @#0274)
#409   PLA: TAY: PLA:     (Re-instate registers)
       TAX: PLA
#40E   JMP#EC03           (Jump to interrupt handler)
```

**Basic listing**

```
10     FOR I=0 TO 17
20     READ D$ :D=VAL("" +D)
30     POKE#400+I,D
40     NEXT I
50     DOKE#229,#400
60     DATA 48,8A,48,98,48,A9,00,8D,74,02
70     DATA 68,A8,68,AA,68,4C,03,EC
```

## MZ-80K REVERSE VIDEO

Here is a modification to the Sharp MZ-80K based on an article in a user club magazine for reverse video. The original article only gave total screen reversal, but by the addition of just two ICs, it is possible to have reverse video characters anywhere on the screen as on the Commodore Pet.

Although the modification is fairly simple, it should not be undertaken by anyone with doubts about his capabilities.

The two ICs required are: 1) 2102 1k memory chip; and 2) 74LS74. Also required are a small piece of Veroboard and some thin connecting wire.

1) Remove the main PCB and lay it component-side down.
2) Follow the track from pin 9-IC29(74LS165) to the solder connection and link to pin 11-IC26(74LS86).
3) Cut the track going to pin 9-IC29.
4) Link pin 9-IC29 to pin 12-IC26.
5) Link pin 13-IC26 to pin 5-new 74LS74.
6) Link pin 3-new 74LS74 to pin 1-IC29.
7) Link pin 2-new 74LS74 to pin 12-new 2102.
8) Link pin 11-new 2102 to pin 9-IC2(74LS74).
9) Link pin 4-IC23(74LS02) to pin 11-IC2.
10) Link pin 6-IC23 to pin 6-IC30(74LS42).
11) Link pin 12-IC2 to pin A25 on the I/O connector.
12) Locate pin 1-IC24(74LS00), locate the solder connection on the sixth track up from pin 1-IC24 and link to pin 5-IC23.
13) Connect a 4K7 resistor from pin 10-IC2 to pin 14-IC2.
14) Locate the two solder connections between pin 14-IC2 and pin 1-IC1(555) (note that they are very close together). Connect a link from pin 13-IC2 to the solder connection nearest to pin 14-IC2.
15) Link pin 1.
16) Link pin 7-new 74LS74 to pin 9 new 2102.
17) Link the following connections from the Veroboard to IC42(2114):

| **New 2102** | **IC42** |
|---|---|
| PIN 1 | PIN 1 |
| PIN 2 | PIN 2 |
| PIN 3 | PIN 10 |
| PIN 4 | PIN 6 |
| PIN 5 | PIN 7 |
| PIN 6 | PIN 4 |
| PIN 7 | PIN 3 |
| PIN 8 | PIN 5 |
| PIN 9 | PIN 9 |
| PIN 10 | PIN 18 |
| PIN 13 | PIN 8 |
| PIN 14 | PIN 15 |
| PIN 15 | PIN 16 |
| PIN 16 | PIN 17 |

The modification is complete. Using Basic, POKE 57364, 1 for reverse video and POKE 57364,0 for normal video.

To use in a program:

```
10 POKE 57364,1
20 PRINT 'SHARP';
30 POKE 57364,0
40 PRINT 'MZ-80K'
```

This will print 'Sharp' in reverse video and 'MZ-80K' in normal video.

*Howard Winwood*

## AUTOMATIC SEARCH-AND-REPLACE

Wordwise 1 was an excellent word processor for the BBC Micro, one of the few at any price which gave a running word count. Its successor, Wordwise+, is even better, and the feature of a programming language makes it unbeatable for many of the actions that I need. One of these is automatic search-and-replace.

The search-and-replace of Wordwise 1 was something which required quite a lot of typing, and when a large number of replacements had to be made, to conform with a publisher's house style, for example, this was tedious. By using the new programmable Wordwise+, the search-and-replace of a list of items can be made automatic. The list of items is typed into Wordwise+ with the old item followed by the new item, for example:

```
machie
machine
Z-80
Z80 (and so on),
```

and this list is saved under whatever file name you like, such as CORLST.

The search-and-replace program listed here is then loaded into one of the segments, and the file CORLST is loaded into SEG.5. With the text in the main section of memory, activating the program will carry out the search-and-replace action on all the listed items. The machine beeps twice when the program is finished.

The only thing to watch for is that a space should be placed after each complete word when the list is being compiled. If this is not done, there is a possibility of an endless loop forming. If, for example, you have items **wil** and **will** in the list, with no space following **wil**, then the first **wil** in the text is replaced by **will**, and the 'wil' part of 'will' is then replaced by 'will', and so on. The result in this example is to fill the memory with a set of letters 'l'.

On another Wordwise+ topic, has anyone successfully used PDOC when the PSF$ command was in place in a print header? I found it difficult enough to get the PSF$ command to work at all, and when it was used with the PDOC program, it caused the output to take one page

from each file. It also produced the error messages 'Too many files' and 'CPIT error', which are not documented in the Wordwise+ manual.

There are no problems when the command is used with files that are not being printed with PDOC.

*Ian Sinclair*

```
SELECT SEGMENT 5
CURSOR TOP
.LAB1
A$=GLT$
IF A$="" THEN GOTO LAB2
B$=GLT$
SELECT TEXT
CURSOR TOP
REPEAT
REPLACE A$,B$
UNTIL EOT
SELECT SEGMENT 5
GOTO LAB1
.LAB2
SELECT TEXT
CURSOR TOP
DISPLAY
```

# LYNX ROUTINES

Here are some short routines for the Lynx. They can be stored at 6343H (this is within the cassette file name buffer, and is safe if the file name is restricted to less than 51 characters). The routine in Fig 1 starts the cassette motor. To run this routine call 6343H; to stop the cassette press S.

To wait for a key to be pressed and to print it, use the routine in Fig 2. This has the advantage over a Basic program that it will also print control characters (for example CNTL-G = BELL).

The routine in Fig 3 will beep every time an error message is generated (very useful when in auto mode and when you are not always looking at the screen). Also, it does not destroy any pointers to other routines.

These routines can all be placed in memory by entering MONITOR and using the M command. When you are satisfied it is working correctly, it can then be saved on tape by using the D command. As an example, the beep routine is saved with:

D 6343 6357 6343 'BEEP'

This can then be loaded with MLOAD 'BEEP', and will automatically run and beep whenever an error is produced.

*R W Toms*

| | | | |
|---|---|---|---|
| 6343 : START | CD F2 0C | CALL MOTON | |
| 6346 | CD BD 09 | CALL KEYDVR | |
| 6349 | FE 53 | CP 'S' | Check to see if S is pressed, if not jump to start |
| 634B | 20 F6 | JR NZ | |
| 634D | CD FB 0C | CALL MOTOFF | Stop motor |
| 6350 | C9 | RET | |

*Fig 1*

| | | | |
|---|---|---|---|
| 6343 START | CD BD 09 | CALL KEYDVR | Get chr |
| 6346 | B7 | OR A | |
| 6347 | 28 FA | JR Z | Jump to start if no key has been pressed |
| 6349 | CF | RST 8 | Call display routine |
| 634A | 18 F7 | JR | Jump to start |

*Fig 2*

| | | | |
|---|---|---|---|
| 6343 | 21 88 62 | LD HL, ERRAM | Address called during error |

*Fig 3*

*Fig 3 continued*

| | | | |
|---|---|---|---|
| 6346 | 3E C3 | LDA,C3 | Load into ERRAM a jump to beep routine |
| 6348 | 77 | LD(HL),A | |
| 6349 | 23 | INC HL | |
| 634A | 3E 52 | LDA,52 | |
| 634C | 77 | LD(HL),A | |
| 634D | 23 | INC HL | |
| 634E | 3E 63 | LDA,63 | |
| 6350 | 77 | LD(HL),A | |
| 6351 | C9 | RET | |
| 6352 | F5 | PUSH AF | |
| 6353 | 3E 07 | LDA,07 | Load A with 07 (BEEP) |
| 6355 | CF | RST 8 | Call display routine |
| 6356 | F1 | POP AF | |
| 6357 | C9 | RET | |

# UCSD PASCAL PROCEDURES

Pascal assumes that writing onto a VDU will follow the same pattern as writing to a line printer. While an equivalent of such commands in Basic as the MTX's CSR (X,Y) or the PRINT AT (X,Y) of some other micros is rarely essential, it is occasionally useful and cannot be implemented using Pascal's field-width parameter.

UCSD Pascal provides a GOTOXY (X,Y=INTEGER) procedure. This procedure will GOTOXY (X,Y) for any micro which uses the standard ASCII teleprinter control codes for VDU formatting. (CHR (26) (ASCII 'SUB') homes the cursor to the start of the current page, and CHR (25) (ASCII 'EM') advances the print cursor one position without printing a space.

*B L Houghton*

```
PROCEDURE GOTOXY(X,Y:INTEGER);

  {Places print position/cursor at}
  {Cartesian coordinates supplied.}
  {Note that error-trapping should}
  {be outside this PROCEDURE,so    }
  {that alternate text windows,    }
  {screen modes,etc.may be handled}
  {Assumes that micro uses ASCII   }
  {contol characters as VDU format}
  {commands.                       }

VAR A:INTEGER;
BEGIN
  IF (X>=0) AND (Y>=0) THEN
    BEGIN
      WRITE(CHR(26));
      FOR A:=1 TO Y DO WRITELN;
       FOR A:=1 TO X DO WRITE(CHR(25))
    END
END;
```

# COMMODORE DISK DIRECTORY

Here is a tape and listing of a disk directory subroutine for a Commodore 64, which allows the user to read a disk directory without destroying a program in memory.

To add it to programs, type it in and save it as a separate program as usual.

Now load the program it is to be added to (ensure this contains line numbers below 60000). Type in direct mode:

POKE 43, PEEK(45)-2
POKE 44, PEEK (46)
NEW
LOAD "NAME OF DISC ROUTINE",8
POKE 43,1
POKE 44,8

Remember to press RETURN after each statement. The routine and your program will now be merged.

*I Learmouth*

```
60000 OPEN1,8,0:CLOSE1:IFST=-128THEN60200
60010 OPEN1,8,0,"$0"
60020 GET#1,A$,B$
```

```
60030 GET#1,A$,B$
60040 GET#1,A$,B$
60050 M=0
60055 R$="■■"
60060 IFA$<>""THENM=ASC(A$)
60070 IFB$<>""THENM=M+ASC(B$)*256
60080 PRINT"■"MID$(STR$(M),2);TAB(5);"■";
60090 GET#1,B$:IFST<>0THEN60160
60100 IFB$<>CHR$(34)THEN60090
60105 GET#1,B$:IFB$<>CHR$(34)THENPRINTR$+B$;:GOTO60105
60110 GET#1,B$:IFB$=CHR$(32)THEN60110
60120 PRINTTAB(27);:M$=""
60130 M$=M$+B$:GET#1,B$:IFB$<>""THEN60130
60140 PRINT"■",LEFT$(M$,3)
60150 IFST=0THEN60030
60160 PRINT"BLOCKS FREE":CLOSE1
60170 END
60200 PRINT"■DEVICE NOT PRESENT"
```

# UNROLLING LOOPS IN BASIC

What is the fastest way, in Basic, of summing the N elements of a one-dimensional array X? I suspect most programmers would opt for the simple, tight loop embodied in line 510 of the accompanying program. There is, however, a faster method, based on the idea of 'unrolling' a loop. This technique consists of replicating the contents of the loop one or more times and making the appropriate adjustments to the loop counter. The aim is to decrease the overall execution time of the loop by reducing the overheads of incrementing the loop variable, testing for the end of the loop, and branching back to the start of the loop.

Line 630 of the program contains a loop unrolled to a depth of three. Other moduli are possible, and some experimentation is required to find the most suitable value of M for a particular application and a given computer. If a higher value of M is to be used, extra terms should be added in line 630 so that each time through the loop, M consecutive terms of the array X are summed.

Line 620 is a clean-up loop which deals with any elements remaining after the N elements of X have been divided into groups of three. The table in Fig 1 gives some timings obtained on the Commodore Pet using the listed program. The unrolled loop provides a useful speed increase for N greater than about 10, although it is marginally slower than the standard method for smaller N due to its start-up overhead. I would expect similar speed increases to be obtained for the other popular micros.

This technique is well worth considering if you need to squeeze the last ounce of performance out of your Basic interpreter!

*Reference:* JJ Dongarra and AR Hinds (1979), *Unrolling loops in Fortran, Software Practice and Experience*, vol 9, 219-226.

*Nick Higham*

| N | Time for standard method (Jiffies) | Speed-up ratio |
|---|---|---|
| 10 | 5 | 1.2 |
| 15 | 7 | 1.0 |
| 25 | 12 | .917 |
| 100 | 45 | .844 |
| 500 | 221 | .855 |
| 1000 | 439 | .838 |

*Fig 1*

```
10 REM UNROLLING LOOPS
15 REM IN: PET BASIC
20 REM EXAMPLE: SUMMING X(1),...,X(N)
30 REM BY: NICK HIGHAM
40
100 REM VARIABLES ARE 'FASTER' THAN CONSTANTS:
105 M=3:P=1:Q=2
110 INPUT N
120 DIM X(N):FORI=1TON:X(I)=I:NEXT
130
200 T=TI:GOSUB500:T1=TI-T:PRINTT1,S
210 T=TI:GOSUB600:T2=TI-T:PRINTT2,S
220 PRINT"SPEED-UP RATIO:"T2/T1:END
230
500 REM STANDARD METHOD
505 S=0
510 FORI=1TON:S=S+X(I):NEXT
520 RETURN
530
600 REM UNROLLED LOOP : MODULUS M=3
605 S=0
610 R=N-INT(N/M)*M
620 IF R>0 THENFORI=1TOR:S=S+X(I):NEXT
630 IF R<N THENFORI=R+1TONSTEPM:S=S+X(I)+X(I+P)+X(I+Q):NEXT
640 RETURN
READY.
```

# BBC LISP

Acornsoft Lisp has, like many small-scale Lisp systems, no provision for loading and saving separate functions. These functions will do that. For example, to save the function FLATTEN use (FSAVE 'FLATTEN); to recall it, use (FLOAD 'FLATTEN).

The function FLATTEN is described in the Lisp user guide. It works by storing the definitions as an ASCII file on disk or tape, and will work on the BBC A BBC B and Electron. You can use those functions to build up a whole library of LISP definitions without the whole Lisp-environment.

FSAVE and FLOAD won't work with functions implemented in machine code. ADDHEAD is used in the definition of FSAVE , so don't forget to type in ADDHEAD.

*Dreesen Jos*

```
(DEFUN
   FSAVE
   (M (LW))
   (*
      (IMPLODE
         (CONS
            (QUOTE SPOOL)
            (CONS BLANK (EXPLODE M)))))
   (SETQ LW LINEWIDTH)
   (SETQ LINEWIDTH 130)
   (SPRINT (ADDHEAD M))
   (PRINC CR)
   (SETQ LINEWIDTH LW)
   (* (QUOTE SPOOL)))


(DEFUN
   FLOAD
   (M)
   (*
      (IMPLODE
         (CONS
            (QUOTE EXEC)
            (CONS BLANK (EXPLODE M))))))


(DEFUN
   ADDHEAD
   (L)
   (CONS
      (QUOTE DEFUN)
      (CONS L (CDR (EVAL L)))))
```

# BBC BREAKS

The effects of the BREAK key and CTRL BREAK can be easily harnessed using the *FX247 command; this redirects the Break vector to a user's own routine. Certain protocols must be observed, and the operating system has to be allowed to reset variables.

The OS checks the break vector twice, and it is best to intercept the vector the second time. During the first check, the OS enters with carry clear and the second with carry set. To tell the OS the address of the user's routine, *X248 and *FX249 are used (low byte, high byte respectively). The demonstration program

shows the theory in practice.

```
10  MODE 7:REM Intercept
  break
20  FOR PASS=0 TO 3 STEP 3
30  P%=&C00
40  [OPT PASS
50  BCS START   /Check if
  second access of the vector
60   RTS
70  .START
80  CLI      /Re-enable
  interrupts
90  LDX #&00      /Print string
100  .LOOP      /Onscreen
110  LDA string,X
120  JSR &FFE3
130  INX
140  CMP #&0D
150  BNE LOOP
160  JSR &FFE3
170  RTS
180  .string
190  ]
200  $P%="The Soup
  Dragon's dropped a
  Clanger"
210  P%=P%+LEN($P%)+1
220  NEXT PASS
230  *FX247,76
240  *FX248,00
250  *FX249,12
260  PRINT CHR$(129)
  "PRESS BREAK!!"
```

Beeb disks may be protected by setting the directory option to the 'teletext conceal' character. Type in PRINT CHR$(&98);"*" [return], then type in *DIR. Use the cursor keys to copy the invisible character before the '*'. When it is copied correctly, the copy cursor disappears. Now press RETURN. Any files saved while this directory is set will not be visible when the directory is set back to normal. To see the filenames, this procedure must be repeated — a boot file could do it automatically.

To give simple protection in a basic program by hiding any important lines using CHR$)42) ('*'), make a REM statement at the end of the lines to be hidden. This REM statement should be made up of the number of asterisk characters required to hide what goes before it (don't forget to include the REM itself).

Now fit into your program these lines:

```
1  TEST=FALSE:FOR
  X=PAGE TO TOP STEP 1
2  IF ?X=&F4 THEN
  TEST=TRUE
3  IF ?X=&0D THE
  TEST=FALSE
4  IF ?X=42 AND TEST=TRUE
  THEN ?X=&7F
5  NEXT X
6  END
```

Run the routine with GOTO 1 and then DEL.1.6. When the program is listed, the REMs will have been filled with CHR$(&7F) (the delete character) which will cause the characters before the REM to be deleted from the screen when the program is listed (that is, the parts of lines that you don't want visible).

It is possible to redefine the copy cursor by storing the new ACSII code at address &366.

*Stephen D Jamieson*

# NEWBRAIN CAPS LOCK

Using the NewBrain default screen, capitals lock can be achieved by either using POKE43,1 or Control/1. But if a series of pages are opened, this is not possible; the solution is shown in this program.

Line 160 traps the graphics/L key input and the subroutine sets L at either 0 or 1. The punch line is 1030, which alternately sets CAPS LOCK and normal with each consecutive graphics/L keystroke.

*PM Stevenson*

```
100 REM*set keyboard and screen*
110 kb=55:sc=99:REM*allocate streams
120 CLOSE#kb:OPEN#kb,5:REM*open keyboard device 5 with stream #55
130 CLOSE#sc:OPEN#sc,0,sc,"s24":REM*open screen 40 * 24 on stream #99
140 PUT#sc,22,1,3,6:REM*place cursor on screen #99 at x=1 y=3
150 GET#kb,a:REM*read key entry
160 IFa=140THENGOSUB1000:GOTO150:REM*trap graphics/L = Little/Large Lock
170 PUT#sc,a:REM*print key entry to screen
180 GOTO150:REM*for next key entry
1000 REM*capitals lock sub routine
1010 l=l+1:REM*increment by count of 1
1020 IFl>1THENl=0:REM*ensure either 0 or 1
1030 PUT#kb,l:REM*set keyboard mode to 0 = normal / 1 = CAPITALS LOCK
1040 RET
```

# IBM PC # REDEFINITION

Something like "GWBASIC LPT_INIS" included in an autoexec can make spreadsheet automatic pounding considerably more useful.

*Will Roberts*

```
10      'Epson FX 80/100 printer £s and #s redefine. For IBM PC or Compatables
20 ON ERROR GOTO 280
30 CLS
40 LOCATE 10,24:PRINT"Printer inisalization program."
50 LOCATE 12,8
60 PRINT"This redefines the £ sign and the # to be the same as the screen."
70 READ N                       '  If no WHILE/WHEND then change 80 & 110 to:
80 WHILE N<>-1                  '  IF N=-1 THEN GOTO 120
90 LPRINT CHR$(N);
100 READ N
110 WEND                                GOTO 80
120 ON ERROR GOTO 0
130 LOCATE 20,23
140 PRINT"Printer inisalization done with."
150 SYSTEM '                            This could be system, return, stop, or .
160                                     Move rom chars. into ram
170 DATA 27,58,0,0,0
180                                     Use ram chars.
190 DATA 27,37,1,0
200                                     Define 35 as #
210 DATA 27,38,0,35,35,140,40,40,254,254,40,40,254,254,40,40,0
220                                     Define 156 as £
230 DATA 27,38,0,156,156,139,18,18,126,146,18,128,2,128,66,0,0
240                                     Let chars. 128-159 & 255 be printed
250 DATA 27,54
260                                     End of data flag
270 DATA -1
280 IF (ERR=24)OR(ERR=25)OR(ERR=27) THEN LOCATE 20,24:PRINT"THE PRINTER IS PLAYI
NG DEAD.":BEEP
290 LOCATE 22,26:PRINT"HIT A KEY TO TRY AGAIN."
300 RESTORE '                           -Start again!
310 DEF SEG :POKE 106,0 '               -Empty's the keyboard buffer
320 IF INKEY$ <>"" THEN RESUME 10 ELSE GOTO 320
```

# AMSTRAD LVAR

This short utility for the Amstrad will print out all the variables and their current values used in a Basic program. Put a break point where the bug occurs and type GOTO 65500. The program should be MERGEd in from tape or disk rather than loaded in.

This routine uses a few variables of its own which should be avoided in your Basic program. These are LV,LVS, LVL and LVS$.

*J W Jack*

```
65500 '-----------------------------------------------
65501 '- LVAR. - J.W.Jack - 1985.
65502 DEF FN1v(x)=PEEK(x)+256*PEEK(x+1) :lv=0 :lvs=FN1v(44679)-17
65503 FOR lvl=FN1v(44677) TO lvs-16
65504 IF PEEK(lvl)>0 THEN GOSUB 65508
65505 NEXT
65506  lvs=lvs-16  :   POKE  44679,lvs-INT(lvs/256)*256  :   POKE
44680,INT(lvs/256)
65507 END
65508 '- Label.
65509 lvl$=""
65510 IF PEEK(lvl)>128 THEN lvl$=lvl$+CHR$(PEEK(lvl)-128) :  GOTO
65511 ELSE lvl$=lvl$+CHR$(PEEK(lvl)): lvl=lvl+1 : GOTO 65510
65511 PRINT lvl$;
65512 '- Type & Value.
65513 lvl=lvl+1
65514  IF PEEK(lvl)=1 THEN PRINT"% = ";FN1v(lvl+1)  :  lvl=lvl+3:
RETURN
65515   IF   PEEK(lvl)=2   THEN   PRINT"$   =   ";CHR$(34);   :FOR
lvg=FN1v(lvl+2)   TO   FN1v(lvl+2)+PEEK(lvl+1)-1   :   PRINT
CHR$(PEEK(lvg);:NEXT   :PRINT   CHR$(34)   :   lvl=lvl+PEEK(lvl+1):
RETURN
65516   IF   PEEK(lvl)=4   THEN   FOR   lvg=1   TO   5:POKE
lvs+lvg,PEEK(lvl+lvg) :NEXT :PRINT " = ";lv :lvl=lvl+6 :RETURN
65517 lvl=lvl+2 : PRINT" is a FuNction." : RETURN
65518 '-----------------------------------------------
```

# ATARI CLOCK

This listing is for all Ataris, and is a real-time clock which is accurate to about 10 seconds a day.

When run it provides a 12-hour digital clock in the top right-hand corner of the screen.

The program is interrupt-driven, leaving normal operations unaffected, and updates the time by looking at the Atari's 50Hz clock.

It is affected by scrolling or clearing the screen, but will reappear in the same place after one second.

*Mauro Maestranzi*

```
9000 GRAPHICS 0:? "REAL TIME CLOCK":? :? "BY MAURO MAESTRANZI":? :? "TIME IS IN
HH:MM:SS FORMAT"
9010 TRAP 9030
9020 FOR A=1 TO 300:READ M:POKE A+1535,M:NEXT A
9030 ? :? "ENTER TIME: ";USR(1536)
9040 DATA 162,0,32,199,6,24,42,42,42,141,255,6,32,199,6,24,189,255,6,157,240,
6,232,224,3,240,11,169,58,141,251,2,32
9070 DATA 200,6,76,2,6,173,49,2,133,205,173,48,2,24,105,63,133,204,144,2,230,205
,169,0,141,14,212,169,79,141,36,2,169,6
9080 DATA 141,37,2,169,64,141,14,212,76,0,160,162,0,202,208,253,248,14,162,0,173
,243,6,105,1,141,243,6
9090 DATA 201,60,144,96,142,243,6,173,242,6,105,0,141,242,6,201,96,144,35,142,24
2,6,173,241,6,105,0,141,241,6,201,96
9100 DATA 144,20,142,241,6,173,240,6,105,0,141,240,6,201,10,144,5,169,1,141,240,
6,173,221,6,208,41,24,162,2,160,0,189
9110 DATA 240,6,72,41,15,9,16,145,204,104,136,106,106,106,106,41,15,9,16,145,204
,136,169,26,145,204,136,202,16,225,200
9120 DATA 169,0,145,204,76,98,228,142,254,6,32,226,246,174,254,6,142,254,6,32,17
0,246,41,15,234,174,254,6,96,0,0,0,0,0,0
9130 DATA 0
```

# SCREENPLAY

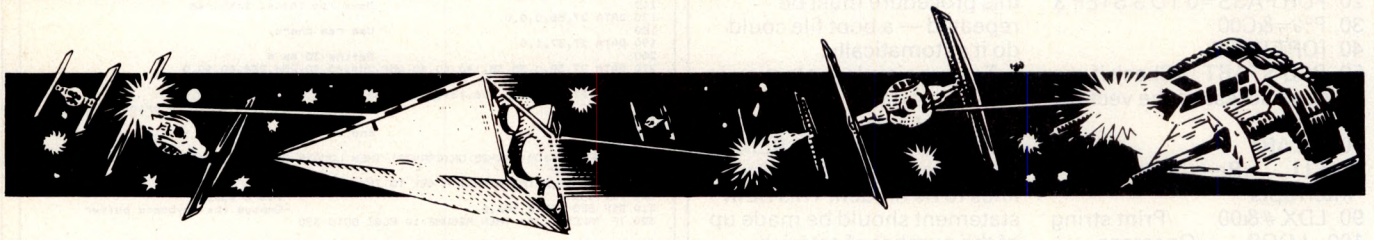

*Grand Prix-style motor racing, hassle from intergalactic muggers, and an impression of the end of the world nuclear-style — take a trip with Stephen Applebaum through this month's selection of great games for the BBC, Commodore 64, Spectrum and Atari.*










## Grand Prix

**Title: Revs**
**Computer: BBC B**
**Supplier: Acornsoft**
**Format: Cassette, disk**
**Price: £14.95/£17.65**

Aviator and Elite are hard acts to follow but Acornsoft has done it again with Revs, a full-colour motor racing game which looks set to emulate the success of its predecessors.

Revs' scenario is not new. Atari had the idea some years ago with Pole Position, but whereas the latter provided a good, fun arcade game, it never captured the exhilaration of sitting behind the wheel of a powerful racing car hurtling around a Grand Prix circuit at break-neck speeds.

Revs, on the other hand, straddles the boundary between pure arcade and simulation, treading the same path cut by Aviator, the first of Acornsoft's classic trio. The action is so accurate, you can almost feel the wind gushing from the television as you motor your way around the Silverstone track.

Before getting down to the serious business of racing, a practice section gives you a chance to get the feel of the car's controls. Most new players will be thankful for this option — the manual is not kidding when it says: 'You will need to practise a great deal to master the skills of a formula 3 driver.' Even getting the car running is difficult, but once started you soon find yourself motoring along quite happily until the first bend when you skid off the track and brake, putting the car into an uncontrollable spin. Crashing results in a rather disappointing lattice-work pattern being drawn across your field of view.

When you feel you are confident enough to race, a state I never reached, you can be ambitious and embark on your first time trial. To be competent to race, the manual suggests that you should consistently complete a circuit in under 1.40 minutes. Most drivers won't manage this for quite a while, so there are three classes of race: novice, amateur and professional.

The novice class can be entered by anyone because rescue crews are on constant alert to help with the aftermath of a pile-up. The amateur and professional classes cannot be entered immediately, both requiring a qualifying time.

Racing is difficult and takes a lot of concentration. Not only do you have to deal with the perils of coping with your own car, but also make sure that you don't bump into anyone else. Even the slightest knock can send you careering onto the grass, only to be man-handled back onto the track by the rescue services.

I would not normally rave about a motor racing game — there are far too many of them — but Revs has something different to offer. The graphics surpass even the excellent Aviator, achieving a stunning authenticity that will be difficult to match in the future.

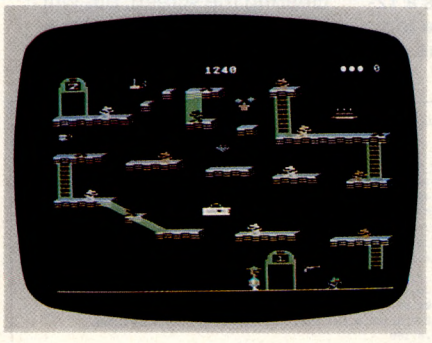


## Revenge is mine

**Title: Bounty Bob Strikes Back**
**Computer: Commodore 64**
**Supplier: US Gold**
**Format: Cassette**
**Price: £9.95**

Bounty Bob Strikes Back is the long-awaited follow-up to Miner 2049er, the program which provided the inspiration for games such as Manic Miner and Jet Set Willy (you should have already guessed that Bounty Bob Strikes Back is a ladders and levels game).

Like its predecessor it is set inside a mine, but unfortunately things have changed for the worst since Bob's first visit. Whereas the mine was previously inhabited by friendly, furry animals, it is now overrun with radioactive mutants, the result of a metamorphosis the animals have experienced due to their food having been contaminated with waste dumped by the evil Yukon Yohan. Contact with any of the beasties is fatal, so you, as Bounty Bob, have your work cut out if you are to secure the mine and defeat Yukon Yohan.

As you bounce around the mine's various levels, you collect pieces of equipment which lower the radiation level, allowing you to wreak revenge on the mutants. But you must be quick

because the radiation level soon rises again. Getting around the mine involves jumping between ledges and climbing ladders; there are often shortcuts with various kinds of lift, but I found them difficult to use. So much so, in fact, I was not able to get past the second of the game's 25 screens.

Anyone who enjoyed Miner 2049er will find Bounty Bob Strikes Back an absolute joy. It's a game which makes Jet Set Willy look almost prehistoric.

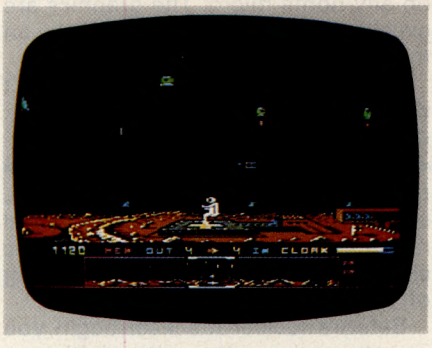

## 'I got the blues...'

**Title: Dropzone**
**Computer: Atari**
**Supplier: US Gold**
**Format: Cassette**
**Price: £9.95**

Dropzone is another minor classic from US Gold. This time you are not down a mine or flying over Moscow but gliding over the surface of a planet, testing out your new jet pack. Noticing several blue creatures having difficulty landing, you decide to help by taking them to the dropzone.

Unbeknown to you, they were having rather more trouble than just manoeuvring, and were in fact being pursued by a horde of intergalactic muggers. Fortunately you are carrying three smart bombs, a laser and a cloak, so you are not exactly defenceless.

Defender fans will love Dropzone because the playing technique is exactly the same — you zoom over the planet's surface, blasting away at the ever-increasing number of attackers. Your normal mode of defence would be to use a laser, but when the going gets tough smart bombs, each of which destroys everything within a set radius, become the only viable method. The ambiguously-named cloak also comes in handy, making you invisible for a limited period.

Although Dropzone is virtually a rewrite of Defender, the quality of its graphics and sound make it far superior.

The planet's surface, for example, is much closer to an imagined lunar landscape, while the explosion caused by your man being hit by an enemy projectile is the nearest I have yet seen to a firework. The sound is also excellent, with realistic explosions and an enticing whistle coming from either the blue creatures or the enemy — I couldn't tell which.

I often find arcade games all much of a muchness, but Dropzone's riveting action really got the adrenalin flowing. This is one game I will return to again and again.

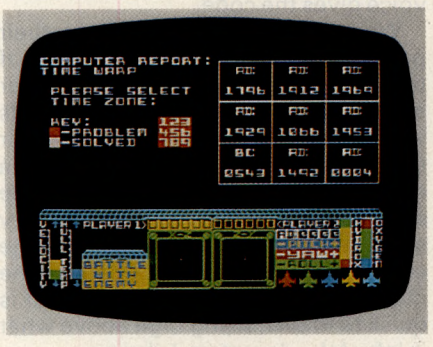


## Across the miles

**Title: Starion**
**Computer: Spectrum 48k**
**Supplier: Melbourne House**
**Format: Cassette**
**Price: £7.95**

When Elite appeared on the BBC it was hailed as being truly innovative, thanks mainly to its superb graphics. Who, then, would have thought that a game sporting 3D wire-frame graphics, more detailed and fast-moving than those on the BBC, would appear on the Spectrum as a game called Starion from Melbourne House?

Starion is one of those rare games which mixes good, old-fashioned arcade action with brain-teasing puzzles. Players require not only physical skills, but mental dexterity as well. Starion achieves this by having a scenario so outlandish, it makes even the C5 travelling 15 miles on a single recharge seem plausible.

You are told that time-travelling aliens have managed to rearrange history, putting the universe at risk of total collapse. Only by going back through time, destroying the aliens and capturing their historical booty, can the cosmos be returned to order.

Trouble is, the cargo is shared between several ships in each time zone, coming in the form of single letters. The only solution, therefore, is to fly to a time zone, capture the letters and form a word from them. Generally, the word will be an answer to a question posed in one of the other time zones, so not only do you have to be able to decipher the answer, but know your history too. The obvious answer is not always the right one so a little lateral thinking is needed.

Working out the anagrams is a small but extremely important part of the game. For the most part, you can zap away at aliens to your heart's content, but unless the anagrams are successfully completed, Starion can become extremely boring, developing into little more than a souped-up Space Raiders.

On the whole, Starion is an excellent game which, although not as complex as Elite, is a milestone in Spectrum programming in its own right.

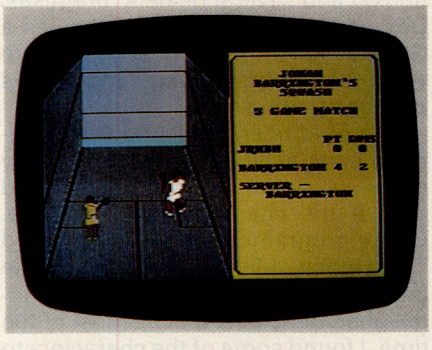

## Sport for all

**Title: Jonah Barrington's Squash**
**Computer: Commodore 64, Spectrum 48k**
**Supplier: New Generation Software**
**Format: Cassette**
**Price: £7.95**

You would think that squash, the agrophobic's version of tennis, would be a difficult game to simulate on a computer. But Jonah Barrington's Squash, from New Generation Software, admirably captures the atmosphere of the sport, including its little idiosyncrasies.

Versions are available for the Commodore 64 and Spectrum, although both differ dramatically due to the pros and cons of the machines. The major difference is in the success of something the game's writers call 'Reprosound', which allows New Generation Software to digitise virtually any sound and incorporate it into a program without the use of any hardware add-ons.

In this case, Jonah Barrington's voice has been written into the program to call scores, lets, and so on. For obvious reasons, this can be appreciated more on the Commodore 64, being reduced to little more than a hiss on the Spectrum. The graphics are also better on the 64.

Jonah Barrington's Squash can be played by one or two players. I recommend the former for beginners because, unless both players have had plenty of practice, the game can become very tedious as both successively miss the ball.

If you know anything about the game, you will be familiar with the grading system used to indicate the speed of a ball. For example, a novice would usually play with a slow ball, identified by a red spot, while a professional would usually play with a yellow ball. There are four levels of difficulty, all of which are included in the program.

Something that will be of most use to

the Spectrum owner is the ability to customise the controls. This facility enables the user to set the up, down, left and right controls for a joystick, allowing the use of almost any interface.

During play, the display features a view from the rear of the court as if you were looking through a glass wall. By moving the joystick you are able to move your man around the court, as well as control his racquet arm. In this respect the Spectrum version is similar to Psion's Match Play.

Jonah Barrington's Squash is one of the best sport simulations I have seen on any home micro. The graphics are excellent, as is the sound, especially on the Commodore.

It's a pity that Spectrum owners won't be able to hear Reprosound at its best, due to the limited Spectrum sound.

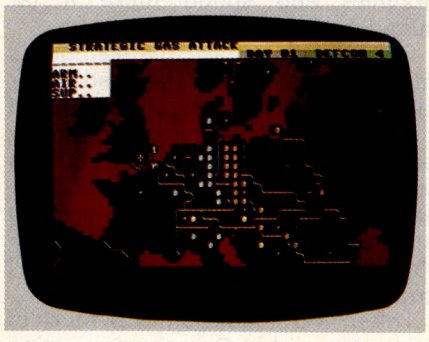

## The shape of things to come?

**Title: Theatre Europe**
**Computer: Commodore 64 (as reviewed), versions planned for the Amstrad CPC 464, Atari, MSX**
**Supplier: PSS**
**Format: Cassette, disk**
**Price: £9.95/£12.95**

As if we didn't have enough to worry about, PSS' latest offering speculates over what could happen in the first 30 days of a war in Europe, a time-span long enough to cover the beginning of hostilities to the end of civilisation.

As the opening music runs its course, you are asked to select a side and whether or not 'action screens' are to be used (the latter are arcade sequences). That done, let battle commence!

The game begins on day one at DEFCON 5 — a military term indicating the likelihood of making a nuclear attack: if the condition reaches DEFCON 1, it means the button has been pressed and the missiles are flying. Which direction they take is for you to decide.

Like most war games, the major part of Theatre Europe takes place on a map. Armies are represented by circles, blue for NATO and red for the Warsaw Pact, and each can be identified by the use of a cursor. Individual armies can be moved via the cursor, with the limitation that those deployed in the mountains can only move every other go.

Following the movement phase comes the attack phase, which involves much the same procedure as that already described except that both an allied and opposing army are selected. If the action screens option is chosen, the ensuing skirmish is depicted by a graphic sequence showing enemy tanks, jets and helicopters attacking your position in wonderful 3D. You can fire back and, depending on how many of the enemy are destroyed, you receive a bonus (or penalty). After a set length of time, the display switches back to the map screen.

Last but not least is an air phase, during which air units can be assigned to special missions. Level one can be played without employing this phase, but this slows the game down. Special missions include launching a strategic chemical or nuclear attack, or just firing off all your missiles at once.

Before a nuclear attack can begin, you must know the codeword that initiates a launch. This is given on a map supplied with the program, although a more interesting way of getting it is to phone a number flashed up onscreen. When dialled, you get a taped message in the form of a simulated news broadcast telling of a breakdown in arms limitation talks and a build-up of Soviet tanks on the East German border. Suddenly, the message breaks off and a woman's voice gives the code.

While the missiles are in flight, their path is depicted on the map screen. If the strike was an all-out one, the 'other side' is quick to retaliate, firing off all its warheads. As the missiles near their target the display switches to show a city, while an impressively accurate siren sounds to warn of the attack. Very soon, the city is rocking under the effects of the explosion. Of course, the inevitable mushroom-shaped cloud is quick to follow, rising high above what is left of the devastated skyline.

When all the major cities have been destroyed, a feeble message, 'Civilisation as we know it has been destroyed' appears; the world ending with more of a whimper than a bang.



## A little dodgy, maybe...

**Title: Minder**
**Computer: Spectrum (as reviewed), MSX, Amstrad, Memotech and Commodore 64**
**Supplier: Dk'tronics**
**Format: Cassette**
**Price: £9.95**

Minder is another attempt to take a successful TV program or film and turn it into a game. The problem with this idea is that the writers feel the game will be a success merely because of the reputation of the product on which it is based, the result being a program of little substance and limited appeal. Minder does not fall into this category, although it does have its faults.

As Arthur Daley, you are your own worst enemy in this simple game of buying and selling, the aim of which is to finish a 14-day trading period with more money than when you started. Only thing is, many of the goods you have stocked up in your warehouse are stolen, putting you under the close scrutiny of Sgt Chisholm, the local bobby, as well as making them difficult to get rid of.

Help is at hand in the form of Terry, who will deliver and collect goods as well as act as your minder — at a price, of course. Apart from being a general dogsbody, he will also get you out of any tight corners. For example, if frustration leads you to swear at one of the other characters, you will find yourself in hospital and several trading days down unless Terry's on hand to dissuade your attacker.

The number of locations that can be visited are limited to Terry's flat, the Winchester Club, the lock-up (warehouse) and several dealers' premises. Driving between locations involves a Ghostbusters-like sequence where your car motors through the streets between trading sites.

One of Minder's most powerful features is its ability to allow a two-way conversation between the player and any of the characters in the game. Unlike programs such as Valhalla and The Hobbit, Minder really gives the impression that its characters are intelligent, or at least it does most of the time. I found some of the characters to be a little shaky in their trading technique, sometimes accepting a lower price for goods than that which I had offered. Even so, I didn't manage to finish the game with a profit.

Minder is by no means perfect, but it does offer an interesting alternative to alien-bashing or adventuring. **END**

# THE ONLY S100 WORTH THINKING ABOUT.

HTE

**Our range includes 5 processors from 8 to 32 bit.**

HIGH TECHNOLOGY ELECTRONICS LTD., 303/305 PORTSWOOD ROAD, SOUTHAMPTON, SO2 1LD. TEL: (0703) 581555 TELEX: 477465 HTEL G.

---

NEW

# How To Make Money From Your Software

LEGAL AND BUSINESS ASPECTS

**ANNE STAINES** LL.M. Barrister

**A GUIDE TO**

- The legal protection of computer software
- Confidential information
- Piracy and counterfeiting
- Trade marks and 'passing off'
- Your legal rights
- Setting up a business or selling through an established software publisher
- Raising finance
- Marketing and selling
- Contracts
- Exports
- Useful addresses

ORDER FORM PAYMENT WITH ORDER

To: **ESC Publishing Limited**, 25 Beaumont Street, Oxford OX1 2NP

Please supply ___ copy/copies of **How to Make Money from Your Software** by Anne Staines at £6.75 plus 80p post and packing

Name _____

Address _____

ESC Publishing Limited Co. Reg. No. 1335403
VAT Reg. No. 311 4190 09

PRICE £6.75 Available from bookshops or direct from **ESC Publishing Limited**

---

# Adelphi Business Computers Ltd.

– Full support

– Competitive prices

– Nationwide delivery & installation service

*Specialists in*

– Networking

– CAD/CAM (Robocom & Autocad CAD systems supplied)

– Tailored systems

IBM Authorised Dealer

Apple Computer™

ACT

FORTUNE 32:16

*Don't delay — Telephone Coventry* (0203) 553944

We try harder

# BIBLIOFILE

*In this month's book selection, David Taylor warns against DIY micro maintenance and throws himself into the trenches to avoid the computer wars. Read on . . .*

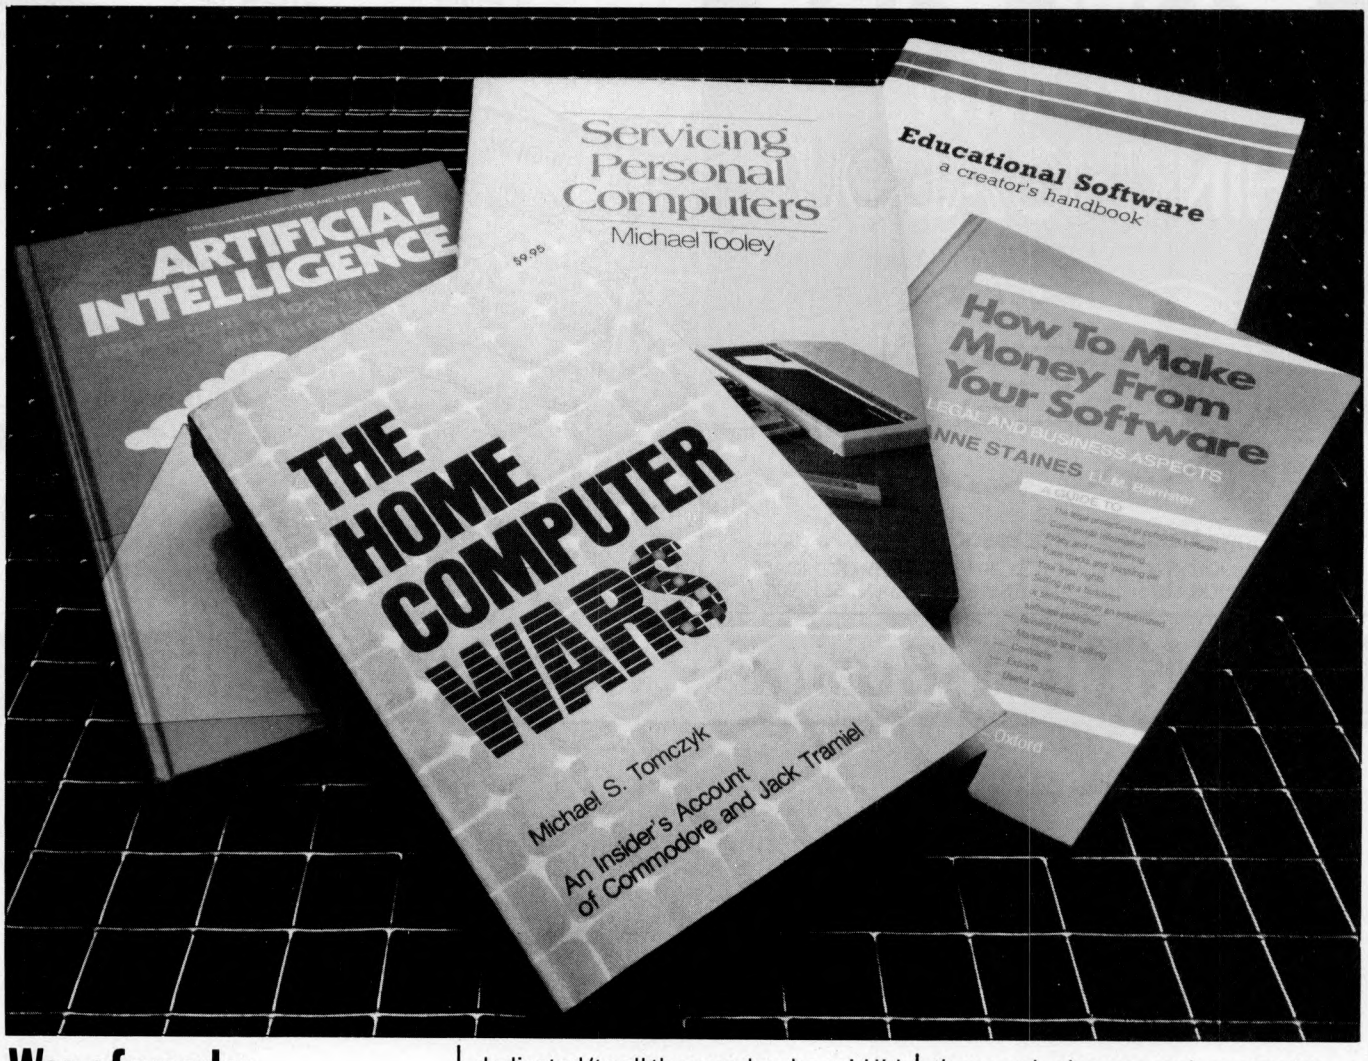


## War of words: inside Atari

**Title: The Home Computer Wars**
**Author: Michael S Tomczyk**
**Publisher: Computei Books**
**Price: $9.95**

This book, if I might just sum up, is a stinker. Ostensibly it's the 'inside' story of how Jack Tramiel (for four years the author's boss) founded Commodore, fought off arch-rival Atari, then quit Commodore, retired, went round the world, came back and bought up Atari. But the person we get to know, alas, isn't so much the irrespressible Tramiel as the insufferable Tomczyk. He's not a shy man, still less a modest one. Mad as a hatter is how I'd describe Mr Tomczyk.

His obsessively gee-whiz story is dedicated 'to all the people who said I'd never make it, because they're the ones who made me try the hardest,' among them Tomczyk's Mrs 'for making me feel like a genius when I felt like a shlub' and his mother 'for giving up her singing career so I could be a writer.'

*The next thing I knew,* begins writer Tomczyk, *I was sitting in a foxhole with a bunch of smiling young geniuses. I poked my head out of the trench to see what was going on and a floppy diskette came whirring by. I ducked and it missed me by inches. Somebody handed me a chip and yelled 'Start Computing!' That's the kind of war it was.*

For this Mom gave up singing?

Wait, here's Jack Tramiel. *His large dark brown eyes were set deep beneath thick wiry brows and tended to bulge slightly . . . When he spoke his lips curled, twisting and contouring into a thousand shapes and portraying a thousand emotions . . . Sometimes he looked and moved like an Asian bear . . . I guess you could say he had a schizophrenic face. It matched his moods, but then we were all rather schizoid at Commodore. You had to be. It was war.*

And this, I imagine, must be shell-shock. There are a further 300 pages in this vein.

Tramiel was himself a survivor of the Nazi holocaust and apparently ever after saw his business in terms of war — his men as tough troops, fighting off the Japanese, slashing prices to conquer the home front — not to mention more prosaic analogies: 'Business is like sex: you have to be involved.'

Tomczyk is a Vietnam veteran and asserts that he was as a result battle-hardened for the rigours of corporate

in-fighting, back-stabbing and character assassination which, we're repeatedly told, were the norm at Commodore.

Maybe so, but Tomczyk's holy-smoke narrative style parodies all attempts to get any interesting insight. You're left incredulous right enough, not so much at the way things were (and presumably still are) with Tramiel, but by the fact that one of his acolytes can produce such gunk.

Not, as you may have gathered, recommended.

## Curiosity kills

**Title: Servicing Personal Computers**
**Author: Michael Tooley**
**Publisher: Newnes Technical**
**Price: £17.95**

My advice to those about to take a computer to bits is — *don't*. Unless you see diagnostic fault-finding as your life's work (in which case thorough training would not come amiss), to tinker with bewilderingly complex and delicate microelectronic innards is about as prudent as taking up brain surgery part-time.

Still, the insatiably curious and itchy-fingered Mr Tooley is clearly not a man easily dissuaded. Before you can say 'Blimey, I think my 8-bit tri-state bi-directional data bus must be on the blink' he's got the lid off and is in, up to his elbows in splintered chips with his logic analyser, oscilloscope, test prods, digital frequency meter, set of jeweller's screwdrivers, junior hacksaw and trusty pair of snipe-nose (half-round) pliers.

With dogged precision, Mr Tooley then sets about locating and correcting numberless malfunctions, glitches and bugs; stripping down disk drives, probing the CPU, gutting his monitor, the printer scattered in a thousand pieces on the bench.

It's all very well, very detailed, sometimes absurdly comprehensive ('The bench should be constructed from a substantial piece of timber') and it is, I suppose, quite absorbing for insomniacs or for those with their pin-outs out.

But I soon came across an intractable fault in Mister Fixit Tooley's own operating system. It is, of course, that while most of us can lay hands on a junior hacksaw or, at a pinch, a pair of snipe-nose (half-round) pliers, the toolbox which contains a logic analyser or oscilloscope is not so easy to locate. And I'd imagine it costs about the same as tossing your kaput computer into the nearest skip and buying half a dozen replacements.

Proceed with utmost caution, I say again, if ever you're tempted to tackle DIY computer repairs. If you're already well-versed in electronic troubleshooting, then this is a useful and unusual book. If, on the other hand, changing torch batteries is nearer your handyman mark, you might think about a service contract instead.

## Do nothing until you read this

**Title: How To Make Money From Your Software — legal and business aspects**
**Author: Anne Staines**
**Publisher: ESC Publishing (Oxford)**
**Price: £6.75**

Anne Staines is a barrister and her brief in this slim, explicitly-titled paperback is to *précis* the legal mumbo-jumbo surrounding software protection, to suggest sound marketing strategies, and to advise upon setting up and financing a small company.

Good software, she points out, isn't half in demand and *should* — but by no means necessarily *will* — make a bob or two for its author.

Here the typical pitfalls are identified and more street-smart approaches explained; if not in exhaustive detail then at any rate in a brisk, lucid and authoritative vein that serves as an excellent introduction to the software-writing tyro. The assumption — and it's a fair one — is that however brilliant at inventing or coding programs such tyros may be, they might well be commercially naive.

Making money from software is a tantalising proposition but one fraught with difficulties and injustice. Should you contemplate giving it a go, this book describes the basics of what is involved and does it very well.

## The blackboard jungle

**Title: Educational Software — a creator's handbook**
**Editors: Ken Alexander and Diana Blanchard**
**Publisher: Microelectronics Education Programme**
**Price: £25**

Notwithstanding that such luxuries as pencils, rubbers and exercise books are harder and harder to come by, so disaffected teachers complain, every school must have its computers. Mrs Thatcher says they must, so that's that.

Schools have to decide what to do with the things: whether to concentrate upon computer studies *per se* or to regard the machines primarily as high-tech teaching aids, running software custom-tailored towards enhancement of the general education process all the way from A is for Apple (or Atari) to sixth-form studies.

It was with the latter, more desirable approach in mind that the Government nearly five years ago established the Microelectronics Education Programme (MEP), and charged it with bringing together educational specialists and software writers with a view to pooling their talents, ideas and needs.

This book is a distillation of what's been learned to date and is set to become the standard reference for pioneers in software's blackboard jungle. It fillets the subject under six major headings: origination and design, coding, field trialling, software support, publication and software evaluation. Plough through that lot and any teacher should have an insight into what software developers need to know about education, and the software developers in turn should have a better handle on what teachers expect of them.

It's tough going, too much infested with jargon in both camps, but it is a useful and encouraging picture which in the end emerges. Britain's programme of computerising schools has an international reputation for solid achievement, and this book combines the field experience of those who have themselves achieved it.

Specialised, perhaps, but a stimulating read for anyone with a smidgin of vocation to have computers teach kids to do much more than program or play games.

## An insomniac's dream

**Title: Artificial Intelligence — applications to logical reasoning and historical research**
**Author: Richard Ennals**
**Publisher: Ellis Horwood**
**Price: Not known**

If this work has a fault it's that so much of it is incomprehensible. It has been many years in the making, its intensely academic author says, and I fear it could be many years in the reading, too.

It's tricky for a start to grasp precisely what it's meant to be about — supposedly artifical intelligence (currently a fashionable and therefore brisk-selling subject), but apparently about AI as applied to teaching history with the help of computers.

To that end the role of logic programming is explored, intelligent information retrieval systems are examined, models proposed and the fifth generation of computing invoked. The mind-stretching benefits of Prolog are much in evidence, as are such mind-boggling asides as Jean Piaget's doctoral work on the classification of molluscs, Beatrice Henin's study of leasehold agreements in 17th-century Marseilles, a soil (or bird) identification program using CHIMP, the nature of archaeological knowledge, obscure Roman wine vessels, and a computer-aided analysis of the calorie count of a typical French tomato salad.

Heady stuff, you'll agree, and strictly for humourless boffins steeped in cracking what, if anything, is meant by what, whether and why.

More research work may yet be needed to establish what proportion of students can stay awake. **END**

# SUBSET

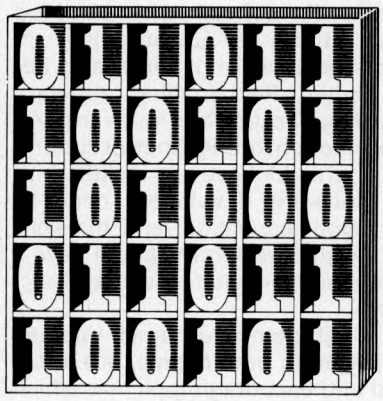

*David Barrow presents more documented machine code routines and useful information for the assembly language programmer. If you have a good routine, an improvement or conversion of one already printed, or just a helpful programming hint, then send it in and share it with other programmers. Subroutines for any of the popular processors and computers are welcome but please include full documentation. All published code will be paid for. Send your contributions to Sub Set, PCW, 62 Oxford Street, London W1A 2HG.*

## EPSON SCREEN DUMPS

The request in *PCW*, February for the shortest screen dump routine in each popular code produced a hefty response in Z80 and 6502, with one 8066 routine but no 6809 or 68000 code!

The screen dump problem is that most screen formats treat each byte of data as a horizontal sequence of dots. Epson dot-matrix printers, on the other hand, expect each byte of bit-image data to encode a vertical strip of eight dots. The solution is to take a column of eight screen bytes (one eight by eight dot-matrix, often corresponding to an alphanumeric character) and twist it around, or transpose it. Every routine seems to use a different variation on this basic transposition method.

## Z80 DUMP

Z80 code poured in and ranged in length from a very sophisticated 570-byte program from Ted Hayes of Northampton which dumps various formats in different print densities, to this 80-byte DUMP80 from John Kerr of Glasgow.

John makes a good attempt at generality by inputting the line and character-width counts, and the screen/start address, rather than having them programmed in. To cut down on byte use, the character width doubles as displacement to the next vertically adjacent screen byte, and its (assumed zero) high-order byte is used to effect a one-byte ADD Cy. Unfortunately, this generality is spoilt by DUMP80 setting an 80-dot margin whatever the screen width.

### DATASHEET 1

```
;=============================================================
;= DUMP80      Dump bit mapped screen to Epson standard printer.
;=============================================================
;JOB           To produce a normal-density Bit Image screen dump
;              from a memory mapped screen to an Epson dot matrix
;              printer (or other printer accepting Epson control
;              codes), with a 4/3" left margin (centering a 320
;              dot wide dump on standard 241 mm paper).
;ACTION        For each screen line of 8 dot rows:
;              [ Set 8/72" line spacing.
;                Set normal density bit image mode.
;                Output data number = 8 × characters + 80.
;                Output 80 zero bit images for 4/3" margin.
;                For count of characters per line:
;                [ For bit count of 8:
;                  [ Save screen pointer.
;                    For line rows count of 8:
;                    [ Rotate screen byte left 1 bit.
;                      Shift output bit left into accumulator.
;                      Address screen one dot row higher. ]
;                    Restore screen pointer.
;                    Output bit image. ]
;                  Address next character. ]
;                Output carriage-return.
;                Address next line, 1st dot row, 1st byte. ]
;-------------------------------------------------------------
;CPU           Z80
;HARDWARE      Screen RAM. The screen memory mapping must be such
;              that every bit controls one pixel and each
;              successive row of displayed bytes follows
;              contiguously from the last (no undisplayed
;              margins).
;              Epson standard (FX, MX or RX) printer. Must be set
;              to line-feed automatically on carriage-return.
;SOFTWARE      PRNTER - Epson printer driver, should preserve all
;              register contents.
;-------------------------------------------------------------
;INPUT         HL addresses first byte of screen RAM (low memory).
;              BC = screen lines (vertical dots ÷ 8).
;              DE = screen line width (horizontal dots ÷ 8).
;                 (BC and DE assumed less than 256)
;OUTPUT        HL addresses last byte + 1 of screen RAM.
;              BC = 0. DE unchanged. AF changed.
;ERRORS        Single line dump of entire screen will occur unless
;              the printer automatically line-feeds on 0DH code.
;              Unchecked use of D as a zero value.
;REG USE       AF BC DE HL
;STACK USE     4 + PRNTER stack use.
;RAM USE       None.
;LENGTH        80
;CYCLES        Not given.
;-------------------------------------------------------------
;CLASS 2       -discreet      *interruptable     *promable
;-**---        -reentrant     -relocatable       -robust
;=============================================================
;
DUMP80 PUSH  HL            ;Save HL and use to address    E5
       LD    HL,STRING     ;Epson code sequences.         21 lo hi
       LD    B,5           ;Count 5 codes.                06 05
ESCSEQ LD    A(HL)         ;initialise printer to         7E
       CALL  PRNTER        ;8/72" line feed and select    CD lo hi
       INC   HL            ;normal density bit image      23
       DJNZ  ESCSEQ        ;mode.                         10 F9
;
       LD    H,D           ;Calculate bita data bytes     62
       LD    L,E           ;for one line of dump.         6B
       ADD   HL,HL         ;Number of data bytes is       29
       ADD   HL,HL         ;screen character width × 8    29
       ADD   HL,HL         ;+ 80 for left margin.         29
       LD    A,L           ;Get screen horizontal dots    7D
       LD    B,80          ;+ margin dots as low order    06 50
       ADD   A,B           ;byte to send to printer.      80
       CALL  PRNTER        ;Send no. of data low byte.    CD lo hi
       LD    A,H           ;Get high order byte (with     7C
       ADC   A,D           ;any carry from margin add)    8A
       CALL  PRNTER        ;and send to printer.          CD lo hi
;
       SUB   A             ;Clear A for sending nulls.    97
MARGIN CALL  PRNTER        ;Send 80 zero bytes to         CD lo hi
       DJNZ  MARGIN        ;printer for left margin.      10 FB
       LD    B,E           ;Set B = screen byte width.    43
       POP   HL            ;Restore screen pointer.       E1
;
SQUARE PUSH  BC            ;Save char. & line counts.     C5
       LD    C,8           ;Count 8 horizontal bits.      0E 08
;
COLUMN PUSH  HL            ;Save screen pointer.          E5
       LD    B,8           ;Count 8 vertical bits.        06 08
;
ONEDOT RLC   (HL)          ;Rotate screen byte, rotate    CB 06
       ADC   A,A           ;next bit into A, repeat       8F
       ADD   HL,DE         ;for 8 vertically adjacent     19
       DJNZ  ONEDOT        ;bytes of screen RAM.          10 FA
;
       POP   HL            ;Restore screen pointer.       E1
       CALL  PRNTER        ;Output bit data byte.         CD lo hi
       DEC   C             ;Repeat for 8 bits in each     0D
       JR    NZ,COLUMN     ;of 8 bytes.                   20 F0
;
       INC   HL            ;Address next column byte      23
       POP   BC            ;and repeat for full width     C1
       DJNZ  SQUARE        ;of screen.                    10 E9
;
       LD    A,0DH         ;Output carriage-return        3E 0D
       CALL  PRNTER        ;ready for next line.          CD lo hi
;
       LD    B,7           ;Screen pointer is at start    06 07
NEWROW ADD   HL,DE         ;of 2nd dot row, move to       19
       DJNZ  NEWROW        ;1st dot row of next line.     10 FD
;
       DEC   C             ;Repeat full operation         0D
       JR    NZ,DUMP80     ;for each character line       20 B6
       RET                 ;of screen, then exit.         C9
;
;...Code sequences to set 8/72" line spacing and select normal
;...density bit image mode (60 dots per inch). Bit image mode
;...sequence must be followed by 2-byte value (low order byte
;...first) giving number of bit data bytes to follow.
STRING DEFB  1BH,41H,8     ;ESC A 8 (line space).         1B 41 08
       DEFB  1BH,4BH       ;ESC K (bit image mode).       1B 4B
;=============================================================
```

## 6502 DUMP

The shortest 6502 code at 87 bytes from W Anderton of Hampton, had to be disqualified for relying on a couple of absent subroutines to do much of the work. This is a pity since Mr Anderton, with tongue firmly in cheek, named his routine PRINTER and sent his print data straight to his Apple's memory-mapped peripheral device.

The one shown here, DUMP65 from Matthew Dunn of Manchester, is not quite as versatile as John Kerr's DUMP80. The 40-character

width is encoded in the routine. The number of lines to dump, however, is variable because Matthew wrote the routine to dump screens in several of his Atari's graphics modes (for example, modes 3, 5, 7, 7+) where bit-pairs are grouped to define colour and thus take up differing amounts of memory. ATARIB provides an entry to DUMP65 from Atari Basic.

## DATASHEET 2

```
:=======================================================================
:= DUMP65     Dump bit mapped screen to Epson standard printer.
:> ATARIB     Entry to DUMP65 from Atari Basic.
:=======================================================================
:JOB          To produce a normal-density Bit Image screen dump
:             from a memory mapped screen to an Epson dot matrix
:             printer (or other printer accepting Epson control
:             codes), with a 1" left margin.
:ACTION       Set 8/72" line spacing.
:             For each screen line:
:             [ Output 10 character spaces for 1" margin.
:               Clear character index.
:               Set normal density bit image mode: 320 bit data.
:               For screen characters 0 to line-end:
:               [ For count of 8 dot rows:
:                 [ Copy current dot row byte to accumulator.
:                   For bit data store bytes 0 to 7:
:                   [ Shift accumulator left 1 bit.
:                     Rotate bit left into current store byte. ]
:                   Address next higher dot row. ]
:                 For bit data store bytes 0 to 7:
:                 [ Output bit data store byte. ]
:                 Index next character. ]
:               Output carriage-return. ]
:-----------------------------------------------------------------------
:CPU          6502
:HARDWARE     Atari computer for entry at ATARIB.
:             Screen RAM. The screen memory mapping must be such
:             that every bit controls one pixel and each
:             successive row of displayed bytes follows
:             contiguously from the last (no undisplayed
:             margins).
:             Epson standard (FX, MX or RX) printer. Must be set
:             to line-feed automatically on carriage-return.
:SOFTWARE     PRNTER - Epson printer driver, should preserve all
:             register contents.
:-----------------------------------------------------------------------
:INPUT        M0 = number of screen lines (dot rows ÷ 8).
:             M2,3 Addresses 1st byte of screen memory.
:OUTPUT       P, A, X, Y and M0 to MB are changed.
:ERRORS       Single line dump of entire screen will occur unless
:             the printer automatically line-feeds on $0D code.
:REG USE      P A X Y
:STACK USE    4 + PRNTER stack use.
:RAM USE      M0 to MB
:LENGTH       125 (+ 16 for ATARIB entry).
:CYCLES       Not given.
:-----------------------------------------------------------------------
:CLASS 2      -discreet      *interruptable      *promable
:------       -reentrant     *relocatable        -robust
:=======================================================================
:
:...ATARI assignment of storage. Note DATA is any eight
:...consecutive bytes (pp in code field is page number).
LINCNT =      $CD             := SUBSET M0
COUNT  =      $CE             := SUBSET M1
LINPNT =      $CB             := SUBSET M2
DATA   =      lo hi           :Address of any free eight bytes.
:
:...ATARI BASIC entry. DUMP65 origin at $0610.
ATARIB PLA                    :For DUMP65 exit to BASIC.      68
       LDA   $58              :Copy screen start address      A5 58
       STA   LINPNT           :(low order byte first)         85 CB
       LDA   $59              :from $0058 & $0059             A5 59
       STA   LNPNT+1          :to $00CB & $00CC.              85 CC
       LDA   #24              :Set 24 line count              A9 18
       STA   LINCNT           :in $00CD.                      85 CD
       JMP   DUMP65           :Jump to DUMP65.                4C 10 06
:-----------------------------------------------------------------------
:
:...SUBSET assignment of values and pseudo-register storage.
:...Note DATA is in page zero (pp in code field = 00).
WIDTH  =      40              :Bytes per screen line (dots ÷ 8 ).
LINCNT =      M0              :Stored number of lines (rows ÷ 8).
COUNT  =      M1              :Store for 8-byte count.
LINPNT =      M2              :Stored screen RAM pointer.
DATA   =      M4              :8-byte store for transposed bit data.
:
DUMP65 LDA    #$1B            :Send sequence ESC A 8          A9 1B
       JSR    PRNTER          :to printer to set              20 lo hi
       LDA    #$41            :line spacing to                A9 41
       JSR    PRNTER          :8/72".                         20 lo hi
       LDA    #8              :                               A9 08
       JSR    PRNTER          :                               20 lo hi
:
DUMP   LDY    #10             :Count 10 spaces.               A0 0A
CENTRE LDA    #32             :Send 10 spaces to give a       A9 20
       JSR    PRNTER          :1" margin to each line         20 lo hi
       DEY                    :(smaller if printer is in      88
       BNE    CENTRE          :elite or condensed mode).      D0 F8
:
       LDA    #$1B            :Send ESC K sequence to set     A9 1B
       JSR    PRNTER          :normal density bit image       20 lo hi
       LDA    #$4B            :mode, then the two-byte        A9 4B
       JSR    PRNTER          :number of bit data (320)       20 lo hi
       LDA    #$40            :to follow, with low            A9 40
       JSR    PRNTER          :order byte first.              20 lo hi
       LDA    #1              :                               A9 01
       JSR    PRNTER          :                               20 lo hi
       BEQ    LINEST          :Jump to start, skipping        F0 08
       BNE    LINEST          :pointer restore.               D0 06
:
NXTBLK PLA                    :Restore saved pointer to       68
       STA    LINPNT+1        :first byte on top row          85 M3
       PLA                    :of each screen line of         68
       STA    LINPNT          :8 dot rows.                    85 M2
:
LINEST LDA    #8              :Set count for 8 bytes          A9 08
       STA    COUNT           :vertical on screen.            85 M1
       LDA    LINPNT          :Save pointer to first          A5 M2
       PHA                    :byte on top row of             48
       LDA    LINPNT+1        :each screen line of            A5 M3
       PHA                    :8 dot rows.                    48
:
NSHIFT LDA    (LINPNT),Y      :Get next byte.                 B1 M2
       LDX    #0              :Index bit data store.          A2 00
:
SHIFT  ROL    A               :Rotate 8 bits from byte        2A
       ROL    DATA,X          :into the 8 separate bytes      3E M4 zz
       INX                    :of bit data store, results     E8
       CPX    #8              :in a transposition from        E0 08
       BNE    SHIFT           :horizontal to vertical.        D0 F7
:
       CLC                    :Prepare to add, no carry.      18
       LDA    LINPNT          :Add screen byte width to       A5 M2
       ADC    #WIDTH          :pointer so it addresses        69 28
       STA    LINPNT          :1st byte of next dot row.      85 M2
       LDA    LINPNT+1        :(After 8 additions, it         A5 M3
       ADC    #0              :will address 1st byte of       69 00
       STA    LINPNT+1        :top row of next line.)         85 M3
:
       DEC    COUNT           :Repeat for 8 vertically        C6 M1
       BNE    NSHIFT          :stacked screen bytes.          D0 E2
:
       LDX    #0              :Then index bit data store      A2 00
SNDBLK LDA    DATA,X          :and send transposed bit        BD M4 zz
       JSR    PRNTER          :data to printer.               20 lo hi
       INX                    :This is one 8 × 8 dot          E8
       CPX    #8              :matrix.                        E0 08
       BNE    SNDBLK          :                               D0 F5
:
       INY                    :Repeat for number of bytes     C8
       CPY    #WIDTH          :across screen width.           C0 28
       BNE    NXTBLK          :                               D0 C0
:
       PLA                    :Discard saved pointer to       68
       PLA                    :last line of 8 rows.           68
       LDA    #$0D            :Send carriage-return           A9 0D
       JSR    PRNTER          :to printer.                    20 lo hi
       DEC    LINCNT          :Count off one line dumped      C6 M0
       BNE    DUMP            :and repeat for all lines.      D0 93
       RTS                    :Then exit, dump done.          60
:=======================================================================
```

# 8086 DUMP

DUMP86 by Dave Stanford of Kinross was the only 8086 (8088) routine submitted. It is quite compact at 137 bytes—the machine codes of the 16-bit and 32-bit processors are generally one or two bytes longer than those of 8-bit processors.

This routine is among the very few I received which bothers to reset line spacing to 1/6in. One thing it doesn't do is to ensure that the dump starts with the print head in the left-hand column.

All parameters are programmed into DUMP86, which makes it the least adaptable of the three DUMP routines. The only variability is that the extra segment (ES) can be set to any 16-byte boundary before entry. Consequently, the routine can be used to dump practically any area of memory and can cope with multi-screen environments.

## DATASHEET 3

```
:=======================================================================
:= DUMP86     Dump bit mapped screen to Epson standard printer.
:=======================================================================
:JOB          To produce a normal-density Bit Image screen dump
:             from a memory mapped screen to an Epson dot matrix
:             printer (or other printer accepting Epson control
:             codes), with a 4/3" left margin (centering a 320
:             dot wide dump on standard 241 mm paper).
:
:ACTION       Address screen 2nd line, 1st dot row, 1st byte.
:             Set 8/72" line spacing.
:             For count of 24 lines:
:             [ Set normal density bit image mode: 400 bit data.
:               Output 80 zero bit images for 4/3" margin.
:               For count of 40 characters per line:
:               [ For temporary store bytes 7 to 0:
:                 [ Address screen one dot row higher.
:                   Copy byte to temporary store. ]
:                 For bit image count of 8:
:                 [ For temporary store bytes 7 to 0:
:                   [ Rotate temporary store byte left 1 bit.
:                     Rotate bit left into accumulator. ]
:                   Output bit image. ]
:                 Address screen 8 dot rows + 1 byte higher. ]
:               Output carriage-return.
:               Address next line, 1st dot row, 1st byte. ]
:             Set 1/6" line spacing.
:-----------------------------------------------------------------------
:CPU          8086 (8088)
:HARDWARE     Screen RAM. The screen memory mapping must be such
:             that every bit controls one pixel and each
:             successive row of displayed bytes follows
:             contiguously from the last (no undisplayed
:             margins).
:             Epson standard (FX, MX or RX) printer. Must be set
:             to line-feed automatically on carriage-return.
:SOFTWARE     PRNTER - Epson printer driver, should preserve all
:             register contents. Must be in the same Code Segment
:             as DUMP86.
:-----------------------------------------------------------------------
:INPUT        ES = screen segment (actual address of screen RAM
:             first byte divided by 16 - screen RAM must begin on
:             a 16-byte boundary).
:OUTPUT       Flags, AL, BX, CX, DI and TMP changed.
:             All other registers and memory unaltered.
:ERRORS       Single line dump of entire screen will occur unless
:             the printer automatically line-feeds on 0DH code.
:REG USE      F AL BX CX DI ES
:STACK USE    6 + PRNTER stack use.
:RAM USE      TMP - 8 bytes temporary storage (directly addressed
:             as a CS offset).
:LENGTH       129 (plus 8-byte TMP store).
:CYCLES       Not given.
:-----------------------------------------------------------------------
:CLASS 2      -discreet      *interruptable      *promable
:-**-*-       -reentrant     *relocatable        -robust
```

```
;
;
TMP     DB    0,0,0,0          :Storage for 8 bytes read   00 00 00 00
        DB    0,0,0,0          :from screen RAM.           00 00 00 00
;
DUMP86  MOV   BX,0140H         :Index 1st byte, 2nd line   BB 40 01
                               :for width subtraction.
        MOV   AL,1BH           :Send ESC A 8 sequence      B0 1B
        CALL  PRNTER           :to printer to set          E8 lo hi
        MOV   AL,41H           :8/72" line feed.           B0 41
        CALL  PRNTER           :                           E8 lo hi
        MOV   AL,08H           :                           B0 08
        CALL  PRNTER           :                           E8 lo hi
        MOV   CX,0018H         :Count of 24 lines.         B9 18 00
;
NEWLIN  PUSH  CX               :Save line count.           51
        MOV   AL,1BH           :Send ESC K sequence        B0 1B
        CALL  PRNTER           :to printer to set          E8 lo hi
        MOV   AL,4BH           :normal density bit         B0 4B
        CALL  PRNTER           :image mode, then number    E8 lo hi
        MOV   AL,90H           :of bit image data to       B0 90
        CALL  PRNTER           :follow (400), sending      E8 lo hi
        MOV   AL,01H           :low order byte first.      B0 01
        CALL  PRNTER           :                           E8 lo hi
;
        MOV   AL,00H           :Clear for margin spaces.   B0 00
        MOV   CX,0050H         :Count for 80 zero bytes.   B9 50 00
MARGIN  CALL  PRNTER           :Send 80 zero bytes out to  E8 lo hi
        LOOP  MARGIN           :effect 4/3" left margin.   E2 FB
;
        MOV   CX,0028H         :Count of 40 characters.    B9 28 00
NXTCH   PUSH  CX               :Save character count.      51
        MOV   DI,0007H         :Index temporary store.     BF 07 00
;
NXTDTA  SUB   BX,0028H         :Index next dot row.        83 EB 28
        SEG   ES               :Screen segment override,   26
        MOV   AL,[BX]          :get screen byte.           8A 07
        SEG   CS               :Code segment override,     2E
        MOV   [DI+TMP],AL      :store byte.                88 85 lo hi
        DEC   DI               :Repeat for 8 vertically    4F
        JNS   NXTDTA           :stacked screen bytes.      79 F2
;
        MOV   CX,0008H         :Bit count (8 per byte).    B9 08 00
NXTIMG  MOV   DI,0007H         :Index temporary store.     BF 07 00
;
NXTBIT  SEG   CS               :Loop, getting next         2E
        SHL   B,[DI+TMP]       :single bit from each of    D0 A5 lo hi
        RCR   AL               :8 stored bytes into AL     D0 D8
        DEC   DI               :in the correct order,      4F
        JNS   NXTBIT           :forming transposed data.   79 F6
;
        CALL  PRNTER           :Send bit data, repeat      E8 lo hi
        LOOP  NXTIMG           :until 8 bit images sent.   E2 EE
;
        ADD   BX,0141H         :Index next character.      81 C3 41 01
        POP   CX               :Restore character count,   59
        LOOP  NXTCH            :repeat for full line.      E2 D2
;
        MOV   AL,0DH           :Send carriage-return       B0 0D
        CALL  PRNTER           :to printer.                E8 lo hi
        ADD   BX,0118H         :Index next screen line.    81 C3 18 01
        POP   CX               :Restore line count,        59
        LOOP  NEWLIN           :repeat for all lines.      E2 A4
;
        MOV   AL,1BH           :Send ESC A 12 sequence     B0 1B
        CALL  PRNTER           :to printer to reset        E8 lo hi
        MOV   AL,41H           :linefeed to 1/6".          B0 41
        CALL  PRNTER           :                           E8 lo hi
        MOV   AL,0CH           :                           B0 0C
        CALL  PRNTER           :                           E8 lo hi
        RET   L                :Exit (restore CS:PC).      CB
;
```

# 6502 BIT ROTATION

BITROT from David Heale of Bolton wasn't submitted in response to the screen dump challenge. The concept, however, fits in neatly with the requirements for converting horizontal bit-images to a vertical format.

The routine rotates an 8-bit by 8-bit matrix stored in eight contiguous pages—zero bytes anticlockwise by 90°. The difference between a transposed matrix and a rotated one (as far as screen dumps are concerned) is the order in which the resultant bytes are output—the rotation must be sent out last byte first.

Fig 1 shows (b) transposed and (c) rotated versions alongside an original matrix (a) for the letter 'F'.

Fig 2 gives a short subroutine for sending out the rotated matrix result of BITROT as bit-image data. You will have to write your own routine to transfer blocks of data to SRC, and call BITROT and SENDRM.

BITROT reminds me of the safety officer who wore three belts and two pairs of braces. It clears all the destination bytes initially, which is an unnecessary operation as they are all going to be shifted out. Each destination bit is then cleared again before the source bit is copied to it in an 8-byte operation which involves saving A on stack—another unnecessary operation as the LSR DST instruction has already accomplished that task.

Despite its shortcomings, BITROT is a useful routine that ought to find a place in anyone's subroutine library.

END

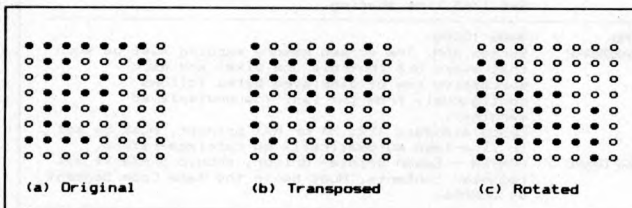


Fig 1

```
;
;...Send rotated 8 × 8 matrix (character) to printer.
SENDRM LDY   #8              :Index / count DST bytes.    A0 08
SENDLP LDA   SPARE,Y         :Get next DST byte from end  B9 LF 00
       JSR   PRNTER          :sent out to printer.        20 lo hi
       DEY                   :Repeat for all eight bytes  88
       BNE   SENDLP          :of rotated 8 × 8 matrix.    D0 F7
       RTS                   :Then exit.                  60
;
```

Fig 2

## DATASHEET 4

```
;
:= BITROT      Rotate an 8 × 8 bit matrix.
;
:JOB           To rotate an 8 × 8 bit matrix stored as eight
:              contiguous bytes in page zero by 90 degrees,
:              storing the result simularly.
:ACTION        Clear destination area.
:              For count of 8:
:              [ For each source byte (7 to 0):
:                [ Shift destination byte 0 right by 1 bit.
:                  Copy most significant bit (msb)
:                  from current source byte
:                  to destination byte 0. ]
:                For each source byte (7 to 0):
:                [ Rotate current source byte left by 1 bit. ]
:                Rotate destination area upwards by 1 byte. ]
;
:CPU           6502
:HARDWARE      None.
:SOFTWARE      None.
;
:INPUT         8-byte source matrix in M8 to MF.
:OUTPUT        8-byte result matrix in M0 to M7.
:              P, A, X, Y, M8 to MF and one page zero byte
:              immediately below M8 (designated 'LF') are changed.
:ERRORS        Indexing error if either source or destination page
:              zero blocks 'wraparound' zero page memory.
:REG USE       P A X Y
:STACK USE     1
:RAM USE       'LF', M0 to MF
:LENGTH        69
:CYCLES        Not given.
;
:CLASS 2       -discreet      *interruptable     *promable
:-**-*-        -reentrant     *relocatable       -robust
;
;
SPARE  =   LF              :Store for rotated destination byte.
DST    =   M0              :8-byte store for rotated matrix.
SRC    =   M8              :8-byte stored source matrix.
;
BITROT LDA   #0            :Clear for clearing DST.     A9 00
       LDY   #8            :Index / count 8-byte DST.   A0 08
CLRDST STA   SPARE,Y       :Clear 8-byte destination    99 LF 00
       DEY                 :page zero for rotated       88
       BNE   CLRDST        :result.                     D0 FA
;
       LDX   #8            :Count for 8 DST bytes.      A2 08
OUTLP  LDY   #8            :Index / count SRC bytes.    A0 08
;
INLP   LSR   DST           :Clear for next SRC bit.     46 M0
       LDA   SRC-1,Y       :Get next source byte and    B9 M7 00
       AND   #$80          :select only next bit.       29 80
       PHA                 :Save next bit while         48
       LDA   DST           :re-clearing msb of DST      A5 M0
       AND   #$7F          :byte ready for next SRC     29 7F
       STA   DST           :bit.                        85 M0
       PLA                 :Restore next SRC bit and    68
       ORA   DST           :merge with DST byte,        05 M0
       STA   DST           :store back to DST.          85 M0
       DEY                 :Repeat for single bit from  88
       BNE   INLOOP        :each of 8 SRC bytes.        D0 EA
;
       DEX                 :Count DST byte completed    CA
       BEQ   BREND         :and exit if all done.       F0 1D
;
       LDY   #8            :Index / count SRC bytes.    A0 08
ROTSRC LDA   SRC-1,Y       :Shift all source bytes      B9 M7 00
       ROL   A             :up by 1 bit, bringing       2A
       STA   SRC-1,Y       :next bit of each into       99 M7 00
       DEY                 :the msb ready for transfer  88
       BNE   ROTSRC        :to destination byte.        D0 F6
;
       LDA   DST+7         :Move last DST byte to       A5 M7
       STA   SPARE         :SPARE for DST rotation.     85 LF
       LDY   #8            :Index / count DST bytes.    A0 08
ROTDST LDA   SPARE-1,Y     :Shift all DST bytes up      B9 LE 00
       STA   SPARE,Y       :higher in memory by one     99 LF 00
       DEY                 :byte, bringing next DST     88
       BNE   ROTDST        :byte ready for SRC bits.    D0 F7
;
       BEQ   OUTLP         :Go get next result byte.    F0 C8
;
BREND  RTS                 :Exit, matrix rotated.       60
;
```

# CADO SYSTEM 16.
# FOR BUSINESSES WITH MORE AMBITION THAN BUDGET.

*When your plans seem to overtake your capital, then Cado System 16 is the computer system for you.*

*It lets you expand when you can afford to without having to compromise on the equipment you start with.*

*From its small compact beginnings (it can fit under a desk), System 16 can be expanded up to 16 workstations, multitasking from a comprehensive catalogue of software packages, including: word processing, database, mailing, and a range of specific business software such as Purchase and Nominal Ledger, Stocks, Costing, Sales and Order Processing.*

*With your future in mind, System 16 gives all software packages access to the main database, with separate password protection for individual databanks should you wish to set up sub-companies.*

*Response is very fast. System 16's revolutionary design gives you an answer to your enquiry in only a fraction of a second - faster than any of the competition.*

*Naturally, Cado System 16 has the advanced CCS Business Systems back up. That means complete systems design, software support, peripherals, technical back up and maintenance, co-ordinated from three regional offices in London, Birmingham and Bristol.*

*In fact, System 16 is endorsed with everything you'd expect from the $2 Billion strong Contel-Cado Corporation.*

*Which should be reassuring, no matter what size your company is now.*

*Contact your local office for a demonstration or post the coupon now for more information.*



To: Tony Cook, Sales Director,, CCS Business Systems, Vulcan House, 163 High Street, Yiewsley, West Drayton, Middlesex UB7 7QN. Please send me more information about CADO System 16. PCW6 85

NAME

POSITION

COMPANY

ADDRESS

TEL:

**CONTEL CADO CCS**
**BUSINESS SYSTEMS**

*CCS Business Systems, Vulcan House, 163 High Street, Yiewsley, West Drayton, Middlesex UB7 7QN. Tel: 0895 445757. Telex: 8814207.*
*BIRMINGHAM, 25-27 Smallbrook, Queensway, Birmingham B5 4HP. Tel: 021-632 5343. Telex: 337619.*
*BRISTOL, 1 Denmark Avenue, Bristol BS1 5HD. Tel: 0272 290245. Telex: 44363.*

# COMPUTER ANSWERS

*Simon Goodwin takes his toolkit to your problems. The address to write to is Computer Answers, PCW, 62 Oxford Street, London W1.*

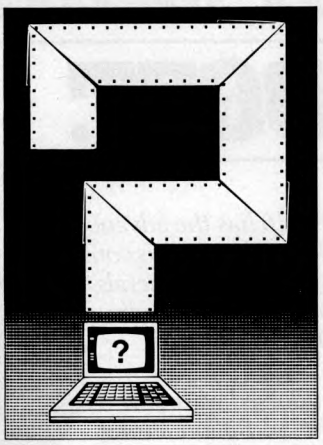

## Getting started

**I am a complete novice interested in learning how a computer works, but unfortunately neither the 'computer experts' or the public libraries have been able to provide any adequate material — it is either too brief or too complicated.**

**Can you suggest any books, magazines or organisations I could consult?**
***RD Thomas, Otford, Kent***

A book called *The Mighty Micro* by Christopher Evans (Coronet) should fire your imagination; it gives a good, enthusiastic beginner's guide to computing. But you won't thoroughly appreciate micros until you get the chance to use one, preferably with someone around to help.

Go along to your local computer club and pick the brains of people there. You will soon find people willing to explain and demonstrate things (they probably knew as little as you a few months previously). New hobbies always seem complex at first until the techniques fall into place.

You can find the address of your local computer club from the Association of Computer Clubs — see the ACC News section on page 230.

Buy a cheap computer (perhaps second hand) as soon as possible: 'finding out' is preferable to 'learning', and this is especially true of computing. The Sinclair ZX81 and Spectrum are the best-documented machines for the beginner, but the model doesn't matter too much if there's someone to guide you at first.

## Chips, mysterious chips

**I have read several texts on the Z800 processor, which is said to be a direct upgrade from the Z80, but I cannot find any information on its actual application: pin-out diagrams, instruction set or schematics. Can you help?**
***Darren Brown, Keighley, West Yorkshire***

The Z800 'super-Z80' was announced by Zilog in 1981, at about the time its rivals Intel announced the IAPX range of plug-compatible processors, 'super' versions of the 8086 processor. The IAPX chips have since appeared, but the Z800 is nowhere to be seen. It promised the most exciting specification of all, with a clock speed of 17MHz — eight times faster than the standard Z80 of the day — and a plethora of useful extra instructions for memory addressing and fast arithmetic.

At the time, I wrote to Zilog for further information and heard nothing. More recent enquiries also drew a blank. Until Zilog comes up with more details I will continue to think that the Z800 is nothing more than a figment of a marketing manager's imagination.

A conventional NMOS processor could not run at 17MHz unless there were major advances in semiconductor design. It is possible to increase processor throughput to some extent simply by running the same design at a higher speed — witness the Z80B, a 50 per cent faster version of the Z80A, and the 6809E, which is a fast 6809. But this trick won't work forever — after a while a fundamental re-think is needed. A 17MHz Z80, with extra instructions, would have to be quite a different beast from the normal version. One of the biggest problems would be simply keeping such a chip supplied with current and cool air.

If the chip worked at all, it couldn't just be plugged into the Z80 socket — it would need a new clock signal. More importantly, it is unlikely that the memory and peripheral chips for a 4MHz Z80A would be able to work at 17MHz unless they were exposed to the same radical re-design. Hardware compatibility is not likely to be great.

The Z80 is probably the most idiosyncratic processor ever produced. With its hundreds of *ad hoc* extra instructions bolted onto the specification of Intel's 8080, it would be extremely hard to design an efficient new chip which supported them all. Even assuming Zilog solves all these problems, it is usually about two years between the appearance of sample chips and full availability. We haven't even seen sample Z800s yet.

You might consider getting in touch with Hitachi, as it recently announced a 'super-Z80' chip rather like the Z800. The Hitachi HD64180's specification looks good. The chip supports all the Z80 instructions plus a few new ones including an 8×8-bit multiply. It is a low-power CMOS chip yet it runs fast, at 6MHz.

Unlike the Z80 the HD64180 uses internal 'pipelines', which means that it can manipulate memory at the same time as internal results are calculated. This is the technique used on the 6502 and 6809 to give high throughput at a low clock speed, and it improves performance considerably. The Hitachi chip also has extra hardware, including built-in serial ports, timers and memory controllers.

The real test will come when samples are delivered and users try to wire the HD64180 into a Z80 socket. Then we'll discover all the incompatibilities that weren't mentioned on the data sheet.

## DIY cable box

**Having some experience of electronics, is it practicable for me to construct a cable junction box along one of the following lines:**
**(a) Parallel connections throughout, leaving it to common sense to power up only one computer at a time?**
**(b) A simple diode matrix to connect lines from each computer to the printer bus?**
**(c) Using multiway wafer switches?**
**(d) Using electronic data selectors and/or bilateral switches to make and break each connection?**

**10 active lines need to be switched: STROBE, BUSY, and eight data lines. Which system do you recommend?**
***AJ Clarke, London EC2***

I'm impressed — you've all but answered the question yourself. Answer (c) is the briefest and seems to me the most sensible, although the others might work too. Answer (a) is fraught with danger, even if you *do* believe in common sense, since even an inactive computer might interfere with the signal on its way to the printer. Answer (b) is nice in theory but might require some trial-and-error to get right. A faulty diode could cause all sorts of problems. The same goes for answer (d), which smacks of complexity for its own sake.

Answer (c) is easy to build (once you've got the right switch) and easy to check by eye if something goes wrong. The only thing to watch for is that the switch has contacts which break the first connection before they make the second.

Commercial switchboxes are expensively made by hand — the fairly low demand is spread between many small manufacturers. The price is what the market can bear — as long as a switchbox is cheaper than a second printer, it will be seen as economically viable by those who lack the knowledge, or the confidence, to build their own. Remember that many such boxes also incorporate serial-to-parallel converters or buffers.

## Two-faced printer

**I need a good, reliable printer which has a daisywheel (or more than one) at each end of the shaft on which they move (some other means of automatically changing daisywheels would do). This is to enable the printer to be used to produce the master material for offset printing of scientific text in which it is a convention that the names of species are printed in italics.**
**JH Atkinson, Dyfed**

A year ago Diablo made a printer capable of changing its own daisywheels in mid-document — the Diablo ECS. This is rather hard to obtain as the distributors refuse to lend demonstration models to dealers. In turn, the dealers are reluctant to buy expensive hardware on the off-chance that they will be able to sell it. The Byte Shop chain quote an approximate price of £2300 for the ECS, which is a very high price when you consider that reliable, good-quality daisywheel printers such as the Juki 6300 retail for under £400. The Juki comes with the Courier typeface, but you can use many other faces including an italic one called 'Joan Italic 10/12'.

The snag with standard daisywheel printers is that you have to change typefaces by hand. However, most of them support a 'shadow' or 'bold' print which can be used to obtain a contrasting face without a change of wheel; this could be used for species names if you consider that a differential of £900 is a high price to pay to conform with convention.

Alternatively, if you're (very) confident about wielding a scalpel, you could print out the italic text in a separate run and glue words over the top of the main (non-italic) draft before printing. This is fiddly but it can give good results; any competent offset printing firm should be able to remove the shadows caused by the montage of individual words. You should use good-quality paper for the overlays, and make sure that you use the same pitch (character spacing) when printing the italics and the body of the text.

Another possibility would be to use one of the new high-resolution dot-matrix printers. These 'dual mode' printers allow fast printing in normal dot-matrix styles, or slower 'near letter-quality' printing where extra densely-packed dots are used so that it's hard to tell that characters are made up from individual dots. They can support almost any typeface by assembling characters from dots, although special 'driver' software may be needed. In particular, look at NLQ driver packages for the Epson range, the new Anadex printers, and printers designed for use with Apple's Macintosh system.

You might consider word processing a document as usual and having it typeset automatically: some firms can set type directly from popular micro disks. The price is generally far less than that for traditional typesetting, and the chance of typographic errors is reduced as the information does not have to be retyped by the typesetting machine operator. You specify changes of typeface with simple control sequences in your document. Your printers should be able to put you in touch with such 'budget typesetting' firms.

# Operating systems explained

**I have used home micros for some time and recently came across the 'business micro', an altogether different proposition. As part of my course at Teeside Polytechnic I am using an ACT Sirius, and I am becoming more and more confused about operating systems.**

**If a program is either CP/M-86 or MS-DOS, does it mean that it is usable on other systems which use either CP/M-86 or MS-DOS? For example, I use a Cobol compiler provided by the college which happens to work with MS-DOS. Can it be used on other MS-DOS machines?**

**I can't imagine that manufacturers have made machines compatible to the extent that software is directly transportable, but I get the feeling that I'm missing something.**
***John Masterman, Hemlington, Cleveland***

Most home computers are deliberately made incompatible with one another as this encourages hardware purchasers to buy peripherals and programs from the original manufacturer. It also means that makers can cut costs by using the latest design tricks in new machines.

Home computers are sold on the strength of features such as price, graphics or sound; differing design requirements make the machines mutually incompatible. There's no reason why micros should be made and sold in this way since the differences have little real significance to users. However, it makes life easy for advertising agencies, which can compare computer models rather than try to answer the more difficult question of why anyone should want a computer in the first place.

The marketing situation is different where business computers are concerned. These machines cost more and generally sell in much smaller numbers. The programs are complex, hard to write and expensive as most of them are only of use to a small proportion of computer owners. Almost anyone can find a use for a Space Invaders game, but few people would be interested in a Cobol compiler or a hotel booking package.

It is vital that complex programs run on as many different types of computer as possible, both from the point of view of a new machine's manufacturer who can't afford to translate all the complex and esoteric software available for other machines, and the software house launching a new product which would like it to run on as many different computers as possible as it will only sell a small number of copies on each one.

This need for compatibility is greater than the need for specific features, since the average business user is less concerned with sound effects and colour than with the availability of a package broadly suited to his or her needs. But the manufacturers can't produce identical machines: that would make their products indistinguishable and thus impossible to advertise distinctively.

The solution is to build them differently but to include a program which provides essential services in a standard way regardless of the hardware details. This program would translate 'primitive requests', in a standard format, into actions giving fixed results regardless of the hardware being used. Primitive requests might do such things as print a character, open a disk file, and so on. The program, or 'operating system', translates these generalised requests into specific operations which vary according to the hardware being used.

Most of the operating system is just concerned with distinguishing between requests, so it can be identical on every machine. Individual sections within the operating system may differ, reflecting hardware differences between the computers. These are the only sections which must be rewritten when a manufacturer launches a new machine; other programs should work as they will call the appropriate operating system routine rather than try to communicate directly with the hardware.

As long as software houses use these request codes to perform machine-specific operations, their programs will run on any computer with the correct operating system. The snag is that the translation of these request codes slows down the programs which use them. The request codes must be standard for all computers, so they might not provide control over hardware which is not available on all machines. For example, CP/M does not have a generalised facility to read a character at a given position on the display, so it's hard to write a screen editor such as those for many home computers.

These restrictions tempt programmers to communicate directly with the hardware, running the risk of making their software incompatible with some machines. Parts of the program which do not interact with specific hardware are written in machine code; this code will run on any computer with the appropriate processor.

The first popular operating system was CP/M, which contained request codes to perform input and output in programs written for the Z80 or 8080 processors. CP/M was not originally written for sale — it was rudimentary and inefficient for many purposes (the primitive requests were not well thought out) but it did work, and in the early days of computing that was enough.

CP/M-86 is a development of CP/M which provides standardised input and output facilities for programs written in machine code for the Intel 8086 and similar processors. These are used in most new business machines.

MS-DOS is a competitor — a similar but incompatible program. It only caught on because IBM used it in its Personal Computer. Like CP/M, MS-DOS is rudimentary but it works. It was based upon an experimental system called QDOS, standing for Quick and Dirty Operating System!

Operating system requests are slow and inflexible compared with machine-specific routines. In business programming the advantage of compatibility between computer models more than outweighs these snags; it is more important that programs are available than that they run quickly or take full advantage of special hardware.

*Unfortunately we can't answer questions on an individual basis, so please don't send a SAE with your query.* END

# Miracle modem

*Peter Tootill unveils Miracle Technology's new modem and issues a plea for free telephone lines for BBS operators.*

A new modem from Miracle Technology (which produced the first multimode modem at a price the home user could afford) can be expected to be an interesting event and indeed the WS3000 has a number of novel features.

The base model (approximately £250) has V.21, V.23, auto-answer (including ring-back method) and autodial as standard. It also has speed buffering to enable computers which cannot handle split baud rates (that is the V.23 type 1200/75 Prestel standard) to use it at the same speed in both directions. The modem will still talk to the phone line at the two speeds. Other features will be available as optional extras.

The method of autodialling will be compatible with the system first used by an American modem manufacturer called Hayes. The Hayes 'Smartmodem' protocols are now a very popular and widely used standard among other modem manufacturers in the US. So people with US computers will be able to use standard US software to control the autodial feature.

The optional extras will include: a V.22/V.22bis module giving 1200 and 2400 bits/sec full duplex operation as well as the basic 300/300 and 1200/75 modes; battery backed RAM to store up to 64 phone numbers; battery power for portable use; security key switch; password security. (Under this system the caller will give the modem his password when it answers the phone and then hang up. The modem will then check to see if he is an authorised user and if so the modem will ring him back in order to establish the call. This will make it very difficult for hackers, as they will not only have to have a password for the system, but also to be calling from the right telephone! This is the type of security that certain financial institutions are looking for before they will put their systems on-line.)

The V.22/V.22bis option (although initially expected to be pricey at £250 or so) is a very interesting development. V.23 is OK when you use a bulletin board or Prestel as long as *it* is talking to *you*, but it is no good if you want to unload anything more than a very short message. Imagine sending even a short program to a BBS at seven-and-a-half bytes per second! V.22 is also compatible with US Bell 212a standard that many American BBSS use as well as the basic 300 bits/sec Bell 103. This means that people with V.22 modems can call US bulletin boards. 2400/2400 modems for use on ordinary phone lines are beginning to appear in the US as well, and I would expect that they will operate with V.22bis systems as this is the way things have been developing in recent years.

The prices are expected to be around £250 for the basic modem and as much again for the V.22/V.22bis module. While this is not cheap — even a basic V.22 modem will set you back around £500 at present. A V.21/V.22 type would be nearer £800, and no other V21/22/23 ones are available, as far as I know. Prices for the other options were not known at the time of writing. BABT approval has been applied for, and Miracle Technology is optimistic about getting it soon. Presumably, if it is using the same production facilities as for its existing modem (now approved) there will not be quite so much involved in the process. The company also hopes to get approval with the Bell standards enabled, as one or two modems with Bell frequencies were accepted by BT before the BABT became responsible for the procedure. For further details contact Miracle Technology tel: Ipswich (0473) 50304.

## Lines for free

It has always seemed a bit unfair to me that I should have to pay BT for the privilege of having a second telephone line so that I can run my bulletin board for 24 hours a day, and still have a telephone available for ordinary calls. Especially when you think just how much revenue it gets from the system. I recently did a spot check for a 24 hour period and had fifty-eight calls, with a total of around 800 units. If this is typical, then BT is getting about £40 a day from people calling my system. One day's calls would more than cover the rental on the line for a whole quarter! This is an annual rate of nearly £15,000! BT must really love BBS operators. In my opinion BT should at least provide a free line and modem to people prepared to run a BBS. Most commercial organisations would do this — and give you commission on revenue generated as well.

If you are running a BBS (or thinking of starting one) and want to follow this matter up with BT, the person to speak to is called the 'call marketing (or call stimulation) duty' at your local telephone manager's office. These are the people who deal with the 'Guideline' services (such as weather forecasts, gardening hints, recipe of the day, and so on). BT may not be too keen on lots of BBSs in one area, of course, but it is well worth trying. If you have problems, try asking for the marketing manager, he is the person who is ultimately responsible for getting more people to use telephones. I would think that BBSs are especially good from BT's point of view, as the heavy use tends to be out of peak hours when the lines are very much under used.

If BT won't play ball you can always threaten to stop running your system — that would put an end to shareholders' dividends.

## New bulletin boards

The number of BBSs that have started recently is enormous. I have had great difficulty keeping up and checking out the new numbers that I have been given. At the last count there were nearly thirty 24 hour systems and as many part-time ones. The list of numbers is as up to date as possible, but as always please let me know of any changes on Liverpool Mailbox. **END**

# UK free networks

| Bulletin Board | Phone Number | Notes |
|---|---|---|
| Aberdeen ITEC | (0224) 641585 | V.23 |
| BABBS-Bath | (0225) 23276 | 300/300 baud rate; 9pm-8am weekdays, 9pm-noon weekends; Atari-based system, ring-back system |
| BABBS-Felixstowe | (0394) 276306 | 300/300 baud rate; 24 hours daily; Apple users' group |
| BABBS TWO-Basildon | (0268) 778956 | 300/300 baud rate; 24 hours daily; Apple users' group with special area for queries to Apple UK |
| Basildon ITeC | (0268) 22177 | Prestel type service |
| | (0268) 25122 | Atari based 300 baud. 24 hour |
| BASUE | (01) 373 6337 | 24 hour |
| Blandford Board TBBS | (0258) 54494) | 300/300 baud rate; 24 hours daily |
| CABB TBBS | (01) 631 3076 | 300/300 baud rate; 24 hours daily + 1200/75 |
| CBBS SW | (0392) 53116 | 300/300 baud rate; 24 hours daily |
| CBBS Surrey (Woking) | (04862) 25174 | 1200/75 and 300/300 baud rates; 24 hours daily; jokes, jobs, reviews, news |
| Chatham (Kent) | (0634) 815805 | 6pm/9am daily + weekends 7 bits, even parity; sales and wants — cars, houses, computers |
| CNOL Lancaster TBBS | (0524) 60399 | 300/300 baud rate; 24 hours daily; Clinical Notes Online service, mainly for medical users; works in conjunction with a database on the Datastar network |
| Computers Incorporated Newcastle (CBBS) | (0207) 543555 | 300/300 baud rate; 24 hours daily; primarily business-oriented |
| Forum 80 Hull | (0482) 859169 | 300/300 baud rate; 5-11.30pm weekdays, noon-11.30pm Sundays, Bell 103 standard, midnight-8am daily; international electronic mail, library for up/downloading |
| Forum 80 SPA | (0926) 39871 | 300/300 baud rate; 11pm-midnight daily; TRS-80 and Genie users' group |
| Forum 80 Wembley | (01) 902 2546 | 300/300 baud rate; 7-10pm weekdays, midday-10pm weekdays; electronic mail, library for down loading; ring and ask for Forum 80 |
| Fido Compulink | (06286) 63571 | 24 hour |
| Fido Fastnet | (051) 260 5607 | 10pm-8am BELL 103/212a tones only at present |
| Fido Fore TBBS | (01) 301 4110 | Fido 1am-8am |
| Hackney BBS | (01) 985 3322 | V.23 Password: PUBLIC |
| Hamnet Hull | (0482) 497150 | 300/300 baud rate; 6pm-8am daily |
| Livingstone, Scotland | (0506) 38526 | Atari, 24 hours daily |
| London Underground | (01) 863 0198 | 24 hours V.21/V.23 (Viewdata coming soon) BBC Based (colour for BBC users) |
| Liverpool Mailbox TBBS | (051) 4288924 | 300/300 baud rate; 24 hours daily; sponsored by INMAC; electronic mail, program downloading, TRS-80 information; messages for *PCW* can be left on the board and will normally be read by us within 24 hours |
| Mactel (Nottingham) | (0602) 289783 | V.21/V.23 Macintosh users 24 hours daily |
| Mailbox-80 W Midlands Stourport TBBS | (0384) 635336 | 300/300 baud rate; 6pm-8am daily |
| Manchester Open Bulletin Board TBBS | (061) 7368449 | 300/300 baud rate; 24 hours daily + 1200/75 |
| Marctel | (01) 346 7156 | 10am-10pm daily (24 hour coming, watch for announcement on Marctel) BBC based system (FBBS) with colour for Commstar users |
| MBBS-Mitcham | (01) 648 0018 | 300/300 baud rate; 24 hours; BBC-based system with jokes, graffiti, electronic mail, and Atari and BBC sections |
| MG-Net CBBS London | (01) 399 2136 | 300/300 baud rate; 5-10pm Sunday; electronic mail, program downloading |
| Microweb Manchester TBBS | (061) 4564157 | 300/300 baud rate; 24 hours daily; *Micro User* magazine, mainly for BBC users |
| NBBBS-North Birmingham TBBS | (0827) 288810 | 300/300 baud rate; 24 hours daily |
| NBBS-E BBC Micro | (0692) 630186 | BBC Based 24 hours daily |
| NBBS Lutterworth | (04555) 4798 | Mon-Fri 8pm-11pm; Sat 9pm-10pm; Sun 9am-12.30pm |
| NKABBS | (0795) 842324 | 9.30pm-midnight |
| OBBS Manchester | (061) 4271596 | 300/300 baud rate; weekdays except 7pm-9pm, weekends except 10am-10pm |
| Octopus RAS | (0272) 421198 (Bristol) | 6pm-8.30am V21 using public domain Octopus software |
| PIP-Sheffield TBBS | (0742) 667983 | 300/300 baud rate; 24 hours daily. Bell 9pm-8.00am |
| REACT UK | (0376) 518818 | 24 hours. Mainly Dragon |
| SABBS Glasgow | (0698) 884804 | Atari, 24 hours daily |
| SBBS Southern | (0923) 676644 (Watford) | 11pm-8.30am daily; BBC based V.21/V.23 |
| Southern BBS | (0243) 511077 | 300/300 baud rate; 8pm-2am daily; ring-back system (dial the number, let phone ring once, and then ring back); messages, downloading |
| Stoke ITEC | (0782) 265078 | 300/300 baud rate; 24 hours daily; remote CP/M system |
| Teletrieve (CTC) | (0484) 657299 | 6pm-8am |
| TBBS London | (01) 348 9400 | 300/300 baud rate; 9am-7pm daily |
| TYNESIDE BBS | (091) 251 4271 | V.21 BBC based |
| VISA | (01) 958 7098 | 8am-11pm daily V23 Prestel type |
| WABBS-Worthing | (0903) 42013 | 300/300 baud rate; 24 hours daily; ring-back system (dial the number, let phone ring once, and then ring back); Atari-based |

# UK subscriber commercial/business systems

| Bulletin Board | Phone Number | Notes |
|---|---|---|
| Comet | (0527) 28515 | Message handling system: Details from Istel Ltd, Grosvenor House, Prospect Hill, Redditch, Worcs |
| Micronet 800 | (01) 278 3143 | Prestel database information for micro users. Details from Micronet 800, 8 Herbal Hill, London EC1R 5EJ |
| Prestel | Freefone 100<br>Prestel sales | Subscribers only |
| Telecom Gold | (01) 403 6777 | All information from Sales Admin, 60-68 St Thomas Street, London SE1 3QU |

# TRANSACTION FILE

*Your chance to buy, sell or swap equipment.*

● LISA IMB, ×2 Profiles Imagewriter, Macworks, LisaCalc, Write, Calc, Com, full 7/7 software, Multiplan, MacWrite. Cost over £9,000, will accept £5,590. Tel: 01-749 6528.

● COMMODORE 8032; plus 8050 double disk drives, plus 4023 printer, Superscipt word processor, Petcress, Adventure game. Cables etc. £1,500 ono. Tel: Bordon (Hants) 4261.

● TANDY MODEL III, 48K twin disk drives, RS-232 built in. Lots of disk based software, £650 ono. Also Anderson Jacobson 300 baud acoustic coupler. Almost new, £150. Tel: (0584) 810015.

● TI99/4A. Little used, Extended Base, mini memory, assembler, editor, manual, Parsec, cassette lead, books, technical data, £150. No splitting. Tel: (0240) 74899 (Chalfont St Giles), (eves).

● Dpage Eurosystem Sirius I, prototype board, with quick connect tool and wire, £25. Also an AP products TC40 test clip, £15. Tel: Bordon (04203) 7194. Alan Kay.

● SHARP MZ80A. Dual disk drives, Z80 Serial and Parallel I/O cards, CP-M, FDOS, disk-Basic, XForth, C. All manuals. Complete, £500 ono. Tel: 01-736 3678.

● WANTED. *PCW* before February 1980. Also does anybody want a dead Compukit UK101. C. O'Neill, 123 Downs Road, Coulsdon, Surrey, CR3 1AD.

● APPLE II Monitor, dual disk drives, language card, Z80 card, Pkaso printer card, Saturn 128k disk emulator, 80 column, lots of software, £950 the lot. May split. Tel: (0227) 452061 (Canterbury).

● NEWBRAIN AD. Fitted with latest ROM set, users manual, 2 cassette leads, V24 lead, £125. O/S software manual, £15. Tel: Farnborough (0252) 540633.

● SANYO MBC 555. 2 x 800k drives. 256k RAM, RS 232C port c/w, WordStar, SpellStar, Mailmerge, CalcStar, DataStar, ReportStar. Cost £1,550, will accept £900 ono the lot. Tel: Quidenham (095387) 491 after 6pm please.

● APPLE IIE. Two disk drives, monitor grappler plus interface and Riteman printer. Hardly used. Lots of programs, DBase, VisiCalc, w/p etc. £1,200 ono wanted. Contact Norman on 01-935 3323 (day).

● WANTED. Apple III SOS reference manual, SOS Driver Writers Guide, A-III 128k add on, Serial card III, A III modem eliminator. Tel: Bedford (0234) 65997 (eves).

● SINCLAIR QL. Usual extras. (Unwanted Xmas gift). Plus printer cable, 4 extra empty cartridges, magazines, manual. Also Commodore computer game. Both still boxed. Worth £475 new. Bargain £320. Tel: Upper Warlingham (08832) 3834.

● TORCH ZEP100 Z80 board for BBC Micro. Only 3 months old, includes Perfect word processor, spreadsheet, BBC Basic (Z80). In addition Turbo Pascal will also be included, £275 ono. Tel: Reading 789150.

● COMMODORE 4040 dual disk drive. Hardly used, £200 ono. Tel: 031-447 2011 ext 442 or 031-447 6027, Mr Chick.

● APPLE II+. Apple monitor and disk drive, language card (64k total), AppleWriter II word processor, paddles, all manuals. Virtually unused, £475. Tel: Bourne End 25895 (eves).

● APPLE software. Apple Multiplan, Murder by the Dozen, Crypt of Medea, £100 ono. Tel: Byfleet 41045.

● FREE SOFTWARE with my 2×8in Shugart disk drives, 64k cased Ohio superboard, 610 expansion, 64 character screen, Rs232, 1200 baud cassette, 2× power supplies, software in ROM's, manuals, £600 ono. Tel: Chorley (02572) 72955 (eves).

● BBC MODEL B. 40/80 track drive, DFS, Wordwise, Prestel acoustic coupler with software, joystick, games magazines, books, manuals, light pen, £500 for the lot. Tel: Richard on (Norwich) 57087.

● VIDEO GENIE system 48k. Including computer, expansion unit, disk drives 2×35T, (Tandy) monitor, £260. Offers for individual items considered. Also Aculab floppytape unit for above. Tel: (0294) 64144 (Ayrshire), (eves).

● SHARP PC1500, CE150 printer/cassette interfce, CE161 16k RAM, Casio FX702P, FP-10 printer, FA-2 cassette interface. Any offers for any part. Tel: Richard on Norwich 57087.

● SINCLAIR SPECTRUM disk interface, cable, documentation, utility disk. Never been used, £55. Tel: (0946) 812523.

● CUMMANA CSX200, 80 track, single-sided disk drive. Little used, with handbook, cables and formatting disk, for BBC Micro, £120. Tel: Plymouth (0752) 46489 (eves, weekends).

● FOR MZ80K, SP1002, SP5025 Source listings, ZEN, Sharpsoft, Forth and disassembler, assorted games. Offers? Tel: 021-373 9546 (eves).

● COMMODORE SX-64 portable, (includes disk drive and colour monitor). CBM-64 compatible 1520 plotter, £500 original software, accessories. As new, £650 ono (for quick sale). Tel: (0392) 54188 (8pm-9pm Weds/Thurs).

● NASCOM 2 with 48k, additional hardware, software, Centronics 501 printer, dual Memorex disk drives, Televideo 912 terminal. Clearing out prior to working abroad. Tel: Wokingham (0734) 793152 (after 7pm).

● LEARN TO PROGRAMME in machine coded. Full O/U course with manuals and computer. Exchange BBC Z80 board or Dual 80T disk drive or £250. Tel: Godalming 22699.

● TRS-80 colour computer 32k. With leads, manuals, programming course on cassette, cassette leads, joysticks and various games. Tel: (061) 941 1161 (nights), (061) 980 8015 (days).

● APPLE II+ 64k. Two disk drives, colour monitor, Serial interface, clock, Eprom programmer, Pascal and Logo. Many books and manuals, etc. £700 ono the lot. Tel: (0978) 840629.

● ATR 8000 CP/M add-on for Atari computers. Permits connection of standard peripherals, includes CP/M and MyDos operating systems. Free software utilites £600 value. Brand new, £295. Tel: Luton (0582) 32752.

● BBC computer. With disk chip, Microvitec colour monitor, Inforunner h/speed printer, Twilstar 80 track d/sided disk drive. Eight disks. Unwanted prize — unused! Retail £1,300. Offers around £950. Tel: Mellor 2476 (eves).

● COMMODORE SX64 portable for sale, having gone 16-bit. Software includes: Easystock, Future Finance, Games, Zork III, Beach-Head. Together with 30 unused disks, joystick, books, £500. Contact Mike Fielding, (0222) 551019 (eves).

● APRICOT PC. Twin 720k disks, 256k RAM, 12 inch monitor, SuperWriter, SuperCalc, SuperPlanner, Parallel printer cable, 10 disks, dust cover, 6 months old, little use, as new, £1,300 ono. Tel: 01-635 67458.

● NASCOM 2. 64k RAM, IO board and AVC colour board. Fitted in Kenilworth case. Full documentation for hardware and software. Offers. Tel: Hitchin (0462) 814029 (after 6pm).

● SHARP MZ-80B dual-disk system, 64k user RAM, 16k Hi-Res graphics RAM, P6 printer, built-in tape back-up, CP/M, WordStar, SpellStar, Mailmerge, MBasic, SuperCalc, etc. Luxury computing at £1250 ono. Tel: Bournemouth 427553 (eves).

● TANDY TRS-80 Model III 48k. Twin built-in drives. VisiCalc, TRS-80 line printer VIII. All in first class condition, £395 ono. Tel: (0765) 4612.

● CROMEMCO Z2 system. ADM monitor/keyboard, 48k CPU, PFD577 twin 8in drives, teletype printer, Basic DBMS etc. May split, offers? Collectors item! Tel: Soper on 01-580 7265 (days).

● TRS-80 MODEL I Level 2 Expansion interface 48k. Lowercase and Hi-Res mod's. Disk drive, Smaldos, word processor, assembler, Pascal, games. All on special desk, £300 or offers. Tel: Harlow 28218.

● CUMMANA 800k dual disk drive. With PSU and 40/80 track switch. Acorn 1.2 DFS, Wordwise, graphics ROM and Disc Doctor original ROMs and £3000 of software Sell for only £450. Tel: Harpenden 69152.

● SONY MSX Hitbit micro. Together with all leads and manuals and over £60 of software. Total value over £350, sell for only £200. Tel: Harpenden 69152 for details.

● VIDEO GENIE 64k. Built-in cassette, green screen, masses of software, literature, etc, £75. Serial interface +2k buffer. Fits in Epson MX80 or MX100 printers, £25. Tel: Mantell (Hants) (096) 278 619.

● CBM64 software. Disks — Vizawrite, Infomast, £50 ono for both. Tapes — Mailshot, Kensington, Valhalla also Quickshot I joystick, offers. All above is new. Apple Silentype without card, £90. Tel: Guildford (0483) 60102.

● APRICOT-PC. 2× double density 1.4MB plus monitor. Complete with manuals, software and SuperCalc 3. Six months old, cost new £2,300. Accept £1,500. Tel: Slough (0753) 23649.

● APRICOT 256k computer. 2×720k drives, 12in monitor

## TRANSACTION FILE ADVERTISEMENT FORM

All Transaction File ads must be submitted by readers on this form or a photocopy of this form. Maximum 30 words. Print one word per box, very clearly. Name, address and/or telephone number must be included in the 30 words. All ads must be accompanied by a flat fee of £2.50. Make cheques or POs payable to *Personal Computer World*. Ads accepted from private readers only. Ads cannot be repeated (unless sent in on another form) and we cannot guarantee to print an ad in any specific issue. Please help our typesetter to help you by printing your ad very clearly. Send your completed form to: Transaction File, *PCW*, 62 Oxford Street, London W1A 2HG.

Please find enclosed my cheque/PO for £2.50 for the following Transaction File ad.

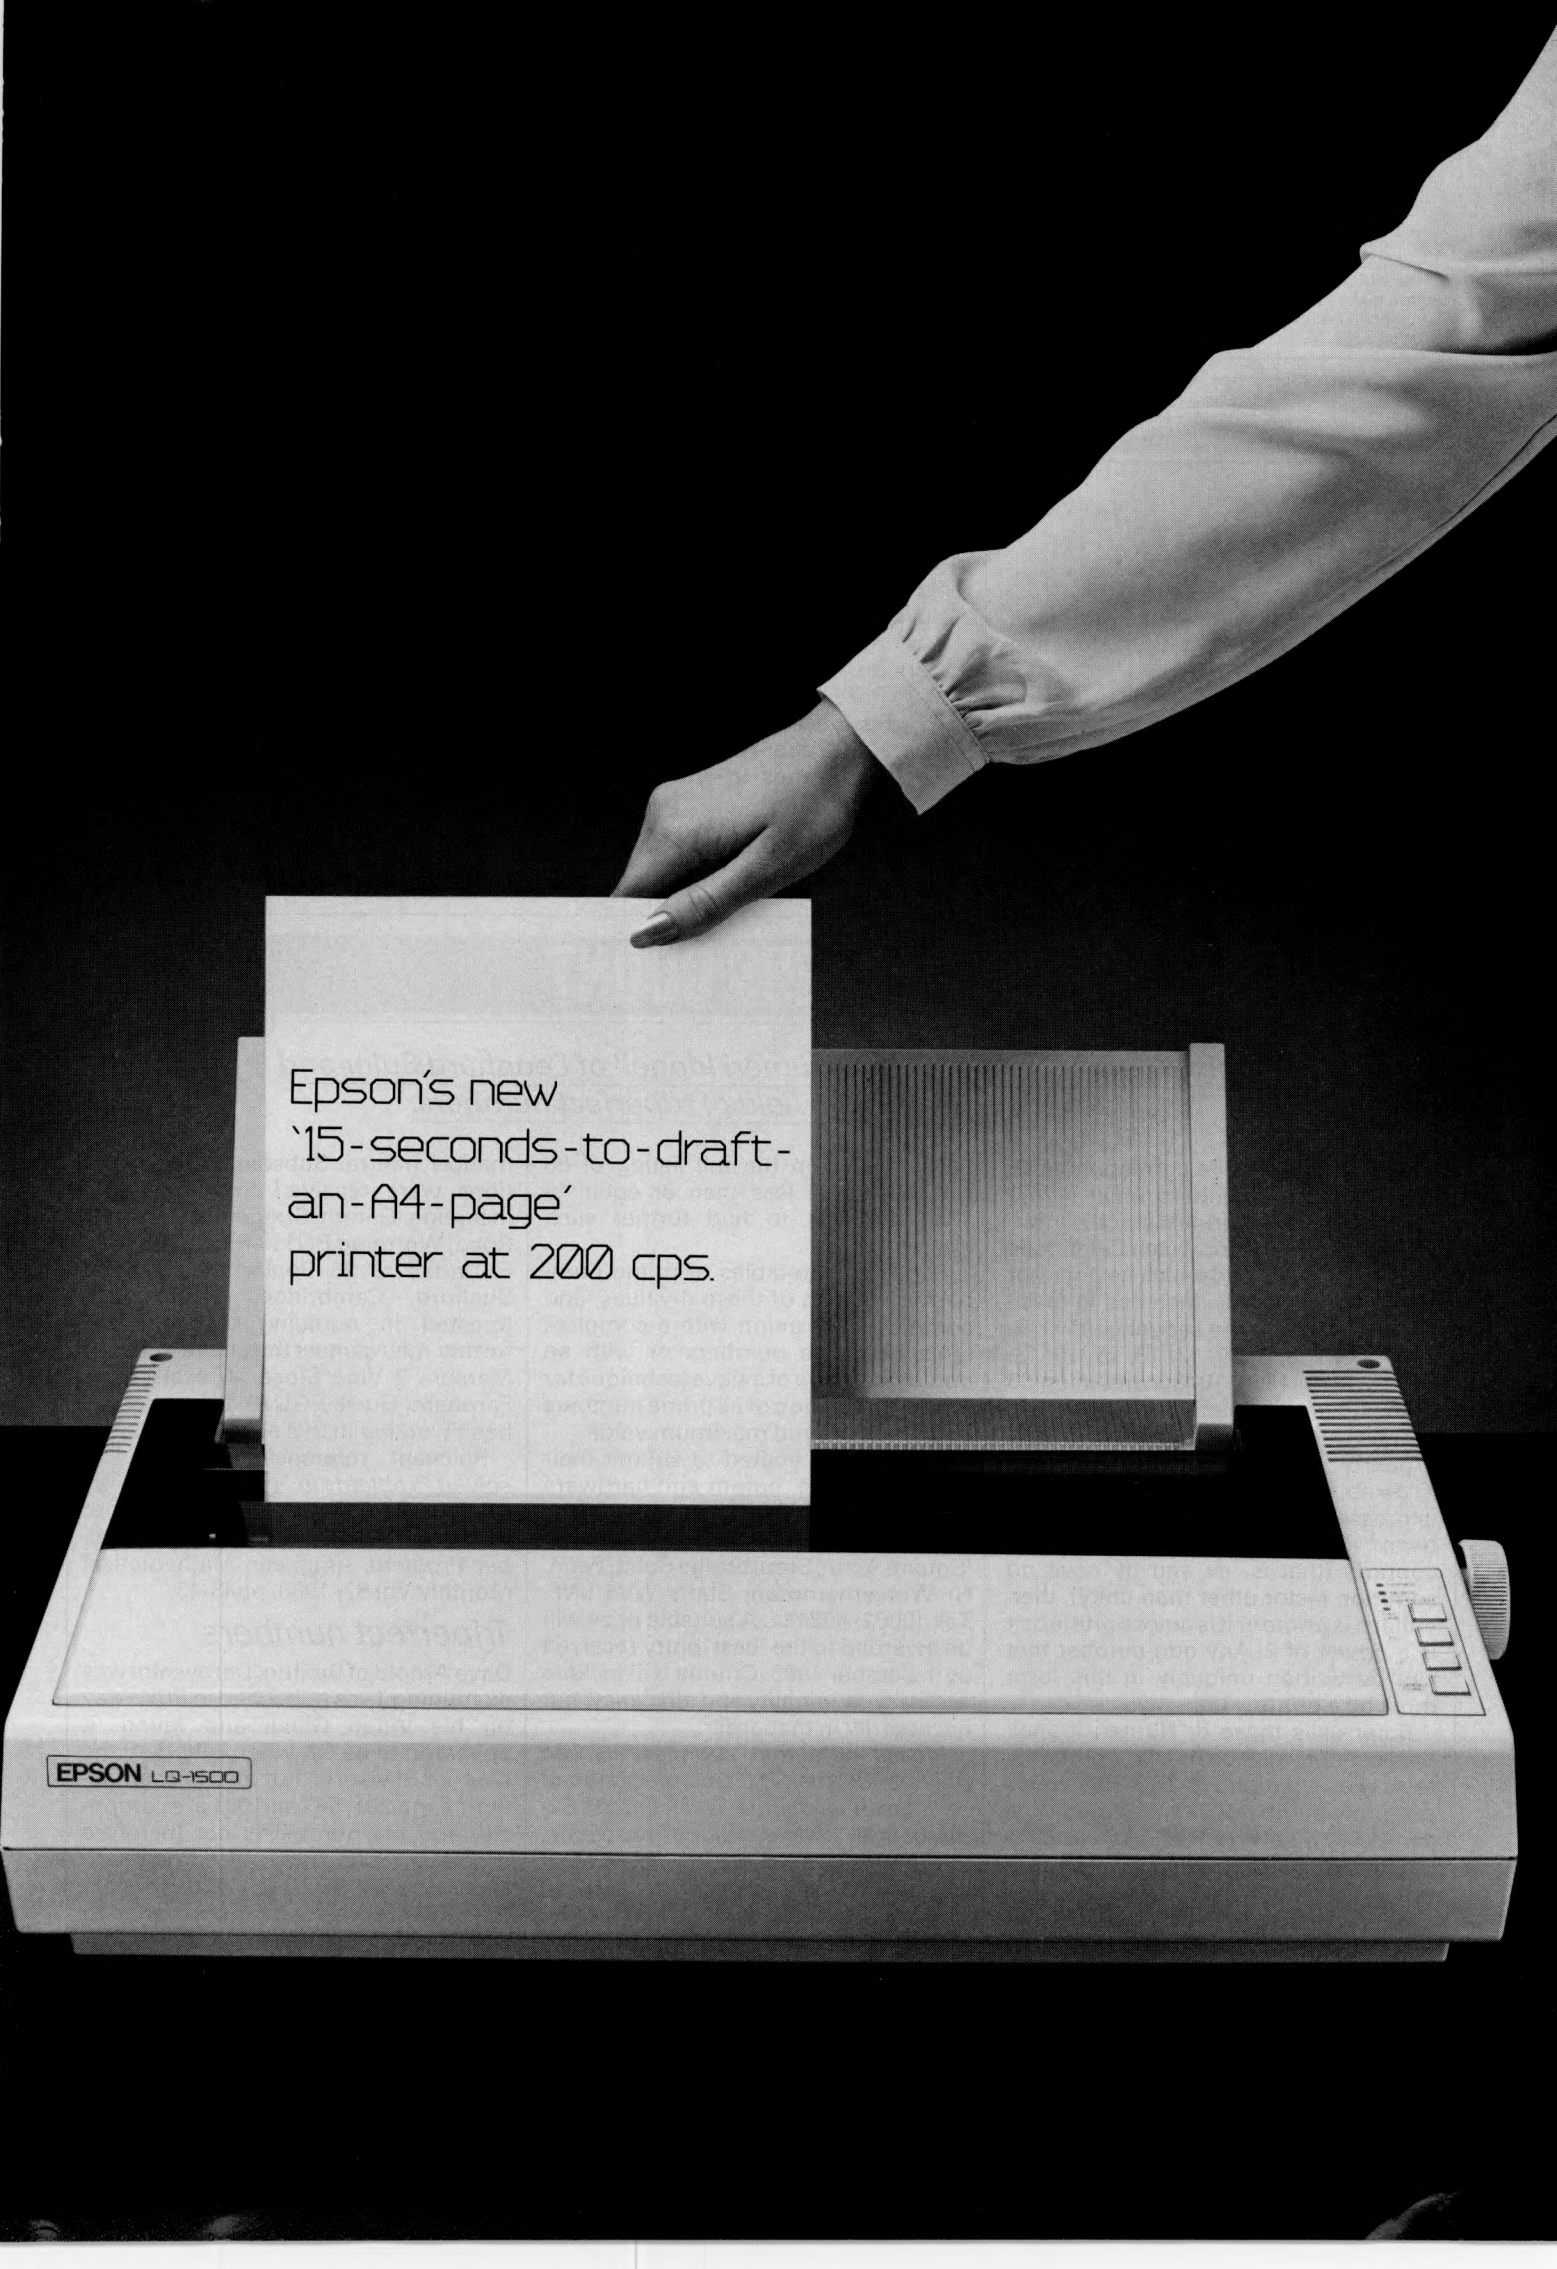
Epson's new
'15-seconds-to-draft-
an-A4-page'
printer at 200 cps.
EPSON LQ-1500

# TRANSACTION FILE

and stand. Canon PW1156A 15in printer. Sage, Accounts, Payroll, SuperWriter, SuperCalc, SuperPlanner software, 20 spare disks. Cost over £3,500. Unused in boxes. £2,950. Tel: 01-866 3268.

● SIRIUS 128k, 1.2Mb, with usual software, including Basic compiler. Very good condition, £1,300 ono. Tel: 01-427 6067.
● FOR SALE: TRS-80 Model 3, 48k RAM, one disk, and Hi-Res graphics board. TRS-80 Quick Printer (electrostatic), CGP-115 colour printer/plotter, all leads, manuals and software, £1,000 ono. Must sell quickly! Tel: (Nigel) (0966) 33441 or 32521.
● APPLE II+, with disk drive, £500 ono. DB master and DB utilities 1 and 2, £200 ono. Apple Logo, £60 ono. AppleWriter 1.1, £35. Tel: (06473) 3388 (eves. Tony).
● FOR SALE. View Word processor ROM for BBC Micro model B, plus manuals and printer drivers. Hardly used, £42.50. Tel: Stevenage (0438) 721216 (after 5pm).
● BBC "B" DFS, £250. Torch CP/N card and Perfect software, £200. Green monitor, £50. Epson FX100, £300. Tel: (0256) 75717.

# LEISURE LINES

*Brain-teasers from J J Clessa*

## *Quickie*

I know a young man whose mother is older than his grandmother. How can this be?

## *Prize Puzzle*

The idea for this month's puzzle comes from Roy Newham of Nottingham.

A roll of cloth 60ins wide has to be cut into a number of lengths so that each length and each diagonal is always an exact different number of inches. No measurement (except the width) is ever repeated.

How long is the roll?

Answers please, on postcards only (letters are automatically disqualified) to *PCW* Prize Puzzle, July Leisure Lines, VNU Business Publications, VNU House, 32-34 Broadwick Street, London W1A 2HG. Entries to arrive not later than 31 July 1985.

## *April Prize Puzzle*

This wasn't too difficult a problem, although about 10 per cent of the 180 entries had the wrong solution. The correct answer is 300, 325, 351, which are the smallest three consecutive triangular numbers whose product is a perfect square.

The winning entry came from SJ Mudd of Brentwood, Essex. Congratulations, your prize is on its way.

Thank you to all those who directed me to prime number tables which do not include unity — it seems there are some in existence.

# NUMBERS COUNT

*Mike Mudge considers the 'Numeri Idonei' of Leonhard Euler and awards a prize in the field of triperfect numbers.*

Among the extensive correspondence and papers of Leonhard Euler (1707-1783) there are various strictly arithmetical theorems for which Euler does not have a proof and which he does not even state precisely. Included in these are references to the sequence: d=1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 15, 16, 18, 21, . . . 1320, 1365, 1848, containing 65 terms up to this point.

These numbers all have the following property:
If d=ab and if a number n can be expressed *uniquely* in the form $n=ax^2+by^2$ where ax and by are coprime (that is, ax and by have no common factor other than unity), then either n is *prime* or it is *twice* a prime or it is a *power* of 2. Any odd number that can be written uniquely in this form must be a prime.

Euler calls these d 'Numeri Idonei' because they can be used for primality tests. For example, d=57=3.19 yields the prime number 1000003 because this can be uniquely written $19.8^2+3.577^2$ where 19.8=152 and 3.577=1731 coprime.

For example, d=1848=1.1848 yields the prime number 18518809 with the unique representation $197^2+1848.100^2$ where 197 and 184.100 are coprime.

It is still unknown whether Euler's 65 Numeri Idonei are the only such numbers. Euler only proved that cases d=1, 2, 3 have the required property.

**Problem** Obtain the full listing of 65 Numeri Idonei less than or equal to 1848. Attempt to find further such numbers.

Generate sub-tables of prime numbers from each of these d-values, and compare their union with a complete table of prime numbers or with an implementation of a sieve technique for the determination of all prime numbers up to the required maximum value.

Readers are invited to submit their program listing, output and hardware details together with their conclusions relating to this problem to Mike Mudge, 'Square Acre', Stourbridge Road, Penn, Nr Wolverhampton, Staffs WV4 5NF. Tel: (0902) 892141. A suitable prize will be awarded to the 'best' entry received by 1 October 1985. Criteria will include accuracy, originality and efficiency, not necessarily in that order.

*Please note that submissions can only be returned if a suitable stamped addressed envelope is included. Expanded reviews of previous problems, together with, subject to the approval of the contributor, copies of detailed programs from the prize-winning entry may also be requested.*

## *Prize-winner January*

**Congruent numbers** The response to this problem was very disappointing, probably due to its underlying mathematical nature. Substantive contributions were received from 'regulars' including Gareth Suggett, 31 Harrow Road, Worthing BN11 4RB and Richard F Tindall of 26 Poplar Close, Great Shelford, Cambridge. Readers interested in pursuing this problem further may contact the above or Robin Merson, 2 Vine Close, Wrecclesham, Farnham, Surrey GU10 4TE, who has been working in this area for years.

Relevant references include *Unsolved Problems in Number Theory* by RK Guy (Springer 1981) and the paper by Ronald Alter, *The Congruent Number Problem,* American Mathematical Monthly Vol 87, 1980, pp43-45.

## *Triperfect numbers*

Dave Arnold of Buxton, Derbyshire was examining $T_7$ as published in *PCW* May on his Video Genie and found 'it appeared to be OK when I checked the sum of divisors, but on further examination 301, 541 and 901 are composite and the number is not therefore triperfect'. Exchanges of correspondence between RF Tindall and D Arnold took the search for $T_7$ up in stages to $2^{60}-1$ without success. For this enterprise and collaborative effort Dave Arnold is nominated as this month's prizewinner; an award in the area of congruent numbers may be considered in the future if further results are forthcoming.

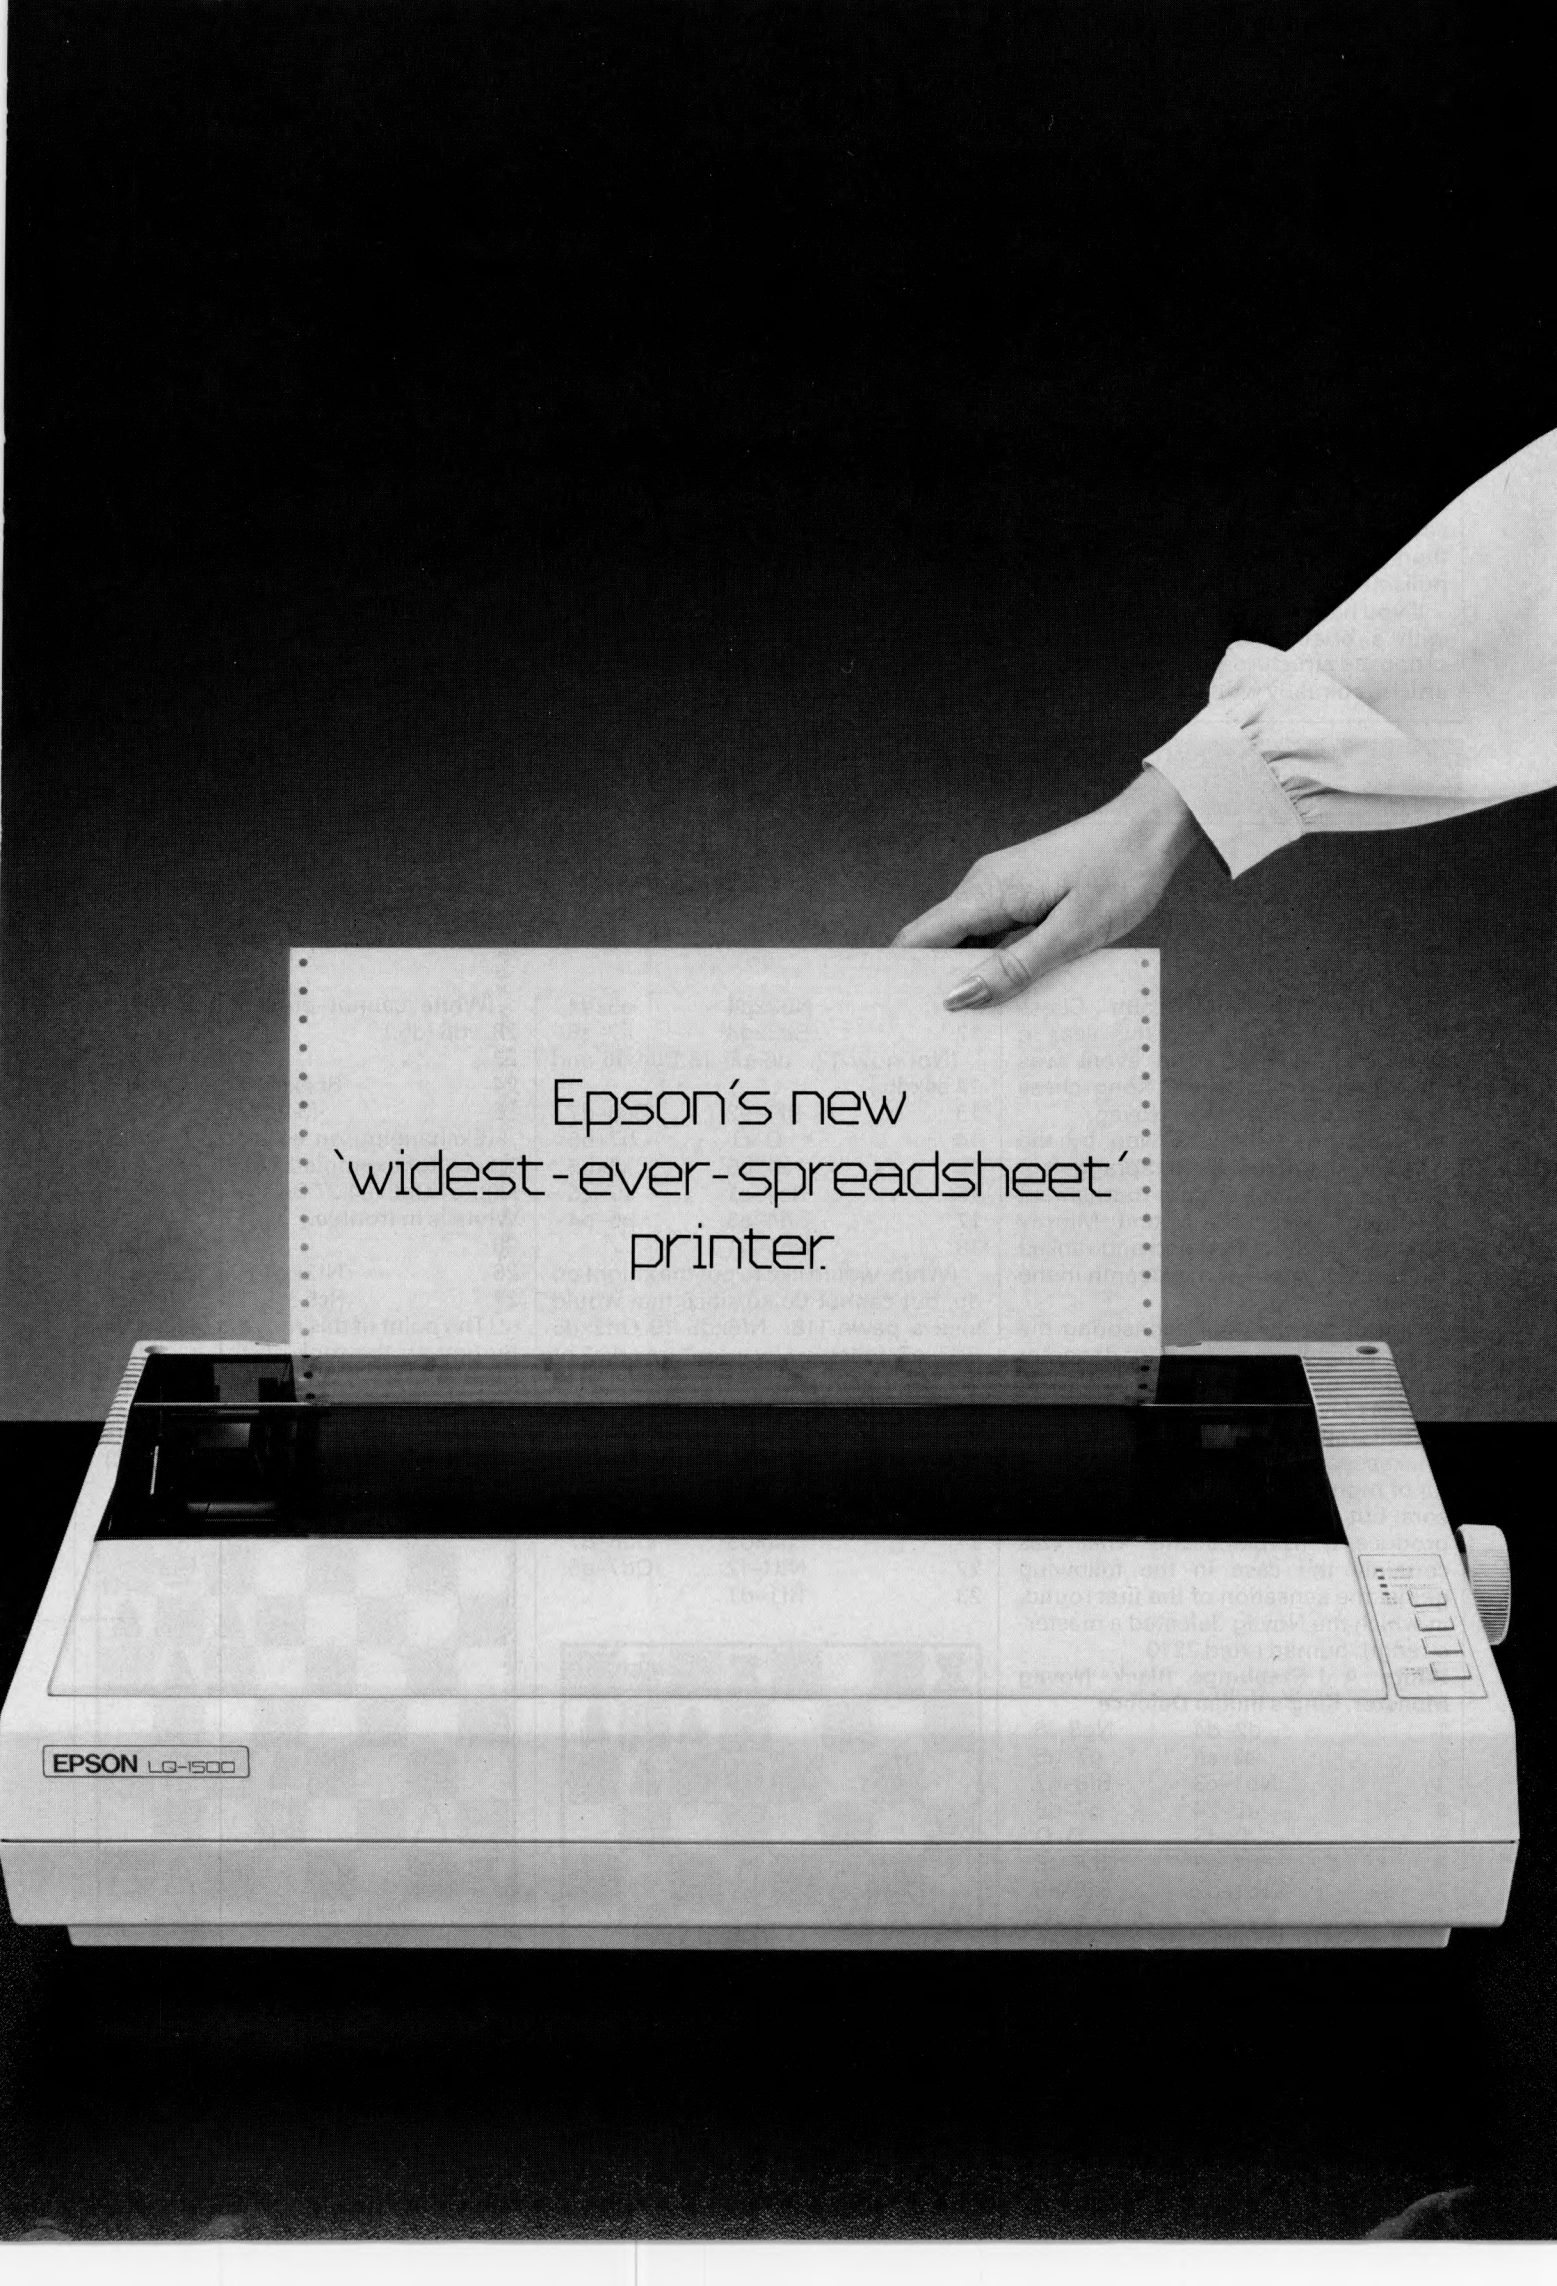
Epson's new
'widest-ever-spreadsheet'
printer.
EPSON LQ-1500

END ZONE

# WRITING FOR PCW

*Your chance to contribute to the magazine.*

We're offering readers a chance to get rich (well, at least richer) and to influence what's published in the magazine — by writing for it. We welcome approaches from would-be writers, including those who have never appeared in print before. It's often users with practical experience who have the most interesting things to say, so don't worry if your prose is less than perfect, we can take care of the polishing.

If you have an idea for a feature write, with a brief synopsis, outlining the proposed structure and content. If your article is already written, then send it in for consideration. Remember to put your name and address on both the covering letter and the manuscript — along with a daytime phone number if possible. Manuscripts should be typed or printed out (dot matrix output is fine), in double-line spacing with ample margins top and bottom and on each side.

Any accompanying program listings should be supplied on disk or cassette, ideally with a printout as well. We'll try to return all submissions sent in with a suitable sae, but make sure you keep a copy of everything you submit as well for reference.

Bear in mind that it's worth taking a look at the Back Issues advertisement to see what sort of things we have already published — after all there's no point in reinventing the wheel. And please be sure to tell us if you've contacted another magazine (perish the thought): it would be very awkward if the same article appeared elsewhere. Frankly, we're more likely to accept something which has been offered exclusively to us.

Finally, we do pay for published work — the rate is £65 per 1000 words, and payment usually follows about four-six weeks after publication.

# MICROCHESS

*Computer thrashes human at the Third Commonwealth Chess Championship. Kevin O'Connell records the first-round upset.*

The Third Commonwealth Chess Championship was held this year in London's Dockland. The event was sponsored by the Hong Kong chess computer manufacturer, Novag.

The tournament was won by the reigning champion, Kevin Spraggett of Canada, ahead of the pre-tournament favourites John Nunn and Murray Chandler, both of England and ranked respectively ninth and sixteenth in the world.

One of the perks of sponsoring the event is that Novag is permitted to enter a couple of chess computers. Having micros play in this class of tournament is still rather like trying to rewrite Shakespeare's first folio using a roomful of monkeys seated at word processors, but every so often a chimp does produce a usable scene. That was certainly the case in the following game, the sensation of the first round, in which the Novag defeated a master-strength human rated 2210.

**White: A J Stebbings. Black: Novag Monster. King's Indian Defence.**

| | | |
|---|---|---|
| 1 | d2–d4 | Ng8–f6 |
| 2 | c2–c4 | g7–g6 |
| 3 | Nb1–c3 | Bf8–g7 |
| 4 | e2–24 | d7–d6 |
| 5 | f2–f3 | O–O |
| 6 | Bc1–e3 | Nb8–c6 |
| 7 | Qd1–d2 | Rf8–e8 |
| 8 | Ng1–e2 | Ra8–b8 |
| 9 | Ne2–c1 | e7–e5 |
| 10 | Nc1–b3 | Nc6xd4 |

(10...e5xd4 is more common, followed by 11 Nb3xd4 d6–d5!, freeing Black's game: for example, 12 c4xd5 Nf6xd5 13 Nc3xd5 Nc6xd4 14 Be3xd4 Qd8xd5.)

| | | |
|---|---|---|
| 11 | Nb3xd4 | e5xd4 |
| 12 | Be3xd4 | a7–a6 |

(Not now 12...d6–d5 13 Bd4xf6 and 14 c4xd5.)

| | | |
|---|---|---|
| 13 | Bf1–e2 | Bc8–d7 |
| 14 | O–O | b7–b5 |
| 15 | c4xb5 | a6xb5 |
| 16 | Ra1–c1 | c7–c5 |
| 17 | Bd4–e3 | b5–b4 |
| 18 | Nc3–d1 | |

(White would like to put the knight on d5, but cannot do so since that would lose a pawn (18...Nf6xd5 19 Qd2xd5 Bd7–e6, followed by a capture on a2 or b2) or even worse (18...Nf6xd5 19 e4xd5 Re8xe3 20 Qd2xe3 Bg7–d4, winning the queen).)

| | | |
|---|---|---|
| 18 | ... | Bd7–e6 |
| 19 | Be2–c4 | Be6xc4 |
| 20 | Rc1xc4 | Rb8–a8 |
| 21 | b2xb3 | Qd8–d7 |
| 22 | Nd1–f2 | Qd7–e6 |
| 23 | Rf1–d1 | |

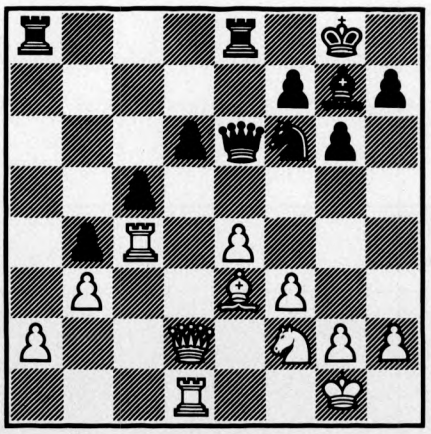

*White is already looking vulnerable*

(White cannot prevent the freeing 23...d6–d5.)

| | | |
|---|---|---|
| 23 | ... | d6–d5 |
| 24 | Rc4xc5 | d5xe4 |
| 25 | f3–f4 | |

(Exchanging on e4 would be much worse, for example 25 f3xe4 Nf6xe4 26 Nf2xe4 Qe6xe4 27 Be3–f2 Bg7–c3, and White is in trouble.)

| | | |
|---|---|---|
| 25 | ... | Nf6–g4 |
| 26 | Nf2xg4 | Qe6xg4 |
| 27 | Rc5–d5 | Re8–e7 |

(The point of this move is quite deep. By getting the rook off the back rank, Black prepares his material-winning manoeuvre at moves 30–32.)

| | | |
|---|---|---|
| 28 | Qd2xb4 | Ra8xa2 |
| 29 | Qb4–b8+ | Bg7–f8 |
| 30 | Rd5–d2 | |

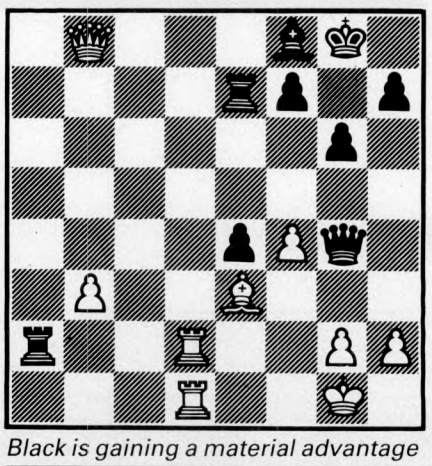

*Black is gaining a material advantage*

| | | |
|---|---|---|
| 30 | ... | Re7–d7 |
| 31 | h2–h3 | |

(White has very little choice. 31

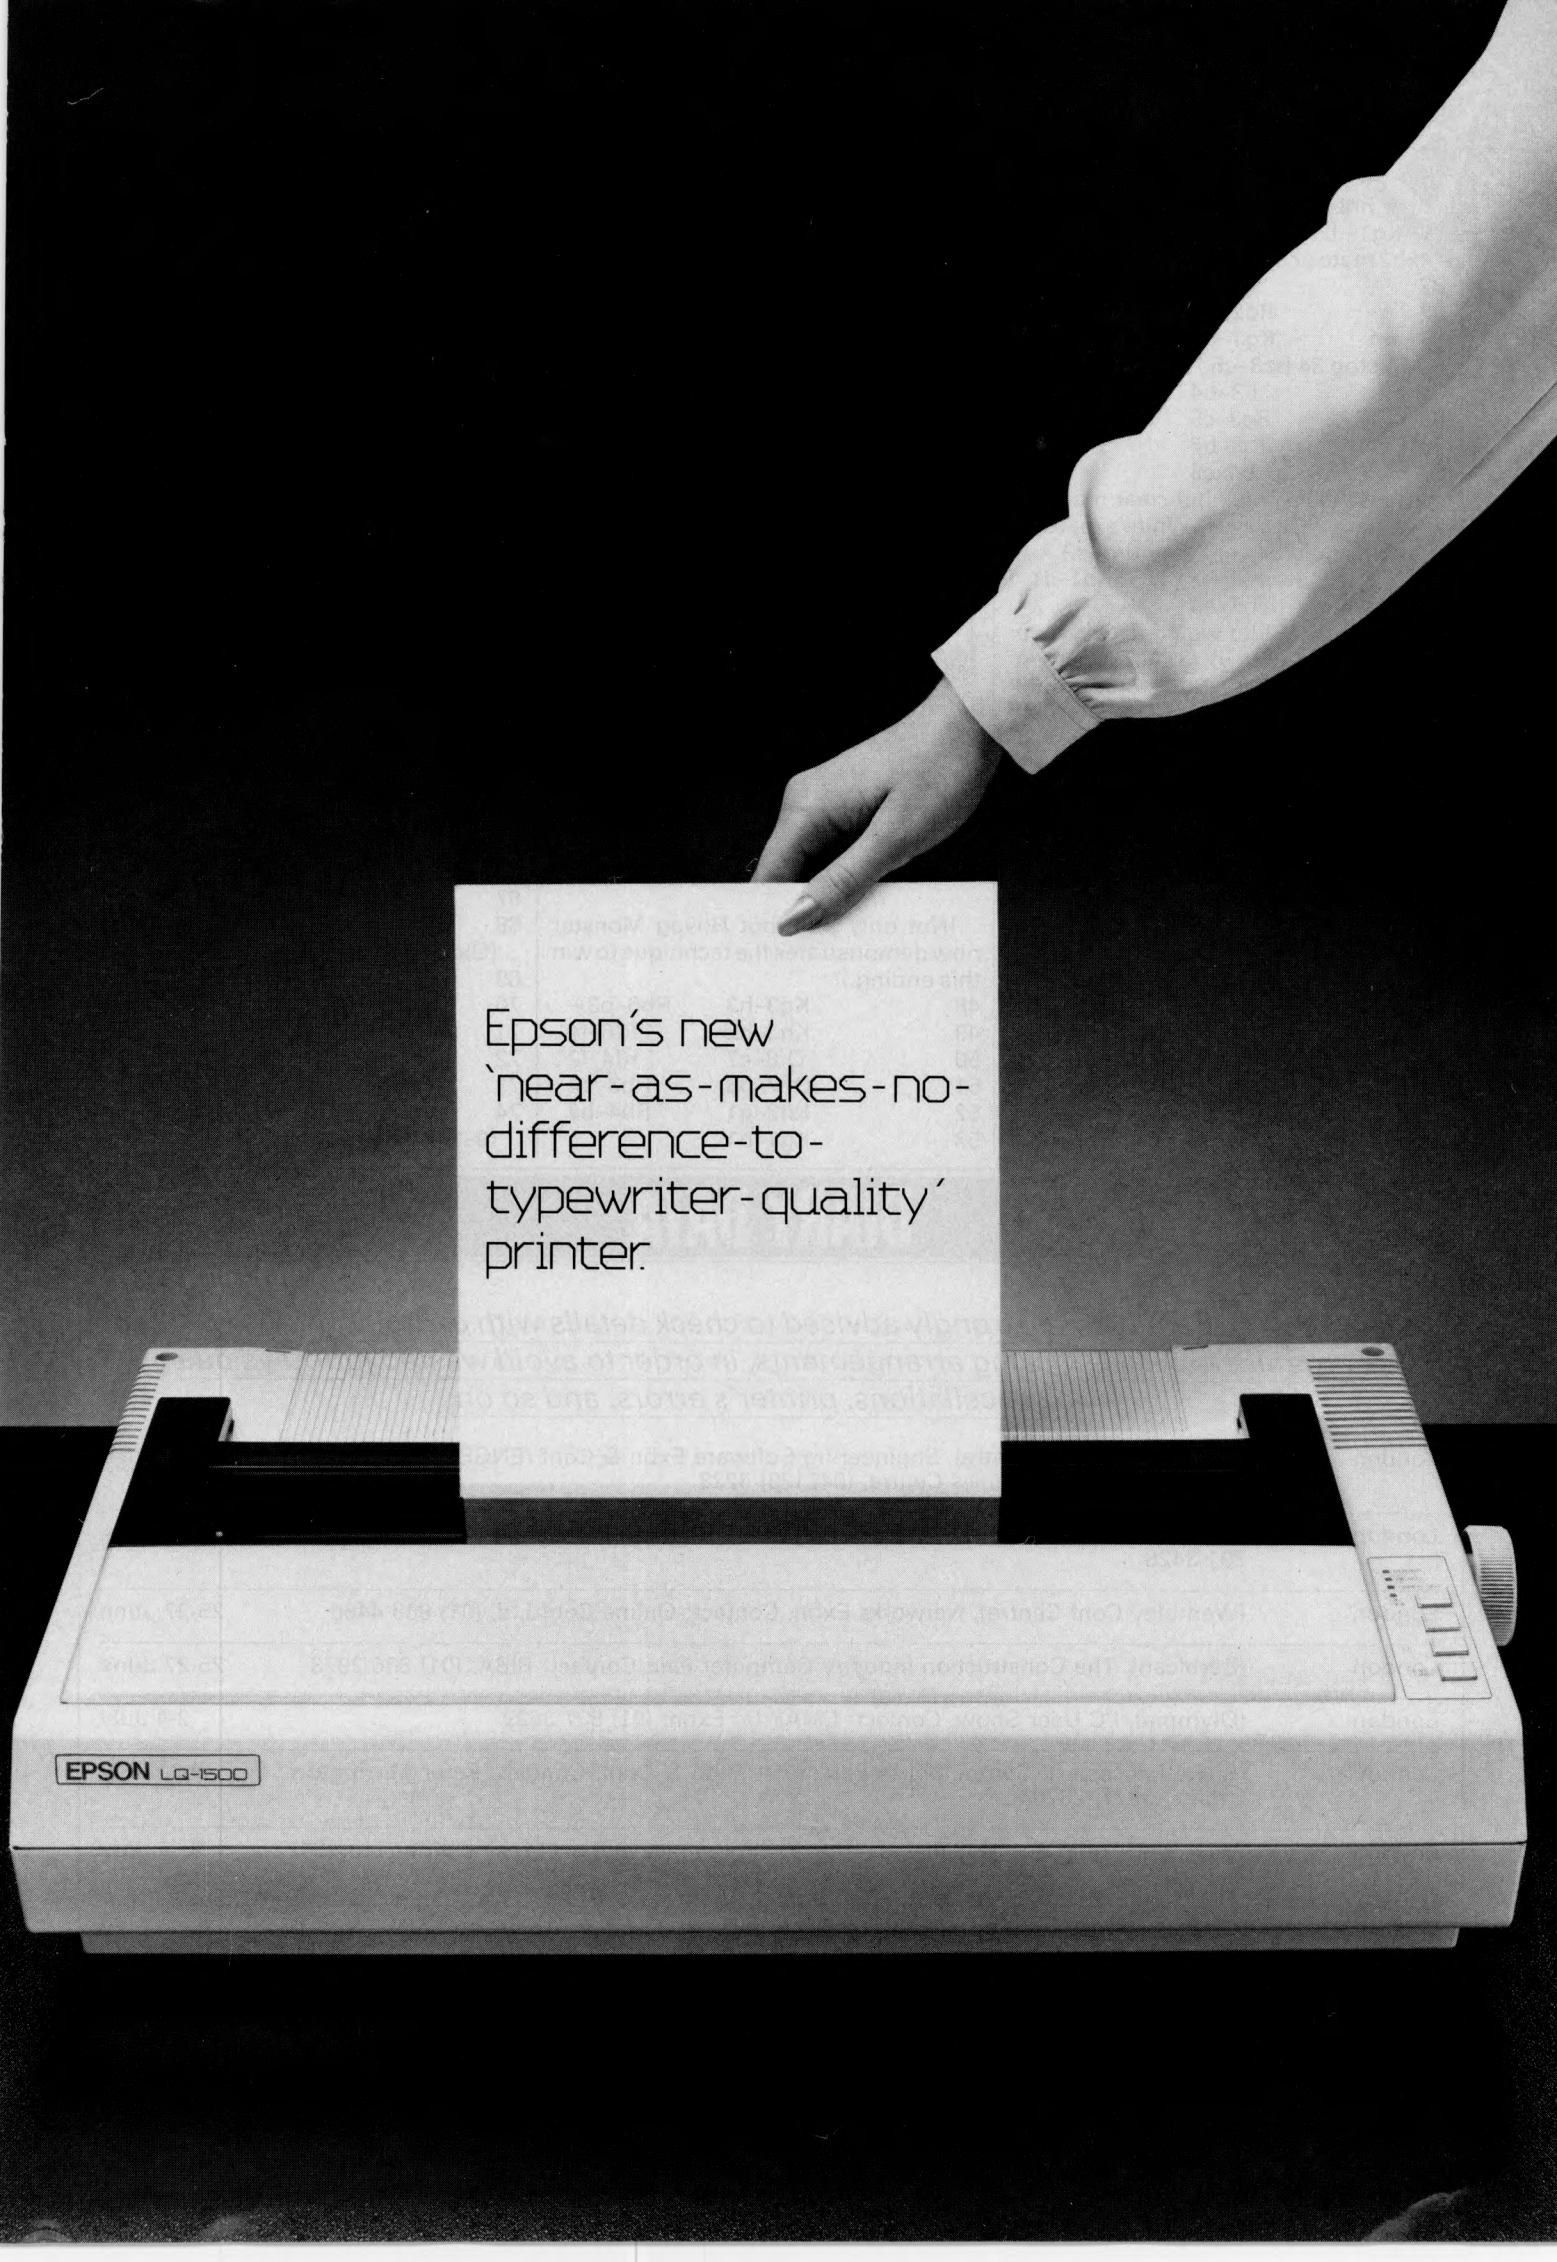
Epson's new
`near-as-makes-no-
difference-to-
typewriter-quality'
printer.
EPSON LQ-1500

# MICROCHESS

Rd2xa2 fails to 31 ... Rd7xd1 + 32 Kg1–f2 Qg4–h4+ and 33g2–g3 Qh 4xh2 mate or 33 Kf2–e2 Qh2–e1 mate.)

| | | |
|---|---|---|
| 32 | ... | Qg4xd1+ |
| 32 | Rd2xd1 | Rd7xd1+ |
| 33 | Kg1–h2 | Ra2–a5 |

(To stop 34 Be3–c5.)

| | | |
|---|---|---|
| 34 | b3–b4 | Ra5–d5 |
| 35 | Be3–c5 | Rd5–d8 |
| 36 | Qb8–b7 | Bf8xc5 |
| 37 | b4xc5 | |

(Black has a small but clear material advantage. However, White's passed c–pawn could be very dangerous.)

| | | |
|---|---|---|
| 37 | ... | Rd1–c1 |
| 38 | Qb7xe4 | |

(Of course White would like to keep his c–pawn, but if 38 c5–c6 then 38...e4–e3 39 c6–c7 Rd8–e8 and if 39 Qb7–b5 Re8–c8 ensures that it disappears.)

| | | |
|---|---|---|
| 38 | ... | Rd8–c8 |
| 39 | f4–f5 | Rc1xc5 |
| 40 | f5–f6? | |

(Now Black gets a greater advantage. After 40 f5xg6, my money would have been on a draw.)

| | | |
|---|---|---|
| 40 | ... | Rc5–c6 |
| 41 | Qe4–e7 | Rc6–e6 |
| 42 | Qe7–d7 | Rc8–f8 |
| 43 | Qd7–d4 | Rf8–b8 |
| 44 | h3–h4 | |

(or 44 g2–g4 g6–g5 and the f–pawn rapidly falls).

| | | |
|---|---|---|
| 44 | ... | h7–h5 |
| 45 | Kh2–g3 | Rb8–b6 |
| 46 | Qd4–d8+ | Kg8–h7 |
| 47 | Qd8–f8 | |

(The days have long done when such a last-gasp effort could prove successful against a chess computer.)

| | | |
|---|---|---|
| 47 | ... | Re6xf6 |

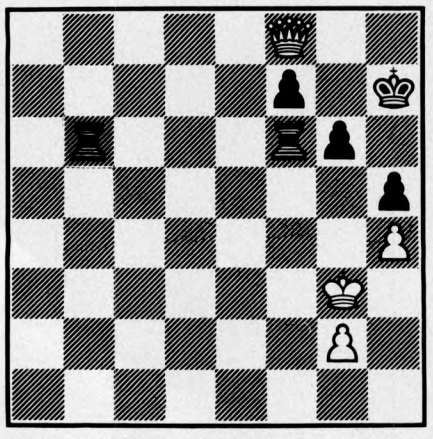

*The end is nigh . . . Novag Monster has now only to avoid stalemate*

(Not only that, but Novag Monster now demonstrates the technique to win this ending.)

| | | |
|---|---|---|
| 48 | Kg3–h3 | Rb6–b3+ |
| 49 | Kh3–h2 | Rf6–f4 |
| 50 | Qf8–e7 | Rf4–f2 |
| 51 | Qe7–d8 | Rb3–b4 |
| 52 | Kh2–g1 | Rb4–b2 |
| 53 | Kg1–h1 | |

(Another 'hopeful'. Now 53...Rf2xg2? would allow 54 Qd8–h8+! Kh7xh8 stalemate.)

| | | |
|---|---|---|
| 53 | ... | Rb2–c2 |
| 54 | Qd8–b8 | Rc2–a2 |
| 55 | Qb8–d8 | Ra2–b2 |
| 56 | Qd8–d4 | |

(Still coveting the h8 square.)

| | | |
|---|---|---|
| 56 | ... | Rf2–e2 |
| 57 | Qd4–d8 | Rb2–d2 |
| 58 | Qd8–c8 | Rd2–d4 |

(Grinding down White's resistance. Now 59 g–g3 allows 59...Rd4–d1 mate while 59 Qc8–h3 Rd4–d1+ 60 Kh1–h2 Rd1–d2, and Black picks up the g–pawn.)

| | | |
|---|---|---|
| 59 | Kh1–g1 | Rd4xh4 |
| 60 | Qc8–d8 | Rh4–g4 |
| 61 | Kg1–h1 | Rg4–f4 |

(Black still has to beware of the stalemate possibility.)

| | | |
|---|---|---|
| 62 | Qd8–c8 | Rf4–h4+ |
| 63 | Kh1–g1 | Rh4–g4 |
| 64 | Kg1–h1 | Rg4–f4 |
| 65 | Qc8–d8 | Rf4–f1+ |
| 66 | Kh1–h2 | f7–f5 |
| 67 | Qd8–f6 | Rf1–f2 |
| 68 | Kh2–h1 | Re2–d2 |

(Olé.)

| | | |
|---|---|---|
| 69 | Qf6–f8 | Rf2–e2 |
| 70 | Qf8–f6 | Kh7–h6 |
| 71 | Qf6–f8+ | Kh6–g5 |
| 72 | Qf8–g7 | h5–h4 |
| 73 | Qg7–h8 | Rd2–d1+ |
| 74 | Kh1–h2 | Re2–e1 |

(0–1 (White resigns) )

# DIARY DATA

*Readers are strongly advised to check details with exhibition organisers before making arrangements, in order to avoid wasted journeys due to cancellations, printer's errors, and so on.*

| | | |
|---|---|---|
| London | (Kensington Exbn Centre), Engineering Software Exbn & Conf (ENGSOFT). Contact: Computational Mechanics Centre, (042129) 3223 | 18-20 June |
| London | (Olympia), Computers in Manufacturing Exbn. Contact: Independent Exbns Ltd, (01) 891 3426 | 25-27 June |
| London | (Wembley Conf Centre), Networks Exbn. Contact: Online Conf Ltd, (01) 868 4466 | 25-27 June |
| London | (Barbican), The Construction Industry Computer Fair. Contact: RIBA, (01) 836 2973 | 25-27 June |
| London | (Olympia), PC User Show. Contact: EMAP Int Exbn, (01) 837 3699 | 2-4 July |
| London | (Royal Lancaster), Computers In Personnel Exbn & Conf. Contact: Peter Mirrington Exbns, (0277) 232030 | 9-11 July |
| London | (Wembley Conf Centre), Silicon Design Exbn. Contact: Project Presentations Ltd, (01) 242 3621 | 9-11 July |
| USA | (Chicago), National Computer Conference & Exbn. Contact: American Federation of Information Processing Societies Inc, 1899 Preston White Drive, Reston, VA22091 | 15-18 July |
| London | (Olympia), First European Programmable Controller Event. Contact: Evan Steadman Services Ltd, (0799) 26699 | 16-18 July |
| London | (Barbican), Personal Computer World Show. Contact: Montbuild Ltd, (01) 486 1951 | 4-8 Sept |


Epson's new adhesive label printer.
Epson's new adhesive label printer.
Epson's new
EPSON LQ-1500

# ACC NEWS

*The ACC is interested in branching out into the realm of 16-bit computers. If this, or a club in eastern England interests you, read on*

The Association of Computer Clubs (ACC) is a democratically run, non-profit association of the computer clubs and user groups within the UK. Its attention is primarily focused on clubs that are run on a democratic basis, although the master list of UK computer clubs contains a number that are run as small businesses.

## ACC services

The ACC provides a number of services to affiliated computer clubs (this costs £7.50-£30 a year depending on club size) including free insurance against public liability risks, a scheme for cheaply insuring computer equipment during club meetings, and various forms of publicity and advice. At present, roughly one-third of the clubs have chosen to affiliate in the 15 months that the scheme has been running. The Association also runs a service to put members of the public in touch with their local computer clubs. To take advantage of this, please write to John Bone (at the address below) so that he can pass it on to the enquiry office.

The Association is particularly interested in expanding its activities among clubs working in the 16-bit area. At the last committee meeting, the unanimous view was that hobby computing would follow business computing into 16-bits, and probably Intel 8086 and modified MS-DOS in particular. What couldn't be agreed was how soon this move would occur. The Department of Education has since annnounced that its next educational micro standard will be 8086/MS-DOS. Does this mean that schools will teach Lotus 1-2-3?

If you are involved in a club interested in 16-bit computing, or are thinking of starting one, let the ACC know. Special interests are Apricot, Sirius, IBM PC, Olivetti M24 (and other compatibles), ACT F1 and Portable, RML Nimbus, MS-DOS and Lotus 1-2-3. I get many requests from people wishing to meet other Apricot users, but apart from a business group called the Apricot & Sirius Users' Club, I have no other information.

The ACC is intending to move its administration on to 16-bit machines as soon as an enterprising manufacturer of MS-DOS/PC-DOS machines realises how much excellent publicity could be gained by lending one to the Association. This would include having the machine proudly displayed on the ACC stand at computer shows, and crediting the lender on the hundreds of database enquiries sent out. Anyone interested?

## Club news

This month's selection focuses on the East of England, ranging from Lincolnshire through Cambridgeshire to Essex.

I continue to receive information from the Lincolnshire Microprocessor Society and the related Lincoln Computer Club. The Society has provided some financial backing to the Lincoln Club, which holds regular meetings on the first and third Wednesday of each month at The Cardinal's Hat, 268 High Street, Lincoln. To find out more about either group, contact Douglas Griffiths who is secretary of both on Lincoln 680578 or at 659 Newark Road, Swallowbeck, Lincoln LN6 8SA. One interesting facility offered by the Society is a number of computer systems which are available to members on hire terms. This would allow members to 'try out' their prospective purchases with more time and less pressure than in a shop, and is a thoroughly welcome initiative.

Dr Rupert Francis writes to me about a computer club for hospital staff around Boston, Lincolnshire. Membership is restricted to employees of the South Lincolnshire Health Authority, and it meets at the Pilgrim Hospital, Sibsey Road, Boston, Lincs PE21 9QS on the second Tuesday of the month at 5.30pm and the fourth Wednesday at 7pm. For more information, write to Dr Francis at the Pilgrim Hospital.

John Goodwin is the secretary of the Boston Acorn Computer Users' Club. It meets on the third Wednesday of each month at Fishtoft Social Club, Church Green Road, Fishtoft, Boston. It is planning to hold a 'kids' corner' feature with a competition and a prize for the child getting the top score of the night. The club is also interested in the educational use of computers and the development of speech synthesis interfaces. For more information, contact John Goodwin on Boston 51710 or write to him at 245 Church Green Road, Fishtoft, Boston, Lincs PE21 0RP.

Moving down to Peterborough, I hear from Paul Bywater. He is now the secretary of the Commodore Users' Club at Peterborough, replacing Tony Scott. If you are interested in Commodore computing in the area, please contact Paul Bywater on Peterborough 210948 or at 13 Tatwin Drive, Crowland, Peterborough PE6 0AE.

I have received a copy of the Cambridge Computer Town newsletter. The man behind it is Bob Waixel of 4 Manhattan Drive, Cambridge CB4 1JL (or call (0223) 61319). The Computer Town has been helped by Cambridgeshire libraries with the use of the lending library on the first floor of the Central Library, Lion Yard, Cambridge, for the meetings, and by Boots Computer Department which has lent TV sets. The next few meetings will be on Saturdays 13 July, 28 September, 19 October, 7 December and a date to be advised in November. Equipment available includes BBCs, Spectrums and a Commodore SX64 portable. A variety of software is also on show.

MJ Osborne of 25 Oak Avenue, S Wootton, King's Lynn, Norfolk PE30 3JQ writes to tell me of the King's Lynn ZX Users' Group. The club is running very successfully, with 23 members at the last count, but please note Mr Osborne's new address as he has recently moved.

Allan Potten has written from 14 Foxmead, Rivenhall End, Witham, Essex CM8 3HD to remind me about his ComputerTown which serves Colchester and the surrounding area. The members own a variety of equipment, mainly the popular micros, but also a variety of home-made, adapted second-hand and 'own design' equipment, some of which has been marketed. Write to Allan for the details

John Murphy tells me of a club which meets on Thursdays at 7.30pm in the Gallery Room at the Blue Boar Hotel in Maldon. Activities include a regular programming course for beginners, general interest meetings and a small group dedicated to game-writing. For more information write to John at The Computer Group, Oaklea, Goldhanger Road, Maldon CM9 7QU.

---

*For a mention in this column or to notify the ACC of a new or existing club: Rupert Steele, 12 Philbeach Gardens, London SW5 9DY, or call (01) 370 0601.*

*For any other enquiry, including the address of your local club: John Bone, ACC chairman, 2 Claremont Place, Gateshead, Tyne & Wear NE8 1TL, or call (091 477) 0036.* END

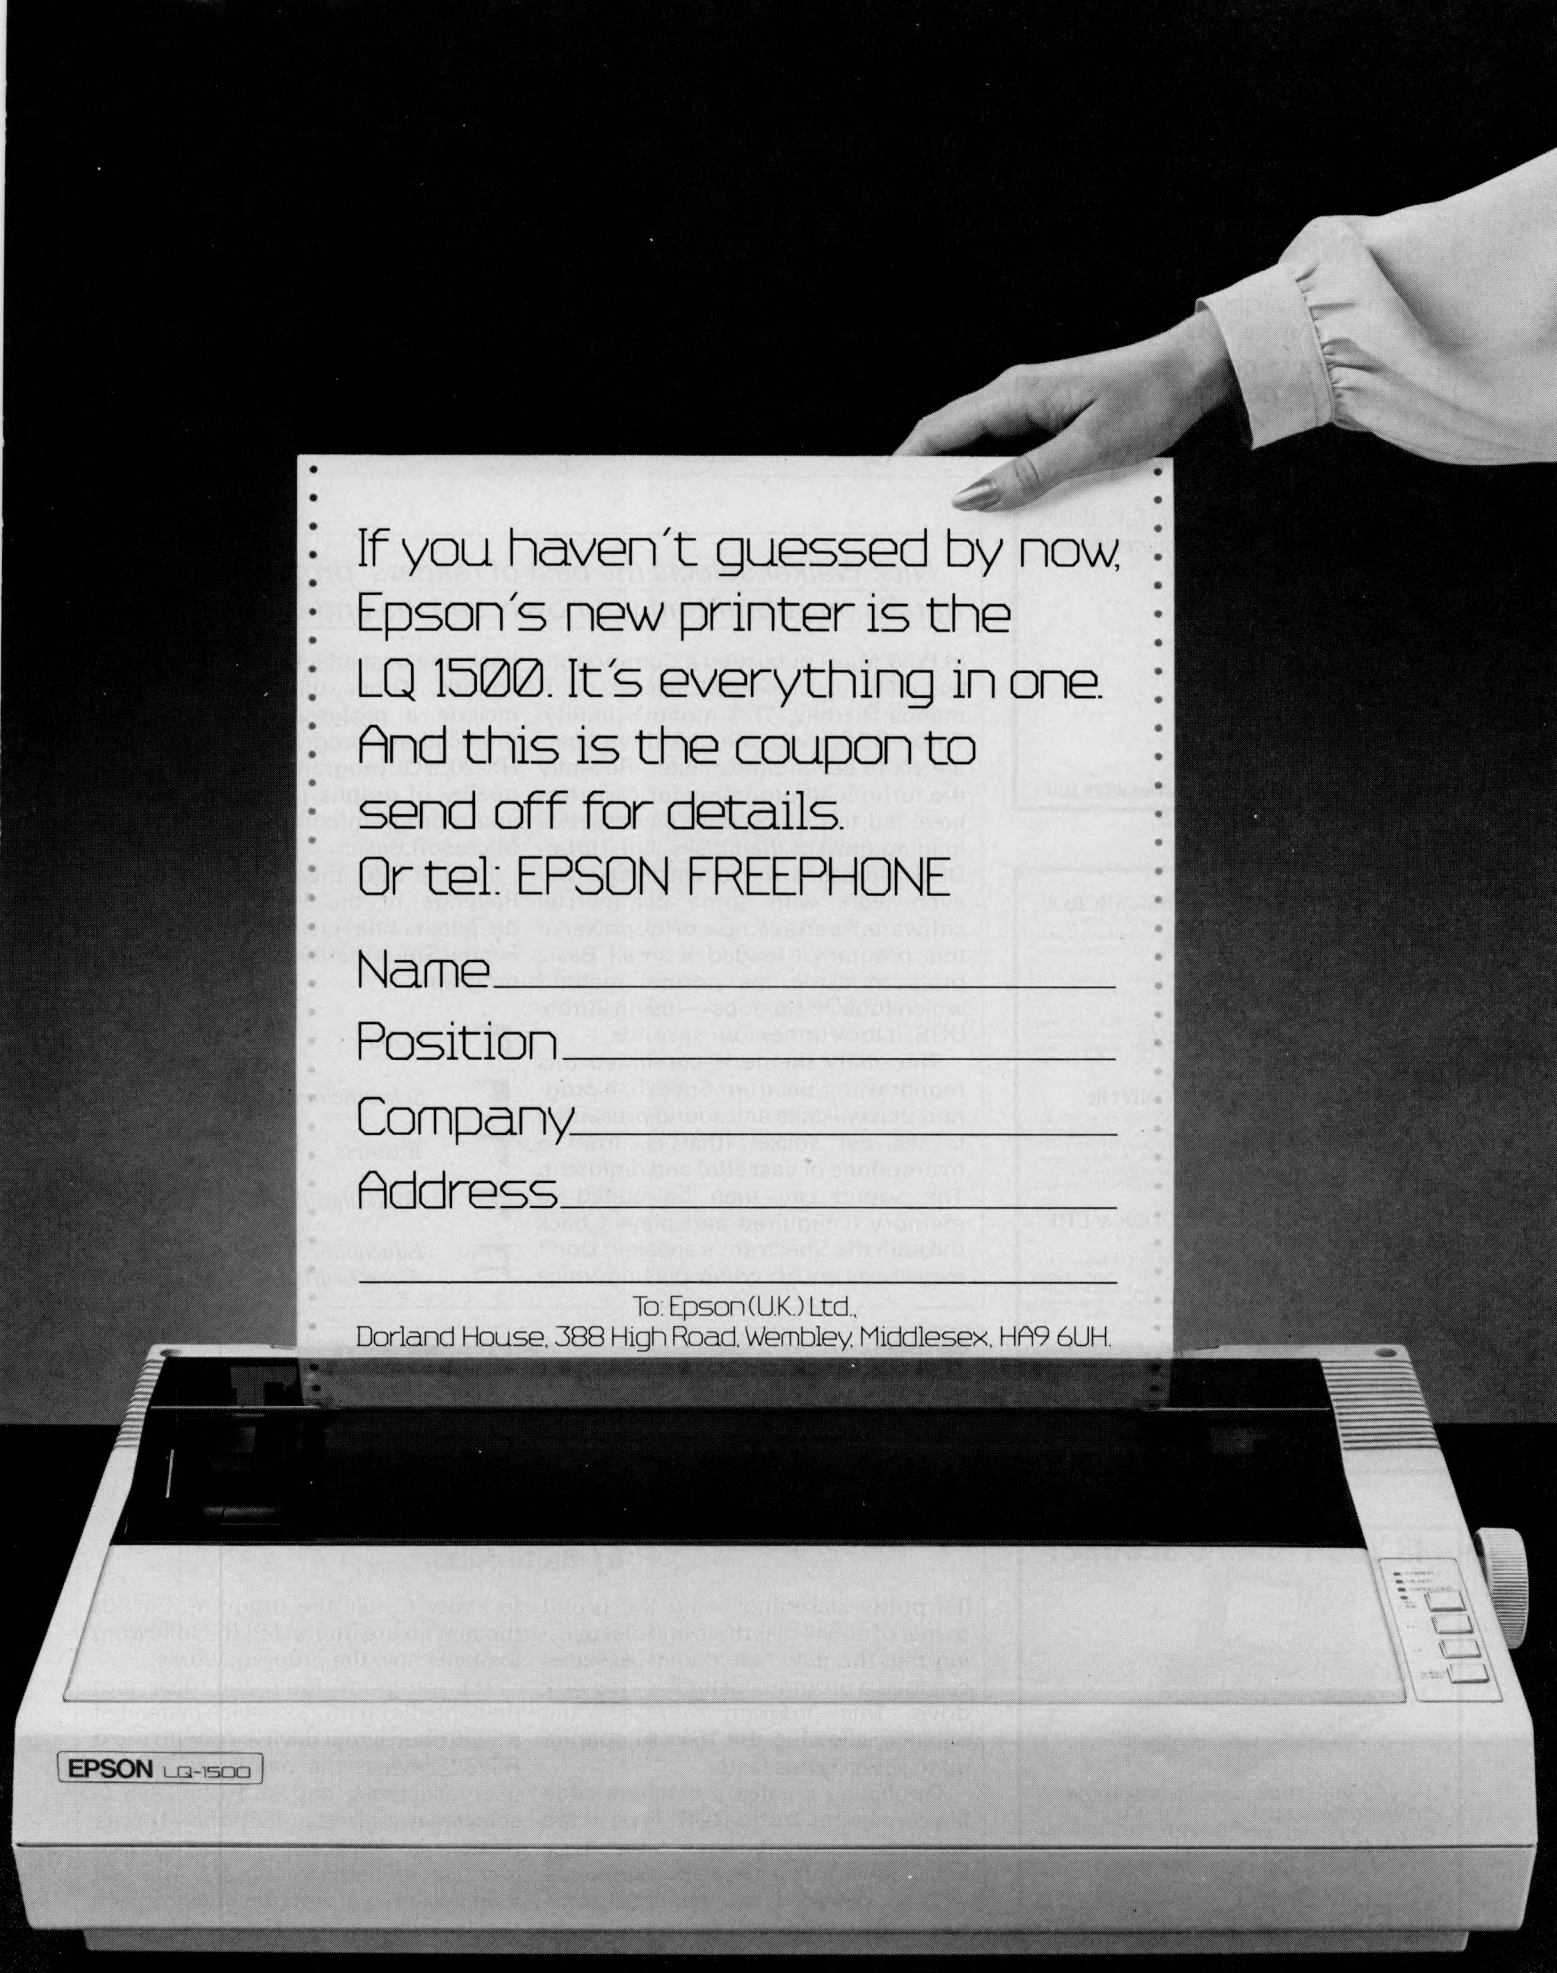


24 pin impact dot matrix, 200 cps, 67 cps NLQ mode, 101–406 mm paper width, up to 272 characters per line.
Options: single or double sheet feeder, tractor, parallel and serial 2K or 32K, IEEE 2K.

# EPSON

MICROMART

**SOFTWARE TRANSLATION**

English based company with international network is looking for

**Micro-computer Programmers**

with language expertise. Mother-tongue French, German, Italian or Spanish and fluent in English.

*Please apply in writing giving C.V. details including knowledge of programming languages to:*

**P.F. Racher**

**LinguaSoft**
CORPORATION
**Imperial House, 15-19 Kingsway London WC2B 6UU**

256 COLOURS FOR YOUR BBC MICRO!!

The **Colour Expander** replaces the eight boring colours on the BBC micro with a selection of eight from 256. Every colour you could ever want is there: silvery greys, shades of brown, pinks, golds, subtle aquamarines, warm oranges, etc, etc.

Applications are almost unlimited. The most spectacular computer art is possible, 3D graphics using true shading techniques, fabulous games, business graphics enhancement, education etc.

The **Colour Expander** is a unique device which will open up a whole new world of graphics. It is compatible with most RGB monitors and comes complete with a cassette of demonstration and utility programs. The **Colour Expander** costs only £85 + (VAT + P&P) = £99.75. Also available as a module for OEM & scientific use.

5-INCH PORTABLE MONITOR

The immensely popular **Hiltec TMC1R** portable monitor with 5" monochrome CRT is ideal for computing on the move, portable business computing, home and professional video or any application where a really compact, lightweight, low power monitor is needed. It measures just 180mm × 105mm × 230mm and will run off mains or from mains or from batteries in its integral battery compartment. The TMC1R costs just £92 "(VAT + P&P) = £108.60.

PROFESSIONAL PAL ENCODER & UHF MODULATOR

A high quality PAL encoder module superbly designed by **Hiltec**. This unit accepts digital RGB inputs, (9 data lines allow 512 colours) and produces a 75 ohm PAL colour output together with a modulated UHF colour output. Digital timing techniques and state of the art ICs guarantee long and reliable operation together with high signal quality. Only £70 + (VAT + P&P) = £82.5.

*Please send SAE for more information about any of these products.*

HILTEC ELECTRONICS LTD
7 Airlie Gardens, Campden Hill Road, London W8 7AJ
**Tel: 01-727 5956 or 07987-316**
Please allow 28 days for delivery. *Mail Order only*

**IS YOUR IBM PC SECURE?**




Are your PERSONAL computer files becoming COMMON knowlege?
Encode your files with "CRYPTO" — THE file encrypting program.
Mathematically secure even from larger computers. Out now only £29.

**CRYPTO** — Data Ciper.....**£29**
Also available:
**TEA** — Integrated design and word processor.....**£99**
**LDA** — Logic Design Aid.....**£49**

**Logitech**
**(01)-794 5441**
**310 Finchley Rd, Hampstead, LONDON NW3**

# PROGRAM FILE

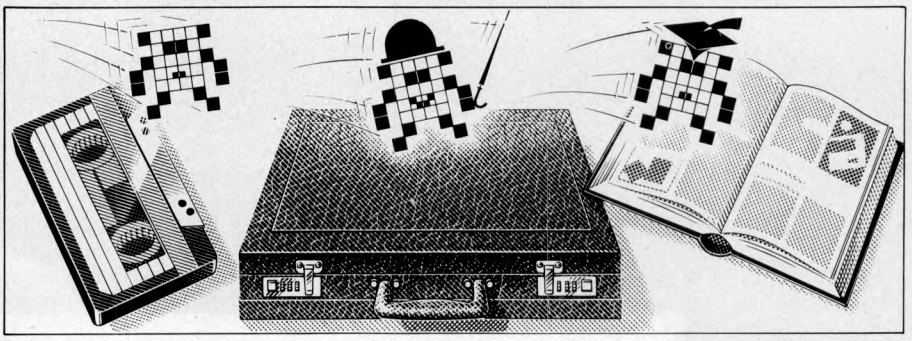

*Nick Walker selects the best of readers' programs — for details on submitting your own, see the end of this section.*

In *PCW* May I published a Commodore 64 utility to make disk access commands friendly. This month's utitlity, Turbo-DOS, make the disk drive operate six to seven times faster. Recently the turbo-load programs for cassettes have led to Commodore 64 cassettes loading quicker than disks, but Turbo-DOS redresses the balance and will even work with some commercial software. As an example of the power of this program I loaded a small Basic program using the normal method which took 26 seconds — using Turbo-DOS, it took under four seconds.

The utility theme is continued this month with Spectrum Speech, a program that will take any sound presented to the ear socket (that is, from a microphone or cassette) and digitise it. The sound can then be edited in memory if required and played back through the Spectrum's speaker. Don't expect too much when playing voice back: the best effects come from other sounds. Other utilities this month include a professional-quality communications program for the Epson HX-20, a QL program that enhances the quality of graphs printed from Easel, and a program compressor written in Microsoft Basic.

For the BBC, there is a game called Revenge of the Flying Bunnies — despite its title it is a very good game. For the Sirius there is a bank accounting program.

*Games*

*Scientific/mathematic*

*Business*

*Toolkit/utilities*

*Educational/Computer Aided Learning*

## Program of the Month
## Commodore 64
## Turbo-DOS
### by Kietil Nass

It's pretty sickening being the proud owner of a 1541 disk drive and discovering that the new fast loader cassettes can load a program faster than the disk drive. This program redresses the balance, allowing the 1541 to operate up to seven times faster.

The listing creates a machine code file containing Turbo-DOS. Type in the listing as shown and save it, then type RUN; any errors in the data statements will be detected by the checksums within the program. After correcting all errors, the program will generate the machine code program called TURBOLOAD 64 on disk. Whenever you want to use Turbo-DOS just insert the disk, type LOAD "TURBOLOAD 64", 8 and then RUN. All further disk access will be at the new high speed. That's all you need to know to use the program, but for those who are interested the following explains how the program works.

The program fools the disk into thinking it's an RS232 device instead of a 3600 baud serial device. As with most RS232 devices the baud rate is then user-selectable, and in Turbo-DOS is selected to operate at 15200 baud (it can be taken to 19600 baud, but at this rate load errors start to creep in). The fast load system will work on any program that uses the normal LOAD vectors, and unlike most toolkit programs this one uses no user memory. After initialisation the program puts itself under the kernel at $C000 to $D000. This leaves the normal 38911 Basic bytes free and a 4k block at $C000–$D000, giving plenty of room for any extras.

# PROGRAM FILE

```
TURBOLOAD 64 - THE FAST LOADING O.S

REQUIREMENTS: A COMMODORE 64 COMPUTER WITH A 1541 DISK DRIVE CONNECTED
PLEASE NOTE THAT ALL THAT 'REM'S CAN BE OMITTED WHEN TYPING IT IN.

10 REM[illegible]
20 DATA11,8,192,7,158,51,50,51,56,0,0,0,32,47,243,169,226,162,248,133,167,-219
30 DATA134,168,169,0,162,3,133,169,134,170,169,8,32,12,237,169,111,32,185,-149
40 DATA237,169,77,32,221,237,169,45,32,221,237,169,87,32,221,237,160,0,165,-188
50 DATA169,32,221,237,165,170,32,221,237,169,30,32,221,237,177,167,32,221,-210
60 DATA237,200,192,30,144,246,32,254,237,24,165,167,105,30,133,167,144,3,-206
70 DATA230,168,24,165,169,166,170,105,30,133,169,144,2,230,170,224,5,144,-144
80 DATA173,201,0,144,169,169,8,32,12,237,169,111,32,185,237,169,77,32,221,-74
90 DATA237,169,45,32,221,237,169,69,32,221,237,169,139,32,221,237,169,4,-80
100 DATA32,221,237,169,11,141,17,208,32,251,237,234,234,76,46,240,169,11,-6
110 DATA141,0,221,44,0,221,16,251,169,3,141,0,221,162,5,202,234,208,252,162,-93
120 DATA4,173,0,221,42,42,102,176,106,102,176,234,202,208,242,165,176,73,-140
130 DATA255,96,32,82,239,201,255,240,248,160,0,169,11,141,0,221,44,0,221,-55
140 DATA16,251,169,3,141,0,221,162,7,202,208,253,173,0,221,42,42,102,176,-85
150 DATA106,102,176,234,234,173,0,221,42,42,102,176,106,102,176,234,234,173,-73
160 DATA0,221,42,42,102,176,106,102,176,234,234,173,0,221,42,42,102,176,106,-249
170 DATA102,176,165,176,73,255,153,166,251,200,208,180,96,120,169,1,133,167,-231
180 DATA160,255,32,124,239,192,255,240,64,162,2,165,167,240,2,162,4,173,166,-244
190 DATA251,208,7,238,167,251,173,167,251,44,169,0,133,168,189,166,251,145,-162
200 DATA174,230,174,208,2,230,175,232,228,168,208,240,162,0,134,167,173,166,-255
210 DATA251,208,198,169,53,133,1,169,27,141,17,208,169,64,133,144,24,96,169,-70
220 DATA53,133,1,169,27,141,17,208,234,169,29,56,96,160,0,185,66,240,153,-89
230 DATA48,1,200,192,31,208,245,32,210,239,76,48,1,234,8,72,169,0,168,89,-223
240 DATA0,160,200,208,250,201,128,240,4,169,55,133,1,166,174,164,175,104,-228
250 DATA40,88,96,221,16,173,240,34,173,161,2,74,176,250,173,1,221,41,253,-129
260 DATA141,1,221,173,1,221,41,4,240,249,169,144,24,76,59,239,173,161,2,41,-76
270 DATA18,240,243,24,96,173,151,2,172,156,2,204,155,2,240,11,41,247,141,-14
280 DATA151,2,177,247,238,156,2,96,9,8,141,151,2,169,0,96,72,173,161,2,240,-245
290 DATA17,173,161,2,41,3,208,249,169,16,141,13,221,169,0,141,161,2,104,96,-39
300 DATA165,0,41,6,201,2,240,3,76,158,253,234,169,5,133,9,162,90,134,75,162,-14
310 DATA0,169,82,133,36,32,86,245,80,254,184,173,1,28,197,36,240,9,198,75,-210
320 DATA208,239,169,10,76,105,249,80,254,184,173,1,28,149,37,232,224,7,208,-73
330 DATA243,32,151,244,165,22,69,23,69,24,69,25,69,26,240,7,198,9,208,192,-37
340 DATA76,30,244,165,24,197,6,240,3,76,11,244,133,34,169,6,133,49,76,60,-184
350 DATA4,165,18,166,19,133,22,134,23,165,6,133,24,165,7,133,25,169,0,69,-44
360 DATA22,69,23,69,24,69,25,133,26,32,52,249,162,90,32,86,245,160,0,80,254,-110
370 DATA184,173,1,28,217,36,0,240,6,202,208,237,76,81,245,200,192,8,208,234,-216
380 DATA32,86,245,80,254,184,173,1,28,145,48,200,208,245,160,186,80,254,184,-233
390 DATA173,1,28,153,0,1,200,208,244,32,224,248,165,56,197,71,240,3,76,246,-6
400 DATA244,32,233,245,197,58,240,3,76,2,245,160,0,169,85,32,82,4,185,0,6,-250
410 DATA133,119,44,0,24,16,251,169,16,141,0,24,44,0,24,48,251,162,0,138,102,-170
420 DATA119,42,42,102,119,42,42,141,0,24,138,102,119,42,42,102,119,42,42,-141
430 DATA141,0,24,138,102,119,42,42,102,119,42,42,141,0,24,138,102,119,42,-199
440 DATA42,102,119,42,42,141,0,24,162,2,202,208,253,169,15,141,0,24,200,208,-48
450 DATA173,234,234,234,234,234,234,234,234,173,0,28,9,8,141,0,28,173,0,6,208,-25
460 DATA3,76,158,253,197,24,208,249,133,6,173,1,6,133,7,76,101,3,133,119,-11
470 DATA44,0,24,16,251,169,16,141,0,24,44,0,24,48,251,162,4,169,0,102,119,-72
480 DATA42,42,102,119,42,42,141,0,24,202,208,240,234,234,234,234,234,234,-48
490 DATA169,15,141,0,24,96,96,133,0,88,165,0,48,252,120,96,120,234,234,234,-217
500 DATA234,234,234,165,24,141,0,6,133,6,165,25,141,1,6,133,7,169,4,133,120,-33
510 DATA169,226,32,130,4,201,2,144,51,160,0,132,120,164,120,185,219,254,240,-249
520 DATA18,88,32,118,214,120,169,226,32,130,4,201,2,144,26,230,120,208,231,-9
530 DATA169,192,32,130,4,169,226,32,130,4,201,2,144,8,169,255,32,82,4,76,-13
540 DATA34,235,173,0,6,240,248,197,24,240,196,173,0,6,133,6,173,1,6,133,7,-183
550 DATA76,160,4,234,234,234,234,160,0,185,25,244,153,48,1,200,192,31,208,-63
560 DATA245,76,48,1,169,0,168,89,0,160,200,208,250,201,128,240,7,169,55,133,-243
570 DATA1,76,1,245,76,48,244,160,0,177,187,201,36,240,242,169,1,133,167,169,-13
580 DATA0,133,144,165,167,32,12,237,169,111,32,185,237,165,144,16,11,230,-142
590 DATA167,165,167,201,16,208,230,76,187,238,165,167,201,8,240,239,160,0,-19
600 DATA185,122,244,240,6,32,210,255,200,208,245,32,225,255,208,251,238,234,-62
610 DATA234,234,234,76,187,238,234,13,89,79,85,32,72,65,86,69,32,77,79,82,-249
620 DATA69,32,84,72,65,78,32,49,32,68,69,86,73,67,69,32,79,78,45,76,73,78,-126
625 DATA69,13,0,-82
630 DATA0,0,0,120,169,55,133,1,160,0,132,3,169,160,133,4,177,3,145,3,230,-5
640 DATA3,208,248,230,4,208,244,169,229,141,214,253,169,76,141,114,254,141,-230
650 DATA249,244,169,188,141,115,254,169,254,141,116,254,169,9,141,250,244,-35
660 DATA169,244,141,251,244,169,18,133,3,169,10,133,4,169,226,133,5,169,248,-78
670 DATA133,6,177,3,145,5,200,208,249,230,4,230,6,165,6,201,250,208,239,169,-18
680 DATA16,162,8,133,3,134,4,169,187,162,238,133,5,134,6,177,3,145,5,200,-232
690 DATA208,249,230,4,230,6,165,6,201,240,208,239,185,67,13,153,95,228,200,-111
700 DATA192,80,208,245,160,0,185,12,12,153,9,244,200,192,148,208,245,169,-102
710 DATA53,133,1,76,248,252,234,234,0,32,66,89,84,69,83,32,70,82,69,69,13,-197
720 DATA0,0,0,0,0,0,0,147,67,66,77,32,83,85,80,69,82,32,68,79,83,13,79,46,-164
730 DATA83,32,49,46,48,13,40,67,41,32,49,57,56,52,32,72,69,76,77,83,77,65,-192
740 DATA78,32,83,79,70,84,87,65,82,69,32,67,79,82,80,46,13,0,129,72,32,0,-81
750 DATA0,0,0,0,0,0,0,0,0,0,0,0,0,0,49,54,53,44,49,55,54,44,48,55,51,44,50,-138
760 DATA53,53,44,48,57,32,32,32,32,32,42,80,82,71,32,32,0,223,13,1,0,32,32,-31
770 DATA32,34,70,65,83,84,46,83,80,69,67,73,65,76,34,32,32,32,32,32,80,82,-3
780 DATA71,32,32,0,255,13,6,0,32,32,32,34,72,69,76,77,83,77,65,78,32,84,85,-57
790 DATA82,66,79,68,73,34,32,80,82,71,32,32,0,29,14,241,0,66,76,79,67,75,-98
800 DATA83,32,70,82,69,69,46,32,32,32,32,32,32,32,32,32,32,32,32,32,0,0,0,-99
810 DATA44,55,-99,-999
820 GOSUB960
830 GOSUB1270
840 GOSUB1160
850 REM[illegible]
860 RESTORE:OPEN1,8,3,"@:TURBOLOAD 64,P,W":PRINT#1,CHR$(1);CHR$(8);
870 PRINT"NOW GENERATING THE TURBOLOAD FILE"
880 READA:IFA<0GOTO900
890 PRINT#1,CHR$(A);:GOTO880
900 IFA<>-999GOTO880
910 PRINT#1:CLOSE1:SAVE"@:TURBO.GEN",8
920 GOSUB1420
930 REM[illegible]
940 LOAD"TURBOLOAD 64",8
950 REM[illegible]
960 PRINT"□        ***TURBOLOAD GENERATOR***"
970 ALLCHECK=0:FORLINE=0TO79
980 CHECK=0
990 READITEM:IFITEM<0GOTO1030
1000 CHECK=CHECK+ITEM:CODE=CODE+1
1010 ALLCHECK=ALLCHECK+SUM+CHECK
1020 GOTO990
1030 SUM=ABS(ITEM):IFSUM=999THENRETURN
1040 IFSUM<>(CHECK AND255)GOTO1090
1050 PRINT"[illegible]READING DATA FROM LINE";PEEK(63)+256*PEEK(64)
1060 NEXT LINE
```


MICROMART

Set your micro free!
WITH A HARDWARE
**Data Buffer**

**Don't wait** for printing to finish – no matter how fast your printer, your computer works faster.

**Release** that micro for more processing, seconds after giving the command to print out.

**Save time** by using a data buffer. And remember, computer time saved means operator time saved.



**Word-processing** and all print-orientated tasks can be speeded-up dramatically.

**Graphics and CAD** output – a data buffer is a must for these applications.




**Cost-effective** time saving. From £87.50 for 16K of buffer memory (for use with Epson printers). 64K buffer memory with optional serial or parallel input or output £199. Full-featured (copy, output hold, etc) 256K buffer memory, £423. Prices exclude VAT. Trade, quantity, and corporate terms – please call.

**A>Line Dataspeed Devices Ltd**
**3 Auburn Road,**
**Blaby,**
**Leicester LE8 3DR.**
**☎ (0533) 778724**

**SOFTWARE CENTRE**
**EINSTEIN SPECIALISTS**

Wordstar professional
Datastar
Reportstar
All three £375 exc VAT
Einstein from £350
Software for chemists, garages, newsagents, farmers etc

**52A Bromham Road**
**Bedford**
**Tel: (0234) 44733**

**3 Crosskeys, St. Neots**
**Cambridgeshire**
**Tel: (0480) 72013**

Save money on Einstein software and peripherals by joining our user club

# MICROMART

**Centronics or RS232 serial interfaces for**

**SHARP MZ 700**

**also**

**PRINTERS and MODEMS**

*Send for details:*

**PETERSON ELECTRONICS LTD**
**ACADEMY STREET, FORFAR, TAYSIDE DD8 2HA**
**TEL: 0307 62591**

**WDSoftware**
**For the QL**

**WD Utilities (3rd ed)** **(base £5.50)**
PRINT 60-file DIRectory or view it on one screen, one-key LOAD. COPY or PRINT 60 files with one key (allows for namesakes). Multiple FORMATting to prevent corruption by stretching of tape. TOOLkit to give dated, numbered modules in program development. PRUNE old files to release space (one key DELETEs a file). Full instructions in QUILL file. Use up to 6 EXTRA MICRODRIVES (add on your Spectrum ones)!

**WD Utilities for CST Disks** **(base £8)**
100-file capacity, for CST/Compumatamate disk system AND up to 4 extra microdrives. User-friendly timesavers.

**RefQL (3rd ed)** **(base £3)**
500 useful QL references in an ARCHIVE file.

**For Spectrum/QL/BBC**

**WD Morse Tutor** **(base £4)**
From absolute beginner to beyond RYA and Amateur Radio receiving. Adjust pitch. Set speed to your test level (4-18 wpm). Learn from single characters, via groups with wide spaces to random sentences; decrease spacing to normal. Write down what you hear, then CHECK on Screen or Printer (or speech for Spectrum fitted with Currah Microspeech). Also own message, random figures, letters or mixed.

**For Spectrum 48K**

**Tradewind** **(base £4)**
Sailing/trading strategy game with graphic surprises.

**Jersey Quest** **(base £4)**
Text adventure with Bergerac and the Dragon, (not disk).

*Prices: (incl Europe postage, elsewhere add £1). Spectrum/BBC cassettes, base price only. QL or Spectrum Microdrives, £2/cartridge plus base price. 5¼" floppies, £2 plus base (SPDOS format for Spectrum).*

Two or more programs on one medium — pay medium plus base EG. WD Utilities and RefQL for £10.50, but IMPOSSIBLE to mix QL/BBC/Spectrum programs on one medium. Send YOUR cartridge and base price, but FORMAT it FIRST in your DRIVE 1 for compatibility.

**WDSoftware, Hilltop, St Mary, Jersey.**
**Tel: (0534) 81392**

# BRAIN SURGEONS

Anita Electronic Services (London) Ltd. are specialists in the repair and service of the Superbrain and associated peripherals.

We offer a fast on-site nationwide service or alternative repairs can be carried out at our workshops should you wish to bring your machine in to us.

Maintenance contracts are available at very competitive prices.

We also specialise in the repair of Commodore, Apple, IBM Apricot, Osborne and Sirius.

Trade enquiries welcome

For further information telephone or write to:—

**Mr. D. Wilkinson**
**Anita House,**
**15 Clerkenwell Close,**
**London EC1R 0AD**
**Tel: 01-253 2444**


# PROGRAM FILE

```
1070 IF ALLCHECK<>1977780GOTO1140
1080 RETURN
1090 PRINT"??DATA ERROR IN LINE   ";PEEK(63)+256*PEEK(64)
1100 PRINT"GENERATED CHECKSUM     ";CHAND255
1110 PRINT"SHOULD HAVE BEEN       ";SUM
1120 ER$="L "+STR$(PEEK(63)+256*PEEK(64))+CHR$(13)+"RUN":FORI=1TOLEN(ER$)
1130 POKE630+I,ASC(MID$(ER$,I,1)):NEXT:POKE198,LEN(ER$):END
1140 PRINT"UNRECOVERABLE ERROR. CHECK YOUR DATA-    STATEMENTS CAREFULLY":END
1150 REM[illegible]
1160 OPEN8,8,0,"$0:!£$%&"
1170 FORI=1TO8:GET#8,X$:NEXT
1180 GET#8,X$:IFX$<>""GOTO1180
1190 GET#8,X$:GET#8,X$
1200 GET#8,X$:GET#8,Y$
1210 X=LEN(X$):IFXTHENX=ASC(X$)
1220 Y=LEN(Y$):IFYTHENY=ASC(Y$)
1230 L=X+Y*256:IFL>50THENPRINT"YOU HAVE"L" BLOCKS FREE ON THE DISK":RETURN
1240 PRINT"NOT SUFFICIENT SPACE ON YOUR DISK"
1250 INPUT"INSERT ANOTHER DISK AND HIT 'RETURN'";X$:GOTO830
1260 REM[illegible]
1270 OPEN15,8,15,"I"
1280 INPUT#15,EN:IFEN=0THENCLOSE15:RETURN
1290 IFEN<>21THENPRINT"YOU HAVE A FAULTY DISK INSERTED":GOTO1250
1300 PRINT"YOUR DISK IS NOT FORMATTED"
1310 PRINT"DO YOU WANT ME TO FORMAT IT (Y/N)":POKE198,0
1320 GETA$:IFA$="N"ORA$="Y"GOTO1340
1330 GOTO1320
1340 IFA$="N"GOTO1250
1350 INPUT"ENTER NEW DISK NAME";NAME$:IFLEN(NAME$)>16GOTO1350
1360 INPUT"ENTER NEW ID-CODE";ID$:IFLEN(ID$)>2GOTO1360
1370 PRINT#15,"NEW0:"+NAME$+","+ID$:CLOSE15
1380 FORI=1TO10:OPEN15,8,15,"I"
1390 INPUT#15,EN:IFEN<>0THENPRINT"YOU HAVE A FAULTY DISK":GOTO1250
1400 CLOSE15:NEXT:RETURN
1410 REM[illegible]
1420 PRINT"DO YOU WANT TO PROTECT THE TURBOLOAD     FILE  (Y/N) ?":POKE198,0
1430 GETA$:IFA$="N"ORA$="Y"GOTO1450
1440 GOTO1430
1450 IFA$="N"THENRETURN
1460 FORAD=828TO1006:READDA:POKEAD,DA:NEXT
1470 F$="TURBOLOAD 64"
1480 POKE679,1:FORI=1TOLEN(F$):POKE683+I,ASC(MID$(F$,I,1)):NEXT
1490 POKE700,0:OPEN15,8,15:OPEN2,8,2,"#":T=18:S=1
1500 PRINT#15,"U1";2;0;T;S:SYS828:A=PEEK(252):IFAGOTO1530
1510 T=PEEK(681):S=PEEK(682):IFTGOTO1500
1520 PRINT"THE FILE IS NOT ON THE DISK":PRINT"UNRECOVERABLE ERRORR. TRY AGAIN":E
ND
1530 IF(AAND64)THENPRINT"THE FILE IS ALREADY LOCKED.":STOP
1540 P=PEEK(255):PRINT#15,"U1";2;0;T;S:PRINT#15,"B-P";2;P:PRINT#2,CHR$(AOR64);
1550 PRINT#15,"B-P 2 0":PRINT#15,"U2";2;0;T;S
1560 PRINT"THE FILE IS NOW PROPERLY LOCKED":RETURN
1570 REM[illegible]
1580 REM[illegible]
1590 REM[illegible]
1600 DATA169,0,141,168,2,133,253,162,2,32,198,255,32
1610 DATA228,255,141,169,2,32,228,255,141,170,2,230,253
1620 DATA230,253,32,228,255,133,252,165,253,133,255,32,228
1630 DATA255,32,228,255,230,253,230,253,160,0,32,228,255
1640 DATA230,253,153,189,2,200,24,192,16,144,242,160,243
1650 DATA32,228,255,230,253,165,144,240,3,141,168,2,200
1660 DATA208,241,165,252,208,7,173,168,2,208,22,240,191
1670 DATA165,140,240,3,32,199,3,173,167,2,240,3,32
1680 DATA175,3,173,168,2,240,171,32,204,255,96,160,0
1690 DATA185,172,2,240,8,217,189,2,208,7,200,208,243
1700 DATA238,168,2,96,169,0,133,252
1710 DATA96,160,0,185,189,2,240,6,32,210,255,200,208
1720 DATA245,165,252,41,64,240,10,169,144,32,210,255,169,60,32,210,255,169
1730 DATA13,32,210,255,169,144,32,210,255,96

READY.
```

# Spectrum Speech
## by Philip Kirkpatrick

This program will take any outside sound (including speech) and record it into the Spectrum's memory. Once in memory, the sound can be speeded up and rearranged as required by the user.

To use this program, type in the first listing and save to cassette with the command SAVE "speech" LINE 3. Then type CLEAR 32767:NEW and type in the second listing with the command SAVE "sc" CODE 65279,100.

To run the program type CLEAR 32767:NEW:LOAD "" ; the program will automatically load the machine code. After loading you will be presented with a menu of eight different options:

1) Sample sound — this will allow you to record any sound entered via the ear port into the Spectrum memory.
2) Change parameters — allows you to lengthen, shorten or change the speed of the recording in memory.
3) Play sound.
4) Save sound — saves the sound in memory to tape.
5) Load sound — loads previously stored sound.
6) Name sound — adds a single letter label to sound.
7) Program sequence — allows you to create a sequence from previously defined labels.
8) Run sequence — executes the sequence created.

```
LIST
    1 REM *** PUBLIC SPEECH (C)1985 *
    2 REM *** BY P.KIRKPATRICK ******
    3 PRINT AT 10,9;BRIGHT 1;FLASH 1;"Code is Loading"
    5 LOAD ""CODE
    6 DIM F$(50):DIM E(50):DIM B(50):LET C=0
```

# PROGRAM FILE

```
  7 LET S$=""
  8 LET S=32768:LET F=65024:LET P=8
  9 CLS
 10 PRINT AT 0,10;"Public Speech"
 20 PRINT AT 0,10;OVER 1;"------------":REM 13 UNDERLINE CHARS
 30 PRINT AT 2,0;"OPTIONS-"
 40 PRINT AT 4,0;"1....Sample Sound"
 50 PRINT AT 6,0;"2....Change Parameter"
 60 PRINT AT 8,0;"3....Play Sound"
 70 PRINT AT 10,0;"4....Save Sound"
 80 PRINT AT 12,0;"5....Load Sound"
 85 PRINT AT 14,0;"6....Name Sound"
 87 PRINT AT 16,0;"7....Program Sequence"
 88 PRINT AT 18,0;"8....Run Sequence"
 90 LET A$=INKEY$
100 IF A$="1" THEN CLS:GOSUB 1000:CLS:GOTO 10
110 IF A$="2" THEN CLS:GOSUB 1500:CLS:GOTO 10
120 IF A$="3" THEN CLS:GOSUB 2000:CLS:GOTO 10
130 IF A$="4" THEN CLS:GOSUB 2500:CLS:GOTO 10
140 IF A$="5" THEN CLS:GOSUB 3000:CLS:GOTO 10
150 IF A$="6" THEN CLS:GOSUB 3500:CLS:GOTO 10
160 IF A$="7" THEN CLS:GOSUB 3600:CLS:GOTO 10
170 IF A$="8" THEN CLS:GOSUB 3650:CLS:GOTO 10
180 GOTO 90
1000 INPUT"Press ENTER to Sample ";LINE A$
1010 RANDOMIZE USR 65280
1020 RETURN
1500 PRINT AT 0,8;"Alterations Menu"
1510 PRINT AT 0,8;OVER 1;"----------------":REM 16 UNDERLINE CHARS
1520 PRINT AT 2,0;"OPTIONS-"
1530 PRINT AT 4,0;"1....Change Start Address"
1540 PRINT AT 6,0;"2....Change Last Address"
1550 PRINT AT 8,0;"3....Change Speed"
1560 LET A$=INKEY$
1570 IF A$="1" THEN CLS:GOSUB 1620:CLS:GOTO 1500
1580 IF A$="2" THEN CLS:GOSUB 1680:CLS:GOTO 1500
1590 IF A$="3" THEN CLS:GOSUB 1740:CLS:GOTO 1500
1600 IF A$=CHR$ 13 THEN RETURN
1610 GOTO 1560
1620 PRINT AT 0,0;"Current Start Address ";S
1630 INPUT"ENTER New Start Address ";S
1640 IF S>=F OR S<32768 THEN GOTO 1630
1650 LET H=INT (S/256):LET L=S-(H*256)
1660 POKE 65310,L:POKE 65311,H
1670 RETURN
1680 PRINT AT 0,0;"Current Last Address ";F
1690 INPUT"ENTER New Last Address ";F
1700 LET N=INT(F/256)
1710 IF N>254 OR N<128 THEN GOTO 1690
1720 POKE 65335,N
1730 RETURN
1740 PRINT AT 0,0;"Current Speed ";P
1750 INPUT"ENTER New Speed ";P
1760 IF P<1 OR P>15 THEN GOTO 1750
1770 POKE 65313,P
1780 RETURN
2000 INPUT"Press ENTER for Sound ";LINE A$
2010 RANDOMIZE USR 65308
2020 IF INKEY$=CHR$ 13 THEN RETURN
2030 GOTO 2010
2500 INPUT"ENTER Name of File ";LINE N$
2502 IF N$="" THEN GOTO 2500
2510 SAVE N$ CODE 32767,32512
2520 RETURN
3000 INPUT"ENTER Name of File ";LINE N$
3002 IF N$="" THEN GOTO 3000
3010 LOAD N$ CODE
3020 RETURN
3500 LET C=C+1:IF C>50 THEN PRINT AT10,[illegible]"Full":PAUSE 0:RETURN
3505 PRINT AT 10,8;"Press Letter Name"
3510 PAUSE 0:LET A$=INKEY$
3515 IF A$="/" THEN GOTO 3505
3520 PRINT AT 21,6;A$;"= Name of this Sound"
3530 LET F$(C)=A$:LET E(C)=F:LET B(C)=S
3540 RANDOMIZE USR 65308
3550 RETURN
3600 PRINT AT 0,0;"Program-";S$
3601 INPUT"Re-Program? ";LINE E$
3602 IF E$="" OR E$="n" THEN RETURN
3603 INPUT"ENTER Pause Length Reqd. ";M
3605 IF M<1 OR M>20 THEN GOTO 3600
3610 PRINT AT 10,0;"Program Sequence Now"
3615 LET S$=""
3620 INPUT LINE S$
3625 IF S$="" THEN GOTO 3620
3630 RETURN
3650 IF S$="" THEN RETURN
3655 FOR L=1 TO LEN S$
3660 IF S$(L)="/" THEN PAUSE M:NEXT L
3670 FOR K=1 TO LEN F$
3680 IF F$(K)=S$(L) THEN GOTO 3710
3690 NEXT K
3700 GOTO 3750
3710 POKE 65311,INT (B(K)/256)
3715 LET W=PEEK 65311
3720 POKE 65310,B(K)-(W*256)
3730 POKE 65335,INT (E(K)/256)
3740 RANDOMIZE USR 65308
3750 NEXT L
3760 LET F=PEEK 65335*256
3770 LET S=W*256+PEEK 65310
3780 RETURN

10 FOR a=65280 TO 65339
20 READ v:POKE a,v
30 NEXT a
40 DATA 243,33,0,128,6,8,219,254,203,119,32,2,203,254,203,62,16,244,203,
14,35,124,254,254,32,234,251,201,243,33,0,128,6,8,203,70,40,4,62,0,211,
254,62,255,211,254,203,6,16,240,203,6,35,124,254,254,32,230,251,201
```


# MICROMART

## BEST UK SOFTWARE PRICES

Buy from TriSoft Ltd., the specialist software company formed by microcomputer consultants.
★ Over 400 leading software packages (inc. Apple)
★ Independent advice in making your choice
★ Professional staff + network of consultants
★ Most formats. All programs latest versions

## SAGE ACCOUNTS £259
## SAGE PLUS £495

| | List Price | Our Price | | List Price | Our Price |
|---|---|---|---|---|---|
| Lotus 1-2-3 | 430 | **299** | Multimate 3.3 | 399 | **265** |
| WordStar 2000 | 465 | **299** | DMS Delta 4 | 495 | **375** |
| dBase III - 1.1 | 550 | **325** | Knowledgeman | 450 | **359** |
| Framework - 1.1 | 550 | **325** | Superproject | 395 | **299** |
| Open Access | 550 | **325** | DR C Compiler | 295 | **225** |
| Supercalc II | 195 | **145** | MS Pascal | 295 | **235** |
| Supercalc III | 295 | **199** | Ascom | 170 | **149** |
| Multiplan | 190 | **145** | Level II Cobol | 965 | **720** |

★★★★★★★★★★★★★★★★★★★★

NEW VERSION

## D BASE II £239

★★★★★★★★★★★★★★★★★★★★

**INTERESTED IN ACCOUNTANCY SOFTWARE?**

Having reviewed many of the accounting s/w packages currently available, we are now able to offer first class advice on the best accounting s/w for your business. One of the accounting systems which we supply and support is

**PEGASUS**

We have Midlands and London based staff who are fully trained in the application and use of Pegasus software.

## WORDSTAR PROFESSIONAL
## £399 £265

All prices exclude VAT and carriage.
If you see any of these products genuinely advertised at a lower price we will improve upon that offer in most cases. Please phone or write for our comprehensive price list.

**DEALER, CONSULTANT, GOVERNMENT AND OVERSEAS ENQUIRIES WELCOME**

**TRISOFT LTD**

Crown Square, Matlock,
Derbyshire DE4 3AT
Tel: 0629-3021 (6 lines)

## DAISYWRITER 2000

***The Printer that thinks it's a Computer***

Full IBM compatibility with the highest letter quality to meet today's professional and business applications.

**DAISYWRITER** comes complete with a unique universal interface providing compatibility for a wide range of micros and PCs. It allows you to emulate the protocols of almost every letter quality printer on the market today.

A 48K byte buffer memory is standard, so you can easily dump a 25 page A4 document to the printer and immediately commence drafting another. A reprint buffer facility allows, at the touch of a button, quality copies.

Diagnostic software — the control codes may be printed with text for easy fault finding and programming. Graphics mode for plotting of graphs and charts.

**DAISYWRITER 2000** gives full compatibility with: IBM Displaywriter, Wordcraft, Wordstar, and many more WP 100 wordprocessing commands, 20 different printwheels in 16 languages.

Bring out the best in your PC with a professional quality printer offering reliability and throughput.

| | |
|---|---|
| **DAISYWRITER 2000** | **£1,095** |
| **SHEETFEEDER** | **£295** |

*Send for full specification and sample print quality to:*

**PREMIER SYSTEMS INTERNATIONAL**
(Printer Specialists)
**Heatherside House, Camden Road, Maidenhead SL6 6HA**
**Tel: (0628) 34302**

# MICROMART

**BLANK CASSETTES**
Guaranteed top quality computer/audio cassettes at great budget prices.
***Packed in boxes of 10 with labels, inlay cards and library case.***
Prices include VAT, post and packing.
☐ (C5) £3.35 ☐ (C30) £4.70
☐ (C10) £3.40 ☐ (C60) £5.30
☐ (C12) £3.45 ☐ (C90) £7.00
☐ (C15) £3.75

***BASF FLOPPY DISKS***
Prices of boxes of 10
☐ 5¼ Single side/Double density £19.95
☐ 5¼ Double side/Double density £21.85
☐ 5¼ Double side/Quad density £28.75

***MICRO FLEXI DISKS***
Price per unit
☐ 3½ Single side £4.00 each
☐ 3½ Double side £4.75 each
Indicate quantity of each product required in boxes.
Free delivery UK only.
Cheque/PO Enclosed for £_____
NAME.....
ADDRESS .....
.....

PROFESSIONAL MAGNETICS LTD
Cassette House, 329 Hunslet Road, Leeds LS10 3YY
FREEPOST Tel: (0532) 706066 PCW/7/85

**COMMODORE 2001-3000 4000-8000**

We have the world's largest selection of software for the PET/CBM range. We supply to schools, universities, large and small companies, government departments, and of course home users.
We also manufacture add-on boards and plug-in chips that can make your computer more powerful — the most popular add-ons are our high resolution graphics boards which give your PET better resolution than an Apple!
IF YOU OWN OR USE A PET/CBM COMPUTER WRITE OR PHONE FOR A FREE CATALOGUE. By the way, we also offer software for the Commodore 64.

**SUPERSOFT**
Winchester House, Canning Road, Wealdstone, Harrow, Middlesex, HA3 7SJ
Telephone: 01-861 1166

**TYPESET DIRECT FROM DISK**

**Anvil** direct typesetting from micro disks puts you firmly in control of your photo-typesetting.
Mark up your text using your usual wordprocessor commands (as long as you are using WordStar, Wordwise or another similar CP/M, MS-DOS or PC-DOS wordprocessing program).

**TypeFit** software copyfits (casts off) your text files on your micro in exactly the same way as a photo-typesetter.
Create copyfitted wordprocessor files which can be typeset line-for-line and character-for-character.

*Write or telephone now for details of low-cost TypeFit demo software and FREE Anvil typesetting offer.*

**Wordsmiths**
33 Clerkenwell Close • London EC1
☎ (01) 608 1868
19 West End • Street • Somerset
☎ (0458) 45359




# Epson HX-20 HX-Modem

## by Wico Ypma

HX-Modem is a communications program for the Epson HX-20, allowing you to use the HX-20 as a smart terminal. For transfer of files it employs the Ward Christensen (or XModem) protocol. This protocol is very popular among CP/M systems, so you can not only transfer files from HX-20 to HX-20 but also to CP/M machines (including the Epson PX-8 and QX-10).

When you run the program the terminal machine code section will load into memory as a file called HX-Modem, and some Basic will be left called SetModem. Select HX-Modem from the menu to enter terminal mode or SetModem to configure communication conditions.

**HX-Modem**

In this mode the PF-keys have the following functions:

PF-1 — local Echo ON/OFF
PF-2 — automatic LF after CR during transmission ON/OFF
PF-3 — filter during transmission ON/OFF
PF-4 — send the file in the RAM file area
PF-5 — return to MENU
PF-6 — disable left/right scrolling ON/OFF
PF-7 — automatic LF after CR during receive ON/OFF
PF 8 — filter during receive ON/OFF
PF-9 — receive a file in the RAM file area
PF-0 — return to MENU

The filter function filters out non-ASCII symbols and control codes, and converts the delete (ASCII B) into the more general (ASCII 127) code.

**SetModem**

The SetModem section of the program has three options:

1) Allows you to change the RS232 handshaking conditions and the amount of memory reserved for the screen file and file buffer.
2) Handles saving and loading of text to tape in text or ASCII-Basic format.
3) Loads a text or ASCII-Basic file from tape and stores it in the file buffer ready for transmission.

```
∓
×
100 'HX-Modem V3.1  1985 BY J.W.Ypma"
110 CLS:PRINT"  HANG ON A SECOND"
120 MEMSET &HEA8+81*24
130 FOR I=&HA40 TO &HEA6:READ A:POKE I,A:NEXT
140 TITLE "SetModem"
150 EXEC&HA40:A$="DELETE 1-999"+CHR$(13)+"EXEC&HDFFD"+CHR$(13)
160 A=VARPTR(A$):POKE&H916,&HFE:POKE&H917,PEEK(A+1):POKE&H918,PEEK(A+2)
170 END
180 DATA 206,1,60,60,238,2,140,255,255,39,5,24,56,24,32,243,56,204,186,65,237,0
190 DATA 204,10,92,237,2,57,186,65,255,255,10,116,72,88,45,77,111,100,101,109
200 DATA 32,32,86,51,46,49,32,87,89,0,206,14,77,198,7,166,0,167,7,8,90,38,248
210 DATA 206,14,84,189,255,94,206,14,86,189,255,94,134,255,183,14,55,183,14,57
220 DATA 183,14,59,183,14,58,79,183,14,56,204,253,40,189,255,136,134,1,189,255
230 DATA 133,254,255,220,204,1,4,189,255,130,189,255,157,37,93,39,94,189,255
240 DATA 154,129,254,38,19,192,241,37,83,193,10,36,79,88,206,11,114,58,238,0
250 DATA 173,0,32,68,246,14,57,39,34,129,13,39,30,129,32,44,26,129,8,39,7,54
260 DATA 189,255,79,50,32,44,246,14,55,39,3,189,255,79,134,127,189,255,118,32
270 DATA 29,189,255,118,246,14,55,39,5,54,189,255,79,50,129,13,38,12,246,14,56
280 DATA 39,7,134,10,32,230,126,14,43,254,255,216,236,0,39,148,189,255,121,246
290 DATA 14,59,39,34,129,127,46,136,45,4,134,8,32,24,129,127,39,57,44,52,129,32
300 DATA 44,14,129,7,39,31,45,42,129,13,46,38,129,11,39,29,54,189,255,79,50,246
310 DATA 14,58,38,3,126,10,179,129,13,38,17,134,10,32,235,204,10,2,189,255,100
320 DATA 32,5,134,10,189,255,79,126,10,179,134,8,32,215,11,141,11,152,11,163,13
330 DATA 87,14,43,11,174,11,195,11,206,11,217,14,43,76,198,1,189,255,100,57,182
340 DATA 14,55,67,183,14,55,132,15,32,238,182,14,56,67,183,14,56,132,15,32,227
350 DATA 182,14,57,67,183,14,57,132,15,32,216,182,2,128,133,1,39,7,122,2,128
360 DATA 134,0,32,202,124,2,128,134,15,32,195,182,14,58,67,183,14,58,132,15,32
370 DATA 184,182,14,59,67,183,14,59,132,15,32,173,198,0,189,255,73,198,19,206
380 DATA 14,91,189,255,73,198,10,206,14,111,189,255,73,198,10,206,14,122,189
390 DATA 255,73,79,183,14,73,183,14,71,183,14,70,189,13,67,189,13,47,252,1,44
400 DATA 253,14,64,179,4,254,253,14,62,134,21,189,255,118,204,160,0,253,14,68
410 DATA 189,13,12,182,14,75,39,3,126,12,181,182,14,74,129,1,38,122,189,12,254
420 DATA 182,14,74,183,14,71,189,12,254,182,14,74,187,14,71,76,38,113,182,14,71
430 DATA 176,14,70,38,3,126,12,231,74,38,99,79,183,14,72,198,128,247,14,76,254
440 DATA 14,62,255,14,60,189,12,254,182,14,74,254,14,60,167,0,8,188,14,64,44,67
450 DATA 255,14,60,187,14,72,183,14,72,122,14,76,38,225,141,124,182,14,74,177
460 DATA 14,72,38,43,182,14,70,76,183,14,70,189,13,47,79,183,14,73,189,13,67
470 DATA 254,14,60,255,14,62,134,6,189,255,118,126,12,23,129,4,38,8,134,6,189
480 DATA 255,118,126,12,197,182,14,73,76,183,14,73,54,189,13,67,50,129,10,45,12
490 DATA 198,0,189,255,73,204,10,2,189,255,100,57,141,3,126,12,18,189,12,241
500 DATA 204,5,0,253,14,68,141,29,182,14,75,39,240,57,141,237,134,6,189,255,118
510 DATA 126,12,23,254,255,216,236,0,39,5,189,255,121,32,244,57,204,16,0,253,14
520 DATA 68,189,255,157,36,3,126,255,37,127,14,75,254,255,216,236,0,38,18,198
530 DATA 25,90,46,253,254,14,68,9,255,14,68,38,235,115,14,75,57,189,255,121,183
540 DATA 14,74,57,182,14,70,22,79,206,14,135,189,255,40,214,6,206,14,133,189
550 DATA 255,73,57,182,14,73,22,79,206,14,142,189,255,40,198,6,206,14,140,189
560 DATA 255,73,57,198,0,189,255,73,198,19,206,14,147,189,255,73,198,10,206,14
570 DATA 111,189,255,73,198,10,206,14,122,189,255,73,127,14,73,189,13,67,252,1
580 DATA 44,179,4,254,253,14,62,206,14,66,227,0,253,14,64,134,1,183,14,70,189
590 DATA 13,47,254,14,62,134,1,189,255,118,182,14,70,189,255,118,67,189,255,118
600 DATA 198,128,247,14,76,79,183,14,72,166,0,189,255,118,187,14,72,183,14,72,8
610 DATA 122,14,76,38,239,182,14,72,189,255,118,60,204,160,0,253,14,68,189,13
620 DATA 12,182,14,74,129,6,39,22,56,189,12,214,124,14,73,182,14,73,54,189,13
630 DATA 67,50,129,10,45,170,126,12,197,56,255,14,62,124,14,70,188,14,64,44,14
640 DATA 182,14,70,189,13,47,127,14,73,189,13,67,32,141,134,4,189,255,118,189
650 DATA 12,254,182,14,74,129,6,38,3,126,12,197,124,14,73,189,13,67,189,12,214
660 DATA 182,14,73,129,10,45,222,126,12,197,189,255,127,79,189,255,133,56,126
670 DATA 255,37,57,255,0,255,0,255,78,128,67,0,66,240,2,240,14,214,7,29,70,0,6
680 DATA 0,0,132,34,135,79,23,14,167,132,34,135,0,23,14,167,0,0,32,32,72,88,45
690 DATA 77,111,100,101,109,32,82,101,99,101,105,118,101,0,1,32,32,83,69,67,84
700 DATA 79,82,58,0,2,32,32,69,82,82,79,82,83,58,9,1,48,48,48,48,48,48,9,2,48,48
710 DATA 48,48,48,0,0,32,32,72,88,45,77,111,100,101,109,32,83,101,110,100,32,32
```

# PROGRAM FILE

```
720 DATA 32
1000 'SetModem FOR HX-Modem V-3.1:29/04/85:BY J.W.YPMA
1010 WIDTH 21,20,1:POKE&H27C,0:ON ERROR GOTO 1540
1020 CLS:PRINT"*  Set-Modem V3.1  *"
1030 PRINT"1 SET CONDITIONS":PRINT"2 SAVE/LOAD FILE":PRINT"3 MENU";
1040 A=VAL(INPUT$(1)):ON A GOTO 1060,2000,1050:GOTO 1040
1050 EXEC&HDFFD
1060 CLS:F=PEEK(&H4FE)*256+PEEK(&H4FF)
1070 PRINT"AVAILABLE MEMORY FOR":PRINTUSING"FILES : ##### Bytes";F
1080 PRINT:PRINT"1:O.K.    2:CHANGE";
1090 K$=INPUT$(1):IF K$="1" THEN 1110
1100 CLS:PRINT"REQUIRED MEMORY FOR":INPUT"FILES :",F:CLEAR 200,F:GOTO1060
1110 CLS:PRINT"AVAILABLE MEMORY FOR"
1120 M=PEEK(&H136)*256+PEEK(&H137)-&HEA5
1130 COL=PEEK(&HE50)+1:LIN=PEEK(&HE51)+1
1140 PRINTUSING"SCREEN:  ### COLUMNS";COL:PRINTUSING"          ### LINES";LIN
1150 PRINT"1:O.K.    2:CHANGE";
1160 K$=INPUT$(1):IF K$="1" THEN 1210 ELSE IF K$<>"2" THEN PRINTK$:GOTO 1160
1170 CLS:PRINT"INPUT NUMBER OF":INPUT"COLUMNS   :",COL:INPUT"LINES     :",LIN
1180 POKE &HE50,(COL-1):POKE&HE51,(LIN-1)
1190 M=&HEA6+LIN*(COL+1):MEMSET M
1200 GOTO 1110
1210 CLS:PRINT"*  Set-Modem V31  *"
1220 A=PEEK(&HAA0):B=PEEK(&HAA1)
1230 PRINT"WORDLENGTH:   ";B AND &H0F;"BIT"
1240 PRINTUSING"BIT RATE  : #### BPS";2^((B AND &HF0)/16-1)*150
1250 PRINT"STOP BITS :   ";A AND &H03;"BIT"
1260 CD=A AND 4:PRINT"CD         : ";:IF CD THEN PRINT"NO CHECK" ELSE PRINT"   CHECK"
1270 RTS=A AND 8:PRINT"RTS       :      ";:IF RTS THEN PRINT" ON" ELSE PRINT"OFF"
1280 CTS=A AND 32:PRINT"CTS      : ";:IF CTS THEN PRINT"NO CHECK" ELSE PRINT"   CHECK"
1290 DSR=A AND 16:PRINT"DSR      : ";:IF DSR THEN PRINT"NO CHECK" ELSE PRINT"   CHECK"
1300 PAR=(A AND &HC0)/64:PRINT"PARITY    : ";
1310 IF PAR=0 THEN PRINT"   EVEN" ELSE IF PAR=1 THEN PRINT"    ODD" ELSE PRINT"NO CHECK"
1320 PRINT:PRINT"1:O.K.    2:CHANGE";
1330 K$=INPUT$(1):IF K$="1" THEN 1000
1340 IF K$<>"2" THEN PRINTK$;:GOTO 1330
1350 CLS:PRINT"WORDLENGTH":PRINT"1: 7 BIT":PRINT"2: 8 BIT"
1360 W$=INPUT$(1):IF W$="1" THEN WL=7 ELSE IF W$="2" THEN WL=8 ELSE 1350
1370 CLS:PRINT"BIT RATE":PRINT"1:  300   4: 2400":PRINT"2:  600   5: 4800":PRINT"3: 1200";
1380 BR=VAL(INPUT$(1)):IF BR<1 OR BR>5 THEN 1370 ELSE BR=BR+1
1390 POKE &HAA1,(BR*16+WL)
1400 CLS:PRINT"STOP BITS":PRINT"1: 1 BIT":PRINT"2: 2 BIT"
1410 S$=INPUT$(1):IF S$="1" THEN SB=1 ELSE IF S$="2" THEN SB=2 ELSE 1400
1420 CLS:PRINT"CARRIER DETECT":PRINT"1: CHECK":PRINT"2: NO CHECK"
1430 T$=INPUT$(1):IF T$="1" THEN CD=0 ELSE IF T$="2" THEN CD=1 ELSE 1420
1440 CLS:PRINT"REQUEST TO SEND":PRINT"1: ON":PRINT"2: OFF"
1450 R$=INPUT$(1):IF R$="1" THEN RTS=1 ELSE IF R$="2" THEN RST=0 ELSE 1440
1460 CLS:PRINT"CLEAR TO SEND":PRINT"1: CHECK":PRINT"2: NO CHECK"
1470 C$=INPUT$(1):IF C$="1" THEN CTS=0 ELSE IF C$="2" THEN CTS=1 ELSE 1480
1480 CLS:PRINT"DATA SET READY":PRINT"1: CHECK":PRINT"2: NO CHECK"
1490 D$=INPUT$(1):IF D$="1" THEN DSR=0 ELSE IF D$="2" THEN DSR=1 ELSE 1460
1500 CLS:PRINT"PARITY CHECK":PRINT"1: EVEN":PRINT"2:  ODD":PRINT"3: NONE";
1510 P$=INPUT$(1):IF P$="1" THEN P=0 ELSE IF P$="2" THEN P=1 ELSE P=2
1520 POKE&HAA0,(SB+4*CD+8*RTS+16*DSR+32*CTS+64*P)
1530 GOTO1210
1540 CLS:IF ERR=7 OR ERR=9 THEN PRINT"  MEMORY OVERFLOW" ELSE PRINT"  UNDEFINED ERROR"
1550 PRINT:PRINT"       ENTER CR";:A$=INPUT$(1):RUN
2000 CLS:PRINT"*  Set-Modem V3.1  *":PRINT"1 SAVE SCREEN":PRINT"2 SAVE FILE":PRINT"3 LOAD FILE";
2010 A=VAL(INPUT$(1)):ON A GOTO 2020,2100,2190:GOTO2010
2020 CLS:PRINT"**  SAVE SCREEN  **"
2030 GOSUB2270:OPEN"O",#1,"CAS0:"+A$+".ASC"
2040 COL=PEEK(&HE50):LIN=PEEK(&HE51):D=&HEA7
2050 FOR I=0 TO LIN:A$=""
2060  FOR J=0 TO COL
2070  A$=A$+CHR$(PEEK(D+J+I*(COL+1)))
2080  NEXT J:PRINT#1,A$
2090 NEXT I:CLOSE#1:GOTO1000
2100 CLS:PRINT" **  SAVE FILE  **":GOSUB 2270
2110 OPEN"O",#1,"CAS0:"+A$+".ASC":M=PEEK(&H12C)*256+PEEK(&H12D)
2120 M=M-PEEK(&H4FE)*256-PEEK(&H4FF):L=PEEK(&HE3C)*256+PEEK(&H230)-M
2130 POKE&HE42,(L\256):POKE&HE43,(L MOD256)
2140 L=PEEK(&HE42)*256+PEEK(&HE43):DEFFIL 1,0:I=0:B$=CHR$(13)+CHR$(10):A$=""
2150 GET% I,I$:A$=A$+I$:I=I+1:IF I>L THEN 2180
2160 IF RIGHT$(A$,1)<>CHR$(13) THEN 2150 ELSE PRINT#1,LEFT$(A$,LEN(A$)-1):A$=""
2170 GET% I+1,I$:IF I$=CHR$(10) THEN I=I+1:GOTO2150 ELSE GOTO 2150
2180 PRINT#1,A$:CLOSE#1:GOTO1000
2190 CLS:PRINT"**  LOAD FILE  **":GOSUB 2270
2200 OPEN"I",#1,"CAS0:"+A$+".*":DEFFIL 1,0:L=0:CLS:PRINT"  LOADING "A$
2210 IF EOF(1) THEN 2250
2220 INPUT#1,B$:FOR I=1 TO LEN(B$)
2230 PUT% L,MID$(B$,I,1):L=L+1:NEXT
2240 PUT% L,CHR$(13):PUT% L+1,CHR$(10):L=L+2:GOTO 2210
2250 POKE &HE42,(L\256):POKE&HE43,(L MOD256):FOR I=L TO L+127:PUT% I,CHR$(0):NEXT
2260 CLOSE#1:GOTO1000
2270 INPUT"FILE NAME:",A$:A$=LEFT$(A$,8)
2280 PRINT"TAPE-COUNT:"TAPCNT"
2290 PRINT"IN POSITION? (Y/N)";
2300 B$=INPUT$(1):IF B$<>"Y" AND B$<>"y" THEN 2280
2310 RETURN
```

# Microsoft Basic Compressor

## by Bjorn Taale Sandberg

One of the sad consequences of Basic being an interpreted language is the amount of memory the source code consumes. This often makes it necessary to go through the program, removing comments and compressing statements from a well-tested bit to make room for more. This compressor program takes a Basic program stored on disk as an ASCII file, removes all comments, and appends lines to the end of preceding lines wherever possible. The resulting program is considerably shorter and usually faster.

Lines referred to in any GOTO, GOSUB, RESUME, RESTORE, THEN or DELETE statements are not touched. Whenever a line consisting entirely of a comment cannot be removed because it is the destination for a jump, the comment is removed and replaced by 'JTR (jump to remark).


MICROMART

**SAGE SUPERDEALS**

| | List Price | Our Price |
|---|---|---|
| Sage Accounts | 375 | 259 |
| Sage Plus | 695 | 495 |
| Sage Payroll | 195 | 145 |
| Accts/Payroll | 495 | 359 |
| Plus/Payroll | 795 | 575 |
| A/cs to + Upgrade | 375 | 259 |
| Chit-Chat | 130 | 110 |
| C/C with Modem | 395 | 299 |
| Options | 145 | 115 |
| Retrieve II | 495 | 295 |

*If you require advice please call*

All the above prices include full support from our technical department. We are authorised Sage Superdealers.

**DEALER ENQUIRIES A MUST**

**TRISOFT LTD**

**CROWN SQUARE, MATLOCK, DERBYSHIRE DE4 3AT**
**Tel: 0629-3021 (6 lines)**

**THE CRACKER**

The spreadsheet designed for normal people who make mistakes. Instant error detection and easy correction. Yes, this is a special feature. It means that what you do is right, first time, most times. For Businessmen, Engineers, Scientists and most simpletons.
£100+£2pp+VAT, CP/M-Z80, CP/M-86, MP/M-86, CCP/M-86, MSDOS, PCDOS

**DISASSEMBLERS, Z80, 8086**

Powerful practical file based disassemblers. Produces error mesages, full listings and cross-reference tables. The 16-bit version suitable for whole 8086 family and 8087. This version can handle. .CMD, .COM and .EXE files also ROMS.
£80+VAT, CP/M-Z80, CP/M-86, MP/M-86, CCP/M-86, MSDOS, PCDOS

**TRANSLATOR Z80 TO 8086**

This is a single pass translator designed to allow you to get your Z80 source code into an 8086 form easily. It has no real size limit and works fast. Data areas handled intelligently. Output for popular assemblers. An easy way to learn 8086 assembly language.
£80+VAT CP/M-Z80, CP/M-86, MP/M-86, CCP/M-86, MSDOS, PCDOS

**Software Technology Ltd**
PO BOX 724, BIRMINGHAM B15 3HQ
TEL: 021-454 3330
TELEX: 337675 TELPES G

Synchronicity LTD
15 FULLERTON ROAD LONDON SW18 1BU

DATABASE PROGRAMMING

**d Base II/d Base III Informix & C Sensible Solution**

Regd Trademarks Ashton Tate. RDS Inc. O'Hanlon Systems

FULL ACCOUNTS, STOCK OR TIME – MAILING – BROKING – MATCH & RETRIEVE – ETC

01 874 1898

· SUPPORT · ANALYSIS · PROGRAMMING

· ANALYSIS · PROGRAMMING · TRAINING

· APPLICATIONS · TRAINING · SUPPORT ·

# PROGRAM FILE

```
10 DIM GT(5000) :TGT%=0:PASS=1:GOSUB 140
20 PRINT"Input file opened !"
30 GOSUB 680
40 PRINT"Line numbers logged !":PRINT
50 GOSUB 750
60 PRINT"Line numbers sorted !":PRINT
70 OPEN"I",#1,RF$
80 OPEN"O",#2,OF$
90 PASS=2
100 PRINT"Ready for pass 2 -> Compression & comment deletion.":PRINT
110 GOSUB 680
120 PRINT:PRINT"Process complete:";RF$;" -> ";OF$:PRINT:PRINT
130 END
140 'JTR
150 ON ERROR GOTO 250
160 PRINT:PRINT
170 INPUT"Input BASIC ASCII file ";RF$
180 IF RF$="" THEN END
190 FILES RF$:ON ERROR GOTO 0
200 OPEN"I",#1,RF$
210 INPUT"Output BASIC ASCII file ";OF$
220 IF OF$="" THEN END
230 OPEN"O",#2,OF$
240 RETURN
250 RESUME 260
260 ON ERROR GOTO 0
270 PRINT"No such file exist !!!!!!!"
280 GOTO 150
290 'JTR
300 LW$=""
310 TSV$=I$
320 IF INSTR(I$,CHR$(34))>0 THEN GOSUB 890:GT(TGT%)=VAL(RW$):TGT%=TGT%+1:I$=TSV$
:GOTO 340
330 IF INSTR(I$,"IF ")>0  THEN GOSUB 890:GT(TGT%)=VAL(RW$):TGT%=TGT%+1:I$=TSV$
340 GOSUB 890
350 IF VAL(RW$)>0 THEN 380
360 IF RW$="," THEN 390
370 LW$=RW$:GOTO 390
380 IF LW$="THEN" OR LW$="RESTORE" OR LW$="GOTO" OR LW$="GOSUB" OR LW$="RESUME"
OR LW$="DELETE" THEN GT(TGT%)=VAL(RW$):TGT%=TGT%+1
390 IF I$="" THEN RETURN
400 GOTO 340
410 'JTR
420 S$=I$ :GOSUB 890 :LNR=VAL(RW$):I$=S$:SS1$=RW$:GOSUB 790
430 IF FEIL% THEN 490
440 GOSUB 570:IF (VAL(I$)>0) AND (ABS(LOG(VAL(I$)+1)*.4342944824-LEN(I$))<4) THE
N I$=I$+"'JTR"
450 IF OP$<>"" THEN PRINT#2,OP$
460 PRINT#2,I$
470 OP$="":I$=""
480 RETURN
490 GOSUB 890:ES$=RW$
500 GOSUB 570
510 IF I$="" THEN RETURN
520 IF OP$="" THEN OP$=ES$+I$:RETURN
530 IF LEN(OP$)+LEN(I$)>250 THEN 550
540 OP$=OP$+":"+I$:RETURN
550 PRINT#2,OP$
560 OP$=ES$+I$:RETURN
570 R$=""
580 C$=RIGHT$(I$,1)
590 R$=C$+R$:I$=LEFT$(I$,LEN(I$)-1)
600 IF C$=CHR$(34) THEN I$=I$+R$:RETURN
610 IF C$="'" THEN 660
620 IF I$="" THEN I$=R$:RETURN
630 IF C$<>"M" THEN 580
640 IF (RIGHT$(I$,3)=" RE") OR (RIGHT$(I$,3)=":RE") THEN I$=LEFT$(I$,LEN(I$)-3):
RETURN
650 GOTO 580
660 IF I$=SPACE$(LEN(I$)) THEN I$="":RETURN
670 RETURN
680 'JTR
690 WHILE NOT(EOF(1)):LINE INPUT#1,I$:PRINT I$
700     IF PASS=1 THEN GOSUB 290 ELSE GOSUB 410
710 WEND
720 PRINT"End of input file reached !"
730 IF PASS=2 AND OP$<>"" THEN PRINT#2,OP$
740 CLOSE#1:CLOSE#2:RETURN
750 FOR Q1%=0 TO TGT%-1
760   FOR Q2%=Q1%+1 TO TGT%
770       IF GT(Q2%)<GT(Q1%) THEN SWAP GT(Q1%),GT(Q2%)
780   NEXT:NEXT:RETURN
790 FEIL%=(0=1)
800 TP%=TGT%:BU%=0:CU%=(TP%+BU%)Ø2
810 IF LNR=GT(CU%) THEN RETURN
820 IF GT(CU%)<LNR THEN 860
830 TP%=CU%:CU%=(TP%+BU%)Ø2
840 IF TP%-BU%=1 THEN 880
850 GOTO 810
860 BU%=CU%:CU%=(TP%+BU%)Ø2
870 GOTO 840
880 IF LNR=GT(CU%) OR LNR=GT(BU%) OR LNR=GT(TP%) THEN RETURN ELSE FEIL%=(0=0):RE
TURN
890 'JTR
900 W$=""
910 IF I$="" THEN RW$="":RETURN
920 C$=LEFT$(I$,1)
930 I$=MID$(I$,2)
940 IF C$=CHR$(34) THEN 980
950 IF INSTR("'$,.:#*+-/()=><^Ø",C$)<>0 THEN 980
960 IF C$=" " THEN RW$=W$:RETURN
970 W$=W$+C$:GOTO 920
980 IF W$<>"" THEN I$=C$+I$:RW$=W$:RETURN
990 RW$=C$:RETURN
```


THE NAG PC50 LIBRARY

REGISTERED PRODUCT

The **PC50 Library** is a subset of the internationally renowned **NAG** library and offers a powerful set of programming tools for the Fortran user.
Available for ACT apricot, sirius 1 /Victor, IBM PC, CP/M version for 8-bit micros.

*For full details write to:—*

HWa **HARRISON-WARD associates Ltd.**

62 LYNTON ROAD, RAYNERS LANE
HARROW, MIDDLESEX HA2 9NN
UXBRIDGE (0895) 54052

**ALL TYPES OF BUSINESS COMPUTER SYSTEMS BOUGHT, SOLD AND EXCHANGED**

**BESPOKE PROGRAMMING SERVICE IN BASIC, COBOL OR PASCAL**

***ALL TYPES OF NEW EQUIPMENT SUPPLIED***

**Telephone:**
**0602 761504/278620**

**D+R COMPUTER SERVICES**

***WHY PAY MORE??***

**FERRANTI ADVANCE 86B**

IBM PC compatible micro with: integrated Spreadsheet, Wordprocessor, and Database and BASIC A. Used by many organisations including British Steel and British Rail.
**ONLY £1086**
including monitor and box of disks and paper.

**COMPLETE BUSINESS SYSTEM**

Advance 86B Micro, Printer and Monitor. SAGE Accounts Software. Integrated Spreadsheet, Wordprocessor, & Database and BASIC A. Box of Disks and Paper.
**ONLY £1650**

*Change your data into graphs and really illustrate your work*

**"DATAPLOT"** The easy to use graphics package for IBM PCs and compatibles, Apricots, Wren. Links to most spreadsheets and comma-delimited files.
**£180**

Taxan/Canon ribbons **£5.80**

*Other software at very competitive prices.*

**Leicester Computer Systems**
**26 Brookfield Way, Kibworth**
**Leicester LE8 0SA**
**Tel: Leicester (0533) 541030**


## QL Shading

### by Kees Truijens

QL Easel is probably the best of the Psion Xchange suite, offering an excellent way to draw graphs, but any serious user will eventually want to see

the graphs in hard copy. If you try to print an Easel graph, it soon becomes apparent how much the program relies on colour graphics, making black and white printout impossible to decipher. The routines presented here offer a solution by replacing red and green with shaded black and white.

To use the procedure, dump the Easel picture in a microdrive file using the PRINT command with the S (screen dump) option. Then load the program shown in listing 1 and type 'shade_init', load the picture with the LBYTES command and type 'shade_all'.

Although the routines have been designed to work with four-colour Easel screens, they will work with any screen. Try shaded pictures with stippled colours or pictures in eight-colour mode. The program in listing 2 produces sample charts of all the combinations of four foreground colours, four background colours and four stipple patterns to allow you to test the shading program.

The resulting picture can be plotted on a graphics printer with the help of an appropriate screen-dump program. Listing 3 shows an example screen-dump program for the IDS Microprism, but should be of value to anyone who has not yet obtained or written a screen-dump program.

```
20000 DEFine PROCedure shade(x_start,y_start,x_stop,y_stop,green_mask,red_mask)
20010 REMark (c) Kees Truijens / Kees van der Wal  nov 84  vers 1.2
20020 REMark first run procedure "shade_init" once
20030 REMark input parameters:
20040 REMark shade_start = start adress of machine code returned by        proc "s
hade_init"
20050 REMark x_start,y_start = upper left corner of affected area          (pixel
coordinates)
20060 REMark x_stop, y_stop  = lower right corner etc.
20070 REMark red_mask, green_mask (0 - 255) determine shade pattern
20080 REMark Try values 17,51,119,85 etc.
20090 IF x_start<0 OR x_start>512 OR y_start<0 OR y_start>256 OR x_stop<x_start OR
 x_stop>512 OR y_stop<y_start OR y_stop>256 OR red_mask<0 OR red_mask>255 OR green
_mask<0 OR green_mask>255 THEN PRINT#0;'Bad parameters for procedure "shade".':RET
urn
20100 CALL shade_start,green_mask,red_mask, 131072+(x_start DIV 8)*2 + y_start*128
, (x_stop-x_start) DIV 8, y_stop-y_start
20110 END DEFine shade
20120 REMark ************************************************************
20130 DEFine PROCedure shade_all
20140 shade 0,0,512,256,17,17
20150 END DEFine shade_all
20160 REMark ************************************************************
20170 DEFine PROCedure shade_init
20180 LOCal sign, word, address, checksum
20190 LET shade_start=RESPR(64)
20200 LET checksum=0: sign=1
20210 RESTORE
20220 FOR address=shade_start TO shade_start+58 STEP 2
20230   READ word
20240   POKE_W address,word
20250   LET checksum=checksum+sign*word+1
20260   sign=-sign
20270 END FOR address
20280 IF checksum <> 14565 THEN PRINT#0;'Erroneous data in proc shade_init.':RETur
n
20290 PRINT "Machine code for 'shade' and"\"'shade_all' is loaded."\\
20300 PRINT "It's start address is assigned"\"to the variable 'shade_start'."\\
20310 PRINT "The present value of"\"'shade_start' is: ";shade_start\\
20320 PRINT "Assign this value again"\"to 'shade_start' after a"
20330 PRINT "'CLEAR', 'NEW' or 'LOAD' command."
20340 DATA 8259           :REMark MOVEA.l D3,A0
20350 DATA 8776           :REMark MOVEA.L A0,A1
20360 DATA 9732           :REMark MOVE.l  D4,D3
20370 DATA 24620          :REMark BRA.s   +44
20380 DATA 24600          :REMark BRA.s   +24
20390 DATA -20216         :REMark CMPM.b  (A0)+,(A0)+
20400 DATA 26388          :REMark BEQ.s   +20
20410 DATA 7712           :REMark MOVE.b  -(A0),D7
20420 DATA 7200           :REMark MOVE.b  -(A0),D6
20430 DATA 4103           :REMark MOVE.b  D7,D0
20440 DATA -16378         :REMark AND.b   D6,D0
20450 DATA -13311         :REMark AND.b   D1,D6
20460 DATA -12798         :REMark AND.b   D2,D7
20470 DATA -32762         :REMark OR.b    D6,D0
20480 DATA -32761         :REMark OR.b    D7,D0
20490 DATA 4288           :REMark MOVE.b  D0,(A0)+
20500 DATA 4288           :REMark MOVE.b  D0,(A0)+
20510 DATA 20940, -26     :REMark DBF     D4,-26
20520 DATA 10243          :REMark MOVE.l  D3,D4
20530 DATA -11268, 0, 128 :REMark ADDA.l  #128,A1
20540 DATA 8265           :REMark MOVEA.l A1,A0
20550 DATA -7399          :REMark ROL.b   #1,D1
20560 DATA -7654          :REMark ROR.b   #1,D2
20570 DATA 20941, -46     :REMark DBF     D5,-46
20580 DATA 28672          :REMark MOVEQ   #0,D0
20590 DATA 20085          :REMark RTS
20600 END DEFine shade_init
```

*Listing 1*


MICROMART

**PLUS 5**

***HIGH QUALITY AT A LOW PRICE***

Example prices for IBM/Olivetti, Ericsson, Apricot and Sirius

**FIXED PRICE SUBSYSTEMS**
10MB.....RRP £1,295 **Our Price £1,075**
40MB.....RRP £2,395 **Our Price £1,995**

**FIXED/REMOVABLE SUBSYSTEMS**
10 + 5MB RRP £2,545 **Our Price £2,095**
40 + 5MB RRP £3,645 **Our Price £2,995**

**RAM BOARDS FOR APRICOT**
128K.....£155
256K.....£240
512K.....£595

All prices are subject to VAT

**TRISOFT LTD**
Crown Square, Matlock, Derbyshire DE4 3AT
Telephone: 0629 3021 (6 lines)

ALGOL 68
on
**APRICOT SIRIUS IBM**

Quite simply:
the best language available today
- ★ Easy to learn and use — it is INTERACTIVE!
- ★ Batch compiler for complete programs
- ★ 8087 support, graphics etc.
- ★ System programming support

**£350 + VAT**
**MS-DOS**

**ALGOL APPLICATIONS LTD**
369 Ipswich Road Colchester
CO4 4HL
Tel: (0206) 843385

[a/a]

SPECIAL OFFER
3½" FUJI Microdisks
SS/DD £29.95
DS/DD £39.95

5¼" FLOPPY DISKS

Suitable for use on nearly all single and double-sided 5¼" disk systems.
- Replacement Guarantee
- Hub rings
- Boxed in 10s

PRICES PER BOX

| | 1-4 | 5-9 | 10+ |
|---|---|---|---|
| DS/DD | 9.90 | 9.00 | 8.60 |

PRICES PER BOX

| | 1-4 | 5-9 | 10+ |
|---|---|---|---|
| SS | 29.95 | 29.50 | 29.10 |
| DS | 39.95 | 39.30 | 38.70 |

Full Lifetime Guarantee

99p EACH (Boxed in 10s) EXCL VAT

REPLACEMENT GUARANTEE
If any disk should fail, return it for free replacement.

SEE10 LIBRARY CASES (Hold 10 disks)

| | 1-4 | 5-9 | 10+ |
|---|---|---|---|
| 5¼" | 1.99 | 1.85 | 1.75 |
| 3½" | 1.99 | 1.85 | 1.75 |

DELIVERY

| Disks (per box) | 1-4 | 5-9 | 10+ |
|---|---|---|---|
| Library Cases (Free with disks) | 75p | 50p | 40p |
| | 60p | 30p | 25p |

HOW TO ORDER
To total order value add Delivery, then add 15% VAT and send to:
IDS Computer Supplies
P.O. BOX 436, BANCROFT, MILTON KEYNES MK13 0QX. Tel: (0908) 310898.

# EDUCATION


## USED COMPUTER BARGAINS

HP 125, twin disks, lots of software ..... £995
Commodore 8032 + 8050, 1 meg drive + software £795
Rair CPU, 5 meg Winchester + floppy + terminal, d/w and matrix printer + ACC and w/p software ..... £1,295
ACT Sirius 128k, 1.2 meg ..... £995
Epson FX80 ..... £250
ACT wide matrix printer for Sirius ..... £200
Sharp MZ3500, twin disks, 2*Z80, CP/M, monitor, software ..... £595
Epson MX80 for above computer ..... £120
TEC FP1500 d/w printer ..... £225
Commodore 8000 second processor (Z80) + CP/M software ..... £95
PBM CPU 5 meg Winchester + floppy + terminal + software ..... £595
Apple III 5 meg profile Winchester + monitor ..... £1,395
Matrix printer for above computer ..... £150
Olivetti DY311 d/w printer + t/feed ..... £275
Comart CPU 5 meg Winchester + floppy + terminal, has boards to run extra terminal ..... £595
Eagle 4 10 meg Winchester + floppy + software ..... £895
Northstar Advantage twin floppy ..... £595
Epson MX80 for above computer ..... £120
Apple II ledgers £25 each, 4 for £60
Commodore 8000 software

**Tel: 021-706 9748 Mondays or Thursdays (Answerphone on other days)**

**MICROSAVE SYSTEMS**
**SOLIHULL, WEST MIDLANDS**



## BBC MICRO CHIPS

**8271 ..... £45.00**
***. . . but hurry!***

**OTHER CHIPS FOR DFS**

**74 LS00** ..... **28p**
**74LS10** ..... **25p**
**7438** ..... **40p**
**74LS123** ..... **£1.00**
**74LS393** ..... **£1.20**
**4013** ..... **60p**
**4020** ..... **90p**
**2764 (250ns)** ..... **£4.20**
**27128 (250ns)** ..... **£8.50**

*24-HOUR DISPATCH*
Orders under £10 add P&P 60p. Add 15% VAT to all UK orders

☏ **(0252) 515666**
**martelec limited**
**43 QUEENS RD, FARNBOROUGH, HANTS GU14 6JP**



## GENIE & TRS-80 Model 1

Don't sell your computer upgrade to latest spec:

Genie 48K RAM **£39.95**
Lowercase Genie **£27.95**
Lowercase TR 80 Mod 1 **CALL**
Hi speed CPU **£27.95**
(Nearly double speed)
Centronics printer
Interface Genie **£44.95**
Centronics Printer TRS Mod 1 **£54.95**
RS232-C interface Genie **£64.95**
R232-C interface TRS Mod 1 **£75.95**
Double density disc upgrade **CALL**
Disc interface **CALL**

*Please add £1.50 p&p and 15% VAT*

**ARC ELECTRONICS**
**54 HERON DRIVE**
**WAKEFIELD, W. YORKS**
**Tel: (0924) 253145**


# PROGRAM FILE

*Listing 2*

```
100 REMark sample of shade patterns
110 REMark (c) Kees Truijens/Kees van de Wal, dec 1984
120 REMark first run procedure shade_init once
130 MODE 4
140 WINDOW 512,224,0,0:WINDOW#0,512,32,0,224:PAPER 0:PAPER#0,0:CLS:CLS#0
150 palette 17,17
160 REPeat loop
170   green_mask=RND(1 TO 255):red_mask=RND(1 TO 255)
180   palette green_mask,red_mask
190 END REPeat loop
200 REMark ************************************************************
210 DEFine PROCedure palette (green_mask,red_mask)
220 LOCal col1,col2,stip,x,y
230 CLS:CLS#0
240 FOR stip=0 TO 3
250   x=0:y=stip*56
260   FOR col1=1 TO 7 STEP 2
270     FOR col2=1 TO 7 STEP 2
280       BLOCK 32,56,x,y,col1,col2,stip
290       x=x+32
300     END FOR col2
310   END FOR col1
320 END FOR stip
330 CLS#0:PRINT#0,"green_mask= ";green_mask\"red_mask=    ";red_mask
340 shade 0,0,512,224,green_mask,red_mask
350 PAUSE 250
360 END DEFine palette
```

*Listing 3*

```
100 CLS
110 INPUT "Give filename:" ! name$
120 WINDOW 512,256,0,0
130 CLS
140 LBYTES name$,131072
150 shade_all
160 OPEN#9,ser1
170 PRINT#9,FILL$(CHR$(13),8):REMark 8 blank lines
180 PRINT#9,CHR$(3);:REMark enter graphic mode
190 FOR j=1 TO 73
200 FOR i=131583 TO 163840 STEP 128
210 a=PEEK(i)
220 IF a=3 THEN PRINT#9,CHR$(3);:REMark '3' is graphic code, not a graphic escape
230 PRINT#9,CHR$(a);
240 END FOR i
250 PRINT#9,CHR$(3);CHR$(14);:REMark graphic Linefeed
260 PAN 7
270 END FOR j
280 PRINT#9,CHR$(3);CHR$(2);FILL$(CHR$(13),8):REMark leave graphic mode
290 CLOSE#9
```



# BBC Revenge of the Flying Bunnies

## by Simon Pithers

Not only is the title of this game totally ridiculous, the game itself is equally silly but it is challenging and well finished. You are an alien stealing carrot juice from a carrot patch which is guarded by four flying rabbits. Three of the rabbits are fairly harmless but one of the rabbits is a killer.

Revenge of the Flying Bunnies runs on a BBC Model B, full instructions are included in the program and it really is worth typing in, honest.

```
>LIST
   10 REM ******************
   20 REM * REVENGE OF THE *
   30 REM * FLYING BUNNIES *
   40 REM * By S.C.Pithers *
   50 REM * (c) 1985 v.5.4 *
   60 REM ******************
   70 REM
   80
   90
  100
  110 *TV 0,1
  120 MODE 2
  130 VDU 19,8,6;0;19,9,4;0;
  140 ENVELOPE 1,1,50,40,40,120,120,120,120,10,10,10,120,120
  150 ENVELOPE 2,1,10,30,70,10,10,10,40,10,0,10,80,80
  160 ENVELOPE 3,2,6,0,0,255,0,0,126,0,0,-126,126,126
  170 VDU 23;8202;0;0;0;
  180 VDU 23,224,0,24,60,60,60,28,24,24
  190 VDU 23,225,60,0,0,0,0,0,0,0
  200 VDU 23,226,24,60,102,195,255,126,0,0
  210 VDU 23,227,0,0,24,60,0,0,36,102
  220 VDU 23,228,24,24,24,60,62,62,28,119
  230 VDU 23,229,102,195,129,16,0,0,0,0
  240 VDU 23,230,129,195,102,8,0,0,0,0
  250 VDU 23,0,11,0,0,0,0,0,0,0
  260 CHAN=0
  270 left=-98
```

# PROGRAM FILE

```
  280 right=-67
  290 up=-73
  300 down=-105
  310 DIM DX(7)
  320 FOR X=1 TO 7
  330   DX(X)=X
  340   NEXT
  350 CX=0
  360 GCOL 0,135:CLG
  370 GCOL 0,9
  380 FOR X=1 TO 50 STEP 4
  390   MOVE X,0:DRAW X,1024:MOVE 0,X:DRAW 1280,X
  400   MOVE 1280-X,0:DRAW 1280-X,1024
  410   MOVE 0,1024-X:DRAW 1280,1024-X
  420   NEXT
  430 COLOUR 0
  440 PROCD("REVENGE OF",3,4,1,99)
  450 PROCD("THE",7,8,-1,99)
  460 PROCD("FLYING BUNNIES",2,12,1,99)
  470 PROCD("By Simon Pithers",1,18,7,8)
  480 PROCD("(C) 1985",5,22,0,8)
  490 T=TIME:REPEAT
  500   FOR I%=0 TO 150:NEXT
  510   IF CX<6 CX=CX+1 ELSE CX=1
  520   VDU 19,1,DX(CX);0;
  530   VDU 19,2,DX((CX) MOD 6+1);0;
  540   VDU 19,3,DX((CX+1) MOD 6+1);0;
  550   VDU 19,4,DX((CX+2) MOD 6+1);0;
  560   VDU 19,5,DX((CX+3) MOD 6+1);0;
  570   VDU 19,6,DX((CX+4) MOD 6+1);0;
  580   UNTIL (TIME-T>800)
  590 COLOUR 0
  600 MODE 7
  610 PROCINST
  620 MODE 2
  630 S=24:RS=8:LE=1:SC=0
  640 CN=10:RC=1:LI=5:SS=3
  650 VDU 23;8202;0;0;0;
  660 PROCbegin
  670 END
  680
  690
  700 REM The Procedures start here.....
  710
  720
  730 DEF PROCD(A$,HX,VX,DRX,CLX)
  740 AX=&A:XX=&72:YX=0:D=&72
  750 GX=0
  760 FOR IX=1 TO LEN A$
  770   B$=MID$(A$,IX,1)
  780   ?D=ASC B$:CALL &FFF1:GX=GX+1:IF GX=7 GX=1
  790   VDU 23,235,D?1,D?1,D?2,D?2,D?3,D?3,D?4,D?4
  800   VDU 23,236,D?5,D?5,D?6,D?6,D?7,D?7,D?8,D?8
  810   IF DRX=1 COLOUR GX ELSE COLOUR 7-GX
  820   IF CLX<>99 COLOUR CLX
  830   PRINT TAB(HX+IX,VX);CHR$235;TAB(HX+IX,VX+1);CHR$236
  840   NEXT
  850 ENDPROC
  860
  870
  880
  890 DEF PROCINST
  900 CLS
  910 PRINT TAB(2,1);CHR$157;CHR$129;CHR$141;"Revenge of the flying rabbits."+CH
R$156
  920 PRINT TAB(2,2);CHR$157;CHR$129;CHR$141;"Revenge of the flying rabbits."+CH
R$156
  930 PRINT
  940 PRINT" You are an innocent little alien who"
  950 PRINT"by accident lands on a carrot patch."
  960 PRINT"But this is no ordinary patch, it is"
  970 PRINT"guarded by four rabbits who have sworn"
  980 PRINT"revenge for the death of there prize"
  990 PRINT"carrot which took them 2000 years to"
 1000 PRINT"grow."
 1010 PRINT" Anyway, your stuck in the middle of"
 1020 PRINT"the rabbit patch and you have to get"
 1030 PRINT"carrot juice by sitting on top of a"
 1040 PRINT"carrot and you will automatically suck"
 1050 PRINT"the juice out, but the rabbits are"
 1060 PRINT"constantly chasing you. Three of the"
 1070 PRINT"rabbits arn't that dangerous but one"
 1080 PRINT"of them is a real killer, the others"
 1090 PRINT"jump on you to stop you sucking"
 1100 PRINT"the juice.You may also use a supersuck"
 1110 PRINT"which allows you to suck alot of juice"
 1120 PRINT"3 times whilst playing."
 1130 PRINT
 1140 PRINT"     Press any key to continue."
 1150 A=GET
 1160 CLS
 1170 PRINT TAB(2,1);CHR$157;CHR$129;CHR$141;"Revenge of the flying rabbits."+CH
R$156
 1180 PRINT TAB(2,2);CHR$157;CHR$129;CHR$141;"Revenge of the flying rabbits."+CH
R$156
 1190 PRINT
 1200 PRINT" Your keys are:"
 1210 PRINT
 1220 PRINT" Z=left           X=right"
 1230 PRINT" :=up             /=down"
 1240 PRINT" S=supersuck"
 1250 PRINT" Escape=Super Suicide"
 1260 PRINT
 1270 PRINT" Super suicide is for when you feel"
 1280 PRINT" that your close to death and this"
 1290 PRINT" will drain all your carrot juice and"
 1300 PRINT" energy and lifes and will also kill"
 1310 PRINT" all the rabbits and give you many"
 1320 PRINT" points. But Only Use In An Emergency."
 1330 PRINT
 1340 INPUT "Do you wish to change key controls to   A=up  Z=down  <=left  >=rig
ht ";W$
 1350 IF W$="Y" OR W$="YES" THEN CHAN=1
 1360 IF CHAN=1 THEN left=-103:right=-104:up=-66:down=-98
 1370 PRINT
 1380 PRINT"   PRESS ANY KEY TO START"
 1390 A=GET
 1400 ENDPROC
 1410
 1420
 1430
```


MICROMART

**BUY DBASE II FOR £299 AND RECEIVE EXPRESSBASE II FREE**

Today's dBase II users can now write applications in Expressbase II — the new dBase II shorthand. Salamanca's Expressbase II is a programming aid designed for the professional dBase II programmer, enabling the user to speed up programming by a factor of three without sacrifice of flexibility.

Normal prices are **£395** + **£125** + VAT.

Call **(0629) 3021** to reserve your copies at **£299** + VAT, carriage **£5.00** + VAT.

**TRISOFT LTD**
**Crown Square, Matlock,**
**Derbyshire DE4 3AT**
**Tel: (0629) 3021 (6 lines)**

**COMPUTER MAINTENANCE**
**ON-SITE REPAIRS**
**BUSINESS COMPUTERS**

MICRO & MINI SYSTEMS
Hard & Floppy Disks V.D.U.s
Most Printers Repaired

Fixed Maintenance Charges for
**8 Working Hour Response**

**SUMLOCK ELECTRONICS LIMITED**
**GOTHIC HOUSE**
**MARKET PLACE**
**PENKRIDGE**
**STAFFS ST19 5DJ**

**Tel: 078-571-5155**

**PERSONALISED COMPUTER COVERS**

***These NEW products are available NOW on a SPECIAL INTRODUCTORY OFFER***

**Protect your keyboard and VDU with these practical and attractive dust covers for as little as £6.95!**



★ In durable and easy-to-clean leathercloth

★ Available to fit all leading makes of computer

★ This special offer includes the computer cover complete with your own initials

*Send as follows:*
Your full name and address.
Make and model of your keyboard and VDU.
The initials to be displayed on your cover.
Cheque/PO payable to **South Yorkshire (Promotions) Ltd, PO Box 5, Barnsley, South Yorkshire S70 1HD.**
Add 50p p&p. Allow 10 days for delivery.

**SERIOUS BUSINESS OR SERIOUS HOBBY**

**THE ONLY WAY YOU WILL BEAT OUR NORMAL PRICES IS TO JOIN OUR DISCOUNT GROUP. WE DARE NOT PRINT THEM!!**

Acorn, Apricot, Atari, Amstrad, Brother, Canon, Commodore, Cumana, Enterprise, Epson, GEC, Juki, Mannesman Tally, Mitsubishi, Opus, Oric, Philips, Sanyo, Sokata, Sorryifwemissedyou, Sinclair, Solid Disk, Tatung, Torch, Triumph Adler.

**THIS MONTH'S MEMBERSHIP SPECIAL**

| | |
|---|---|
| CANON PW 1080A NLQ Dot Matrix | £240 + VAT = £276.00 inc. VAT |
| ACORN Music 500 FM Synthesiser | £150 + VAT = £172.50 inc. VAT |
| AMSTRAD 664 Colour + Drive | £374 + VAT = £430.10 inc. VAT |

We carry most leading brand names. For more information on how to get our monthly price list of genuine discount prices and details of the other services we offer contact –

**COMPUTER DISCOUNT GROUP**

8 Westwood Lane, Welling, Kent DA16 2HE
Tel: 01-301 3745/03224 48561

Callers by prior appointment only.

**EPSON**

**COMPUTER AND PRINTER REPAIRS AND SALES**

**Tel: 01-968 8622**

**APPROVED EPSON SERVICE CENTRE**

*Terrific prices on all printers*

We do have a same day service if you bring your computer or printer to us. Easy free parking.

Or if you prefer we will come to you, fast — on an emergency call out or a cheap rate annual maintenance contract.

Distributors and dealers — we provide a special service for you.

*ALL ENQUIRIES WELCOME*

**LOGIFIX LTD**

**HORMEAD WHARF, HORMEAD ROAD PADDINGTON, LONDON W9**

***Evening and weekend collections possible***

**OFFSHORE SOFTWARE INC.**

**SOFTWARE HOUSES,** do you need increased Sales Revenues?

Could you use new software products to add to your product range?

If so, let us locate the right PC software products and arrange distributor agreements for you.

We have offices in both the USA and the UK, and we have over 6,000 products at our fingertips.

Interested?

*Write for details:*

**OFFSHORE SOFTWARE**
**23 STEWART CLOSE**
**HAMPTON, MIDDLESEX TW12 3XJ**

# PROGRAM FILE

```
1440 DEF PROCbegin
1450 ERS=20-LE
1460 AX=10:XX=ERS:CALL&FFF4
1470 AX=9:XX=ERS:CALL&FFF4
1480 IF SC>(LE*10000) THEN SS=SS+1
1490 CLS
1500 GCOL0,5
1510 MOVE 0,80
1520 DRAW 1280,80
1530 RX1%=20:RY1%=150
1540 RX2%=20:RY2%=1000
1550 RX3%=1200:RY3%=150
1560 RX4%=1200:RY4%=1000
1570 COLOUR6
1580 PRINTTAB(0,30);"CARROT JUICE"
1590 FORX=&7D80 TO &7E00 STEP 4
1600   !X=&13131313
1610   NEXT
1620 CJU%=X
1630 A$=CHR$(18)+CHR$(3)+CHR$(1)+CHR$(224)+CHR$(8)+CHR$(18)+CHR$(3)+CHR$(2)+CHR
$(225)
1640 B$=CHR$(18)+CHR$(3)+CHR$(4)+CHR$(226)+CHR$(8)+CHR$(18)+CHR$(3)+CHR$(6)+CHR
$(227)
1650 R$=CHR$(18)+CHR$(3)+CHR$(RC)+CHR$(228)+CHR$(8)+CHR$(18)+CHR$(3)+CHR$(8)+CH
R$(229)+CHR$(8)+CHR$(18)+CHR$(3)+CHR$(15)+CHR$(230)
1660 COLOUR2:PRINTTAB(1,0);"LEVEL=";LE
1670 COLOUR6:PRINTTAB(1,2);"Superdrain=";SS
1680 COLOUR3:PRINTTAB(1,1);"SCORE=";SC
1690 ON ERROR PROCSUPERDE
1700 VDU5
1710 MOVE RX1%,RY1%:PRINTR$
1720 MOVE RX2%,RY2%:PRINTR$
1730 MOVE RX3%,RY3%:PRINTR$
1740 MOVE RX4%,RY4%:PRINTR$
1750 IFLI=1 GOTO1770
1760 MOVE 800,70:FORX=1TOLI-1:PRINTB$;:NEXT
1770 FOR X=1 TO CN
1780   MOVE RND(1200)+40,RND(800)+130
1790   PRINTA$
1800   NEXT
1810 VDU4
1820 MX%=640:MY%=512
1830 VDU5:MOVE MX%,MY%:PRINTB$:VDU4
1840 REPEAT
1850   IF INKEY left PROCA:MX%=MX%-S:PROCSB:PROCA
1860   IF INKEY right PROCA:MX%=MX%+S:PROCSB:PROCA
1870   IF INKEY up PROCA:MY%=MY%+S:PROCSB:PROCA
1880   IF INKEY down PROCA:MY%=MY%-S:PROCSB:PROCA
1890   IF INKEY-82 PROCSUPER
1900   PROCCH:PROCMR:SOUND2,2,1,2
1910   PROCMAR
1920   CJU%=CJU%-1:?CJU%=0
1930   IF CJU%<=&7D80 PROCEND
1940   UNTILFALSE
1950 ENDPROC
1960
1970
1980
1990 DEF PROCA
2000 VDU5:MOVEMX%,MY%:PRINTB$:VDU4
2010 ENDPROC
2020
2030
2040
2050 DEF PROCJ
2060 !CJU%=&13131313:CJU%!4=&13131313
2070 CJU%=CJU%+8:SC=SC+8:PROCSC
2080 IF CJU%>=&8000 PROCWIN:GOTO1490
2090 SOUND1,1,CJU%,1
2100 ENDPROC
2110
2120
2130
2140 DEF PROCCH
2150 IF POINT(MX%+32,MY%-45)=1 OR POINT(MX%+28,MY%-45)=1 OR POINT(MX%+36,MY%-45
)=1 PROCJ
2160 ENDPROC
2170
2180
2190
2200 DEF PROCMR
2210 VDU5
2220 MOVERX1%,RY1%:PRINTR$
2230 IF RX1%<MX% THEN RX1%=RX1%+RS ELSE RX1%=RX1%-RS
2240 IF RY1%<MY% THEN RY1%=RY1%+RS ELSE RY1%=RY1%-RS
2250 MOVERX1%,RY1%:PRINTR$
2260 MOVERX2%,RY2%:PRINTR$
2270 IF RX2%<MX% THEN RX2%=RX2%+RS ELSE RX2%=RX2%-RS
2280 IF RY2%<MY% THEN RY2%=RY2%+RS ELSE RY2%=RY2%-RS
2290 MOVERX2%,RY2%:PRINTR$
2300 MOVERX3%,RY3%:PRINTR$
2310 IF RX3%<MX% THEN RX3%=RX3%+RS ELSE RX3%=RX3%-RS
2320 IF RY3%<MY% THEN RY3%=RY3%+4 ELSE RY3%=RY3%-4
2330 MOVERX3%,RY3%:PRINTR$
2340 MOVERX4%,RY4%:PRINTR$
2350 IF RX4%<MX% THEN RX4%=RX4%+RS ELSE RX4%=RX4%-RS
2360 IF RY4%<MY% THEN RY4%=RY4%+4 ELSE RY4%=RY4%-RS
2370 MOVERX4%,RY4%:PRINTR$
2380 VDU4
2390 ENDPROC
2400
2410
2420
2430 DEF PROCMAR
2440 IF MX%=RX1% AND MY%=RY1% PROCEND
2450 IF MX%=RX2% AND MY%=RY2% PROCEND
2460 IF MX%=RX3% AND MY%=RY3% PROCEND
2470 IF RX4%+LE>MX% AND RX4%-LE<MX% AND RY4%+LE>MY% AND RY4%-LE<MY% PROCEND
2480 ENDPROC
2490
2500
2510
2520 DEF PROCEND
2530 SOUND1,-15,10,20
2540 LI=LI-1:IF LI=0 PROCDEAD
2550 GOTO1440
2560 ENDPROC
2570
2580
2590
2600 DEF PROCWIN
```

# PROGRAM FILE

```
2610 SOUND1,3,4,50
2620 SOUND2,3,4,50
2630 SOUND3,3,4,50
2640 S=S+2:RS=RS+3
2650 SC=SC+(LE*1000)
2660 CLG:VDU4
2670 PROCD("BONUS",2,10,LE MOD 6,99)
2680 QW$=STR$(LE*1000)
2690 PROCD(QW$,8,10,LE MOD 6,99)
2700 PROCWAIT(200):CLG
2710 LE=LE+1
2720 C=C+2
2730 RC=RC+1
2740 IF RC=8 RC=0
2750 ENDPROC
2760
2770
2780
2790 DEFPROCSC
2800 COLOUR3
2810 PRINTTAB(1,1);"SCORE=";SC
2820 ENDPROC
2830
2840
2850
2860 DEF PROCSUPER
2870 IF SS=0 ENDPROC
2880 IF POINT(MX%+32,MY%-45)<>1 OR POINT(MX%+28,MY%-45)<>1 OR POINT(MX%+36,MY%-
45)<>1 ENDPROC
2890 VDU19,0,8;0;
2900 A%=9:X%=1:CALL&FFF4
2910 A%=10:X%=1:CALL&FFF4
2920 FORQ=CJU% TO CJU%+128 STEP 2
2930   ?Q=&13:Q?1=&13
2940   SOUND1,1,CJU%,1
2950   CJU%=CJU%+2:SC=SC+4:PROCSC
2960   NEXT
2970 VDU19,0,0;0;
2980 SS=SS-1
2990 A%=10:X%=ERS:CALL&FFF4
3000 A%=9:X%=ERS:CALL&FFF4
3010 COLOUR6:PRINTTAB(1,2);"Superdrain=";SS
3020 ENDPROC
3030
3040
3050
3060 DEF PROCWAIT(W%)
3070 TIME=0
3080 REPEATUNTILTIME>=W%
3090 ENDPROC
3100
3110
3120
3130 DEFPROCDEAD
3140 CLG
3150 VDU19,1,2;0;19,2,5;0;19,3,6;0;4
3160 COLOUR1
3170 PRINT'
3180 PRINT"  The rabbits have"
3190 PRINT"    there revenge"
3200 PRINT'
3210 COLOUR2
3220 PRINT"    You scored:"
3230 PRINT"    ";SC
3240 SOUND1,1,100,40
3250 SOUND2,2,100,40
3260 SOUND3,3,100,40
3270 PRINT
3280 COLOUR3
3290 PRINT"   PRESS 'Y' TO"
3300 PRINT"    PLAY AGAIN."
3310 A$=GET$:IFA$="Y" RUN
3320 END
3330 ENDPROC
3340
3350
3360
3370 DEF PROCSB
3380 IF MX%<20 MX%=MX%+S
3390 IF MX%>1250 MX%=MX%-S
3400 IF MY%<140 MY%=MY%+S
3410 IF MY%>1000 MY%=MY%-S
3420 ENDPROC
3430
3440
3450
3460 DEF PROCSUPERDE
3470 *FX15,0
3480 ON ERROR ENDPROC
3490 PROCMR
3500 PROCDETUNE
3510 VDU4
3520 *FX9,1
3530 *FX10,1
3540 MX%=MX%+16
3550 MY%=MY%-8
3560 MOVE MX%,MY%
3570 GCOL 0,9
3580 DRAW RX1%,RY1%
3590 SC=SC+1000:PROCSC
3600 SOUND1,3,50,10
3610 PROCWAIT(40)
3620 MOVE MX%,MY%
3630 GCOL 0,10
3640 DRAW RX2%,RY2%
3650 SC=SC+1000:PROCSC
3660 SOUND1,3,100,10
3670 PROCWAIT(40)
3680 MOVE MX%,MY%
3690 GCOL 0,11
3700 DRAW RX3%,RY3%
3710 SC=SC+1000:PROCSC
3720 SOUND1,3,150,10
3730 PROCWAIT(40)
3740 MOVE MX%,MY%
3750 GCOL 0,12
3760 DRAW RX4%,RY4%
3770 SC=SC+1000:PROCSC
3780 SOUND1,3,200,10
3790 PROCWAIT(40)
3800 S=255
```


MICROMART

AMA

## BETTER SERVICE, BETTER PRICES, WIDER CHOICE

**COMPUTERS** **SANYO** (now inlcuding IBM compatible and 2×800K versions), **APRICOT** & **OLIVETTI**, plus WIDEST CHOICE of **IBM COMPATIBLES**. Tailored systems from under **£1.000**. Extra RAM, Multifunction boards etc, all at discount prices (eg Apricot 128k RAM. **£139**).

**SOFTWARE** Full range of WP, spreadsheet and database software etc, plus Accounts, Payroll, CAD, Communications packages etc. All at very special prices — eg **Wordstar 2000 £299. Sage Accounts £249, Supercalc II £145**.

**PRINTERS** All the leading printers supplied. We specialise in Near Letter Quality Matrix Printers (from under **£200**) and Daisywheels (including Qume compatibles from **£209**).

**PLOTTERS** We supply a full range of plotters from A4 — **£169** (MCD-80), A3 — **£275** (ROLAND), A1 — **£2,995** (HOUSTON). Use independently or as part of a CAD system.

**PRINTER BUFFERS** Any combination serial/parallel in or out. 8K-512K, eg from 8K — **£75**, 16K — **£85**, 32K — **£95**, 64K — **£119**.

**DISKS — SPECIAL OFFERS — POST FREE!!!**

NOW — PROGRESSIVE DISCOUNTS ON **EVERY** BOX

| | DYSAN 100% guaranteed Per box of 10 + per order | 3M Lifetime guarantee Per box of 10 + per order |
|---|---|---|
| SSDD | £14.40 + £1.00 | £11.75 + £2.75 |
| DSDD | £20.90 + £1.45 | £16.25 + £2.75 |
| SSQD | £20.90 + £1.45 | £17.15 + £3.85 |
| DSQD | £26.85 + £1.65 | £20.15 + £3.85 |

| | SONY 3.5" | AMSTRAD 3" DISKS |
|---|---|---|
| SS | £27.20 + £3.30 | £32.50 per box of 10 |
| DS | £37.20 + £3.30 | |

Please add **£2.00** to the above prices if required in "SEE 10" Library Case.
**UNLABELLED DISKS** from the above manufacturers at **EVEN LOWER PRICES**.

**FANFOLD PAPER** 11" × 9.5" **£9.75**. A4 Clean Edge **£11.69** 2,000 sheets/box. All sizes available. Delivery **£2.25** (fixed) + £1 per box.

**RIBBONS** — All types available at low prices, eg Juki 6100 **99p**, Shinwa CP/CPA 80 **£3.79**, Epson FX/MX/RX 80 **£2.49**. **PRINTWHEELS** from **£3.79**. Delivery **95p** (any quantity ribbons/printwheels).

**Official Government/Educational/Local Authority orders welcomed**

*Please add 15% VAT to all prices (inc carriage). Limited space precludes listing of our full range of products. Please telephone if you do not see the item you require.*

**A.M.A COMPUTER SYSTEMS & SUPPLIES**
Dept A, 8 Glebe Street, Beeston
NOTTINGHAM NG9 1BZ
Tel: (0602) 255415

**SCIENTIFIC SUBROUTINE LIBRARY**

**VOLUME 1 — STATISTICS AND CURVE FITTING**
Mean, SD, Normal Distribution, Partial Expectation, Chauvenets Criterion, Least Squares Fit to a Polynomial and Arbitrary Function, Repetitive Least Squares Fits, Covariance Matrix, Chi-Squared Statistic, Matrix Inversion, Solution of Linear Simultaneous Equations.

**VOLUME 2 — LINEAR PROGRAMMING**
Reduction of a Simplex Tableau, Integer Programming, Partial Integer Programming, Conversational Linear Programming System, Least Cost Mix Problem.

**VOLUME 3 — FURTHER STATISTICS**
Ranking, Quantiles, Frequency, Correlation Coefficient, T, Chi-Squared and F Distributions and their Inverses, T Test, Chi-Squared Test, Wilcoxson Test, Linear and Multiple Regression, ANOVA 1-way and 2-way.

**VOLUME 4 — TRANSFORMATIONS AND SORTING ALGORITHMS**
Fourier and Fast Fourier Transforms, Numerical Integration and Differentiation, Harmonic Analysis, Interpolation, Coordinate Transformations, Exchange Sort, Quicksort, Shellsort, Tree Sort.
All routines are written in BASIC for easy implementation on any machine. Machine readable source code — £75 plus VAT per volume. (Most disk formats plus QL microdrive now available).
Manuals including full source listings with implementation notes and documentation — £25 per volume.

**CP/M TO DEC FILE TRANSFER**
Software to read and write RT-11 format RX01 diskettes under CP/M80. Supplied on 8" SSSD diskette — £25 plus VAT.

**SERVICES**
Micro Logic Consultants specialise in scientific data processing and the interfacing and control of laboratory instrumentation. We can advise you on the best approach to your problem, or provide a complete solution. *Contact Derek Clifford on 0860 319482.*

**MICRO LOGIC CONSULTANTS LTD**
57 Station Road, Southwater, Horsham
W. Sussex RH13 7HQ
Telephone: 0403 731818

# FLOPPIES

**Superb "Own-Label" Disks (5 year Warranty) packed in standard card or See-10 plastic lib cases**

**Plus The FUJI FILM Range Defining the Standards for Floppy Disks**

| 5¼" Disks | per 10 "OWN-LABEL" CARD | "OWN-LABEL" SEE-10 | FUJI FILM |
|---|---|---|---|
| SSDD (40tr) | £9.50 | £11.00 | £13.30 |
| DSDD (40tr) | £10.50 | £12.00 | £18.90 |
| DSQD (80tr) | £14.80 | £16.30 | £22.90 |

| 3½" Disks | per 10 "OWN-LABEL" Loose | SEE-10 | FUJI FILM |
|---|---|---|---|
| Single-Sided | £27.50 | £28.75 | £31.50 |
| Double-Sided | £35.50 | £36.75 | £41.50 |

3", 8" and Hard Sectored Disks available

SEE-10 Plastic Library Cases
8" **£2.10** 5¼" **£1.65** 3½" **£1.35**

**FREE SOFTWARE!!!**

IBM-PC™ and Compatibles

**300 DISKS FULL OF FREE PROGRAMS**

The contents of the Santa Clara and New York PC User Group Libraries

**Games, Utilities and Business Software**

| | Buy | Rent |
|---|---|---|
| All 300 | £450.00 | £222.00 |
| Vols 1-100 | £150.00 | £75.00 |
| Vols 101-200 | £150.00 | £75.00 |
| Vols 201-300+ | £150.00 | £75.00 |

*Disk rentals are for 14 days and include return carriage and 20% blank disks, ie includes +60 blanks on Full Library*

ALL PRICES EX-VAT but include delivery (UK). COD or 3% CWO discount

## MID-SURREY MEDIA

**Unit G22, Southbank Technopark**
**London Road, Elephant & Castle**
**London SE1 6LN**

**Tel: 01-928 2900**

IBM is the trademark of International Business Machines



# QL BANK ACCOUNT

**Fed up with infrequent bank statements? Avoid bank charges and keep up to date with QL BANK ACCOUNT. Check your mortgage HP, standing orders! Budget those bills.**

- ★ Automatic posting of standing orders and other regular payments or credits.
- ★ Delete, amend and even backdate entries. Scroll through your statements. Comprehensive 80 column display and printout.
- ★ 6 different entry search routines!
- ★ Post items to headings name by YOU to suit your circumstances. Print out individual accounts and summary, e.g. all payments to building society or motoring expenses.
- ★ Output of bank statement and accounts to most Epson compatible printers. Makes automatic use of memory expansions. Demonstration bank account included.

**Cartridge and Manual £19.95 + 50p P&P**

***Cheques and POs to:***

**CENPRIME SOFTWARE**
**Dept. PCW**
**10 CASTLE STREET**
**RUGBY CV21 2TP**
**Tel: Coventry (0203) 686162**




```
3810 FORX=CJU% TO &7D80 STEP-4
3820   !X=&00000000
3830   SC=SC+100:PROCSC
3840   SOUND1,-15,S,1
3850   S=S-1
3860   NEXT
3870 PROCWAIT(60)
3880 FORX=1TO7
3890   VDU19,X,7+X;0;
3900   NEXT
3910 PROCWAIT(150)
3920 CLS
3930 PROCDEAD
3940 END
3950 ENDPROC
3960
3970
3980
3990 DEF PROCDETUNE
4000 RESTORE 4150
4010 REPEAT
4020   READ P,D
4030   SOUND1,-15,P,D
4040   SOUND2,-15,P,D
4050   SOUND3,-15,P,D
4060   SOUND1,0,0,1
4070   SOUND2,0,0,1
4080   SOUND3,0,0,1
4090   UNTIL P=0 AND D=0
4100 PROCWAIT(50)
4110 ENDPROC
4120
4130
4140
4150 DATA 89,15,89,10,89,5,89,15
4160 DATA 101,10,97,5,97,10,89,5
4170 DATA 89,10,85,5,89,10,0,0
>
```

# BBC Spooler

## By Mark Clegg

This program sets up drivers in a sideways RAM to allocate a larger printer buffer than that catered for by the BBC's operating system. Once installed, the program will remain until the RAM is erased or the computer is turned off.

The driver is fully compatible with MOS calls in that the buffer may be purged/examined and used in the normal way, and a buffer-full event will also be generated (if the event is enabled) when appropriate.

Up to 15.25k may be used as a buffer, the exact amount available being dependent on the size of the RAM installed. The program is configured for the size of RAM chip by setting the variable 'RAMTOP' on line 90 to the appropriate value — &BB for a 2k chip, &90 for 4k (that is, the high byte of the next address after the RAM).

The installation section of the program assumes that the RAM will be located in ROM socket 'F', and that any write operations to the sideways ROM area will automatically select this ROM (as with the ATPL ROM expansion board). The code actually placed in the ROM is, however, independent of the ROM socket used, so modification for use in different sockets should be no great problem.

To produce a working driver for your BBC Micro, run the following program which assembles the required code together with a ROM installation routine. The code produced is saved to disk as the binary file PSPOOL. The printer spooler can then be set up by issuing the command '*PSPOOL' (best utilised from within a !BOOT file).

```
10 REM ****************************************
20 REM *****          RAMSPOOL            *****
30 REM ****************************************
40 REM ***** A program allocating paged RAM *****
50 REM ***** space  to the  printer  buffer *****
60 REM ***** A maximum of 15.5K can be used *****
70 REM ****************************************
80
90 ramtop=&B8 : REM Amount of ram available +&8000 (High byte)
100 OSBYTE=&FFF4 : OSNEWL=&FFE7 : OSWRCH=&FFEE
110 FOR pass%=4 TO 7 STEP 3
120   P%=&1900 : O%=&3200
130   [ OPT pass%
140   .instal LDA &2B0 \ Check spooler not already installed
150   CMP #&81 : BNE start : RTS : .start
160   SEI
170   LDA #(data DIV 256) : STA &F9 \ Install spooler in paged RAM
180   LDA #(data MOD 256) : STA &F8 : LDY #0 : LDA #&80
190   STA &FB : STY &FA
200   .inst13 LDA (&F8),Y : STA (&FA),Y : INC &F8 : BNE inst11 : INC &F9
210   .inst11 INC &FA : BNE inst12 : INC &FB
220   .inst12 LDA &FB : CMP #&83 : BNE inst13
230   LDA &F4 : PHA : LDA #&F : STA &F4 : STA &FE30 : JSR boot
240   PLA : STA &F4 : STA &FE30 : LDA #&81 : STA &2B0 : CLI : RTS
250   .data
```

# PROGRAM FILE

```
260   ] : P%=&8000 : VDU12 : [ OPT pass%
270   \ ************************************
280   \ *****          RAMSPOOL          *****
290   \ ************************************
300   \ ***** A  program  to  allocate *****
310   \ ***** paged  RAM  to  form  an *****
320   \ ***** extended  printer buffer *****
330   \ ***** up to a maximum of 15.5K *****
340   \ ************************************
350   JMP 0 : JMP sentry
360   EQUB &81 \ ROM Type.
370   EQUB cright \ Copyright offset pointer.
380   EQUB &01 \ Version number.
390   EQUS "Ram Spool"
400   .cright EQUB &00 \ Copyright message.
410   EQUS "(C) M.C. 1984."
420   EQUB &00
430   .hlpmsg \ Printed by '*HELP'
440   EQUS "Printer Spooler V1.0 (1.5K)"
450   EQUB &D:EQUB &A
460   .sentry CMP £&09 \ Test type of service requested.
470   BEQ help \ Help expansion
480   CMP £3 \ or
490   BEQ boot \ Auto boot
500   RTS
510   .help   PHA \ Check for specific help.
520   TYA : PHA
530   .help1  LDA (&F2),Y \ Is rest of command line empty ?
540   CMP £&20:BNE help2:INY:JMP help1
550   .help2  CMP £&0D:BEQ dohelp
560   .help4  PLA:TAY:PLA:RTS
570   .dohelp JSR OSNEWL \ Type out ROM's name.
580   LDY £&00
590   .help3  LDA hlpmsg,Y
600   JSR OSWRCH
610   INY
620   CMP £&0A
630   BNE help3
640   JMP help4
650   .boot   PHA \ Auto boot.
660   TYA:PHA:TXA:PHA
670   LDY £0
680   .boot1  LDA hlpmsg,Y: JSR OSWRCH: INY: CMP £&A: BNE boot1
690   JSR OSNEWL
700
710   .ramspl LDA &22A \ Save old values of vectors
720   STA insold : LDA &22B : STA insold+1 : LDA &22C : STA remold
730   LDA &22D : STA remold+1 : LDA &22E : STA prgold : LDA &22F
740   STA prgold+1
750
760   LDA £&A8 \ Obtain address of extended
770   LDX £0 \ vector space
780   LDY £&FF : JSR OSBYTE : STX &F2 : STY &F3
790
800   LDY £&3F \ Set up the three extended vectors
810   LDA £(insbuf MOD 256) : STA (&F2),Y \ INSV,REMV and CNPV
820   INY : LDA £(insbuf DIV 256) : STA (&F2),Y : INY
830   LDA &F4 : STA (&F2),Y : INY : LDA £(rembuf MOD 256) : STA (&F2),Y
840   INY : LDA £(rembuf DIV 256) : STA (&F2),Y : INY : LDA &F4 : STA (&F2),Y
850   INY : LDA £(cnprge MOD 256) : STA (&F2),Y : INY :LDA £(cnprge DIV 256)
860   STA (&F2),Y : INY : LDA &F4 : STA (&F2),Y
870
880   SEI \ Set up the vectors to point
890   LDA £&FF \ to the extended vector workspace
900   STA &22B : STA &22D : STA &22F : LDA £&3F : STA &22A : LDA £&42
910   STA &22C : LDA £&45 : STA &22E : CLI : LDX £3 : LDA £&40 : PHA : PLP
920   JSR cnprge : PLA : TAX : PLA : TAY : PLA : RTS
930
940   .cnprge SEI \ Purge buffer / determine free space
950   PHP : CPX £3 : BEQ purge : PLP : CLI : JMP (prgold)
960   .purge  BVS purge1 \ Purge or buffer count ?
970   BCS romlft \ Buffer space remaining ?
980   SEI : LDX buflen \ Number of characters in buffer
990   LDY buflen+1 : PLP : CLI : RTS
1000
1010  .romlft SEC \ Return anmount of space left
1020  LDA bufmax \ in buffer
1030  SBC buflen : TAX : LDA bufmax+1 : SBC buflen+1
1040  TAY : PLP : CLI : RTS
1050
1060  .purge1 LDA £&83 \ Purger buffer contents
1070  STA bufend+1 : STA buftop+1 : LDA £(ramtop-&83) : STA bufmax+1
1080  LDA £0 : STA bufend : STA buftop : STA bufmax : STA buflen : STA buflen+
1
1090  PLP : CLI : RTS
1100
1110  .insbuf PHP \ Insert character into buffer
1120  SEI : CPX £3 : BEQ insbf1 : PLP : JMP (insold)
1130  .insbf1 TAX \ Printer buffer selected
1140  LDA buflen : CMP bufmax : BNE insbf2 : LDA buflen+1 : CMP bufmax+1
1150  BNE insbf2 : TXA : LDX £3 : PLP : SEC : RTS
1160  .insbf2 LDA bufend \ Buffer not full so insert char
1170  STA &FA : LDA bufend+1 : STA &FB : LDY £0 : TXA : STA (&FA),Y
1180  INC buflen : BNE insbf3 : INC buflen+1
1190  .insbf3 INC bufend : BNE insbf4 : INC bufend+1 : LDA bufend+1
1200  CMP £ramtop : BNE insbf4 : LDA £&83 : STA bufend+1
1210  .insbf4 TXA : LDX £3 : PLP : CLC : RTS
1220
1230  .rembuf PHP \ Remove character from buffer
1240  SEI : CPX £3 : BEQ rembf1 : PLP : JMP (remold)
1250  .rembf1 LDA buflen : ORA buflen+1 : BNE rembf2 : PLP : SEC : RTS
1260  .rembf2 LDA buftop : STA &FA : LDA buftop+1 : STA &FB : LDY £0
1270  LDA (&FA),Y : BVC rembf3
1280  PLP \ Examine only
1290  CLC : RTS
1300  .rembf3 PHA : SEC : LDA buflen : SBC £1 : STA buflen : BCS rembf4
1310  DEC buflen+1
1320  .rembf4 INC buftop : BNE rembf5 : INC buftop+1 : LDA buftop+1
1330  CMP £ramtop : BNE rembf5 : LDA £&83 : STA buftop+1
1340  .rembf5 LDA buflen : ORA buflen+1 : BNE rembf6 : LDA £0 : TAY : LDX £3
1350  JSR &E494 \ Generate event
1360  .rembf6 PLA : LDX £3 : PLP : CLC : RTS
1370
1380  .insold EQUW 0
1390  .remold EQUW 0
1400  .prgold EQUW 0
1410  .buftop EQUW 0
1420  .bufend EQUW 0
1430  .buflen EQUW 0
1440  .bufmax EQUW 0
1450  ]
1460  NEXT
1470 *SAVE"PSPOOL" 3200 +300 1900 1900
```


MICROMART

**PERSONAL COMPUTER SERVICE**

*Call me:*

- For unbiased, considered advice on hardware and software before you buy.
- For information on installation and use.
- For a thorough professional programming service.

**ALISTAIR HAMILTON**
2 ST PETERS COTTAGE
MENDHAM, HARLESTON
NORFOLK, IP20 0NR
**Tel: (098682) 447**

**Top quality USA made diskettes at unbeatable prices**

| 5¼" DISK | 1-4 BOXES EACH | 5-9 BOXES EACH | 10+ BOXES EACH |
|---|---|---|---|
| *DESCRIPTION* | *EX VAT* | *EX VAT* | *EX VAT* |
| Single Sided DD 40 Tracks, 48tpi | 11.50 | 10.50 | 9.50 |
| Double Sided DD 40 Tracks, 48tpi | 16.00 | 15.00 | 13.50 |
| Single Sided Quad D 80 Tracks, 96tpi | 16.90 | 15.90 | 14.90 |
| Double Sided Quad D 80 Tracks, 96tpi | 18.90 | 17.90 | 16.90 |
| *Packing & Postage* | | *75p per box* | *FREE* |

The quality of our diskettes is similar to those as used in most Top Range Software packages, for example SYMPHONY™, FRAMEWORK™, LOTUS 1-2-3™, and many others.
All our diskettes come with hub ring sleeve, write protect, library labels and lifetime guarantee.
How can we offer them so inexpensively to you?
The reasons are simple.
1) We have an exclusive sourcing deal with a major US supplier.
2) We give you fully safe, no frills packaging.

AT KAMBAL, WE TAKE PRIDE IN GIVING YOU THE BEST DEAL AND THE BEST SERVICE.

Special discounts for Government and Education authorities on 8", 5¼" and 3½" diskettes.
Dealer Enquiries welcome — Special Discounts Available. Access/Visa/Amex/Cheque/COD.
**Dial-a-Disk Now: 01-631 1213; 01-636 4441; 01-637 3940**

**Kambal Data Systems**
SERVICE · VALUE · QUALITY · COURTESY
**5 Hanson Street, London W1P 7LJ**
**Telex: 896559**

## THE NEWBRAIN FILES

A completely new book all about the NewBrain & its graphics & the 25 device drivers & all 80 operating system Z-calls with their parameters & how to get them & the most from the BASIC & how the paged memory works & CP/M's BIOS & why VIDEOTEXT & all the other things they never told you before plus lots of routines & examples & a text-handler & a database & smart graphics & details of key memory locations & what's there & how to read it & change it.

The NewBrain Files
£9.50 incl. UK p&p

Europe: £10 or $12 US by Eurocheque or equivalent in local bank notes.
Elsewhere: £12 or $15 US by Eurocheque or equivalent in convertible local banknotes.
If you pay by cheque in foreign currency at your local bank please add the equivalent of $2 to pay the rip-off bank exchange charges.
136 pages A5 size ISBM 0 948152 00 1 (c) 1985 Vitagraph Ltd.

Vitagraph Ltd
26 College Road
Bromley, Kent
BR1 3PE

1985 PC USER SHOW
2nd-4th July 1985.
Visit us on stand S14

Software Tools for Professional IBM PC Programmers

FigureFlow Ltd
9 Market Place Hadleigh Suffolk
Tel: (0473) 822917

## DISK DRIVES
**for BBC, NewBrain, CP/M, etc (special offer)**

| | | |
|---|---|---|
| 5.25" DSDD 40tr | single £125 | dual £225 |
| +PSU | £140 | £240 |
| 5.25" DSQD 80tr | single £155 | dual £290 |
| +PSU | £175 | £320 |
| **BASF disks (box of 10)** | **SSDD £16** | DSQD £25 |
| 3.5" DSQD 80tr | single £150 | dual £270 |

**P&P £5 per unit (drives) 75p diskettes.**

### Hi-Res MONITORS
Phoenix 12" Hi-Res 24MHz, Amber or Green, 80 & 40col, for **BBC, CB64, Oric, NewBrain.**
From £40 (P&P £10). Phone for details.

**Brother M1009 printer** (Cent & serial) £195; cables available for BBC, NewBrain (P&P £5).

FREE software for the NewBrain — over 4000Kbytes of S/W + information in the NBUG LIBRARY. SAE for details. Also over 30 S/W titles on cass or disk.
*SAE for full list.*
Keep up to date through NBUG —

### The NewBrain Users Group
*Annual subscription (6 newsletters, special offers, and help) £5 + postage (UK free, Europe £3, Middle East £5, Far East/Africa/America £6). Back issues available.*

### GFG Microsystems Limited
36 Armitage Way, CAMBRIDGE CB4 2UE
**Tel: (0223) 315120/207237**
*NOTE: OUR PRICES INCLUDE VAT*




# Sirius Bank Account
## by Jim McCartney

Sirius Bank Account is a bank account reconciliation program which is suitable for quite a large business and follows sound accounting practice. This application is rarely included in accounting suites, and some unfortunate clerk ends up doing it by hand. It runs on any Sirius plus an Epson MX or FX printer.

After typing in the program, make a copy onto another disk and keep the original as a master. Instructions for the use of the system are shown before the actual program listing.

```
1. Instructions for use.

1.1     Switch computer and printer on.  Put Master disk in
Drive A and Copy Disk in Drive B. Use blank formatted disk
for copy first time.

1.2     Enter the date and time as requested. Select from
MENU and Function keys.

1.3     The system consists of two files, one for the
transactions advised to you by the Bank (statement) and one
for your own chequebook transactions (Company)

2. Operating Procedure

2.1     Entering Transactions.

2.1.1   Enter DATE in format DDMMYY e.g. 060384 for 6th March
1984.
2.1.2   Enter REFERENCE as up to 6 digits plus up to 2
letters. The following are examples: 1234, 1234PL, 123456,
123456NL. The last 2 characters are for source identification
only and do not affect the sorting e.g PL = purchase ledger,
WA = wages. Otherwise the reference is the cheque number. You
will have to number lodgements yourself.
2.1.3   Enter the Debit Amount in the normal way. Enter
Credit Amounts as minus quantities, NOT in brackets !
i.e.    -12345.67       not       (12345.67)
Do not attempt to use commas e.g. 12,345.67 will not work.
2.1.4   To backspace within an entry, use backspace arrow  <-
The computer will accept the entry only up to the cursor
position.
2.1.5   To go back to a previous entry, use ESC and retype
the entry when you get there.
2.1.6   If the cursor is at the start of an entry or item
which you wish to leave just as it is, press <RETURN> or
<ENTER>
2.1.7   ESC will enable you to scroll up the column of
entries. Use SCROLL to scroll down. Hold this key down to go
some distance. Hold down REP and ESC to scroll up some
distance.

2.2     Special Function Keys.
        These are to speed up data entry. Attach adhesive
labels with the following legend to the keys to remind you
what they do.

KEY 1   REP DATE        After you press this, the transaction
date will be automatically repeated until you use CANCEL or
ESC. It does not work if you are editing previous entries,
only for new data.
KEY 2   REP DATE, INC REFNC     As above, but the REFERENCE
is automatically increased by 1 for each entry.
KEY 3   CANCEL          Cancels the above.
KEY 4   MENU            Returns you to the MENU
KEY 5   FIRST           Takes you to no.1 on the transaction
list
KEY 6   LAST            Takes you to the end of the
transaction list
KEY 7   RECORD NO.      Type in the number you want on the
transaction list, then <RETURN>. This will take you directly.
KEY 8   SEARCH REF      Searches the current list for all
occurences of a transaction reference, and displays the
records on the screen.
KEY 9   SEARCH AMOUNT   Searches the current list for all
occurrences of a particular amount of money, and displays the
records on the screen.


3. Other MENU functions

3.1     Sort and Reconcile.
        This operation is completely automatic, but the
machine will display what it is doing from time to time. The
operations are as follows:

3.1.1   Sort:           Records are read from disk A: into
memory in batches of 1000 at a time, and sorted in ASCII
order, as necessary. The batches are written to disk B: and
then merged back to a single file on A: If there are any
duplicated references, these are printed out, and you are
referred back to correct them.

3.1.2   Reconcile:      If identical records (apart from the
date) are found on both files, they are eliminated.
If records are found on each file which have the same
reference but different money amounts, they are retained, and
later printed out as disparate records.

3.1.3   Reports:        When reconciliation is complete, you
```

```
get a printout of all remaining Bank transactions, and a
total of the unreconciled debits on each side, with the net
amount outstanding.  Credits are shown as negative.

3.1.4   Copy:          The reconciled files are on disk B:,
so these are finally copied back to disk A: and disk A: is
then copied back in its entirety to disk B:.

This all proceeds automatically; you only have to press any
key to restart the system at the end of it all.

3.2     Print Transaction List
        Will list Bank or Company Transactions, completely or
in selected ranges.

3.3     Add and Display Totals and Balances
        Shows the numbers of Bank and Company transactions on
file, and the current totals.

3.4     Copy Master Disk.
        Do this after you have entered all the transactions,
and before you start Sort & Reconcile. This way, if there is
a system failure, you will not have to do it all again. The
computer will remind you in any case.

3.5     Amend Balances
        This is used only to initiate the system with
balances brought forward, or to correct a false balance. The
balances must be the same.

3.6     END
        Use this when you want to finish work for the moment.
Don't just switch off in the middle or you may corrupt you
data disks.
```

```
A>
100  '*****************************************************************
102  '* BANK4.BAS program     by J McCartney     18th February 1984    *
103  '* For Sirius 1.2 or 2.4 and Epson MX or FX printer, parallel.  *
104  '* In MSBASIC under MSDOS 1.25, compiled MS-BASIC compiler 5.32 *
105  '* If running under interpreter the AUTOEXEC.BAT must be        *
106  '* swapped for INTERP.BAT - see seperate listings of these.     *
107  '* Drops out to SYSTEM at 36490 (end of Reconcile) and 50050    *
108  '* (to DCOPY). Essential files for compiled version are:        *
109  '* COMMAND.COM, DCOPY.COM, BANK.EXE, BASRUN.EXE, AUTOEXEC.BAT.  *
110  '* Generated files are: BANK.CTL, BANK.DAT, COMPANY.DAT, on A>  *
111  '* Temp files are: BANKREC.DAT, COMPREC.DAT & CHECK.OUT on B>   *
113  '*****************************************************************


114  ON ERROR GOTO 60000
115  DIM A%(1000),B£(1000),C£(1000),I%(1000):
     DIM L%(7),V%(7),H%(7),LL£(7),UL£(7),TF%(7),DP%(7),WN$(7),IN$(7):
     DIM A$(8),B$(8),C$(8),F$(8),N%(8)
116  DEF FND$(DD%) = RIGHT$("0"+ MID$(STR$(DD% MOD C%),2),2)
      + "-" + RIGHT$("0"+ MID$(STR$((DD%\C%-1) MOD 12+1),2),2)
      + "-" + MID$(STR$(1980 + (DD%\C%-1)\12),2)
     'convert integer date to DD-MM-YYYY for display
119  GOTO 20000


120  IF RIGHT$(DATE$,4) <> "1980" THEN
     DD$=MID$(DATE$,4,2)+LEFT$(DATE$,2)+RIGHT$(DATE$,2):
     GOTO 130
122  PRINT CL$CD$CD$CD$CD$CD$CD$CD$CD$
124  INPUT"Please enter the date in the format DDMMYY : ", DD$
130  GOSUB 700
152  IF DD%=0 THEN M$=
     "That was an incorrect date or format. Please try again.":
     GOSUB 310:PRINT BE$: GOTO 122
154  SDAT$ = FND$(DD%): SDAT%=DD%
158  DATE$ = MID$(STR$((SDAT%\C%-1) MOD 12 + 1),2)
     + "-" + MID$(STR$(SDAT% MOD C%),2)
     + "-" + MID$(STR$(1980 + (SDAT%\C%-1)\12),2)
     'this is in American format MM-DD-YYYY
160  PRINT SDAT$: GOSUB 320


161  IF TIME$ > "08:30:00" THEN 184
162  PRINT HM$CD$CD$CD$CD$CD$CD$CD$CD$CD$CD$CD$
164  INPUT"Please enter the time in the format HHMM (24 hrs) : ",TT$
166  IF LEN(TT$)<>4 THEN 178
168  IF VAL(LEFT$(TT$,2)) > 23 THEN 178
170  IF VAL(RIGHT$(TT$,2)) > 59 THEN 178
172  TIME$ = LEFT$(TT$,2) + ":" + RIGHT$(TT$,2)
174  GOTO 180
178  M$="That was an incorrect time or format. Please try again.":
     GOSUB 310:PRINT BE$:GOTO 162
180  PRINT TIME$
182  FOR J%=1 TO 1000: NEXT
184  RETURN
200  '********************** UTILITY SUBROUTINES ******************
290  V% = V%(J%)+LN% : H% = H%(J%) : 'screen field position
300  PRINT E$"Y"CHR$(V%+31)CHR$(H%+31)::RETURN
     'position cursor


310  M%=(74-LEN(M$))\2:M$=SPACE$(M%)+M$+SPACE$(M%):
     PRINT E$"Y8£"RV$M$NO$HM$:RETURN
320  PRINT E$"Y8!"SPACE$(78)HM$:RETURN
     'message write and delete
330  PRINT BE$:;GOSUB 310: FOR J=1 TO 2000: NEXT: RETURN
     'bleep. & message.


400  Q£=VAL(Q$)
401  DP%=DP%(J%): LE%=L%(J%)
402  TP = 10^DP%: Q£ = FIX(Q£ * TP + .5*SGN(Q£))/TP  'round to DP% places
405  Q$ = MID$(STR$(Q£),2)
410  K%=INSTR(Q$,"."): D% = LEN(Q$)-K%
415  IF K% > 0 AND D% > DP% THEN Q$=LEFT$(Q$,K%+DP%): GOTO 435
417  IF K%=0 AND DP%=0 THEN 435
420  IF K% = 0 THEN Q$ = Q$ + "." + LEFT$(Z$,2): GOTO 435
```


MICROMART

## SOFTWARE UP TO 40% DISCOUNT

All software for IBM PC and compatibles, but most is also available for other MS-DOS machines, ie APRICOT, HITACHI, SANYO etc., and CPM-80, CPM-86, machines. State computer when ordering.

| | RRP | Our Price | | RRP | Our Price |
|---|---|---|---|---|---|
| dBASE 11 | 395 | 237 | dBASE 111 | 550 | 325 |
| Lotus 123 | 430 | 310 | Symphony | 595 | 425 |
| Framework | 550 | 325 | Psion Exchange | 495 | 375 |
| Delta | 495 | 395 | Supercalc 3 v.2 | 360 | 259 |
| Wordstar | 295 | 195 | Wordstar Professional | 399 | 265 |
| Wordstar 2000 | 465 | 310 | SAGE Accounts | 375 | 259 |
| SAGE Accounts Plus | 525 | 365 | SAGE Payroll | 195 | 145 |
| SAGE Options | 145 | 105 | SAGE Chit-Chat | 130 | 95 |
| PULSAR Accts(1 module) | 195 | 152 | Retrieve 11 | 495 | 359 |
| Multimate v. 3.3 | 455 | 325 | Multiplan | 190 | 145 |
| Spotlight | 113 | 81 | Crosstalk | 178 | 129 |
| Sideways | 54 | 39 | Electric Desk | 308 | 219 |
| Sidekick (Unprotected) | 80 | 63 | Sidekick (Protected) | 50 | 39 |
| Volkswriter De Luxe | 289 | 199 | Sycero | 595 | 450 |
| Personal Pearl | 190 | 130 | Perfect Writer 11 | 149 | 109 |
| Perfect Calc 11 | 149 | 109 | Perfect Filer 11 | 149 | 109 |
| Practibase | 85 | 65 | Practiword | 85 | 65 |
| Practicalc 111 | 85 | 65 | Practicalc 111 (bundle) | 215 | 155 |
| Knowledgeman | 444 | 319 | Open Access | 450 | 325 |
| PFS File | 115 | 85 | PFS Write | 115 | 85 |
| PFS Report | 115 | 85 | PFS Plan | 115 | 85 |
| Harvard Project Manager | 404 | 295 | Turbo PASCAL | 50 | 39 |
| MS BASIC Compiler | 365 | 275 | MS BASIC Interpreter | 325 | 245 |
| MS Bus. Basic Compiler | 550 | 415 | MS COBOL Compiler | 645 | 489 |
| MS PASCAL Compiler | 295 | 220 | MS Macro Assembler | 99 | 75 |
| MS C Compiler | 465 | 350 | MS FORTRAN Compiler | 325 | 245 |
| Norton Utilities v.2.0 | 70 | 51 | Norton Utilities v.3.0 | 91 | 66 |
| DR Assembler plus tools | 170 | 125 | Clio | 95 | 85 |
| Disk Doctor | 70 | 51 | Menugen | 48 | 38 |
| MS Flight Simulation | 55 | 42 | Typing Tutor 111 | 42 | 32 |

### COMPUTERS

**COMMODORE PC-10 RRP £1675 Our Price ONLY £1475**
Fully IBM PC Compatible, with 256kb RAM, 12" mono monitor, 5 expansion slots, dual double sided 360kb floppy disk drives, MS DOS 2.11

**COMMODORE PC-20 RRP £2795 Our price ONLY £2445**
Fully IBM PC Compatible, with 256kb RAM, Single 360 K floppy disk drive AND 10mb fixed disk drive, 4 expansion slots, 12" mono monitor, serial & parallel ports.

**ZENITH Z150 PC RRP £1900 Our price ONLY £1635**
The world's best selling IBM PC compatible! 128kb RAM, 2 x 360 K disk drives, colour graphics, serial and parallel interfaces, 3rd party maintenance contract. Also available with 320kb RAM at ONLY £1805, or with 10mb Hard Disk at ONLY £2795.

**SANYO MBC 775 RRP £2150 Our price ONLY £1795**
Fully IBM compatible PORTABLE computer, with built-in colour monitor, 256 kb disk drives, MS-DOS 2.11 operating system, 2 expansion slots.

**SANYO MBC 550** (Single 160kb disk drive, free S/W) RRP £749 **Our price £610**
**SANYO MBC 555-2** (Double 360kb drives, free S/W) RRP £1390 **Our price £1190**

### ZENITH MONITORS

| | | | |
|---|---|---|---|
| 13" High Res Col | 339 | 12" Amber screen | 85 |
| 12" Green screen | 85 | 12" Amber (IBM PC) | 109 |
| ZEN IBM-PC Colour cable | 15 | SANYO 80 column green | 95 |

### DOT MATRIX PRINTERS

| | | | |
|---|---|---|---|
| EPSON RX-80 (T) 100cps | 219 | EPSON RX-80 (F/T) 100cps | 249 |
| EPSON RX-100 (F/T) 100cps | 385 | EPSON FX-80 160cps | 375 |
| EPSON FX-100 (F/T) 160cps | 475 | EPSON LQ-1500 (Inc I/F) | 950 |
| STAR Gemini 10/FT 120cps | 215 | STAR Gemini 15 F/T 120cps | 309 |
| STAR Delta 10 F/T 160cps | 339 | STAR Delta 15 F/T 160cps | 459 |
| PANASONIC KX-P1091 (IBM) | 275 | BROTHER HR5 (P or S) | 135 |
| BROTHER M1009 Dual I/face | 177 | BROTHER M1009 (IBM) 50cps | 163 |
| BROTHER 2024 LNLQ 160cps | 945 | NEWBURY DATA DRI 8830 | 1059 |

### DAISY WHEEL PRINTERS

| | | | |
|---|---|---|---|
| BROTHER HR15 13cps | 379 | BROTHER HR25 25cps | 679 |
| BROTHER HR35 | 795 | TEC F10/40 40cps | 899 |
| C.ITOH A10/30 30cps | 499 | EPSON DX-100 | 385 |
| SILVER REED Exp 400 (P) | 223 | SILVER REED Exp 400 (S) | 255 |
| SILVER REED Exp 500 (P) | 268 | SILVER REED Exp 550 (P) | 430 |

### FULL COMMUNICATIONS PACKAGE

Thorn EMI V21/V23 AUTO ANSWER, AUTO DIAL modem, cable & SAGE CHIT-CHAT software now available for only £319.00. Normal RRP £399.00

### CSI/RODIME WINCHESTER EXTERNAL 5.25" HARD DISK

Complete with cables, host adaptor, manuals and software diskette. For IBM-PC and compatibles, SANYO 550/555, ACT APRICOT, HITACHI etc.

| | | | |
|---|---|---|---|
| 11 MByte Drive | 1084 | 22 MByte Drive | 1290 |
| 33 MByte Drive | 1466 | 44 MByte Drive | 1642 |
| 11 MByte Drive/Tape Streamer | 1914 | 22 MByte Drive Tape Streamer | 2173 |
| 33 MByte Drive/Tape Streamer | 2328 | 44 MByte Drive/Tape Streamer | 2564 |

### FLOPPY DISKS

**SPECIAL OFFER.** Unbranded but top quality Diskettes, manufactured by a major company and used as original equipment by many Software Houses. In boxes of 10, complete with HUB RING, SLEEVE and labels. Each disk has a **LIFETIME GUARANTEE. HIGHLY RECOMMENDED. 5.25"**

| | | 1 box | 2-4 | 5-9 | 10+ |
|---|---|---|---|---|---|
| SS/DD | 48 tpi | 13.50 | 12.90 | 11.90 | 11.00 |
| DD/DD | 48 tpi | 16.50 | 15.90 | 14.90 | 13.90 |
| SS/QD | 96 tpi | 17.50 | 16.90 | 15.90 | 14.90 |
| DD/QD | 96 tpi | 18.50 | 17.90 | 16.90 | 15.90 |

**Verbatim DATALIFE 5.25"**

| | | | | | |
|---|---|---|---|---|---|
| SS/DD | 48 tpi | 18.90 | 17.50 | 16.90 | 15.90 |
| DD/DD | 48 tpi | 22.90 | 21.50 | 20.75 | 19.50 |
| SS/QD | 96 tpi | 22.90 | 21.50 | 20.75 | 19.50 |
| DD/QD | 96 tpi | 27.50 | 26.50 | 25.50 | 24.50 |

**BASF or 3M 5,25"**

| | | | | | |
|---|---|---|---|---|---|
| SS/DD | 48 tpi | 16.50 | 16.20 | 15.80 | 15.20 |
| DD/DD | 48 tpi | 21.50 | 20.75 | 19.90 | 19.50 |
| SS/QD | 96 tpi | 22.50 | 21.75 | 20.90 | 20.50 |
| DD/QD | 96 tpi | 25.00 | 24.50 | 23.50 | 23.00 |

- When comparing prices, note that Carriage is FREE on ALL items, incl. Courier service for Computers, Printers and most software.
- Official orders from Government Depts & Times top 1000 welcome, otherwise strictly cash with order, please. EXPORT specialists.
- **FAST DELIVERY**, normally 48 hours. Callers by appointment please.
- **TELEPHONE 01-661 9240** for advice, and complete lists.
- **ALL PRICES EXCLUDE VAT.** PLEASE ADD 15% to total cost of order.

## ASHLEY COMPUTERS LTD

**42 Harefield Avenue, Cheam, Surrey SM2 7NE**

# MICROMART

## SEX PROBLEMS?

Solve all your RS232 problems with our universal cable. Plug and socket at both ends of the one metre cable.

**Price £29**

### GENDER CHANGERS

M → M =, £18.00, M → F = £17.00, F → F = £16.00
All are 3" long

ALSO:

One metre Centronics cables:
Amstrad ..... **£13.00**
BBC ..... **£11.20**
IBM ..... **£30.00**

One metre RS232:
Commodore 64 ..... **£30.00**
Epson PX-8 ..... **£20.00**
Epson HX-20 ..... **£16.00**

Please add £2.00 per metre to above prices for longer lengths. All prices include VAT, Postage, and Packing in Europe.

See our range of computer/printer cables, communications cables, custom cables, interfaces, data-switches.

**WATCH THIS SPACE FOR FURTHER DETAILS OR Ring our 24hr answering service on (0223) 322394 TYEPRO Ltd., 30 CAMPKIN ROAD, CAMBRIDGE CB24 2NG.**

DEALER ENQUIRIES WELCOME

## MICRO-COMPUTER INSURANCE

★ All Risks Cover (incl. Transit)

★ Increased Cost of Working – to reinstate lost data

★ Breakdown & Derangement – alternative to maintenance agreement

**Comprehensive cover at a reasonable premium:–**

Talk to us before taking a Maintenance Contract

Write with details of equipment and value to:–

**Geoffrey Hoodless & Associates**
**Insurance Consultants**
**Freepost (no stamp required)**
**Woking, Surrey GU21 4BR**

Tel: Woking (04862) 61082 Answering Service.

**Quick — before you spend £250 on a WP**

## PC JOTTER £45

A speedy, handy word processor/ editor for the IBM PC and lookalikes — does all you need!

— Fast acting, up to 60K text files in RAM.
— Cursor movement to character, word, line ends, line, page, start and end of file.
— Autowrap and right margin justification if required. Adjustable margins and tabs.
— Keeps backup file, or read only (browse) mode.
— Find and replace functions.
— Block moves, print marked block, or write marked block to a file.
— Read a file into the text.
— Include control characters for direct control of your printer.

(Price excludes VAT. Order value, £45 + £6.75 VAT)

*Cheque with order to:*

**MICROCOSM COMPUTING**
**52 Tower Street, Harrogate HG1 1HS**
**Tel: (0423) 62055**


# PROGRAM FILE

```
430     Q$ = Q$ + LEFT$(Z$,(DP%-D%))
435     IF Q£ < 0 THEN Q$="-" + Q$
440     IF LEN(Q$) < LE% THEN Q$=SPACE$(LE%-LEN(Q$)) + Q$
450     RETURN
        'return a number rounded and justified in DP% decimals as Q$.


550     ON Q%-240 GOTO 552,554,556,558,560,562,564,566,568: RETURN
552     F1% = 1: RETURN          'repeat date
554     F1% = 2: RETURN          'repeat date and increment reference
556     F1% = 0: RETURN          'cancel the above !
558     F1% = 3: RETURN          'return to MENU
560     F1% = 4: RETURN          'start of file
562     F1% = 5: RETURN          'end of file
564     F1% = 6: RETURN          'select record
566     F1% = 7: RETURN          'search keys
568     F1% = 8: RETURN          'search amounts



600     M$=OK$:GOSUB 310
602     PRINT NC$
605     Q$=INPUT$(1)
610     IF ASC(Q$) > 96 THEN Q$=CHR$(ASC(Q$)-32)
620     IF Q$ <> "Y" AND Q$ <> "N" THEN 600
630     GOSUB 320:PRINT CU$;:RETURN
        'get (Y/N) reply, taking care of lower case


700     IF LEN(DD$)<>6 THEN 820
710     Q1%=VAL(LEFT$(DD$,2))
720     Q2%=VAL(MID$(DD$,3,2))
730     Q3%=VAL(RIGHT$(DD$,2))
740     IF Q1%<1 OR Q1%>31 THEN 820
750     IF Q2%<1 OR Q2%>12 THEN 820
760     IF Q3%<80 THEN 820
770     IF (Q2%=2 OR Q2%=4 OR Q2%=6 OR Q2%=9 OR Q2%=11) AND Q1%=31 THEN 820
780     IF Q2%=2 AND Q1%=30 THEN 820
790     IF Q2%=2 AND Q1%=29 AND (Q3% MOD 4 > 0) THEN 820
800     DD% = Q1% + Q2%*C% + (Q3%-80)*C%*12
810     GOTO 830
820     DD% = 0
830     RETURN
        'validate date in DDMMYY and return integer date.


850     OPEN "R",£1,FI$,21:
        FIELD £1, 2 AS W1$, 8 AS W2$, 11 AS W3$:
        FIELD £1, 21 AS WW$: RETURN
860     OPEN "R",£F%,FI$,21:
        FIELD£F%, 2 AS A$(F%), 8 AS B$(F%), 11 AS C$(F%):
        FIELD£F%, 21 AS F$(F%):
        RETURN

999     '************************ PROCEDURE SUBROUTINES **********************

1000    '********************** Sub Input a Field ******************
1010    DEF SEG
1020    J%=SF%
1030    IF J%<SF% THEN J%=SF%
1040    GOSUB 290                                   'field posn.
1045    L%=0
1048    A$=""
1050    Q$ = INPUT$(1)
1055    Q% = ASC(Q$)
1057    IF Q%>31 AND Q%<128 THEN 1085
1058    IF Q%<241 THEN 1062     ELSE GOSUB 550
1059    IF F1%<3  THEN 1050
1060    IF F1%=3  THEN IN$(1)="":IN$(2)="":IN$(3)="";
        IF R%>N%  THEN PRINT DL$: RETURN  ELSE RETURN   'clear the record
1061    IF F1%>3  THEN RETURN
        'implement Function keys. ----->> 30040 ----->> 30130 ff.


1062    IF L%=0 THEN 1070
1063    IF Q%=13 THEN 1100                      'mid field control chars.
1064    IF Q%=27 THEN 1040
1065    IF Q%=8  THEN L%=L%-1:PRINT Q$;: A$=LEFT$(A$,L%): GOTO 1050
1066    GOTO 1050


1070    IF Q%=13 THEN Q$=IN$(J%): L%=LEN(Q$): GOTO 1120
                                                'start field control chars.
1071    IF Q%=8  THEN 1045
1072    IF J%=1  THEN 1075
1073    IF Q%=27 THEN J%=J%-1: GOTO 1030
1074    GOTO 1050


1075    IF Q%=27 THEN F1%=0: GOTO 1078          'start record control chars.
1076    IF Q%=10 THEN F1%=0: GOTO 1081
1077    GOTO 1050

1078    IF R%=1 THEN 1080
1079    PRINT SD$DL$;: R%=R%-1: LN%=LN%-1: IF LN%=0 THEN LN%=1
1080    GOSUB 3000: GOTO 1020
        'read and display the next record up or down the file.


1081    IF R%>=N%+1 THEN R%=N%+1: GOTO 1083
1082    PRINT CD$;: R%=R%+1: LN%=LN%+1: IF LN%=25 THEN LN%=24
1083    GOSUB 3000: GOTO 1020


1085    IF Q% > 96 THEN Q%=Q%-32: Q$=CHR$(Q%)       'normal characters
1088    PRINT Q$;:A$=A$+Q$
1090    L%=L%+1
1095    IF L% < L%(J%) THEN 1050                    'get next character

1096    Q$=INPUT$(1)                                'at end of field
1097    Q%=ASC(Q$):IF Q%=13 OR Q%=27 OR Q%=8 OR Q%=10 THEN 1062
1098    IF Q%>240 THEN GOSUB 550:
        IF F1%=3 THEN IN$(1)="":IN$(2)="":IN$(3)="": PRINT DL$: RETURN
1099    GOTO 1096               'dump further input until control character
```

# PROGRAM FILE

```
1100    Q$=LEFT$(A$,L%)
1120    IF INSTR(BL$,Q$) <> 0 THEN Q$="":Q%=0:GOTO 1180
              'null it if only blanks
1180    ON TF%(J%) GOTO 1200,1200,1400,1500,1600
        'check the data is within limits

1200    GOSUB 400
1205    IF J%=3 AND Q£=0 THEN
        M$="Zero entries will be eliminated during sorting !": GOSUB 330
1210    IF ABS(Q£) < LL£(J%) OR Q£ > UL£(J%) THEN 1900 ELSE 2000
        'floating point numbers


1400 :  'not used
1500 :  'not used


1600    IF J%=2  OR J%=6 THEN 1630
1610    DD$=LEFT$(Q$,6): GOSUB 700: IF DD%=0 THEN 1900
1620    GOSUB 320: GOSUB 290: PRINT HI$FND$(DD%)LO$;: GOTO 2025
1630    Q=VAL(Q$): IF Q<LL£(J%) OR Q>UL£(J%) OR Q<>INT(Q) THEN 1900
1640    IF LEN(Q$) > LEN(STR$(Q))-1 THEN QX$=MID$(Q$,LEN(STR$(Q)))
                                    ELSE QX$=""
1650    Q$ = LEFT$(Q$,LEN(STR$(Q))-1) + SPACE$(9 - LEN(STR$(Q)) - LEN(QX$))
        + QX$:  GOTO 2000


1900    PRINT BE$;:M$=WN$(J%):GOSUB 310
        'display warning
1920    GOSUB 300:GOTO 1045


2000    GOSUB 320       'clear any warning string
2005    GOSUB 290
2010    PRINT HI$Q$LO$;
2025    IN$(J%) = Q$
2100    IF J%<EF% THEN J%=J%+1: GOTO 1030
2105    IF J%>3 THEN RETURN
2110    LSET W1$ = MKI$(DD%):
        LSET W2$ = IN$(2):
        LSET W3$ = IN$(3):
        PUT£1, R%                       'file it
2200    RETURN


2999    '******************** Read & display or print a record
3000    GET£1,R%:
        DAT$ = FND$(CVI(W1$)):
        IN$(2) = W2$:
        IN$(3) = W3$
3010    IN$(1) = LEFT$(DAT$,2) + MID$(DAT$,4,2) + RIGHT$(DAT$,2)
3012    IF MP%=1 OR MP%=2 OR MU%=6 THEN 3040
3015    H%=22: V%=LN%: GOSUB 300: PRINT HI$R%LO$;
3020    J%=1: GOSUB 290: PRINT DAT$;:
        J%=2: GOSUB 290: PRINT IN$(J%);:
        J%=3: GOSUB 290: PRINT IN$(J%):
        IF LN%=24 THEN LN%=23: J%=1: GOSUB 290
3030    RETURN

3040    LPRINT USING PF$;R%;DAT$;W2$;VAL(W3$): RETURN


3099    '******************** File control record
3100    TI%=VAL(TIME$)*60 + VAL(MID$(TIME$,4))
3110    LSET C1$ = MKI$(BR%):
        LSET C2$ = MKD$(BX£):
        LSET C3$ = MKD$(BT£):
        LSET C4$ = MKI$(CR%):
        LSET C5$ = MKD$(CX£):
        LSET C6$ = MKD$(CT£):
        LSET C7$ = MKI$(SDAT%):
        LSET C8$ = MKI$(TI%):
        PUT£8,1: RETURN


3199    '******************** Read Control Record
3200    GET £8,1:
        BR% = CVI(C1$):
        BX£ = CVD(C2$):
        BT£ = CVD(C3$):
        CR% = CVI(C4$):
        CX£ = CVD(C5$):
        CT£ = CVD(C6$):
        DD% = CVI(C7$):
        TI% = CVI(C8$):
        RETURN


4000    '************************ Total transactions & balances
4010    FOR K% = 1 TO 2
4020    CR£=0: DR£=0
4030    IF FG%=0 THEN IF K%=1 THEN N%=BR%: FI$="a:bank.dat"
                              ELSE N%=CR%: FI$="a:company.dat"
4040    IF FG%=1 THEN IF K%=1 THEN N%=BR%: FI$="b:bankrec.dat"
                              ELSE N%=CR%: FI$="b:comprec.dat"
4045    GOSUB 850
4060    FOR J%=1 TO N%
4070    GET£1, J%
4080    IF VAL(W3$) < 0 THEN CR£=CR£ + VAL(W3$)
                        ELSE DR£=DR£ + VAL(W3$)
4090    NEXT J%
4100    IF K%=1 THEN BT£=CR£+DR£: BC£=CR£: BD£=DR£:
             ELSE CT£=CR£+DR£: CC£=CR£: CD£=DR£
4105    CLOSE£1
4110    NEXT K%
4130    RETURN


20000   '************************** DATA DIVISION ************************
20010   OK$="Are you sure that this is right ? (Y/N)"
20015   A$=""
20017   COPY$="TAKE A COPY OF YOUR MAIN DISK BEFORE PROCEEDING !"
20020   E$=CHR$(27):CL$=E$+"E":HM$=E$+"H":RV$=E$+"p":NO$=E$+"q":ED$=E$+"B":
```


MICROMART

The Core Store

## C LANGUAGE PROGRAMMING?

We offer the complete, professional service for all your C language programming needs. We stock a range of C compilers, utilities, books, function libraries and programming aids, all carefully selected and evaluated to give you the tools you need at an attractive price. Write or ring now for our comprehensive catalogue covering:

- C compilers
- General purpose function libraries
- Database function libraries
- Communications function libraries
- Screen and graphics function libraries
- Programming aids and debugging tools
- Real-time utilities
- Math/science function libraries

## C COMPILERS

8088/8806

| | |
|---|---|
| • DeSmet | £145 |
| • Lattice | £435 |
| • Computer Innovations | £345 |
| • C Systems | £220 |
| • Mark Williams | £435 |
| • Wizard C | £475 |
| 8080/Z80 | |
| • BDS C | £135 |

**This month's special offers**

### IBM PC C LANGUAGE TUTORIAL

- "Introducing C" Disk Tutor and Interpreter
- Kernighan and Ritchie "The C Programming Language"

Introductory Offer — £130

### IBM PC C LANGUAGE STARTER PACK

- DeSmet C Compiler
- Kernighan & Ritchie "The C Programming Language"
- Essential Software C Utility Library (200+ graphics, DOS, screen functions with source)

Usual price £320 — Introductory offer £250

Prices exclude £4.00 P&P and VAT

**The Core Store Limited**
**59 Station Rd, Northwich, Cheshire CW9 5LT**
**Tel: 0606 45420**

MAINS SURGE

***CAUSES EXTENSIVE DAMAGE!!!***

Are your computers, printers disc drives and television **YET PROTECTED?**

Our **HOUSEHOLD SUPPRESSOR** is the one you are looking for at only **HALF** the average price of other makes. It is twin outlet 2 amp/500 watt (total load) and comes complete with plug for

**ONLY £9.95**

+ £1.43 p&p. Cheques & PO made payable to:

**ESSTONE ELECTRICAL**
**UNIT 8, BALFIELD ROAD, PORTHLEVEN, CORNWALL TR15 9BQ**

*Please allow 28 days for delivery*

# MICROMART

## DATAMANAGEMENT

**— leading the way with QL software**

| | |
|---|---|
| **SBUTIL** | (£9.00) — Possibly the last word in Basic programming utilities. |
| **BACKUP** | (£8.00) — An independent, fast and reliable backup to/from Mdv or Disk. |
| **TERMINAL** | (£12.50) — A full featured terminal package. |
| **CHARGEN** | (£10.00) — A comprehensive character generator. |
| **SBEXTRAS** | (£6.00) — Many extra features and procedures to add to SuperBasic. |
| **QLDIARY** | (£10.50) — A superBasic Diary package. |
| **QLLIFE** | (£6.00) — This M/L version for the QL's graphics is the prettiest to date. |
| **DATABOSS** | (£10.50) — A user definable Database in SuperBasic. |
| **MAILBOSS** | (£10.50) — A special version of DATABOSS for handling those mailing lists. |
| **QLFED** | (£12.50) — If you ever needed to modify a file this is your program. |
| **ANIMAL** | (£10.50) — A game of 'Think of an Animal' for Archive — very instructive. |
| **PROJECT** | (£8.00) — A fast, pretty 3D presentation of various equations. |
| **FM** | (£12.50) — A file management package for Disk/Mdv. Fast and effective file control. |

All 100% m/language, multi-tasking unless SuperBasic is stated. Prices shown include VAT & P/P, but add £1.99 per order for a mdv cartridge.

Cheques or P/Os to **Data Management:** 12 Larch Way, Haxby, YORK, YO3 8RU or telephone (0904) 760351 (anytime) for our latest list, which is growing daily.

Have **you** written any good **QL** software. We are looking for the **best** software and are prepared to pay the **best** royalties.

Our latest list and newsletter explains in much more detail. Write or phone now for your copy. We also have a number of 'free bees' such as **SCREENCOPY, NEATLIST, DIRMAP, & FREEMEN** which are distributed with orders. However, send a cartridge and a large SAE and we will send copies with your list and newsletter.

## AMSTRAD CPC 464

**UTILITY PROGRAMS FROM PRIDE**

Always the first and the best software. Offering more features and better value for money than other similar programs available. We also offer a fast reliable and friendly mail-order service. No enquiry is ignored. SAE.

**SYCLONE 2**
**Copy and/or convert your programs to load in up to four times faster.**
Features include:
* Commands, available from Basic.
* Also disk drive compatible.
* Choice of seven loading speeds. 1000 to 4000 baud.
* Comprehensive header reader
* Load and list protected basic programs.
* List your "Welcome" tape. Cassette £6.95 Disk £10.95.

**TRANSMAT**
**Transfer your programs onto the Amstrad Disc System.**
Features include:
* Faithfully transfer all programs
* Add relocator if necessary.
* Auto or non auto modes.
* Erase or rename programs.
* Comprehensive header reader.

Cassette £7.95 Disk £11.95.

**ZEDIS**
**A comprehensive machine code editor and disassembler.**
Features include:
* Continual menu display.
* Break point insertion.
* Register inspection.
* High speed hex code/string search.
* Hex code/string input.

Instructions included to disassemble ROMs.
Cassette £6.95. Disk £10.95.

**PRINTERPAC1**
**A printer enhancement program for the DMP1 and Epson compatible printers.**
Features include:
* Screen dump in all modes.
* Text dump in all modes.
* Two sizes of dump for Epson compatible printers.
* Three new type styles for the DMP1.
* Abbreviated codes to printer.

Cassette £5.95. Disk £9.95.

**LOWER CASE DESCENDERS FOR THE DMP1 PRINTER**

**SCRIPTOR**
**A two program printer enhancement pack for the DMP1 printer.**
This exciting new pack offers 6 new definable character fonts, included are; Real Writing, Italics, Futuristic, bold and heavy styles, plus, at last, **LOWER CASE DESCENDERS** and Amsword or Tasword compatability.

Cassette £6.95
Disk £10.95

**SPECIAL OFFER**
**Worth £3.95**
Buy more than one title and get a cassette containing a real time digital alarm clock FREE including its P&P (while stocks last).

Europe — add £1.00 per title, rest of world — add £1.50 per title.
** All disc based titles have FREE disc space available to user **

**ALL PRICES INCLUDE VAT AND P&P**

**PRIDE UTILITIES LTD (B)**
**7 CHALTON HEIGHTS, CHALTON, LUTON, BEDS LU4 9UF**

*CUSTOMER INQUIRIES*
**0582 411686** (9-10am)


# PROGRAM FILE

```
        SD$=E$+"I":HI$=E$+"(":LO$=E$+")":BE$=CHR$(7):SC$=E$+"J":PRINT E$"x1"C$
20021   'escape, clear, home, reverse, normal, cursor down.
        scroll down, bright, dim, bell, clear to end, enable line 25.
20030   KX$=E$+"}":KE$=E$+"{":CH$=E$+"+":NC$=E$+"x5":CU$=E$+"v5":DL$=E$+"I":
        LF$=CHR$(10):FF$=CHR$(12):CO$=CHR$(15):CX$=CHR$(18):SP$=E$+"N"+CHR$(6)
20031   'disable keyboard,enable kb..clear bright,no cursor,cursor on,del line.
        PRINTER line feed, form feed, condensed, normal, skip perforation.
20035   Z1%=1:Z2%=2:C%=100: Z$="000000": DO%=0
20045   T% = 1000       'record block to sort

21000   OPEN "R",£6,"b:check.out",1             'make sure copy is in
21010   CLOSE £6
21020   OPEN "R",£8,"b:BANK.CTL",40
21025   FIELD £8,       2 AS C1$, 8 AS C2$, 8 AS C3$, 2 AS C4$, 8 AS C5$,
                        8 AS C6$, 2 AS C7$, 2 AS C8$
21030   GOSUB 3200: D2£=DD%: D2£=D2£ * 10000 + TI%      'date/time on copy
21035   CLOSE£8

21040   OPEN "R",£8,"a:BANK.CTL",40
21050   FIELD £8,       2 AS C1$, 8 AS C2$, 8 AS C3$, 2 AS C4$, 8 AS C5$,
                        8 AS C6$, 2 AS C7$, 2 AS C8$
        'bank recs, bank bal, sum bank trx, compamy recs, company bal,
         sum comp trx, system date, time. Balances b/f, no trx.
21052   GOSUB 3200: D1£=DD%: D1£=D1£ * 10000 + TI%      'date/time on master
21054   IF D1£ < D2£ THEN M$ =
        "You have an old copy disk in the master drive. Is this OK? (Y/N)":
        GOSUB 310: GOSUB 602: IF O$="N" THEN 21500
21056   IF D1£ = D2£ THEN M$ =
        "The copy disk is the same as the master. Is this OK? (Y/N)":
        GOSUB 310: GOSUB 602: IF O$="N" THEN 21500
21060   GOSUB 120: GOSUB 3100
        'get system date,time, write control rec.
21070   F1%=0                   'function flag
21080   LN%=1                   'screen line pointer
21090   PF$=SPACE$(10)+"£££££     \       \     \       \ £££££££..£f"
21095   PF2$=SPACE$(15)+"££££     \       \     \       \  £££££££..££":
        PF2$=PF2$+PF2$
21100   PH1$=SPACE$(10)+"LIST OF  BANK  TRANSACTIONS  ON  \         \  AT  " +
        "\    \  HRS."
21110   PH2$=SPACE$(10)+"LIST OF COMPANY TRANSACTIONS ON  \         \  AT  " +
        "\    \  HRS."
21130   PH3$=SPACE$(8)+"DUPLICATED  BANK  TRANSACTIONS  ON  \         \  AT  " +
        "\    \  HRS."
21140   PH4$=SPACE$(8)+"DUPLICATED COMPANY TRANSACTIONS ON  \         \  AT  " +
        "\    \  HRS."
21150   PH5$=SPACE$(12)+"DISPARATE  TRANSACTIONS  ON  \         \  AT  " +
        "\    \  HRS."
21160   PH6$=SPACE$(8)+"UNRECONCILED BANK TRANSACTIONS  ON  \         \  AT  " +
        "\    \  HRS."
21170   PH7$=SPACE$(8)+"BANK RECONCILIATION STATEMENT  ON  \         \  AT  " +
        "\    \  HRS."
21180   PT$="£££££££..££"
21190   GOTO 22010

21500   M$="Please change your disks and press any key to re-start.":
        GOSUB 310
21510   O$=INPUT$(1)
21520   CLOSE: GOTO 21000

22000   '********************* Data Dictionary
22010   DATA 6,0,30,6,6,5,0,"Invalid date !"
22020   DATA 8,0,42,1,999999,5,0,"Must be whole number 1 to 999999 !"
22030   DATA 11,0,53,0,99999999.99,2,2,"£0 to £99999999.99 please !"
22040   DATA 11,16,36,0,99999999.99,2,2,""
22050   DATA 11,19,36,0,99999999.99,2,2,""
22060   DATA 8,0,42,1,999999,5,0,"Must be whole number 1 to 999999 !"
22070   DATA 11,0,53,0,99999999.99,2,2,"£0 to £99999999.99 please !"
22080   FOR J%=1 TO 7: READ L%(J%),V%(J%),H%(J%),LL£(J%),UL£(J%),TF%(J%),
        DP%(J%),WN$(J%):
        NEXT            'read input parameters.

25000   '************************ MENU ************************************
25010   PRINT CL$CU$;:  GOSUB 320: MU%=0
25020   PRINT SPC(22)RV$"      BANK RECONCILIATION PROGRAM      "NO$
25030   PRINT CD$SPC(32)"By Jim McCartney
25040   PRINT SPC(34)"February 1985
25050   PRINT CD$SPC(17)RV$" 1 "NO$TAB(36)"Enter Bank transactions
25060   PRINT CD$SPC(17)RV$" 2 "NO$TAB(36)"Enter Company transactions
25062   PRINT CD$SPC(17)RV$" 3 "NO$TAB(36)"Print transaction lists
25064   PRINT CD$SPC(17)RV$" 4 "NO$TAB(36)"Add & display totals & balances
25066   PRINT CD$SPC(17)RV$" 5 "NO$TAB(36)"Copy Master Disk
25070   PRINT CD$SPC(17)RV$" 6 "NO$TAB(36)"Sort and Reconcile transactions
25082   PRINT CD$SPC(17)RV$" 7 "NO$TAB(36)"Amend balances
25095   PRINT CD$SPC(17)RV$" 8 "NO$TAB(36)"END.
25100   PRINT CD$SPC(17)"Please select your option and "RV$"ENTER"NO$" or "RV$"R
ETURN"NO$"  ";
25120   INPUT " ",O$
25130   O% = VAL(O$):IF O%<1 OR O%>8 OR O%<>VAL(O$)
        THEN M$=" ENTER   1 TO 8, PLEASE !!":
        GOSUB 330: GOTO 25010

25150   MU%=O%
25200   ON MU% GOTO 30010,30010,40010,45010,50010,35010,42010,55010

30000   '************************* INPUT DATA *****************************
30010   IF MU%=1 THEN FI$ = "a:bank.dat"        : N%=BR%:
                 ELSE FI$ = "a:company.dat"     : N%=CR%
30015   SF%=1:EF%=3                     'start & end data fields
30020   GOSUB 850                       'open the file

30021   F1% = 0                         'reset function keys
30022   R% = N% + 1                     'first unused record
30025   PRINT CL$: GOSUB 320
30026   IF MU%=1 THEN PRINT SPC(30)RV$"BANK TRANSACTIONS"NO$CD$
                 ELSE PRINT SPC(28)RV$"COMPANY TRANSACTIONS"NO$CD$
30027   PRINT HI$SPC(20)"Record"SPC(3)"Date"SPC(8)"Reference"SPC(7)"Amount"LO$:
        LN%=5
30029   'F F1% = 4 THEN F1% = 0: GOSUB 3000              (from 30140)
```

# PROGRAM FILE

```
30030  WHILE F1%<3                              'General input procedure
30032          H%=22: V%=LN%: GOSUB 300: PRINT HI$R%LO$          'record no
30035          GOSUB 1010                                        'input sub
30040          IF F1%>=3 THEN 30120
30050          IF R%<N% THEN R%=R%+1: LN%=LN%+1: GOSUB 3000: GOTO 30120
30060          N%=R%: R%=R%+1: IF MU%=1 THEN BR%=N%
                               ELSE CR%=N%              'update record no.
30065          IF N% = 6000 THEN F1%=4: GOTO 30120
30066          IF N% > 5980 THEN M$="Only space for"+STR$(6000-N%)+
               " more records !": GOSUB 330
30070          ON F1% GOTO 30090,30100
30080          IN$(1)="":IN$(2)="":IN$(3)="": GOTO 30110
30090          IN$(2)="": IN$(3)="": GOTO 30110
30100          IN$(3)="": IN$(2)=RIGHT$(MID$(STR$(VAL(IN$(2))+1),2),6)
               + SPACE$(6-LEN(RIGHT$(MID$(STR$(VAL(IN$(2))+1),2),6)))
               + RIGHT$(IN$(2),2)                            'inc reference
30110          LN%=LN%+1: IF LN%=24 THEN PRINT: PRINT :LN%=23
30120  WEND
30125  IN$(1)="":IN$(2)="":IN$(3)=""
30130  IF F1% = 3 THEN GOSUB 3100: CLOSE£1: GOTO 25010          'write
       control record & exit to menu
30140  IF F1% = 4 THEN R%=1: GOTO 30025                  'goto start of file
30150  IF F1% = 5 THEN 30021                             'goto end of file

30160  IF F1% <> 6 THEN 30170                    'get a record from mid-file
30162  V%=LN%: H%=13: GOSUB 300:
       PRINT DL$HI$"Record: "LO$;: INPUT"",Q$: Q%=VAL(Q$)
30163  IF Q%<1 OR Q%>N%
       THEN     M$ = "Invalid Record Number!": GOSUB 330: GOSUB 320:
       GOTO 30165
       ELSE     R% = Q%
30165  GOSUB 300: PRINT DL$
30168  GOSUB 3000: F1%=0: GOTO 30030



30170  IF F1% <> 7 THEN 30300                   'search for a key reference
30180  LN%=5: V%=LN%: H%=21: GOSUB 300: PRINT SC$HI$"Search for  :"LO$
30185  RF%=0: SE%=0: SF%=6: EF%=6: GOSUB 1010             'input search key
30190  SE=VAL(IN$(6))
30200  FOR R%=1 TO N%:
               GET£1,R%
30210          IF SE=VAL(W2$) THEN LN%=LN%+1: GOSUB 3000: SE%=SE%+1: RF%=R%
30220  NEXT R%
30240  GOTO 30500


30290  'F1%=8 by default                          search for an amount ££.pp.
30300  LN%=5: V%=LN%: H%=21: GOSUB 300: PRINT SC$HI$"Search for  :"LO$
30310  RF%=0: SE%=0: SF%=7: EF%=7: GOSUB 1010             'input search ££.pp
30320  SE£=VAL(IN$(7))
30330  FOR R%=1 TO N%:
               GET£1,R%
30340          IF SE£=VAL(W3$) THEN LN%=LN%+1: GOSUB 3000: SE%=SE%+1: RF%=R%
30350  NEXT R%


30500  PRINT :PRINT SPC(20);"Number of records found:                ";SF%
30510  M$="Press a key to continue.": GOSUB 310
30520  Q$=INPUT$(1): SF%=1: EF%=3
30530  IF SE%=0 THEN 30021
30540  R%=RF%: F1%=0: GOSUB 300: PRINT SC$;
       GOSUB 320: GOSUB 3000: GOTO 30030



35000  '****************************** SORT and RECONCILE ********************
35010  PRINT CL$NC$CD$SPC(29)RV$" SORT AND RECONCILE "NO$
35011  M$="RETURN to contine: ESC for Menu": GOSUB 310
35012  V%=5:H%=16
35014  GOSUB 300:PRINT BE$RV$COPY$NO$HM$
35018  Q$=INPUT$(1): IF Q$<>CHR$(13) AND Q$<>CHR$(27) THEN 35014
35019  GOSUB 320:IF Q$=CHR$(27) THEN 25010
35020  PRINT CD$CD$CD$CD$CD$CD$"To run this program you must have the printer o
 n line and have a formatted
35022    PRINT CD$ "          Copy disk in drive B. Please check that you
have don e these.
35030  GOSUB 310
35040  Q$=INPUT$(1)
35050  IF Q$=E$ THEN 25010
35060  IF ASC(Q$)<>13 THEN 35040
35065  M$="PLEASE TURN THE PRINTER ON!": GOSUB 310: LPRINT: GOSUB 320
35070  OPEN "R",£6,"b:check.out",1
35080  CLOSE£6: PRINT CL$KX$    'keyboard disabled
35082  FOR MS% = 1 TO 2         '*************** START MAIN LOOP
35085  FI$="a:source.dat"
35090  IF MS%=1 THEN NAME "a:bank.dat"     AS FI$: NR%=BR%:
               ELSE NAME "a:company.dat" AS FI$: NR%=CR%
35091  GOSUB 850                'open source
35092  W%=NR%: F%=1
35095  PRINT CD$;:
       IF MS%=1 THEN PRINT"         Sorting Bank Transactions....."
               ELSE PRINT"          Sorting Company Transactions..."


35100  WHILE W% > 0
35101          'read source file 1000 records at a time, sort them if
               necessary, and write them to merge files £2 to £7 on drive B:
               allowing up to 6000 records on either source file.
35110          IF W%>T% THEN N%=T%: W%=W%-T%
                        ELSE N%=W%:  W%=0
35120          F%=F%+1: S%=(F%-2)*T%    'logical file no., record no.
35125          PRINT "                  Batch";F%-1
35130          FI$="b:merge"+MID$(STR$(F%),2)+".dat" : GOSUB 860
35140          FOR J% = 1 TO N%:
                        GET£1,J%+B%:
                        A%(J%) = CVI(W1$):
                        B£(J%) = CVD(W2$):
                        C£(J%) = VAL(W3$):
                        I%(J%) = J%:
               NEXT J%                              'read 1000 recs. to arrays

35150          C = VAL(MKD$(B£(1)))     'sort on numeric part of string
35160          FOR J% = 1 TO N%-Z1%     'insertion index sort, skip at 35180
```


MICROMART

The **KEY** to **FILEHANDLING** with

MICROSOFT-C LATTICE-C

**C**

WHITESMITHS-C DESMET-C

**MULTIKEY**

Ready to use library & routines.
Uses B-tree indexing. £170 + VAT
Version for BASIC users £90 + VAT
Phone for fact sheet. Tel: (0786) 85697

CAIRN ASSOCIATES LTD, THORNHILL, STIRLING FK8 3PL

**CAIRN**

**QL**

**FILE MANAGER:** Shows a combined, sorted and colour coded directory of any one or two drives. Simplified load, save, copy, delete, format and inspect. Powerful wild cards permit editing of categories of file name in one instruction, e.g. copy all files earlier than given date, appending "-bak" to the name.

**FONT EDITOR:** QL windows have 2 fonts. Either can be edited, changed in scope (e.g. chars below code 31), and saved. Includes new Super Basic command to switch fonts. Rapid and simple editing, display full font + user specified text.

**FREE OFFER!** Graphics effects demo, 30 minutes long, included with every purchase! Treasury of effects!

Either program **£10** inclusive
both **£16** inclusive
Graphics Demo available separate £5

Large SAE for details from:—

**SALTIGRADE SOFTWARE**
**31 ROYAL TERRACE, EDINBURGH EH7 5AH**

**scientific computer simulations**

We offer four packages on cassette tape for the Sinclair Spectrum 48K, each complete with illustrated manual, to solve the differential equations, and do other calculations, for the following:

ELECTRON IN A MAGNETIC FIELD (2 programs) – magnetic bottle – Van Allen belt – price £15

ROTATION (2 programs) – Coriolis force – precession and nutation of gyroscope – price £15

GRAVITY (4 programs) – many-body – Kepler's Laws – tidal force – Lagrangian points – price £30

RELATIVITY (4 programs) – simultaneity – dynamics – twins' paradox – what we see near the speed of light — price £30

Please add 95p post & packing to all orders. Allow 21 days for delivery. Write to:

Anima Scientific Computing,
23 Crawley Avenue,
Hebburn,
Tyne & Wear NE31 2LT.

Telephone: 0632 832825

## SINCLAIR COMPUTER REPAIRS

Fast, reliable repairs by experienced engineers, having serviced Sinclair computers since the introduction of the ZX80. Our price is inclusive of all parts, labour, postage and VAT irrespective of fault. *No hidden charges. *While-you-wait service available. Spectrum £18.75. ZX81 £11.50. 16K Ram £9.95. Call or send with cheque or P.O. to: TV Services of Cambridge Ltd, French's Road, Cambridge CB4 3NP. Tel: (0223) 311371.

*Now available*

## SPECTRUM 'XK' MEMORY EXPANSION SYSTEM

**XK System Kit £15.95 inc. VAT**
**XK System Factory fitted £20.95 inc. VAT**

## UPDATE

**ADD A DISK DRIVE FACILITY TO YOUR CASSETTE SYSTEM**

**AMSTRAD 464**

**MAGIC PEN:** By itself, probably the ultimate ART utility. Save to tape — supplied with loader sketch, or filled, **£4.95. SYMBOL 464:** Design your own lettering, copy pictures from anywhere or original. Save to tape plus decimal print-out, **£3.95. BIG LETTERS:** By itself it's good, with the above, fantastic. Big lettering to 224 pixels. Save to tape, **£2.95. PAINT 464:** Add the fill function. Full or alternative line, plus program subroutine supplied, **£3.50. MOVE IT:** Move the files produced around with this handy utility, **£2.50. THE ARTISTS EASEL:** Now with airbrush + screen dump facility: A collection of integrated graphic functions and subroutines, "25" options plus MAGIC PEN, plus SYMBOL 464, plus BIG LETTERS, plus PAINT 464, plus MOVE IT with handbook. The complete collection: **£9.95**

*All price inc. p&p.*
*Export enquiries welcome*

**BINARY BANANA**
**c/o Pitec Ltd, Park Crescent,**
**Peterborough PE1 4BG**

## TABLE-TOP WORKSTATIONS

*As supplied to schools, colleges and local authorities.*



*Simple self-assembly — in beige MFC*

**£15.99 — AT 03**
*(Now features a sliding deep paper/ storage basket)*

**£35 — TW 05**



**£11.99 — TW 02**
*(Also available 460mm wide)*
**(£8.99 — TW 01)**
*4-gang socket, plug, 2.5 metre flex, add £12

| Code No | Rubber feet | Angled platform | Non-slip mat | Pull-out shelf | 4-gang socket, plug + 2½ metre flex |
|---|---|---|---|---|---|
| TW 01 | √ | √ | √ | | * |
| TW 02 | √ | √ | √ | | * |
| AT 03 | √ | Flat | √ | Basket | |
| TW 05 | √ | √ | √ | √√ | √ |

Cheques/PO's payable to **PINEWOOD DESIGNS, UNIT 12, EXEBRIDGE INDUSTRIAL ESTATE, EXEBRIDGE, Nr BAMPTON, DEVON.** Please add 15% VAT + £2 carriage (UK mainland) with each order. Dealer/Export enquiries welcome. **Tel: (0884) 258923** (24 hrs)


# PROGRAM FILE

```
35170                   R = VAL(MKD$(B£(J%+Z1%)))
35180                   IF C <= R THEN C=R: GOTO 35290
35190                   U%=J%: L%=1: FL%=1
35200                   WHILE U% >= L% AND FL%=1          'binary search
35210                           R%=(U%+L%)\2Z%: X=VAL(MKD$(B£(I%(R%))))
35220                           IF R<X THEN U%=R%-Z1%: GOTO 35250
35230                           IF R>X THEN L%=R%+Z1%:R%=L%: GOTO 35250
35240                           IF R=X THEN FL%=0
35250                   WEND
35260                   RF%= I%(J%+1)                     'free record
35270                   FOR K%=J% TO R% STEP -Z1%:
                                I%(K%+Z1%)=I%(K%):
                        NEXT K%
35275                   IF R%=0 THEN R%=1         'for first record
35280                   I%(R%)=RF%                        'insertion
35290           NEXT J%

35295           N%(F%)=N%                 'no of recs. in merge file
35296           NUL% = 0                  'number of null records this batch

35300           FOR J%=1 TO N%:
                IF C£(I%(J%))=0 THEN NUL%=NUL%+1: GOTO 35304
                'throw out null records & keep count
35301                   Q£=C£(I%(J%)):DP%=2:LE%=11:GOSUB 402
                        'convert number back to string
35302                   LSET A$(F%) = MKI$(A%(I%(J%))):
                        LSET B$(F%) = MKD$(B£(I%(J%))):
                        LSET C$(F%) = Q$:
                        PUT£F%,J%-NUL%
35304           NEXT J%                   'write the merge file

35306           N%(F%)=N%(F%)-NUL%: NR%=NR%-NUL%          'count nulls out
35310           NF%=F%                    'no. of files
35330   WEND
35340   CLOSE£1

35350   LSET W2$ = STRING$(8,0)
35400   IF MS%=1 THEN FI$="a:bank.dat"
                 ELSE FI$="a:company.dat"
35402   PRINT"          Merging......
35410   GOSUB 850                                         'open object file on A:
35415   A%=1                                              'array store for duplicates
35420   FOR F%=2 TO NF%:
                GET£F%,1:
        NEXT                                              '1st rec in each merge file
35430   FOR J%=1 TO NR%
35440           C = 999999!
35450           FOR F%=2 TO NF%
35460                   IF C>VAL(B$(F%)) AND LOC(F%)<=N%(F%)
                                THEN C=VAL(B$(F%)): MF%=F%      'get minimum
35470           NEXT F%
35480           IF C<>VAL(W2$) THEN 35510         'key not duplicated
35490                   A%(A%) = CVI(W1$):
                        B£(A%) = CVD(W2$):
                        C£(A%) = VAL(W3$):
                        I%(A%)=J%-Z1%:
                        A%=A%+Z1%                         'store first duplicate
35500                   A%(A%) = CVI(A$(MF%)):
                        B£(A%) = CVD(B$(MF%)):
                        C£(A%) = VAL(C$(MF%)):
                        I%(A%)=J%:
                        A%=A%+Z1%                         'store second duplicate
35510           LSET WW$=F$(MF%):
                PUT£1,J%                                  'write to object file
35520           GET£MF%, LOC(MF%)+Z1%                     'bring forward the next record
35530 NEXT J%
35540 CLOSE£1:CLOSE£2:CLOSE£3:CLOSE£4:CLOSE£5:CLOSE£6:CLOSE£7
35550 KILL "a:source.dat"
35560 KILL "b:merge?.dat"

35562 IF MS%=1 THEN BR%=NR%
                ELSE CR%=NR%
35564 GOSUB 3100                          'write control record

35570 IF A%=1 THEN 35710
35575 DO%=1
35580 PRINT CD$"          Printing Duplicate Keys......
35590 LPRINT E$"N"CHR$(6): LPRINT E$"E"
35600 IF MS%=1 THEN LPRINT USING PH3$;SDAT$;TIME$
                ELSE LPRINT USING PH4$;SDAT$;TIME$
35610 LPRINT E$"F": LPRINT CHR$(15): LPRINT
35620 FOR J%=1 TO A%-1 STEP 2:
              LPRINT USING PF2$;I%(J%);FND$(A%(J%));MKD$(B£(J%));C£(J%);
              I%(J%+1);FND$(A%(J%+1));MKD$(B£(J%+1));C£(J%+1):
      NEXT J%
35630 LPRINT CHR$(18): LPRINT CHR$(12)
35710 NEXT MS%          '******************  END MAIN LOOP

35730 IF DO%=0 THEN 35800 ELSE DO%=0
35750 PRINT CD$"          You must get rid of  duplicates before you can get a
reconciliation !
35760 PRINT CD$"          Press any key to go back to MENU, for editing.
35765 PRINT KE$                   'keyboard enabled
35770 M$="Press a key, please !": GOSUB 310
35780 Q$=INPUT$(1)
35790 GOTO 25010

35800 PRINT CD$"          Totalling.........
35810 GOSUB 3200                  'read control record
35820 GOSUB 4010                  'add up trx.
35830 BB£ = BT£ + BX£: CB£ = CT£ + CX£

36000 '****************** Reconciliation
36005 PRINT CD$"          Recopciling.......
36010 FI$ = "a:bank.dat": ' F%=1: GOSUB 860
36020 FI$ = "a:company.dat": F%=2: GOSUB 860
36030 FI$ = "b:bankrec.dat": F%=3: GOSUB 860
36040 FI$ = "b:comprec.dat": F%=4: GOSUB 860
```

# PROGRAM FILE

```
36050  R1%=1:R2%=1:R3%=1:R4%=1:A%=1
36060  WHILE R1% <= BR% AND R2% <= CR%
36061          'reconciliation is done by taking a record from each file and
               comparing. If they are the same, they are discarded; otherwise
               the lower key of the two is passed on. If keys are the same but
36062          'amounts differ, they are passed on but copied to the arrays
               for printout.
36070          GET£1, R1%: GET£2,R2%
36080          IF VAL(B$(1))=VAL(B$(2)) AND C$(1)=C$(2) THEN
                       R1%=R1%+1: R2%=R2%+1: GOTO 36130
36090          IF VAL(B$(1)) <> VAL(B$(2)) THEN 36120
36100                  A%(A%) = CVI(A$(1)):
                       B£(A%) = CVD(B$(1)):
                       C£(A%) = VAL(C$(1)):
                       I%(A%) = R3%:
                       A%=A%+Z1%                  'store bank disparate
36110                  A%(A%) = CVI(A$(2)):
                       B£(A%) = CVD(B$(2)):
                       C£(A%) = VAL(C$(2)):
                       I%(A%) = R4%:
                       A%=A%+Z1%                  'store comp.disparate
36120          IF VAL(B$(1)) >= VAL(B$(2))
                            THEN  LSET F$(4) = F$(2): PUT£4, R4%:
                                  R2%=R2%+1: R4%=R4%+1
                            ELSE  LSET F$(3) = F$(1): PUT£3, R3%:
                                  R1%=R1%+1: R3%=R3%+1
               'pass on the lower key
36130  WEND

36140  IF R1% > BR% THEN  FOR  J%=R2% TO CR%:
                              GET£2,J%: LSET F$(4)=F$(2): PUT£4,R4%:
                              R4%=R4%+1:
                         NEXT J%
36150  IF R2% > CR% THEN  FOR  J%=R1% TO BR%:
                              GET£1,J%: LSET F$(3)=F$(1): PUT£3,R3%:
                              R3%=R3%+1:
                         NEXT J%
36151  'if one file runs out, pass the rest of the other one.

36152  BR%=R3%-1: CR%=R4%-1
36153  CLOSE£1:CLOSE£2:CLOSE£3:CLOSE£4:CLOSE£5:CLOSE£6:CLOSE£7:
       PRINT CD$"                Totalling.........
36154  FG%=1: GOSUB 4010: FG%=0                  'add up trx.; flag for b: files
36156  BX£ = BB£ - BT£: CX£ = CB£ - CT£
36158  GOSUB 3100                'write control record
36170  KILL "a:bank.dat"
36180  KILL "a:company.dat"
36205  PRINT CD$"          Printing Reports.....
36210  IF A%=1 THEN 36285        'no disparate keys

36230  LPRINT E$"N"CHR$(6): LPRINT E$"E"
36240  LPRINT USING PH5$;SDAT$;TIME$
36250  LPRINT: LPRINT SPC(20)"BANK"SPC(35)"COMPANY"
36260   LPRINT E$"F": LPRINT CHR$(15): LPRINT
36270   FOR J%=1 TO A%-1 STEP 2:
              LPRINT USING PF2$;I%(J%);FND$(A%(J%));MKD$(B£(J%));C£(J%);
              I%(J%+1);FND$(A%(J%+1));MKD$(B£(J%+1));C£(J%+1):
        NEXT J%
36280   LPRINT CHR$(18): LPRINT CHR$(12)

36285   IF BR%=0 THEN 36400
36290   FI$="b:bankrec.dat": GOSUB 850  'print unreconciled bank trx.
36300   LPRINT E$"E"
36310   LPRINT USING PH6$;SDAT$;TIME$
36320   LPRINT: LPRINT E$"F"
36330   FOR R%=1 TO BR%: GOSUB 3000
36340   NEXT R%
36350   LPRINT CHR$(12)
36360   CLOSE£1

36400   LPRINT E$"E"                        'print reconciliation statment
36410   LPRINT USING PH7$;SDAT$;TIME$
36420   LPRINT E$"F": LPRINT:LPRINT:LPRINT
36430   LPRINT, USING "Total Bank Balance                ££££££££,.££";BB£
36432   LPRINT
36434   LPRINT, USING "Unreconciled Company Debits       ££££££££,.££";CD£
36436   LPRINT
36438   LPRINT, USING "Unreconciled Company Credits      ££££££££,.££";CC£
36440   LPRINT,                                           -------------"
36442   LPRINT, USING "Adjusted Bank Balance             ££££££££,.££";BB£+CT£
36444   LPRINT:LPRINT:LPRINT
36446   LPRINT, USING "Total Company Balance             ££££££££,.££";CB£
36448   LPRINT
36450   LPRINT, USING "Unreconciled Bank Debits          ££££££££,.££";BD£
36452   LPRINT
36454   LPRINT, USING "Unreconciled Bank Credits         ££££££££,.££";BC£
36456   LPRINT,                                           -------------"
36458   LPRINT, USING "Adjusted Company Balance          ££££££££,.££";CB£+BT£
36480   LPRINT CHR$(12)
36485   PRINT CD$CD$"          Copying back transaction files and making
 Copy dis k....
36487   CLOSE
36488   PRINT KE$                 'keyboard enabled
36490   RESET:SYSTEM

40000  '******************************** PRINTOUTS ************************
40010   PRINT CL$;:     GOSUB 320: MP%=0
40020   PRINT CD$CD$CD$CD$SPC(21)RV$"          PRINTOUT MENU                "NO$
40030   PRINT CD$SPC(17)RV$" 1 "NO$TAB(36)"Bank transactions
40040   PRINT CD$SPC(17)RV$" 2 "NO$TAB(36)"Company transactions
40055   PRINT CD$SPC(17)RV$" 3 "NO$TAB(36)"Return to menu
40060   PRINT CD$SPC(17)"Please select your option and "RV$"ENTER"NO$" or
 "RV$"R ETURN"NO$"  ";
40080   INPUT " ",Q$
40090   Q% = VAL(Q$):IF Q%<1 OR Q%>3 THEN M$=" ENTER   1 TO 3, PLEASE !!":
        GOSUB 330: GOTO 40020
40100   MP%=Q%: ON MP% GOTO 40105,40105,25010
```


MICROMART

**DISK-OUNT DISKS**
FROM
**MONAS OVERSEAS UK LTD.**
**UNIT 34, CANNON WORKSHOPS**
**CANNON DRIVE, WEST INDIA DOCK**
**LONDON E14 9SU. Tel: (01) 987 3213**

**PRICES PER 10 DISKETTES***

| 5¼in | DYSAN | 3M | MAXELL | CDC |
|---|---|---|---|---|
| SS/DD | £15.00 | £12.80 | £12.80 | £11.90 |
| DS/DD | £21.90 | £17.00 | £17.80 | £16.30 |
| SS/QUAD | £21.90 | £18.50 | £18.50 | £17.50 |
| DS/QUAD | £28.10 | £21.50 | £23.00 | £20.00 |

***Other brands also available**

Call for LOW PRICES on 3" & 8" disks, cleaning materials & printer ribbons.

| 3½" | SONY | MAXELL | MAXELL |
|---|---|---|---|
| SS/DD | £28.00 | £28.00 | 1.6 MB |
| DS/DD | £38.00 | £38.00 | £34.00 |

Volume **DISCOUNTS** available and **TRADE** enquiries welcome.

**ALL PRICES EX. DELIVERY & VAT**

P & P Rates: 1-5 boxes: 50p per box.
6 + boxes: FREE in UK
(Subject to availability)

**BANKRUPT STOCK**

We have a number of good quality
**LIGHT PENS**
for the BBC Computer going cheap!
These are brand new, boxed complete with manual and program cassette (10 games and 1 drawing program)
Orders received before 2pm will be dispatched that day by first class post
Price **£19.95** inc
Any questions?
**Ring 099 421 515**
**Ikon Computer Products Ltd**
Kiln Lake, Laugharne, Dyfed
ACCESS/VISA accepted
**Note: Limited quantity, so strictly first come, first served*

**DUST COVERS SETS**

**AMSTRAD CPC 464 £6.95**
*Matching proofed nylon, treated with anti-static inhibitor. Piping on monitor cover, green for 464, blue for 664. AMSTRAD CPC on keyboard cover.
*Please state model, Colour or Mono.

**Tatung Einstein £7.50**
One piece cover for monitor and keyboard in proofed light grey nylon. Piped in black with name on keyboard.

**Covers for other computers**
Matching proofed nylon with toning piping and name on keyboard: BBC, DRAGON, £4.95. COMMODORE, GOLDSTAR, SANYO, SONY, TOSHIBA, £3.95. In black but unpiped: SPECTRUM plus £2.50, QL £2.95.

**Matching covers for Printers**
Amstrad DMP-1, Canon PW 1080A, Commodore MPS 801, Epson FX-80, RX-80, Mannesmann MT-80, Panther DX 109, Shinwa CP-80, CPA-80, Seikosha 500, Taxan KP810, £3.95; Brother HR5. M-1009, £3.50 and Juki 6100 at £4.50.
*ALSO AVAILABLE:* Monitor, disk drives etc, and good range of Business Computer covers, eg IBM-PC, Apricot, Macintosh and Olivetti M24.

**BBD COMPUTER DUST COVERS**
**39 MANSE AVENUE, WRITINGTON WN6 9RP**
**Telephone: 0257 422968**
**TRADE ENQUIRIES WELCOME**

MICROMART

**COMPUTER EXCHANGE**
**USED COMPUTER AGENCY**
***The better way to buy or sell unwanted business and home computers***

**SELLING**
Return your unwanted computer equipment to a National Retail Agency for the best resale price. We will offer your equipment for resale at a reasonable price to the many people we have waiting for all types of accessories from Sinclair to Systime. There is NO CHARGE without sale, and then only a modest 10% of selling price.

**BUYING**
Protect yourself from tumbling prices on new computers. We offer Retail Choice at Resale prices.

**Agent for Complete Insurance Protection for 'computer people'**

**Agent for C-RAM Computer Repairs**

*For full details call:*
**JOHN WHITE ON (0532) 435583**
**COMPUTER EXCHANGE**
**5A THE BALCONY, QUEENS ARCADE**
**LEEDS LS1 6LF**

FOR ALL YOUR

**DISK COPYING**
**FORMATTING**
**VERIFICATION**

AND BULK DISK NEEDS TRY:

**DISCO TECH (UK) LTD**
**3-6 ALFRED PLACE**
**LONDON WC1**
**Tel: 01-631 3600**

**SHARP**

We have large stocks of refurbished, as new, Sharp computers and peripherals at reduced prices.

For example:

| | Price |
|---|---|
| MZ3500 including F/DOS | £1,100 |
| MZ80A's | £200 |
| MZ80B's | £380 |
| P5/P6 Printers | £180 |
| Twin Disk Drives from | £280 |

Also interfaces, expansion units, cables, disk Basics. Full system to your requirements. Please phone for quote.

**FULL 90 DAY WARRANTY**
*Above prices are excluding VAT and P&P*

**PERSONAL COMPUTER SERVICES**
***SHARP APPROVED SERVICE AGENT***
**Unit 14, Alpha Court**
**Windmill Industrial Estate**
**Denton, Manchester M34 3RB**
**Tel: 061-320 5011**

# PROGRAM FILE

```
40105   IF MP%=1 THEN FI$ = "a:bank.dat"        : N%=BR%:
                 ELSE FI$ = "a:company.dat"     : N%=CR%
40106   GOSUB 850                          'open the file

40110   PRINT CL$CD$CD$CD$CD$CD$CD$SPC(17)RV$" Start and end (RETURN for all): "
NO$
40120   PRINT CD$CD$SPC(17);:INPUT"START AT : ",0$
40130   IF 0$="" THEN PS%=1:PE%=N%:PRINT CL$:CD$CD$CD$CD$SPC(27)RV$"  Printing al
l records "NO$:GOTO 40170
40135   PS%=VAL(0$): IF PS%<1 THEN M$="Please enter a number(":
        GOSUB 330: GOTO 40110
40137   IF PS%>N% THEN PS%=N%
40140   PRINT CD$SPC(17);:INPUT"FINISH AT : ",0$:IF 0$="" THEN 40110
40145   PE%=VAL(0$): IF PE%<1 THEN M$="Please enter a number(":
        GOSUB 330: GOTO 40110
40147   IF PE%>N% THEN PE%=N%
40150   PRINT CL$CD$CD$CD$CD$SPC(26)RV$" Printing from "PS%" to "PE%" "NO$
40170   M$="Press ESC + RPT to stop print":GOSUB 310

40175   LPRINT E$"N"CHR$(6)                        'skip perforations
40176   LPRINT E$"E"                               'emphasised print
40180   IF MP%=1 THEN LPRINT USING PH1$;SDAT$;TIME$
                 ELSE LPRINT USING PH2$;SDAT$;TIME$
40190   LPRINT: LPRINT E$"F"                       'normal print
40200   FOR R%=PS% TO PE%: GOSUB 3000
40202   0$=INKEY$: IF 0$=E$ THEN R%=PE%
40205   NEXT R%
40210   LPRINT E$CHR$(12)                          'form feed
41000   CLOSE#1: GOTO 40010


42000   '******************** Amend Balances  ************************
42010   PRINT CL$CD$CD$SPC(32)RV$" AMEND BALANCES "NO$
42020   PRINT CD$CD$"This program lets you change existing Bank or
Company balances. The figure
42030   PRINT CD$"which is changed is the reconciled balance brought
forward. If you want to see
42040   PRINT CD$"how this is made up, refer to the TOTALS AND BALANCES
option on the Menu first.
42050   PRINT CD$CD$SPC(22)"RECONCILED BALANCES BROUGHT FORWARD:
42060   PRINT CD$CD$SPC(25)"BANK    :
42070   PRINT CD$CD$SPC(25)"COMPANY :
42080   PRINT CD$CD$CD$SPC(27)"(Minus means Credit)
42090   M$="<RETURN> will accept and file the data without any change.":
        GOSUB 310
42100   SF%=4: EF%=5: LN%=0
42110   Q£=BX£: J%=4: GOSUB 401: IN$(J%)=Q$: GOSUB 290: PRINT IN$(J%)
42120   Q£=CX£: J%=5: GOSUB 401: IN$(J%)=Q$: GOSUB 290: PRINT IN$(J%)
42130   GOSUB 1010
42140   GOSUB 600: IF Q$="N" THEN 42090
42145   BX£=VAL(IN$(4)): CX£=VAL(IN$(5))
42150   GOSUB 3100
42160   GOTO 25010

45000   '********************** DISPLAY TOTALS & BALANCES ****************
45010   PRINT CL$CD$CD$CD$"          Totalling.....
45020   GOSUB 3200              'read control record
45022   GOSUB 4010              'add up trx.
45024   BB£ = BT£ + BX£: CB£ = CT£ + CX£
45026   GOSUB 3100              'write control record
45030   PRINT CL$CD$SPC(30)RV$" TOTALS AND BALANCES "NO$

45040   PRINT CD$SPC(20)"Date:                                    ";SDAT$
45050   PRINT CD$CD$SPC(20)"Number of Bank Transactions    ";:
        PRINT USING "        ####";BR%
45060   PRINT    SPC(20)"Unreconciled Bank Debits       ";:
        PRINT USING PT$;BD£
45061   PRINT    SPC(20)"Unreconciled Bank Credits      ";:
        PRINT USING PT$;BC£
45062   PRINT    SPC(20)"Subtotal                       ";:
        PRINT USING PT$;BT£
45063   PRINT CD$SPC(20)"Reconciled balance b/forward   ";:
        PRINT USING PT$;BX£
45064   PRINT    SPC(20)"Total Bank balance             ";:
        PRINT USING PT$;BB£
45070   PRINT CD$CD$SPC(20)"Number of Company Transactions ";:
        PRINT USING "        ####";CR%
45080   PRINT    SPC(20)"Unreconciled Company Debits    ";:
        PRINT USING PT$;CD£
45081   PRINT    SPC(20)"Unreconciled Company Credits   ";:
        PRINT USING PT$;CC£
45082   PRINT    SPC(20)"Subtotal                       ";:
        PRINT USING PT$;CT£
45083   PRINT CD$SPC(20)"Reconciled balance b/forward   ";:
        PRINT USING PT$;CX£
45084   PRINT    SPC(20)"Total Company Balance          ";:
        PRINT USING PT$;CB£
45090   M$="Press a key for MENU": GOSUB 310
45100   0$=INPUT$(1): GOTO 25010


50000   '*********************  COPY ****************************
50010   PRINT CL$"Proceeding with copying program........
50020   GOSUB 3100: CLOSE
50030   OPEN "R",£6,"b:check.out",1
50040   RESET
50050   SYSTEM


55000   '********************** END ******************************
55010   GOSUB 3100
55015   RESET
55020   PRINT CL$"Finished Bank Reconciliation Program at ";TIME$:
        PRINT CD$"You may now remove your disks and switch off."CD$
55040   GOTO 55040
        'hang here to prevent return to DOS


60000   '********************** ERROR TRAP ****************************
60015   PRINT BE$
60020   IF (ERR=57 OR ERR=72) AND (ERL=21000 OR ERL=35070 OR ERL=50030) THEN
        M$ = "Copy Disk absent or unformatted or door open."
```

```
        + " Press a key when ready":
        GOSUB 310: Q$=INPUT$(1): GOSUB 320: RUN
60030   M$="ERROR MESSAGE: ERROR "+STR$(ERR)+" AT LINE "+STR$(ERL)+
        ". FILES SAVED."
60040   GOSUB 310: GOSUB 3100: END
        'file control record before closing down!
```

# BBC LSTFMT

## by M Elliot

This program is designed to break multi-statement program lines into several single-statement lines. Note that when typing in programs, it is advisable (though not necessary) to turn off the facility by pressing BREAK or by typing ?&20E=?oldv:?20F=?(oldv+1).

Running the program twice will cause the machine to 'Hang up', but pressing BREAK will rectify this and cancel the effect.

```
 10 FOR PASS%=1 TO 2
 20 P%=&D01
 30 [OPT PASS%
 40 .START
    :SEI
 50 LDA &20E
 60 STA oldv
 70 LDA &20F
 80 STA oldv+1
 90 LDA #int MOD 256
100 STA &20E
110 LDA #int DIV 256
120 STA &20F
130 LDA #0
    :STA&70
140 CLI
150 RTS
160 .int PHA
    :CMP #34
    :BNE abc
    :LDA #1
    :EOR &70
    :STA &70
    :JMP not
170 .abc CMP #58
180 BNE not
190 LDA #1
    :CMP &70
    :BEQ not
200 LDA #13
    :JSR &FFEE
    :LDA #10
    :JSR &FFEE
    :LDA #32
    :JSR&FFEE
    :JSR&FFEE
    :JSR&FFEE
    :JSR&FFEE
    :JSR&FFEE
210 .not PLA
    :JMP (oldv)
220 .oldv BRK
    :BRK
230 ]
240 NEXT
250 CALL START
```

*PCW is interested in programs written in any of the major programming languages for all home and small business micros. When submitting programs please include a cassette or disk version of your program, brief but comprehensive documentation, and a listing on plain white paper — typed if you have no printer.*

*Please ensure that the software itself, the documentation and the listing are all marked with your name, address, program title, machine (along with any minimum requirements) and — if possible — a daytime phone number.*

*All programs should be fully debugged and your own original, unpublished work.*

*We prefer to receive programs with a maximum 80-column width printed in emphasised typeface. Please keep a copy of everything.*

*Programs are paid for at the rate of £50 per page of published listing, plus a £50 bonus for the Program of the Month. Send your contributions to Nick Walker, PCW Programs, 62 Oxford St, London W1A 2HG.* END

MICROMART

**EPSON**

***TOP QUALITY PRINTERS AT ROCK BOTTOM PRICES***

EPSON RX 80 FT ..... **£228**
EPSON FX 80 ..... **£328**
EPSON RX 100 ..... **£350**
EPSON FX 100 ..... **£465**
JUKI 2200 Parallel or Series .... **£264**

**Also available:** Large stocks of Sundries including Ribbons, Fanfold and Roll Paper, Continuous Labels, Dust Covers etc.

*FREE Brochure and Discount Order Forms.*

**DATATECH LTD** (PCW)
**8 BELLINGHAM CLOSE**
**BURY**
**LANCS BL8 2TU**
**Tel: 061-764 5579**

**ONE STOP MICRO SERVICE LTD**

***5 Years of Micro Service Experience***

Home Computer Repairs:
**BBC • Spectrum, Commodore • Apple • Amstrad • QL**
*We give free estimate*
Business Computer Repairs:
**IBM • Apricot • Epson, etc**
*Free estimates*
Ask for same-day module replacement (keyboard, disk drives, logic boards)
On-site maintenance contracts available
Upgrades carried out on all above computers
We sell all types of cables for computers
We sell ICs and connectors, etc
We buy and sell home business computers and spares

**ALL REPAIRS HAVE 90 DAYS WARRANTY**

**230 TOTTENHAM COURT ROAD**
**LONDON W1P 9AE**
**(Lower Ground Floor)**
**Tel: 01-631 5379**
**Telex: 946240 CWEASY G**
**QUOTE: 19010780**

## WANTED PERSONAL COMPUTERS

IBM, TANDY, EPSON, etc

*all models bought for cash*

**MORGAN CAMERA COMPANY**

**179 Tottenham Court Road, London W1.**

**Tel: 01-636 1138**




**MICROMODS LTD**
**53 Acton Road**
**Long Eaton**
**Nottingham NG10 1FR**
**Tel: 0602 724264**

## READ & PRINT BAR-CODES USING ANY COMPUTER

Complete identification system including microprocessor controlled scanner hardware plus software to print barcodes on Epson (or similar) dot matrix printer. Most industrial & commercial codes can be read. Packages available for virtually any computer. Our systems are in regular use by many private & public sector organisations worldwide. Prices range from £200-£400. More information on request.

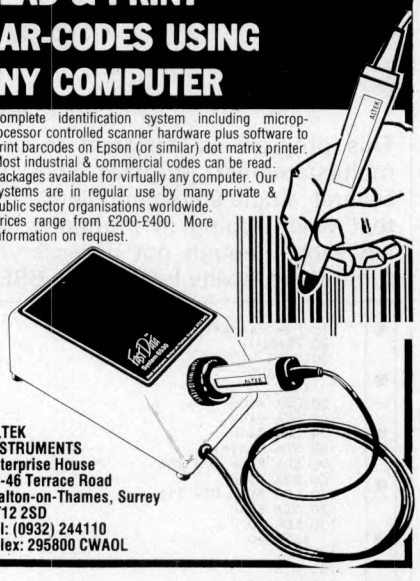

**ALTEK INSTRUMENTS**
**Enterprise House**
**44-46 Terrace Road**
**Walton-on-Thames, Surrey**
**KT12 2SD**
**Tel: (0932) 244110**
**Telex: 295800 CWAOL**

# LYNX

**SOFTWARE**

Over 50 titles including games, adventures, utilities and Software Projects' "Jet Set Willy".

**HARDWARE**

Lynx 96k + Parallel Printer + Interface + Word Processor + Forth + Assembler + Numerons + Cassette Lead, **£90.**

Joystick Interface, **£20**.

*SAE for list.*

**Phoenix Software**
**Unit 70**
**Marsh Lane Site, Frodsham**
**Cheshire WA6 7BX**
**Tel: 0928 35525**

## – MAXAM –
### FOR THE AMSTRAD

THE COMPLETE CODE DEVELOPMENT SYSTEM FOR THE AMSTRAD CPC 464 ★ ASSEMBLER ★ MONITOR ★ TEXT EDITOR ★

"The Arnor system is the best editor/assembler to be released for the AMSTRAD so far" — PCN 100. "For flexibility and ease of use, ARNOR is easily the best I have seen" — Pop. C Wkly Vol 4 No 8. "Assemblers . . . look no further, ARNOR's is the best I have seen . . . by far the easiest to use and most friendly I have come across". — Computing with the Amstrad. April 1985.

Now available in **ALL THREE** formats

**Tape (only) £13.50**
**Disc £26.90**
**16K ROM + multifunction adaptor £59.90**
(All prices include VAT, p&p)

**Cheques/POs to ARNOR Ltd, Dept P, PO Box 619, London SE25 6JL**
*Overseas no extra. Trade enquiries welcome*
***Make MAXimum use of your AMstrad***

**Hotline** 01-653 1483 **Technical** 01-852 2174

## BRADFORDS
### MICRO AND PERIPHERAL SPECIALIST

| | |
|---|---|
| Sanyo MBC 550 Series | from £695 |
| ACT Apricot | from £595 |
| Monitors | from £75 |
| Disc drives | from £95 |
| Sanyo 128K RAM upgrade | £85 |
| Centronics T Switch | £45 |
| Printer Buffer – special offer | £129 |

**PRINTERS**

| | |
|---|---|
| Shinwa CP80 | £185 |
| Shinwa CPA 80 | £199 |
| Micro Peripherals MP165 NLQ | £260 |
| Epson RX/FX 80 | Call |

Full range of Listing Paper, Ribbons, Cables, Floppy Discs, 3", 3.5", 5.25", Storage Boxes, Printout Binders etc., also available.

*Please call or send for latest price list.*
*All prices exclude VAT and delivery.*

**LOGICAL MICRO SYSTEMS**
**1ST FLOOR, LEGRAMS MILL,**
**SUMMERVILLE ROAD, BRADFORD BD7 1NH**
**Telephone: (0274) 577636**

## M & J SOFTWARE

**FORTH for the SPECTRUM**
A fig implementation on cassette for the 48k machine. The cost covers the language, an editor, an assembler and documentation (including the Installation Manual). £12

**D.I.Y. FORTH**
fig-Forth assembly listings available for: 6502, Z80, 8080, 6809, 1802, 9900, 6800, 68000,8086/88 & PDP11 £7 each

**fig-FORTH INSTALLATION MANUAL**
A guide to implementing Forth from the above listing. £5.

**ALL ABOUT FORTH by HAYDON**
An excellent reference book with cross references to fig-Forth, the Forth-79 standard and 'Starting Forth'. This book should be next to every Forth programmer's computer. (270+ pages). £7.95.

**6809 & 6502 MACROASSEMBLERS**
Written in fig-Forth, these listing require the minimum of alteration for any Forth implementation. £5 each.

**DRAGON ADVANCED PROGRAMMER'S PACKAGE**
*This implementation is extremely powerful and comprehensive. It can be used on both 32k and 64k machines so enabling Dragon 64 owners to utilise all available ram. The complete package consists of:—*

1. The language and its editor. A fig implementation which allows access to Basic commands when executing Forth.
2. A 6809 macroassembler written in Forth (source provided).
3. The fig-Forth Installation Manual which contains a glossary of Forth commands a listing of the editor and the Forth model plus lots more.
4. Documentation.
5. A copy of the 'Dragon Companion'.

*Available on:*— Cassette for £15 and Delta disc for £18.
We will also upgrade existing users of our cassette version to disc for £6 — just return your original cassette.

**DRAGON COMPANION**
Originally selling at £4.95 this excellent publication is now on offer, while stocks last, at only £2.

*All prices include p&p within the UK. Overseas customers please add £2 to total order.* Cheques & PO's to:—

**M & J SOFTWARE, 34 GRAYS CLOSE**
**SCHOLAR GREEN, STOKE-ON-TRENT ST7 3LU**
**Tel: (0782) 517876**

# MEGABUFFER



## Universal Print Buffer

- 64/128/192/256K RAM FOR LARGE PRINTOUTS
- WORKS WITH MOST COMPUTERS AND PRINTERS
- PARALLEL/PARALLEL, PARALLEL/SERIAL AND SERIAL/PARALLEL MODES
- MULTIPLE COPY AND PAGE REPRINT FACILITIES
- STRAIGHT-THROUGH MODE – USE FOR INTERFACE CONVERSION ONLY
- INDUSTRY-STANDARD CONNECTORS
- INTERNAL POWER SUPPLY
- HIGH QUALITY CONSTRUCTION, BUILT TO LAST
- BRITISH DESIGNED AND MANUFACTURED

*64K £180 – 128K £216 – 192K £252 – 256K £288*
*CABLES £15 (send full details of Computer and Printer)*

**RINGDALE PERIPHERALS,** 11 Decoy Road, Worthing, Telephone (0903) 213131 West Sussex, BN14 8ND

## FORTH fortifies the ports other languages cannot reach

**FORTH 83** — Professional FORTHs from Laboratory Microsystems. Screen editor, assembler, utilities, full documentation. Special version for IBM PCs and 100% compatibles. State disc format with order. CPM-Z80 £95 + VAT, CPM-86/MS/PCDOS £110 + VAT, CPM68K £225 + VAT. Cross compilers to generate rommable code also available.

**QL FORTH-83** — screen editor, macro-assembler, decompiler, turnkey compiler, binary overlays, floating point, colour, graphics, sound, QDOS multi-tasker, hashed compiler, new manual, now revised to version 2.0 — £39.95.

**WHITE LIGHTNING** — FORTH plus graphics package. Provides support for up to 255 software sprites with animation. Editor and demonstration included. Spectrum 48 tape — £14.95, microdrive — £19.95. Commodore 64 tape — £19.95, disc — £29.95.

**DRAGON FORTH** — cartridge, split screen editor, sound colour, decompiler, overlays, joystick and timer support, full documentation, and complete source code — £35, CoCo version £45.

**Do-it-yourself FORTH** — installation manual, how to do it, model, definitions, editor — £7.

**Source code: 6502, 6800, 6809, 8080, Z80, 8086/8088, 9995, 1802, 68000, Z8000, VAX, Apple ][, LSI-11 — £8 each.**

**Implementations for Spectrum to VAX and OS9, and a range of FORTH books. Contact us for all your FORTH requirements.**

mpe **MicroProcessor Engineering Ltd**
21 Hanley Road, Shirley
Southampton SO1 5AP
Tel: (0703) 780084

## LOWEST RATES IN UK?

**MICROS**
Sinclair Spectrum 48K
Free Software 6 Pack ..... £74
Sinclair Spectrum Plus
Free Software 6 Pack ..... £109
Sinclair QL ..... £322
Commodore 64 Business Pack
Computer, Disc Drive, Printer, Software ..... £473
Commodore 64 Pack
Cassette Player, Joystick, Simons Basic Prog. Ref Guide Int Soccer & Sports Bag ..... £208
Amstrad CPC 464
Colour Monitor & over £100 Software ..... £291
Amstrad CPM 464
Green Monitor & over £100 Software ..... £204
BBC B ..... £296
BBC B (Econet Fitted) ..... £387
BBC B & DFS ..... £387
Psion Organiser ..... £85
Sinclair Flat Screen TV ..... £85

**CASIO**
PB 700 ..... £108
FX 820P ..... £83
FX 750P ..... £75
FX 720P ..... £42
FX 4000P ..... £34
PB 410 ..... £42
PB 110 ..... £33

**MONITORS**
Sinclair QL Vision Monitor ..... £252
Microvitec QL Monitor ..... £235
Commodore Colour Monitor £174
Fidelity TV Monitor ..... £192
Sanyo Green Monitor ..... £82

**PRINTERS**
Commodore MPS 801 ..... £165
Commodore MPS 802
Free Easy Script & Future Finance ..... £295
Commodore DPS 1101
Free Easy Script ..... £338
Epson RX 80FT + ..... £231
Canon PW-108A ..... £299
Shinwa CPA 80 ..... £196
Brother EP44 ..... £208
Brother M1009 ..... £170
Brother HR5 ..... £130
Juki 2200 ..... £295
Juki 6100 Daisy Wheel ..... £343
Quendata DMP 1100 ..... £230
Alphacom 32 ..... £60

**DISC DRIVES**
Commodore 1541
Free Easy Script ..... £169
Amstrad 3" ..... £169
Cumana CSX 100 ..... £104
Cumana CSX 200S ..... £134
Cumana CD 800S ..... £347

**ACCESSORIES**
ZX Expansion System
Microdrive, Interface & Software ..... £86
Spectrum Disc Drive Interface £87
DK Tronics Light Pen ..... £17
Sinclair Interface 2 (Free Rom) £17
Program Joystick Interface ..... £20
Quick Shot II Joystick ..... £9
Keyboard For Spectrum ..... £42
Diskettes 3M SS DD-10 ..... £17
Microdrive Cartridge ..... £1.73

**Complete range of Casio and Spectrum/Commodore add ons at discount prices. Prices/Goods subject to availability and change without notice. All prices exclude VAT. P&P £3 (within UK).**
*Trade and Export enquiries welcome*

ACCESS BARCLAYCARD VISA

**K. K. STATIONERS**
187 Edgware Road, Marble Arch, London W2 1ET. Tel: 01-723 1436
126 Edgware Road, Marble Arch, London W2 2DZ. Tel: 01-402 4592
172 Queensway, Queensway, London W2. Tel: 01-229 3247



## COMPUTER BOOKS MAIL ORDER

Quick delivery, lots of new titles

**FREE** send for our comprehensive list of computer books and software.

**Rickmansworth 779129 (24 hours)**

*Or write:*

**Computer Books Ltd.**
**Freepost**
**33 Church Street**
**Rickmansworth**
**Herts. WD3 6FP**

Telephone orders ring Eileen or Josie

***We aim to please so send off now***



## O'LEVELS

not just revision but also tuition for the Spectrum 48K

| | |
|---|---|
| **MATHEMATICS** | **8 PROGRAMS** |
| **PHYSICS** | **7 PROGRAMS** |
| **BIOLOGY** | **6 PROGRAMS** |
| **COMPUTER ST.** | **8 PROGRAMS** |
| **CHEMISTRY** | **8 PROGRAMS** |
| **FRENCH** | **8 PROGRAMS** |
| **ELECTRONICS** | **8 PROGRAMS** |

Each of the programs in a set are divided into between 4 and 14 tutorial sections, making as many as 70 overall. Each section consists of a number of pages of instructive text and diagrams, followed by questions, which where possible are randomly generated.

*As used in schools and colleges*

**Each subject only £4.95**

## BORED WITH BASIC?

Teaching versions of Pascal and C languages, including a screen editor and 48 page tutorial manual. Trace facilities are provided for easy tuition and debugging.

**Each language only £4.95**

## GCE TUTORING

**40 BRIMMERS HILL, WIDMER END**
**HIGH WYCOMBE, BUCKS HP15 6NP**





TEL: (0423) 65270

COMPUTER REPAIRS AND MAINTENANCE
82 MEADOWCROFT
BILTON
HARROGATE
N. YORKS.

**c-ram**

**YEARS OF EXPERIENCE**
**SATISFIED CUSTOMERS WORLDWIDE**

**SPECTRUM REPAIRS ALL INCL. £18.50**

***WE REPAIR OTHER MAKES TOO!!***

**REPAIRS ARE OUR SPECIALITY**
**(FOR THE TRADE AND PUBLIC SECTORS)**

ANSWERPHONE BETWEEN 8am-6pm
LEAVE YOUR NUMBER (WORK & HOME IF POSS.)
AND WE WILL CALL YOU BACK!!

**★ HELP LINE ★**

FOR A PERSONAL CHAT ABOUT YOUR PROBLEM — BETWEEN 7pm-8pm

**'GOOD SERVICE COSTS LESS THAN BAD SERVICE'**
A. & P. CALPIN





## VITACREST COLLEGE

**HOME TUITION COURSES IN:**

- ★ O & A Level, Computing Electronics and Mathematics
- ★ Wide variety of O Levels, including English Language
- ★ Business Computing
- ★ Programming and Operating System

We are a private independent college offering high quality specialist tuition in the above subjects.

A variety of teaching methods are available, including correspondence and personal and group tuition at your home or premises or here at the college to suit your requirements.

*Enrol now for September 1985 and send for full prospectus to:*

**STEWART FLEMING MSC BSC (Principal)**
**VISTACREST COLLEGE**
**11 HIGHLANDS CLOSE, BEXHILL-ON-SEA**
**EAST SUSSEX TN39 5HP**
**Tel: 0424 216 682**



## Computer Science Books
### Mail Order

| | |
|---|---|
| Vol. 1: Fundamental Algorithms: Knuth: 634pp | £29.95 |
| Vol. 2: Seminumerical Algorithms: Knuth: 624pp | £29.95 |
| Vol. 3: Sorting and Searching: Knuth: 723pp | £29.95 |
| Compiler Construction for Digital Computers: Gries: 493pp | £9.35 |
| Writing Interactive Compilers & Interpreters: Brown: 265pp | £16.95 |
| Introduction to Automata Theory, Languages and Computation: Hopcroft & Ullman: 418pp | £19.95 |
| The Theory of Parsing, Translation and Compilation: Aho & Ullman: 456pp | £19.95 |
| Data Structures & Program Design: Kruse: 486pp | £28.95 |
| The 'C' primer: Hancock & Krieger: 256pp | £16.95 |
| The 'C' puzzle book: Feuer: 173pp | £17.95 |
| The 'C' primer plus: Wait, Prata & Martin: 531pp | £29.95 |
| Assemblers, Compilers and Program Translation: Calingaert: 270pp | £27.95 |
| Fortran 77 Principles of Programming: Wagener: 370pp | £16.95 |
| Oscilloscopes: Van Erk: 270pp | £19.95 |
| Design of Solid-State Power Supplies: Hnatek: 621pp | £29.95 |
| Silicon Valley Fever: Rogers & Larsen: 302pp | £19.95 |
| The Soul of a New Machine: Kidder: 254pp | £7.50 |
| Alan Turing The Enigma: Hodges: 587pp | £19.95 |
| Basic Television Principles: Grob: 732pp | £16.95 |
| The Little Kingdom: The Private Story of Apple Computers: Michael Moritz: 336pp | £16.95 |
| Handbook of Physics: Condon & Odishaw: 1700pp | £39.95 |

*PRICES INCLUDE P&P* *Mail Order Only*

**MacroSystems Limited**
**26 GRAYSHOTT LAURELS, LINDFORD, BORDON, HAMPSHIRE GU35 0QB**



# 1541 FLASH!

Do you get bored waiting for your disk drive to load your favourite programs?

Thinking of reverting to 'turbo' tape routines because they're quicker?

WAIT!!!

From SUPERSOFT comes a great NEW product which you can fit in minutes to upgrade your Commodore 64 and 1541 Disk Drive. All disk operations are speeded up as much as THREE times (for example, programs which normally take a minute to load will load in twenty seconds or less using FLASH!)

1541 FLASH! is 100% compatible with Commodore BASIC. However, if you really want to you can easily revert to the normal slow mode at any time — but we don't think you will!

If you take your programming seriously you can speed DATA transfers by up to 10 times normal speed (in your own programs), and can also make use of 11 screen editing functions, as well as 17 disk commands.

Pressing SHIFT and RUN/STOP becomes the same as LOAD"*",8,1 so you can start work about five seconds earlier each day!

Supersoft have 1541 FLASH! in stock NOW, so send your cheque for £89.95 or 'phone 01-861 1166 to order by Access.

P.S. Unlike some add-ons we could mention, 1541 FLASH! leaves you all your memory and the cartridge port available!

**SUPERSOFT**
**Winchester House, Canning Road, Wealdstone, Harrow, HA3 7SJ**
Tel: 01-861 1166 for further details and our free catalogue



## PROFESSIONAL MUSIC
**FROM THE BBC MODEL B**
**MUCH MORE THAN JUST A SYNTHESIZER . . .**

**The New Digital**
**CLEF CMS**

32 Harmonically Programmable Oscillators
32 Programmable Envelopes
Five Octave Keyboard
Up to 4 Osc/Envs per note
Touch Sensitive Keyboard
Programmable Stereo Sound
Real-Time Polyphonic Sequencer

**Price £495**
inc VAT & UK carriage
*S.A.E. OR PHONE FOR FURTHER INFORMATION*

**CLEF PRODUCTS (ELECTRONIC) LIMITED**
(Dept PCW1) 44a Bramhall Lane South, Bramhall, Stockport, Cheshire SK7 1AH. 061-439 3297



**JP Magnetics**

*SPECIALISTS IN THE SUPPLY OF BULK CUSTOM WOUND AUDIO/COMPUTER CASSETTES TO TRADE AND EDUCATION*

*NEW! TURBO LOAD FOR CBM 64 WITH 'ON SCREEN DISPLAY'*

*DUPLICATION FACILITIES FOR MOST POPULAR HOME COMPUTERS 16 TRACK RECORDING STUDIO*

*COMPETITIVE RATES. CONTACT US FOR PRICE LIST/QUOTATIONS NOW.*

**JP MAGNETICS LTD**
**UNIT 4, 7 MARY ST, BRADFORD BD4 8SW**
**TEL: (0274) 731651**

# spectrum

## Sinclair Flat Screen T.V.



- Pin sharp picture gives a bright, clear image almost anywhere, anytime.
- Powered from long life lithium batteries or via optional mains adaptor
- Receives UHF broadcasts anywhere (except France and Communist Bloc)
- Complete with intergral fold-away aerial; personal earphone and smart soft carrying case and battery.

**Accessories:**
Optional mains adaptor ..... £7.95
Spare batteries, pack of 3 ..... £9.95

£99.95

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

## New Products!

### Enterprise Computer

- RAM 64K expandable to 3.9 megabytes
- ROM 48K including BASIC cartridge expandable up to 3.9 megabytes
- Very sophisticated operating system, providing a dynamic memory management technique around a Z80A processor running 4MHz
- Built in word processor
- Graphics resolution up to 672 x 512, colours up to 256 on screen
- Stereo sound from 4 voices over 8 octaves
- Fully structured ANSI standard BASIC
- Keyboard, 68 full travel keys, space bar and built in joystick
- 2 external joystick ports, 2 cassette interfaces
- Parallel printer port, RGB monitor output
- Full expansion possible via a 64-way interface
- RS423 serial interface and built-in network for up to 32 computers
- Cartridge ROM bay, to 64K



£179.00

Only £11 monthly with Spectrum Chargecard* APR 29.8% (variable).

| | |
|---|---|
| Mitsui Quick Data Drive for MSX Computers | £139.95 |
| Mitsui Quick Data Diskette | £3.99 |
| Cumana Electron Interface | £149.95 |
| Commodore Business Package | £549.95 |
| Quendata DMP1100 Printer | £269.99 |
| Juki 2200 Portable Typewriter/Daisywheel Printer | £343.83 |
| Canon PW1080A Printer | £349.00 |
| Elephant 5¼" Diskettes (IQ Box) from | £22.50 |
| System 2000 Computer Desk and Monitor Bridge | £49.95 |



SAVE OVER £150

NEW!

### Commodore 64 Business Package

- Commodore 64 Computer
- Commodore 1541 disc drive
- Commodore MSP 801 printer
- Plus "Future Finance" & "Easy File"

Spectrum Price £549.95

Only £23 with Spectrum Chargecard*. APR 29.8% (variable)



Spectrum Price £308.50

SAVE OVER £50

Only £13 monthly with Spectrum Chargecard* APR 29.8% (variable)

Regular price if brought separately £359.87

"Super Value"

### MSX Package

- Goldstar MSX Computer
- Mitsui quick data drive
- Power supply for quick data drive
- Two discs for quick data drive

## Super Computer Offers from Spectrum



£349.95

**BBC Model B** with built in Speech Synthesiser worth £50

Only £15 monthly with Spectrum Chargecard*. APR 29.8% (variable).



£129.95

**Sinclair Spectrum +**

"Fantastic Value for Money"

- 48K RAM
- 8 colours
- 10 octave sound
- Professional keyboard

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### Spectrum 48K

Plus FREE! Software 6 Pack



£89.95

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### Atari 800XL Starter Pack



Includes:
- Atari 1010 data recorder
- Introduction to programming software
- Pole position game cassette
- Demonstration cassette

£129.99

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

**Not all stores carry every advertised item, please phone before making a journey - prices correct at time of going to press E&OE**

spectrum CHARGE CARD

## Up to £1000 Instant Credit

*There's up to £1,000 worth of Instant Credit available on a Spectrum Chargecard. See your local SPECTRUM dealer for written details (UK mainland only). Typical APR 29.8%.

Ring Round 3301

## Latest News

for up to date, information & offers from SPECTRUM - see PRESTEL page 600181 for details.

# Super Value
# Printers & Disc Drives
## from Your Computer Specialist Nationwide



## Brother EP-44 Printer/Typewriter

£249.95

'Transforming Office Machinery', runs Brother's slogan - with these super-compact battery powered type-writers it's easy to see why.

- Top quality thermal head
- 4K of text memorise (3 A4 pages)
- Centering if required
- 15-digit LCD display for pre print corrections
- Line-by-line edit facility

Only £11 monthly with Spectrum Chargecard*. APR 29.8% (variable)



£199.95

## Brother M1009 Printer

- 50 cps Bidirectional printing
- normal/enlarged/condensed/emphasized/Elite /superscript/subscript characters
- Centronics interface
- Optional RS232 Interface

Only £9 monthly with Spectrum Chargecard*. APR 29.8% (variable)



£149.95

## Brother HR5 Printer with Commodore Cable

- Top quality Letter-quality daisywheel printing
- Between 13 and 18cps
- Bi-directional printing
- Tractor-fed paper or single sheets

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable)

## Juki 2200 Printer

NEW!



£343.85

**Electronic daisywheel typewriter with RS-232C or Centronics Interface for computer printer**

- 10 cps
- 10/12/15 cpi pitch
- 12 inch paper width/9 inch print width
- Normal/decimal tabs

Only £15 monthly with Spectrum Chargecard*. APR 29.8% (variable)



£269.99

NEW!

## Quendata DMP 1100 Printer

- Bi-directional printing
- Normal/enlarged/condensed/Elite/characters
- Centronics interface
- Optional RS232 interface

Only £12 monthly with Spectrum Chargecard*. APR 29.8% (variable)



£399.00

## Juki 6100 Daisy Wheel Printer

- 20cps (av. 18cps Shannon Text)
- 10/12/15 or Proportional character spacing
- Bidirectional friction-feed
- Tractor-feed or cut paper

Only £17 monthly with Spectrum Chargecard*. APR 29.8% (variable)

## Canon PW-1080A

NEW!



## Dot Matrix Printer

£349.00

- 160 cps
- Bidirectional printing in text mode
- Normal/enlarged/condensed/ enlarged/Elite/ Elite enlarged/characters
- Centronics interface
- Optional RS232 interface

Only £17 monthly with Spectrum Chargecard*. APR 29.8% (variable)



£199.00

## Commodore 1541 Disc Drive

- 5¼ inch disc
- Expansion bus for other peripherals
- Built in disc controller and operating system

Only £9 monthly with Spectrum Chargecard*. APR 29.8% (variable)



£199.95

## Amstrad 3" Disc Drive

- 3 inch disc drive
- Single sided, double density
- CPM & Logo
- Built in power supply
- Complete with interface

Only £9 monthly with Spectrum Chargecard*. APR 29.8% (variable).

## Cumana Disc Drives

NEW LOWER PRICES



NEW LOWER PRICES

| | |
|---|---|
| CSX 100 40 Track 100K SS | £124.95 |
| CSX 200S 40/80 Track 100K SS | £159.95 |
| CSX 400S 40/80 Track 100K SS | £189.95 |
| CS 200S 40/80 Track SS with PSU | £192.95 |
| CS 200D 40 Track DS with PSU | £169.95 |
| CD 200 40 Track Dual Drive with PSU | £294.95 |
| CS 400S 80 Track DS with PSU | £219.95 |
| CD 400D 80 Track DS Dual Drive with PSU | £325.95 |
| CD 800S Dual 40/80 Track DS with PSU | £414.95 |
| Cumana 351 SS 40 Track 3½" Drive | £159.95 |
| Cumana 354 DS 80 Track 3½" Drive | £229.95 |

## Opus Disc Drives



| | |
|---|---|
| Opus 5401 100K SS 40 track | £149.95 |
| Opus 5402 200K DS 40 track | £169.95 |
| Opus 5802 400K DS 40/80 track | £199.95 |
| Opus 5802D 2x400K DS 40/80 Track | £499.95 |

## Entrepo Quick Data Drive



£79.95

- Quick operating system
- Extra blan microwafer and operating manual

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable)



£139.95

'New Exclusive'

## Mitsui Quick Data Drive for MSX

Also available

| | |
|---|---|
| MSX Printer Lead | £19.95 |
| MSX Monitor Lead | £3.95 |
| MSX Quickshot I Joystick | £9.95 |

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable)

## Rotronics Wafer Drive



£129.95

- Versatile twin datadrive for the ZX Spectrum
- Twin 128K drives
- 16K, 64K or 128K Wafers

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable)

## Datafax Disc Interface



£79.95

Allows you to run 3-3½" or 5¼" disc drives with Spectrum or Spectrum Plus

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable)

Spectrum Computer Centres have no connection whatsoever with the ZX-Spectrum Computer manufactured by Sinclair Research Ltd.

## Computer Dealers

or prospective dealers. If you would like to know more about becoming a SPECTRUM APPOINTED DEALER on an exclusive area basis, please write to Bob Cleaver, Spectrum Group PLC, Hunting Gate, Hitchin, Herts. SG4 0TJ. Tel: (0462) 37171

## More from Spectrum...

# spectrum

## Super Value Monitors & T.V.'s from Spectrum

### Fidelity Prism Monitor
for use with the Sinclair QL



£199.95

Only £9 monthly with Spectrum Chargecard* APR 29.8% (variable).

### Fidelity CM14 Monitor



£199.95

Only £9 monthly with Spectrum Chargecard* APR 29.8% (variable).

### Commodore 1702 Monitor



£230.00

- 14" colour, sound monitor
- PAL/RGB composite
- Tint and volume controls

Only £10 monthly with Spectrum Chargecard* APR 29.8% (variable).

### Microvitech Cub 1451 Monitor for use with the QL



£275.00

Only £12 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### Microvitech Cub 452/1431 Monitor
Standard Resolution for BBC



£229.00

Only £10 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### AVT Monitors



£99.95

- Available in Green or Orange screen displays
- Glare or Non-Glare screens
- For office micros, or personal computers

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### Tatung 14" Colour T.V.

£234.95

- TV/RGB switchable
- 8 channels
- 14" tube

Only £10 monthly with Spectrum Chargecard* APR 29.8% (variable).

### Sanyo CRT36 Monitor



£146.05

Only £8 monthly with Spectrum Chargecard* APR 29.8% (variable).

## Super Value Accessories

### Super Value Package for Spectrum
Currah Microslot for ZX Spectrum
Currah Microspeech for ZX Spectrum



- DK Tronics single port joystick interface
- Quickshot II joystick

£41.75

SAVE OVER £5.00

*Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

Regular Price if brought Separately £46.85

### Joystick Converter for CBM C16 Plus Quickshot 2 Joystick

£12.95

Regular Price £15.70
SAVE £2.75

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### DK Tronics Dual Port Interface for Oric Plus Interceptor Joystick

£18.95

Regular Price £21.95
SAVE £3.00

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

'Unique to Spectrum Authorised Dealers'

### DK Tronics Single Port Interface Plus Quickshot II Joystick
for the Spectrum



£17.95

Only £8 monthly with Spectrum Chargecard* APR 29.8% (variable).

### Omega Data Recorder
with Azimuth Tape
Plus Gemini Carrying Case inc. 10 x C12 cassettes

£27.50

SAVE OVER £3.00

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### Cheetah Infra Red Joystick
Plus Currah Microspeech For Commodore 64

£47.75

SAVE OVER £4.00

Only £8 monthly with Spectrum Chargecard*. APR 29.8% (variable).

### System 2000 Desk



£49.95

- Movable bridge
- Shelf below work finish surface
- Attractive design with natural pine finish legs and support rails and magnolia surfaces

Only £8 monthly with Spectrum Chargecard* APR 29.8% (variable).

Not all stores carry every advertised item, please phone before making a journey - prices correct at time of going to press E&OE

spectrum CHARGE CARD

## Up to £1000 Instant Credit

*There's up to £1,000 worth of Instant Credit available on a Spectrum Chargecard. See your local SPECTRUM dealer for written details (UK mainland only). Typical APR 29.8%.

## Latest News

for up to date, information & offers from SPECTRUM - see PRESTEL page 600181 for details.

# Your Computer Specialist Nationwide There's one near you!

## AVON

**BATH** Software Plus, 12 York St Tel: (0225) 61676
**WESTON-S-MARE** K & K Computers, 32 Alfred St Tel: (0934)419324

## BEDFORDSHIRE

**BIGGLESWADE** HCCS Ltd., 22 Market Sq., Tel: (0767) 318844
**DUNSTABLE** Dormans 7-11 Broad Walk Tel: (0582) 65515
**LUTON** Terry-More, 49 George St. Tel: (0582) 23391/2

## BERKSHIRE

**BRACKNELL** Computer Centre, 44 The Broadway. Tel: (0344) 427317
**READING** Reading Video Centre, 73 Whitley St. Tel: (0734) 751690
**SLOUGH** MU Games and Computers 245 High St. Tel: (0753) 21594
**WINDSOR** Gadgets 30 Peascod St., Tel: (07535) 67211

## BUCKINGHAMSHIRE

**CHESHAM** Reed Photography & Computers, 113 High St. Tel: (0494) 783373

## CAMBRIDGESHIRE

**HUNTINGDON** T.S.C. Electronics, 3 All Saints Passage, High St. Tel: (0480) 411579
**PETERBOROUGH** Logic Sales, 6 Midgate Tel: (0733) 49696

## CHANNEL ISLANDS

**GUERNSEY** Gruts, 3-5 The Pollett, St. Peter Port Tel: (0481) 24682
**JERSEY** Audio & Computer Centre. 7 Peter St, St Helier. Tel: (0534) 74000

## CHESHIRE

**ALTRINCHAM** Mr Micro 28 High St. Tel: (061) 941 6213
**CHESTER** Computer Link, 21 St. Werburgh St. Tel: (0244) 316516
**CREWE** Microman Unit 2, 128 Nantwich Rd. Tel: (0270) 216014

## CLEVELAND

**MIDDLESBOROUGH** McKenna & Brown, 206 Linthorpe Rd. Tel: (0642) 222368

## CORNWALL

**SALTASH** C & J Videos, 85 St. Stevens Rd. Tel: 075 55 5585
**ST AUSTELL** A B & C Computers, Duchy House, 6 Lower Aylmer Sq. Tel: (0726) 67337

## CUMBRIA

**BARROW IN FURNESS** Cumbria Audio Visual & Electrical (C.A.V.E.), 48 Cavendish Street Tel: (0229) 20109
**PENRITH** Penrith Communications, 14 Castlegate. Tel: (0768) 67146 Open Mon-Fri till 8pm
**WHITEHAVEN** P D Hendren 15 King St. Tel: (0946) 2063

## DERBYSHIRE

**ALFRETON** Gordon Harwood 69-71 High St. Tel: (0773) 832078
**HEANOR** Logic Electrical Engineers, God frey St, Heanor Derby Tel: (0773) 76980

## DEVON

**BRIXHAM** Discus Computers, Beach Approach, Tel: (08045) 55532
**EXETER** Seven Counties (Computers) Ltd., 7 Paris Street. Tel: (0392) 211211
**EXMOUTH** Open Channel, 30 The Strand. Tel: (0395) 264408
**PLYMOUTH** Syntax Ltd., 76 Cornwall St. Tel: (0752) 28705
**TIVERTON** Actron Micro Computers, 37 Bampton St. Tel: (0884) 252854

## DORSET

**DORCHESTER** Seven Counties Cptrs. 20 High Street East Tel: (0305) 66022
**POOLE** Lansdowne Cptr Centre 14 Arndale Centre Tel: (0202) 670901

## DURHAM

**DARLINGTON** McKenna & Brown, 102 Bondgate. Tel: (0325) 459744

## ESSEX

**BASILDON** Godfrey's 28-32 East Walk, Tel: (0268) 289379
**BASILDON** Godfrey's Computer Centre, 5 Laindon Main Centre Laindon. Tel: (0268) 416747
**CHELMSFORD** Maxton Hayman Ltd., 5 Broomfield Rd. Tel: (0245) 354595
**GRAYS** H Reynolds. 79 Orsett Rd. Tel: (0375) 5948
**SOUTHEND** Computer Centre 332 London Rd. Tel: (0702) 337161

## HAMPSHIRE

**BASINGSTOKE** Fisher's, 2-3 Market Place. Tel: (0256) 22079
**PORTSMOUTH (Waterlooville)** G B Microland, London Rd., (Opp. Co-op) Tel: (0705) 259911
**SOUTHAMPTON** L.T.C. Ltd., 112 East St., Tel: (0703) 333958/24703

## HEREFORD

**HEREFORD** Melgray Hi-Tech Ltd., 53/54 Commercial Str., Tel: (0432) 275737

## HERTFORDSHIRE

**POTTERS BAR** The Computer Shop, 197 High St. Tel: (0707) 44417
**STEVENAGE** D J Computers, 11 Town Square. Tel: (0438) 65501
**WATFORD** SRS Microsystems Ltd., 94 The Parade, High St. Tel: (0923) 26602
**WELWYN GARDEN CITY** D J Computers, 40 Fretherne Rd., Tel (07073) 28435/28444

## HUMBERSIDE

**BEVERLEY** Computing World, 10 Swaby's Yard Dyer Lane. Tel: (0482) 881831
**GRIMSBY** RC Johnson Ltd., 22 Friargate, Riverhead Centre. Tel: (0472) 42031
**HULL** The Computer Centre, 26 Anlaby Rd. Tel: (0482) 26297

## ISLE OF MAN

**DOUGLAS** T H Colebourn Ltd., 57-61 Victoria St. Tel: (0624) 3482

## ISLE OF WIGHT

**COWES** Beken & Son. 15 Bath Rd. Tel: (0983) 297181

## KENT

**BECKENHAM** Supa Computers Ltd., 425 Croydon Rd., Tel: (01) 650 3569
**BROADSTAIRS** Video Vision 19/20 Willow Court, St. Peters Park Road Tel: (0843) 63284 (No Early Closing Day)
**BROMLEY** Computers Today 31 Market Square Tel: (01) 290 5652
**CANTERBURY** Canterbury Computer Centre, 56-57 Palace Street. Tel: (0227) 62101
**DOVER** Kent Photos & Computers, 4 King St. Tel: (0304) 202020
**RAINHAM** Microway Computers Ltd., 39 High St. Medway Towns., Kent Tel: (0634) 376702
**SEVENOAKS** Ernest Fielder Computers, Dorset Street. Tel: (0732) 456800
**SITTINGBOURNE** Computers Plus, 65 High St. Tel: (0795) 25677
**TUNBRIDGE WELLS** Modata Computers Ltd. 28-30 St Johns Rd. Tel: (0892) 41555

## LANCASHIRE

**PRESTON** 4-Mat Computing Ltd., 67 Friargate Tel. (0772) 561952

## LONDON

**E6** Percivals, 85 High St. North, East Ham. Tel: (01) 472 8941
**E17** Erol Computers Ltd., 125 High Street Walthamstow Tel: (01) 520 7763
**EC2** Devron Computer Centre, 155 Moorgate Tel: (01) 638 3339/1830
**N14** Logic Sales, 19 Broadway, The Bourne, Southgate. Tel: (01) 882 4942
**N20** Castlehurst Ltd. 1291 High Rd. Tel: (01) 446 2280
**NW11** Computers Inc., 86 Golders Green Rd. Tel: (01) 209 0401/0279
**SE1** Vic Odden's 6 London Bridge Walk. Tel: (01) 403 1988
**SE9** Square-Deal, 373-375 Footscray Rd., New Eltham. Tel: (01) 859 1516
**SE15** Castlehurst Ltd., 152 Rye Lane, Peckham. Tel: (01) 639 2205
**W1** Computers of Wigmore St., 104 Wigmore St. Tel: (01) 935 2452
**W1** Micro-Foto,14-16 Quadrant Arcade, Regent Street Tel: (01) 437 5336/5471
**W1** Sonic Foto & Micro Centre, 256 Tottenham Court Rd. Tel: (01) 580 5826
**W1** Ramsons, 4 Edgeware Road, Tel: 01 724 2373

## GREATER MANCHESTER

**OLDHAM** Home & Business Computers Ltd., 54 Yorkshire St. Tel: (061) 6331608
**ROCHDALE** Home & Business Computers, 75 Yorkshire Street, Tel: (0706) 344654
**SWINTON** Mr Micro Ltd., 69 Partington Lane. Tel: (061) 728 2282 Late Night Friday
**WIGAN** Wilding Ltd., 11 Mesnes St. Tel: (0942) 44382

## MERSEYSIDE

**LIVERPOOL** Home & Business Cptrs 31 Bold St. Tel: (051) 708 0428
**LIVERPOOL** Beaver Radio, 20-22 Whitechapel. Tel: (051) 709 9898
**LIVERPOOL (Aintree)** Hargreaves, 31-37 Warbreck Moor. Tel: (051) 525 1782

## MIDDLESEX

**PINNER** Spectrum 91 Field End Rd., Eastcote Tel: (01) 868 6830/6860
**UXBRIDGE** J K L Computers, 7 Windsor St. Tel: (0895) 51815

## NORFOLK

**KING'S LYNN** Computer Plus, 40 Conduit St. Tel: (0553) 774550
**NORWICH** Norwich Camera Centre 20 White Lion Str. Tel: (0603) 612537
**NORWICH** Spectrum, 11A Castle Meadow Tel: (0603) 663796
**THETFORD** C B & Micros, 21 Guildhall Street, Tel: (0842) 61645

## NORTHAMPTONSHIRE

**NORTHAMPTON** Dormans, 22 Princes Walk Grosvenor Centre. Tel: (0604) 37031

## NOTTINGHAMSHIRE

**NOTTINGHAM** Jacobs Computers, 13 Middlegate Newark. Tel: (0636) 72594
**WORKSOP** Computagrafix, 132 Bridge St. Tel: (0909) 472248

## NORTHERN IRELAND

**NEWRY** Newry Computer Centre. 34 Monaghan St. Tel: (0693) 66545

## NORTHUMBERLAND

**MORPETH** Telerents 31 Newgate St. Tel: (0665) 513 537

## OXFORDSHIRE

**ABINGDON** Ivor Fields Computers, 21 Stert St. Tel: (0235) 21207
**BANBURY** Computer Plus, 2 Church Lane. Tel: (0295) 55890
**OXFORD** Ivor Fields, 7 St Ebbes St. Tel: (0865) 247082

## SCOTLAND

**ABERDEEN** Dee Micro 278 George Street Tel: (0224) 644350
**AYR** Vennals, 6A New Bridge St. Tel: (0292) 264124
**DUNDEE** Micromania 60 Gray St., Boughty Ferry Tel: (0382) 77130
**HAMILTON** Tom Dickson Computers, 8-12 Cadzow St. Tel: (0698) 283193

## SHROPSHIRE

**SHREWSBURY** Computerama, 13 Castlegate. Tel: (0743) 60528
**TELFORD** Computer Village, 4 Hazeldine House Telford Town Centre. Tel: (0952) 506771

## SOMERSET

**TAUNTON** Grays, 1 St James St. Tel: (0823) 72986

## STAFFORDSHIRE

**STAFFORD** Computerama, 59 Forgate St. Tel: (0785) 41899
**STOKE-ON-TRENT** Computerama, 11 Mkt Square Arcade Hanley. (0782) 268620
**HEDNESFORD** Disco's Ltd., East Cannock Rd., Tel: (054) 382021

## SUFFOLK

**BURY ST EDMUNDS** Guildhall Cptr Ctr, 11 Guildhall St. Tel: (0284) 705772
**LOWESTOFT** John Wells, 44 London Rd North Tel: (0502 3742

## SURREY

**CAMBERLEY** Camera Arts (Micro Computer Division), 36 High St. Tel: (0276) 65848
**CROYDON** Vision Technology Ltd., 53/59 High Street Tel: (01) 681 3022
**EPSOM** The Micro Workshop, 12 Station Approach Tel: (03727) 21533
**WALLINGTON** Surrey Micro Systems Ltd., 53 Woodcote Rd. Tel: (01) 647 5636
**WOKING** Harpers, 71-73 Commercial Way. Tel: (04862) 25657

## SUSSEX

**BEXHILL-ON-SEA** Computerware, 22 St Leonards Rd. Tel: (0424) 223340
**BOGNOR REGIS** Bits & Bytes High Str., Tel: (0243) 867143
**BRIGHTON** Gamer 71 East St. Tel: (0273) 728681
**BURGESS HILL** Weald Cptrs, 247-249 London Rd, Tel: (04446) 41381
**LITTLEHAMPTON** Alan Chase Ltd., 39 High St. Tel: (0903) 715674

## WALES

**ABERYSTWYTH** AberData at Galloways. 23 Pier St. Tel: (0970) 615522
**CARDIFF** Randall Cox, 18-22 High St Arcade. Tel: (0222) 31960
**NEWPORT (Gwent)** Randall Cox, 118 Commercial St. Tel: (0633) 67378
**PEMBROKE** Randall Cox, 19 Main St. Tel: (064) 682876
**WREXHAM** Wrexham Computer Centre, 24 Abbot St., Clywd Tel: (0978) 358832

## WARWICKSHIRE

**NUNEATON** Micro City 1A Queens Road Tel: (0203) 382049

## WEST MIDLANDS

**BIRMINGHAM** Software World 12 Ethel Street Tel: (021) 643 7559
**COVENTRY** Greens, 22 Market Way. Tel: (0203) 28342
**DUDLEY** Central Computers, 35 Church Hill Precinct. Tel: (0384) 238169
**WALSALL** New Horizon Computer Centres, 1 Goodall St. Tel: (0922) 24821
**WEST BROMWICH** Bell & Jones, 39 Queens Square. Tel: (021) 553 0820
**WOLVERHAMPTON** Wolverhampton Computer Centre, 17/19 Litchfield St. Tel: (0902) 29907

## WORCESTER

**KIDDERMINSTER** Central Computers, 20-21 Blackwell Street, Tel: (0562) 746941
**WORCESTER** David Waring Ltd., 1 Marmion House High St. Tel: (0905) 27551

## YORKSHIRE

**BRADFORD** Empire Electro Centres Ltd., Victoria Shopping Centre, 441 Thornton Rd. Tel: (0274) 492190
**BRADFORD** Erricks, Fotosonic House Rawson Square. Tel: (0274) 309266
**DONCASTER** The Soft Centre 8 Queensgate Waterdale Centre Tel: (0302) 20088
**ROTHERHAM** GT Leisureworld, Cascade Centre Tel: (0709) 67391
**SHEFFIELD** BSB Computers Ltd. 202 Whitham Rd, Broomhill Tel: (0742) 668251
**SHEFFIELD** HVL Computers 812 Ecclesall Rd., Tel: (0742) 661328
**YORK** York Computer Centre 7 Stonegate Arcade. Tel: (0904) 641862

Spectrum Computer Centres have no connection whatsoever with the ZX-Spectrum Computer manufactured by Sinclair Research Ltd.

spectrum

# See your local Spectrum Computer Specialist today!

# GEMINI DON'T HANG AROUND

Whilst we're proud to stand and admire our tried and tested range of serious software for the BBC micro — we don't hang around. Our development team are all too aware of the need to keep up with the demands of tomorrow's user and so we are pleased to introduce to you the ***'TRIPLE-D'*** system.

At last, TOTAL INTEGRATION and data file compatibility between the three most important utility packages for your BBC micro disk system — Database, Spread-sheet and Graphics. Take a look at the specification.

## THE REVOLUTIONARY 'TR

Of great significance to businessmen, educationalists and hobbyists alike, these programs are certainly the most powerful and sophisticated of their breed, and may be used 'stand-alone' or together as a suite. Gemini have probably the most experience in writing serious software for the BBC micro, with classics such as BEEBCALC and BEEBPLOT achieving sales of tens of thousands of units. We have drawn on almost four years of experience and user feedback to produce what we are confident will be hailed as the ultimate in functional software for the BBC micro: the ***'TRIPLE-D'*** Integrated Suite. We've also brought it in at a price that should make it accessible to more of you, and most importantly, we're giving you REAL value for money.

### DDD-BASE *£29.95*

- Up to 2000 records, 1 search level subset, 26 fields/record, 2 drives, 79 chars/field
- Scrolling screen, 79 x 26. Interrupt driven real-time clock
- Layout painted on-screen to your design, including background text/graphics
- Fully menu driven, with powerful line editor and access to *OS commands
- Default entry capability, no need for tedious re-typing of repetitive data
- Lightning search using advanced 'hashing' techniques
- Powerful maths, allowing all BASIC functions, on any field
- 10 user-defined variables to simplify complex calculations
- Multiple level 'intelligent' sort — program only sorts 'out-of-order' data
- Printed reports in record or summary format. Data spool option for transfer to other files
- FULL DATA COMPATIBILITY WITH 'DDD-CALC' AND 'DDD-PLOT'

### DDD-CALC *£29.95*

- True disk-based spreadsheet, 2000 rows, 26 columns, 52000 cells. Powerful line editor
- Fast, smooth machine code screen scroll with pop-down menu
- Individually adjustable column widths with text overflow
- Full relative and absolute replication
- Find and move to a row by name
- User defined variables, delete/insert rows, SORT rows with 'DDD-Base'
- Send data from all or part of sheet to printer, or just print cell formulae
- Data over 1 or 2 drive surfaces
- Fast recalculation, even over large files
- All BASIC functions allowed, plus 'SUM', 'MAX', and 'MIN'. *OS calls, and real time clock
- Data spool option for merging with other files
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' AND 'DDD-PLOT'

### DDD-PLOT *£29.95*

- Stunning menu driven colour graphics using the BBC's capability to the full
- Pie charts, histograms, scatter graphs, line graphs and function plotting
- Disk save of screen for instant recall within your own programs
- Superb data entry editor with up to 255 plottable data entries for text and x/y coordinates
- Automatic scaling with user override
- Screen customisation allowable after plotting for background text etc., with up to 64 columns in Mode 1
- Disk save of ALL data
- Statistics facilities include mean, max, min, standard deviation, line of best fit, correlation coefficient etc.
- Colours re-definable for any plot
- Epson m/c fully SHADED screen dump with interface for other dumps on request
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' AND 'DDD-CALC'



# PLE-D' BBC DISK INTEGRATED SOFTWARE SYSTEM

The modules, which are formatted for both 40 and 80 track systems, are available separately, or as an economical combination pack. Each module is clearly documented with a comprehensive, indexed manual, with training sections that refer to demonstration applications provided with each disk. Remember, ***'TRIPLE-D'*** uses proper random-access files that will take advantage of your true disk capacity, even over TWO drive surfaces. Have you ever heard of a true disk-based spreadsheet before? Well it's here now in the form of the ***'TRIPLE-D'*** suite and can handle up to 52,000 FILLED cells! If you already have our 'DataGem' ROM database, you'll be pleased to know we've even included some special utilities for you!

I confidently recommend the ***'TRIPLE-D'*** suite to you. If you purchase the product from us and don't share my enthusiasm, return it to us in new condition within seven days of purchase and we'll refund you money — immediately and without quibble.

*Dale Hubbard*
*Chairman & Managing Director*
*Gemini Marketing Limited*



















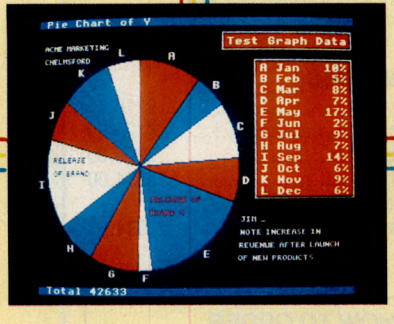


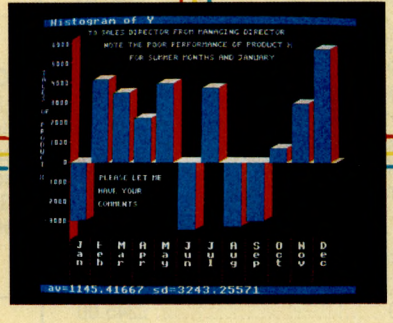


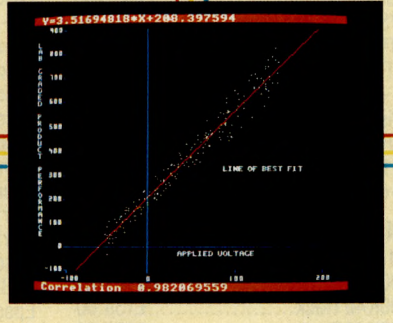


**GEMINI MARKETING LTD** Gemini House, Concorde Road, Dinan Way Industrial Estate
Exmouth, Devon EX8 4RS. Tel. (0395) 265165 (4 lines) Telex 42956 GEMINI



Gemini

Express 24 hour credit card orders (Amex, Access) **0395 265165** immediate guaranteed despatch
Gemini, please rush me in dual 40/80 track format:

| Ref. | Item | Qty. | £ each | Total |
|---|---|---|---|---|
| M0101 | DDD-Base | ..... | 29.95 | ..... |
| M0104 | DDD-Calc | ..... | 29.95 | ..... |
| M0109 | DDD-Plot | ..... | 29.95 | ..... |
| M0118 | Combo Pack All 3 | ..... | 69.95 | ..... |

*Prices include VAT and post and packing*

Name .....
Address .....

Or available from leading software stockists

Bona fide dealers, distributors and overseas licensees for Gemini software always required. Educational establishments contact us for details of our fuss-free licensing agreements.

# SAVE £1000 ON THE OLIVETTI M24

## OLIVETTI M24 with 640K RAM
**OLIVETTI INTERNAL 10MB HARD DISK**
**OLIVETTI MONITOR**
**OLIVETTI KEYBOARD**
**MS — DOS**

| | |
|---|---|
| **RRP** | **£3663** |
| **OUR PRICE** | **£2663** |
| **SAVING** | **£1000** |

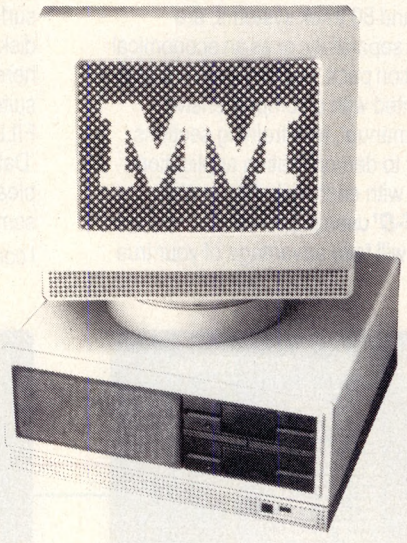

SIMILAR SUPERDEALS AVAILABLE ON ALL OTHER OLIVETTI COMPUTERS AND PRINTERS

## OLIVETTI M21 PORTABLE with 640K RAM
**2 x 360K DISKS, INTERNAL MONITOR AND KEYBOARD, MS — DOS, CARRY CASE**

| | |
|---|---|
| **RRP** | **£2139** |
| **OURPRICE** | **£1599** |
| **SAVING** | **£540** |

THE PROFESSIONAL CHOICE
COMPLETE SYSTEMS SUPPORT AND TRAINING AVAILABLE
FULL MANUFACTURER'S WARRANTY
NEXT DAY INSURED DELIVERY AVAILABLE

## MAYFAIR MICROS
BLENHEIM HOUSE, PODMORE ROAD, LONDON SW18 1AJ
TEL: 01-870 3255 / 871 2555
We accept official orders from UK Government and Educational Establishments. Mail Order and Export Enquiries welcome. Callers by appointment.

### MONITORS
| | |
|---|---|
| Microvitec 1431 Standard Res | £189.00 |
| Microvitec 1451 Medium Res | £289.00 |
| Microvitec 1441 High Res | £399.00 |
| Microvitec 2031 20" Standard Res | £315.00 |
| Microvitec Sinclair QL | £270.00 |
| Philips BM7502 V.H. Res (Green) | £85.00 |
| Normende TV/Monitor + Remote control | £249.00 |
| Ferguson CTV + RGB | £240.00 |
| Philips CTV + RGB | £229.00 |
| Kaga RGB Vision III 12" | £369.00 |
| Kaga 12" H.R. Green | £118 |
| Sanyo SCM 14" VHR | £425.00 |
| Novex 1414 colour Monitor | £215.00 |

### DISC DRIVES
| | |
|---|---|
| BBC Single 100K Drive | £99.00 |
| BBC Dual 200K | £189.00 |
| BBC Dual 200K 40 Track | £159.00 |
| BBC Dual 400K 40 Track | £299.00 |
| BBC Single 400K 80 Track | £159.00 |
| BBC Dual 800K 80 Track | £318.00 |
| BBC Single Power Supply | £20.00 |
| BBC Dual Power Supply | £29.00 |

### DAISYWHEEL PRINTERS
| | |
|---|---|
| Brother HR15 | £378.00 |
| Brother HR15 Keyboard | £155.00 |
| Brother HR15 Sheet Feeder | £212.00 |
| Brother HR15 Tractor Feed | £71.00 |
| Quen Data 20 CPS | £249.00 |
| Juki 6100 18 CPS | £340.00 |
| Juki Single Sheet Feeder | £230.00 |
| Juki Tractor Unit | £115.00 |
| Juki RS232 Interface | £74.00 |
| Juki Spare Daisywheel | £16.00 |

### PRINTERS
| | |
|---|---|
| Brother EP44 | £228.00 |
| Brother HR5 | £148.00 |
| Canon PW1080A 160 CPS (NLQ) | £289.00 |
| Canon PW1156A 160 CPS (NLQ) | £399.00 |
| Kaga KP810 (NLQ) | £285.00 |
| Kaga KP910 (NLQ) | £399.00 |
| Kaga RS232 + 2K Buffer | £95.00 |
| Ensign 1650 165 CPS | £305.00 |
| Epson RX80T 100 CPS | £212.00 |
| Epson RX80F/T 100 CPS | £240.00 |
| MP-165 (NLQ) | £316.00 |
| Panasonic KP1091 | £325.00 |
| Seikosha GP100A | £189.00 |
| Epson RX100F/T 100 CPS | £396.00 |
| Epson FX80 160 CPS | £370.00 |
| Epson FX100F/T 160 CPS | £494.00 |
| Shinwa CP80 | £199.00 |
| Riteman Compact 120 CPS | £199.00 |
| Star Gemini 10X 120 CPS | £230.00 |
| Star Gemini 15X 120 CPS | £339.00 |
| Epson 814RS232 Interface with 2K Buffer X On/Off | £65.00 |
| Epson LX80 | £245.00 |

### COLOUR PRINTERS
| | |
|---|---|
| Canon PJ1080A 7 Colour 40 CPS Ink Jet | £440.00 |
| Seikosha GP700A 7 Colour 50 CPS | £399.00 |

**COMPUTERS, SOFTWARE, ACCESSORIES, UTILITIES and lots, lots more!!**

### DISKS
Very high quality Fuji Diskettes, guaranteed for life at only £20.00 per box (Double-sided 80 track)

### BBC UPGRADES
| | |
|---|---|
| A-B Upgrade | £110.00 |
| DFS Interface | £120.00 |
| Econet Interface | £69.00 |
| Speech Interface | £54.00 |
| RS232 Interface for any Centronics-type Printer | £34.00 |

### HOW TO ORDER
You may purchase any of the items listed by cheque made payable to: Twillstar Computers Ltd. Barclaycard or Access. All you have to do is fill in your requirements on a separate sheet of paper, post to us and we will despatch within 24 hours, subject to availability. All prices inclusive of 15% VAT. ADD £2.50 P&P for orders below £150. Over add £8 P&P. Credit card holders may order by telephone. Give card number, name, address and items required. Please note VAT is not charged on export orders. Export customers please ring for details of P&P.

**TCL**

**TELEPHONE ORDERS (01)574 5271**

Open 6 days a week 9am to 7pm Monday to Saturday

BARCLAYCARD VISA

## Twillstar Computers Limited
17 Regina Road, Southall, MIDDLESEX UB2 5PL. TEL: (01)574 5271

# VicOdden's
London's Computer Specialist
of London Bridge

# MEGADEALS

**Trade-in your weeny ½K Hoity-Toity 3000 for the latest 30 Mega Thingy Quality Leap. We also buy Computers & Peripherals for CASH (If you can't put up with its superior comments having spent 24 hours playing 'The Hobbit' and getting .002%) We'll even take your sooper-dooper computer gear in part exchange for weird but wonderful Hi-Fi rigs, Walkpersons etc from our Lo/Mid/Hi-Fi store or against Niknok, Conan, Printax, Oilmouse cameras and 30,000mm lenses from our two photographic emporiums.**

HOW TO FIND US




**6, London Bridge Walk, London SE1**
**Tel: 01 403 1988**
**Open 8.30-6pm Mon-Frid**
**9am-1pm Sat**

## Go for the Best, Regardless of Cost EVEN IF IT'S CHEAPER

XPC TURBO

**7,000 in Service Worldwide**

(for Dealers Only)

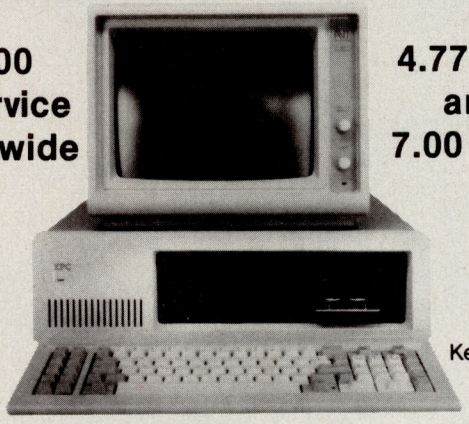

**4.77 MHz and 7.00 MHz!**

English
German
French
Italian
Spanish
Chinese
Russian
Keyboards

### Standard System Features:

- 256K Memory - Expandable to 640K right on Main PCB! Superior Memory reliability at 7.0 MHz
- Real Time Clock with Battery Back-up and Driver Software
- 1 Serial Port (COM1) with Optional (install Chips & Cable) Second Serial Port (COM2)
- 1 Parallel Port (LPT1)
- Game Port
- Floppy Controller for up to 4 Drives
- Two 360K ½ Height Panasonic (Shugart) Drives
- 140 Watt XT type Power Supply (This System IS Hard Disk ready!)
- Monochrome Display Adaptor
- 12" Hi-Resolution Amber/Green CRT (TTL)
- 84 Key IBM™ style, Capacitance, 100 million character Keyboard
- Expansion from 256K to 640K **Only DM400.00**
- **One Year Warranty on all Parts**

### System Options



**Color Graphics Adaptor**
Supports two levels of graphics and text in monochrome or color. Low resolution 320 x 200 pixel, high resolution 640 x 200 pixel ..... BOA-6200-00



**Hi-Resolution Mono Graphics**
This Hercules type board will run 1-2-3 software with a true full screen, high resolution of 720h x 348v pixels ..... BOA-6150-00



**Hard Disk Controller**
Handles 5 to 140 megabytes with minimum software configuration. Features DOS 1.1 & 2.0 compatibility, and ST-506 Interface..... BOA-8050-00



**Hard Disk Drives**

| | | |
|---|---|---|
| 10 Meg DRI-4200-00 | 40 Meg | DRI-6630-00 |
| 20 Meg DRI-4265-00 | 105 Meg (D,E,F) | DRI-4250-00 |
| 26 Meg DRI-6625-00 | 140 Meg (D,E,F,G) | DRI-4270-00 |



**10 Meg Tape back-up**
Inexpensive, reliable, on-board micro-processor that supports streaming or file-oriented. Uses Floppy Controller as Drive C ..... DRI-8080-00

**MPI Micro Products International**

**Call: Cynthia Clark (020) 45 26 50**

Building 70, 4th Floor
1117ZH Schiphol-East
The Netherlands

**Fax: (020) 41 81 29 Telex: 18306 TODAY!**

# Honeywell
# the printer every computer

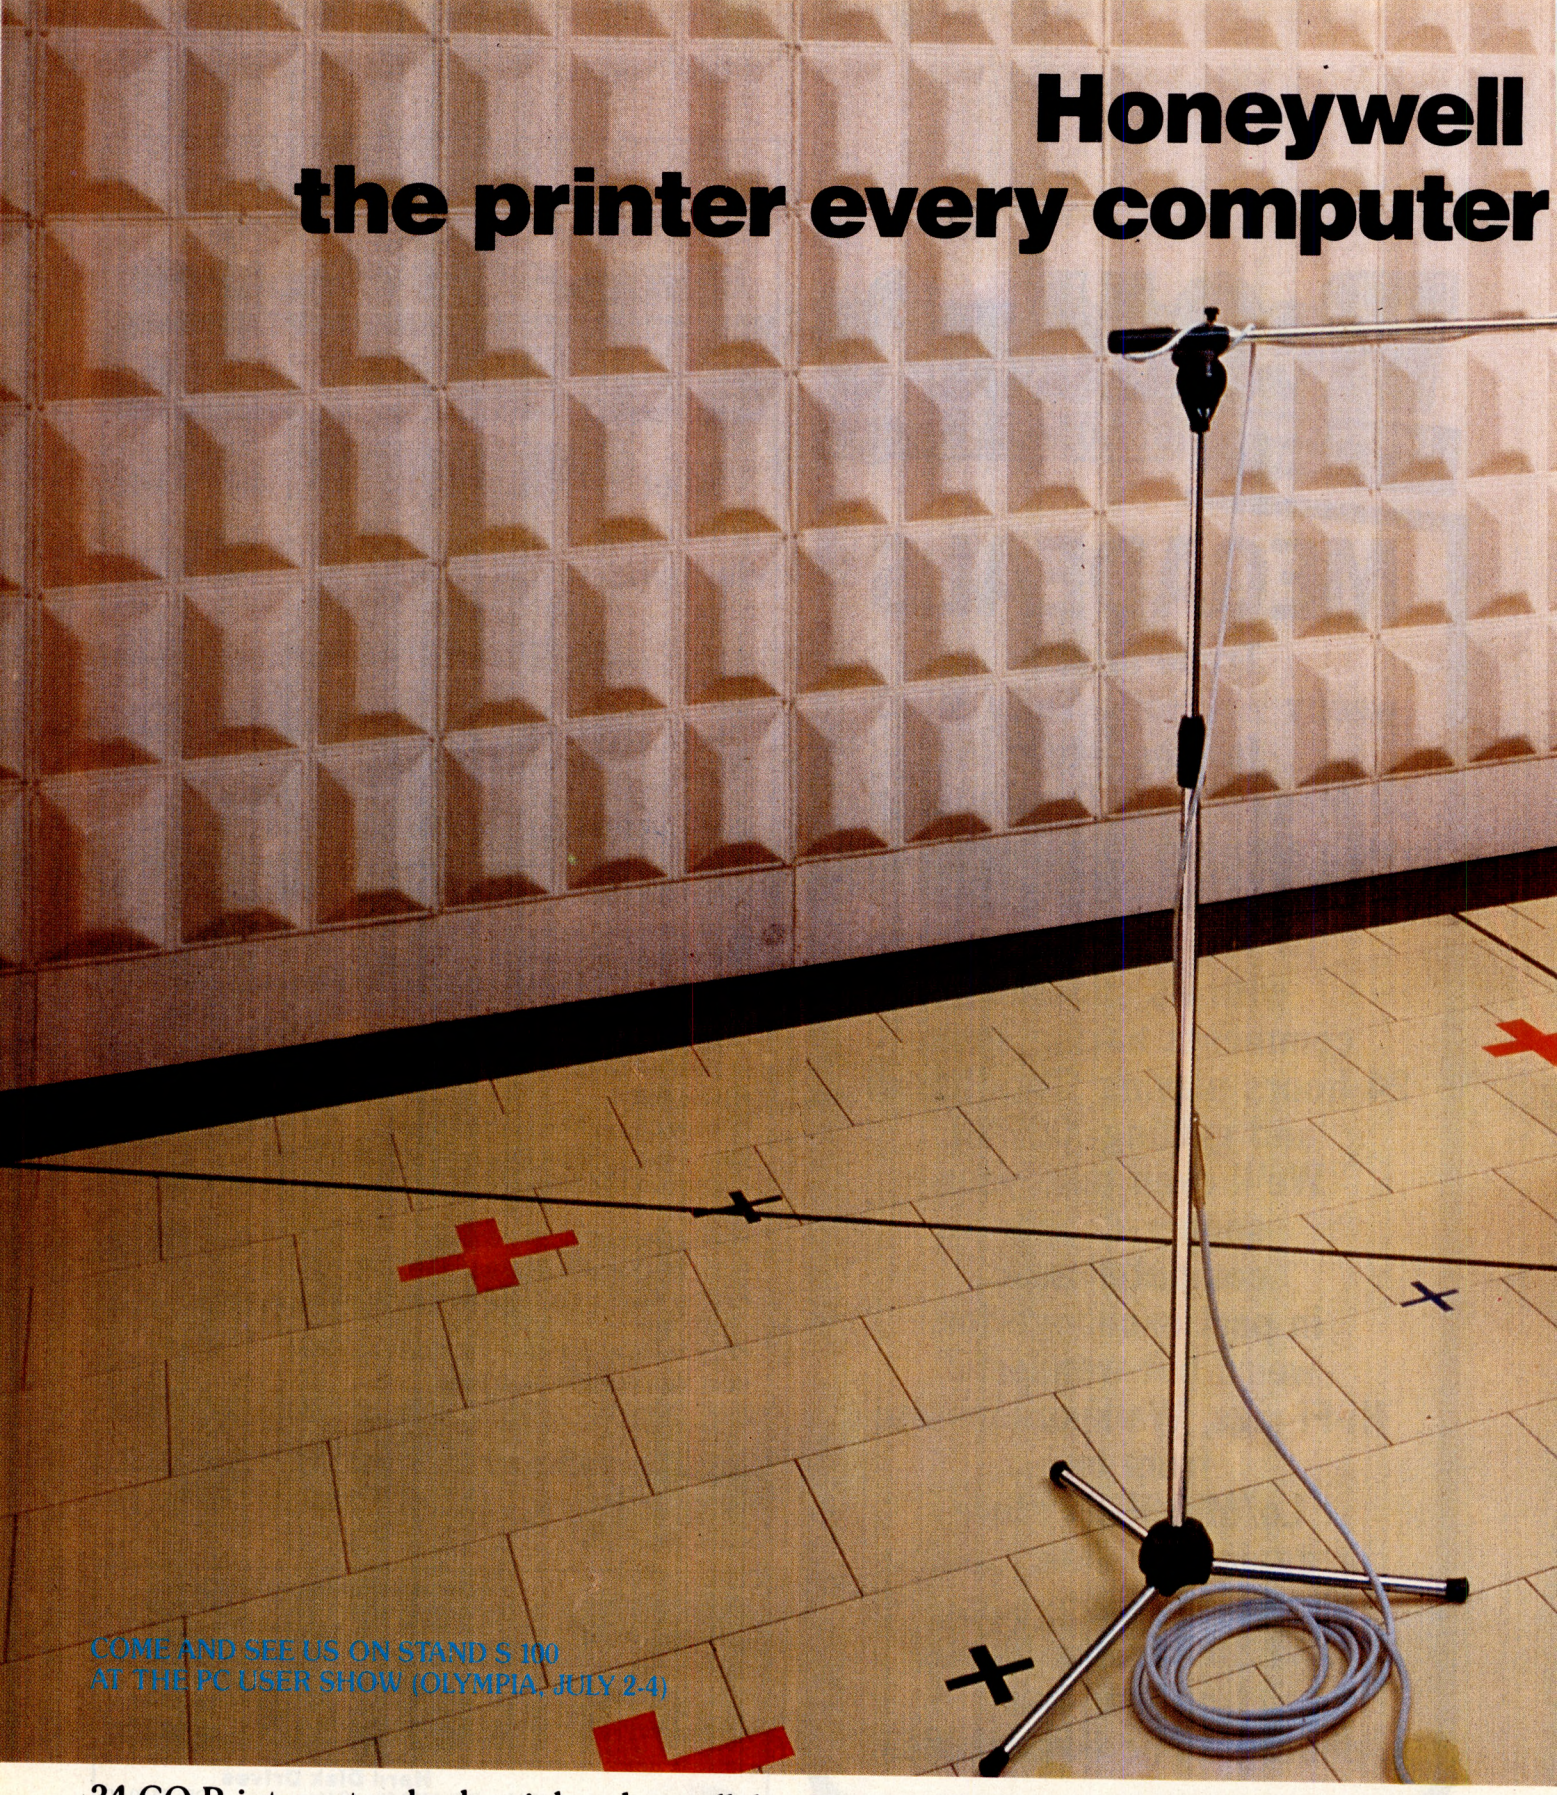

COME AND SEE US ON STAND S 100
AT THE PC USER SHOW (OLYMPIA, JULY 2-4)

**34 CQ Printer: standard serial and parallel interfaces. IBM, Epson and Diablo protocols. Fast draft speeds (up to 270 cps) and superior correspondence quality printing selectable at the touch of a button. Integrated single sheet feeding and automatic sheet feeder option.**

Everyone has a right to seek out perfection. And every Honeywell Compuprint 34 CQ, in concept and design, has been subjected to the most severe technological evaluation in the search for perfection. High speed and quality in printing can be taken for granted. And the printer itself has experienced every stress possible to confirm its durability, product quality and reliability.



Connectable to all the leading makes of computer such as IBM, Televideo, Apple,...

# Compuprint: would love to have.

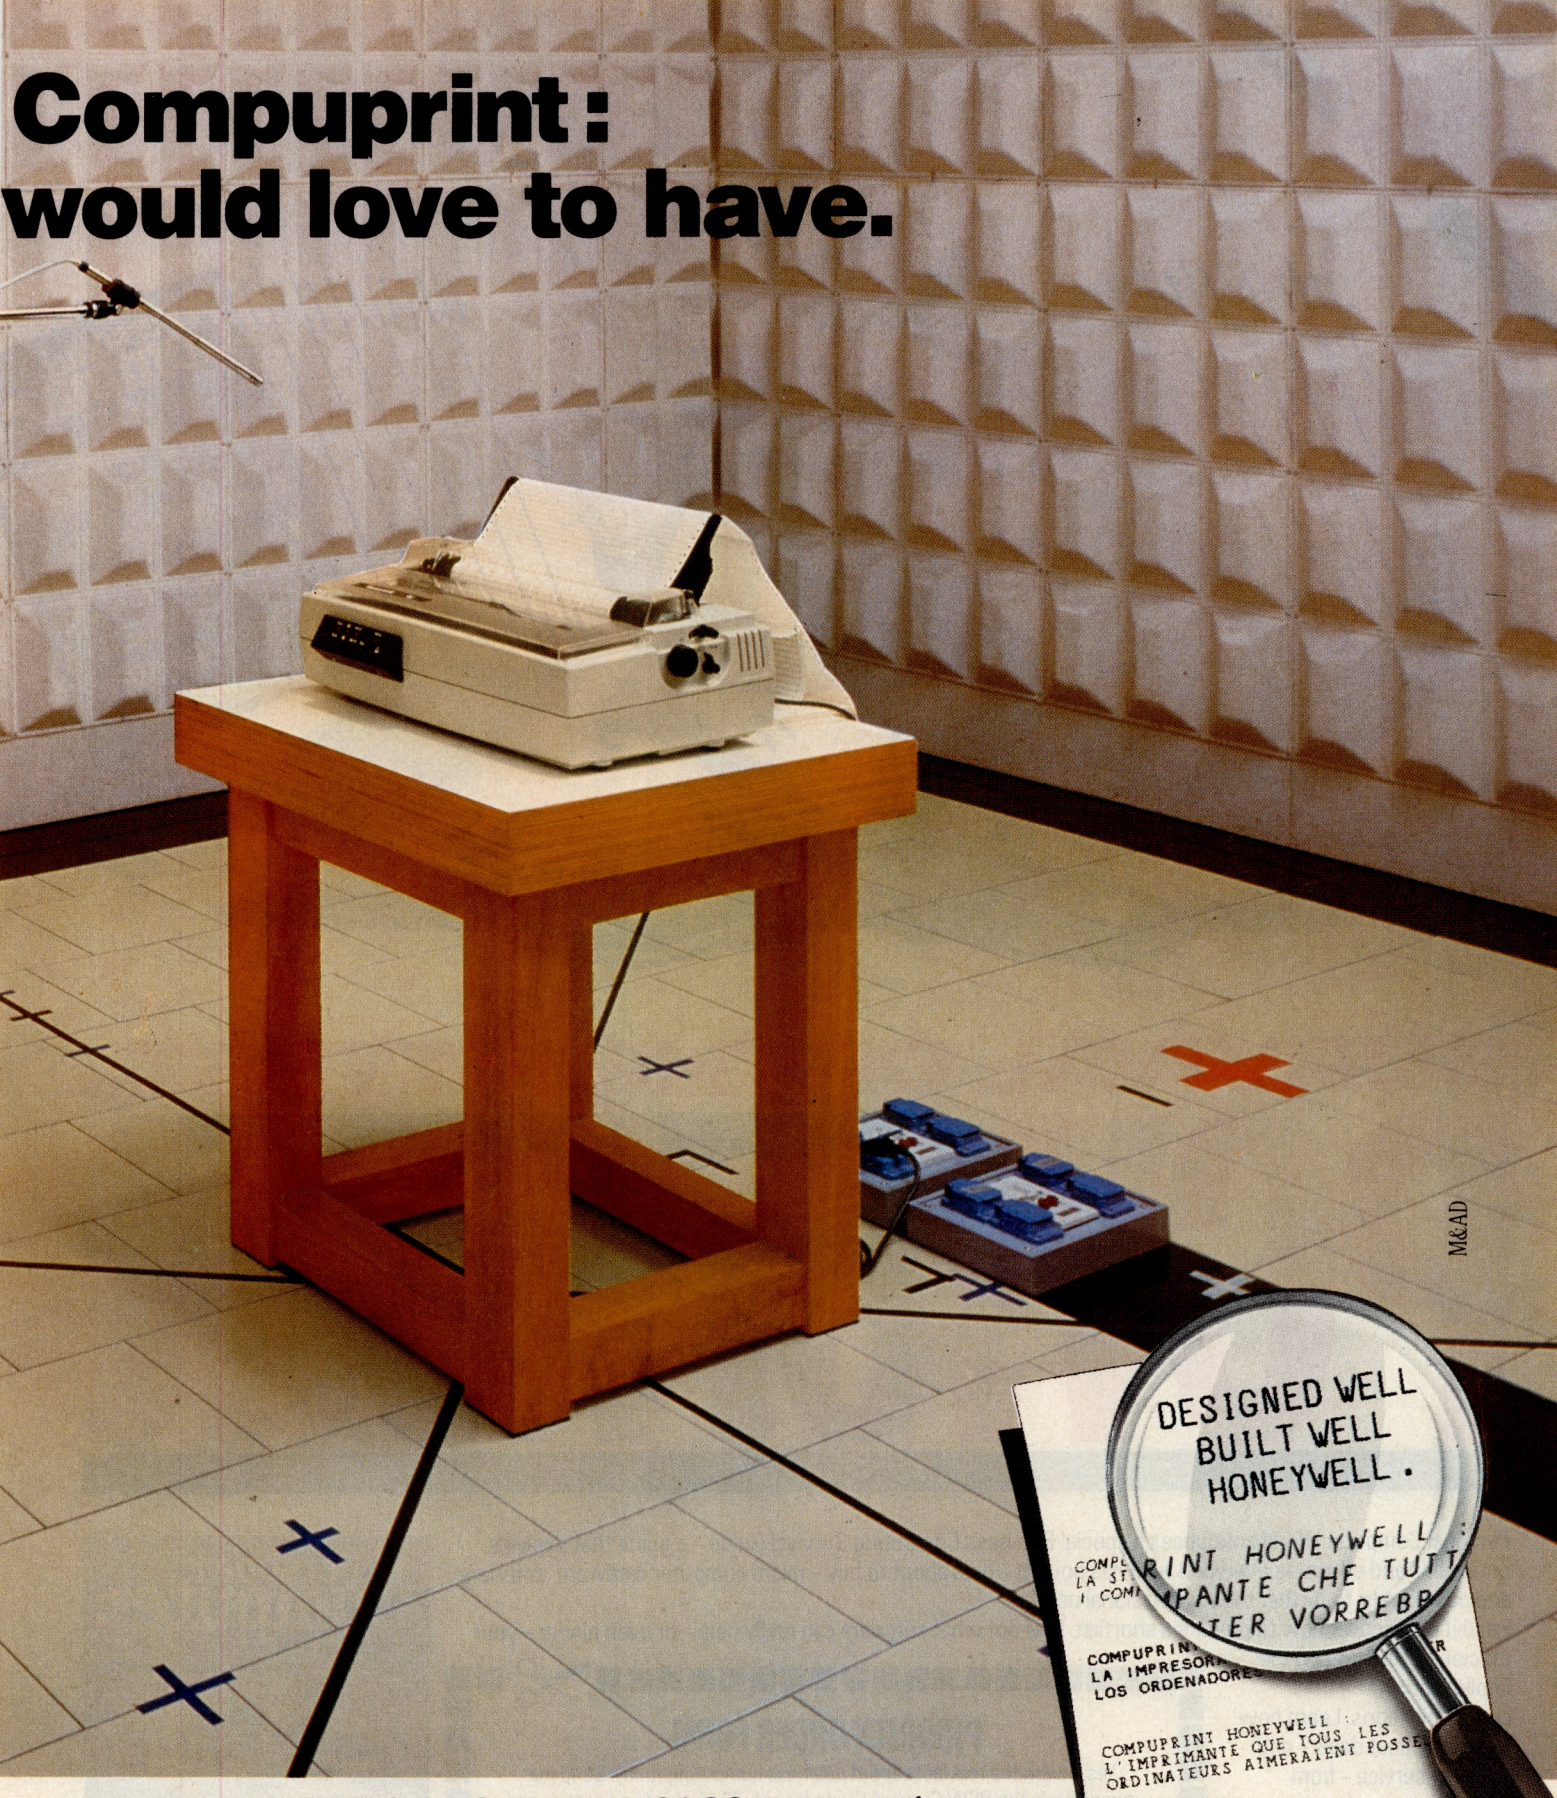


M&AD

It goes without saying that a Compuprint 34 CQ can print in different fonts and characters and can produce "high quality print" to a high standard of definition. The most demanding tests have proved its flexibility and quiet operation and its compatibility with any computer.
That's why everyone would love to have such a printer, since perfection is everyone's goal.
For further information please contact: Honeywell Information Systems Italia
Maxted Road, Hemel Hempstead, Herts HP2 7DZ
Tel. 0442/42291 (ext.4546-4320-4547) Tlx 82413

**Together, we can find the answers.**

**Honeywell**

Honeywell Information Systems Italia

AT YOUR NEWSAGENT NOW

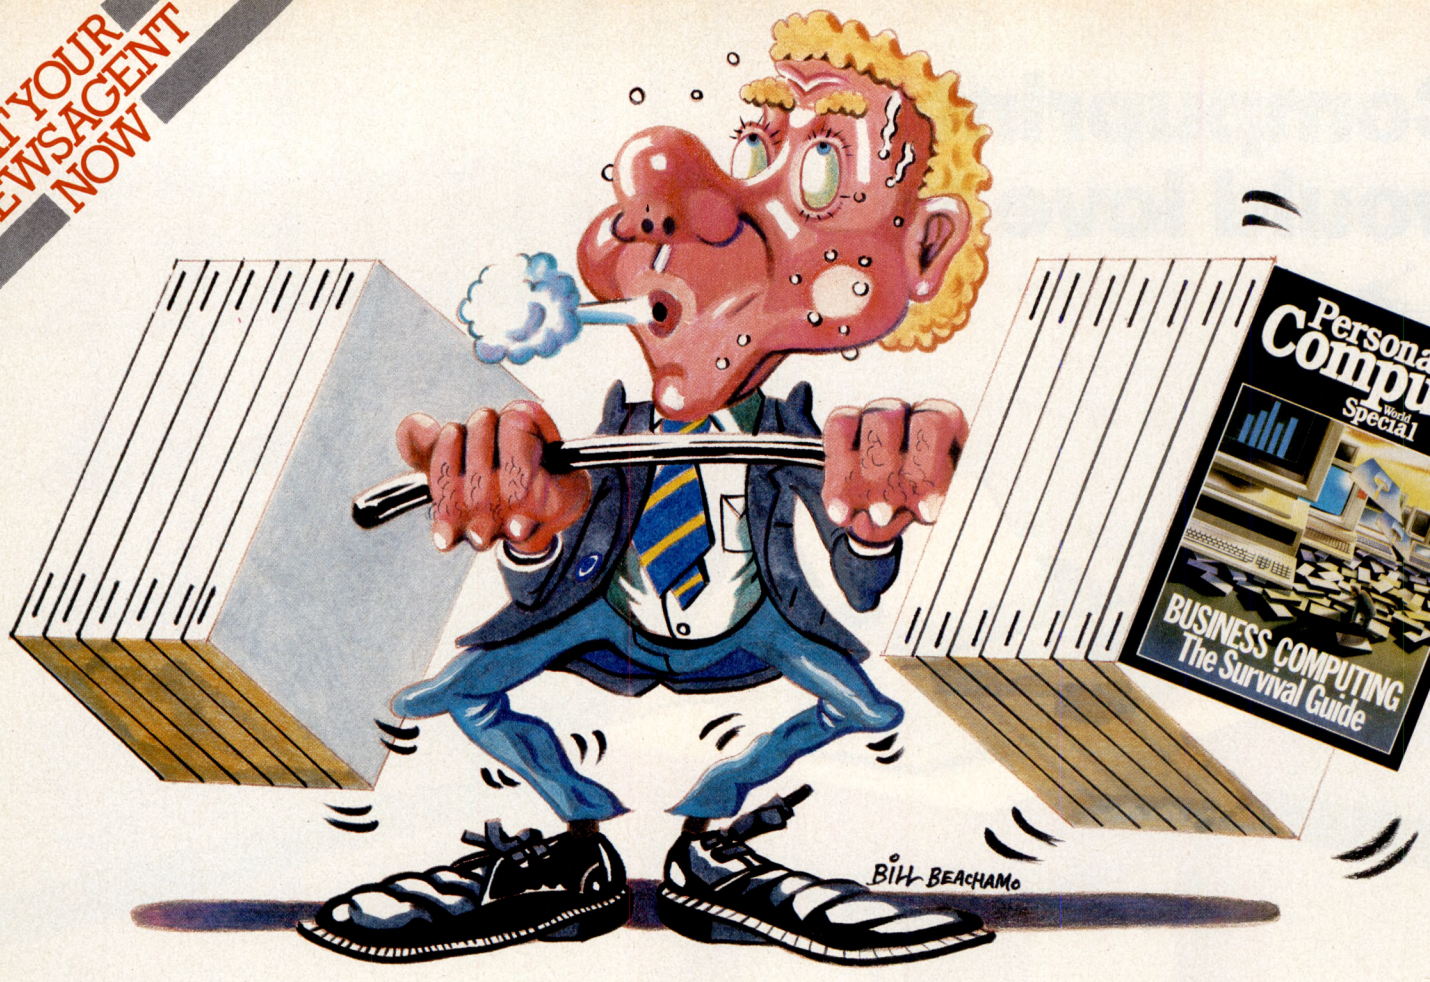


# SURVIVAL OF THE FITTEST...

# PCWorkout

Personal Computer World announces a special Business Computing Survival Guide – a guide that explains, entertains and educates everyone who has bought – or is about to buy – micro computer hardware, software and peripherals, to further their professional needs.

Read it an discover how to prepare a shortlist. Find out what software can really help – or even hinder – your efficiency. Understand the implications of communications. Learn how to get the best deals – and the best service – from dealers.

Written by a team of impartial experts, carefully selected by PCW, the Business Computing Survival Guide costs an incredibly low £2.95. Order your copy now – you may not survive without it.

## PRIORITY ORDER FORM

Yes, I want the real facts about business computing today. Send me immediately the PCW Survival Guide for only £2.95 plus 55p postage and packing, total £3.50.

☐ I enclose a cheque payable to Personal Computer World for £_____

☐ Please charge my ☐ Visa ☐ Access ☐ AmEx ☐ Card No: _____

**Expiry Date:** _____ **Signed** _____

**Name** _____

**Position** _____

**Company** _____

**Address** _____

Please send this order form with your remittance to Personal Computer World, Subscription Department, Freepost 38, London W1E 6QZ. No stamp required.

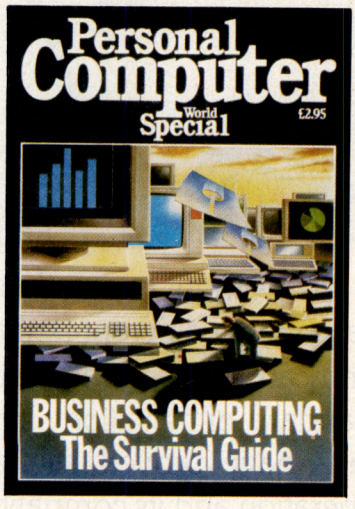

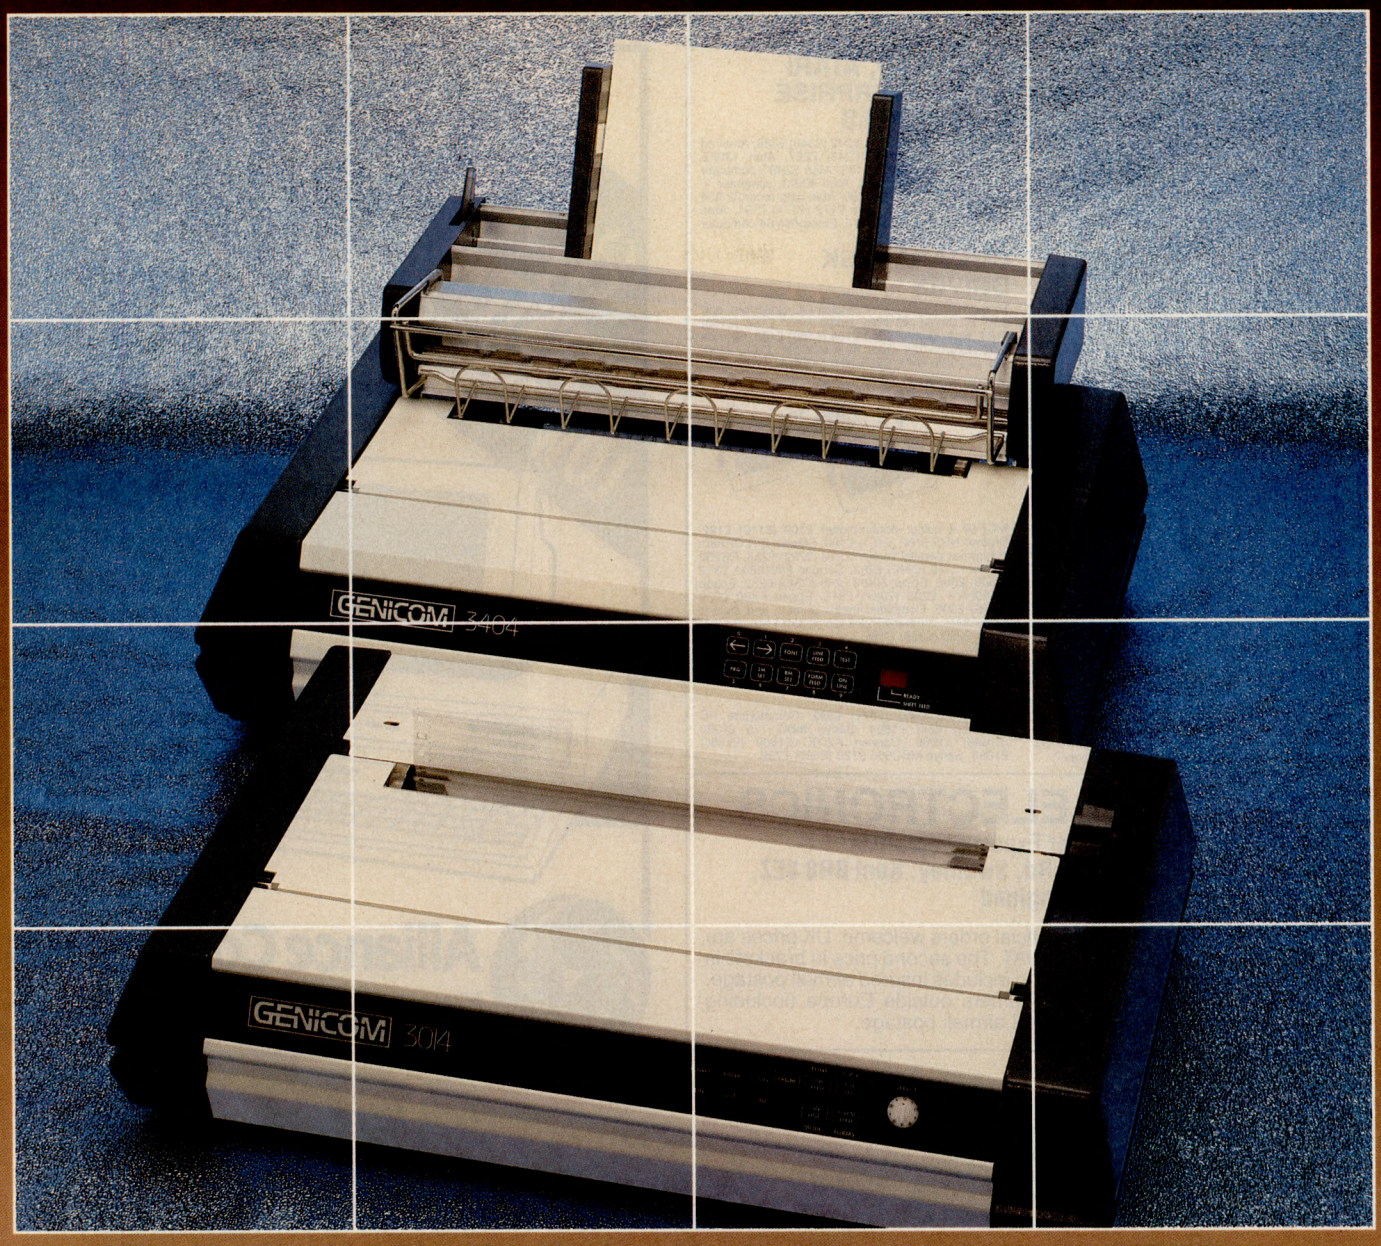


# Genicom—The versatile printers for business applications

Genicom specialise in versatile matrix printers able to meet a wide range of business needs.

The 3024 PC, for example, combines 200cps draft printing with 100cps for bold text and 40cps for near letter quality output. Ideal for the smaller business, it offers extensive compatibility with personal computers, full graphics support, reliable performance and impressive paper handling options.

Faster throughput comes from the 3404 with 400cps in draft mode and 100cps for near letter quality. There's also an impressive graphics capability as well as a colour printing option. Add an automatic sheet feeder and the printer can be left to work on its own!

All Genicom (you may remember them better as General Electric?) printers are compact, easy to operate, quiet and highly reliable.

For full details on the complete Genicom range, just talk to Teleprinter Equipment, one of the UK's largest distributors of computer peripherals.
Ring Tring (0422 82) 4011.

All products are backed by TE Datacare, the company's own nationwide customer support and service organisation.

CAE GROUP

**Teleprinter Equipment Ltd.**
64-82 Akeman Street, Tring, Herts. HP23 6AJ. Telephone: Tring (0442 82) 4011/5551
Telex: 82362 BATECO G Cables: RAHNO TRING.
Regional Sales and Service: Manchester, Unit 5, Fivefold Industrial Park, Manchester Street, Oldham, OL9 6TP. Manchester (061) 626 3371

Associated Companies General Audio and Data Communications Ltd. Communication Accessories and Equipment Ltd.
Morse Equipment Ltd. Teleprinter Rentals Ltd. Datacare – a division of Teleprinter Equipment Ltd. Parent Company: William Batey & Co (Exports) Ltd. (Founded 1946).

## ORIC AND SINCLAIR COMPUTERS



Oric Atmos computer 48K £99 (£99) £109. MCP40 Oric printer/plotter £109 (£110) £122. Sinclair pocket TV £97 (£95) £101. Sinclair QL Computer £379 (£378) £399. QL Floppy disk interface £107 (£103) £109. Sinclair Spectrum Plus Computer 48K £127 (£129) £149. Kit to upgrade the Spectrum to Spectrum Plus £30 (£30) £40. Microdrive £49 (£50) £60. RS232 interface 1 £49 (£50) £60. Special offer: Microdrive + Interface 1 + 4 cartridges £97 (£99) £107. Blank microdrive cartridges £2.50 (£3) £4. Spectrum floppy disk interface (See Cumana disk section for suitable disk drives) £97 (£89) £99. Interface 2 £20.45 (£20) £24. 32K memory upgrade kit for 16K Spectrum (issue 2 and 3 only) £31 (£28) £30. Spectrum Centronics printer interface £46 (£42) £47. ZX printer has been replaced by the Alphacom 32 £71 (£69) £82. 5 printer rolls (State whether Sinclair or Alphacom) £13 (£16) £21. ZX81 computer £35 (£35) £45. 16K ram packs for Z81 £28 (£25) £30.

## COMMODORE COMPUTERS

Commodore C16 Starter Pack £119 (£119) £151. Commodore Plus/4 £147 (£142) £174. Commodore 64 £189 (£194) £226. Convertor to allow most ordinary mono cassette recorders to be used with the Vic 20 and the Commodore 64 £9.78 (£9) £11. Commodore cassette recorder £43 (£44) £50. Centronics printer interface for Vic 20 and the Commodore 64 £45 (£41) £46. Disk drive £197 (£201) £232. 1520 printer/plotter £99 (£96) £111. MPS801 Printer £189 (£191) £229.

## ACORN COMPUTERS

Acorn Electron £119 (£119) £139. BBC Model B £354 (£343) £383. BBC Model B with disk interface £474 (£461) £491. Colour monitor £188 (£228) £268. Kenda double density disk interface system £137 (£131) £141. See below for suitable disk drives.

## AMSTRAD, ATARI AND ENTERPRISE COMPUTERS

Amstrad colour computer £342 (£348) £388. Amstrad green computer £232 (£247) £287. Atari 130XE computer £158 (£163) £183. Atari 520ST computer £634 (£634 (£616) £656. Atari 800XL computer + disc drive £229 (£230) £260. Atari data recorder £34 (£37) £47. Atari disk drive £172 (£171) £191. Atari 1020 printer £93 (£99) £115. Enterprise 64 computer £234 (£236) £256.

## CUMANA DISK DRIVES

To suit disk interfaces of Sinclair QL, Spectrum, and BBC B. Single: 40 track single sided £164 (£163) £183, 40 tr double sided £169 (£168) £188, 80 tr ds £219 (£209) £229. Dual: 40 tr ss £294 (£280) £320, 40 tr ds £325 (£325) £365, 80 tr ds £414 (£390) £430.

## PRINTERS



MCP40 4 colour printer/plotter £109 (£110) £122. Brother HR5 £162 (£161) £193. Shinwa CTI CPA80: centronics parallel version £218 (£222) £258. RS232 version £238 (£240) £282. Cannon PW1080A £312 (£308) £358. Epson RX80 £249 (£249) £282. Epson RX80F/T+ £283 (£281) £316. Epson FX80 £339 (£305) £335. Combined matrix printers and electric typewriters: Brother EP22 £135 (£124) £144, Brother EP44 £230 (£226) £246.

## BUSINESS COMPUTERS

Epson PX8 £900 (£872) £892. Commodore PC £1595 (£1564) £1664. Sanyo MBC 775 £1920 (£1899) £1999. Cannon A200C £1609 (£1586) £1686. Sanyo MBC550 £723 (£699) £799.

# SWANLEY ELECTRONICS

**The Computer Export Specialists**
**Dept PCW, 32 Goldsel Rd, Swanley, Kent BR8 8EZ, England**

Tel: SWANLEY (0322) 64851. Official orders welcome. UK prices are shown first and include post and VAT. The second price in brackets is for export customers in Europe and includes insured airmail postage. The third price is for export customers outside Europe (including Australia etc) and includes insured airmail postage.

# apricot SYSTEMS AT LOW, LOW PRICES FROM ALLIANCE

**UP TO 25% DISCOUNT CASH & CARRY**

**UP TO 15% DISCOUNT WITH FULL INSTALLATION & BACK-UP**



**ALL MAJOR SOFTWARE AND PRINTERS**

# Alliance Computers

**Alliance Computers Limited Brookfields Industrial Park Werrington Peterborough PE4 6LA Tel: 0733 77100**

**BIGGER STOCKS**

# GARWOOD IS GROWING!

**(and you can reap the benefit)**

**CHEAPER PRICES**

| DISKS | | | | DYSAN | | 3M | | MEMOREX | | BASF | | MAXELL | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Price per box of 10 | | | TPI | 1-4 | 5-9 | 1-4 | 5-9 | 1-4 | 5-9 | 1-4 | 5-9 | 1-4 | 5-9 |
| 5¼" | S/S | S/D | 48 | | | | | 15.60 | 14.70 | 14.60 | 13.70 | | |
| | S/S | D/D | 48 | 17.25 | 16.20 | 15.10 | 14.20 | 17.10 | 16.00 | 17.60 | 16.50 | | |
| | D/S | D/D | 48 | 25.30 | 23.70 | 20.70 | 19.40 | 20.60 | 19.30 | 21.50 | 20.20 | | |
| | S/S | Q/D | 96 | 25.30 | 23.70 | 23.10 | 21.80 | 24.70 | 23.20 | 23.10 | 21.70 | | |
| | D/S | Q/D | 96 | 31.80 | 29.80 | 27.00 | 25.30 | 27.40 | 25.70 | 26.80 | 25.20 | | |
| 8" | S/S | S/D | 48 | | | 16.80 | 15.75 | 19.80 | 18.50 | 15.20 | 14.30 | | |
| | S/S | D/D | 48 | 24.70 | 23.15 | 21.75 | 20.40 | 20.80 | 19.50 | 20.00 | 18.80 | | |
| | D/S | D/D | 48 | 29.30 | 27.45 | 25.05 | 23.50 | 27.10 | 25.40 | 23.80 | 22.30 | | |
| 3" Compact (for the Amstrad Disc Drive) | | | | | | | | | | | | 39.00 | 36.00 |
| 3½" Micro | S/S | D/D | 135 | | | | | 41.80 | 39.20 | | | | |

**Disc prices are exc. VAT but inc. carriage.** S/S = Single Sided D/S = Double Sided S/D = Single Density D/D = Double Density Q/D = Quad Density

**STOP PRESS** – NOW AVAILABLE MAXELL 3" Compact Disks available in individual storage case. **£4.60** inc VAT & POSTAGE
**GREAT NEW OFFER** – 1,000 LABEL-TRACK® 3½"x17 1/16 Computer Labels in flip top dispenser **£5.75** inc VAT & POSTAGE

**RIBBONS** supplied for most printers **(including the Amstrd DMP1 @ £6.50 inc VAT + Postage)** Prices on Application

| LISTING PAPER plain or ruled) Price per box | | | Boxed | 1-4 boxes | 5-9 boxes | 10+boxes | |
|---|---|---|---|---|---|---|---|
| 11"x8½" | 1PT | 60 gsm | 2000 | 9.45 | 8.85 | 8.55 | Listing Paper prices are exc. VAT. Delivery free within 15 mile radius of Brentwood. Carriage at cost outside this area. |
| 11"x9½" | 1PT | 60 gsm | 2000 | 10.05 | 9.40 | 9.10 | |
| 11"x9½" | 1PT | 70 gsm | 2000 | 11.40 | 10.70 | 10.35 | |
| 11"x9½" | 2PT | NCR | 1000 | 15.40 | 14.40 | 13.95 | |
| 11"x14½" | 1PT | 60 gsm | 2000 | 13.80 | 12.90 | 12.50 | |

**PRINTER OFFER** – MT80+ Matrix Printer 100 c.p.s. RRP £217+VAT OUR PRICE **£217** inc VAT+carriage.

**GARWOOD's STATIONERY CATALOGUE** – Full colour 224 pages – **£1.75** inc postage

BARCLAYCARD VISA

# Garwood (Wholesale) Limited

Access

**45 Plovers Mead, Wyatts Green, Essex CM15 0PS ☎ Blackmore (0277) 823747**

# Expand Your PC To A Multi-User System With Advanced Digital's PC-Slave




## Up To 32 Users

Expanding your PC to a multi-user system is easy. Simply plug in a PC SLAVE processor board and ASCII terminal for each user. With ADC's unique Master/Slave concept, each user runs independent of other users without speed degradation.

RTNX executive software turns your PC into a master processor and shares disks, peripherals and data with the slaves. ADC's PC-File Server provides you with additional expansion slots, hard disk drive and a high-speed streaming tape back-up for your IBM PC System.

## PC SLAVE FEATURES:

- 8 MHz, 8088 CPU
- 256 kB of RAM, expandable to 768 kB
- Two Serial I/O Ports

ADVANCED DIGITAL CORPORATION

Advanced Digital Corporation, USA
5432 Production Drive, Huntington Beach, CA 92649
Tel. (714) 891-4004 • Telex 183210 ADVANCED HTBH

Advanced Digital U.K. Limited
27 Princes St., Hanover Square
London W1R8NQ • United Kingdom
(01) 409-0077 • (01) 409-3351 • Telex 265840 FINEST

*RTNX is a trademark of LOGICRAFT
*PC-DOS is a trademark of International Business Machines
*MS-DOS is a trademark of Microsoft Corporation
*LOTUS 1-2-3 is a trademark of Lotus Development Corporation
*Multi-Plan is a trademark of Micro Soft Corporation
*WordStar is a trademark of MicroPro Corporation

# WE KNEW WE HAD ANOTHER WINNER... BUT IT'S NICE TO KNOW OTHERS SHARE OUR OPINION

## INTRODUCING THE OSBORNE EXPRESS




**"The express is hard to fault."**
Personal Computer World March 1985

**"A charming, complete and capable budget CP/M micro."** What Micro February 1985

The company which started the portable computer revolution in 1981 is back–with another outstanding micro – the Osborne Express. The experts have described it as "delightful", "charming", "faultless". The Express is Smaller, lighter and friendlier than any other transportable. It features:

- **7in Amber monitor 80 × 24 display**
- **2 400k disk drives, 800k storage**
- **Industry standard CP/M operating system**
- **Optional 10 megabyte storage**

See the Express and judge for yourself. At the unbeatable price of £1,295 (with over £1,200 worth of quality software included) you cannot afford to pass up the chance.

Call Future Management (Sales) on (0908) 615274 for information.

**Future Management (Portable Computers) Ltd**
**38 Tanners Drive, Blakelands, North,**
**Milton Keynes, Buckinghamshire MK14 5LL**

**A Future Management Corporation Company.**

# NATIONAL COMPUTER SERVICES

| | |
|---|---|
| **LOWEST PRICED DOT-MATRIX PRINTER??!!** | |
| SMITH CORONA Fastext 80cps | **£129** |
| **LOWEST PRICED DAISYWHEEL PRINTER??!!** | |
| DAISY JUNIOR 14cps | **£189** |
| **LOWEST PRICED DAISY PRINTER/TYPEWRITER??!!** | |
| JUKI 2200 with internal serial/parallel interface | **£259** |
| **LOWEST PRICED NLQ PRINTER??!!** | |
| MICRO P 165 165cps NLQ 75cps | **£249** |
| **UK BEST SELLING NLQ PRINTER – LOWEST PRICE??!!** | |
| CANON PW 1156A 160cps NLQ 27cps | **£369** |
| **OTHER PRINTERS AT LOW LOW PRICES!!** | |

EPSON RX80 **£193** MICROLINE 82 **£235**
BROTHER HR25 **£627**

*TRADE WAREHOUSE PRICES*
UK ORDERS ADD **15% VAT & £7 + VAT for CARRIAGE**

## NATIONAL COMPUTER SERVICES

The Sussex Suite, City Gates, 2-4 Southgate
CHICHESTER, West Sussex PO19 2DJ, England
**Tel: 0243 778479** (5 lines)

# SOLID STATE DESK TOP SWITCHING DEVICES (FULL TWELVE MONTHS GUARANTEE)




**No Problems with Cable Lengths or Data Loss/Errors**
**Having Separate Ports, Avoids Over-loading Computer**
**Metal case with built-in power supply and fitted plug**

### THE PRINTERSHARERS
(SEVERAL MICROS TO 1 PRINTER)

| | | |
|---|---|---|
| **PARALLEL:** | 3 WAY | 6 WAY |
| (AS BBC) 26 PIN | **£65**-(b) | **£129**-(c) |
| CENTRONICS: | 2 WAY | 3 WAY |
| (36 PIN) | **£95**-(c) | **£105**-(c) |
| **SERIAL** RS232 | 3 WAY – | **£65**-(b) |
| RS423 | 3 WAY – | **£40**-(b) |

5-Din (As BBC)





### THE PRINTCHANGERS
(1 MICRO TO SEVERAL PRINTERS)

| | | |
|---|---|---|
| **PARALLEL** – 26 PIN | 3 WAY – | **£70**-(b) |
| CENTRONICS – 36 PIN | 2 WAY – | **£95**-(c) |
| | 2 WAY – | **£105**-(c) |
| **SERIAL** RS232 | 3 WAY – | **£65**-(b) |
| RS423 | 2 WAY – | **£40**-(b) |

### THE PRINTERCROSSOVERS
(2 MICROS TO 2 PRINTERS)

| | | |
|---|---|---|
| PARALLEL – | 26 PIN | **£75**-(c) |
| CENTRONICS – | 36 PIN | **£95**-(c) |
| SERIAL RS232 | | **£70**-(b) |



PRICES ARE EXCLUDING VAT. Postage: (b) £2-(c) £2.50

**KEYZONE LTD**
U 14, REGENERATION HOUSE, SCHOOL ROAD,
PARK ROYAL, LONDON NW10 6TD.
Telephone: 01-965 1684/1804 Telex: 8813271

VISA

# VENTGUARD

## ACOUSTIC COVERS

The Sound of Silence for the Electronic Office



Brother: CPT: Diablo: Epson, Facit: Honeywell, IBM: JUKI, Mannesman-Tally, NEC: Olivetti: Philips, Qume: Ricoh: Tandy, Wang: Wordplex: Xerox.





Phone us now for instant attention or write to:

**T. MAT Limited, Sullivan Way, Loughborough Leicestershire LE11 0QS**

Telephone: Loughborough (0509) 217171 Telex: 341819





# Tiger Software

COMPUTERISED PACKAGING SPECIALISTS

SPACE = MONEY
SAVE SPACE
AND SAVE MONEY!
USE SPACE WISELY!

**IF** Your company puts cartons into cases.
Your company puts cases onto pallets.
Your company manufactures round containers
Your company is planning a new product and packaging launch (This is where we really help)

## THEN SAVE MONEY

On distribution costs by getting your primary packs and pallet patterns the most cost effective!

Programs include: Pallet, Collation, Design, Profile, Cylinder/ Drum Nesting, Sachet Nesting, Container loading, Case Compression strength, Bottle . . .

★ Demo disks available FREE on request for some programs
★ Also, agent for CAPE Micro Software

*For further details contact:*

**TIGER SOFTWARE**
**58 Shelburne Road, High Wycombe**
**Bucks HP12 3NQ**
**Tel: 0494 28297**



LOOK

**If you were a**

**COMPUTACLUB**

**member**
**you would be entitled to:**

**15% discount off** all Amsoft Software
**10% off** KORES® Ribbons
**10% off** 1000 LABEL-TRACK® Computer Labels

3" MAXELL® Compact Disks **£39**

**3M 5¼" Discs at Trade Prices**

| | | | |
|---|---|---|---|
| S/S D/D | **£14.45** | S/S Q/D | **£21.90** |
| D/S D/D | **£19.60** | D/S Q/D | **£25.35** |

All prices include VAT and Postage

**All orders despatched on day of receipt**
SUBJECT TO STOCK AVAILABILITY

**Plus SPECIAL OFFERS EVERY MONTH**

**Annual membership fee £11.50**

For full details and an application form, write to

## COMPUTATECH LTD

**45 Plovers Mead, Wyatts Green, Essex CM15 0PS**



# BARGAIN SOFTWARE

Dept PCW5. Unit 1. 1 Esmond Road. London W4 1JG
Ring 01-995 2763 for special offers

| SPECTRUM | RRP | Our Price |
|---|---|---|
| ALIEN | 9.95 | 6.95 |
| ALIEN 8 | 9.95 | 6.90 |
| BEACH HEAD | 7.95 | 5.95 |
| BLUE MAX | 7.95 | 5.95 |
| BRIAN BLOODAX | 7.95 | 5.90 |
| BROAD ST (REGARDS TO) | 7.95 | 5.95 |
| BRUCE LEE | 7.95 | 5.95 |
| BULGE THE | 9.99 | 7.50 |
| CHUCKIE EGG 2 | 6.90 | 4.75 |
| CONFUZION | 6.95 | 5.25 |
| DALEY'S DECATHLON | 6.90 | 4.99 |
| DEATH STAR INTERCEPTOR | 7.95 | 5.25 |
| DRAGONTORC OF AVALON | 7.95 | 5.90 |
| EMERALD ISLE | 6.95 | 5.50 |
| EVERYONE'S A WALLY | 9.95 | 6.90 |
| FOOTBALL MANAGER | 6.95 | 5.25 |
| FORMULA 1 | 7.95 | 5.95 |
| GHOSTBUSTERS | 9.99 | 7.50 |
| GRAND NATIONAL | 6.95 | 5.20 |
| GREMLINS | 9.95 | 7.25 |
| CYRON | 9.95 | 7.40 |
| HERBERT'S DUMMY RUN | 9.95 | 6.90 |
| KNIGHTS LORE | 9.95 | 6.50 |
| LEVEL 9 GAMES | 9.95 | 7.20 |
| MATCH DAY | 7.95 | 5.25 |
| MEGA HITS (10 TOP TITLES) | 19.95 | 12.95 |
| MINDER | 9.95 | 7.40 |
| MOON CRESTA | 6.95 | 5.20 |
| PROJECTS FUTURE | 6.95 | 4.99 |
| PSYTRON | 7.95 | 5.25 |
| RAID OVER MOSCOW | 7.95 | 5.80 |
| ROCKY HORROR SHOW | 8.95 | 6.50 |
| SHADOW FIRE | 9.95 | 6.95 |
| SHERLOCK HOLMES | 14.95 | 10.95 |
| SPY HUNTER | 7.95 | 5.80 |
| STARION | 7.95 | 5.70 |
| SQUASH (J. BARRINGTON'S) | 7.95 | 5.70 |
| SUPERSTAR (B. JACKS) | 7.95 | 5.70 |
| TASWORD II | 13.95 | 11.95 |
| TECHNICIAN TED | 5.95 | 4.55 |
| TIR NA NOG | 9.95 | 7.50 |
| VALHALLA | 14.95 | 3.99 |
| WIZARDS LAIR | 6.95 | 5.20 |
| WORLD SERIES BASEBALL | 6.95 | 5.20 |
| ZAXXON | 7.95 | 5.90 |

| COMMODORE 64 | RRP | Our Price |
|---|---|---|
| ARCHON | 11.95 | 8.99 |
| BEACH HEAD | 9.95 | 7.40 |
| BLAGGER GOES TO HOLLYWOOD | 9.95 | 7.20 |
| BOULDER DASH | 8.95 | 6.95 |
| BROAD ST (REGARDS TO) | 7.95 | 5.95 |
| BRUCE LEE | 9.95 | 7.40 |
| BULGE THE | 9.99 | 7.50 |
| CAULDRON | 7.99 | 5.90 |
| CIPHOID 9 | 9.95 | 6.99 |
| CONAN THE BARBARIAN (D) | 14.95 | 12.95 |
| DAMBUSTERS | 9.95 | 7.40 |
| DECATHLON | 9.99 | 7.50 |
| ELITE (END OF MAY) | 14.95 | 11.00 |
| EMERALD ISLE | 6.95 | 5.50 |
| ENTOMBED | 9.95 | 6.90 |
| EUREKA | 14.95 | 9.95 |
| EVERYONE'S A WALLY | 9.95 | 6.95 |
| FOOTBALL MANAGER | 7.95 | 5.90 |
| FORBIDDEN FOREST | 8.95 | 6.95 |
| GATES OF DAWN | 8.95 | 7.25 |
| GHOSTBUSTERS | 10.99 | 8.25 |
| GREMLINS | 9.95 | 7.25 |
| GRIBBLY'S DAY OUT | 7.95 | 6.50 |
| HERBERT'S DUMMY RUN | 9.95 | 6.90 |
| IMPOSSIBLE MISSION | 8.95 | 6.65 |
| ICE PALACE | 7.95 | 6.25 |
| INT. BASKETBALL | 5.99 | 4.50 |
| INT. SOCCER (ROM) | 14.99 | 10.95 |
| LODE RUNNER | 9.95 | 7.40 |
| MEGA HITS (10 TOP TITLES) | 19.95 | 12.95 |
| MOON CRESTA | 6.95 | 5.40 |
| ON COURT TENNIS | 10.99 | 8.25 |
| ON FIELD FOOTBALL | 10.99 | 8.25 |
| PIT STOP II | 10.95 | 8.50 |
| RAID ON BUNGELING BAY | 9.95 | 7.50 |
| ROLAND'S RAT RACE | 7.90 | 6.20 |
| SHADOW FIRE | 9.95 | 6.95 |
| SLAP SHOT | 8.95 | 6.50 |
| SPITFIRE 40 | 9.95 | 7.50 |
| SUMMER GAMES | 14.95 | 10.95 |
| SUPER HUEY | 11.95 | 8.95 |
| SUPER PIPELINE 2 | 8.90 | 6.50 |
| THEATRE EUROPE | 9.95 | 6.99 |
| TIR NA NOG | 9.95 | 7.50 |
| WORLD SERIES BASEBALL | 7.95 | 5.75 |

**ALL PRICES INCLUDE P&P. OVERSEAS ORDERS PLEASE ADD £1 PER TAPE** PD486

INTERLEX

DEALERS AND CONSULTANTS

**If you have a used computer system to buy or sell then make sure you talk to the right people.**

## COMPUTERLINES

**A Market-Place for Used Computers**

Computerlines used computers is a market-place for used computer systems and peripherals like printers and hard disk units etc. It is boxed on Prestel – page 36019 – the most interactive public viewdata system in the world.

*Some used systems currently on offer are:*

| | |
|---|---|
| APRICOT XI | SUPERBRAIN 1 |
| SIRIUS | LSI — II |
| ALPHA MICRO | SAGE IV |
| DIABLO | DIGICO PRINCE |
| OSBOURNE I | APPLE II E |
| COMMODORE 8096 | QUME 5/45 |

*For non Prestel users, lists of systems on offer are mailed on request.*

## INTERLUX LTD

**Microcomputer Systems and Services**
**Imperial House, Lower Teddington Road**
**Kingston upon Thames, Surrey KT1 4EP**
**Tel: 01-943 4366. Telex: 928017 Scott G**
**TG Mailbox: MMU429. Prestel Mailbox: 019434366**



## ADVANCED INPUT DEVICES (UK) LTD

## BUSINESS SERVICES DIVISION

### SAVE ON PRINTERS!

Quen-Date Daisy Wheel & Dot Matrix Printers (Epson compatible)
"New" Dot Matrix Printer – IBM PC compatible
Send for Price List & Literature. (Dealer enquiries invited)

### SAVE ON SOFTWARE!

Save up to 40% on most popular business packages
PC.DOS, MS.DOS, CPM/86, CPM/80. Most formats available.
Special offers on: Easy Junior Integrated Accounts, UIS "RAP" Communications Software and Telecom Gold Mailbox
Send for details and Price List.

### SAVE ON POWER PRODUCTS!

Solve all your mains power supply problems – Uninteruptable Power Supply (UPS) Units, Constant Voltage Line Conditioners (CVT), Surge and Spike protectors for individual and multiple equipment situations.
All UK manufactured by Rayman Electronics. Send for details.

### ELECTRONIC SHOP! SHOP BY MODEM!

Use your computer to shop from the comfort of your home – our Data Base will shortly be available on-line for instant shopping. Browse through our extensive range of products including business software, games, printers, listing paper, accessories, sundries, etc.
No modem yet? No problem – direct connect low cost modems through to full auto-answer/dial versions available. Send for application form to join the Discount Shopping Club and Access details for Electronic Shopping.
(Starts early May 1985 and includes Electronic Mail facilities for Members)

*Write for details to:*

**ADVANCED INPUT DEVICES (UK) LTD**
**Freepost, Pinner, Middx. HA5 2BR**
**(no stamp required)**

or phone our 24 hour answerphone service
**01-429 2675**



## HISOFT

High Quality Microcomputer Software

# CP/M PASCAL

When choosing a compiler, support is crucially important. It is vital to ensure that you will receive technical back-up for the package as quickly as possible. This may prove difficult, if not impossible, when the software was designed in another country and you have no access to the authors. **HiSoft Pascal** is a British product, created and manufactured by ourselves and fully supported by our technical team here in Dunstable. We offer inexpensive upgrades and we are continually extending and improving the compiler.

**HiSoft Pascal** is available in a wide variety of Z80 CP/M disc formats, is very close to Standard Pascal and comes supplied with a comprehensive and sophisticated full screen editor (ED80) which is specially designed for program development; the editor may be easily configured to suit all displays and also for special keyboards and individual keystroke sequences.

All this for a fully inclusive price of **£39.95!**

**High Quality Software at a Fair Price.**

**HiSoft** was founded over four years ago and since then has built up a reputation for the quality of its products and the strength of its support. Our utility and language software is available for most of the home computers currently on the market and we are always developing new products: our latest is **Devpac 80**, a powerful assembly language development package for all Z80 CP/M computers. **Devpac 80** is a macro assembler (GEN80), a configurable full screen editor (ED80) and a super front panel debugger (MON80) all in one integrated package.

**Devpac 80** makes Z80 assembly language development a joy to do and is incredible value at only **£39.95** inclusive!

Please feel free to write to us or telephone for immediate despatch of full technical details of all our products – there is so much more than we can say in this small space. Our next product for CP/M-80? Wait and **C**!

HISOFT
180 High St. North
Dunstable, Beds
LU6 1AT
Tel. (0582) 696421

# COMPUTER WAREHOUSE

1000's OF BARGAINS FOR CALLERS

## THE 'ALADDIN'S' CAVE OF COMPUTER AND ELECTRONIC EQUIPMENT

### RECHARGEABLE BATTERIES

Dry Fit Maintenance FREE by Sonnenschein.
**A300 07191315** 12v 3 AH same as **RS 591-770 NEW £13.95** **A300 07191202** 6-0-6 1.8 AH same as **RS 591-382 EX EQUIP £4.99** Miniature PCB mount 3.6v 100 Mah as **RS 591-477 NEW £1.00** **SAFT VR2C** 1.2v "C" size **NICADS** in 18 cell ex equipment pack. Good condition – easily split to single cells **£10.50** + pp £1.90

### EX-STOCK INTEGRATED CIRCUITS

**2732** ex equip **£3.25. 27128** – 250ns **NEW £12.00. 6116**-200 **£4.50. 6116**-250 **£3.95, 6264LP**-150 **£22.00. 4164**-200 **£3.50. 4864**-150 **£4.00, 4116**-300, **£1.20, 2114 £1.75. 6800 £2.50, 6821 £1.00, 68A09 £8.00, 68B09 £10.00, 68B09E £14.50, D8085AH-2 £12.00, D8086 £20.00, Z80A £2.99.**

### HOT LINE DATA BASE

# DISTEL©

THE **ORIGINAL FREE OF CHARGE** dial up data base 1000's of stock items and one off bargains.
**ON LINE NOW** – 300 baud, full duplex CCITT tones, 8 bit word, no parity.

**01-679 1888**

### MAINS FILTERS

Cure those unnerving hang ups and data glitches caused by mains interference.
**SD5A** As recommended by **ZX81** news letter. matchbox size up to 1000 watt load **£5.95**
**L2127** compact completely cased unit with 3 pin fitted socket Up to 750 watts **£9.99**



### Anderson Jacobson AJ510 VIDEO DISPLAY TERMINAL

Made by one of the USA's largest peripheral manufacturers the AJ510 Professional VDU terminal has too many features to include in space available – just a few are: internal Z80 cpu control, very readable 15" non glare green screen, 24 lines by 80 characters, 128 ASCII character set with lower case and graphics, standard RS232 interface, Cursor addressing, numeric key pad etc. Supplied in good **TESTED** second hand condition with full manual **£225.00** + carr £10.00. Data sheet on request.

### COOLING FANS

Keep your hot parts COOL and RELIABLE with our range of **BRAND NEW** professional cooling fans.
**ETRI 99XUOI** Dim. 92 x 92 x 25 mm. Miniature 240 v equipment fan complete with finger guard. **£9.95.**
**GOULD JB-3AR** Dim. 3" x 3" x 2.5" compact very quiet running 240 v operation. **NEW £6.95**
**BUHLER 69.11.22.** 8-16 v DC micro miniature reversible fan. Uses a brushless servo motor for extremely high air flow, almost silent running and guaranteed 10,000 hr life. Measures only 62 x 62 x 22 mm. Current cost £32.00. **OUR PRICE ONLY £12.95 complete with data.**
**MUFFIN-CENTAUR** standard 4" x 4" x 1.25" fan supplied tested EX EQUIPMENT 240 v at £6.25 or 110 v at £4.95 or BRAND NEW 240 v at £10.50. 1000's of other fans Ex Stock.
Call for Details. Post & Packing on all fans £1.60

### BUDGET RANGE VIDEO MONITORS

At a price YOU can afford, our range of **EX EQUIPMENT** video monitors defy competition!! All are for 240v working with standard composite video input. Units are pre tested and set for up to 80 col use on BBC micro. Even where MINOR screen burns MAY exist – normal data displays are unaffected.

***1000's SOLD TO DATE***

**12" KGM 320-321,** high bandwidth input, will display up to 132 columns x 25 lines. Housed in attractive fully enclosed brushed alloy case. **B/W only *£32.95***
**24" KGM** large screen black & white monitor fully enclosed in light alloy case. Ideal schools, shops, clubs etc.
***ONLY £55.00*** Carriage £10.00

A Major company's over production problems, and a special **BULK PURCHASE** enable **TWO** outstanding offers.

# COLOUR MONITOR SPECIALS



### 'SYSTEM ALPHA' 14" Multi Input Monitor.

Made in the **UK** by the famous **REDIFFUSION Co.** for their own professional computer system this monitor has all the features to suit your immediate and future monitor requirements. Two types of video input, **RGB** and **PAL** Composite Video, allow direct connection to most makes of micro computers and **VCR's.** An internal speaker and audio amplifier may be connected to your system's output or direct to a VCR machine, giving superior colour and sound quality. Many other features include PIL tube, Matching **BBC** case colour, Major controls on front panel, Separate Contrast and Brightness – even in **RGB** mode, Two types of audio input, Separate Colour and audio controls for Composite Video input, BNC plug for composite input, 15 way 'D' plug for RGB input, modular construction etc. etc.

This must be **ONE OF THE YEAR'S BEST BUYS!!!**
Supplied **BRAND NEW** and **BOXED**, complete with **DATA** and 90 day guarantee. **SUPPLIED BELOW ACTUAL COST – ONLY £149.00** + Carr.



### DECCA RGB 80-100 Monitor.

Little or hardly used manufacturer's surplus enables us to offer this special converted **DECCA RGB** Colour Video TV Monitor at a super low price of only **£99.00**, a price for a colour monitor as yet unheard of!! Our own interface, safety modification and special 16" high definition PIL tube, combine with the tried and tested DECCA 80/100 series chassis to give 80 column definition and picture quality found only on monitors costing **3 TIMES OUR PRICE**. In fact, **WE GUARANTEE** you will be delighted with this product, the quality for the price has to be seen to be believed. Supplied complete and ready to plug directo to a **BBC MICRO** computer or any other system with a **TTL RGB** output. Other features include internal audio amp and speaker, Modular construction, auto degaussing 34 H x 24 D, 90 day guarantee. Supplied in **EXCELLENT** condition, **ONLY £99.00** + Carr. Also available **UN-MODIFIED** but complete with MOD DATA. Only £75.00.

Carriage and Insurance on monitors £10.00

# DATA MODEMS

Join the communications revolution with our super range of **DATA MODEMS** with prices and types to suit all applications and budgets!!
Most modems are **EX BRITISH TELECOM** and are made to the highest standard for continuous use and reliability. RS232 interfaces are standard to all our modems, so will connect to ANY micro etc. with an RS232 serial interface.

**DATEL 2B** see **SPECIAL OFFER** centre of this ad.
**MODEM 13A, 300 baud.** Compact unit only 2" high and same size as telephone base. Standard CCITT tones, CALL mode only. Tested with data. ***ONLY £45.00 + PP £4.50.***
**MODEM 20-1, 75-1200 baud.** Compact unit for use as subscriber end to PRESTEL, MICRONET or TELECOM GOLD. Tested with data. ***£39.95 + PP £6.50.***
**MODEM 20-2**, same as 20-1 but 1200-75 baud ***£99.00.***
**TRANSDATA 307A**, 300 baud acoustic coupler. Brand new with RS232 interface. **ONLY £49.95**
**DACOM DSL2123 Multi Standard Modem**, switchable CCITT or USA BELL 103 standard. V21 300-300, V23 75-1200, V23 1200-75 or 1200-1200 half duplex.
Auto answer via MODEM or CPU. CALL or ANSWER modes plus LED status indication. Dim 2.5" x 8.5" x 9". **BRAND NEW fully guaranteed *ONLY £268.00 + PP £4.50.***
**DATEL 2412** Made by SE LABS for BT this two part unit is for synchronious data links at 1200 or 2400 baud using 2780/3780 protocol. Many features include Auto answer, 2 or 4 wire working etc. etc. **COST OVER £800. *OUR PRICE £185.00.***
**DATEL 4800, RACAL MPS4800** high speed good condition ***£285.00 CARR £10.00***

## SPECIAL 300 BAUD MODEM OFFER

Another **GIGANTIC** purchase of these **EX BRITISH TELECOM, BRAND NEW** or little used 2B data modems allows US to make the **FINAL REDUCTION**, and for **YOU** to join the exciting world of data communications at an **UNHEARD OF PRICE OF ONLY £29.95**. Made to the highest **POST OFFICE APPROVED** spec at a cost of hundreds of pounds each, the 2B has all the standard requirements for data base, business or hobby communications. All this and more!!

- 300 baud full duplex
- Full remote control
- CCITT tone standards
- Supplied with full data
- Modular construction
- Direct isolated connection
- CALL, ANSWER and AUTO modes
- Standard RS232 serial interface
- Built in test switching
- 240v Mains operation
- 1 year full guarantee
- Just 2 wires to comms. line

NOW ONLY £29.95

Order now – while stocks last. Carriage and Ins. £10.00

## SAVE £250 SUPER PRINTER SCOOP



**BRAND NEW CENTRONICS 739-2**

The "Do Everything Printer" at a price that will **NEVER** be repeated. Standard **CENTRONICS** parallel interface for direct connection to **BBC, ORIC, DRAGON** etc. Superb print quality with full pin addressable graphics and 4 type fonts plus **HIGH DEFINITION** internal **PROPORTIONAL SPACED MODE** for **WORD PROCESSOR** applications. 80-132 columns, single sheet, sprocket or roll paper handling plus much more. Available **ONLY** from **DISPLAY ELECTRONICS** at the ridiculous price of ***ONLY £199.00*** + VAT Complete with full manual etc. Limited quantity –Hurry while stocks last.
Options. Interface cable (specify) for BBC, ORIC, DRAGON or CENTRONICS 36 way plg £12.50. Spare ribbon £3.50 each BBC graphics screen dump utility program £8.60. Carriage and Ins. £10.00 + VAT

ONLY £199

## HUNDREDS OF PRINTERS EX STOCK FROM £49.00. Call Sales Office for Details.

1 only large **CALCOMP 1036** AO 3 pen drum plotter and offline 915 magtape controller. Good working order.
***ADD VAT TO ALL PRICES*** ***£2500.00.***

EX STOCK

## DEC CORNER

**PDP 1140 System** comprising of CPU, 124K memory + MMU 16 line RS232 interface, RP02 40 MB hard disk drive, TU10 9 track 800 BPI Mag tape drive, dual rack system, VT52 VDU etc. etc. Tested and running ***£3750.00***

| | |
|---|---|
| **BA11-MB** 3.5" Box, PSU, LTC | **£385.00** |
| **DH11-AD** 16 x RS232 DMA interface | **£2100.00** |
| **DLV11-J** 4 x EIA interface | **£310.00** |
| **DLVII-E** Serial. Modem support | **£200.00** |
| **DUP11** Sych. Serial data i/o | **£650.00** |
| **DQ200 Dilog** – multi RK controller | ***£495.00*** |
| **DZ11-B** 8 line RS232 mux board | **£650.00** |
| **KDF11-B** M8189 PDP 1123+ | **£1100.00** |
| **LA36** Decwriter EIA or 20 ma loop | **£270.00** |
| **LAX34-AL** LA34 tractor feed | **£85.00** |
| **MS11-JP** Unibus 32 kb Ram | **£80.00** |
| **MS11-LB** Unibus 128 kb Ram | **£450.00** |
| **MS11-LD** Unibus 256 kb Ram | **£850.00** |
| **MSC4804** Qbus (Equiv MSV11-L) 256 kb | **£499.00** |
| **PDP11/05** Cpu, Ram, i/o, etc. | **£450.00** |
| **PDP11/40** Cpu, 124k MMU | **£1850.00** |
| **RT11** ver. 3B documentation kit | **£70.00** |
| **RK05-J** 2.5 Mb disk drives | **£650.00** |
| **KL8JA** PDP 8 async i/o | **£175.00** |
| **MI8E** PDP 8 Bootstrap option | **£75.00** |
| **VT50** VDU and Keyboard – current loop | **£175.00** |
| **VT52 VDU** with RS232 interface | ***£250.00*** |

**1000's** of **EX STOCK** spares for **DEC PDP8, PDP8A, PDP11** systems & peripherals. Call for details. All types of Computer equipment and spares wanted for **PROMPT CASH PAYMENT.**

DISPLAY ELECTRONICS

All prices quoted are for U.K. Mainland, paid cash with order in Pounds Sterling PLUS VAT. Minimum order value ***£2.00***. Minimum Credit Card order ***£10.00***. Minimum BONA FIDE account orders from Government Depts., Schools, Universities and established companies ***£20.00***. Where post and packing not indicated please ADD £1.00 + VAT. Warehouse open Mon-Fri 9.30-5.30. Sat 10.30-5.30. We reserve the right to change prices and specifications without notice. Trade, Bulk and Export

**32 Biggin Way, Upper Norwood, London SE19 3XF**
**Telephone 01-679 4414 Telex 894502 Data 01-679 1888**

# ENCOURAGEMENT AND ADVICE AREN'T ALL WE'RE OFFERING TO HIGH-TECHNOLOGY INDUSTRY.

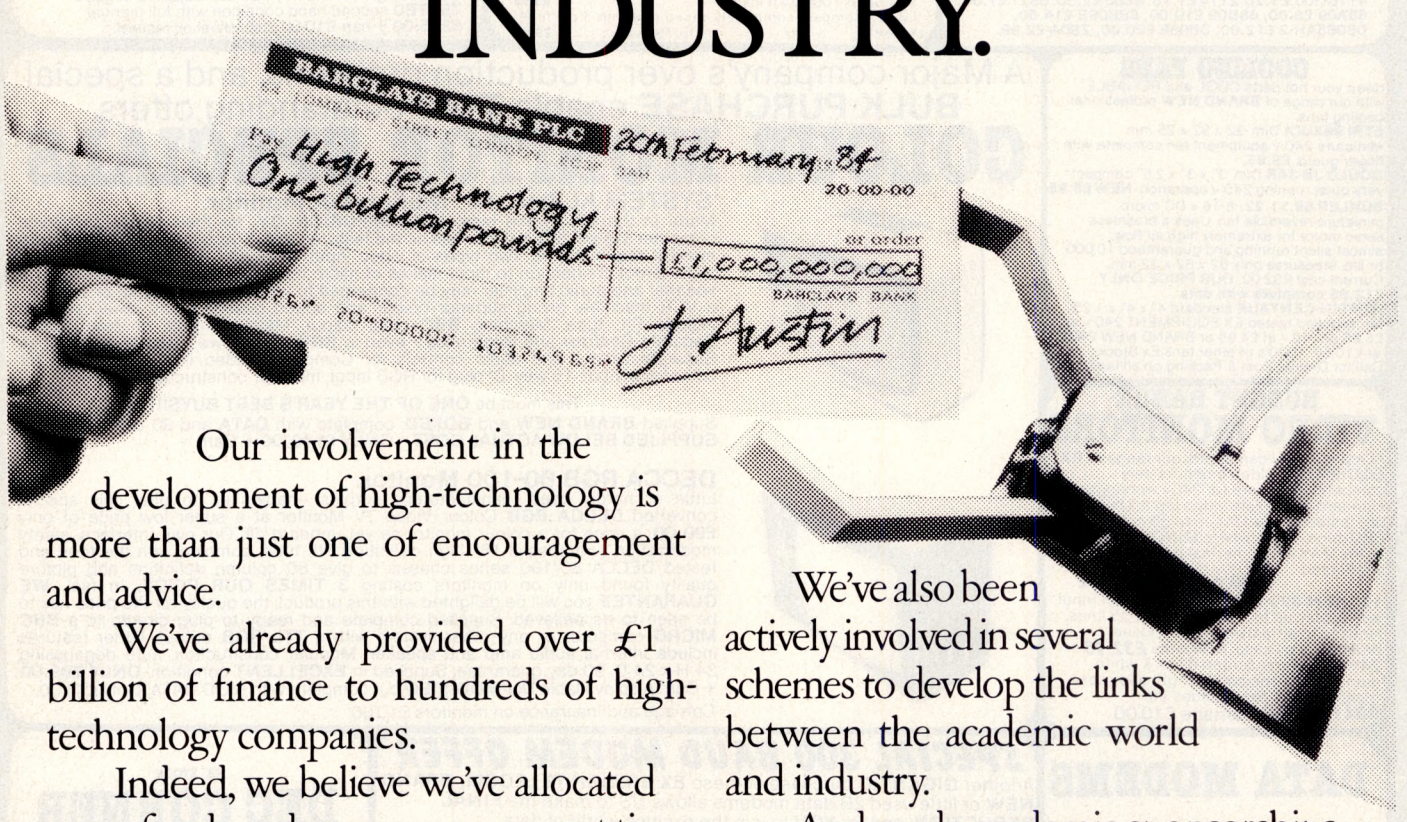


Our involvement in the development of high-technology is more than just one of encouragement and advice.

We've already provided over £1 billion of finance to hundreds of high-technology companies.

Indeed, we believe we've allocated more funds and more management time to high-technology ventures than any other UK bank.

What's more, we're one of the few financial organisations to have set up an in-house team of high-technology specialists.

And so far, over 2,000 of our branch managers have attended intensive high-technology seminars.

Our commitment even extends to our own business and the services we provide.

In fact we're already making extensive use of advanced electronic global information transfer and cash management systems.

We've also been actively involved in several schemes to develop the links between the academic world and industry.

And made academic sponsorships and endowments of around £2 million over the last few years.

Indeed, the establishment of the Barclays Venture Centre at Warwick Science Park is just one example of our initiatives to date.

So if you have any questions or ideas you'd like to discuss with us, come and have a chat with one of our managers.

After all, you're more likely to find people who understand the financial and technological implications of your ideas at Barclays.

BARCLAYS

## THE INSTITUTION OF ANALYSTS & PROGRAMMERS

An association which is widely recognised and respected, endorses the status of its members, protects and promotes their interests, assists their careers and encourages their ethical standards is the foundation of every profession.

The Institution of Analysts & Programmers is the leading association for those who use, develop and organise systems analysis and computer programming for Commerce, Industry or Public Service as a principal or supplementary part of their professional life. Awareness of the Institution and the high regard accorded to its members has brought inquiries and applications from over forty independent countries and states.

The essential qualification for election is practical experience but grading allowances are made for degrees, diplomas and course certificates of recognised universities and training organisations and for memberships of other professional associations and learned bodies. A guide to membership requirements and gradings may be requested by telephone or letter addressed to the Applications Department.

01-898 2385

**The Institution Of Analysts & Programmers**
GIBSON HOUSE, FOURTH CROSS ROAD, TWICKENHAM
MIDDLESEX, TW2 5EL, ENGLAND

## COMPUTER MAINTENANCE CONTRACTS

**B... EST**
**E... FFICIENT**
**S... ERVICE**
**T... RY US AND SEE!**

**APRICOT • SIRIUS/VICTOR**
**IBM • COMMODORE**
**WIDE RANGE OF PRINTERS**

NON-MAINTENANCE REPAIRS
ALSO UNDERTAKEN
DISK DRIVE ALIGNMENT AND REPAIRS

COMMODORE PC 10.... £1,424 + VAT
COMMODORE PC 20.... £2,375 + VAT

FC FRIMTON COMPUTER SERVICES
24 Green Lane, NW4 2NG Tel: 01-203 3777

Access
BARCLAYCARD VISA

## EASY FILE . . . FOR ONLY £29.99

132 column

INCLUDING CARRIAGE & V.A.T.

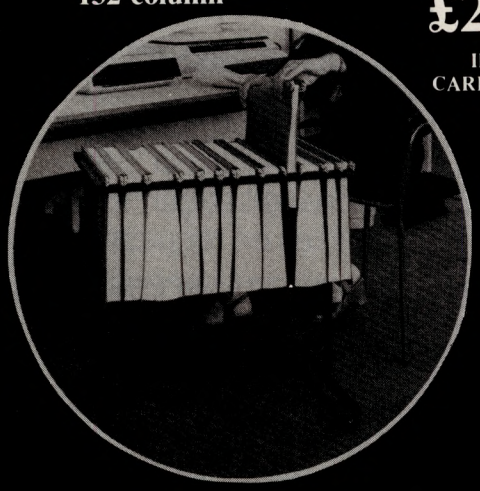

Send your cheque today
(made payable to CEMOC Ltd.)
or telephone your Barclaycard order
through for immediate despatch

**CEMOC COMPUTERS**
1 Samuel Whites Estate
Medina Road
Cowes, Isle of Wight, PO31 7LP
Tel: (0983) 290584

VISA

# EXPORT

**AND OVERSEAS VISITORS**

ALL MAKES OF MICRO COMPUTERS, PRINTERS, PERIPHERALS AND SOFTWARE SUPPLIED AT DISCOUNT PRICES.

**AMSTRAD • ORIC • SINCLAIR • BBC MICRO • ELECTRON • COMMODORE EPSON • BROTHER AND ALL POPULAR MAKES.**

**MICROGOLD**
**UNICOM HOUSE**
**182 ROYAL COLLEGE STREET,**
**LONDON NW1 9NN**
**TELEX: 295931 UNICOM G**
**TELEPHONE: 01-482 1711**

# X T CONVERSION KITS
## FOR IBM® AND COMPATIBLES

NEW FAST CONTROLLER!
WESTERN DIGITAL 1002 SWX-2
ST-506 STANDARD.....**£249**

MR 521 HALF HEIGHT, 5¼"
10MB WINCHESTER DRIVE (FORMATTED)
2-HEADS, AVERAGE 85cms ACCESS.....**£399**

MR 522 HALF HEIGHT 5¼" 20 MB
WINCHESTER DRIVE (FORMATTED)
4 HEADS, AVERAGE 85ms ACCESS.....**£579**

SET OF CABLES FOR ABOVE.....**£25**

**RAM CHIP SALE!!!**
**4164 64K DRAM 150Ns..... £1.99 each**
**4128 128K DRAM 15ONs..... £7.49 each**
**(for upgrade IBM AT)**
**41256 256K RAM 150Ns ..... £5.99 each**
**(for upgrade Olivetti-M24, Compaq Deskpro etc)**

**Prices exclude VAT and delivery. For terms see our other advertisements.**

DIGITASK BUSINESS SYSTEMS LTD
56, MAPLE DRIVE, EAST GRINSTEAD, WEST SUSSEX, RH19 3UR
TEL: (0342) 24631 • 313427
TLX: 957547

# EPROM PROGRAMMER
## for the BBC micro

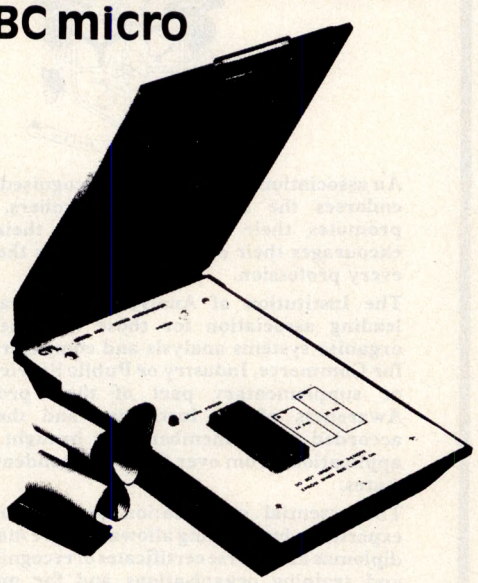

An exceptionally versatile unit, programs EEPROMS and EPROMs from 2K to 32K.

Powerful, easy to use software in a sideways ROM. Features full screen data editor, files, and softkeys.

Professionally designed hardware ensures reliable and safe programming, also detects badly socketed EPROMs.

Soundly constructed in a convenient flip-top box which protects unit when not in use. Supplied with a comprehensive manual.

**£95 (excl VAT, free P&P)**
2 year guarantee. Detailed information on request

CTL
**Control Telemetry of London**
**Unit 11, Burmarsh, Marsden St.,**
**London NW5 3JA. Tel: 01-482 2177**

# AMERICAN & BRITISH COMPUTER BOOKS & MAGAZINES

We offer a World-Wide service for books from all publishers and more than 50 magazines.
Please fill in the coupon and ask for monthly listing of NEW books and magazines. You may also subscribe to the following popular magazines starting from the current issues.

| | Europe | Other |
|---|---|---|
| AMSTRAD CPC 464 USER | £19 | £27 |
| BYTE | £26 | £32 |
| COMMODORE USER | £18 | £28 |
| MSX COMPUTING | £18 | £28 |
| MSX USER | £18 | £28 |
| PERSONAL COMPUTER WORLD | £19 | £28 |
| QL USER | £18 | £28 |
| SINCLAIR PROGRAMS | £18 | £28 |
| SINCLAIR USER | £19 | £29 |
| YOUR COMPUTER | £21 | £32 |

These are SPECIAL 6 months Trial Offer Prices.
Please fill the coupon and send it with your cheque to:

**COMPUTER BOOKS AND MAGAZINES — HAULSTERM LTD**
*91 Exeter House, Putney Heath, London SW15*
***Tel: 01-788 8746***

Name..... Tel: .....
Address.....
.....
I wish to subscribe for 6 months to the following magazines:
1 ..... £ .....
2 ..... £ .....
3 ..... £ .....
Enclosed please find a cheque for Total £ .....
☐ Please send me list of books and other magazines.

# *OVER 220 AMSTRAD CASSETTE TITLES IN STOCK*

**OVER 90 *NOW* AVAILABLE ON DISK**
**CPM SOFTWARE**
Macro 80, Microsoft Basic, Microsoft Basic Compiler, Turbo Pascal, BBC Basic (Z80), Purchase Ledger, Payroll, Database, other titles on request.

**● TAPE TO DISC TRANSFERS ●**

**HARDWARE**
Printers, Speech Synthesisers, CPC464 3" Disc, Timatic 5¼" 2nd Disc Drive also available.

**RS232 INTERFACES INCLUDE**
Sideways Rom's, Optional upgrades to BBC Compatible User port. Also available Arnors Maxam Assembler and Quma's Assembler.

***664 IN STOCK***
**Mail order welcome. Please send sae for full list to:**

# TIMATIC SYSTEMS LTD

*Registered Office:*
**NEWGATE LANE**
**FAREHAM, HANTS PO14 1AN**
**Tel: FAREHAM (0329) 239953**

*Sales and Repairs:*
**FAREHAM MARKET**
**FAREHAM, HANTS**
**Tel: FAREHAM (0329) 236727**

# The XLtron MEGA•BOX from Disco·Tech (UK) Ltd.

With RHINOKOTE – it's tough!

The MEGA BOX is a top quality rigid plastic storage box with see-through lid and four dividers. Holds up to 60 diskettes.




**All disks are 5¼" and feature:**

- Write protect notch
- Hub rings
- Double density (D/D) suitable for single density (S/D)
- Tyvex sleeves
- Full set of labels and write protect tabs
- Meets all ANSI specifications

## XLtron Floppy Disk Prices

**25** SS/DD disks in **MEGA•BOX** £29 £4.35 and £2 p&p = **£35.35**

**25** DS/DD disks in **MEGA•BOX** £35 £5.85 and £2 p&p = **£42.85**

**50** SS/DD disks in **MEGA•BOX** £50 £7.50 and £2 p&p = **£59.50**

**10** in a **midi•box** £19 plus VAT £2.85 and £2 p&p = **£23.85**

**15** in a **midi•box** £25 plus VAT £3.75 and £2 p&p = **£30.75**

**25** in a **MEGA•BOX** £42 plus VAT £6.30 and £2 p&p = **£50.30**

**50** in a **MEGA•BOX** £80 plus VAT £12 and £2 p&p = **£94.00**

# STOP PRESS!

**25 SS/DD DISKS AT ONLY £25 inc VAT +£2 p+p**

**25 DS/DD DISKS AT ONLY £31.25 inc VAT +£2 p+p**

**PRICE INCLUDES VAT AND SHRINK WRAPPING**

**TO QUALIFY YOU MUST USE THE COUPON BELOW (OR A COPY OF IT), OR MENTION IT IF YOU RING. ONLY ONE PACK PER ADDRESS.**

## …s Very

…established in our new showroom in …d Place. You can save our £2 delivery charge by calling in – you'll be welcome weekdays from 10.00am till 5.00pm Saturday 10.00am-4.00pm.

## Help Lines

**01-631 0255**
**01-631 3600**

If you want help or information to place an order just ring our 'help' lines.

## Official Orders

We accept orders from all government bodies, schools, universities, libraries, armed forces etc. We despatch on receipt of an official purchase order. If you can't raise a cheque without an invoice, just post or telephone your order and we'll send you a pro-forma by return.

…e. We buy disks from …fers to our specifications, …d grade them in our London …

## …ally Guaranteed

The XLTRON quality control is so stringent that we can give our famous 'two for one' guarantee. If you find a faulty disk, return it to us, and we'll send you two in exchange immediately. All part of our five year guarantee.

© TYVEX is a registered name of Du Pont.
© Rhinokote is a registered name of Rhino Magnetics Ltd.
© XLTRON is a registered name of XLTRON Ltd.

**Disco·Tech (U.K.) Ltd., Lex House, 3–6 Alfred Place, London WC1, England.**

**Disco·Tech (U.K.) LTD. are the sole distributors of XLTRON.**

**To: Disco·Tech (U.K.) Ltd., Lex House, 3-6 Alfred Place, London WC1, England**

Just fill in the coupon or send your order on a postcard or letter. Or phone your order on 01.631 3600 OR 01.631 0255

Please send me the following, (tick the appropriate boxes):

25 ss/dd disks at only £25 [ ] or

25 ds/dd disks at only £31.25 [ ]

I enclose a cheque/p.o. for £_____ or debit my Access/Diners/Amex card

card no. _____

Name:_____ Signature:_____

Address:_____

_____ Postcode:_____

(Block Capitals Please)

PCW/7/85

# INTRODUCING...THE TULIP SYSTEM PC SERIES.THERE CAN BE ONLY ONE WINNER IN THE PC COMPATIBLES RACE.

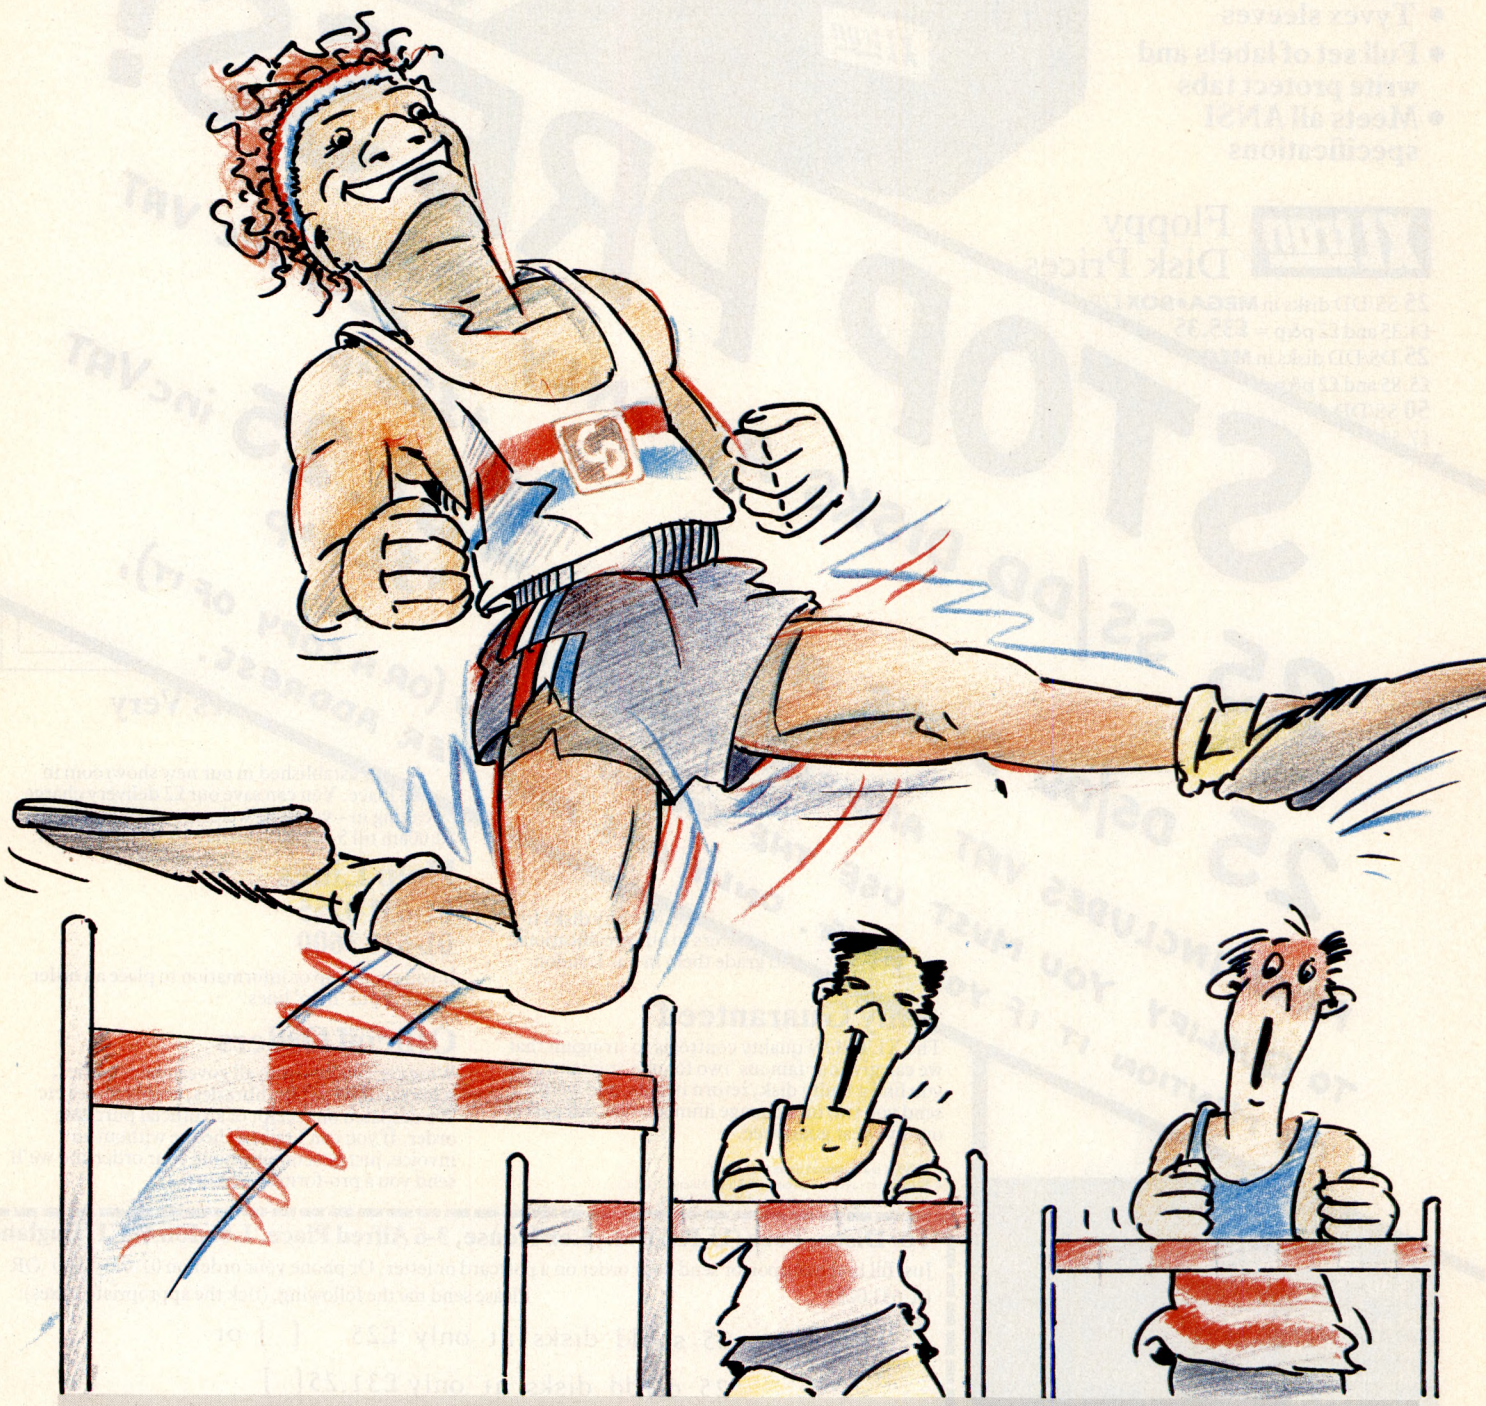

More Dealers Wanted for our complete product-line. Please contact: **LONDON:** David Rush LTD 01-363-3746 **WEST MIDLANDS:** Pearl Computers LTD 05432-22976 **EAST MIDLANDS:** Contraplex Computers LTD 0332-360571 **EAST ANGLIA:** Moonraker Computers LTD 0603-610413 **SOUTH WEST:** Newport Technical Services LTD 0272-878312 **TRAVEL AGENTS:** Status Travel Systems 021-6325277

Records are made to be broken they say – but this is easier said than done. It is possible only after much preparation and practice.
That is why Compudata did not join the rush to enter the race to introduce the first personal computer on the market.
We carried on quietly – developing two personal computers which could enter the second race – with no handicap.
And now patience – as always – has been rewarded and two personal computers, the Tulip PC advance and the Tulip PC compact, developed by Compudata, are ready to compete. The quality and price of these computers put them well ahead in the field for the performance award.
They have special features to be found in none of their rivals in the same class.
As we said, the PC advance and the PC compact may not have been the first, but they certainly are the best.

| | TULIP SYSTEM PC ADVANCE | TULIP SYSTEM PC COMPACT |
|---|---|---|
| Microprocessor | 8086 | 8088 |
| Clock | 8 Mhz | 8 Mhz |
| Arithmetic co processor (opt.) | 8087/8 MHz | 8087/8 MHz |
| Memory (standard) | 128 Kb | 128 Kb |
| Expandable upto | 640 Kb | 512 Kb |
| Graphic formats (7 colors) | 320/640x200 | 320/640x200 |
| (monochrome) | 640x200/400 | 640x200/400 |
| Display formats | 80x25 monochr | 80x25 monochr |
| | 40/80x25 color | 40/80x25 color |
| International character sets | 11 | 11 |
| Interface: Keyboard | IBM comp. (2) | IBM comp. (1) |
| Parallel I/O | Centronics comp. | Centronics comp. |
| Serial I/O | RS 232 compatible | RS 232 compatible |
| Floppy disk contr. | 2 drives | 2 drives |
| Expansion bus for IBM comp. boards | 3 slots | 4 slots |
| Expansion slots I/O | piggy backed | piggy backed |
| Lightpen | TTL compatible | TTL compatible |
| Real time clock | yes | yes |
| Clock/calender with battery back-up | yes | no |
| Monitor EPROM | 16 Kb | 16 Kb |
| Floppy disk drives 40 trk | 2x360 Kb | 2x360 Kb |
| 80 trk (opt.) | 2x720 Kb | 2x720 Kb |
| Hard disk drives (optional) | 1x10 Mb | 1x10 Mb |
| | 1x32 Mb | 1x32 Mb |
| Operating system (standard) | MS-DOS 3.1 | MS-DOS 3.1 |
| Programming languages (standard) | GW-BASIC | GW-BASIC |
| Optional add-on units | tape back up | tape back up |
| | 10 Mb + tape | 10 Mb + tape |
| | 32 Mb + tape | 32 Mb + tape |
| Transportable set | yes | no |

Compudata COMPATIBLES available from £1,150,–.

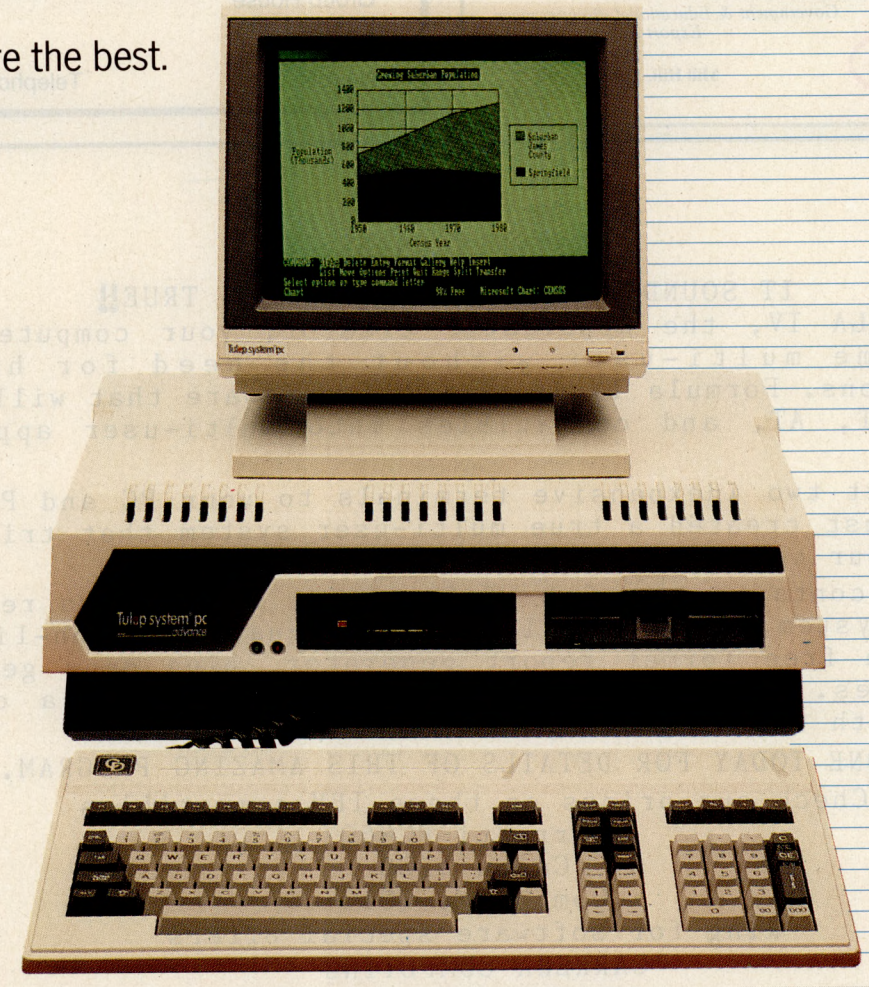


COMPUDATA

**Compudata B.V.** Hambakenwetering 2 5231 DC 's-Hertogenbosch, The Netherlands Tel.: +31 73 42 20 45 Telex: 50316 cdata nl

**CHANNEL ISLANDS:** A.G.L. Computers 0534-30662 **IRELAND:** Datatronics Systems LTD, Dublin 6 965859/978856
'We would like to appoint dealers for our equipment. Please contact Compudata Head Office and ask for the export department'.

# Mill Hill Computer Centre
## *SPECIAL OFFER*

Home and personal computers, software, peripherals, printers, disc drives and books at unbeatable prices.

**All prices include VAT**

*A wide range of educational software and games always in stock*

| | |
|---|---|
| BBC (B) + free recorder + lead | £325 |
| BBC (DFS) + free recorder + lead | £420 |
| Electron + free recorder + plus 1 | £185 |
| Commodore 64 + recorder + joystick QII | £220 |
| Commodore 16 starter pack + joystick | £100 |
| Amstrad + £100 worth of s/w | M. £225 |
| Amstrad + £100 worth of s/w | C. £330 |
| ZX Spectrum 48K + £50 s/w | £110 |
| Juki 6100 daisywheel | £365 |
| Daisystep 2000 | £235 |
| Cannon PW 1080A | £330 |
| Shinwa CP80 | £190 |
| Shinwa CPA80 | £230 |
| Commodore MPS801 | £190 |
| Microvitec CVB | £199 |
| Commodore H: res (col. monitor) | £220 |
| Philips (green) | £85 |
| Philips (amber) | £95 |
| Cumana 100k disk drive | £125 |
| Commodore 1541 disk drive | £190 |
| Sanyo cassette recorder | £23 |
| Acorn cassette recorder | £32 |
| Floppy disc (45-80 track) | £18 |

**This is only a small selection of what we can offer**
**For further details either write or telephone us**

*Mail Order Despatched within 10 days after receipt of your order and cheque*
*Add £2.50 P&P for orders below £150, and over, £8 P&P*

*Government & Educational discount given*
*Export enquiries welcome*

RAMCO ELECTRONICS U.K.

**123 The Broadway**
**Mill Hill, London NW7 3TG**
**Tel: 01-906 3363**



# MCT BASIC ©

**SCREEN + PAINTER**

FOR THE COMMODORE 64 COMPUTER
INCLUDES MANUAL + DEMO PROGRAM

HAS OVER 125 COMMANDS AND IS LANGUAGE COMPATIBLE WITH BASIC 3.5

COMMANDS INCLUDED:-

| | | | |
|---|---|---|---|
| HELP | SOUND | SPRITE & | SCRATCH |
| CIRCLE | FILTER | PO/LOOP/ | HEADER |
| DRAIN | TRAP/RESUME | WHILE/UNTIL | D LOAD |
| BOX | PRINT USING | | D SAVE |
| RENUMBER | INSTR. | MONITOR | DIRECTORY |

CASSETTE VERSION =
DISK VERSION AVAILABLE
JUNE 1985 @ **£14.95**
TRADE & EXPORT
ENQUIRIES WELCOME

**£10.95**
including p&p and VAT

*Please direct enquiries/orders to:-*

**MICRO COMPONENT TRADING COMPANY**
Group House
Fishers Lane
Norwich
Norfolk

Telephone: (0603) 633005



**MAKE YOUR PC**
**MULTI-USER**
**FOR ONLY £595**

IT SOUNDS UNBELIEVABLE BUT ITS TRUE!!

With FORMULA IV, the Applicator Creator, your computer system can become multi-user without the need for hardware modifications. Formula IV is the ONLY software that will convert IBM PC, XT, AT, and compatibles into multi-user application systems.

Just connect two inexpensive terminals to your PC and PRESTO! - you have just created a true multi-user system that triples the power of your computer.

FORMULA IV contains a wealth of features, including a relational database system, a powerful query language, an on-line help facility, a free format report generator, plus menu generation capabilities. FORMULA IV combines the power of a computer language with the simplicity of a word processor.

PHONE TODAY FOR DETAILS OF THIS AMAZING PROGRAM.

Check our prices on these IBM compatibles
Ferranti PC860
Canon A200
Commodore PC10
Ring for software special offers

CARRERA COMPUTING
12, Lyons Avenue
Hetton-Le-Hole
Tyne & Wear
DH5 OHS

Tel:- SUNDERLAND (0783) 267816 Open 7 days 9.00am - 9.00pm

# · VALUE · VALUE · VALUE ·

## ERICSSON



*THE* IBM COMPATIBLE

from £1,667 + VAT

The recently launched ERICSSON PC is now available from Wolfcrown. It is exceptionally IBM compatible with extra features at a significantly lower price. On site 12 months warranty included with nationwide Ericsson backup. Standard configuration includes 128Kb, serial and parallel ports, six expansion slots, ergonomic amber monitor and splendid graphics. According to *PC USER* "At 90% of whatever the current price of the IBM PC happens to be, its an index linked bargain."

## ERICSSON PORTABLE

Stunning new portable weighing 16.7lbs with full 25 by 80 gas plasma screen and full size keyboard. Options include inbuilt printer, electronic disk and integral modem.
Basic configuration from £2,580 + £387 VAT

## PC SOFTWARE

| | |
|---|---|
| Leading Edge WP | £150 + £22.50 VAT |
| Leading Edge Nutshell DB | £135 + £20.25 VAT |

## ALPHA MICRO

*MULTI-USER* *10Mb WINCHESTER*
*MULTI-TASKING* *VCR BACKUP*
*UP TO SIX USERS* *SOFTWARE INC.*

The AM1000, the smallest machine in the range is based on the MC68000 and supports two users, expandable up to six, and is available in various configurations up to 40Mb and 1024Kb RAM memory. We are offering a 10Mb system with two word processing screens, operating system, BASIC language Assembler, word processing, over 150 utilities, and accounting software at the remarkable price of **£7,250.** Extra users can be added at **£650** per user.

## PC MULTI-USER BOARD

Why network when you can transform your PC into a multi-user Alpha system supporting up to three screens. Fit the sensational Alpha Micro 170 board into your PC and it operates as a multi-user Alpha Micro PC with access to MS-DOS. On board 128Kb memory, clock/cal, MC68000 processor and full AMOSL operating system and facilities.

*£1,500+ VAT*

## PC HARD DISK ADD ONS

Internal 10Mb Cogito disk with Adaptec controller to run on existing PC power supply £1,250 + £187.50 VAT

External 10Mb hard disk subsystem in look-a-like case with PS, controller cable and software
£1,295 + £194.25 VAT

## IBM PC BOARDS

| | |
|---|---|
| Hercules graphics card | **£315+£47.25 VAT** |
| SIGMA multifunction card | **£245+£36.75 VAT** |
| 64Kb to 384 Kb RAM, serial/parallel ports, games port, clock/calendar etc. | |
| Ericsson colour monitor | £420 + £63 VAT |

## PRINTERS & MONITORS

| *SMITH-CORONA PRINTERS* | *our price* | *RRP* |
|---|---|---|
| Fastext 80.80 col/80cps dot matrix | **£170** | **£195** |
| D100 80 col/120cps dot matrix | **£220** | **£249** |
| D200 80 col/160cps, NLQ, dot matrix | **£375** | **£420** |
| D200 132 col/160cps, NLQ, dot matrix | **£535** | **£595** |
| JUKI 6100 18cps daisywheel | **£340+£51.00 VAT** | |
| Facit and Ericsson printers | | POA |
| eg Facit 4511-02 | £505 + £75.75 VAT | |
| Philips 12" Green monitor | **£79+£11.85 VAT** | |

## APPLE COMPATIBLE PRODUCTS

| | |
|---|---|
| Slim-line disk drive | **£125+£18.75 VAT** |
| Z80 card | **£39+£5.85 VAT** |
| 80a column card | **£45+£6.75 VAT** |
| Printer card and cable | **£45+£6.75 VAT** |
| Disk controller card | **£35+£5.25 VAT** |

## TO ORDER

Please telephone order particulars to 01-629 3603 or visit our West End offices on the 2nd Floor at 58 Jermyn Street, London SW1Y 6LX.
Dealer enquiries are welcome.

*2nd FLOOR, 58 JERMYN STREET, LONDON SW1Y 6LX · TELEPHONE 01-629 3603*

# · WOLFCROWN ·

*ALSO AT PRINCE GROUP, LOMBARD HOUSE, GREAT CHARLES STREET, BIRMINGHAM · TELEPHONE 021-233 2286*

# EVERY CHALLENGE IN LIFE IS MADE EASIER WITH A HELPING HAND.

The new Ericsson Personal Computer comes with the best customer support services in the country.

With Ericsson you get Teach-Yourself Software; instructions in plain English; a Dial-an-Expert Service and regular customer training courses at the Ericsson PC Training Centre. The new Ericsson PC is IBM compatible. It runs all IBM popular software.

What's more, the Ericsson PC is smaller, neater and quieter.

But the big difference is Ericsson. Because Ericsson give a helping hand to get you started.

**The new Ericsson Personal Computer**

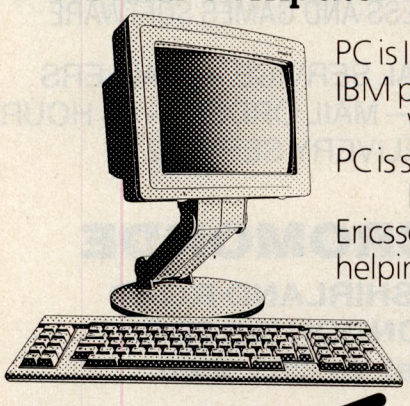



**ERICSSON**

# An Epson in Commodore clothing




How many Commodore home computer owners, when faced with buying a printer, have longed to own an Epson but been put off by the problems involved? Firstly, it's not easy to connect the two together. Secondly, even when connected, it may be necessary to load driver software or the cartridge slot may be unusable. Finally Commodore-specific characteristics such as graphics and formatting commands will not be available.

Now Micro Control Systems have the solution. Just plug the Comprint circuit board inside the Epson, connect the cable supplied to the Serial I/O port on the Commodore computer and Hey Presto! The Comprint fools the Commodore into thinking it is working with a Commodore printer. All the features are there — total emulation. And it even provides a 2K buffer as well.

What's more all the additional features that have made Epson so successful, such as condensed print and other type styles, are accessible directly by the Commodore computer. For the business user the ability to use 15 inch paper (in the MX/RX/FX-100 range) and print a £ sign (or other Epson special characters) will prove invaluable.

So go on — spoil yourself. If you are the owner of a Commodore personal computer treat yourself to an Epson — and a Comprint of course!

"Presents excellent value for money ... a worthy purchase for any Commodore 64 or VIC 20" – PCN, January 12th, 1985

"This is one of the most versatile printer interfaces I have used ... a combination that will do almost anything you ask of it" – Commodore User, January 1985

"Undeniably an interface to look at" – Commodore Computing Int., May 1985

micro control systems

*Available from:-* **Price £61.99 inc VAT** Please add £1 P&P

**CHROMASONIC**
**49 JUNCTION ROAD**
**ARCHWAY**
**LONDON N19 5RD**
**TEL 01-263 9493**

*OR* **A-LINE COMPUTER SYSTEMS**
**1 CHURCH FARM LANE,**
**WILLOUGHBY, WATERLEYS**
**LEICESTER LE8 3UD**
**TEL (053758) 486**

*DISTRIBUTOR ENQUIRIES TO:-*
**MICRO CONTROL SYSTEMS LTD**
**TEL (0773) 769011**



Modems

# Enter the Communications Era

***It's high time you used your microcomputer to communicate with the rest of the World.***

FREE

**subscription to B.T. Gold or One To One electronic mail service, with every one of our MODEMS and TERMINALS.**

***Send For further information:***

- ☐ **MODEMS from £89**
- ☐ **Switch Boxes for sharing peripherals, from £65**
- ☐ **Third Party Maintenance**

★ National Service Back-up
★ Over 5 years in the Professional Electronics Industry
★ Specialist Dealer/Broker

*Sales Department*

## DELARIESE ENTERPRISES

**40B Wilton Road, Reading, Berks, RG3 2SS**
**Tel: (0734) 591091 Telex: 848072 SBPNEU**

Name .....
Department .....
Position .....
Company .....
Address .....
.....
.....
Tel: ..... Telex: .....

PCW/7/85



VISA Access

## Announcing the

# MIRAGE MICRODRIVER

At the touch of a button you can transfer *all* your programs onto Microdrive cartridge.

At last the full potential and speed of the ZX Microdrives can be realised by all 48K Spectrum and Spectrum+ owners, for only £39.95.

### Features:

- ★ **Transfer *any* program onto Microdrive cartridge or cassette.**
- ★ **Freeze *any* game at *any* point, save it, and restore it later.**
- ★ **Use the "POKE" facility to give yourself infinite lives etc.**

The Mirage Microdriver consists of a RAM PACK style case which simply plugs onto the rear of the ZX Interface 1. An expansion connector is provided for the connection of other peripherals. The software has been designed to be easy to use and is menu driven. It resides on a 4K ROM contained within the Microdriver so there is no fussing with tapes to get it to run. All you need to do is press the button on the side.

**Note: This unit is intended for software owners to transfer their own programs onto microdrive cartridges for speed and ease of access. Programs saved using the Mirage Microdriver are *unreadable* unless the Microdriver is present.**

### How to Order

Send a cheque for £44.95, including £5 for postage and packing, to the address below, or use your Access or Visa card by telephoning (0376) 48321 to place your order immediately.

Please allow 28 days for delivery.

MIRAGE Microcomputers Limited

**24 Bank Street,**
**Braintree,**
**Essex CM7 7UL**
**Tel: (0376) 48321**



# MICROMONDE

Dealers in Home and Business Computers



FOR YOUR

## AMSTRAD COMPUTER

**WITH GREEN OR COLOUR MONITOR**

## 664 ★ 464

## DDI AND FDI ADDITIONAL DISK DRIVES

PRINTERS ★ MODULATORS ★ JOYSTICKS
★ BUSINESS AND GAMES SOFTWARE

PERSONAL SERVICE — CALLERS WELCOME — MAIL ORDER — 48 HOUR DELIVERY SERVICE

## MICROMONDE

**152 SHIRLAND ROAD**
**LONDON W9 2BT**
**Tel: 01-289 9060**

# MEGA-BOARD™-XT

## #1 CHOICE OF MAJOR OEM MANUFACTURERS, UNIVERSITIES, RESEARCH LABS ETC.

A THOROUGHLY FIELD PROVEN DESIGN.
HIGH VOLUME PRODUCTION ENGINEERED.

- ***FULL IBM PC-XT* COMPATIBILITY!***
- ***FULL MEGA-BYTE RAM CAPACITY ON MOTHERBOARD!***

***THOUSANDS SOLD WORLD WIDE!***

**DEALERS AND OEM MANUFACTURERS QUANTITY DISCOUNTS AVAILABLE**

**Standard Keyboard Interface**
(Full PC compatible)

**Eight Compatible I/O Interface Connectors**
(Full PC compatible) (compatible with all IBM-PC* plug-in cards)

**Special J1 Interface**
(Allows horizontal mounting of compatible expansion cards for easy bus expansion and custom configuring) (Board has 62 pin gold plated compatible connector)

**Extended ROM Capability**
(Runs all compatible PC ROMS) (Jumper programmable to accommodate all popular 8K, 16K, 32K and 64K ROM chips and NEW EE ROMS! VPP power pin available for EP ROM burning!) (External VPP voltage required)

**Full Mega-Byte Ram Capacity! On board!**
(With parity)
☐ 256K Bytes using 64K chips
☐ 1 Mega Bytes using 256K chips

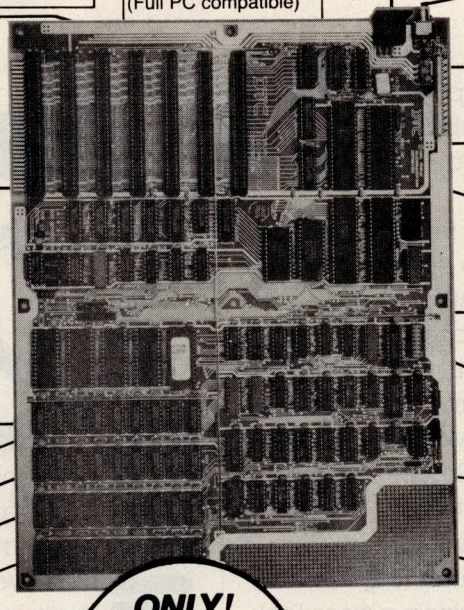

**Hardware Reset**
(Overcomes reset flaw in PC)

**Power Connector**
(Full IBM* pinout compatible)

**8088 Processor**
(Same as PC)

**8087 Numeric Processor**
(Same as PC)

**Peripheral Support Circuits**
(Same as PC)

**Configuration Switches**
(Same as PC)

**Speaker/Audio Port**
(Same as PC)

**Wire Wrap Area**
To facilitate special custom applications!

***ONLY!***
**£85.00 + VAT**

Mega-Board™ **Evaluation Board Kit!**
(Blank board with full assembly instructions and parts list.)

Includes highest quality PC board with gold plating, silk screen, solder mask

**Board Size** 10.5 inch X 13.5 inch

**SOUTH DEVON MICROCENTRE LTD**
**THE OLD POSTERN**
**DARTINGTON**
**TOTNES**
**DEVON TQ9 6EA**
**UNITED KINGDOM**



**CALL**

**ROGER BUTLER**
**(8030) 866076**
**FOR DETAILS**

### PRICE LIST

| | £ + VAT/Carriage |
|---|---|
| Bare Board Kit | £79.00 |
| Assembled Tested Socketed | £158.00 |
| Fully Assembled and Tested | £412.00 |
| Evaluation Board Kit | £85.00 |
| Manual | £15.70 |
| Mega-Bios Rom | £24.00 |
| Case | £82.00 |
| Keyboard | £123.00 |
| Monochrome Card, Graphics Card, Disk Controller, Disk Drives, Hard Disk Controller, Power Supply | Call for prices |
| Power Supply | £124.00 |

DTC™ DISPLAY TELECOMMUNICATIONS CORPORATION

4100 SPRING VALLEY ROAD
SUITE 400
DALLAS, TX 75244
(214) 991-1644

TERMS: We accept cash, cheques, money orders or purchase orders from qualified firms and institutions. Prices and terms subject to change without notice. Shipping and handling charges via UPS ground service, UPS at $1.00/lb. Minimum charge $3.00.

*IBM and IBM PC are trademarks of International Business Machines

©1984 Display Telecommunications Corporation

# Free! A program to set the pulse racing.

Acclaimed for its exciting, up to the minute coverage of the latest computer innovations, Thames Television's Database presents a spectacular 'first' in a great new series this summer.

The most recent advance in software transmission is Visicode. Quite simply, it utilises rapid light pulses to transfer software to a micro, via a light pen attached to a monitor screen. Database will be using this revolutionary system to transmit software for an intriguing quiz and a super adventure game; you'll be able to decode the light pulses on your television set with a light pen circuit you buy or construct yourself.

That's not all ITV's very own computer programme has to offer. Presenters Tony Bastable and Jane Ashton will be taking a close look at further developments, from the role of micros in the Health Service and the latest cellular radio networks, to their uses in helping the disabled, making music and computer 'hacking'. Each week, there'll also be general advice on buying micros plus reviews of hardware and software in the home from Dr. Mike Thorne. Amongst other special features will be coverage of the British Micro Computing Awards Ceremony, which this year is to be co-sponsored by Thames Television.



Whether you're new to the game or an old hand, make sure you're up to date on news and events in the fast moving micro world: don't miss Database, starting Thursday June 20. Programme times vary according to regions, so check your local press for details.

## The Database Mailbox

If you have a micro connected to Prestel, why not call the Database office direct with your comments, ideas and suggestions. The Database Mailbox can be found on Prestel Page 7776.

And if you own a teletext television set, check out the latest news in the Database Newsletter on Oracle Page 159. You'll also find the Database Bulletin Board on Oracle Page 159.

DATABASE

Thames Television, 149 Tottenham Court Road, London W1P 9LL.

THAMES

# £399 TURNS YOUR BRAINBOX INTO A REAL CHATTERBOX!




Computers are like people. They can learn from each other. But first they have to communicate. If your computer keeps itself to itself, why not introduce it to the Chit·Chat Communications Pack from Sagesoft?

Chit·Chat is a versatile data communications program that opens up a whole new range of possibilities. Data can easily be transferred, even between incompatible machines, either by direct cable connection, or by telephone, using a modem.

Chit·Chat also gives you access to electronic mail systems such as Telecom Gold, Easylink, and One-to-One plus viewdata services like Prestel. The program is simple to understand, easy to learn and use, and is currently available on IBM PC and compatibles, Apricot, Wang PC and Sharp 5600, with many more to follow.

The Chit·Chat Communications Pack at only £399+ VAT, includes the Chit·Chat program, a state-of-the-art modem, specially made to Sagesoft specifications by Thorn-EMI Datatech. No knobs or switches, just sleek good looks and simple, error-free operation. Autodial and autoanswer facilities are incorporated and the unit is entirely software controlled. An RS232 cable and power pack are included in the package.

Chit·Chat software is also available without hardware.

INCLUDES **FREE** SUBSCRIPTION WORTH £100 TO **TELECOM GOLD**

## SAGE CHIT·CHAT™

Please send me more details of Sage Chit·Chat Communications Pack and my nearest dealer.

Name: _____

Position: _____

Company: _____

Address: _____

_____

Tel: _____

Sagesoft Limited, NEI House, Regent Centre, Newcastle upon Tyne NE3 3DS.
Tel: 091 284 7077. Telex: 53623 SAGESL G.

PCW 2

**BETTER SAGE THAN SORRY**

# XTended to 20 & 40mb.

## Why wait for AT? XTE is here today!



Available now, this IBM PC XT is Extended to 20 or 40 Megabytes of Hard Disk Storage *internally.*

As an optional extra, a 'half-height' 40 track Floppy Disk Drive and a 'half-height' Tape Streamer Device can be installed in the A drive position, thereby reducing your desktop footprint (ie the space occupied on your desk).

The British-built 100% IBM PC DOS compatible Hard Disk will run any software currently available for use with the standard IBM PC XT.

If you have recently purchased an XT and would like these facilities installed, why not send your unit to CPS for upgrade? Call us now on 021-707 3866.

**CPS Data Systems Ltd**

Arden House 1102 Warwick Road
Acocks Green Birmingham B27 6BH
England

Telephone 021-707 3866
Telex 337141 CPS DSE G

A DIVISION OF THE CPS COMPUTER GROUP plc
CPS Data Systems Ltd is a Lotus Authorised Training Centre

IBM Authorised Dealer

# COLOURJET

## 36 COLOUR INK JET PRINTER

IBM pc compatible including character set

**£569** suggested retail price excl VAT

NOW 132 CHARACTERS/LINE COMPRESSED

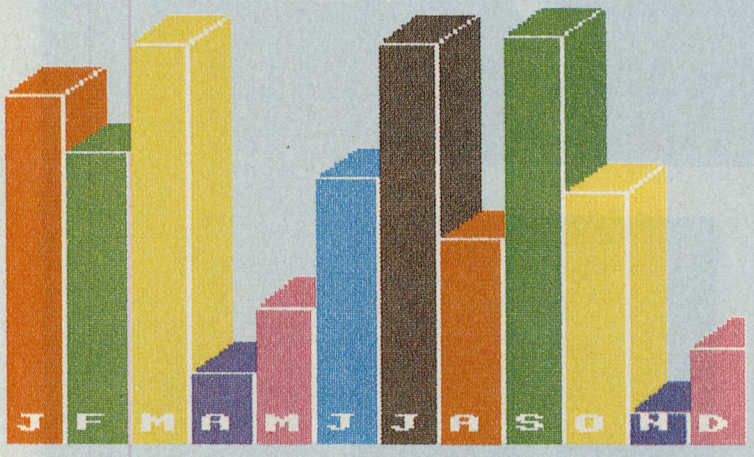


Features: videotext printing
**Prints overhead transparencies**
*Options available:*

- Buffered RS232 interface.
- Viewdata & RS232 interface.
- Apple II Interface.
- IBM PC dump.

Specifications:

640 dots/line & 1280 dots/line Hires mode.
84 dots/inch both axes.
Viewdata Printing (BBC MODE 7).
Friction feed rollpaper with single sheetfeed A4.
40 cps in full colour.
DOUBLE STRIKE MODE.
Ink cartridges, 4 million character life.

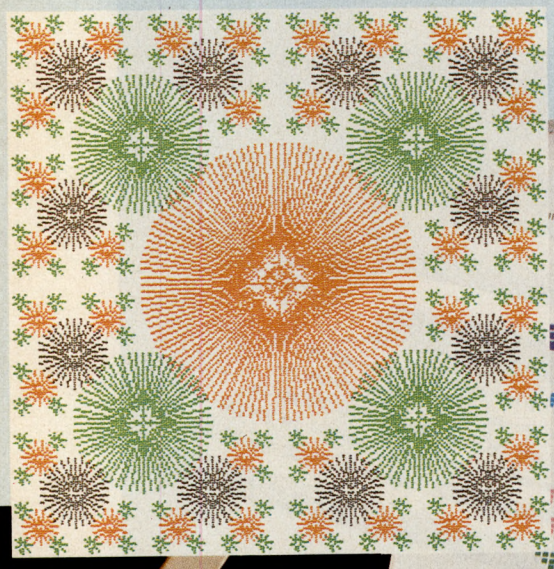

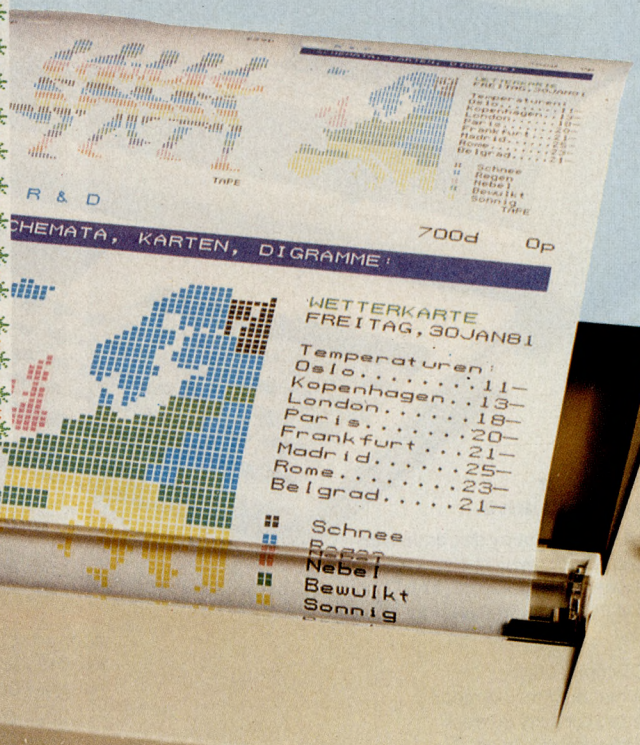


Virtually silent




# INTEGREX LTD.

Church Gresley, Burton-on-Trent, Staffs DE11 9PT
Tel: 0283 215432 Telex: 377106

Dealers, OEM & Educational enquiries welcome

# Get your ACT™ together- with a high performance disc drive system

**Alpha Disc Ltd are pleased to announce the launch of their exciting XF floppy drive sub-system, targetted for the Apricot PC, Xi and F1 market.**

**The basic unit comprises a slim 80 track double sided 5.25" floppy disc drive, giving a formatted capacity of 800 Kb. The drive comes complete with MS-DOS driver software and interface/controller card, which locates in one of the expansion slots on the Apricot PC Xi or F1. The sub-system is thus configured as a second or third drive, with a capacity exceeding that of the Apricot's own double sided micro-floppy.**




**FX-800 IBM-PC/Apricot compatible floppy disc drive.**

**Description.** Add-on 5¼" floppy disc drive with plug-in interface/controller which allows software compatibility between the Apricot PC, Xi & F1 range and the IBM-PC computers running MS-DOS/PC-DOS.

- IBM-PC DOS compatibility
- Ability to format discs in IBM mode
- 800K formatted capacity 80 track double sided floppy disc drive
- 80 track/40 track switching on drive for maximum flexibility
- MS-DOS driver software
- Optional 2nd additional drive
- Independant power supply

**Price £495 + VAT.**

**F1-800 Apricot F1 – floppy disc drive sub-system.**

**Description.** Add-on 5¼" floppy or 3½" Sony micro floppy disc drive which allows you to considerably expand your on-line storage capacity by up to a massive 800K (1600K with 2 additional drives).

- 800K formatted capacity 80 track double sided floppy disc drive.
- Disc drive controller
- MS-DOS driver software
- Independant power supply
- Connects through expansion port
- Optional 2nd additional drive

**Price £395 + VAT.**

**ALPHA DISC LTD**

**UNIT 2 CRABTREE ROAD THORPE INDUSTRIAL ESTATE EGHAM SURREY TW20 8RN**

**TELEPHONE (0784) 35357/8/9 TELEX 918886 ALPHAD G.**

## LARGEST COMPUTER CENTRE in MANCHESTER

**BBC, COMMODORE, MEMOTECH, SINCLAIR SHARP, SANYO, AMSTRAD, QL, EINSTEIN, ADVANCE 86**

**COMPUTERS**

| | |
|---|---|
| Apricot F1E (128K + 315K disk) | POA |
| Apricot F1 (256K + 720K disk) | £1,065.00 |
| Apricot PC | POA |
| Advance 86b | £799.00 + VAT |
| BBC Model B | £339.95 |
| BBC B + DFS | £420.00 |
| New BBC Plus (64K + DFS) | £499.00 |
| Amstrad 464 (Green) | £225.00 |
| Amstrad 464 (Colour) | £325.00 |
| Amstrad 664 (Colour) | £449.00 |
| Sanyo 555 | £799.00 + VAT |
| Spectrum Plus | £122.95 |

**MONITORS** (widest choice)
JVC, Sanyo, Microvitec, IBM, Ferguson, Taxan, Apricot.

**PRINTERS**

| | |
|---|---|
| Canon PW1080 | £319.00 |
| Shinwa CPA80 (Centronic) | £219.95 |
| Shinwa CPA80 (RS232) | £236.00 |
| Epson RX80 FT | £289.00 |
| Juki 6100 | £388.00 |
| Brother HR15 | £395.00 |
| Panasonic | £319.95 |
| Smith-Corona (Fastext 80) | £165.00 |
| Brother EP 44 | £234.95 |
| Brother M1009 (Centronic+RS232) | £195.95 |
| Star SG10 | — |
| Star SD15 | — |
| Star SR15 | — |

**DISK DRIVES**
Opus, Pace, Cumuna, also **WINCHESTER DRIVES** for Sanyo, IBM, Advance and Apricot.

**BBC ACCESSORIES**

| | |
|---|---|
| 6502 | £199.00 |
| Z80 (2nd processor) | £359.00 |

COMPUTER FURNITURE IN STOCK

COMPUTER STATIONERY, DISKS, PLUGS, SOCKETS, CABLES, ETC.
TELEPHONE ANSWERING MACHINES/CORDLESS PHONES: NOW IN STOCK

Wide range of books, software (Educational software specialist). Showroom, demonstration facility. Prices include VAT, all items available mail order. Personal Export scheme. Add £8 p&p it mail order. We accept Visa and Access.
Export dealer enquiries welcome.

**MIGHTY MICRO**

SHERWOOD CENTRE
268 WILMSLOW ROAD
FALLOWFIELD, MANCHESTER
TEL: 061-224 8117

# Video Interface

**Apricot – Sirius – Victor users**

Now you can drive composite video monitors and projection systems from your micro, whilst retaining use of the original monitor. Industry standard BNC output. No internal fitting to the micro required. Ideal for: Training, demonstrations and seminars or any application requiring extra remote displays.

**Standard model £125.00 excl. VAT.**
FURTHER DETAILS ON REQUEST. SPECIFY SIRIUS, VICTOR OR APRICOT

# Sirius B

A bi-monthly disk based magazine for Sirius-Victor micros containing useful software, news, technical topics, assembler routines and basic routines. In fact something for every Sirius-Victor owner and user in every issue.

**1985 Subscription £120.00 excl. VAT.**
FURTHER DETAILS AND SUBSCRIPTION FORM ON REQUEST

***IBM PC Monochrome version available shortly***

## Micro Visual Research

**58 Beachcroft Road, Wallheath**
**Kingswinford, West Midlands**
**DY6 0HX**
**Tel: Kingswinford (0384) 273047**

## EPSON




As one of EPSONs largest dealers we sell *service* and *support* their full range. For quality, style and reliability they are hard to match. Write for our full list and ex-demo and specials list.

## COMMUNICATIONS

Acoustic and Direct Connect Modems for all asynch speeds including electronic mail and viewdata. Prices from £79.




## DATA CAPTURE




We have supplied many hundreds of terminals for data capture for sales men, shops or depots and can get your data into most micros, minis and mainframes over telephones. Call us to discuss your applications.

## PRINTERS

We supply famous EPSON printers for all makes of computer. The LQ1500 for instance prints Near Letter Quality at 67cps and Draft at 200cps. The incredible P-40 costs only £87 (ex VAT) and prints up to 80 characters per line *and* BARCODES.




**ACTIL is a new concept in Retail Systems.**

A general purpose, battery powered CP/M microcomputer which looks like a till, but also does accounts, stock control, order entry and communicates. Ideal for small shops, video libraries and market traders, as well as larger groups.



**ACTEL**

**The Computer Centre,**
Bugbrooke Road, GAYTON,
NORTHAMPTON NN7 3EU.
TEL: (0604) 858011.

## IBM USERS ACT USERS

# THE MIDLAND COMPUTER LIBRARY TAKES THE GUESSING OUT OF CHOOSING

**MINIMUM 20% DISCOUNT OFF ALL SOFTWARE PURCHASES.**

Now you can try out a programme before you buy it.

- Up to full refund of hire fee if you purchase the programme.
- We have the latest business programmes including Lotus 123, Superwriter, Delta and D Base III.
- All programmes are originals with full documentation.
- Full training is available.
- Hire periods from 1 week to 6 months.
- Minimum 20% discount for all ACT & IBM purchases by members.
- 14 day money-back guarantee.

**MIDLAND COMPUTERS**

For membership details send large SAE to:-
**Midland Computers Limited,**
28 College Street, Worcester WR1 2SL. Telephone: (0905) 611072

# PRINTER SWITCHES FROM HOMESTEAD ELECTRONICS

LINK TWO OR MORE MICROS TO ONE PRINTER, PLOTTER, MODEM ETC. OR VICE VERSA

- ★ ROBUST CONSTRUCTION
- ★ SCREENED, METAL HOUSING
- ★ FULLY TESTED
- ★ BI-DIRECTIONAL
- ★ NO POWER REQUIRED
- ★ 12 MONTHS GUARANTEE
- ★ OFFICIAL ORDERS ACCEPTED
- ★ 24 HOUR DESPATCH




**SERIAL DATA SWITCHES**

**RS 232/V24. 25 way 'D' sockets**

LINES 1 to 8 & 20

| | | |
|---|---|---|
| Model R2 | 2 way switch | £49 |
| Model R3 | 3 way switch | £57 |
| Model R4 | 4 way switch | £65 |
| Model R5 | 5 way switch | £73 |
| Model R8 | 8 way switch | £110 |
| Model RX | 2 way cross-over | £65 |

ALL 25 LINES

| | | |
|---|---|---|
| Model V2 | 2 way switch | £65 |
| Model V3 | 3 way switch | £77 |
| Model V4 | 4 way switch | £89 |
| Model V5 | 5 way switch | £101 |
| Model VX | 2 way cross-over | £89 |

**PARALLEL DATA SWITCHES**

**CENTRONICS. 36 way sockets**

| | | |
|---|---|---|
| Model C2 | 2 way switch | £79 |
| Model C3 | 3 way switch | £99 |
| Model C4 | 4 way switch | £119 |
| Model C5 | 5 way switch | £139 |
| Model CX | 2 way cross-over | £119 |

**IBM PC. 25 way 'D' sockets**

| | | |
|---|---|---|
| Model P2 | 2 way switch | £65 |
| Model P3 | 3 way switch | £77 |
| Model PX | 2 way cross-over | £89 |

**IEEE-488. 24 way sockets**

| | | |
|---|---|---|
| Model E2 | 2 way switch | £89 |
| Model E3 | 3 way switch | £109 |
| Model EX | 2 way cross-over | £129 |

**PLEASE ADD VAT AT 15%. ALL ITEMS CARRIAGE PAID**

TRADE, EDUCATIONAL & EXPORT ENQUIRY WELCOME
CABLES ALSO AVAILABLE. EX STOCK & CUSTOM BUILT

**HOMESTEAD ELECTRONICS**

Trelawney Industrial Court
Trelawney Avenue, Langley
Slough, Berks. SL3 7UJ.
Telephone: (0753) 44269

BARCLAYCARD VISA



Connexions

# Magic Mouse



For the Commodore 64 **£59.95** INC. VAT

- CREATE HI-RES GRAPHICS
- TRANSFORM YOUR OWN PROGRAMS
- COMES COMPLETE WITH DISC AND TAPE SOFTWARE – NO EXTRAS REQUIRED
- SOFTWARE INCLUDES HI-RES GRAPHICS PACKAGE, MOUSE CONTROLLER, SPRITE DESIGNER, ICON DESIGNER

**Phone your nearest stockist** **Tel: 01-441 1282**




Another Connexions product from:

**SMC SUPPLIES**

**11 Western Parade, Great North Road, Barnet, Herts EN5 1AD**
**Tel: 441 1282, 441 1698, 441 0535, 441 1225. Telex: 295181 SMC G**
**TRADE/EXPORT ENQUIRIES WELCOME**



# URGENTLY REQUIRED

As a Games Software Developer, working under contract to several of the best known software houses, we have an urgent requirement for high quality machine code ATARI programmer to work on conversion from CBM 64 and SPECTRUM titles.

*Good steady work and rates of pay apply.

Please send in C/V, together with any Software samples of recent works to:-

**R. A. BUFFREY**
**15 HIGH STREET, LYDNEY**
**GLOUCESTERSHIRE GL15 5DP**
**Tel: 0594 43352**

PROFESSIONAL USE IN ACTION
BUSINESS AND TELECOMMS

£500 WORTH OF ACORN PRODUCTS TO BE WON!
When you book an advance ticket you enter the prize draw.

# THE THIRD OFFICIAL ACORN USER EXHIBITION

**Barbican Centre,
London EC2.
25th-28th July 1985**

## ACORN MEAN BUSINESS
## Four days of non-stop information and business.

If you're a serious Acorn User you mustn't miss *the only official Acorn User Exhibition.*

Not only is Acorn showing their new 'enhanced' BBC Micro but they will also be revealing many new products currently under wraps. Lots of developments in telecommunications, second processors and specialised systems will be on show.

And it is not just Acorn, we're expecting over 120 companies to be there showing all that's new in computing.

But it's not all serious, there'll be competitions and bargains too!

So if you're serious about computing don't miss this exhibition – it's the biggest and the best.

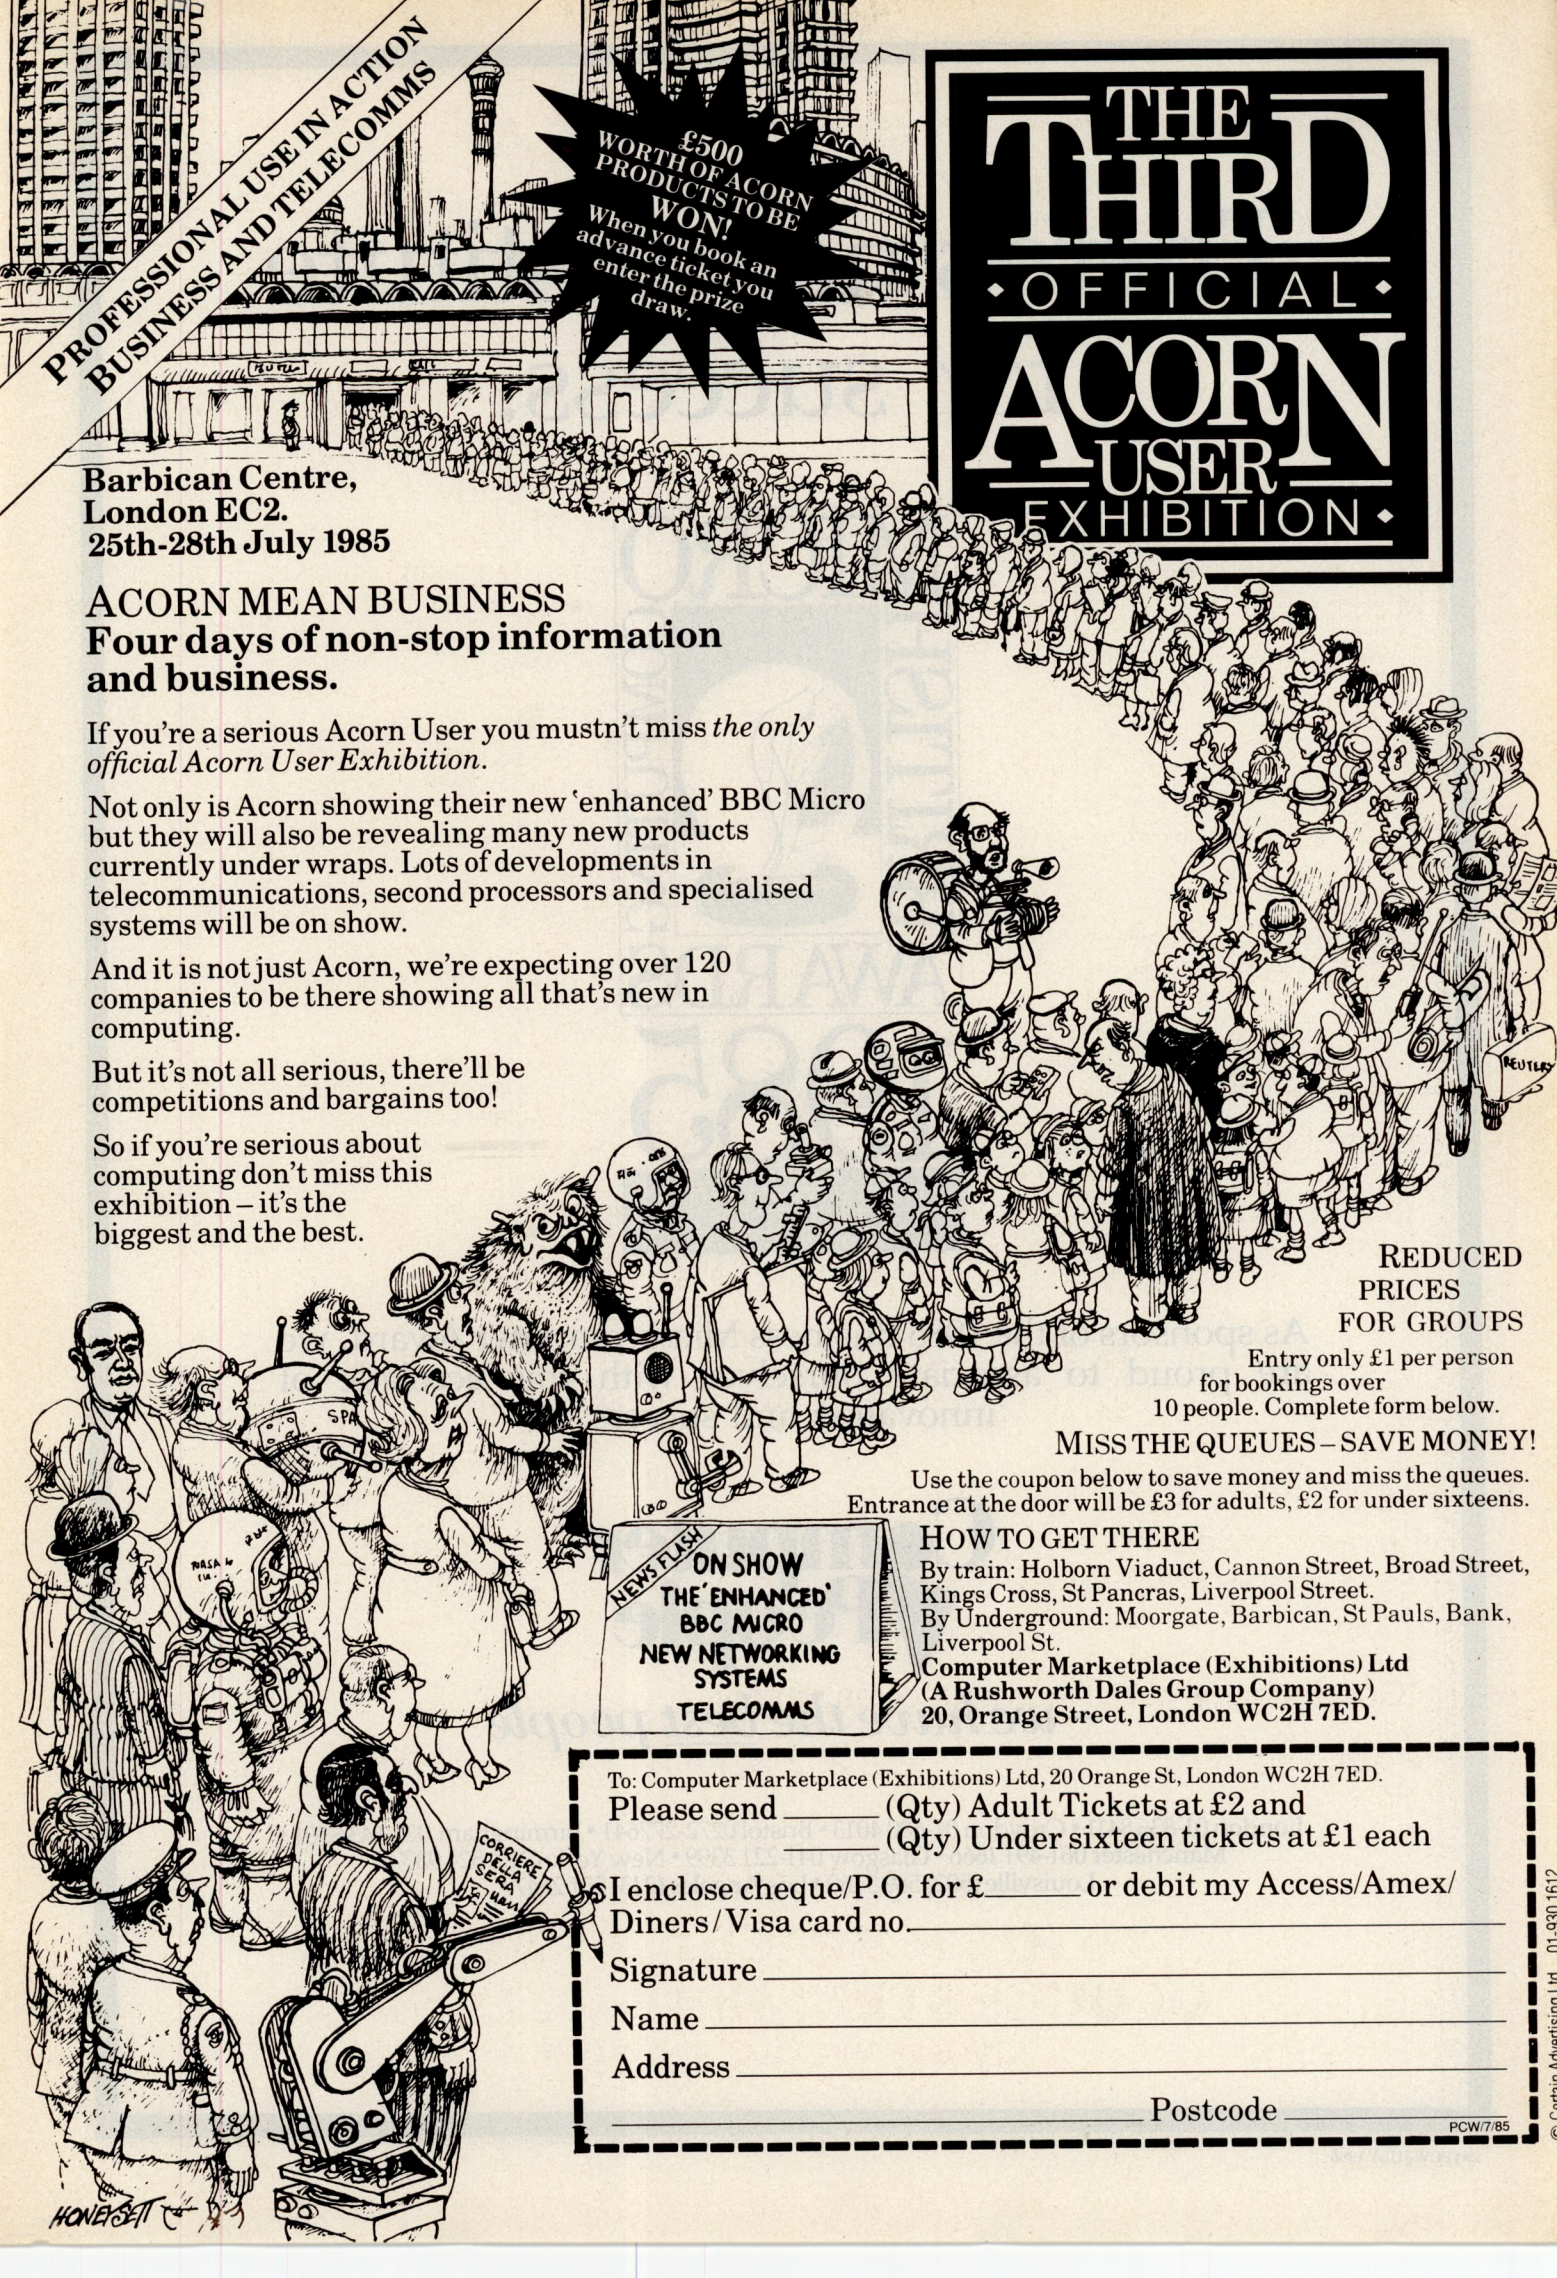


### REDUCED PRICES FOR GROUPS

Entry only £1 per person for bookings over 10 people. Complete form below.

### MISS THE QUEUES – SAVE MONEY!

Use the coupon below to save money and miss the queues. Entrance at the door will be £3 for adults, £2 for under sixteens.

### HOW TO GET THERE

By train: Holborn Viaduct, Cannon Street, Broad Street, Kings Cross, St Pancras, Liverpool Street.
By Underground: Moorgate, Barbican, St Pauls, Bank, Liverpool St.

**Computer Marketplace (Exhibitions) Ltd
(A Rushworth Dales Group Company)
20, Orange Street, London WC2H 7ED.**

To: Computer Marketplace (Exhibitions) Ltd, 20 Orange St, London WC2H 7ED.

Please send _____ (Qty) Adult Tickets at £2 and
_____ (Qty) Under sixteen tickets at £1 each

I enclose cheque/P.O. for £_____ or debit my Access/Amex/Diners/Visa card no._____

Signature _____

Name _____

Address _____

_____ Postcode _____

PCW/7/85

© Centrin Advertising Ltd 01-930 1612

# There's no substitute for success.




As sponsors of the 1985 Business Microcomputer Award, we are proud to associate ourselves with this accolade of innovation and success.

**Computer People**

*— we have the best people*

London 01-836 8411 • Croydon 01-680 4013 • Bristol 0272-277641 • Birmingham 021-643 8501 • Manchester 061-491 1666 • Glasgow 041-221 3399 • New York (212) 524 9337 • Louisville (502) 589 3460 • Los Angeles (213) 551 2647 •

# SECURITY!

## BACK-UP THE DATA NOT THE DISK

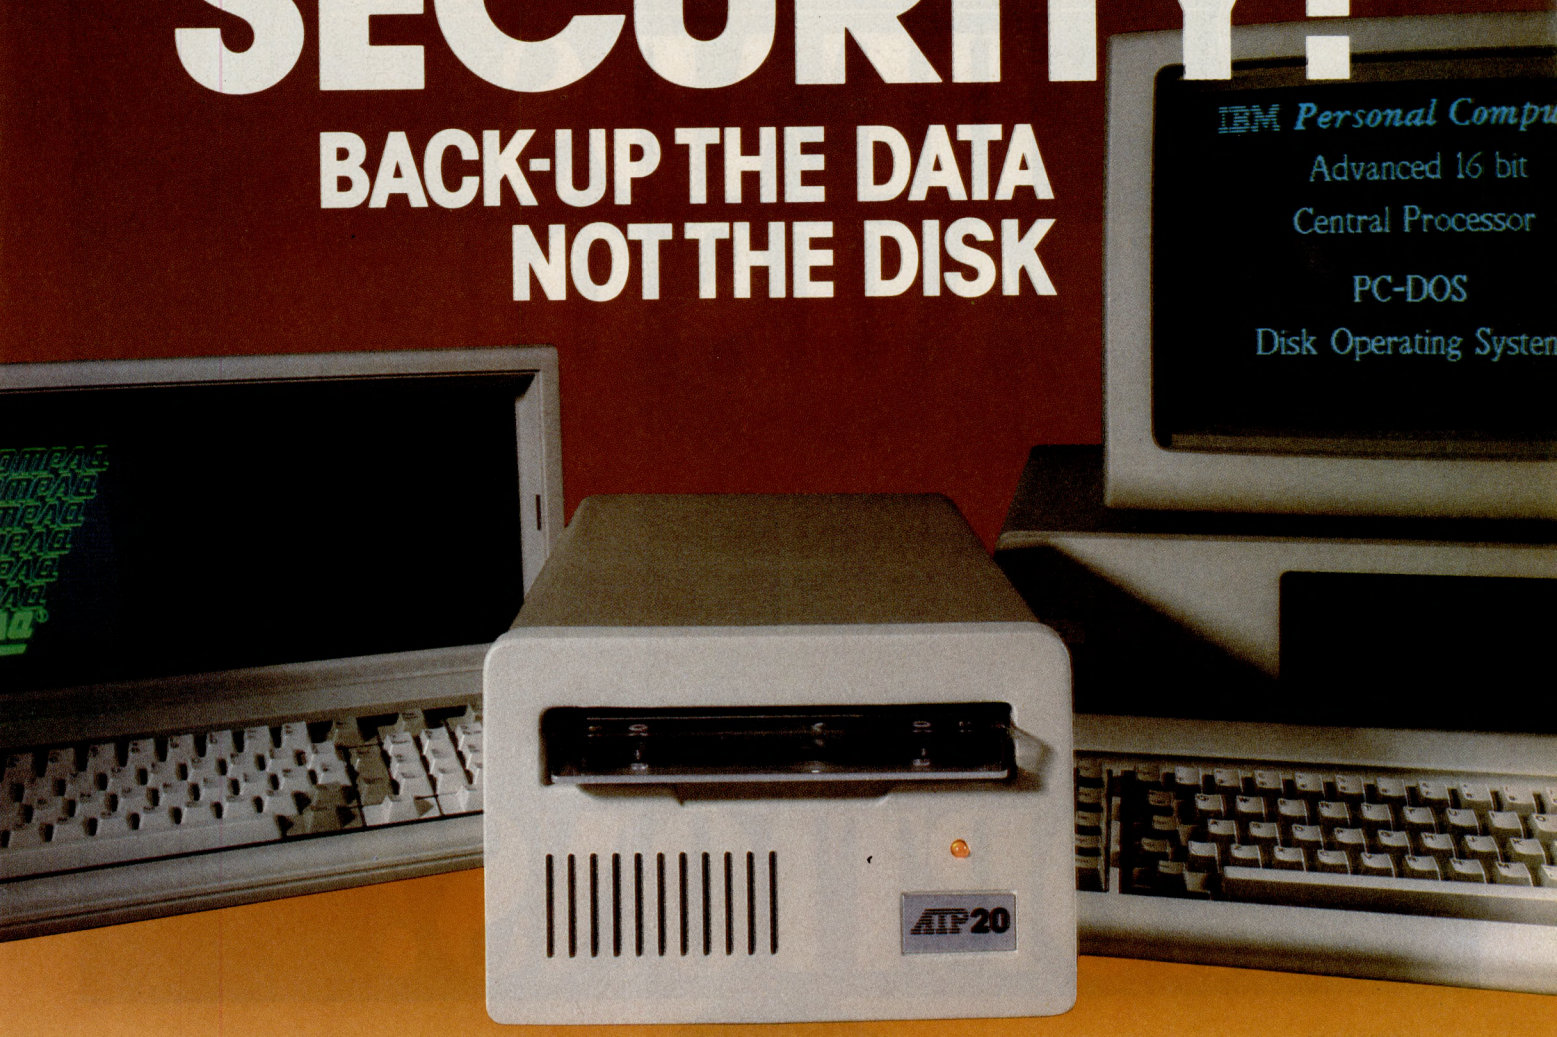


**THE ATP-20 TAPE SECURITY SYSTEM** is designed for the IBM PC, XT and AT (and most IBM compatibles) to provide security for data using an industry standard data cartridge media.
Hard disk capacities in desk top microcomputers are increasing, so are the risks. What are the risks? A lost file is lost forever unless a copy is available. The ATP-20 will back-up all the files through disk image, (backing up files as they are on the disk) or file image, (backing up each file in its entirety). A directory of the files backed-up is available on screen or printer, and selective restore can be operated from disk or file back-up.
The following interfaces are available:-
Midget – a short slot type; serial, clock, tape and games – Price £195.00
Magnum – 64-384K, tape, serial, clock – Price £334.00
Sweet 16 – AT compatible mono and colour display adapter plus tape interface – Price £399.00
ATP-20 is manufactured in the UK for CPS Data Systems Ltd. – RRP £1750.00



Call your authorised dealer or CPS Data Systems Ltd.

IBM Authorised Dealer

**CPS Data Systems Ltd.**

ARDEN HOUSE, 1102 WARWICK ROAD, ACOCKS GREEN, BIRMINGHAM B27 6BH ENGLAND.
TELEPHONE: 021-707 3866 TELEX: 337141 CPS DSE G

CPS Data Systems Ltd. is a Lotus Authorised Training Centre

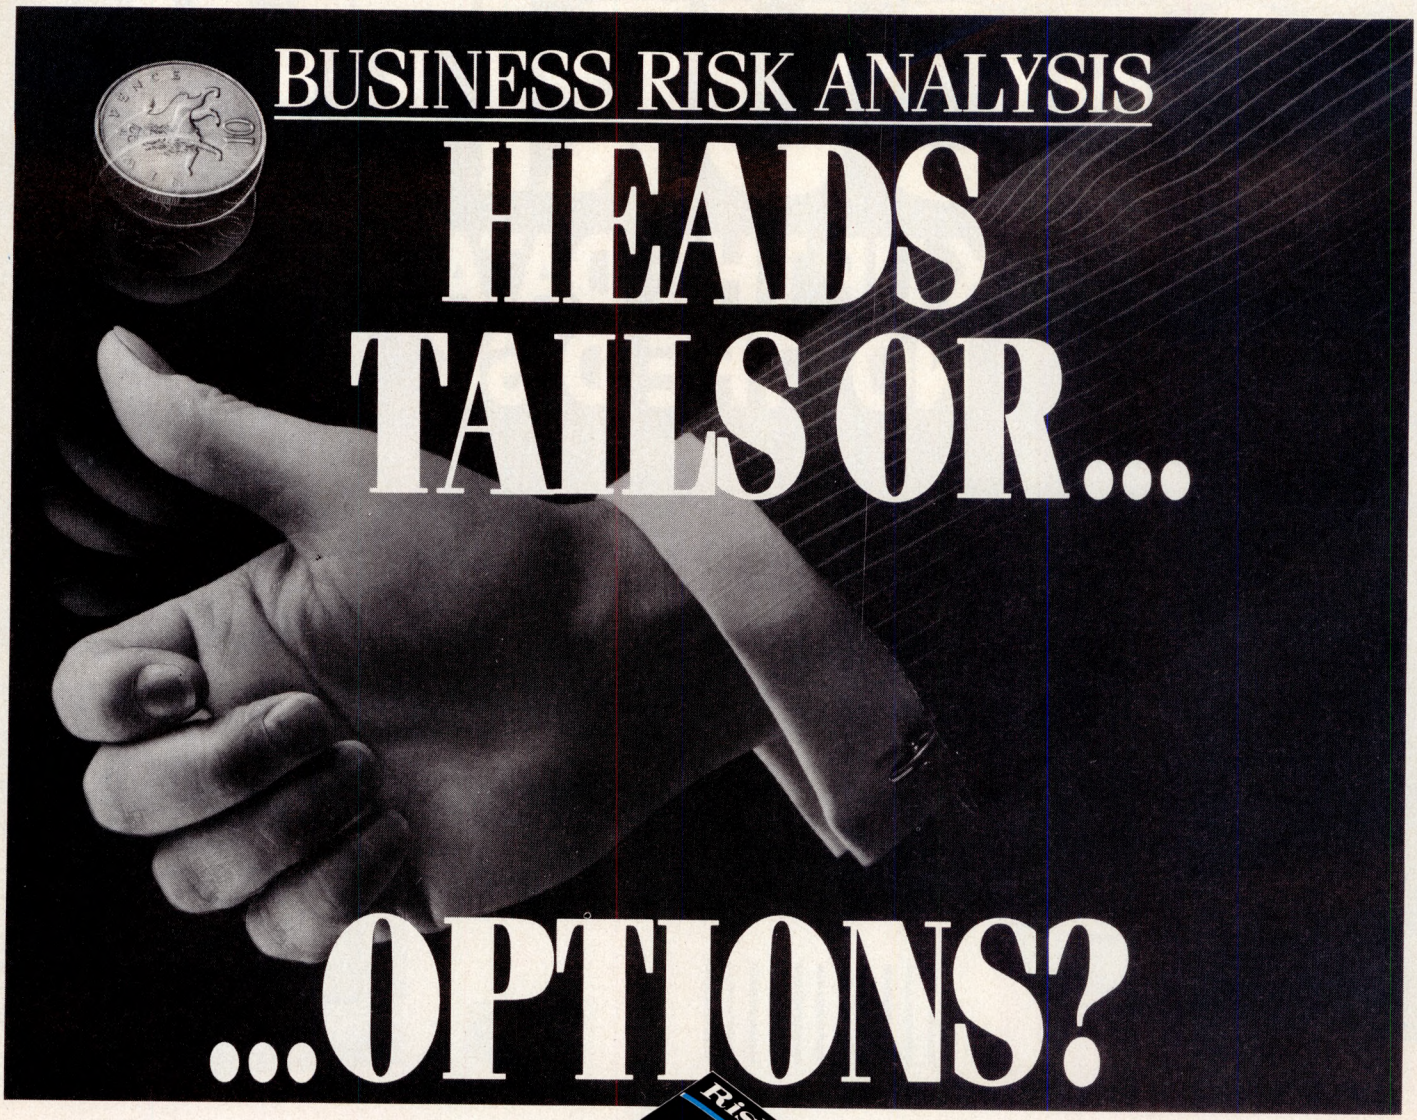


OPTIONS takes over where your spreadsheet leaves off! Produces a thousand 'what if' results in seconds! OPTIONS picks you up where a spreadsheet lets you down. It's like no other program currently available.

Picture the scene. You've painstakingly set up a business model on your spreadsheet. All the facts and figures are there and everything looks perfect. Then the inevitable happens. The 'what if' questions start coming thick and fast.

'What if' sales vary by 8%? 'What if' material costs increase by 10%? 'What if' the unions push us into an extra 7%? 'What if' oil costs vary by 5%? 'What if' interest rates vary by 2%? 'What if' our selling costs increase by 10%? etc. etc.

And 'what if' you had a program which applied all these variables to your model and cash-flow forecast **and gave you all the answers in seconds.** Not just a single answer but the whole range of risk possibilities. Show you both numerically and graphically, the chances of achieving varying degrees of success and failure - profit and loss-related to the variables you apply. The kind of information you need to plan your business and bank managers just love to see!

OPTIONS is that program. A new concept in business risk analysis. No other program does the job with such speed, flexibility, and accuracy. OPTIONS allows you to take a model created on your favourite spreadsheet Lotus 1-2-3, Multiplan or Supercalc and manipulate it in this powerful new way. If you have no spreadsheet no problem! OPTIONS has its own. For only £145 + VAT you can have all the answers to every 'what if' question they can throw at you. Instantaneously!

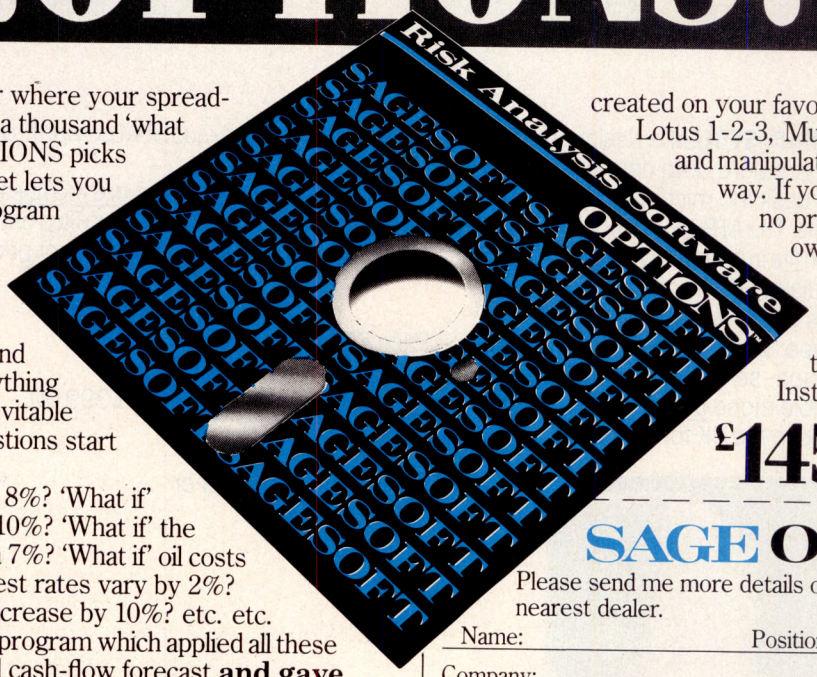


**£145** +VAT

**SAGE OPTIONS™**

Please send me more details of Sage OPTIONS and my nearest dealer.

Name: Position:

Company:

Address:

Tel:

I have a ( ) Computer

Sagesoft Limited, NEI House, Regent Centre, Newcastle upon Tyne NE3 3DS.
Tel: 091 284 7077. Telex: 53623 SAGESL G.

**BETTER SAGE THAN SORRY**

PCW 7-85

# Rockfort Disk Storage System






REG. DESIGN

**M.F. 10 Floppy Disk Box**
Holds 10 – 5¼" Disks
£2.45
Incl. VAT, Post & Packing



**M.F. 50 Floppy Disk Box**
Holds 50 – 5¼" Disks
£9.50
Incl. VAT, Post & Packing



**M.D. 12/30 Micro Disk Box**
Holds 12 to 30 – 3½" Disks according to thickness
£7.85
Incl. VAT, Post & Packing

Rockfort Diskfile Range of products not only offer an easy reference and attractive disk filing system but also offer complete protection from damaging dust particles. Post for your order today!

**ROCKFORT DISK STORAGE**

Manufactured by Projectron Ltd — Trade inquiries invited

PCW 7-85

**ROCKFORT PRODUCTS** – Member of the Vignesh Group, 30 Topsfield Parade, London, N.8. Tel: 01-348 0543

| CODE NO. | DESCRIPTION | QTY. | PRICE £ | P |
|---|---|---|---|---|
| M.F. 10 | 5¼" DISK BOX | | | |
| M.F. 50 | 5¼" DISK BOX | | | |
| M.D. 12/30 | MICRO DISK BOX | | | |
| | | TOTAL | | |

PLEASE FORWARD THE ROCKFORT DISK BOX/S AS INDICATED ABOVE. I ENCLOSE CHEQUE VALUE £ _____

NAME _____

ADDRESS _____

POSTCODE _____

# THE UK'S ONLY MACINTOSH MAGAZINE

Until now, if you've wanted to read a magazine about the Apple Macintosh, its software and peripherals, you've been out of luck.

And settling for the odd couple of pages of Macintosh editorial in the general or business computer magazines can be a frustrating compromise.

So you'll be pleased to hear that from July 1st there'll be MacUser, a magazine written and designed specifically for UK Macintosh owners.

MacUser will tell you what's coming, with over-the-horizon previews and "what's new" sections.

MacUser will tell you what's here and whether it's right for you, with page after page of solid, in-depth reviews.




MacUser will help you make the most of your Macintosh, with a wealth of "hands on" features, and hints and tips sections.

But we'd like you to find out how good MacUser is for yourself.

If you're a current Macintosh owner (or if that's your main aim in life!), fill in the reply-paid coupon and send it off to MacUser Test Drive, Sportscene Publishers Ltd, Freepost 7, London W1E 1EZ.

In return, we'll send you a free "Test Drive" copy of MacUser.

And if you've got a colleague who'd appreciate a copy, fill in their name and we'll be happy to send them a free copy too.

Test drive the premier issue of MacUser now!

## RESERVE YOUR FREE COPY TODAY

I'd like to "test drive" the premier issue of MacUser absolutely free of charge. Please rush me a copy.

☐ I am a current Macintosh owner
☐ I am a potential Macintosh owner

Name .....
Company .....
Address .....
.....
.....
Postcode .....
Telephone .....

I'd like to "introduce a colleague" to MacUser. Please rush a copy to the name and address below.

☐ He/She is a current Macintosh owner
☐ He/She is a potential Macintosh owner

Name .....
Company .....
Address .....
.....
.....
Postcode .....
Telephone .....

MacUser

Once you've filled in this coupon for your free "test drive" issue, send it off to **MacUser Test Drive**, Sportscene Publishers, Freepost 7, London W1E 4EZ.

NOW AVAILABLE

A LOW COST DISC BASED

## PROFESSIONAL ACCOUNTING PROGRAM

For The BBC Computer

### " Micro-Trader "

**INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS**

Designed for business use by a business man. " Micro-Trader " is a fully integrated program in which all Sales and Purchase Ledger Transactions are automatically updated to the Nominal Ledger.

" Micro-Trader " offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of 450 accounts and 3000 transactions per month in each Ledger.

Normal Income, Expenditure, Assets, Liabilities & Journal Posting in the Nominal Ledger with full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

" Micro-Trader " is designed to meet V.A.T. requirements.
A V.A.T. Return produced in 2 minutes ! ! ! !

ONLY £200 + V.A.T.

STOCK CONTROL and MAILMERGE programs can be added

PHONE TODAY FOR A FREE FACT SHEET

## MEADOW COMPUTERS

HEBREWS MEADOW, LOWER EVINGAR ROAD, WHITCHURCH, HANTS.

**Telephone: Whitchurch (025682) 2008**

---




## "Join the world's largest Apple user group!"

Now in its eighth year of publication, Call APPLE is the leading US journal to the world's largest Apple user group. Now every Apple user in the UK can benefit from this invaluable magazine, direct and only from Boot Out.
Special bound collector editions of Call APPLE 82, 83, are now available at the low Boot Out price of £16 per copy.
**Software.** Compare our list of Boot Out top ten software prices, we doubt whether you'll find cheaper! Send now for a complete price list, we have over 100 titles in stock.
**All about . . .** Applewriter IIe book has just arrived from the US. This is a welcome addition to the already popular "all about" DOS, Applesoft and Pascal books and diskettes.

**Boot Out**

**The exclusive Call Apple distributor**

**Boot Out, PO Box 147, Putney, London SW15 1AU**
**Tel: 01-788 1454**

---

# SYNTAX soft

## 3 BULCOCK STREET BURNLEY BB10 1UH

***PRESENTS!***

**Three exciting programmes for the Memotech computer**

### MEMOSKETCH

The ultimate graphics programme. Draw your own pictures then save them and use them within your own programmes. The demo screens must be seen to be believed, **£8.95.**

### QUANTUM

High speed machine code action. Pit your wits against the power ball, **£7.95.**

### DOCTOR FRANKIE

This gruesome saga is a must for all games players. A very difficult and exciting game, **£7.95.**

***JUST RELEASED FOR THE TATUNG EINSTEIN***

### AGROVATOR

This mammoth maze game bears no resemblance to any other type of maze game. 30 random screens and a 100% machine code action, **£9.95.**

## Tel: 0282 57427

---

Comexions

STER CABLES SMC SUPPLIES COMPUTER CABL

# CABLES

Our low cost, high quality and fast helpful service has meant we are now established as the UK's top manufacturer of solder, IDC and moulded computer interface cables.

## For advice or a price Phone 01-441 1282

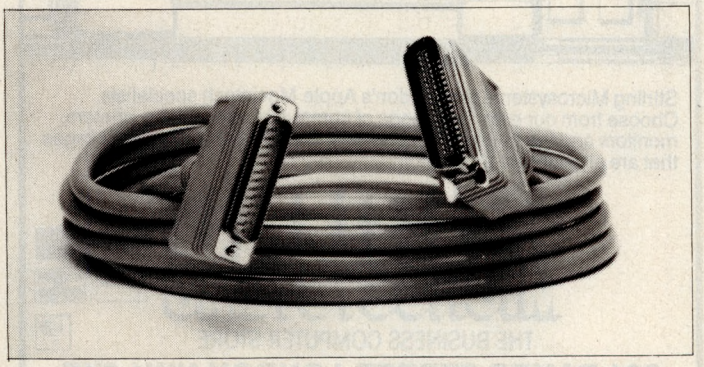

**SMC SUPPLIES**
**11 Western Parade, Great North Road, Barnet, Herts EN5 1AD**
**Tel: 441 1282, 441 1698, 441 0535, 441 1225. Telex: 295181 SMC G**

# SOUTHEND'S PRINTER Specialist

| | |
|---|---|
| SEIKOSHA GP500A | £149.00 |
| BROTHER HR5 (also for CBM64) | £149.00 |
| SMITH CORONA FASTEXT 80 | £169.00 |
| BROTHER M1009 | £199.00 |
| SHINWA CP80 | £199.00 |
| SHINWA CPA80 | £209.00 |
| MANNESMAN TALLY MT80 PLUS | £219.00 |
| MP165 WITH LQ | £299.00 |
| SAKATA 1200 PLUS WITH LQ | £310.00 |
| DAISY JUNIOR (DAISYWHEEL) | £249.00 |
| PLOTTERS IN STOCK FROM | £ 89.00 |

OTHER PRINTERS AVAILABLE
RIBBONS FOR MOST POPULAR PRINTERS

ACCESS/VISA TELEPHONE ORDERS WELCOME
PLEASE ADD £10.00 FOR COURIER DELIVERY

## Minnie Micro

12 EASTERN ESPLANADE · SOUTHEND
(0702) 615809

# MACOB

MAIL ORDER WITH A DIFFERENCE

## SYSTEMS

DIRECT TO YOU AT WHOLESALE PRICES

### COMPUTERS

| | |
|---|---|
| BBC-B | £329 |
| BBC-BD | £419 |
| BBC-B+ | £385 |
| DFS (Acorn) | £90 |
| Z80 2nd Processor | £389 |
| 6502 2nd Processor | £189 |
| CBM 64 | Available for |
| Sinclair | export |

### PRINTERS

| | |
|---|---|
| Canon PW1080A | £279 |
| Canon PW1156A | £389 |
| Kaga KP810 | £279 |
| Epson RX80F/T | £232 |
| Quendata 20cps | £239 |
| Juki 6100 | £332 |

### FIRMWARE

| | |
|---|---|
| View | £48 |
| Wordwise + | £48 |
| Disc Doctor | £29 |
| Printmaster | £29 |

### DATA RECORDERS

| | |
|---|---|
| Omega | £21 |

### MONITORS

| | |
|---|---|
| Microvitec 1431 | £185 |
| Microvitec 1451 | £279 |
| Philips BM7502 | £83 |

### DISKS

| | |
|---|---|
| D/S D/D 80T | £20 (box of 10) |
| (Fully guaranteed) | box of 10 |

### MODEMS

| | |
|---|---|
| Pace Nightingale | £130 |

### DISK DRIVES

| | |
|---|---|
| Cumana CSX100 SS 40T | £103 |
| Cumana CSX400 DS 40/80T | £155 |
| Cumana CD200 SS 40T + PSU | £242 |
| Cumana CD800 DS 40/80T + PSU | £356 |
| PSU | £20 |

- Price includes VAT at 15% and delivery is FREE in the UK.
- To order just send a cheque or postal order to us and the goods reach you fast.
- Trade enquiries welcome.
- Remember, our name is our guarantee.

## MACOB SYSTEMS

8 Lister Gardens, London N18 1HZ. Tel: 01-803 1622
Telex: 8954029 att.MACOB




Stirling Microsystems are London's Apple Macintosh specialists. Choose from our extensive range of computers, disk drives, printers, monitors and the hundreds of business and leisure software packages that are all available ex stock.

## STIRLING MICROSYSTEMS

THE BUSINESS COMPUTER STORE

**231 BAKER STREET, LONDON NW1 6XE**
**TELEPHONE: 01-935 5262**

OPEN MONDAY-FRIDAY 9.30 AM-6.00PM

## STARPOLISH FOR WORDSTAR

"**Polish**" your copy of Wordstar (version 3.3 and earlier) to give access to a full set of 256 characters, displayed as they will be printed. On screen features include sub/superscript, underline and bold. Scientific reports to foreign languages all made easier by enhancement of the basic Wordstar package. In short, **"What you see is what you get"**.

Improved printer install program enables the selection of a variety of printers, e.g. Epson FX, to give print output to match screen display. Additionally, such features as enlarged and condensed print may be called.

A modified keyboard definition and useful character sets are included.

*StarPolish is a trademark of TDI Inc., USA*

**Sirius: MS-DOS or CP/M-86 Apricot: MS-DOS £125+VAT**

## EPSON FX - WORDSTAR PRINT & SUPPORT PROGRAMS

**PRINT PROGRAM** Extra dot and control commands enable full use of printer. Downloads character sets. Powerful facility combines file output and dot commands at print time. System command file, 80%+ time saving with printer buffer, swift and smooth without. Multiple copies.

**PRINT CHARACTER GENERATOR** Facilitates custom design of printer character sets.

**WORD COUNT & TOGGLE CHECK** (Control & dot commands) Page by page word count, running total and report on toggle balance.

**Sirius or Apricot MS-DOS or CP/M-86 £40+VAT**

**StarPolish + Print & Support - An ideal combination £160 + VAT**

**I offer these programs together with expert technical help.**

**PETER ANTONELLI**, B.Sc.Tech., C.Eng. Professional Software
47 Chequers Park, Wye, Ashford, Kent. TN25 5BB 0233-812745

*Ownership of the above well known trademarks detailed on request.*

# GRAPHICS

**DIGISOLVE** offer you a way to increase your graphics speed and resolution. Using a high speed graphics processor, our cards draw lines and characters FAST. The graphics processor works in parallel to the host machine and gives you the power of using a co-processor specifically designed for graphics. With drawing rates of up to 1,500,000 pixels per second, lines appear instantly to speed up your plotting.

With the resolution, we offer new possibilities for software and systems, both in monochrome and colour on a large range of computers.

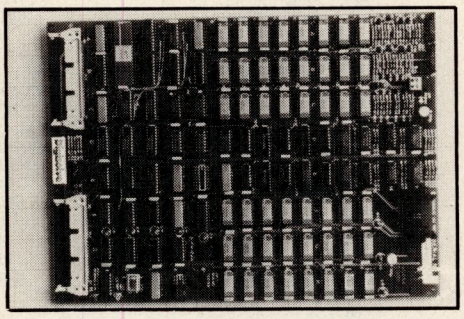

## COLOUR GRAPHICS CONTROLLER

**DIGISOLVE** offer you high resolution colour graphics too. Designed to plug into any computer with a bus host adaptor. The VGP64 gives you 512 x 512 pixels in 64 colours. With its own vector processor and 384K bytes of memory, your computer can become a sophisticated grahics system. **64 COLOURS** or 8 if you insist, not many do! **4096 COLOURS** now you can really paint a picture. **384K BYTES of RAM** or 768K Bytes with 4096 displayed simultaneously. **2 PICTURE BUFFERS** give you help with animation. **GREY SCALE OUTPUT. EXT VIDEO SYNC LOCK** available for making video tapes. **APPLE, SAGE, PET, IBM, S100, VME BUS, RS232,** centronics, all have interfaces available to make use of our fast hardware. New ones are coming along all the time so give us a ring if your requirement is not listed.

**8 COLOURS £899, 64 COLOURS £999**
**4096 COLOURS £2000 + P&P + VAT**

*The above prices are box units including power supply but excluding computer interface.*

SOFTWARE PACKAGES: Painting and Slide generation, Business graphics, Architectural 3D design.

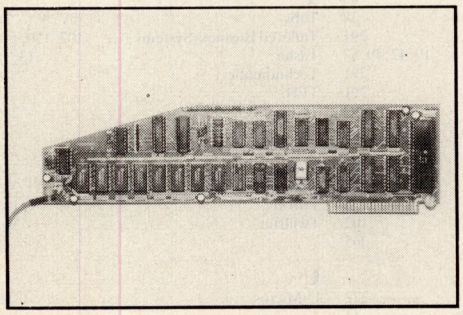

## APPLE II

**DIGISOLVE**'s Apple II High Resolution Vector Graphics Processor card quadruples the screen resolution and saves using up your Apple's memory. The enhanced Applesoft support disc supplied with our card provides powerful graphic functions and simplifies the conversion of existing software.

**512 x 512** pixels resolution. **FAST** 1,500,000 pixels per second. **MEMORY** an extra **64K** on the card. **TEXT** to 85 characters by 57 lines. **CURSOR** drawing features. **SOFTWARE** 18 new functions are added to Applesoft and extra utilities too, all with source listing. **OUTPUT** to a dot matrix printer or save images on a disc. **PASCAL** and **TASC** Compiles supported too.

**£399.00 + P&P + VAT**

SOFTWARE PACKAGES: Art and Design, Business graphics, Painting, Slide generation packages. Architectural design and modelling, Kitchen design and Visicalc preboots.

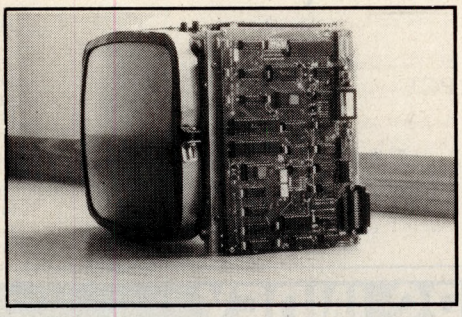

## VDU BOARD

**DIGISOLVE** offer you the cheapest way to make a scrolling VDU with our intelligent 80 x 24 VDU card. With over 50 control functions, the card works up to 19.2K baud.

**80 x 24 DISPLAY** optional 40 x 24 or 40 x 12.
**TRUE DESCENDERS** on properly formed characters in an 8 x 12 matrix.
**BLOCK GRAPHICS**
**FULLY SCROLLING** display
**UP TO 19.2K BAUD** via RS232 communications port.
**KEYBOARD AND RS232 DATA INPUT**
**£180.00 (1 off) + P&P + VAT**

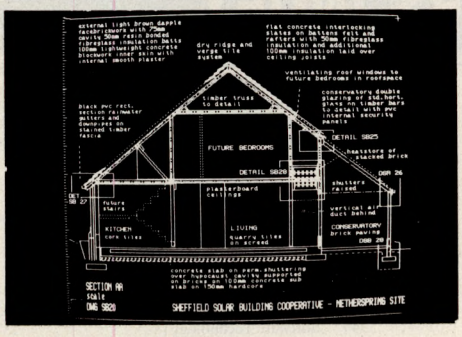


## COLOUR GRAPHICS TERMINAL

The new **FRONTIER** monochrome and colour high resolution graphics terminals are fully compatible with Tek 4014 terminals at an amazing price. The high line rate flicker free monitor and advanced electronics provide an exceptional graphic display terminal.

**512 x 720 DISPLAY, 1K x 1K STORED PICTURE PAN, ZOOM & SCROLL** to move the display about. **LOCAL EDITING** with macros and software definable character fonts.
**PALLETTE OF 4096 COLOURS**
**FLICKER FREE DISPLAY** due to high line rate monitor and advanced electronics working non-interlaced.
**19" SCREEN OPTION AVAILABLE**

**PRICES FROM £1495.00 + P&P + VAT**

## CUSTOM DESIGNS

**DIGISOLVE** have staff dedicated to design consultancy and are helping many industrial users with custom design packages. Our experience in designing display equipment, character or graphic based, and microprocessor controllers may help you with your special projects. Please do not hesitate to contact us if you require further details.

Digisolve

**DIGISOLVE LIMITED**
**AIRE & CALDER WORKS**
**CINDER LANE**
**CASTLEFORD**
**W. YORKS WF10 1LU**
**(0977) 513141 (6 lines in), 513382, 510511**
**TELEX 557661 AGRAM**

APPLESOFT IS COPYRIGHT APPLE COMPUTER ● TEK 4010 IS COPYRIGHT TEKTRONIX ● SCRIBE IS COPYRIGHT ECOTECH LTD

# ADVERTISERS INDEX


**A**
ACT 120, 121
Actel 291
Adelphi 211
Advanced Digital Corporation 293
Advanced Input Devices 274
Akhter 42, 43
Alliance 270
Alphadisc 290
Antonelli 300
Amstrad 88, 89
AT Computerworld 104, 105
ATT 9
Autoram 70
AWS 24
Axis 75, 76, 77, 78, 79

**B**
Barbatan 86
Barclays Bank 276
Bargain Software 273
Bizzel Computers 69
Boot Out 299

**C**
CAE 269
Cambridge Computer Store 80
Cambridge Electronic Design 159
Cambridge Micro Electronics 83
Cambridge System Technology 84
Canon 112, 113
Carera 25, 282
CCA 9
Cemoc 297
CDS 125
Cerac 191
C-Itoh 193
Clive Computer Systems 217
Cocking & Drury 129
Compshop 26
Compudata 280, 281
Computeach 273
Computer Enterprises International 4
Computer Marketplace Exhibitions 271
Concordia 147
Control Telemetry 278
CPS 288, 295
Cresstmatt 18
Cumana 85
C/WP 32

**D**
Data Distributors 106
Datageneral 151
Datastar 21
Da-Vinci 48
Delaviese 284
Dennison Kybe 37
Digisolve 268
Digital Research 53, 64
Digitask 22, 278
Digithurst 74
Digitus 1
Disco-Technology 279
Discount Micros 23
Display Electronics 275
Display Telecommunications Corp 285
DJ AI 14

**E**
Elite 17
Epson 223, 225, 227, 229, 231
ESC Publishing 211
Express 17

**F**
First Software 35
Fraser Associates 50
Freerose 170
Frimpton Associates 277
Future Management 272

**G**
Gagliardi 82
Garwood 270
Gemini 262, 263
General Programmes and Robotics 84
Genpat 299
Grafox 41
Grey Matter 303
Group 18 25

**H**
Haulstern 278
Hi-Soft 81, 274
Hi-Tech 211
Homestead 292
Honeywell 266, 267
Houston 128

**I**
ICL 181
Immediate Business Systems 148
Institute of analysts 277
Interactive Software 7
Intergrex 289
Interlex 274
ISC 17
ITS 6

**J**
Juki 202

**K**
KDS 6
Keelecodes 8
Kendall Computing 20
Keyzone 272
Kingsley Enterprises 67
Kirklands 70
KGB 139
Kode 161

**L**
Lamnia 31
Lantech 67
Laskys 100, 101
Leabus 25
London Computer Centre 74
Lutterworth Software 8

**M**
Macob 300
Mac User 298
Magpalm 167
Mancos 82
Map '80' Systems 52
Matmos 30
Mayfair Micros 191, 264
Meadow Computers 299
Memoco 24
Memorex 108, 109
Metacomco 65
Microbridge 72
Micro Component Trading 282
Micro Computer Consultants 19
Micro Computer Services 68
Micro Control Systems 284
Microfast 32
Microgeneral 10
Microgold 277
Microlink 52
Micromonde 284
Microperipherals IBC
Micro Processor Engineering 90
Micro Rent 66
Micro Resources 40
Microtime International 38
Micro Visual Research 291
Microware 19, 47, 49, 57
Midland Computers 291
Mighty Micro 291
Mill Hill Computing 282
Minic Microcomputers 300
Miracle Technology 40
Mirage Micros 284
Modem House 72
Modular Technology 6
Morgan Camera 102
MPI 265

**N**
National Computer Services 272
North West Computer Supplies 44

**O**
Oasis 71
Opus 30
OI Computers 5

**P**
Pace 95, 96, 97
Pam 4
Parkins Associates 4
PC Communications 34
Personal Computers OBC
Pinner Word Pro 83
Power Testing 67
Professional Connections 8
Programmes Technology 46
Prospero 114

**Q**
Qume 127

**R**
Regional Systems 103
Robocom 160

**S**
Sage 98, 99, 287, 296
Sanyo 119
Seven Software 292
Sharpsoft 71
Silica Shop 87
Silicon Valley IFC, 11
SMC 292, 299
SHUA 147
Softsel 32, 33, 38, 39, 44, 45
Spectrum 258, 259, 260, 261
Star 80, 81
Stellation II 14
Stirling 300
Swanley Electronics 270
Systematica 24
System 'C' 73
System Science 147

**T**
Tabs 36
Tailored Business Systems 107, 130, 140
Tasha 13, 15
Technomatic 28
TFH 71
Thames Television 286
Thoughts and Crosses 27
Tiger Software 273
Timatic 278
T-Matt 273
Trisoft 103
Twillstar 264

**U**
U-Micros 69

**V**
Vicodden 265
Victor 16
Viglen 12
Vignesh 297
VLI 295
Vision Stor 172

**W**
West One Galaxy 29
Westwood 191
Wolfcrown 283
Worldwide Computers 82


# MICROMART ADVERTISERS INDEX


**A**
Algol Applications 239
A-Line 233
Altek 256
AMA 243
Anita Electronics 234
Arnor Ltd 256
Ashley Computers 247

**B**
BBD Dust Covers 253
Binary Banana 252

**C**
Cairn Associates 251
Cenprime 244
Clef Products 257
Computer Books 257
Computer Exchange 254

**D**
Data Management 250
Data-Tech 255
D & R Computing 238

**E**
Esstone Electrical 249

**F**
Figure Flow 246

**G**
GFG Microsystems 246

**H**
Harrison Ward 238
Hilltec Electronics 232
Hoodles Associates 248

**I**
IDS News 239
Ikon 253

**J**
JB International 257
JP Magnetics 232

**K**
Kambal Data Systems 245
KECM 242
KK Stationers 257

**L**
Leicester Computer Systems 238
Logical Micro Systems 256
Logifix 242
Logitech 255

**M**
Macrosystems 257
Martlee 240
MHJ Software 256
Micro Age 256
Microcosm Computing 248
Micrologic Consultants 243
Microprocessor Engineering 256
Mid Surrey Medida 244
MLH Technology 249
Monas 253
Morgan Camera 256

**N**
New Brain Files 246

**O**
Offshore Software 242
One Stop Micro Service 255

**P**
Personal Computer Services 254
Peterson Electronics 234
Pheonix Software 256
Pinewood Designs 252
Premier Systems International 235
Pride Utilities 250
Professional Magnetics 236

**R**
Ringdale Engineering 256

**S**
Saltgrade 251
Software Centre 233
Software Technology 237
South Yorkshire Promotions 241
Stuart Flemming Computer Consultants 257
Sumlock 241
Supersoft 236
Synchronicity 237

**T**
Trisoft 235, 237, 239, 241
TV Services of Cembridge 252
Typro 248

**W**
WD Software 234
Wordsmiths 236

## PASCAL COMPILERS

The new version 3.0 of TURBO Pascal is here. Some Microsoft & DR products are at bargain prices. We also have a selection of Pascal Libraries and Toolboxes not shown here.

| | | |
|---|---|---|
| 8-bit | Nevada Pascal (JRT4) | £ 40 |
| | Turbo Pascal v3.0 | £ 55 |
| | DR Pascal/MT+ | £ 99 |
| | Pro Pascal | £199 |
| 16-bit | Utah Pascal (JRT) | £ 40 |
| | Turbo Pascal v3.0 | £ 55 |
| | Microsoft Pascal | £ 95 |
| | SBB Personal | £160 |
| | SBB Professional | £395 |
| | Practical Pascal | £145 |
| | Pro Pascal | £290 |
| | DR Pascal/MT+86 | £295 |

**For information or advice call us.**

## MODULA-2 & ADA

New products this month are the Zurich native code compiler for Z80, the Interface Technologies Compiler, a delightful product for the IBM PC, and the 'affordable' JANUS C-Pack.

### MODULA-2 COMPILERS

| | |
|---|---|
| Modula Corp (MS-DOS,Apple) | £ 95 |
| Zurich Compiler (Z80 CPM) | £160 |
| Volition (various) | from £265 |
| Logitech (MS-DOS,CP/M-86) | £380 |
| Interface Technologies(PC-DOS) | £225 |

### ADA (subset) COMPILERS

| | |
|---|---|
| Augusta (CP/M-80) | £ 80 |
| Supersoft (CP/M-80) | £180 |
| Janus D-Pack(CP/M-86,MS-DOS) | £895 |
| Janus C-Pack(CP/M-86,MS-DOS) | £150 |
| Janus (CP/M-80) | £125 |

**For information or advice call us.**

## THE BASIC LANGUAGE

In addition to an exceptional range of structured basics we have bargains among the Microsoft BASIC's.

| | | |
|---|---|---|
| 8-bit | CBASIC | £125 |
| | CBASIC Compiler | £385 |
| | MBASIC Interpreter | £ 80 |
| | MBASIC Compiler(BASCOM) | £375 |
| | BBC BASIC Interpreter | £ 95 |
| | S-BASIC Compiler | £185 |
| | ALCOR multi-BASIC | £135 |
| 16-bit | GW-BASIC 1.0 Interpreter | £ 80 |
| | GW-BASIC 2.0 Interpreter | £ 95 |
| | GW-BASIC Compiler | £125 |
| | MS-BASIC Interpreter | £330 |
| | MS-BASIC Compiler | £135 |
| | MS Bus.Basic Compiler | £440 |
| | CBASIC | £250 |
| | CBASIC Compiler | £450 |
| | Applications BASIC | £395 |
| | Better BASIC | £195 |
| | MEGABASIC | £375 |
| | Professional BASIC | £ 99 |
| | ALCOR Multi-BASIC | £135 |

**For advice or information call us.**

## HIGH-LEVEL LANGUAGES

The products listed here are a very diverse grouping. If you suspect that you need more than a conventional 'procedural' language to solve your problem then we can advise which of these languages might suit you.

### PROLOG

| | | |
|---|---|---|
| 8-bit | micro-PROLOG | £ 75 |
| | PROLOG-1 | £225 |
| 16-bit | PROLOG-86 | £135 |
| | micro-PROLOG v3.1 | £150 |
| | micro-PROLOG v4.0 | £265 |
| | PROLOG-1 | £299 |

### LISP

| | | |
|---|---|---|
| 8-bit | Toolworks LISP/80 | £ 45 |
| | iLisp | £ 80 |
| | Waltz Lisp | £170 |
| | muLisp-80 | £190 |
| 16-bit | Toolworks LISP/86 | £ 45 |
| | BYSO LISP | £ 95 |
| | IQ Lisp | £195 |
| | muLisp-86 | £240 |
| | Gold Common Lisp | £550 |

### NIAL, SNOBOL, muMATH

| | |
|---|---|
| muMath/muSimp from | £240 |
| Q'Nial (IBM PC) | £350 |
| SNOBOL4+ | £ 85 |

### EXPERT SYSTEM SHELLS

| | |
|---|---|
| Micro Expert | £500 |
| APES | £180 |
| ES/P ADVISOR | £595 |

### SMALLTALK

| | |
|---|---|
| Methods (PC-DOS) | £265 |

**For advice or information call us.**

## FORTRAN COMPILERS

We are introducing here the Lahey and RM professional quality Fortran 77 compilers. Our Microsoft 16-bit compiler is a bargain. We also stock several Fortran Libraries

| | | |
|---|---|---|
| 8-bit | Nevada Fortran | £ 35 |
| | Pro-Fortran | £199 |
| | Microsoft Fortran | £475 |
| 16-bit | Microsoft Fortran | £ 95 |
| | DR Fortran 77 | £270 |
| | Pro-Fortran | £290 |
| | Lahey Fortran F77L | £495 |
| | RM/FORTRAN 77 | £495 |

**For advice or information call us.**

## PRICES & DELIVERY

Prices do not include VAT or other local taxes but do include delivery in UK & Europe. Please check prices at time of order, ads are prepared some weeks before publication.

Many other products are stocked for which there is no space here.

We welcome payment by credit cards including telephone orders.

## THE C LANGUAGE

New versions from Aztec, Wizard, Toolworks and Microsoft, the new C-TERP, several new libraries, and lower prices for Lattice & Aztec.

### C COMPILERS

| | | |
|---|---|---|
| 8-bit | Aztec C II v1.06D | £160 |
| | Aztec C65 v1.05C | £160 |
| | BDS C v1.50a | £110 |
| | Toolworks C/80 v3.1 | £ 45 |
| | Eco-C v3.1 | £190 |
| 16-bit | Aztec C86/BAS v1.06D | £160 |
| | Aztec C86/PRO v3.2 | £350 |
| | CI Optimizing C86 v2.2 | £295 |
| | C-Systems C v2.0 | £210 |
| | De Smet C88 v2.4 | £145 |
| | Digital Research C v1.1 | £270 |
| | Lattice C v2.14 | £350 |
| | Mark Williams MWC86 2.0 | £425 |
| | Microsoft C v3.0 | CALL |
| | Toolworks C/86 v3.1 | £ 45 |
| | Wizard C v2.1 | £395 |

### C INTERPRETERS

| | |
|---|---|
| Instant-C v1.01 | £395 |
| RUN/C v1.1 | £130 |
| C-terp | £295 |
| Introducing C | £125 |

### C LIBRARIES

| | | |
|---|---|---|
| Data base | C-tree (source) | £325 |
| | Multikey | £170 |
| | db-VISTA (source) | £395 |
| | V-FILE | £295 |
| | Btrieve | £245 |
| | C-to-dBase (source) | £150 |
| | Phact | £250 |
| | SoftFocus Btree(source) | £ 90 |
| | dBC (dBASE III) | £195 |
| Graphics | Multi-HALO | £195 |
| | C Tools (source) | £110 |
| Screen | Panel | £245 |
| | Lattice Windows | £235 |
| | Windows for C | £195 |
| | Curses | £110 |
| Misc | Greenleaf Functions,sce | £175 |
| | C Food Smorgasbord | £150 |
| | Plink-86 | £325 |
| | Pfix Plus | £325 |
| | C Helper, source | £135 |
| | C Refiner | £145 |
| | Basic C | £175 |
| | Bastoc | £325 |

More libraries not listed here.

## DISK COPYING SERVICE

Moving data and program files from one machine to another is often made difficult because different manufacturers have adopted different disk format standards.

**We can copy your files to and from over 400 disk formats including CP/M, CP/M-86, MS-DOS, PC-DOS, ISIS, APPLE, SIRIUS, TORCH, APRICOT, HP150, TRSDOS, DEC RT-11, and IBM BEF.**

Disks are normally despatched on the day they are received.

Our charge is £10.00 + disk + VAT. Special prices for quantities.

**For more information call us.**

GREY MATTER GREY MATTER GREY MATTER

4 Prigg Meadow, Ashburton, Devon TQ13 7DF.
**TEL. (0364) 53499**

4 Prigg Meadow, Ashburton, Devon TQ13 7DF.
**TEL. (0364) 53499**

4 Prigg Meadow, Ashburton, Devon TQ13 7DF.
**TEL. (0364) 53499**

# CHIP CHAT

**Happy landings:** not that we want to make you nervous about flying off for your summer holidays, but there are some interesting ads in a recent issue of *Computair*, 'the journal of the Royal Air Force Personal Computer Association'. For the Atari there's Attack of the Mutant Camels (a 'slick megablast'), and for the BBC there's Free Fall ('all your crew members are dead') and Aviator ('score points by successfully flying under a bridge and between skyscrapers'). Presumably these games will at least allow the pilots to get such manoeuvres out of their systems before they leave the runway.

**Can-can('t):** regular readers will recall earlier stories about IBM's 100 per cent club for successful salesmen. The latest rumour concerns one manager who thought his troops deserved a special reward — dancing girls. IBM disagreed and demoted him.

**Foot-loose:** would you believe that 'the demographics of runners and computer users are similar'? We wouldn't, but Adidas and Puma do — both companies are planning running shoes with built-in chips. Run round the block, connect the shoe to your micro on return, and you can find out how far you've run, how many calories you've lost along the way and how long you've been gone. They may be smart shoes but it sounds like a dumb move to us.

**Walking back to happiness:** the highest figure we've heard for company cars that have had to be turned in or toned down at Acorn is 40. But there's no truth in suggestions that some executives have replaced their upmarket models with lower-slung C5s.

**Who'll mind the minder?:** someone at DK'Tronics needs to be kept away from the company's headed notepaper. We received a 'news release' explaining how the managing director punched a man he thought was having an affair with his wife, accompanied by local newspaper reports that he was going to 'sell up the business and move back to Great Yarmouth' — life, we assume, being better all round in Great Yarmouth. Not true, says DK'Tronics, at least as far as the move goes. All this from the company that brought you Minder as a software spin-off to the TV series. Dive for cover if it releases a version of Apocalypse.

**Muddier:** the game you've always wanted to play but have never been able to log on to, MUD, has been adopted by British Telecom. Due to be unveiled at the September *PCW* Show, this expanded version will initially be available on a London-based Vax system handling up to 100 players. A pack to get you going will cost £20 — the good news is that the pack includes your first few hours on MUD, so the fact that you're likely to die quickly at first shouldn't be too offputting. The bad news is that it will be twice as big as Essex University's original version - all the more room to kill you in.

**Technically speaking:** always keen to keep abreast of modern technology, we're pleased to pass on news of a parallel-processing machine called the Butterfly. If it takes off it'll need to corner the market for 68000 chips — there's 128 of them inside each machine. And who will get to use all that processing power? You guessed — the military.

**Losing friends and influencing people:** IBM's announcement in the States of bundled PC software went down like the proverbial lead ballon. There were even rumbles that it might well be anti-competitive under American law. Ah well, at least that would make the lawyers happy - but no-one else.

**SOB:** 'You'll have to convince me that the voracious little son of a bitch won't eat my copy', says an American TV newsman cautious about micros. We know the feeling — feeding time in this office sometimes seems to come round about the same time our deadlines do.

**Brain drain:** Tatung's new TCS-6000, a multi-user 16-bit machine from the company which brought you (well, some of you) the Einstein, comes with a promise: it guarantees to 'catapult your office productivity and efficiency to a dazzling new height'. If that doesn't sound painful enough, try this Lightning repartee from the distributor of the same name: 'Looking at the Einstein, it's obvious that Albert would have approved of his namesake — it would have made working out his theories relatively easier. . . END




***There is a future for the C5 after all — as a gimmick for promoting rival manufacturers' products. A Hampshire-based ACT dealer called ADACS is behind this scheme which involves giving away C5s with Apricot Xis. The catch is that the lucky purchasers have to keep the Apricot advertisements on their new vehicles for at least three months, so if you're down in the New Forest and see a C5 covered in Apricot stickers heading towards you, you'll know who to blame.***

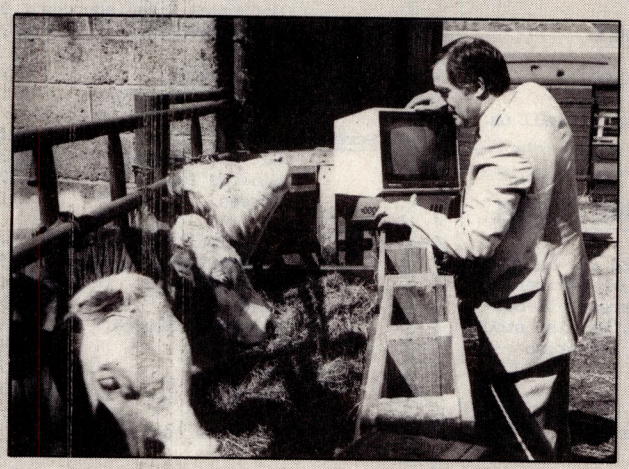

***We know that vertical marketing (that is, packaging systems for specific types of users) is all the rage, but the farming market is already beginning to get a bit crowded, judging by the number of photographs we receive of cows muzzling up to micros.***

***Shown here is the latest to arrive on our desks courtesy of Quanta Learning Systems, which is producing the training manual for a farmers' information service. Quanta's caption points to the advantages of getting 'hooves-on experience. . . down on the farm'. Can you do better? Send your suggestions on the back of a postcard to ChipChat, PCW, 32-34 Broadwick Street, London W1A 2HG, to reach us by the end of July.***

***Make sure you include your name and address as well in case you win the £10 prize, which goes to Peter Day of Camberley for his April entry. That photograph featured Sir Clive introducing Lord Stockton to the delights of the Spectrum. Peter's suggestion had the noble Lord asking: 'These keys are too fiddly for my aged fingers — why don't you produce a mouse for it?' Sir Clive's response was 'But I do — the C5'.***

***Bohdan Buciak of Hackney came in a close second with Sir Clive explaining: 'We're going to sell a lot of these in Russia', to which Lord Stockton enquires: 'Is that why there's no ESCAPE key?'***

# Affordable and reliable printers from Micro P give you more Quality CPS for your money




Even in today's high tech world, for most of us, the written word is still the least expensive means of sending and receiving information. If you own a microcomputer the chances are that sooner or later you are probably going to need a printer in order to get into print.

**Micro P – CPP40**

A low cost 4 colour 40/80 column printer/plotter capable of printing text or graphics on plain paper. The CCP40 is an ideal companion for small and portable micro's, as it is fitted with re-chargeable batteries – perfect for beginners.

**Micro P – CPA80**

With 100 cps quality printing, the CPA80 probably gives more cps/£ than any other printer available today. The CPA80 is packed with features you would normally find on a more expensive printer. With an optional RS232 version available (even for the QL) this Epson compatible printer will hook up to almost any micro.

Buy from your local dealer today!

**Micro P – MP165**

Looking for a matrix printer as well as a daisywheel? Well, the MP165 combines all the attributes of these two technologies to give a matrix printer capable of printing at up to 165 cps, as well as providing crisp Near Letter Quality, (NLQ) print at 75 cps. Features include a 2k buffer as well as both friction and tractor feed, as standard. Ideally suited to most popular micro's, the MP165 is now available in a new RS232 QL compatible version.

**Micro Peripherals ltd**

"PRINTERS FOR ALL APPLICATIONS"

INTEC UNIT 3, HASSOCKS WOOD, WADE ROAD,
BASINGSTOKE, HANTS. ENGLAND, RG24 0NE.
Telephone: BASINGSTOKE (0256) 473232 (32 lines).
Telex: 859669 MICROP G Facsimile: 0256 461570

*Full 12 months warranty - RRP ex. VAT. QL is a registered Trade Mark of Sinclair Research.

# Macintosh™ and all that Jazz!

At our Macintosh Centre, you'll be surprised how quickly you can play solo on Apple's Macintosh — even if it's the first computer you've ever laid hands on.

Now you can try JAZZ too — the brilliant new business software from Lotus that's designed **specially** for the Macintosh, and makes full use of all its easy-to-use features.

JAZZ lines up five business essentials: word processing, graphics, spreadsheet, database and communications — yet even a complete novice can be playing a wide repertoire in just a couple of hours.

In the heart of the City, The Macintosh Centre has a full range of business computers and software, plus our professionals on hand for advice. Whether your business is trad or modern, you'll applaud the total support services you get from the Personal Computers Macintosh Centre . . . consultancy . . . expert training . . . qualified engineering . . . plus an in-depth understanding of the business software you need.

As one of the largest and longest established microcomputer dealers in the UK, we have a history of successful performances with the City's leading firms.

Try a few of your favourite numbers with JAZZ at our Macintosh Centre: with backing from Personal Computers, you won't have to sing the blues.




**Personal Computers Ltd.**

218 & 220/226 Bishopsgate, London EC2M 4JS
Telephone 01-377 1200

# The Macintosh Centre

218 Bishopsgate, London EC2M 4JS. Telephone 01-377 2060