Practical Computing

£99.95 ORIC 1 REVIEWED

80p April 1983 Volume 6 Issue 4



Special report - top 10 languages

Beginners' guide to Spectrum machine code

BBC word processor - on a chip

REVIEWS: new Apple IIe and Olivetti M-20



Cromemco System One

MicroCentre introduce Cromemco's new System One computer, available with an integral 5 megabyte Winchester hard disk, at a new low price.

The System One supports the full range of Cromemco interface cards, including high resolution colour graphics, and software packages. The choice of operating systems includes CDOS, CP/M and CROMIX—Cromemco's answer to Unix.

Call MicroCentre for Cromemco

MicroCentre Ltd
(Complete Micro Systems)

• Circle No. 101

Britain's independent Cromemco importer

30 Dundas Street
Edinburgh EH3 6JN
Tel: 031-556 7354

>LIST

PRACTICAL COMPUTING APRIL 19

BEROL 'Floppy' PEN WORTH 45p

>NEWS

21 NEW PRODUCTS
New micros, more new micros, and a £30 robot arm shown at a recent toy fair.

23 IBM PC NEWS
More software, more add-ons, and now an Arabic version of the leading 16-bit microcomputer.

35 PRINTOUT EXTRA—HP MEETS THE PEOPLE
A new 16-bit micro, new integrated software, and a new attitude from Hewlett-Packard.

>REVIEWS


77 OLIVETTI M-20 BUSINESS MACHINE
Some £450,000-worth of TV advertising suggests Olivetti is serious, but is the M-20 a sound choice for you?

84 ORIC 1 HOME MICRO
Bill Bennett takes a look at the £99.95 home colour micro.

86 CIFER SERIES 1 BUSINESS MICRO
Chris Bidmead reviews a high-class British-made micro.

89 APPLE IIe
Not so much a retread, more a case of the "Apple II meets new technology". Roger Cullis investigates.

* **95 BBC WORD PROCESSOR ON A CHIP**
John Harris tests Acornsoft's View, which could be the answer to your word-processing problems.



146 FLIGHTS OF FANCY
Flight simulators for the Specturm, Atari and IBM micros, a superb Defender, and The Hobbit for the Spectrum.

181 BOOKS — SPECTRUM MACHINE CODE
Bill Bennett checks out some of the books for would-be machine-code programmers.

>LANGUAGES

* **107 AN INTRODUCTION TO LANGUAGES**
In a special 22-page section, we look at the 10 most common or most important languages for microcomputers.

APL by Adrian Smith
BASIC by Chris Bidmead
C by Mike Lewis
COBOL by Alistair Jacks
FORTH by Gil Filbey
LISP by Mike Gardner
LOGO by Christopher Roper
PASCAL by Boris Allan
PROLOG by Jon Young and Jenny Lam
SMALLTALK by Christopher Roper

124 BUYERS' GUIDE TO LANGUAGES
A listing of some of the languages available for the more popular brands of microcomputer.

126 BASIC LANGUAGE RESERVED WORDS
A table of reserved words reveals how different implementations of Basic vary

>FEATURES

98 MACHINE CODE PROGRAMMING
Robert Simson and Trevor Terrell explain how to converse with the Spectrum's Z-80A.





102 SMALL CLAIMS
When William Green was sold a faulty micro he demanded his money back. The supplier refused, so he took him to court.



132 FICTION — GAME WITHOUT RULES
How Britan lost the next war but one.

* **136 PROGRAMMING KNOW YOUR SORT 2**
Andrew Featherstone completes his description of sorting methods, and how to optimise them with an account of the shell sort.

141 PROGRAMMING KALMAN FILTERS
Recursive Kalman filtering is a way of smoothing out a noisy signal. Bill Hill explains how to implement this useful technique on a micro.

>REGULARS


5 EDITORIAL
Can comunication survive the proliferation of languages and different kinds of Basic?

7 FEEDBACK YOUR LETTERS
Opinions, corrections and admonitions.

* **31 RANDOM ACCESS**
Boris Allan goes back to the Middle Ages to separate seeing and believing from lies, damned lies and statistics.

37 CHIP CHAT
In this new monthly column, Ray Coles takes a close-up look at microprocessors.

151 OPEN FILE 165
More programs for Commodore, BBC, Apple, Research machines, Tandy and other popular micros.

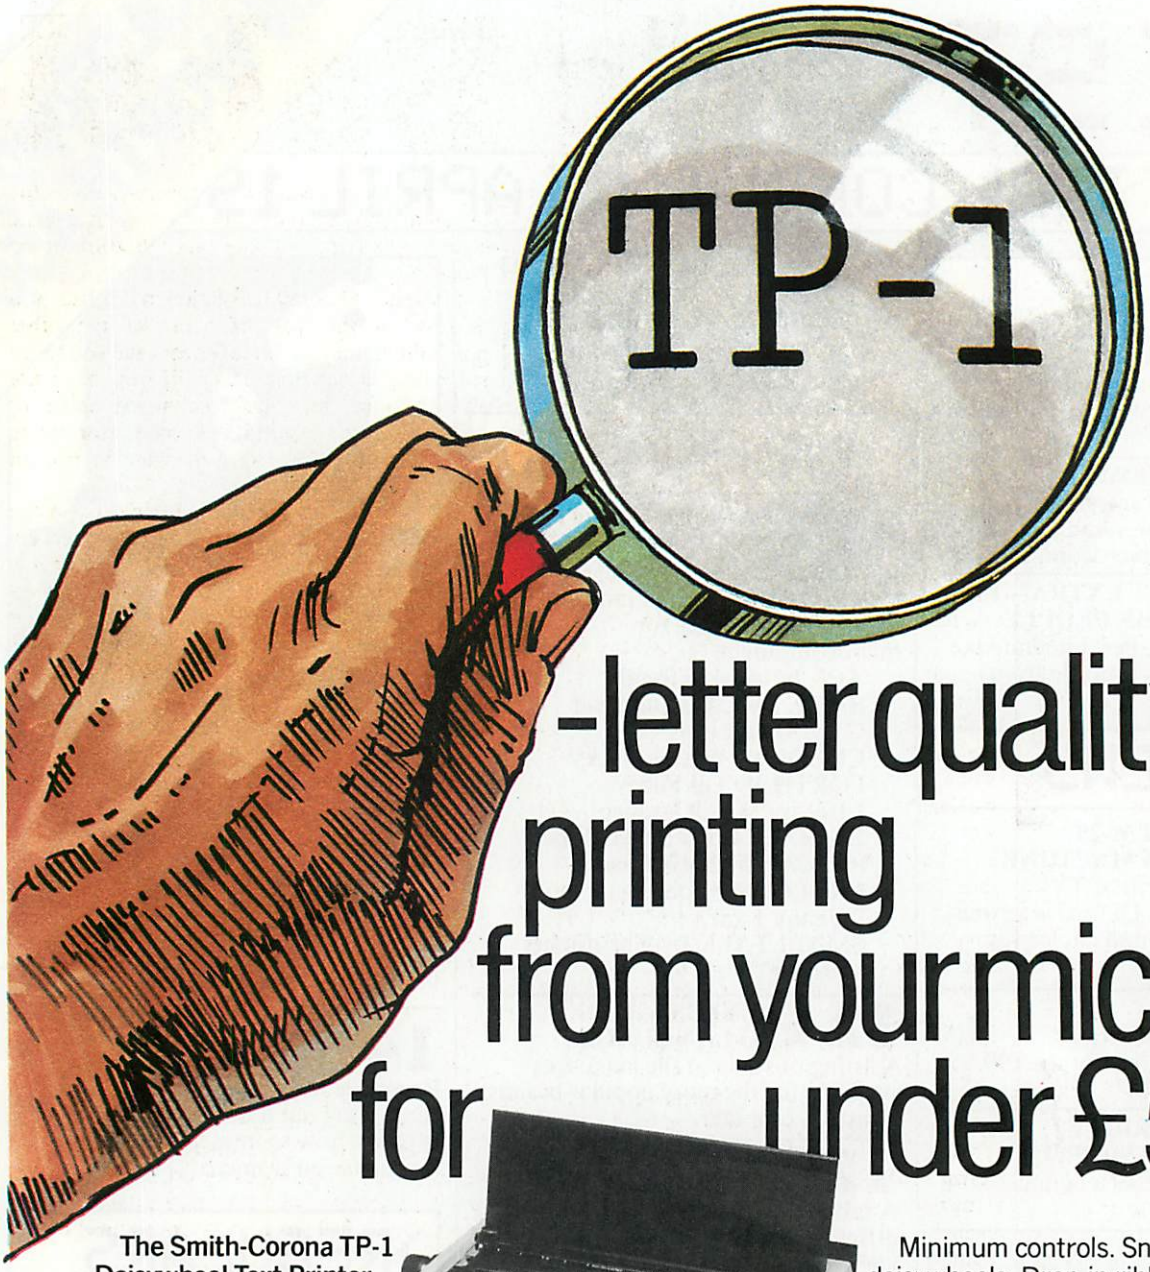


-letter quality printing from your micro for under £500

The Smith-Corona TP-1 Daisywheel Text Printer.

Fully formed executive quality printout. Letters of real character. For the price of a matrix printer.

The TP-1 costs just £485, plus VAT. Interfaces with all popular microcomputers (Serial, Parallel and IEEE).
Can be used with word processors or small business systems.

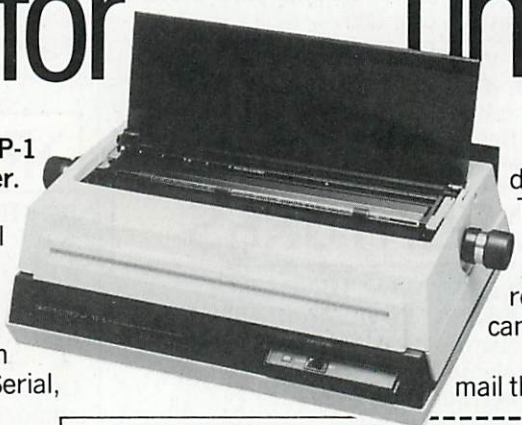

Minimum controls. Snap-on daisywheels. Drop-in ribbon cassettes. The TP-1 is as easy to use as it is readily affordable.

Now letters, documents, forms, reports, price lists and data sheets — all can be printed with the image you deserve.

For instant information, complete and mail the coupon.

Butel-Comco Limited
Garrick Industrial Centre,
Garrick Road,
London NW9 6AQ.
Telephone: 01-202 0262/2277
Telex: 47523

BUTEL
Technology for business

To: Butel-Comco Ltd., Garrick Industrial Centre, Garrick Road, London NW9 6AQ.

Yes, send details of the TP-1.

Name _____

Company/Occupation _____

Address _____

_____ Tel. _____

Computer details:

Make _____ Model _____ Interface _____

Software application _____

A Butel Technology Company · Consultancy · Software · Turnkey Systems · Microcomputers · Communications and Terminal Equipment

● Circle No. 102

Practical Computing

EDITORIAL 01-661 3609
Editor
Jack Schofield
Deputy Editor
Bill Bennett
Assistant Editor
Ian Stobie
Art Editor
Steve Miller
Production Editor
John Liebmann
Sub-editor
Sally Clark
Editorial Secretary
Julie Milligan
Consultants
Chris Bidmead
Peter Laurie
ADVERTISING 01-661 3612
Advertisement Manager
Ian Carter 01-661 3021
Assistant Advertisement Manager
Kenneth Walford 01-661 3139
Advertisement Executives
Fiona Howell 01-661 3468
Robert Payne 01-661 8425
Advertisement Secretary
Janet Thorpe
Midlands office:
David Harvett 021-356 4838
Northern office:
Geoff Aikin 061-872 8861
PUBLISHING DIRECTOR
Chris Hipwell

Published by Electrical Electronic Press, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Tel: 01-661 3500. Telex/grams 892084 BIP-RESG.

Typeset by Centrepoint Typesetters London EC1 and printed by Eden Fisher (Southend) Ltd, Southend-on-Sea.

Distributed by Business Press International Ltd, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Subscriptions: U.K. £12 per annum; Overseas £18 per annum; selling price in Eire subject to currency exchange fluctuations and VAT; airmail rates available on application to Subscription Manager, Business Press Ltd, Oakfield House, Perrymouth Road, Haywards Heath, Sussex RH16 3DH. Tel: 0444 459188.

© Business Press International Ltd 1983.
ISSN 0141-5433.

Would-be authors are welcome to send articles to the Editor but *PC* cannot undertake to return them. Payment is at £30 per published page. Submissions should be typed or computer-printed across a 40-character width, and include a tape or disc of the program. Handwritten material is liable to delay and error.
Every effort is made to check articles and listings but *PC* cannot guarantee that programs will run and can accept no responsibility for any errors.

Basic Babel

LANGUAGES are a problem. To begin with there are those broad categories of computer users who all seem to use different languages for their particular interests. To use the crudest generalisation, the business software writers are writing Cobol, the scientists are using Fortran, the educationalists are using Pascal and the hobbyists are using Basic. Contact between the groups only occasionally degenerates to the "Basic programming causes brain damage" level, but rarely rises above open indifference. This is unfortunate, because surely the knowledge of another language must illuminate one's own.

In the personal computer field covered by *Practical Computing,* Basic has become the *lingua franca,* but even here there are problems. Like Britain and America in the famous quotation, Basic users are separated by the barrier of a common language.

The American National Standards Institute has a committee working on a standard Basic and while this is laudable enough, the practical value will be limited. Even if every micro manufacturer were to embrace ANSI Basic there would still be large amounts of machine-specific coding in most worthwhile programs. Most personal computers seem to do their best tricks in response to obscure Pokes and Calls — and the cheaper the micro, the more this seems to be the case.

The result is that Basic programs written for one machine become unreadable to many of those people who own and use another.

Unfortunately few beginners will even bother to read an article which features, say, a Pet program if they happen to own, say, a Spectrum. This is unfortunate for them, as they might well learn something useful from the structure of the program and the algorithms used. They might even see how they could rapidly translate it for their own machine. But unfortunately for us, they may turn instead to a magazine that concentrates on their machine exclusively.

This raises the horrifying prospect of 350 different microcomputer magazines catering for the obscure preferences of the owners of the different brands, and no one talking to anyone else. In sum, the collapse of civilisation as we know it.

The special Languages section in this issue will at least inform you of some of the other possibilities and, we hope, encourage you to try something other than Basic, if you have not already done so. The comparison table of different Basics should help with translating programs written for one machine to run on another.

Another possibility is being explored in the Netherlands with NOS-Basicode. Specially written programs, supplied on tape, allow a number of different micros to use programs written in Basicode. Naturally these programs have to be written to somewhat rigorous specifications. But nonetheless, micros covered by the scheme now include the Acorn Atom, Apple, DAI, Pet, Exidy Sorcerer, TRS-80, Ohio Superboard and Philips P-2000.

Because of different graphics capabilities, Basicode only really works with text-based programs, not games. The main advantage of the system is that the original Basicode listing has to be written so simply and logically that just about everyone should be able to read it. Individual users are then left to put back all those "extended" Basic words that Basicode leaves out, and to dress up the display to suit the capabilities of their own micro.

As the power of microcomputers continues to increase, perhaps one day most models will be able to emulate, or imitate, the functions of several others. Until this bright day dawns, we will all have to revert to a form of pidgin-Basic, or else start learning and using other languages to the extent that we can understand what's happening, instead of just pushing buttons marked Goto.

Basicode is sponsored by NOS radio and Radio Netherlands. Enquiries to Hans G Janssen, Hobbyscoop, PO Box 1200, 1200 BE Hilversum, The Netherlands.

5 Years ago...

At present the U.K. boasts something like six companies making home and small business computers based on microprocessors, my own company being one of them.

The Government is considering investing £50 million in a product which has not yet been designed (the 64K RAM) to be made in a factory which has not yet been built. Foreign manufacturers are already beginning to produce prototypes to be made by experienced personnel in existing factories.

Why not invest some of that £50 million in an attempt to stimulate a home market by reducing the prices of the end products? There are several U.K. companies capable of designing better microcomputers than the Americans and with the world-famous U.K. software in them.

As an example we considered buying an American microprocessor development system for £365; in fact we designed our own with improved hardware, better interface facilities and much-improved software. It sells for £155, less than half of the American equivalent. A fall in component prices of about 25 percent helped but, even so, we could have done it for about half the cost of any equivalent American design.

Apply this philosophy to our $2,000 product and it would end up at about £700, and a simple home computer such as those currently selling at £500-£700, could be built for £350-£400.

John H Miller-Kirkpatrick,
Technical Director, Bywood Electronics.
Practical Computing Volume 1 Issue 2


MICRO COMPUTER CLUB

Dedicated to keeping down the cost of computing

FREE Membership to Micro Computer Club when you buy SUPERBRAIN Entitles you to other special offers

Only by direct mail order can we offer these prices

Hardware




SUPERBRAIN™
INTERTEC DATA SYSTEMS

Junior 320 DISK CAPACITY ... **£1406**


SD 1.5MB DISK CAPACITY... **£1744**

QD 720K DISK CAPACITY.... **£2081**
(Carriage £25)

Exchange rate at $1.6



MICROLINE 83A PRINTER **£450**
(Carriage £10)



HARD DISK SUB SYSTEM
for
Osborne IBM PC Superbrain

5MB **£1163**
10MB **£1305**
(Carriage £10)

MICROSOFT Basic **£175**	**MICROSOFT** Basic Compiler **£202**	**MICROSOFT** Fortran **£225**	**MICROSOFT** Cobol **£330**
MICROSOFT Multiplan **£150**	**SORCIM** Supercalc **£135**	**MICRO PRO** Wordstar vers. 3.0 **£210**	**MICRO PRO** Mailmerge **£70**
MICRO PRO Datastar **£155**	**MICRO PRO** Calcstar **£105**	**ORGANIC SOFTWARE** Milestone **£170**	**ASHTON TATE** dBASE II **£345**

NB Superbrain & 8in. IBM formats only at present

NEW **BBC Micro Floppy Drive**

£185
(Carriage £10)
Requires Acorn Floppy drive card

3 MONTH Return to Works Warranty

MAINTENANCE

JUNIOR	£375 pa
QD	£415 pa
SD	£440 pa
MICROLINE 83A PRINTER	£150 pa

- On site maintenance available from day one.
- Nationwide contracts through Software Sciences — a member of THORN EMI group.
- Software Sciences will inspect, deliver and maintain your SUPERBRAIN.
- The 24 hour call-out basis.

To: The Micro Computer Club PO Box 66 Croydon CR9 4QB Tel: 01 689 2080
Please accept my order and enrol me as a member of the Micro Computer Club.

All prices are based on exchange rate at time of going to press and may be subject to change. All orders must be accompanied by a cheque for the sum due. This will not be banked until four days before despatch.

ITEM	QNTY	UNIT PRICE £ p	TOTAL £ p

Name ..... TOTAL

Address ..... CARRIAGE

..... VAT at current rate

Post Code ..... CHEQUE TOTAL

All machines sold to UK specification with full manufacturers warranty

● **Circle No. 103** CREDIT CARD NUMBER

Membership of the Micro Computer Club entitles members to other special offers.

British micro business

I AM IN THE MICROCOMPUTER BUSINESS buying and selling hardware and software. The British market is an interesting one as a lot of inventions and developments are made in Britain. But one thing worries me: communications and reliability are not of the same high level as the products.

What I mean is, the mail service is slow, slow, slow. When I write a letter it takes at least three weeks to receive an answer. Could it be that letters are not answered though they are already in the office? Are there not enough people who would be happy to be employed?

Even a three-week wait might be acceptable if the answer ever arrived! But it has often happened to me that enquiries are not answered at all. Is business going so well? Too well? Others have promised to send goods, and then nothing arrives. I have been waiting for some items for more than one year.

Perhaps I should not trade with Britain at all. Yet I am still convinced that good products can be made in the EEC and need not come from the Far East. Britain is renowned for its top-class electronics. British companies producing for the lower end of the market should jump at the opportunities open to them in Germany.

Joachim Müller,
Müller Mikrocomputer Mainz,
Postfach 42 10 12,
6500 Mainz 42,
West Germany.

● **It is probably no consolation to Herr Müller to know that enquiries from U.K. users get exactly the same treatment.**

Grid compass

YOUR ARTICLE on portables in the January issue stated that the Grid Systems Compass Computer "was designed by U.K.-based Moggridge Associates" and gave the prices "just over £8,000" which is rather misleading. This computer was designed at our California office ID Two, and is only being marketed in the U.S. at present. The price is around $8,000 — dollars not pounds!

Rosamary Lees
Moggridge Associates,
London NW5

Help with writing

I HOPE one of your readers will be able to help with advice, references, etc. Our youngest daughter is nearly seven and suffers from some brain damage. She is able to recognise letters and read simple words but her writing is held up by her inability to use a pen.

Microcomputers have been put forward as an answer, and she has shown that she enjoys using the keyboard on the Speak'n'Spell. We have a 48K Spectrum at home and I have access to the ITT version of the Apple with disc drives, including DOS 3.3. I would be grateful to hear from anybody who has experienced these difficulties.

Dr K B J Beswick,
Lime Tree House,
High Street,
Harwell,
Oxfordshire.

Microwriter

I WAS VERY SURPRISED to see no mention of the Microwriter in the review of word processing in the February issue, even though you had a special section on unusual keyboards. As an enthusiastic user of the Microwriter I can tell you that the six-key layout of the machine is by far the easiest to use of all the keyboards and will of course communicate with any computer which has an RS-232 interface.

Using a computer would be a great deal easier if other manufacturers could be persuaded to adopt the same layout. May I suggest you do a feature on the Microwriter, which is a unique pocket-sized fully portable word processor. Once you have one it is difficult to imagine working without it. One of these days I shall get around to transmitting my copy to the printer direct into setting over the telephone.

Peter Dean,
Brussels,
Belgium.

● **Like the product, don't like the price.**

A4 stationery

FOR SOME TIME I have been trying to source a supply of A4 continuous stationery for my word-processing requirements. It was with great interest therefore that I read the comments in your December news entitled "Letter Stationery", which clearly states that Moore Paragon supplies neat A4-size Kleen Edge sheets of paper.

Upon examination and indeed discussion with Moore Paragon, it transpires that it is not A4 but 11in. or 12in. stationery. This is therefore quite clearly a misinterpretation of the facts and I would ask you to take Moore Paragon to task for misleading your readers in this manner.

I would be grateful if you could advise whether the internationally accepted A4 standard could be obtained in continuous preprinted form.

Garrick S Wales,
Stewart Wales Somerville Ltd.,
East Kilbride,
Glasgow.

● **Apologies for our mistake. Moore-Paragon said the paper was A4 *compatible*, which is not the same thing. Does no one supply A4 paper?**

Dragon Pokes

DRAGON OWNERS may be interested in a simple way to overcome the automatic scroll on the computer. It is done by Poking the screen addresses instead of using the Print @ command. The addresses are:

Start — 1024
Finish — 1535

For example, Poke 1024,255 is the same as

PRINT @ 0,CHR£(255)

Using Poke instead of Print also allows inverse spaces as well as inverse characters such as inverse £ @ & ' " / etc., which are not available by using the Shift-0 combination. The program displays all the characters when using Poke. It is useful when using the block graphics from ASCII code to draw mazes, etc.

Dragon Pokes.

```
10 CLS
20 X=1024
30 FOR P=0 TO 255
40 POKE X,P
50 X=X+1 : IF X=1536 THEN
   70
60 NEXT P
70 GOTO 70
```

David West,
Taplow,
Berkshire.

More jargon

AFTER Chris Naylor's A-Z of computing terms in the March issue, here are some further definitions:

Algorhythm Fashionable dance from a planet of the star Algol.
Assembler One who puts together a computer kit.
Burn-in The result of dropping cigarette ends or a hot soldering iron on the computer.
Control-bus Transport for traffic wardens.
Card-reader Fortune teller.
Character buffer Bribe money.
Checksum Total amount paid for a computer.
Chip Light snack during programming.
Cross assembler 1. Manufacturer of souvenirs for places of pilgrimage. 2. Angry citizen of Dundee putting together a computer.
Exor First part of a psycho-thriller film.
Firmware Clothing worn by business people.
Floating point Optical disturbance resulting from extended periods of staring into a monitor.
Garbage collection routine Removal of scraps of paper, notes etc., from the desk after a long programming session.
Handshaking State of someone sitting at a computer for the first time.
Hidden refresh Secret drinking.
Indexed addressing Pointing the direction for someone asking

(continued on page 8)

Our Feedback columns offer readers the opportunity of bringing their computing experience and problems to the attention of others, as well as to seek our advice or to make suggestions, which we are always happy to receive. Make sure you use Feedback — it is your chance to keep in touch.

(continued from previous page)

the way.

Indirect addressing Writing to a box number.

Interface The place in which the solution of a problem often stares.

Interrupt routine Annoying habit of children/adults when adults/children are discussing computers.

Memory refresh A souvenir of Benidorm.

Nesting Activity of a newlywed programmer.

Packing density Standard measure of the volume of a suitcase.

Refresh logic Argument of a drinker.

Timesharing When two people own one watch between them.

Write enable To give someone pen and paper.

Dave Kurth and Ronald Baumgartner, Busswil, Switzerland.

Software please

WE RECENTLY PURCHASED a Newbrain Model A and have found it to be a very powerful micro. But like all Newbrain owners we are disappointed that no magazine has even given the Newbrain a second look. I know unless you expand it there is not enough memory for much, but could you publish a small program or tell us of any software available?

Richard Nash, Petts Wood, Kent.

● **We like the Newbrain and we are keen to support it. Some programs from readers will appear next month, but more would be welcome.**

Endless tapes

A COMMON COMPLAINT against the use of cassettes for data storage is the need to rewind if previous files or programs are to be reloaded. It is not possible to do this automatically with standard cassette recorders.

A means of overcoming this drawback is provided by the use of an endless cassette, such as the TDK EC3 cassette. The tapes are short, six minutes maximum, making them ideal for use with computers.

There are, of course, snags. The tapes cannot be rewound or run fast forward and they are expensive compared with standard E15 cassettes. These difficulties are offset by the ability to manipulate the cassette solely by software, since the tapes move forward only.

Because of the different operating systems used on micros it is only possible to generalise on the applications of these tapes. However, with proper program organisation it should be possible to develop an efficient file system on tape.

The tapes come into their own for management of databases. I am at present still experimenting with these tapes, but they have already proved invaluable in the manipulation of data and for record purposes. No doubt readers will be able to think up other suitable applications.

M J Bedford, Bradford, West Yorkshire.

Left in the lurch

I DO NOT BELIEVE that the computer industry will ever be taken seriously by the business world if it cannot provide an efficient repair service. I have been waiting over six weeks for my Pet 2001, which is essential for the efficient running of my farming business, to be repaired by one of Commodore's nationwide dealers. The dealer is still waiting for parts.

It seems to me that dealers are more interested in the big profits to be made from selling computer systems than actually providing what the customer wants, and that is a good back-up service. It is interesting to note that of the 18 Commodore dealers listed in your magazine in March 1979 only nine were still in business by October 1982.

Surely Commodore should vet its dealers more thoroughly in order to protect the customer and its own good name; otherwise, being an authorised dealer means nothing.

R H Pring, Crewkerne, Somerset.

● **Since we received Mr Pring's letter the matter was finally resolved through a local Commodore dealer.**

Plea for service

AS AN OWNER of a BBC Micro I must condemn Acorn for a lack of understanding to its customers and would-be customers, for not supplying sufficient telephone answering facilities. To get through to Acorn requires the patience of Job, unlimited time and an understanding boss or family when hogging the telephone. I must have been trying since early December, in order to sort out a problem with my micro, but to no avail.

It does not make sense: with over 3,000,000 out of work more people could be employed to answer customers' queries. If nothing is done, before long the BBC Micro will go the way of other British products and be replaced by competitors from Japan or America.

M C Krockel, Aberdeen.

Gödel and AI

IN THE FEBRUARY issue Boris Allan suggests that Gödel's theorem rules out the possibility of artificial intelligence. I would accept Allan's main thesis that AI is still a long way off, but not his use of Gödel's theorem.

What Gödel showed was that any mathematical system complex enough to include self-reference could not be fully consistent. As stated it applies to mathematical systems: it is an inductive leap to apply it to microelectronic structures. However, if that is taken for granted, all that Gödel's theorem suggests is that if machines become intelligent they can not be fully self-consistent, that is, they must become far more than glorified calculators following rigid functions. That seems to me to be hardly more than a truism.

Gödel's theorem is a masterpiece of formal logic and is of major importance in the fields of mathematics and metamathematics. However, trying to apply it outside its context is beset with pitfalls. One thinks of attempts to support ideas of free will by using Heisenberg's uncertainty principle — which properly only applies to elementary particles. Ironically, it is just this sort of unbridled extrapolation that Allan is arguing is inappropriate when applied to ideas about AI.

J de B Clarkson, Pratts Bottom, Kent.

BORIS ALLAN seems to have let a fallacy creep into his thoughts on AI. He states that Gödel's theorem implies that a machine cannot think about itself and that therefore a machine cannot be truly intelligent. Besides the rather obvious difficulty of saying what true intelligence is — perhaps just "something that most humans have" — the theorem applies equally to human beings.

Of course I can think about myself. I can even imagine of all the synapses clicking away in my

(continued on page 13)



When it's time to stop playing games and get down to business...

Unfortunately, many of today's desk top computers are designed with too much emphasis on home use. That's fine, if you want to balance your checkbook, play "space war" or draw pictures. But when you have serious business requirements for a computer, you want one designed specifically for business.

The RAIR Business Computer is just that. A computer designed specifically for business applications, incorporating a host of features—optimised for the business environment. 8- and 16-bit microprocessors allow users to run available 8-bit—plus newer 16-bit—applications software simultaneously. And an integral high-capacity Winchester disk drive—plus provision for additional hard disk support—provides sufficient on-line storage for virtually any business application.

Advanced communications software allows the RAIR Business Computer to connect to mainframe systems and networks. And expanded RAM memory supports simultaneous access from up to four user workstations, each including an ergonomically designed, detached keyboard, high-resolution colour display, and optional workstation printer.

So if you're serious about a computer for business, call RAIR for details about our Business Computer. We're not playing games.

RAIR Limited
6-9 Upper St. Martins Lane
London WC2H 9EQ
Phone (01) 836 6921, Telex 298452

● **Circle No. 104**

SYSTEM SPECIFICATION

Microprocessors: Concurrent 16-bit 8088 plus 8-bit 8085
RAM Memory: 256 kbytes expandable to 1024 kbytes
Integral Disk Storage: 19-Mbyte Winchester drive plus 1-Mbyte floppy drive
Storage Options: Up to 4 add-on Winchester drives plus streaming tape backup
Communications: 4 workstation ports (RS-422-compatible), plus 2 synchronous/asynchronous programmable RS-232 ports

WORKSTATIONS (up to 4)

Keyboard: Ergonomic, low-profile, 83 keys, 10 programmable function keys, 10-key numeric keypad (with cursor/editing functions)
Color Display: High-resolution, 80 characters x 25 lines, upper and lower case, 8 programmable foreground/background colors
Printer: Bidirectional, 80 characters-per-second, friction and tractor feed

SOFTWARE

Operating System: User-friendly, multi-tasking, CP/M, MP/M, PC-DOS compatible
Languages: BASIC, COBOL, Pascal
Applications: Spreadsheet, Database, Text Processing Communications

CP/M and MP/M are trademarks of Digital Research
PC-DOS is a trademark of IBM

the RAIR Business Computer.



CONCURRENT CP/M™

Multiplies the power of your microcomputer.

If you have to wait impatiently for your personal computer to finish a job before moving on to another task, you need Concurrent CP/M. This new software technology from Digital Research increases the productivity of your micro-computer by allowing you to do more than one thing at a time.

Using Concurrent CP/M, you can run several programs simultaneously, switching instantly from one program to another. For the first time you can write a letter while you do your financial planning. For the first time you can write text while printing other documents. For the first time you can edit programs while your program compiles. Concurrent CP/M is the best investment you can make in micro-computing because it multiplies the value of your hardware and lets you use all the CP/M compatible programs. And if you're developing software, it ensures that you're on the crest of the hottest new wave in the business.

There's nothing like Concurrent CP/M in the personal computer world, and you can get it only from Digital Research.

For more information, contact:
Digital Research (UK) Limited
Oxford House
Oxford Street
Newbury
Berkshire
RG13 1JB
Telephone: 0635 35304

DIGITAL RESEARCH™
The creators of CP/M™



UK Distributors

Tamsys Limited
Tel: Windsor 56747

The Software Connection Limited
Tel: Fareham 239025

Xitan Systems Limited
Tel: Southampton 334711

The logo, tagline and names of DRI products are either trademarks or registered trademarks of Digital Research Inc.

British micro business

I AM IN THE MICROCOMPUTER BUSINESS buying and selling hardware and software. The British market is an interesting one as a lot of inventions and developments are made in Britain. But one thing worries me: communications and reliability are not of the same high level as the products.

What I mean is, the mail service is slow, slow, slow. When I write a letter it takes at least three weeks to receive an answer. Could it be that letters are not answered though they are already in the office? Are there not enough people who would be happy to be employed?

Even a three-week wait might be acceptable if the answer ever arrived! But it has often happened to me that enquiries are not answered at all. Is business going so well? Too well? Others have promised to send goods, and then nothing arrives. I have been waiting for some items for more than one year.

Perhaps I should not trade with Britain at all. Yet I am still convinced that good products can be made in the EEC and need not come from the Far East. Britain is renowned for its top-class electronics. British companies producing for the lower end of the market should jump at the opportunities open to them in Germany.

Joachim Müller,
Müller Mikrocomputer Mainz,
Postfach 42 10 12,
6500 Mainz 42,
West Germany.

● It is probably no consolation to Herr Müller to know that enquiries from U.K. users get exactly the same treatment.

Grid compass

YOUR ARTICLE on portables in the January issue stated that the Grid Systems Compass Computer "was designed by U.K.-based Moggridge Associates" and gave the prices "just over £8,000" which is rather misleading. This computer was designed at our California office ID Two, and is only being marketed in the U.S. at present. The price is around $8,000 — dollars not pounds!

Rosamary Lees
Moggridge Associates,
London NW5

Help with writing

I HOPE one of your readers will be able to help with advice, references, etc. Our youngest daughter is nearly seven and suffers from some brain damage. She is able to recognise letters and read simple words but her writing is held up by her inability to use a pen.

Microcomputers have been put forward as an answer, and she has shown that she enjoys using the keyboard on the Speak'n'Spell. We have a 48K Spectrum at home and I have access to the ITT version of the Apple with disc drives, including DOS 3.3. I would be grateful to hear from anybody who has experienced these difficulties.

Dr K B J Beswick,
Lime Tree House,
High Street,
Harwell,
Oxfordshire.

Microwriter

I WAS VERY SURPRISED to see no mention of the Microwriter in the review of word processing in the February issue, even though you had a special section on unusual keyboards. As an enthusiastic user of the Microwriter I can tell you that the six-key layout of the machine is by far the easiest to use of all the keyboards and will of course communicate with any computer which has an RS-232 interface.

Using a computer would be a great deal easier if other manufacturers could be persuaded to adopt the same layout. May I suggest you do a feature on the Microwriter, which is a unique pocket-sized fully portable word processor. Once you have one it is difficult to imagine working without it. One of these days I shall get around to transmitting my copy to the printer direct into setting over the telephone.

Peter Dean,
Brussels,
Belgium.

● Like the product, don't like the price.

A4 stationery

FOR SOME TIME I have been trying to source a supply of A4 continuous stationery for my word-processing requirements. It was with great interest therefore that I read the comments in your December news entitled "Letter Stationery", which clearly states that Moore Paragon supplies neat A4-size Kleen Edge sheets of paper.

Upon examination and indeed discussion with Moore Paragon, it transpires that it is not A4 but 11in. or 12in. stationery. This is therefore quite clearly a misinterpretation of the facts and I would ask you to take Moore Paragon to task for misleading your readers in this manner.

I would be grateful if you could advise whether the internationally accepted A4 standard could be obtained in continuous preprinted form.

Garrick S Wales,
Stewart Wales Somerville Ltd.,
East Kilbride,
Glasgow.

● Apologies for our mistake. Moore-Paragon said the paper was A4 *compatible*, which is not the same thing. Does no one supply A4 paper?

Dragon Pokes

DRAGON OWNERS may be interested in a simple way to overcome the automatic scroll on the computer. It is done by Poking the screen addresses instead of using the Print @ command. The addresses are:

Start — 1024
Finish — 1535

For example, Poke 1024,255 is the same as

PRINT @ 0,CHR£(255)

Using Poke instead of Print also allows inverse spaces as well as inverse characters such as inverse £ @ & ' " / etc., which are not available by using the Shift-0 combination. The program displays all the characters when using Poke. It is useful when using the block graphics from ASCII code to draw mazes, etc.

Dragon Pokes.

```
10 CLS
20 X=1024
30 FOR P=0 TO 255
40 POKE X,P
50 X=X+1 : IF X=1536 THEN
   70
60 NEXT P
70 GOTO 70
```

David West,
Taplow,
Berkshire.

More jargon

AFTER Chris Naylor's A-Z of computing terms in the March issue, here are some further definitions:

Algorhythm Fashionable dance from a planet of the star Algol.
Assembler One who puts together a computer kit.
Burn-in The result of dropping cigarette ends or a hot soldering iron on the computer.
Control-bus Transport for traffic wardens.
Card-reader Fortune teller.
Character buffer Bribe money.
Checksum Total amount paid for a computer.
Chip Light snack during programming.
Cross assembler 1. Manufacturer of souvenirs for places of pilgrimage. 2. Angry citizen of Dundee putting together a computer.
Exor First part of a psycho-thriller film.
Firmware Clothing worn by business people.
Floating point Optical disturbance resulting from extended periods of staring into a monitor.
Garbage collection routine Removal of scraps of paper, notes etc., from the desk after a long programming session.
Handshaking State of someone sitting at a computer for the first time.
Hidden refresh Secret drinking.
Indexed addressing Pointing the direction for someone asking

(continued on page 8)

Our Feedback columns offer readers the opportunity of bringing their computing experience and problems to the attention of others, as well as to seek our advice or to make suggestions, which we are always happy to receive. Make sure you use Feedback — it is your chance to keep in touch.

(continued from previous page)

the way.

Indirect addressing Writing to a box number.

Interface The place in which the solution of a problem often stares.

Interrupt routine Annoying habit of children/adults when adults/children are discussing computers.

Memory refresh A souvenir of Benidorm.

Nesting Activity of a newlywed programmer.

Packing density Standard measure of the volume of a suitcase.

Refresh logic Argument of a drinker.

Timesharing When two people own one watch between them.

Write enable To give someone pen and paper.

Dave Kurth and Ronald Baumgartner, Busswil, Switzerland.

Software please

WE RECENTLY PURCHASED a Newbrain Model A and have found it to be a very powerful micro. But like all Newbrain owners we are disappointed that no magazine has even given the Newbrain a second look. I know unless you expand it there is not enough memory for much, but could you publish a small program or tell us of any software available?

Richard Nash, Petts Wood, Kent.

● **We like the Newbrain and we are keen to support it. Some programs from readers will appear next month, but more would be welcome.**

Endless tapes

A COMMON COMPLAINT against the use of cassettes for data storage is the need to rewind if previous files or programs are to be reloaded. It is not possible to do this automatically with standard cassette recorders.

A means of overcoming this drawback is provided by the use of an endless cassette, such as the TDK EC3 cassette. The tapes are short, six minutes maximum, making them ideal for use with computers.

There are, of course, snags. The tapes cannot be rewound or run fast forward and they are expensive compared with standard E15 cassettes. These difficulties are offset by the ability to manipulate the cassette solely by software, since the tapes move forward only.

Because of the different operating systems used on micros it is only possible to generalise on the applications of these tapes. However, with proper program organisation it should be possible to develop an efficient file system on tape.

The tapes come into their own for management of databases. I am at present still experimenting with these tapes, but they have already proved invaluable in the manipulation of data and for record purposes. No doubt readers will be able to think up other suitable applications.

M J Bedford, Bradford, West Yorkshire.

Left in the lurch

I DO NOT BELIEVE that the computer industry will ever be taken seriously by the business world if it cannot provide an efficient repair service. I have been waiting over six weeks for my Pet 2001, which is essential for the efficient running of my farming business, to be repaired by one of Commodore's nationwide dealers. The dealer is still waiting for parts.

It seems to me that dealers are more interested in the big profits to be made from selling computer systems than actually providing what the customer wants, and that is a good back-up service. It is interesting to note that of the 18 Commodore dealers listed in your magazine in March 1979 only nine were still in business by October 1982.

Surely Commodore should vet its dealers more thoroughly in order to protect the customer and its own good name; otherwise, being an authorised dealer means nothing.

R H Pring, Crewkerne, Somerset.

● **Since we received Mr Pring's letter the matter was finally resolved through a local Commodore dealer.**

Plea for service

AS AN OWNER of a BBC Micro I must condemn Acorn for a lack of understanding to its customers and would-be customers, for not supplying sufficient telephone answering facilities. To get through to Acorn requires the patience of Job, unlimited time and an understanding boss or family when hogging the telephone. I must have been trying since early December, in order to sort out a problem with my micro, but to no avail.

It does not make sense: with over 3,000,000 out of work more people could be employed to answer customers' queries. If nothing is done, before long the BBC Micro will go the way of other British products and be replaced by competitors from Japan or America.

M C Krockel, Aberdeen.

Gödel and AI

IN THE FEBRUARY issue Boris Allan suggests that Gödel's theorem rules out the possibility of artificial intelligence. I would accept Allan's main thesis that AI is still a long way off, but not his use of Gödel's theorem.

What Gödel showed was that any mathematical system complex enough to include self-reference could not be fully consistent. As stated it applies to mathematical systems: it is an inductive leap to apply it to microelectronic structures. However, if that is taken for granted, all that Gödel's theorem suggests is that if machines become intelligent they can not be fully self-consistent, that is, they must become far more than glorified calculators following rigid functions. That seems to me to be hardly more than a truism.

Gödel's theorem is a masterpiece of formal logic and is of major importance in the fields of mathematics and metamathematics. However, trying to apply it outside its context is beset with pitfalls. One thinks of attempts to support ideas of free will by using Heisenberg's uncertainty principle — which properly only applies to elementary particles. Ironically, it is just this sort of unbridled extrapolation that Allan is arguing is inappropriate when applied to ideas about AI.

J de B Clarkson, Pratts Bottom, Kent.

BORIS ALLAN seems to have let a fallacy creep into his thoughts on AI. He states that Gödel's theorem implies that a machine cannot think about itself and that therefore a machine cannot be truly intelligent. Besides the rather obvious difficulty of saying what true intelligence is — perhaps just "something that most humans have" — the theorem applies equally to human beings.

Of course I can think about myself. I can even imagine of all the synapses clicking away in my

(continued on page 13)



When it's time to stop playing games and get down to business...

Unfortunately, many of today's desk top computers are designed with too much emphasis on home use. That's fine, if you want to balance your checkbook, play "space war" or draw pictures. But when you have serious business requirements for a computer, you want one designed specifically for business.

The RAIR Business Computer is just that. A computer designed specifically for business applications, incorporating a host of features—optimised for the business environment. 8- and 16-bit microprocessors allow users to run available 8-bit—plus newer 16-bit—applications software simultaneously. And an integral high-capacity Winchester disk drive—plus provision for additional hard disk support—provides sufficient on-line storage for virtually any business application.

Advanced communications software allows the RAIR Business Computer to connect to mainframe systems and networks. And expanded RAM memory supports simultaneous access from up to four user workstations, each including an ergonomically designed, detached keyboard, high-resolution colour display, and optional workstation printer.

So if you're serious about a computer for business, call RAIR for details about our Business Computer. We're not playing games.

RAIR Limited
6-9 Upper St. Martins Lane
London WC2H 9EQ
Phone (01) 836 6921, Telex 298452

● Circle No. 104


SYSTEM SPECIFICATION
Microprocessors: Concurrent 16-bit 8088 plus 8-bit 8085
RAM Memory: 256 kbytes expandable to 1024 kbytes
Integral Disk Storage: 19-Mbyte Winchester drive plus 1-Mbyte floppy drive
Storage Options: Up to 4 add-on Winchester drives plus streaming tape backup
Communications: 4 workstation ports (RS-422-compatible), plus 2 synchronous/asynchronous programmable RS-232 ports

WORKSTATIONS (up to 4)
Keyboard: Ergonomic, low-profile, 83 keys, 10 programmable function keys, 10-key numeric keypad (with cursor/editing functions)
Color Display: High-resolution, 80 characters x 25 lines, upper and lower case, 8 programmable foreground/background colors
Printer: Bidirectional, 80 characters-per-second, friction and tractor feed

SOFTWARE
Operating System: User-friendly, multi-tasking, CP/M, MP/M, PC-DOS compatible
Languages: BASIC, COBOL, Pascal
Applications: Spreadsheet, Database, Text Processing Communications

CP/M and MP/M are trademarks of Digital Research
PC-DOS is a trademark of IBM

the RAIR Business Computer.

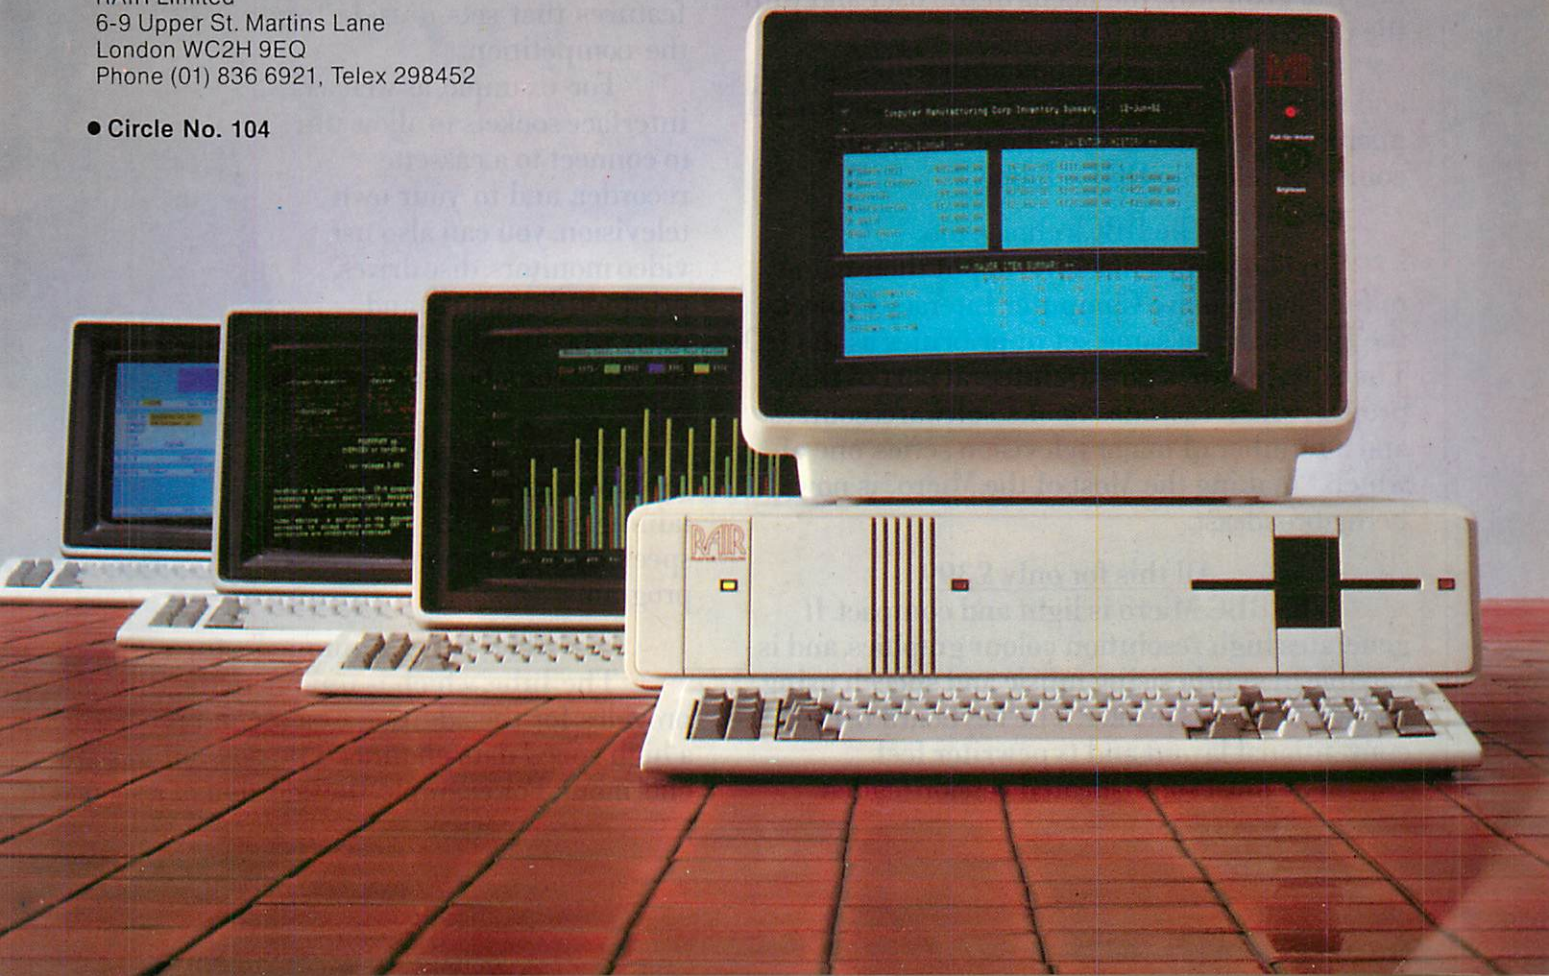

Three out of every four computers going into schools are BBC Micros. Is there a lesson to be learned by every user?

As part of the current government subsidised scheme aimed at introducing micros to schools, the Department of Industry undertook a survey of machines available and made recommendations to education authorities all over the country.

The BBC Micro met their priorities exactly: it is economical yet fast and powerful, and it can justify the investment involved, through its capability to grow with the needs of the user and with the rapid changes in technology.

Teachers and education authorities agreed, and today it represents over three-quarters of all micros being ordered for schools across the country under the DOI scheme.

The BBC's choice too.

In choosing a machine to put their name to for their massive Computer Literacy Project, the BBC had the same set of priorities as the DOI. The BBC Micro is now an integral part of that project, which includes books, software, courses and a number of major television series, one of which, "Making the Most of the Micro" is now being broadcast.

All this for only £399.

The BBC Micro is light and compact. It generates high resolution colour graphics, and is capable of synthesising music and speech using its own internal speaker. The keyboard uses a conventional layout and typewriter feel.


The most sophisticated version (called Model B) is available for only £399. (There is also a basic model available, the Model A, at £299.)

Designed to grow.

Last year the magazine "Which Micro?" said that the most attractive and exciting feature of the BBC Microcomputer was its 'enormous potential for expansion'.

This is indeed one of the features that sets it aside from the competition.

For example, as well as interface sockets to allow you to connect to a cassette recorder, and to your own television, you can also use video monitors, disc drives, printers (dot matrix and daisy wheel) and paddles for games or laboratory use.

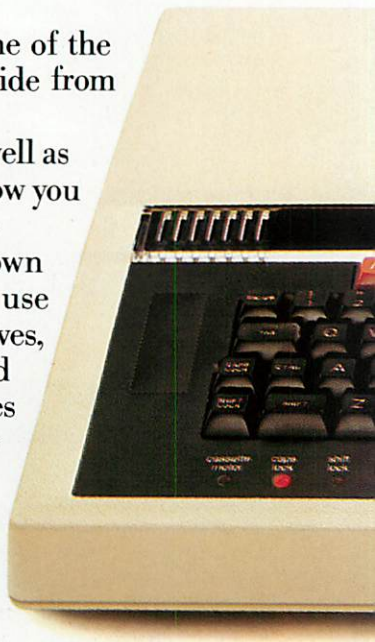

You can also plug in ROM cartridges containing games with specialist application programs.

The Tube. A unique feature.

The Tube, which is unique to the BBC Micro, provides for the addition of a second processor via a high speed data channel. The possibilities are enormous. For example, the addition of a second

3MHz 6502 processor with 64K of RAM doubles processing speed. While a Z80 with 64K of RAM opens the door to a fully CP/M* compatible operating system, with all the benefits for business applications.

Linking up with other computers.

The BBC Micro also offers a facility of immense potential value to schools, colleges and businesses. It's called Econet® – a system which uses telephone cable to link with other BBC Micros. A number of machines can then share the use of expensive disc drive and printer facilities.

Make full use of Prestel & Teletext.

With special adaptors you will not only be able to turn your TV set into a Prestel terminal and Teletext receiver, but you can also take data and programs direct from these services. (The programs, which are known as telesoftware, are already being broadcast by BBC's Ceefax service.) This is another first for the BBC Micro.

BASIC plus.

A sophisticated version of BASIC has been chosen for the BBC Micro, which incorporates features normally found only in more advanced high level languages. However, there is also a facility allowing access through a simple command to another language – for example, PASCAL, FORTH and LISP.

*Trademark of Digital Research.



A full range of software.

Applications software for the BBC Micro already cover a very wide field. Packages covering games, education and business applications are available on cassette. All developed to the same high standards set by the hardware.

The best possible back-up.

Your BBC Micro comes with the backing of the BBC and an extensive dealer and service network.

Each approved dealer is able to offer advice and carry out expansion work and repairs.

BBC Microcomputer – Model A and Model B.
2MHz 6502A Processor.
32K ROM; 16K RAM Model A, 32K RAM Model B.
Full QWERTY keyboard with 10 user-definable function keys.
Mixed high resolution graphics and upper and lower case text.
300 baud and 1200 baud interface for standard cassette recorders.
Three-voice music synthesis with full envelope control feeding internal loudspeaker.
Interface sockets (Model B only) – RS423, for analog inputs centronics and user port.
6502, Z80, 16032 second processors.
Single and Dual Disc Drives with 100 and 800 K-bytes storage.
Teletext unit.
Speech synthesis.
Networking facility – via Acorn Econet®

How to buy your BBC Micro.

If you are a credit card holder and would like to buy a BBC Micro B, or if you would like the address of your nearest stockist, just phone 01-200 0200.

Alternatively, you can buy a Model B directly by sending off the order form below to: BBC Microcomputers, c/o Vector Marketing, Denington Estate, Wellingborough, Northants, NN8 2RL.

All orders are despatched by fully insured courier and come complete with easy to follow 500 page User Guide and Welcome cassette.

☎ 01-200 0200 credit card holders.

To BBC Microcomputers, c/o Vector Marketing, Denington Estate, Wellingborough, Northants NN8 2RL.

Please send me_____ BBC Model B Microcomputers at £399 each, inc. VAT and delivery. I enclose PO/cheque payable to Acorn Computers Limited Readers A/C or charge my credit card.

Card Number_____
Amex/Diners/Visa/Access (Delete)

Name_____

Address_____

_____ Postcode_____

Signature_____ PC4

Registered No. 140 3810 VAT No. 215 400220

The BBC Microcomputer System.

Designed, produced and distributed by Acorn Computers Limited.

● Circle No. 105

CONCURRENT CP/M™

Multiplies the power of your microcomputer.

If you have to wait impatiently for your personal computer to finish a job before moving on to another task, you need Concurrent CP/M. This new software technology from Digital Research increases the productivity of your microcomputer by allowing you to do more than one thing at a time.

Using Concurrent CP/M, you can run several programs simultaneously, switching instantly from one program to another. For the first time you can write a letter while you do your financial planning. For the first time you can write text while printing other documents. For the first time you can edit programs while your program compiles. Concurrent CP/M is the best investment you can make in microcomputing because it multiplies the value of your hardware and lets you use all the CP/M compatible programs. And if you're developing software, it ensures that you're on the crest of the hottest new wave in the business.

There's nothing like Concurrent CP/M in the personal computer world, and you can get it only from Digital Research.

For more information, contact:
Digital Research (UK) Limited
Oxford House
Oxford Street
Newbury
Berkshire
RG13 1JB
Telephone: 0635 35304

DIGITAL RESEARCH™
The creators of CP/M™



UK Distributors

Tamsys Limited
Tel: Windsor 56747

The Software Connection Limited
Tel: Fareham 239025

Xitan Systems Limited
Tel: Southampton 334711

The logo, tagline and names of DRI products are either trademarks or registered trademarks of Digital Research Inc.

(continued from page 8)

brain or ponder what I was thinking about this morning. I would expect any "truly intelligent" machine to do this about itself. Gödel's theorem does not stop either of us, but rather it stops both of us from thinking about "what I am thinking about now."

Peter Kanssen,
Queen Mary College,
London.

Income tax

I AM WRITING concerning the Payroll program featured on page 148 of the April 1982 issue. I do not claim to be an expert at programming — though I do perhaps know something of income tax, having been in the business for 18 years — but it seems to me that the subroutine 7000 referred to near the top of page 150 is unnecessarily complicated by the use of arrays.

This routine, which should take up less memory space, will cope with codes of unlimited size.

John Doe,
Reigate,
Surrey.

Pet characters

IN A LETTER in the July 1982 *Practical Computing* I described the unusual behaviour of shifted characters in Rem statements on a 4016 Pet. Recently I have discovered an even weirder behaviour of shifted characters anywhere in the program.

This behaviour works in either character set, but as capitals are easier to write than graphics I shall write as if the alternate character set is being used. Enter:

```
10 gO
20 sA
30 rU
40 lO
50 li
```

and then list the program. The computer displays:

```
10 goto
20 save
30 run
40 load
50 list
```

This program is obvious nonsense and is used only to illustrate the point, but these half-shifted abbreviations are accepted by the computer just like the corresponding Basic word. A little research shows that there is a simple way to abbreviate any Basic word.

Income tax.

```
7000 F=0: IF T<1 GO TO 7100
7010 L=INT (T/360+1)
7020 L=INT (T/L)
7030 K=T-INT (T/L)*L
7040 FOR M=1 TO INT (T/L)
   - K:GO SUB 8000 : NEXT M
7050 IF K=0 GO TO 7080
7060 L=L+1
7070 FOR M=1 TO K : GO
   SUB 8000 : NEXT M
7080 NN=N : IF E(J,4)=1
   THEN NN=1
7090 F=F * NN
7100 RETURN
8000 F=F+INT ((((L*
   10+9)/52 * 10   4)
   /10   4+0.049) *20) /20 :
   RETURN
```

There are a few exceptions to this rule:

- two-letter words cannot be formed. tO does not give to.
- pR gives Print #, so ? must be used for Print.
- I can find no way to produce certain words such as gosub, and input. iN gives input #.

Also, if two letters are used that are not the start of any word then the shifted letter is ignored:

```
10 zQ : sS
```

gives

```
10 Z : s
```

I can think of no reason for this to happen. Its practical use is obvious: almost any Basic word can be entered with just two key presses.

R J Dowling,
King's Lynn,
Norfolk.

Unfair to Ace

BORIS ALLAN does less than justice to the Ace computer — Forth thoughts, *Practical Computing,* January 1983. There is no need to define a special word to allow another word to refer to itself: recursion is already part of the Ace repertoire.

Further, Allan's program crashed on all three machines because a signed two-byte number cannot exceed 32,767. The eighth factorial is 40,320.

Peter Davis,
London N3.

Foolish remarks

BORIS ALLAN may think that it is easy to learn some computing, but surely I am not alone in being infuriated by his articles in *Practical Computing* — they imply crass ignorance of most of the subjects he is writing on. In his latest article, in Last Word — I wish it were — he puts forward some rather foolish remarks about artificial

(continued on page 16)

STEMMOS

THE WORLD'S LEADING AUTOMATIC PROGRAM GENERATOR

New Version 1.2

STEMMOS AUTOCODE 1

Automatic development of dBase II, CIS COBOL program code without any programming

- ★ Automatic Menus and Sub Menus
- ★ Automatic Data Entry screens
- ★ Automatic Data Entry Routines
- ★ Automatic Edit/Validation
- ★ String, Numeric, Date and calculated fields
- ★ Automatic Multiple Reports Selection on part fields
- ★ Automatic Programs in dBase code with interactive screens
- ★ No prior knowledge of dBase II or CIS COBOL is needed
- ★ Installed on more than 50 microcomputers
- ★ Available on MS-DOS, CP/M 86 & CP/M 80

AUTOCODE ver. 1.2 for dBase II £220
AUTOCODE ver. 1.1 for CIS COBOL £450
excluding VAT

SCREEN HANDLERS FOR:
dBASE II — M BASIC
CIS COBOL — C BASIC
and other languages available separately on 8 bit and 16 bit systems.

Please send me more information on:
AUTOCODE 1 ☐ CIS COBOL ☐
SCREEN HANDLERS ☐ dBASE II SEMINARS ☐
dBASE II ☐

Name: _____
Company: _____
Address: _____
_____
_____
Telephone: _____

STEMMOS LTD
344 Kensington High Street
London W14 8NS
Tel: 01-602 6242 Telex: 893003 STEMOS G

STEMMOS AUTOCODE 1 STEMMOS AUTOCODE 1 STEMMOS AUTOCODE 1

● Circle No. 107

G. W. COMPUTERS LTD LONDON'S WEST END NATIONWIDE OVERNITE SERVICE MORE PRODUCT RANGES BETTER SERVICE PROBABLY THE WIDEST SELECTION OF NETWORKS... MICROS...AND PRINTERS ON DISPLAY NATIONWIDE

*****THE NEW DBMS III (series III of the world's first 'task-robot-programs')*****

*****FEATURES*****

Mbasic & word-star compatible
1400 character record sizes
mathematical scratchpad
record relational indexes
translateable to any language
User-defineable reporting
field protection/classification
sorts 'alpha or numeric' any window
either-or. same as. greater. smaller
32000 records per filename
20 main/200 sub fields per record
field and record related formulae
'Jump-to' any of 32000 records per file
random/binary/key/multiple field search
'if-then' questioning
file protection/password entry
speed of 500 records per 20 seconds
range match. not match. integer match
12 online file architectures
240 fields using cross-referencing
cross-record calculations
'Jump-to' any record in 12 files
User-defineable files/field words/sizes
endless 'either-or' matching
formulate/recall on selection criteria
12 interrogation question types
short filing output/audit trails

ONE OF THOUSANDS OF DIFFERENT TASKS ON WHICH THIS PROGRAM MIGHT BE EMPLOYED

DMS'S MACROS WORK FROM THE MOMENT YOU INSERT THE 'TASK DISK' IN THE COMPUTER'S DRIVE

Simply design your file, give its fields your words, setup your report mask, and then enter your records. Switch to 'automatic drive' and formulate any task you wish the program to fulfill, the task is stored as a macro. Take a copy of the program on another 'task disk' and from then on, the task disk will function without a single key-stroke. Think of a number of such 'task disks' such as "stock-re-order reports"; "stock-valuation reports"; "sale-mail-shots"; "production-process-analysis"; "patient history analysis"; "research-analysis"; "budgetting" "purchase/sales-analysis"; "personell-file-analysis"; "vehicle-location control"; "librarian analysis"; "plus more?"

Previous issues showed examples of 'employees-short-list', 'garage stock re-order', 'sales analysis' 'librarian's list' 'hospital's patient list' here is an example of a 'rental recording file' and some reports it might generate.

The record may look like this:
1-record number (413)
2-client (Radio cars ltd)
3-date of contract (01.04.81)
4-date last pmt (12.02.82)
5-period/frequency (36 / monthly)
7-amount of pmt (22.50)
8-item type (Taxi-phones)
9-repairs made (faulty microphone — item replaced)
10 cross reference (3.422!C details of full system spec and supplier)

One report might be: select ?? all records where the amount of payments are less than 50 pounds, that were taxi-phones and faults were detected. When found, pick up the cross reference code and look up that record to identify the supplier.

Another report might be: select ?? all records in the file where the commencing date of rental was 04.81 and the term was greater than 12 months. Print a list of all those records where the date last payment was prior to (ie smaller than) 03.82 and prepare a short address file for 'reminders'.

DBMS II (WITHOUT MACROS) AND DBMS III ARE FULLY IMPLEMENTED UNDER CPM-86 (tm) and MS-DOS (tm) ie: (SIRIUS/VICTOR/IBM)
DBMS II IS 395.00 (or 250.00 by mail order ex. training). DBMS III is 575.00 (or 295.00 by mail order ex. training)

TELEPHONES: 01-636 8210 : 01-631 4818 : TLX: 892031 TWCG (BOSTON 94-0890)

MICRO-COMPUTERS

G.W.L.	-G80 64K/interface ports/k'board	895.00
	-G80 V.D.U.	150.00
	-G80 Dual D/drives enclosed	550.00
INTERTEC	-Superbrain 64K RAM/320K disks	1695.00
	-Superbrain 64K RAM/700K disks	2195.00
	-Superbrain 64K RAM/1.5M disks	2595.00
	-Superbrain 64K RAM/10MG disks	call
	-Compustar 64K RAM/0K disks	1495.00
	-Compustar 64K RAM/320K disks	1995.00
	-Compustar 64K RAM/700K disks	2495.00
	-Compustar 64K RAM/1.5M disks	2895.00
NORTHSTAR	-Advantage 64K RAM/700K disks	£2195.00
(exc DOS)	-Advantage 64K RAM/5.3M disks	£3095.00
TELEVIDEO	-802 64K RAM/700K disks	2195.00
	-802H 64K RAM/7.3M disks	3750.00
	-806 64K RAM/10M disks	4995.00
	-816 256K/750K disks	£3150.00
ACT	-Sirius 1 128K/1.2M disks	£2395.00
	-Sirius 2 128K/2.4M disks	£2895.00
-Sirius 3 128K/10MEG disks		£3995.00
VICTOR	-9000 128K/1.2M disks	£2395.00
IBM	-PC 64K RAM/640K disks	£2795.00
	-PC1 330K/640K disks	£3395.00
ALTOS	ACS800-2 64K RAM/1M disks	1995.00
	ACS800-10 208K/10.5Meg disks	5495.00
NEC	APC 128K.RAM/2M disks	call.00
CORVUS	Concept 16 bit pc	call.00
SANYO	G80 64K RAM/320K disks	1195.00
	G81 64K. RAM Networker	1350.00
ABC	24 64K RAM/700K disks	2195.00
	26 64K RAM/2.2M disks	3250.00

All computer prices include mbasic as standard.
All prices marked £ are 8/16 bit machines.

SYSTEM DEAL SAVES YOU 1500.00+

Choose any computer, any printer and 30 diskettes
add 65.00 for cables and testing.
add 10% warranty for 1 year (optional)
add 110.00 for delivery & installation (optional)
training optional extra 100.00

and get completely ****FREE****

cpm handbook	50 basic exercises	2000 sheets paper
DBMS II	magic wand w/proc	magic calc
mbasic 80	diagnostics	msort/dsort
recover	autoload	instant basic
cbasic	disk/games	library case

****total value 1525.00****

PRINTERS

OKI	-Microline 80	295.00
	-Microline 82A	395.00
	-Microline 83	695.00
	-Microline 84	895.00
EPSON	-MX80/FT-3	395.00
	-MX100/FT-3	525.00
ANADEX	-DP 9000	895.00
	-DP 9501	1045.00
	-DP 9501 (A)	1145.00
QUME	-9/45 R/O	1695.00
	-9/55 R/O	1795.00
	-9/35 R/O	1495.00
NEC	-3510 R/O	1395.00
	-7710 R/O	1795.00
	-5520 KSR	2250.00
DRE	-8820	1295.00
	-8830	1695.00
TEXAS	-810	1195.00
	-825	1095.00
DIABLO	-630	1695.00
RICOH	-RP1600	1495.00
OLYMPIA	-ESW 103 14 CPS	975.00
	-ESW ??? 55 CPS	1025.00

PERIPHERALS & ACCESSORIES

CORVUS	-6 Meg hard disk	1850.00
	-11 Meg hard disk	2750.00
	-20 Meg hard disk	3750.00
	-Multiplexor 7 station	695.00
	-Mirror backup card	695.00
INTERTEC	-Compustar 10 Meg hard disk	2750.00
	-CDC 96 Meg hard disk	7950.00
N'STAR	-16 Bit u/grade	375.00
	-18 Meg hard disk	2995.00
RODIME	-6 Meg hard disk	1495.00
	-12 Meg hard disk	1950.00
MORROW	-26 Meg hard disk	3295.00
GENIE	-5MG fixed/5MG removeable disk	3295.00
CDC	-s/sided floppy drives	150.00
	-d/sided floppy drives	225.00
	-d/sided d/track drives	375.00
MEMOREX	-soft/hard s/sided diskettes (10)	30.00
SCOTCH	-104/2D double sided (10)	50.00
S.S.E.	-Softbox PET to CPM (tm)	495.00
	-Sirius 8/16 bit 5MHz card	365.00
QUADRAM	-64K print spooler/copier	295.00
BIZCOMP	-RS232/auto-modem 1200 baud	450.00
AST	-Port expanders (4 tmnls to 1 prtr)	395.00
GIX	-Port expander (switcher)	95.00
GIX	Port expander (switcher)	95.00

NOTE: Corvus drives with multiplexor may network sirius .. Superbrain .. Concept .. PET .. Victor .. IBM

SOFTWARE

G.W.L.	-BUS V8.00 (Accounts)	275.00
	-DBMS II (Database)	£395.00
	-DBMS II (by mail order only)	£250.00
	-DBMS III (database)	£575.00
	-DBMS III (by mail order only)	£295.00
	-FORMS/TEXT/CALC/-DBMS IV	£575.00
	-Sales Ledger	£95.00
	-Purchase Ledger	£95.00
	-Nominal Ledger	£95.00
	-Stock-Control	£95.00
	-Address-Mailer	£95.00
	-QASort/QNSort (500 Recs/14secs)	£95.00
	-Autoload & Recover	25.00
MICROSOFT	-Mbasic 80	195.00
	-Fortran 80	295.00
	-Cobol 80	395.00
	-Basic Compiler	225.00
	-MU lisp/mu star	125.00
MICROPRO	-Word-star	£275.00
	-Mail-merge	£75.00
	-Spelstar	125.00
	-Datastar	195.00
	-Super-sort	120.00
	-W-star/M-merge/Sp-Star	425.00
BYROM	-BStam (communications)	100.00
	-BStms (tele-comms')	100.00
DIGITAL	-Despool	30.00
	-CBasic	75.00
	-Pascal MT	225.00
F. GELLER	-Quickscreen	95.00
LEXISOFT	-Spellbinder	195.00
LIFEBOAT	-T/Maker	155.00
M'FOCUS	-CIS Cobol	420.00
	-Forms II	100.00
SORCIM	-Super Calc	195.00
	-Pascal M	250.00
STANDARD	-Quic-N-Easy	195.00
PEACHTREE	Magic Wand	190.00
	-Magic Calc	175.00
S'Soft	-Diagnostics	50.00
N'West	-Statpak	250.00
OASIS	-The Word	35.00
ITHACA	-Pascal Z	100.00
MICROSTUFF	-Cross-talk (Tele-comms')	95.00
WOOLFE	-Move-it (Micro to Micro)	45.00

Software formats on all micros in our hardware list.
All prices marked £ are available 8/16 bit formats.

TERMS & ETC

G. W. Computers Ltd (Grama (Winter) Ltd)
55 Bedford Court Mansions
Bedford Avenue
London W.C.1. England.
Tel: 01-636 8210: 01-631 4818: tlx 892031 twc g
Boston office tlx 94-0890
24 hour answerphone-leave address for 'infopacks
We do not operate a reader s reply card service.
Terms: C.W.O. or C.O.D. Prices exclude V.A.T., but include all non-credit discounts available.
No dealers. The above lists are not exhaustive
Please call in only by prior appointment.

FORMS/TEXT/CALC/DBMS IV

Contains the highest state of the art software available today

ALL IN ONE PROGRAM

When you budget for a complete system of software you eventually end up with a host of packages like, Sales, Purchases, Nominal, Data, Text, Calc, Mailshot, Invoice, Order, Workflow, Personnel, and so on.
The list is endless and the outlay several thousands of pounds.

DBMS IV

Has most of the features you need from the above list in one program!!!!.

Features.	Design a form as wide as a window of 250 characters, long as needed. Cursor movements are 'left, right, up, down, delete left delete right, tab right-left-up-down' Paint your form as you like directly on the screen.
Text.....	Write a letter as you see it on the screen, edit it then simply enter ^P to print.
Calc.....	Set into the form, your data fields, ''£££££'' and specific file-related activities, formulae and validation checks. Enter values and see the spreadsheet calculate itself.
Database.	Search files for data to be inserted to fields specified. All the features of DBMS III, explained elsewhere in our ad.

Here's an example of an invoice you might design for your stationery .....
You could design your own spreadsheet, order form, statement, or any other kind of form that is required to fit your existing stationery.

<0>£££££££££££

INVOICE

To £<1>£££££££££££
£<2>£££££££££££££££
£<3>£££££££££££££££
£<4>£££££££££££
£<5>£££££

From: G.W. Ltd
55 Bedford Court Mans.
Bedford Avenue
London W.C.1.
Tel: 01-636 8210

Date <6>£.£ Tax point <7>£.£ Agent <8>£££

Quantity	Description	Cost	Tax	Total
<9>£££	<10>£££££££££££	<11>£	£	<12>£
<14>£	<15>£££££££££££	<16>£	<17>£	
< 1	8 >	£	£	£

and so on .....

Total.....<19>£££££ Tax.....<20>£££

<??>	items <1>to <5>internal command to request name input, and then search an address file for details.
<??>	items <6>to <7>request date input and validate.
<??>	item <8>request agent number and validate range.
<??>	<9>request quantity, validate range.
<??>	<10>request description, search file, accept, and calculate fields <11>, <12>, <13>, if finished invoice then calculate fields <19> and <20>

Now comes the more valuable facility, you can provide the 'FORM' with file-related instructions, not only to request a 'console' input for a file search against names, and stock, but after the invoice is finished the fields you have selected may be passed to related files.

EG: Send fields <0>, <1>, <6>, <7>, <11>, <12>, <13>, <19>, <20> to a sales ledger.
Then send fields <9>, <10>, <11>, to product analysis file.
Then send fields <0>, <1>, <7>, <19>, <20> to V.A.T. file
Then send fields <10>, <11>, <12>, <13> to Nominal ledger.

The program is only available from G.W. Computers Ltd <U.K.> with a system purchase at 575.00, note DBMS III comes free with system deals. or by mail order transaction at 395.00

● Circle No. 108

PORTABLE COMPUTERS

EPSON HX/20 (Brief case Computer. Weighs less than 4lb. 16K expandable to 64K. Full size ASCII keyboard. Runs on own power for 50 hours. Complete with serial and RS 232/Interface. **£400.00**

Add on fac. inc. Barcode. Reader/ Microcassette/Acoustic Couplers for telephone link up etc.

HP75C (The new portable computer 16K expandable to 48K size just larger than a reporters notebook, weighs under 2lb). Will inface with other HP equipment incl. •Items detailed below ideal for Eng./Sci/ travelling business executive. (600 appointments can be stored in Mem built in international clock full size keyboard etc). **£600.00**

Turn your 41C/CV System into a hand-held Computer with these accessories

•**Portable Digital Cassette Drive** (stores up to 131,072 bytes on a moveable mini date cassette. Files can be given "Meaningful" names. Average file access 13 secs. works on rechargeable batteries and is completely portable) **£310.00**

•**HP 7470A 2 pen plotter** With plotter module first-time users can quickly generate line graphs/bar charts/overhead slides etc. Allows rapid generation of bar code commands. **£950.00**
Plotter module **£ 56.00**

Extended function and memory modules for HP41C/CV now in stock. Adds approx. 4K Mem storage.

HP41C £120.00
HP41C O/R **£120.75**
Printer 82/62A **£286.95**
Printer 82143A **£220.95**

HP41CV **£169.50**
HP Wand **£76.00**
HP1L Module **£78.00**
HP16C **£93.00**

In stock HP10C 11C 15C/1. Tel. for prices.

HP41C together with IL8 plotter modules plus 7470A plotter. **£1,165.00**

HP BUDGET PACK
HP41CV together with card reader and printer (82143A). All complete as manufacturers spec. **£500.00**

COMPUTER PRINTERS AVAILABLE FROM STOCK
Epson/Qume/Oki/Nec
Diablo/Ricoh/Tec/Brother
Prices and Literature on request

SHARP

PC 1500 Pocket Computer	£130.00	cables, CP/M operating system and	
CE 158 RS232 and Cent I/F	£130.00	Sharp Disc BASIC & Manual	£650.00
CE 15A Appli Tape	£13.00	MZ-80FB Dual Floppy Disc Drives for	
CE 150 4 printer/cassette I/F	£115	MZ-80B complete with I/F card,	
CE 151 4K Add on mem	£43.00	cables, CP/M operating system and	
CE 152 Cassette	£34.00	Sharp Disc BASIC & Manual	£650.00
CE 153 Add on Soft Card	£69	MZ-80P4 150 cps Matrix Printer	£700.00
CE 155 8K Add on mem	£69.00	MZ-80P5 80 cps Matrix T/F Printer	£360.00
MZ-80A 48K Computer	£425.00	MZ-80P6 80 cps T/F F Printer	£400.00
MZ-8080AEU Exp Unit for	£86.00		
MZ-80FB Dual Floppy Disc Drives for MZ-80A complete with I/F card,			

The SHARP MZ-80 P4, P5 and P6 PRINTERS come complete with interface card, printer cable and ROM.

SPECIAL OFFER
TEXAS T159 together with PC100C (Complete as manufacturers specifications) **£265.00**

T159 **£112.50**
T155-II **£35.00**
PC100C **£163.50**
TI Programmer **£52.50**

GOODS FULLY GUARANTEED.
PRICES EXCLUDING VAT AND P+P.
Company and Government orders accepted by phone.
Barclaycard/Access/Visa accepted by phone

Tel.: 01-455 9823

EXPORT ORDERS WELCOMED
Air Freight/Air Post Delivery
Quotations on request

MOUNTAINDENE
22 Cowper Street
London EC2

● **Circle No. 109**

(continued from page 13)

intelligence, such as how it is not really intelligent.

If computers can never be intelligent then what makes him think that people are intelligent? Definititions of intelligence are notoriously difficult, but the trend in the past has been for computers to do more and more things that previously people would have said required intelligence. I see no reason for this trend to stop.

John Kleeman,
London NW3.

● **Last Word next month will be written by a computer.**

Some welcome!

AFTER TWO DAYS and a dozen temperamental attempts to load the BBC Welcome tape, as a last resort I changed over the Mic/Record jack plugs and all was then splendid. So be warned, if the jacks are the wrong way round, the screen may not show blank or rubbish.

It is like the navy pilot who took off not noticing that the wings of his plane were folded, and flew safely.

M Schaffer,
Haywards Heath,
West Sussex.

Alphabetical Sinclairs

I WAS PLEASED to see that you were able to publish my program in the January issue of your excellent magazine — page 115. Unfortunately, there were two small errors. Two lines should be inserted as follows:

1105 LET C(P) = C(P + 1)
1170 LET L (P) = 0

Various line numbers referred to in my explanation of the program related to an early version, rather than the later improved version which you printed. The corrected numbers are as follows:

For	13	read	40
	15		60
	17		80
	19		100
	21		120
	132		1200
	134		1220
	135		1230
	150		1370
	151		1380

The program will, of course, run without any alterations on the Spectrum, which I now use.

John Loncaster,
Hornsea,
Humberside.

Format 80

YOU WERE KIND enough to review our word processor Format 80 in the February edition of *Practical Computing*. For the most part the review was accurate but there are some matters of fact we would like to correct.

The price of Format-80 is now £199: the article "Apple words" prices it somewhat higher.

John Dawson should be pleased to hear that word-wrap now operates when inserting text. Format-80 is compatible with Super R, Omnivision, Videx Videoterm, Doublevision, Smart Term, Vision 80, U Term, Full-View 80 and others.

Michael Hardwick,
Elite Software Company,
Heston,
Middlesex.

Alphabetical listing.

```
Program conversions from ZX81
to SPECTRUM.
The following show a sample of
the suggested amendments to
make use of the INPUT command
on the SPECTRUM.
 620>INPUT "Add 1, Subst 2, Dele
te 3, Scroll 4, Return 5 ";y
 660 IF y=2 THEN GO TO 860
 670 IF y=3 THEN GO TO 1040
 685 IF y=5 THEN GO TO 1190
 700 INPUT "Enter Name of new It
em ";x$
 720 LET a$(1)=x$
 740 LET l(1)=LEN x$
 750 INPUT "Enter Amount of new
Item";a1
 770 LET a(1)=a1
 790 INPUT "Enter Cost of new It
em";c1


1250>INPUT "Add 1, Subst 2, Dele
te 3, Scroll 4, Return 5 ";y
1310 IF y=1 THEN GO TO 690
1320 IF y=2 THEN GO TO 860
1330 IF y=3 THEN GO TO 1040
1345 IF y=5 THEN GO TO 1190
```



The box is not always black...

At Rair we're continually enhancing and upgrading our Black Box microcomputer range to meet the ever-changing, ever-growing needs of our customers.

That's why you'll often find our systems turning up under different names, different colours—not always black.

Our current Black Box range includes 8- and 16-bit microprocessors, that can be configured from simple single-user floppy disk systems right up to powerful multi-user systems with Winchester hard disks and tape backup.

So next time you're choosing a microcomputer for a new application, remember to call us first.

With Rair, you can have any colour you like, including black.

RAIR

United Kingdom **RAIR** Limited 6-9 Upper St Martins Lane London WC2H 9EQ Telephone (01) 836 6921 Telex 298452
France **RAIR** Sarl 90 Avenue Champes Elysées 74008 Paris Telephone 010 331 225 4401 Telex 290177
West Germany **RAIR** Computer GmbH Clemensstrasse 5-7 5000 Köln 1 Telephone (0221) 219811 Telex 8881915
United States **RAIR** Microcomputer Corp. 4101 Burton Drive Santa Clara CA 95050 Telephone (408) 988-1790 Telex 677038

● Circle No. 110

Samurai means to
Samurai is built to s

Out of the world's most powerful economy comes the world's most performance-orientated executive computer. It's the Samurai from Micro Networks, a 16 bit business machine with a capability, features and a price that gives it a decisive edge over the competition from the other side of the Pacific.

As well as the thrust of the Intel 8086 power, there's an impressively engineered reliability that's wholly Japanese. 128K bytes of memory, 2.4 megabytes formatted floppy disk storage with standard IBM format compatability, communications



RRP £2795 ex

erve. The new 16 bit
rve today's executive.

and printer interfaces all come as standard. And on top there is a superb range of options.

The software available to Samurai users is extensive. A full library has been developed by Peachtree the world's largest microcomputer software house, for MS DOS* and CP/M86** Samurai's operating systems. It all indicates that here's a machine that's built to work alongside you in the toughest business environment.

The Samurai is backed by an aftersales service programme, the like of which has not yet been in the U.K. executive computer market. Just as an ancient Samurai warrior pledged total loyalty to his lord, so Micro Networks pledges every Samurai customer a total support package. A 12-month guarantee of course, but also a guaranteed no-quibble replacement. Extensive training is available, and a software hotline to enable business users to get fast answers to operating queries.

Micro Networks Limited
382 Kensington High Street, London W14 8NL
Telephone 01-602 7405/9

The Samurai is a product from Nissei Sangyo which is a subsidiary of Hitachi.

MICRO NETWORKS



To: Micro Networks Limited
382 Kensington High Street
London W14 8NL

Please send me more details of the 16 bit Samurai.

Name_____

Company_____

Position_____

Address_____

_____

_____

Phone_____ PC2

* MS DOS is the registered mark of Micro Soft
** CP/M 86 is the registered mark of Digital Research

● Circle No. 111

The right software for your application from COMPUTECH

apple
Authorised Dealer
Service Centre
System Consultancy



COMPUTECH FINANCIAL ACCOUNTING PACKAGES
Payroll £375
Invoicing and Stock Recording £295
Sales, Purchases and General Ledgers each £295
Also costing and group consolidation

COMPUTECH UTILITIES DISK
for reliable error checking copying, diskette scan, interpret and patch, etc £20
VisiCalc, Applewriter and other Apple software (Prices on request)

COMPUTECH CHAIN MAIL
A mailing merging document processor which may be used with text files, including random files and Applewriter 1.1 binary files £45

COMPUTECH GRAPHICS DISK
for printing Apple pictures and graphs on Epson and Microline (free with printers purchased from Computech) £30

COMPUTECH TERMINAL UTILITIES
Apple to Apple and Apple to mainframe from £130

COMPUTECH hardware...just plug it in and go!

switches and jumpers provide hardware options without soldering



DIPLOMAT VIDEO DIGITISER
store a frame from video camera in a fiftieth of a second, process and print £195
DIPLOMAT PARALLEL Interface £80
DIPLOMAT SERIAL COMMUNICATIONS Interface £85
DIPLOMAT RAM 16 Memory Expansion £95
DIPLOMAT CLOCK/CALENDAR £80
LOWER CASE Character Generator with Applewriter 1.1 enhancements £50
MICROMUX Data Exchange (Max 16 Ports) from £850
MATRIX PRINTERS, Microline and Epson with graphics and up to 200 cps from £230
MICROLINE Optional Character Generator £15
DAISY WHEEL PRINTERS, Olympia, Qume, Ricoh from under £1,000

Prices exclude VAT, Carriage and Packing

For full details phone for data sheets and a FREE demonstration

COMPUTECH SYSTEMS

168 Finchley Road, London NW3 6HP. Tel: 01-794 0202


● Circle No. 112

The Apple logo is a trade mark of Apple Computer Inc. VisiCalc is a trade mark of VisiCorp.

Three from Texas

TEXAS INSTRUMENTS has entered the competitive desk-top business market with the TI Professional microcomputer. It is a 16-bit machine using the popular Intel 8088 CPU like the IBM Personal Computer. The oversized detached keyboard is more like the ones from Fortune and Wang.

The TI-P comes with 64K of RAM, expandable to 256K, and

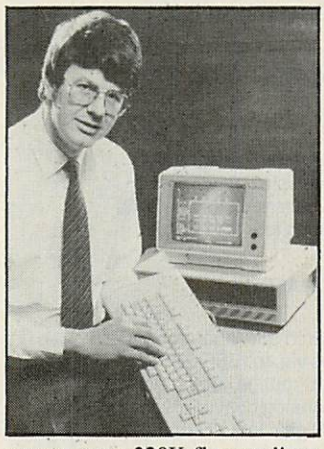

one or more 320K floppy discs. It offers CP/M-86, Concurrent CP/M, MS-DOS and the UCSD p-system.

Meanwhile TI has also launched two further microcomputers, the TI-99/2 and CC-40, to strengthen its attack on the home and portable sectors respectively.

Contact Texas Instruments, Manton Lane, Bedford MK41 7PA. Telephone: (0234) 67466

ICL plumps for the Intel 8085

ICL HAS ANNOUNCED four new models of its micro, the Personal Computer, which is manufactured in the U.K. to a Rair design. Bottom of the range is the Model 15 with 64K of RAM and two 782K formatted floppies at £1,795. Top of the range is the Model 35 with 256K of RAM, a single floppy and built-in 10Mbyte hard disc at £5,125.

All the new models use the 5MHz Intel 8085 eight-bit processor, which can be simply upgraded to an 8088. The operating system supplied is either CP/M or MP/M for multi-user systems.

The Model 26 and Model 35 are fast enough for multi-user operation as they include 0.5 Mbyte of "virtual disc" or cache memory store. This allows very fast access to frequently used data without involving slow disc access.

Contact ICL, ICL House, London SW15. Telephone: 01-788 7272.


Canon's desk-top

THE FAMOUS Japanese camera and copier company, Canon, has launched a new 16-bit micro the AS-100. Apparently the label AS stands for "advanced station".


It comes in two versions, monochrome and colour. The AS-100 uses the Intel 8088 as its CPU and has 128K of RAM as standard, expandable to 512K. Two 5.25in. floppy discs are supplied, offering 640K of storage each; 1Mbyte 8in. discs are available as an option. There is a choice of operating system — CP/M-86 or MS-DOS may be specified.

Interestingly, a non-mouse knob-operated pointing device is available to plug into the detached keyboard to support the computer's normal graphics functions.

Contact Canon U.K. Ltd, Waddon House, Stafford Road, Croydon. Telephone: 01-680 7700.

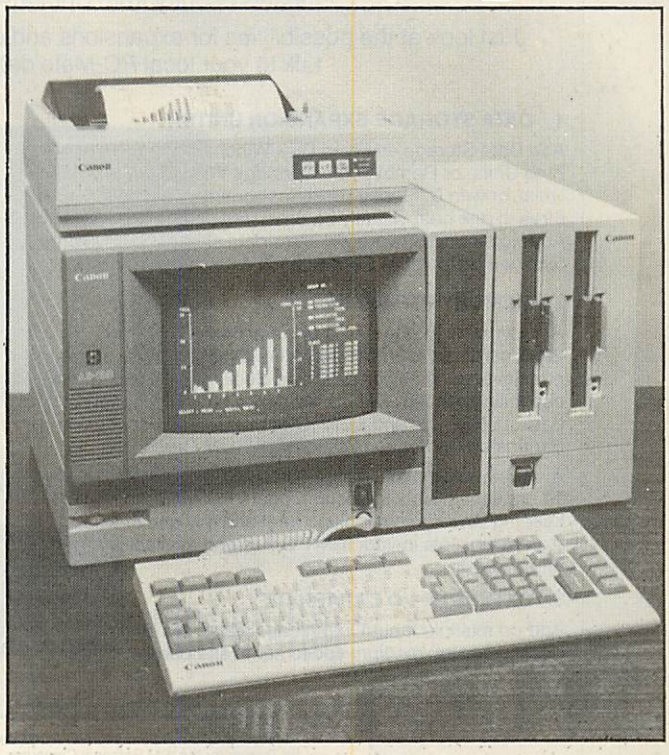

Plug the Scullion into a Pet's User Port and the mains power supply, and up to six electrical devices can be switched on and off under program control using simple Peeks and Pokes from Basic. The Pet is fully isolated from the mains supply. The Scullion is suitable for stepper-motor control as well as turning on heaters, kettles and fish tanks, in fact anything drawing less than 10 amps. The unit costs £225. Further details from Mektronics Consultants, Linden House, 116 Rectory Lane, Prestwich, Manchester M25 5DB. Telephone: 061 798 0803.

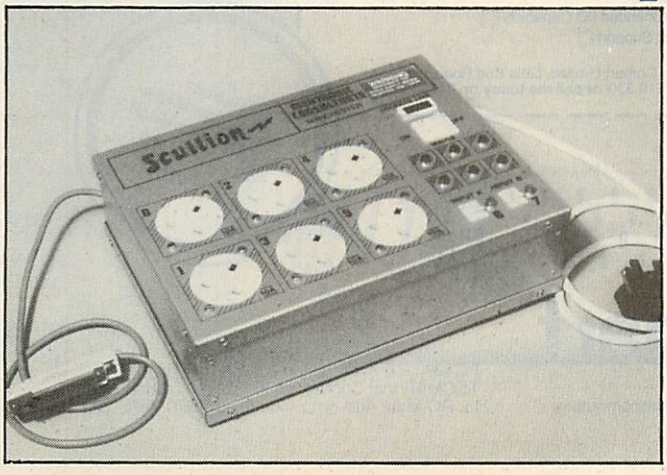

Robot arm for the price of a toy

WOULD YOU SINCERELY like to get into robotics? If so, you could do a lot worse than invest in the Tomy Armatron at £30. There is nothing else even remotely near the price.

The arm traverses through 360°, as well as doing a 180° horizon-to-horizon swing. The claws, which are operated by knobs on the two control levers, are attached to a rotating wrist.

Tomy, a Japanese company, markets the Armatron as a toy. At the Earls Court Toy Fair, Tomy engineers admitted that it could quite easily be refabricated into something stronger and more durable. They also agreed it could be adapted to function under microprocessor control, especially a Z-80, for little more than the cost of the machine itself.

Where we disagree is with Tomy's reservation that it is suitable only for children over 12. The *Practical Computing* destruction testing team, aged six and three respectively, disprove that. After a weekend of Robot-arm wrestling, the Armatron was still functioning on the set of batteries it came with.

For further information contact Tomy on 01-661 1547

More news on page 24

ADD-ONS, ADD-INS AD INFINITUM

Tecmar's PC-Mate Add-ons will transform your IBM Personal Computer. They add breadth to its possible applications and depth to its capabilities. You can choose from over 60 PC-Mate Add-ons - all fully compatible with your IBM PC. You can improve your standard facilities, or add new specialised functions. You can share data storage and output resources between several PC's, or eliminate the need to purchase new PC's for more occasional and less demanding requirements.

Tecmar Add-ons are already proven in thousands of applications world wide, and are now available in this country from Comart–Tecmar's Sole UK Distributor.

Just look at the possibilities for expansions and enhancement–then send for further information, or talk to your local PC-Mate dealer. The possibilities are infinite.

1 DATA STORAGE EXPANSION UNITS

Add Data Storage as Fixed Disk Winchester in 5, 10 or 15M Byte Units, or Removeable Cartridge Winchester in 5M Byte Units, or twin 8" Floppy Diskettes–or any combination of all three in one neat visually co-ordinated unit. Shared System Adaptors and Software will allow data storage to be shared between up to 4 IBM PC's with full data integrity.

2 MEMORY EXPANSION

Add dynamic memory as individual 64K, 128K, 192K or 256K cards, or as integrated All-in-One cards with serial and parallel ports, plus calendar and clock. Add development capability with 32K CMOS Memory Cards with battery backup, EPROM and EEPROM Programmer/Readers and Expansion Cards, and Static RAM/ROM Cards.

A visually compatible expansion chassis provides a further 11 expansion slots to accommodate PC-Mate Add-ons, keeping your system looking neat and tidy and the expansion slots in your IBM PC free and available for future needs.

3 EXTENDED I/O CAPABILITY

Add-on multiple Input/Output capabilities in a single expansion slot; medium speed serial and parallel ports emulate IBM ports, and are fully IBM software compatible. Add Communications potential with multiple RS232 ports with optional DMA high speed data transfer capabilities. Add a further shared resource facility for up to four IBM PC's sharing a common printer.

4 INDUSTRIAL/SCIENTIFIC/LABORATORY INTERFACES

Add-on a full range of industrial, research and laboratory equipment and test device capabilities via an IEEE-488 Interface with an optional Software sub-routine library. Add-on multi-channel 8 and 12 Bit Digital/Analog converters, 8 to 16 Bit Analog/Digital converters or a Digital Input/Output option. Add-on stepper motor controllers, timers, counters and other aids to advanced data acquisition and process control functions.

5 GENERAL SUPPORT

Add-on a whole armoury of special purpose cards for voice recognition, video digitizing, special cursor movement control, timers/clocks/calendars, or external device control for security and energy conservation applications. You can also add-in the essential supporting software for all PC-MATE Units, and boards including useful sub-routine libraries.

Please expand my information on PC-Mate Add-ons and Add-ins specifically developed by Tecmar for the IBM Personal Computer

Name

Position

Company

Address

Tel No:

I am particularly interested in: (Please tick as appropriate)
Data Storage Expansion ☐ Memory Expansion ☐ Extended I/O Capability ☐
Industrial/Scientific/Laboratory Interfaces ☐ General Support ☐

To: Ken Goddard, Sales Manager PC-Products, Comart Limited, Little End Road, Eaton Socon, St. Neots, Huntingdon, Cambs PE19 3JG **or call me today on 0480 215005.**

Dealer opportunities are still available in selected areas



Comart Limited, Little End Road,
Eaton Socon, St. Neots, Huntingdon,
Cambridgeshire PE19 3JG
Telephone 0480 215005.
Telex 32514 Comart G.

comart

Specialists in microcomputers

A member of the Comart group of companies

PC-MATE is the registered trademark of TECMAR Inc; Comart are the sole UK distributors for PC-Mate Add-ons produced by TECMAR.

● **Circle No. 113**

IBM profits near $4.5 billion

IBM HAS DECLARED a profit for 1982 of $4.409 billion on sales of over $34 billion.

IBM sales are thus running at around £85 million per working day, with profits of £11 million a day.

If IBM had sold its PC in the U.K. in 1982, and sold 200 a week for an annual turnover of £36.4 million, this could have increased profits by 0.1 percent. Wonder why it didn't?

CPS to import Winchesters

AUTHORISED IBM PC dealers CPS Data Systems are now importing PC-compatible Winchester hard discs from Tallgrass Technologies in the U.S. The TG-3012 is a 12MByte disc with integral tape back-up.

CPS also sells the Megaplus add-on board with 512K of RAM, three extra ports, and an interface which supports Tallgrass and Corvus hard discs.

Contact CPS at Arden House, 1102 Warwick Road, Acocks Green, Birmingham B27 6BH. Telephone: 021-707 3866.

Nominal ledger U.K.-style from Peachtree

U.K. VERSIONS of Peachtree's accounting systems and office-productivity systems packages are already available for the IBM PC. Now Peachtree has added the nominal ledger, which has been Britished by Peachtree International in Maidenhead, under contract to IBM.

As well as this, the basic accounting system includes Sales Ledger, Purchase Ledger and Inventory Management suites. The payroll package is expected to arrive in April with the new statutory sick pay facilities.

The office-productivity tools include Spelling Proof Reader, List Manager, Peachcalc financial modelling and Colour Graphics.

Later, Peachtree will start releasing its business management systems, written in Micro Focus Cobol.


Contact Peachtree Software International Ltd, 43-53 Moorbridge Road, Maidenhead, Berkshire SL6 8LT. Telephone: (0628) 32711.

Three-function card saves space

ONE PROBLEM with the IBM PC is that it only has five expansion slots, which are quickly filled. Multifunction cards are therefore a useful development. Data Translation is offering the Ziatech 448 compatible card which fills one slot but has three complete separate functions. They are:

- GPIB controller — for daisychaining up to 14 GPIB compatible devices
- clock/calendar — with two-year battery back-up
- socket for multimode I/O board, with many available from various manufacturers. Examples are analogue I/O, maths processors, speech-synthesis chips, disc controllers and a second GPIB controller.

Contact Data Translation Ltd, 430 Bath Road, Slough, Berkshire SL1 6BB. Telephone: (06286) 3412.

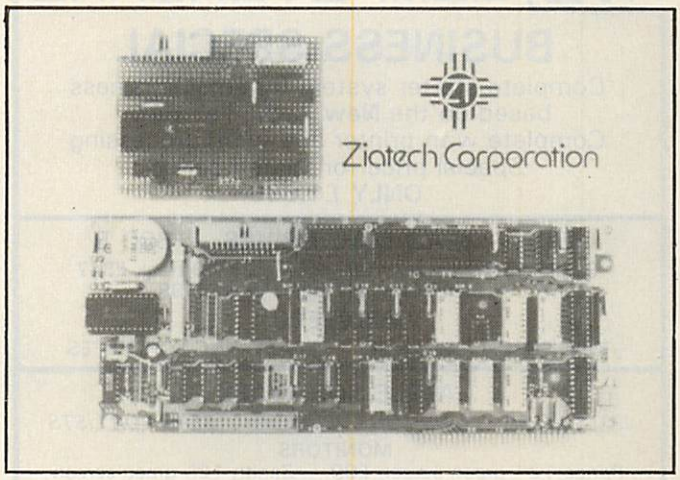

Best-selling database manager for PC

A TOP-SELLING Apple program, DB Master, has been rewritten and expanded for the IBM PC. The new version has a 3,000-character record instead of 1,020. The database also has an Array Search feature to select records with multiple entries, and a Browse mode. Hardware requirements are a minimum of 192K of RAM and two 320K disc drives.

DB Master is from Stoneware Inc in California, and costs £349 from Pete & Pam, 103-5 Blegborough Road, London SW16 6DL. Telephone: 01-769 1022.

Mellow out the Easy way

THE EASY series of programs from Information Unlimited Software of Sausalito, California is now available from Pete & Pam Computers. The best-known offering is Easywriter II, which costs £225. It can be combined with Easyspeller, which costs £125 extra. The other two are Easyplanner, £125, and Easyfiler, £249.

Contact Pete & Pam Computers, New Hall Hey Road, Rossendale, Lancashire BB4 6JG. Telephone: (0706) 227011.

Comart peripherals

COMART LTD the microcomputer manufacturer and distributor, has signed an exclusive marketing agreement with Tecmar Inc to distribute the PC-Mate range of IBM PC compatible peripherals. They include Winchester hard-disc subsystems, memory and communications interfaces, analogue/digital converters and industrial control modules.

Comart's service division, Microserve, will be providing on-site maintenance for IBM PC users. Other Comart group members, including the Byteshop and Xitan Systems, will also be supporting the IBM PC.

Contact Comart Ltd, Little End Road, Eaton Socon, St Neots, Cambridgeshire. Telephone: (0480) 215005.



Appropriate Technology — Aptec for short — has launched a dual-language version of the IBM PC. The system includes the Arabstar word processor and a printer which can provide output in English, Arabic, or a mixtue of the two. The two languages can be mixed on the same screen — even on the same line — and Aptec's managing director Ali Baghdadi says they are working on further software. Contact Aptec Ltd at 2-4 Canfield Place, London NW6. Telephone: 01-625 5575 or 5134.

A+G COMPUTERWARE

BUSINESS SPECIAL

Complete starter system for small business based on the **New** Apple IIe® 64K!
Complete with printer and word processing
Special price for limited period
ONLY £1,999

TRS — **TEAC DISC DRIVES** — BBC B
Single 35/40 track **£185** — Twin 35/40 track **£347**
— Siemens single Apple drive **£199**

PRINTERS
NEW EPSON FX RANGE — PLEASE RING FOR PRICES

APPLE SOFTWARE
LOTS OF BARGAINS FOR EVERYONE — SEND FOR LISTS

MONITORS
Prince 12" green screen **£99** — Zenith 12" green screen **£85**
BMC 1401 14" RGB colour **£219** — Sanyo 14" RGB colour (80 col) **£524**

WANTED
ORIGINAL SOFTWARE — UP TO 30% ROYALTIES
Write in strict confidence — Author recognition and guaranteed full advertising cover.
Standard Interface

Add £8 carriage + 15% VAT
Prepaid orders or Access
Full price lists sent by return

P.O. BOX 34, CHEADLE, CHESHIRE SK8 4PT
Tel. 061-428 2014

● Circle No. 195

HAVE YOU GOT A BBC MICRO?
THEN YOU NEED:

Laserbug

WE WON'T TRY TO PUSH LASERBUG ON YOU LIKE THE OTHERS – SEND OFF FOR A SAMPLE COPY AND YOU'LL FIND THAT LASERBUG SELLS ITSELF

ILABLE... BBC DUST COVERS AVAILABLE... BBC DUST C

Specially made LASERBUG Dust Covers available for only £3.25 inclusive. Made of high quality polyester/cotton which is better than the less attractive PVC ones. Anti-static and in a complimentary colour. Use the form at the bottom to order.

ERS AVAILABLE... BBC DUST COVERS AVAILABLE... BBC

Please supply me with :
A sample copy of LASERBUG @ £1.00
A 12 Month subscription to LASERBUG @ £12.00 for 12 issues of the magazine
A 6 Month subscription to LASERBUG @ £6.00 for 6 issues of the magazine
An overseas subscription to LASERBUG @ £14.00 (Surface Mail – write for details of air mail)
..... LASERBUG Dust Cover(s) @ £3.25 each

I enclose a cheque/PO for £.....made payable to LASERBUG

NAME .....

ADDRESS .....

.....

Please send the completed form to: LASERBUG Dept. PC, 10 Dawley Ride, Colnbrook, Slough, Berks., SL3 0QH.


● Circle No. 197

Berol disc pen

ORDINARY PENS can damage discs and — even worse — cause loss of data which may be priceless and irreplaceable. Now Berol has launched a specially designed pen which is suitable for writing on floppy-disc labels. It has a unique safety tip that will bend before the floppy is damaged if the user presses too heavily.

The Berol is a well-designed British-made pen suitable for many types of fine writing and figure work, for flowcharting and for use with stencils. It is available in black, blue, green and red at a retail price of 45p.

For further information, contact Berol Ltd, Oldmeadow Road, King's Lynn, Norfolk. Telephone: (0533) 672705.

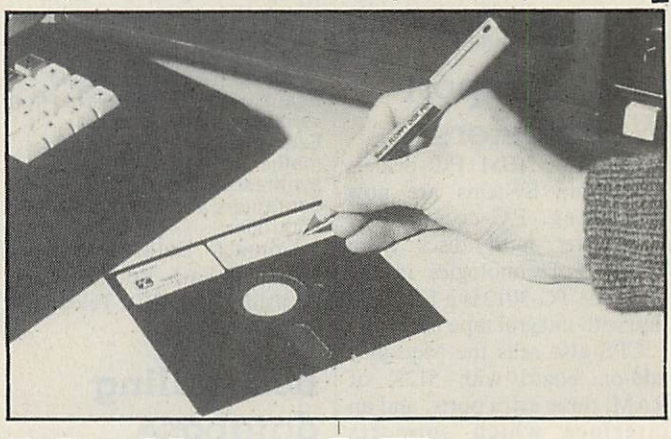


Midland Fair

THE COMPUTER FAIR has been a great success in London and Manchester. Now it is paying its first visit to the Midlands. It will be held at Bingley Hall in Birmingham on April 28-30. The Fair aims to display the widest possible range of home and personal micros, small business systems, games and other software.

By special arrangement with British Rail, low-price tickets are available from many stations. For example, you can travel from Berkshire or Gwent for only £10, or from Derbyshire and Leicestershire for only £5.50. These prices include the £2 admission charge to the exhibition, and children under 16 are half-price. For the cost from your local station contact British Rail at 021-643 2711.

The Computer Fair is sponsored by *Practical Computing* and *Your Computer* magazines — see the advertisement which is on page 186 of this issue.


Rair's 3/60S runs MP/M-86

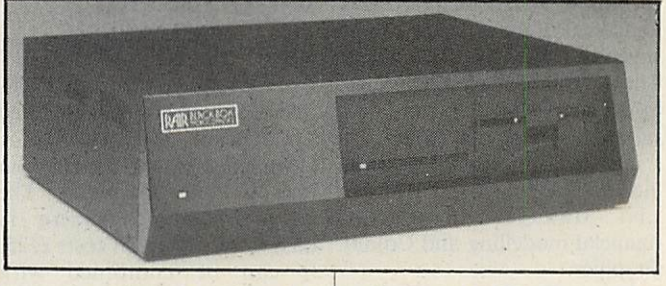

RAIR has launched another 16-bit micro to accompany the recent Rair 16. It is a new version of the old Black Box, designated the 3/60S. It features an Intel 8088 CPU, 256K of RAM and both floppy and hard discs. The floppy is 1Mbyte and the hard disc 19Mbyte, both unformatted. The operating system is MP/M-86.

The 3/60S is intended for multi-user, multi-tasking systems and will be sold both by Rair and by OEMs. Contact Rair by telephoning 01-836 6921.


More news on page 29

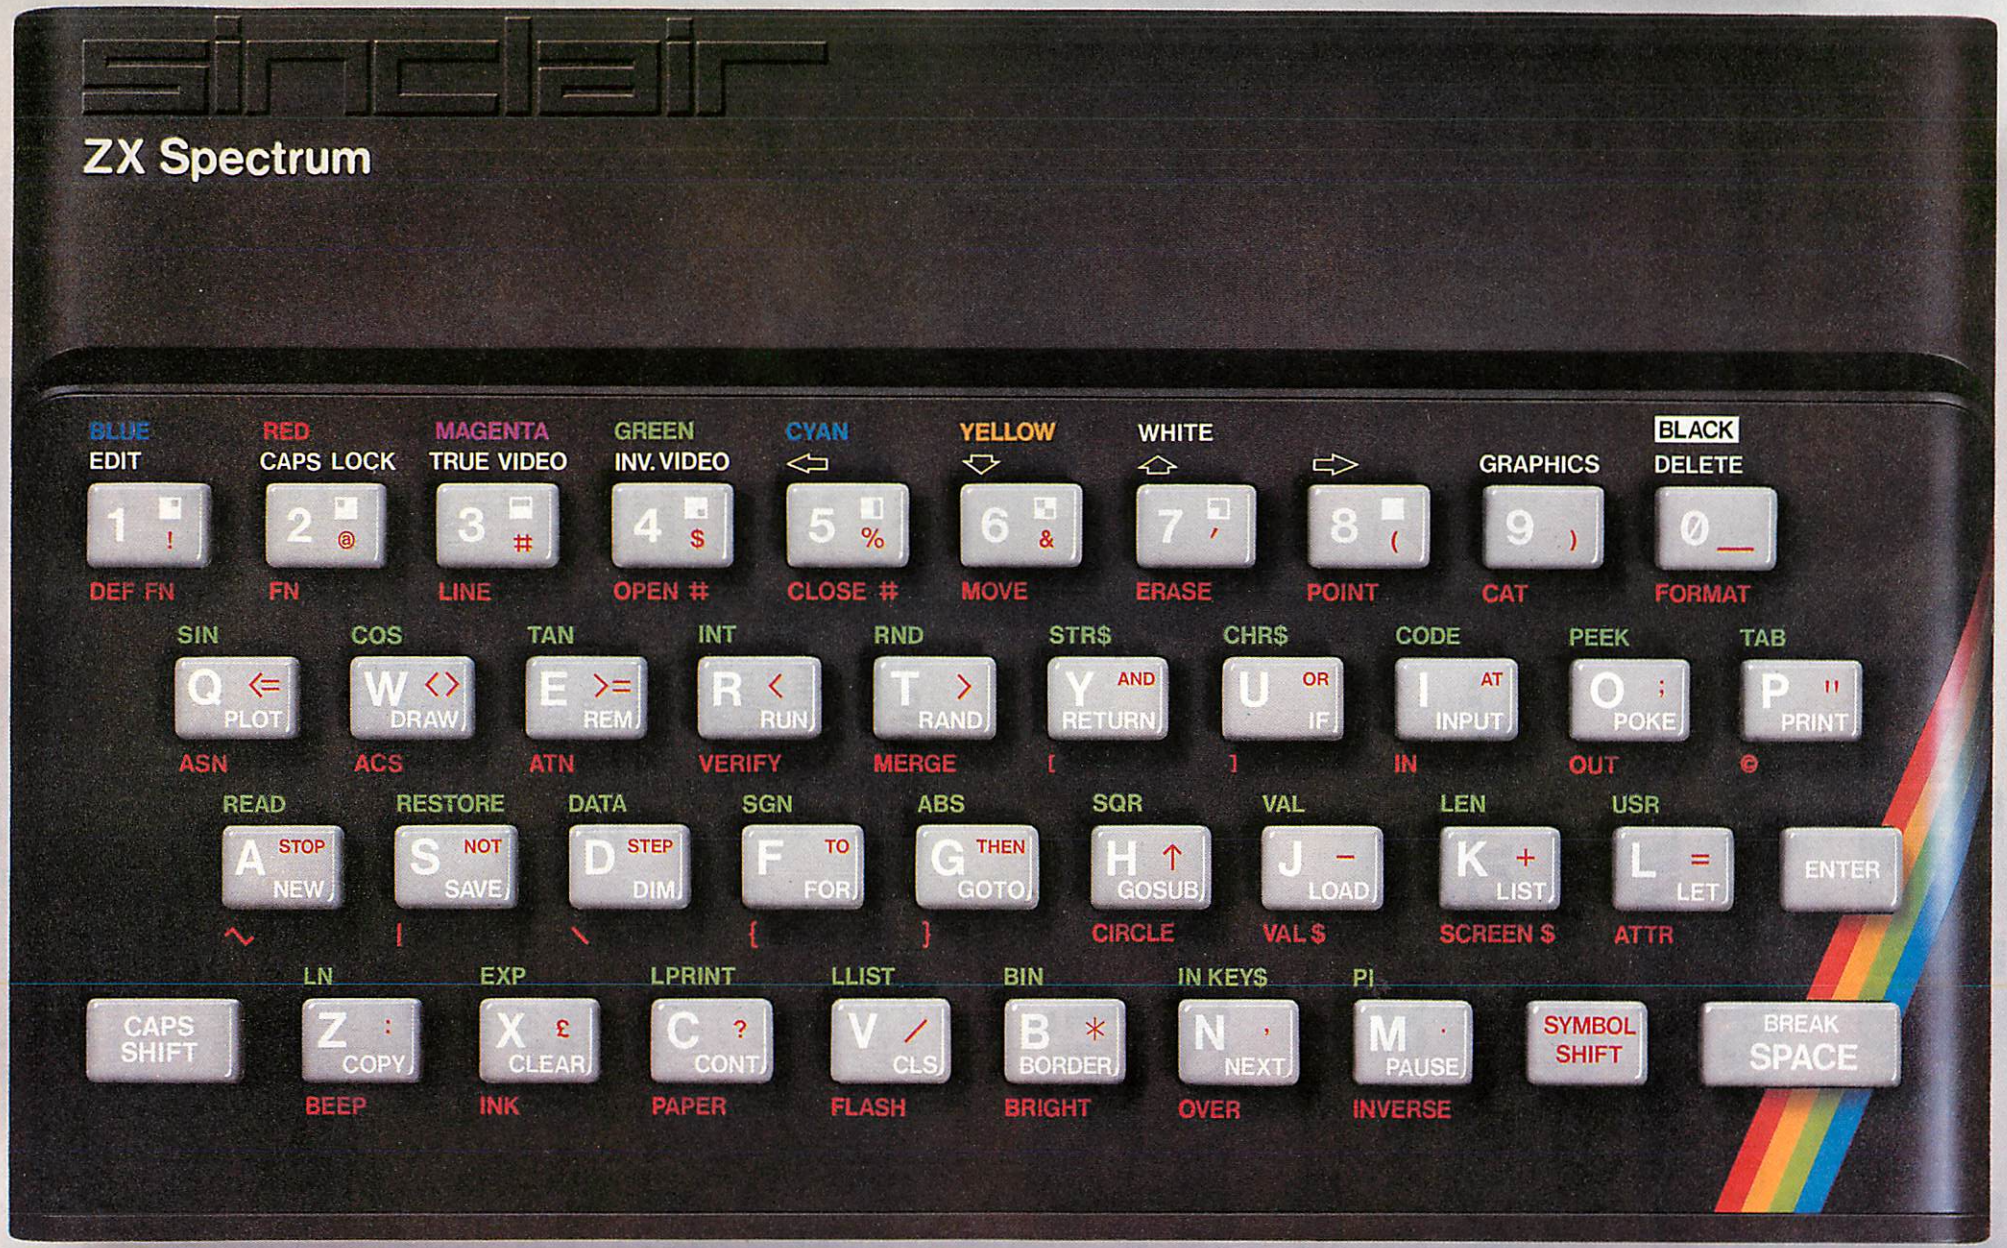
sinclair
ZX Spectrum
BLUE EDIT
RED CAPS LOCK
MAGENTA TRUE VIDEO
GREEN INV. VIDEO
CYAN
YELLOW
WHITE
GRAPHICS
BLACK DELETE
1 ! DEF FN
2 @ FN
3 # LINE
4 $ OPEN #
5 % CLOSE #
6 & MOVE
7 ' ERASE
8 (POINT
9) CAT
0 _ FORMAT
SIN COS TAN INT RND STR$ CHR$ CODE PEEK TAB
Q ≤ PLOT ASN
W <> DRAW ACS
E >= REM ATN
R < RUN VERIFY
T > RAND MERGE
Y AND RETURN [
U OR IF]
I AT INPUT IN
O ; POKE OUT
P " PRINT ©
READ RESTORE DATA SGN ABS SQR VAL LEN USR
A STOP NEW ~
S NOT SAVE |
D STEP DIM \
F TO FOR {
G THEN GOTO }
H ↑ GOSUB CIRCLE
J − LOAD VAL $
K + LIST SCREEN $
L = LET ATTR
ENTER
LN EXP LPRINT LLIST BIN IN KEY$ PI
CAPS SHIFT
Z : COPY BEEP
X £ CLEAR INK
C ? CONT PAPER
V / CLS FLASH
B * BORDER BRIGHT
N , NEXT OVER
M . PAUSE INVERSE
SYMBOL SHIFT
BREAK SPACE

Sinclair ZX Specti

16K or 48K RAM... full-size moving-key keyboard... colour and sound... high-resolution graphics...

From only £125!

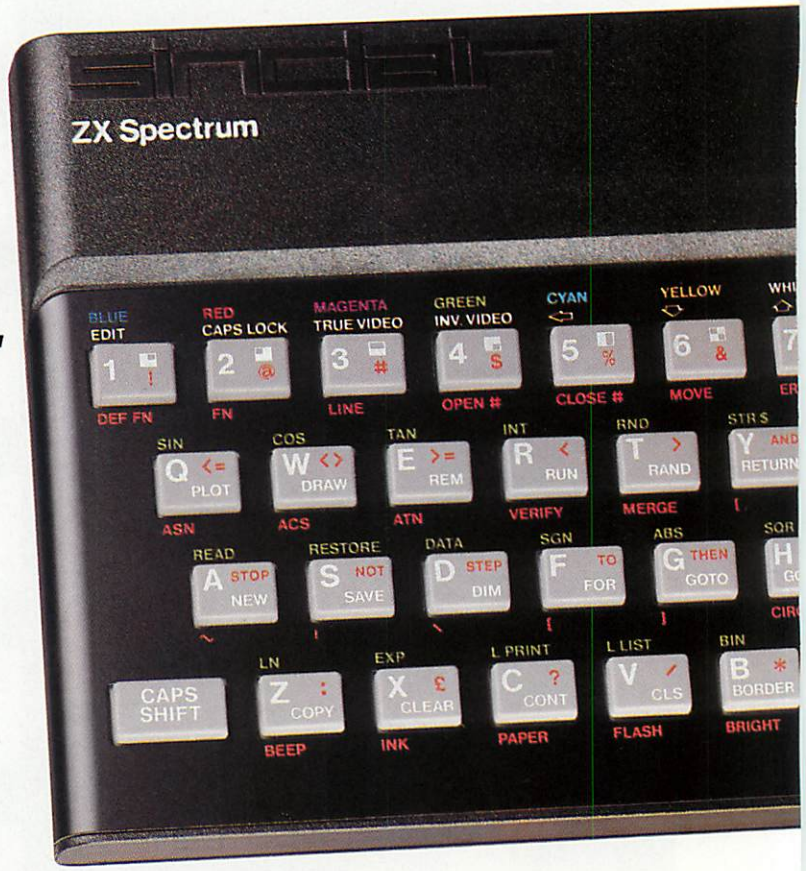

First, there was the world-beating Sinclair ZX80. The first personal computer for under £100.

Then, the ZX81. With up to 16K RAM available, and the ZX Printer. Giving more power and more flexibility. Together, they've sold over 500,000 so far, to make Sinclair world leaders in personal computing. And the ZX81 remains the ideal low-cost introduction to computing.

Now there's the ZX Spectrum! With up to 48K of RAM. A full-size moving-key keyboard. Vivid colour and sound. High-resolution graphics. And a low price that's unrivalled.

Professional power– personal computer price!

The ZX Spectrum incorporates all the proven features of the ZX81. But its new 16K BASIC ROM dramatically increases your computing power.

You have access to a range of 8 colours for foreground, background and border, together with a sound generator and high-resolution graphics.

You have the facility to support separate data files.

You have a choice of storage capacities (governed by the amount of RAM). 16K of RAM (which you can uprate later to 48K of RAM) or a massive 48K of RAM.

Yet the price of the Spectrum 16K is an amazing £125! Even the popular 48K version costs only £175!

You may decide to begin with the 16K version. If so, you can still return it later for an upgrade. The cost? Around £60.

Ready to use today, easy to expand tomorrow

Your ZX Spectrum comes with a mains adaptor and all the necessary leads to connect to most cassette recorders and TVs (colour or black and white).

Employing Sinclair BASIC (now used in over 500,000 computers worldwide) the ZX Spectrum comes complete with two manuals which together represent a detailed course in BASIC programming. Whether you're a beginner or a competent programmer, you'll find them both of immense help. Depending on your computer experience, you'll quickly be moving into the colourful world of ZX Spectrum professional-level computing.


There's no need to stop there. The ZX Printer – available now – is fully compatible with the ZX Spectrum. And later this year there will be Microdrives for massive amounts of extra on-line storage, plus an RS232 / network interface board.



Key features of the Sinclair ZX Spectrum

- Full colour – 8 colours each for foreground, background and border, plus flashing and brightness-intensity control.
- Sound – BEEP command with variable pitch and duration.
- Massive RAM – 16K or 48K.
- Full-size moving-key keyboard – all keys at normal typewriter pitch, with repeat facility on each key.
- High-resolution – 256 dots horizontally x 192 vertically, each individually addressable for true high-resolution graphics.
- ASCII character set – with upper- and lower-case characters.
- Teletext-compatible – user software can generate 40 characters per line or other settings.
- High speed LOAD & SAVE – 16K in 100 seconds via cassette, with VERIFY & MERGE for programs and separate data files.
- Sinclair 16K extended BASIC – incorporating unique 'one-touch' keyword entry, syntax check, and report codes.

um

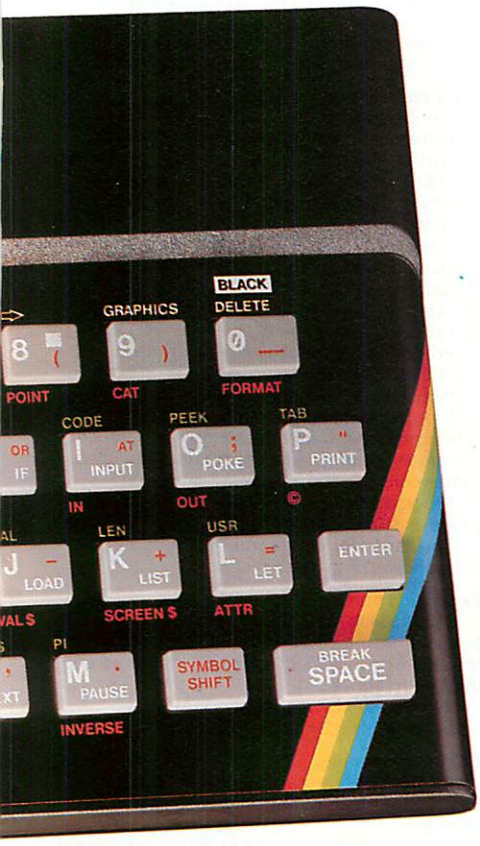

ZX Spectrum software on cassettes – available now

The Spectrum software library is rowing every day. Subjects include ames, education, and business/ ousehold management. Flight imulation...Chess...Planetoids... istory...Inventions...VU-CALC...VU-3D .Club Record Controller...there is omething for everyone. And they all ake full use of the Spectrum's colour, ound, and graphics capabilities. You'll eceive a detailed catalogue with your pectrum.

ZX Expansion Module

This module incorporates the three unctions of Microdrive controller, local rea network, and RS232 interface. onnect it to your Spectrum and you can ontrol up to eight Microdrives, ommunicate with other computers, and rive a wide range of printers.

The potential is enormous, and the odule will be available in the early part f 1983 for around £30.

sinclair

Sinclair Research Ltd, Stanhope Road, Camberley, Surrey GU15 3PS.
Tel: Camberley (0276) 685311.

The ZX Printer – available now

Designed exclusively for use with the Sinclair ZX range of computers, the printer offers ZX Spectrum owners the full ASCII character set – including lower-case characters and high-resolution graphics.

A special feature is COPY which prints out exactly what is on the whole TV screen without the need for further instructions. Printing speed is 50 characters per second, with 32 characters per line and 9 lines per vertical inch.

The ZX Printer connects to the rear of your ZX Spectrum. A roll of paper (65ft long and 4in wide) is supplied, along with full instructions. Further supplies of paper are available in packs of five rolls.

The ZX Microdrive – coming soon

The new Microdrives, designed especially for the ZX Spectrum, are set to change the face of personal computing by providing mass on-line storage.

Each Microdrive can hold up to 100K bytes using a single interchangeable storage medium.

The transfer rate is 16K bytes per second, with an average access time of 3.5 seconds. And you'll be able to connect up to 8 Microdrives to your Spectrum via the ZX Expansion Module.

A remarkable breakthrough at a remarkable price. The Microdrives will be available in the early part of 1983 for around £50.





How to order your ZX Spectrum

BY PHONE – Access, Barclaycard or Trustcard holders can call 01-200 0200 for personal attention 24 hours a day, every day. BY FREEPOST – use the no-stamp needed coupon below. You can pay by cheque, postal order, Barclaycard, Access or Trustcard.

EITHER WAY – please allow up to 28 days for delivery. And there's a 14-day money-back option, of course. We want you to be satisfied beyond doubt – and we have no doubt that you will be.

To: Sinclair Research, FREEPOST, Camberley, Surrey, GU15 3BR. **Order**

Qty	Item	Code	Item Price £	Total £
	Sinclair ZX Spectrum – 16K RAM version	100	125.00	
	Sinclair ZX Spectrum – 48K RAM version	101	175.00	
	Sinclair ZX Printer	27	59.95	
	Printer paper (pack of 5 rolls)	16	11.95	
	Postage and packing: orders under £100	28	2.95	
	orders over £100	29	4.95	
			Total £	

Please tick if you require a VAT receipt ☐

*I enclose a cheque/postal order payable to Sinclair Research Ltd for £_____

*Please charge to my Access/Barclaycard/Trustcard account no.

*Please delete/complete as applicable

Signature

PLEASE PRINT

Name: Mr/Mrs/Miss

Address

PRC 904

FREEPOST – no stamp needed. **Prices apply to UK only.** **Export prices on application.**

Sinclair ZX Spectrum–technical data.

Dimensions

Width	233 mm
Depth	144 mm
Height	30 mm

CPU/ memory

Z80A microprocessor running at 3.5 MHz. 16K-byte ROM containing BASIC interpreter and operating system.

16K-byte RAM (plus optional 32K-byte RAM on internal expansion board) or 48K-byte RAM.

Keyboard

40-moving-key keyboard with full upper and lower case with capitals lock feature. All BASIC words obtained by single keys, plus 16 graphics characters, 22 colour control codes, and 21 user-definable graphics characters. All keys have auto repeat.

Display

Memory-mapped display of 256 pixels x 192 pixels; plus one attributes byte per character square, defining one of eight foreground colours, one of eight background colours, normal or extra brightness and flashing or steady. Screen border colour also settable to one of eight colours. Will drive a PAL UHF colour TV set, or black and white set (which will give a scale of grey), on channel 36.

Sound

Internal loudspeaker can be operated over more than 10 octaves (actually 130 semitones) via basic BEEP command. Jack sockets at the rear of computer allow connections to external amplifier/ speaker.

Graphics

Point, line, circle and arc drawing commands in high-resolution graphics.
16 pre-defined graphics characters plus 21 user-definable graphics characters. Also functions to yield character at a given position, attribute at a given position (colours, brightness and flash) and whether a given pixel is set. Text may be written on the screen on 24 lines of 32 characters. Text and graphics may be freely mixed.

Colours

Foreground and background colours, brightness and flashing are set by BASIC INK, PAPER, BRIGHT and FLASH commands. OVER may also be set, which performs an exclusive–or operation to overwrite any printing or plotting that is already on the screen. INVERSE will give inverse video printing. These six commands may be set globally to cover all further PRINT, PLOT, DRAW or CIRCLE commands, or locally within these commands to cover only the results of that command. They may also be set locally to cover text printed by an INPUT statement. Colour-control codes, which may be accessed from the keyboard, may be inserted into text or program listing, and when displayed will override the globally set colours until another control code is encountered. Brightness and flashing codes may be inserted into program or text, similarly. Colour-control codes in a program listing have no effect on its execution. Border colour is set by a BORDER command. The eight colours available are black, blue, red, magenta, green, cyan, yellow and white. All eight colours may be present on the screen at once, with some areas flashing and others steady, and any area may be highlighted extra bright.

Screen

The screen is divided into two sections. The top section – normally the first 22 lines – displays the program listing or the results of program or command execution. The bottom section – normally the last 2 lines – shows the command or program line currently being entered, or the program line currently being edited. It also shows the report messages. Full editing facilities of cursor left, cursor right, insert and delete (with auto-repeat facility) are available over this line. The bottom section will expand to accept a current line of up to 22 lines.

Mathematical operations and functions

Arithmetic operations of +, –, ×, ÷, and raise to a power. Mathematical functions of sine, cosine, tangent and their inverses; natural logs and exponentials; sign function, absolute value function, and integer function; square root function, random number generator, and pi.

Numbers are stored as five bytes of floating point binary – giving a range of $+3\times10^{-39}$ to $+7\times10^{38}$ accurate to $9\frac{1}{2}$ decimal digits.

Binary numbers may be entered directly with the BIN function. =, >, <, >=, <= and <> may be used to compare string or arithmetic values or variables to yield 0 (false) or 1 (true). Logical operators AND, OR and NOT yield boolean results but will accept 0 (false) and any number (true).

User-definable functions are defined using DEF FN, and called using FN. They may take up to 26 numeric and 26 string arguments, and may yield string or numeric results.

There is a full DATA mechanism, using the commands READ, DATA and RESTORE.

A real-time clock is obtainable.

String operations and functions

Strings can be concatenated with +. String variables or values may be compared with =, >, <, >=, <=, <> to give boolean results. String functions are VAL, VAL$, STR$ and LEN. CHR$ and CODE convert numbers to characters and vice versa, using the ASCII code.

A very powerful string slicing mechanism exists, using the form a$ (x TO y).

Variable names

Numeric – any string starting with a letter (upper and lower case are not distinguished between, and spaces are ignored).
String – A$ to Z$.
FOR-NEXT loops – A-Z.
Numeric arrays – A-Z.
String arrays – A$ to Z$.

Simple variables and arrays with the same name are allowed and distinguished between.

Arrays

Arrays may be multi-dimensional, with subscripts starting at 1. String arrays, technically character arrays, may have their last subscript omitted, yielding a string.

Expression evaluator

A full expression evaluator is called during program execution whenever an expression, constant or variable is encountered. This allows the use of expressions as arguments to GOTO, GOSUB, etc.

It also operates on commands allowing the ZX Spectrum to operate as a calculator.

Cassette interface

The ZX Spectrum incorporates an advanced cassette interface. A tone leader is recorded before the information to overcome the automatic recording level fluctuations of some tape recorders, and a Schmitt trigger is used to remove noise on playback.

All saved information is started with a header containing information as to its type, title, length and address information. Program, screens, blocks of memory, string and character arrays may all be saved separately.

Programs, blocks of memory and arrays may be verified after saving to confirm successful saving.

Programs and arrays may be merged from tape to combine them with the existing contents of memory. Where two line numbers or variables names coincide, the old one is overwritten.

Programs may be saved with a line number, where execution will start immediately on loading.

The cassette interface runs at 1500 baud, through two 3.5 mm jack plugs.

Expansion port

This has the full data, address and control busses from the Z80A, and is used to interface to the ZX Printer, the RS232 and NET interfaces and the ZX Microdrives.

IN and OUT commands give the I/O port equivalents of PEEK and POKE.

ZX81 compatibility

ZX81 BASIC is essentially a subset of ZX Spectrum BASIC. The differences are as follows.

FAST and SLOW: the ZX Spectrum operates at the speed of the ZX81 in FAST mode with the steady display of SLOW mode, and does not include these commands.

SCROLL: the ZX Spectrum scrolls automatically, asking the operator "scroll?" every time a screen is filled.

UNPLOT: the ZX Spectrum can unplot a pixel using PLOT OVER, and thus achieves unplot.

Character set: the ZX Spectrum uses the ASCII character set, as opposed to the ZX81 non-standard set.

ZX81 programs may be typed into the ZX Spectrum with very little change, but may of course now be considerably improved. The ZX Spectrum is fully compatible with the ZX Printer, which can now print out a full upper and lower case character set, and the high resolution graphics; using LLIST, LPRINT and COPY.
ZX81 software cassettes and the ZX 16K RAM pack will not operate with the ZX Spectrum.

sinclair
ZX Spectrum

Sinclair Research Ltd, Stanhope Road, Camberley, Surrey, GU15 3PS. Tel: Camberley (0276) 685311.

● Circle No. 115

Computer of the Year, 1982

PRACTICAL COMPUTING has recently participated with *Chip* magazine in Germany in voting for the 1982 Computer of the Year. Other magazines involved were *Databus* from Holland, *Microsystems* from France, *Bit* from Italy, Chip from Spain and *Personal Computing* from the U.S.

One problem was that not all the different countries have the same micros. In particular our vote for the Sinclair Spectrum in the home computer class was wasted, as exports had not then started.

The results were: Home Computer of the year, the Vic-20, Personal Computer of the year, the Sirius 1. Incidentally, the Vic-20 is called the VC-20 in Germany as "vic" sounds extremely rude to German ears.

London Computer Festival

THE ASSOCIATION of London Computer Clubs is holding its annual Fair at the Central Hall, Westminster, from April 14 to 16. This year it will be part of the first London Computer Festival, sponsored by the GLC and other bodies, which runs from April 3 to 17. For further details contact B M Goddard at 55 The Chine, London N21. Telephone: 01-360 0021.

Vertical marketing

VERTICAL MARKETING is the name of the current micro sales game with packages for accountants, solicitors, doctors, race-horse trainers, vets, butchers, bakers and so on. Macro profits beckon those who manage to fill a particular niche.

A two-day bash, starting on March 25, is being held at the Crest Hotel, Heathrow, the intention being to fill a gaping vertical gap in the computer conference market. It is called Selecting a Profitable Microcomputer Market, and is aimed at micro dealers.

The attendance fee is £165 and further details are available from Christine White, Interco Business Consultants, 1 Lancaster Park, Richmond, Surrey. Telephone: 01-948 3111.

Texet TX-8000 colour micro

WHEN WE REVIEWED the Oric 1 for this issue, there was only one colour computer for under £100. Soon there will be two. Texet — it claims to have been the first U.K. company to produce a pocket calculator in 1971 — has announced the Texet TX-8000 Colour Computer. It is an 8K, eight-colour home micro costing £98, which is only £1.95 less than the 16K Oric. However, Texet offers an upgrade to 64K for only £52, which will undercut both the Oric and the 48K Spectrum.

The keyboard is "full size moving-key rubber", and the use of a single Shift key and single-key space-bar suggest it will be just like the one on the Spectrum. There is one major difference between the TX-8000 and the Sinclair rival: the TX-8000 uses a 6502, not the Z-80.

Contact Texet, Commercial Avenue, Stanley Green Trading Estate, Cheadle Hulme, Cheshire. Telephone: 061-486 9231.

Trade Show '83

PRACTICAL COMPUTING is sponsoring The Computer Trade Show '83, to be held at the Wembley Conference Centre from April 26-28. The conference will include a trade exhibition and a series of seminars designed to bring manufacturers face to face with sellers.

The show is aimed at dealers, distributors, retailers, independent sales organisations, OEMs, systems houses and software houses. The fee is £90 for one day, £170 for two days, plus VAT.

Contact the Computer Trade Conference, IPC Business Press Ltd, Surrey House, Throwley Way, Sutton, Surrey SM1 4QQ. Telephone: 01-643 8040.

Business Press

THE NAME OF *Practical Computing's* parent company has been changed from IPC Business Press Ltd to Business Press International Ltd. This change has been made to reflect the very wide range of markets covered by the 100 publications of the company, and to identify its prime position as the world leader of business publishing.

Don't spend more than £500 on a Local Area Network until you know about Clearway



Clearway

The best low cost local area networking device

Clearway brings the benefits of Local Area Networking to you **at very low cost.** So if you're thinking about a networking system be sure to find out more about Clearway, the low cost solution that anybody can install.

Available from Johnson Microcomputers, Camberley (0276) 20446, Oxford (0865) 721461, Bristol (0272) 422061

Mail the coupon now for full information

Real Time Developments Limited, Lynchford House, Lynchford Lane, Farnborough, Hampshire GU14 6JA. Telephone: Farnborough (0252) 546213 Telex: 858893 Fletel G

I am interested in Clearway – the low cost Networking System, please send me details

Name.....

Position.....

Address.....

.....

.....

Telephone.....

Send to: Real Time Developments Limited,
Lynchford House, Lynchford Lane,
Farnborough, Hampshire GU14 6JA
Telephone: Farnborough (0252) 546213
Telex: 858893 Fletel G

8304PC

● Circle No. 116

Mini Micro or Super Micro?

Only Cromemco offer this depth of choice

Two solutions representing the extremes of microcomputer evolution–both from the Cromemco stable –both breaking new ground in microcomputer technology–both unbelievably cost competitive in their specific areas of application.



C10 Mini Micro- The Manager's Micro for just £1195 complete. Designed for the Manager's Desk, or his staff. A stand-alone Desk Top 64K, Z80A, single board Personal Computer–with 12″ easy to read, green phosphor screen, detachable keyboard with optional function keys and numeric pad, plus 390K floppy diskette drive; supplied complete with CP/M compatible operating system, easy to use word processing and financial planning/spread sheet application software and 32K structured BASIC.
The Cromemco C10 is the first stand-alone micro to make computer power cost effective at an individual by individual desk top level throughout an organisation or company, with the opportunity of adding full networking capabilities at a later date.



68000 Super Micro- The DP Professional's Dual Processor Micro. The Dual Processor Micro-computer with a Motorola 68000 16 Bit processor **plus** an on-board software selectable 8 Bit Z80A. You have a choice of S100 bus systems with comprehensive I/0 options for business, scientific and research applications, and memory expansion of up to 4M Bytes. You have the option of 5″ or 8″ floppy diskette drives, or Winchester Hard Disk subsystems up to 70+M Bytes, with a choice of CP/M compatible system software or Cromemco's Cromix; a 12 station Unix-like multi-user, multi-tasking operating system. Cromemco's comprehensive 16 Bit and 8 Bit development language library includes FORTRAN, BASIC, PASCAL, COBOL, C, RPG11, Assembler, LISP and RATFOR.

If hardware and software compatibility, and future networking potential are prime considerations for your organisation, then Cromemco must be the first and only choice.

Comart are Cromemco's longest standing, most experienced European Distributor. So with Cromemco choice, and Comart support you won't have to write off the past to step on forward into the future.

comart

Specialists in microcomputers

Please send me full details on Cromemco Systems. I am particularly interested in ☐ The C10 Manager's Micro, ☐ The 68000 DP Professional Computers ☐ All Cromemco products.

Name

Position

Company

Address

Tel

Cromemco

Developing through evolution

Comart Limited,
Little End Road,
Eaton Socon, St. Neots,
Huntingdon,
Cambridgeshire PE19 3JG.
Telephone 0480 215005.
Telex 32514 Comart G.

A member of the Comart group of companies

Unix is a trademark of Bell Telephone Laboratories.

CP/M is a trademark of Digital Research Incorporated.

Z80A is a trademark of the Zilog Corporation.

Cromemco and Cromix are trademarks of Cromemco Incorporated.

● Circle No. 117



NEC turns 28 years of computer experience to your personal advantage.

It takes a great computer company to make a great personal computer. And from the start, NEC has been a pioneer in computer technology. In fact, we invented the all-semiconductor computer in 1959. Now, hundreds of innovations later, we've made it personal.

We present the PC-8000, a powerful and friendly business tool that can help you get more done in a day than you ever could before. It combines some of the most reliable hardware on the market with application packages designed to make the most of its unique features. In addition, the PC-8000 accepts popular CP/M® business software, making its possibilities virtually limitless.

The entire PC-8000 system is now available through better computer dealers across the country. And that means more than hardware. It means effective software, the finest documentation and extensive training to help you get the most from your personal computer. So why not turn our system to your personal advantage now.

(CP/M is a registered trademark of Digital Research Inc.)

NEC
NEC Corporation
Tokyo, Japan

NEC BUSINESS SYSTEMS (EUROPE) LTD.
NEC House, 164/166 Drummond Street,
London N.W.1 3HP UK
Telephone: 01-388-6100 Telex: 261914

● Circle No. 118

Write for more information about the NEC PC-8000.

NAME _____


COMPANY _____

ADDRESS _____

Attach this coupon to your letterhead and mail it to NEC BUSINESS SYSTEMS (EUROPE) LTD., NEC House, 164/166 Drummond Street, London N.W.1 3HP, U.K.

The business connection





TABS LONDON
Free demonstrations and consultations at the National Electronics Centre in the World Trade Centre.
Phone 01-488 2400.

Accounting Business Systems

TABS

Modular microcomputer software for every business.

No two businesses have the same software requirements. Whether your needs are straightforward or sophisticated, TABS can provide you with a complete range of modular business software to run on the IBM Personal Computer.

EasyTABS is designed for the smaller business where straightforward solutions are required.

Standard TABS accommodates more sophisticated applications where greater flexibility and integration is necessary.

SuperTABS is the logical choice for larger businesses, requiring fully multi-tasking, very flexible, integrated systems.

Only TABS has such a comprehensive range of business software with the scope to cater for service, retail, wholesale and manufacturing industries. At company or departmental level you will benefit enormously from rapid access to up-to-the-minute information helping you to improve efficiency, make the right business decisions and maximise your profitability.

Seminars and Open Days.
ABERDEEN 28th April, Tree Tops Hotel, 0224-33377. BIRMINGHAM/COVENTRY 10th May, Excelsior Hotel, 021-743-8141. CARDIFF 14th April, Post House, 0222-731212. CAMBRIDGE 24th May, Cunard Cambridgeshire Hotel, 0954-80555. CHELTENHAM/GLOUCESTER 12th April, Golden Valley Hotel, 0242-32691. GREATER MANCHESTER 12th May, Excelsior Hotel, 061-437-5811. NORWICH 26th May, Post House Hotel, 0603-56431. TYNESIDE 26th April, Post House, Washington, 0632-462264.

Please fill in the coupon for more information about TABS on the IBM PC – remember, our modular system expands as you do so that when you start with TABS there's no need to stop. **Tel: 0264-58933**

Please tick box(es) for further details and return coupon to PC 4
TABS Ltd, Sopers House, Chantry Way, Andover, Hants SP10 1PE

- ☐ TABS Systems & Services brochure & price list
- ☐ Dealer information
- ☐ Free estimate service
- ☐ User book £10.00 incl p & p
- ☐ Send me Keeping TABS
- ☐ Details of seminars and open days
- ☐ Video training tapes

I enclose cheque/postal order for £ _____
Name _____
Company _____
Position _____
Address _____
_____ Phone _____

HP joins High Street gang

Hewlett-Packard has always focused on the engineering and scientific market. Ian Stobie found HP set to fight for home and office sales.

FOR SOME TIME the Hewlett-Packard presence has been hovering expensively on the fringes of the volume personal-computer market. But a major TV advertising campaign and a two-day public exhibition at the Barbican Centre in London means that HP is moving beyond its traditional engineering and scientific base and pushing its personal computers into the rough and tumble of retail selling to ordinary consumers.

The TV promotion centres on the book-sized HP-75C portable computer, costing about £760 and described fully in *Practical Computing's* November 1982 issue and the January 1983 Portables special. Among the other HP hardware on show at the HP Personal Computer Event, as the Barbican exhibition was called, were the established Series 80 range of desk-top machines, the dual Z-80 based series 100 Model 20 micro launched at the end of last year, and the brand-new series 200 Model 16 16-bit micro.

The Model 16 is perhaps the most interesting machine. At the exhibition it was being demonstrated running the MBA package from Context, which integrates four standard applications — word processing, spread-sheet analysis, chart making and filing — into a single, data-compatible whole. With both Visicorp's VisiOn and Apple's Lisa due in the Summer, integrated software looks like being a major force in the microcomputer market this year. Although primarily aimed at engineering and scientific users, the Model 16 is a neat and compact machine, and with this type of software it may also prove attractive for use in a general office environment. HP has not yet finalised European arrangements for the Context package, but it could cost around £600 and be available almost immediately.

The main unit is very compact, measuring only 282mm. high by 315mm. wide by 488mm. deep. It houses the 9in. CRT display, a Motorola 68000 16-bit processor running at 8MHz and from 128K to 1Mbyte of RAM. The screen has 300-by-400 dot resolution, fully supported by the powerful HP Basic graphics features, and can display 25 lines of 80 characters text.

Use of the Motorola chip is a departure for HP, which usually builds around processors of its own design. The 68000 is a true 16-bit processor, moving data around in 16-bit chunks on the data bus and capable of addressing up to 16Mbyte of memory with its 32-bit wide address registers. To the user this means that the Model 16 is a fast machine, especially suited to calculation-intensive tasks.

The detached keyboard unit has a rotating knob mounted on the left, above the top row of keys. It is called simply the Knob, and can be used as a pointing device to move the cursor around the screen, to select menu options, for example, or to point to objects on the screen. Alternatively, it can control, via software, instruments attached to the Model 16. The Knob can be thought of as a simpler, one-dimensional version of the Mouse device used by the Lisa and VisiOn. HP's concept was originally developed for instrument-control applications and has been used on a larger non-retail HP series 200 machines for such tasks as moving radar masts. It is fully supported by Basic, with the Knob function and the On Knob Goto, On Knob Gosub and On Knob Call statements added to the language.



Pricing follows the HP tradition — it is not low. A typical 512K RAM system with screen and keyboard is £3,889 plus VAT, without discs. The twin 3.5in. disc unit is another £1,351, and Basic costs £247, so it would cost £5,487 to put such a system on your desk.

Basic on HP machines is generally a much more powerful language than micro-computer users are accustomed to. A typical ROM-based Basic like Applesoft occupies 12K including the system monitor. HP Basic 2.0 as supplied for the Model 16 occupies 256K and uses a further 21K of RAM as workspace. It includes a full-screen editor, allowing you to scroll the whole program under the screen window as you do with a word processor, and comprehensive insert, delete and renumber facilities.

The Basic is semi-compiled to speed up execution. Errors are checked for line by line as the program is entered in the normal microcomputer way, but when you run the program the first thing the system does is compile a symbol table, and this can trap further errors before any damage is done.

HP Basic can handle very large and very small numbers, with exponents in the range of plus or minus 308, and can display them to 16 digits precision. Strings can be up to 32K in length, which is far beyond what most Basics can handle and is put to use when the system is being used for data capture. The syntax for substring manipulation differs from Microsoft-style Basic and is closer to the proposed ANSI standard, taking the form

```
A$[start position, finish position]
```

and


```
A$[start position; no. of characters]
```

Arrays can have up to six dimensions, and upper and lower limits can be set for array subscripts, which can be very large or even negative.

HP Basic is not a toy language and fully supports structured-programming techniques if you wish to employ them. Named subroutines can be defined and then called with a parameter list. They can be saved separately on disc and later merged into other programs, so you can simply build up libraries of reusable subroutines. Variables within subroutines can be specified as local to that subroutine or common to the whole program.

A full set of structured programming constructs is available, including Repeat-Until, Loop-Until, and Do-While. Case and Select as well as If-Then-Else-Endif are provided for selecting conditional actions. For selecting actions under the control of events in the outside world an On event Goto/Gosub/Call statement can be used with On Intr, On Timeout, On Key and On Knob. If HP Basic still does not seem adequate, there is a similar comprehensive implementation of Pascal available for the Model 16.

Circle No. 119

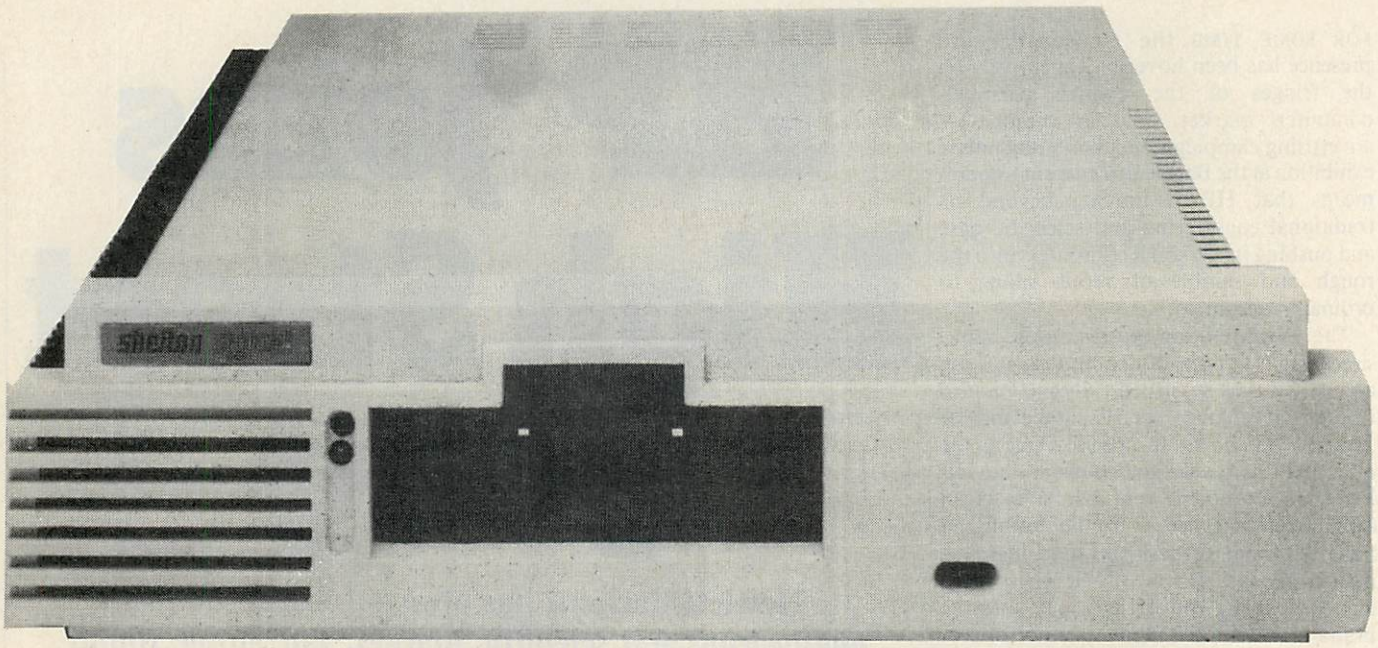


SIG/NET-OFFERING DEALERS A GREAT DEAL

If you are an experienced dealer in the South-East looking for the right micro to handle, you will find it with Sig/net.

At DPLC, the South-East distributor for Sig/net, we feel that we offer dealers the perfect package: a micro system with limitless potential, at a very competitive price with generous dealer discounts and margins, combined with full hardware and marketing support. In return we expect our dealers to be skilled in the installation of packages — either for specific vertical markets or general business applications.

Sig/net 2 is a modular system, housed in a compact unit, to which a wide range of peripherals can be attached. A system may start with a single workstation with floppy disc and be expanded to a multi-user system with virtually no restriction to the number of workstations and hard disc capacity. There are already more than 1,000 users in the UK.

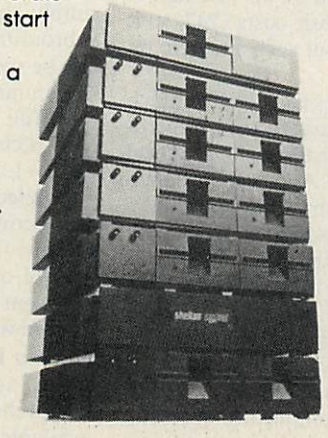

Because the Sig/net operating system is CP/M compatible, it enables you to provide bespoke software easily, in addition to the very wide range of proven business software already available on CP/M.

The successful British manufacturer, Shelton Instruments, is undertaking a programme of advertising, PR and exhibitions. Enquiries generated in the South-East from these promotional activities are passed on to the dealers, through DPLC. Comprehensive product brochures are also available.

To complement the Sig/net, we offer a range of terminals and printers. And there are appointed national and local organisations to provide after-sales maintenance to your customers.

To find out more details about a Sig/net dealership, fill in the coupon and return it to: DPLC Limited, 74-77 White Lion Street, London, N1. Telephone: 01-833 1111.

Please send me further details of the Sig/net dealership.

Name_____ Position_____

Company_____

Address _____

DPLC

DPLC Limited,
74-77 White Lion Street,
London, N1.
Telephone: 01-833 1111.

● **Circle No. 120**

Make way for the "People's Winchester"

I SUPPOSE that the vast majority of the readers of this magazine are never likely to want to build their own computer, and many still never need to know more about their hardware than the size of the RAM memory array. But before turning the page to find out more about the latest operating-system software, disc drives or games packs, spare a thought for the humble chip that made it all possible.

This column is dedicated to the chips which form the heart of all computers and many computer peripherals, and each month I will be lifting the curtain on that mysterious world of the electronic engineer and the computer designer by taking a closer look at the latest semiconductor chips, what they do and how they do it.


Even if you do not anticipate reaching for a soldering iron in the near future you should find it interesting; what's more you will steal a march on the readers of lesser magazines by gaining a shrewd idea of what to expect next from the microprocessor revolution. After all, today's chips will be used to make tomorrow's systems.

CP/M, as everyone knows, is *the* disc operating system for microcomputers. Is this because of its superior technical specification or the range of fancy features it offers? Alas no, it is simply because it has been around longer than most. It works with the 8080 and the Z-80 family of microprocessors, and most important of all there is a vast amount of software available at low cost to run under it.

Microcomputer users who do not have either the 8080 or the Z-80 in their machines sometimes go to extraordinary lengths to gain access to all that lovely CP/M software, as evidenced by the add-on Z-80 card available for the Apple and the 8080 emulator software available for the DEC PDP-11 family. Nothing, it seems, succeeds like success.

But technology marches on, and eight-bit microprocessors are soon to be replaced by the more powerful 16-bit devices like the Motorola 68000, and the Intel 8086. So is CP/M on its last legs? Thanks to CP/M-86 the latest verson of CP/M tailored to run on the Intel 8086 and its even more powerful offspring, the 80186 and the 80286 — the answer is no.

Of course competition is tougher now, and other operating systems for 16-bit machines such as the very elegant Unix will undoubtedly give CP/M-86 a run for its money. But my guess is that the no-frills

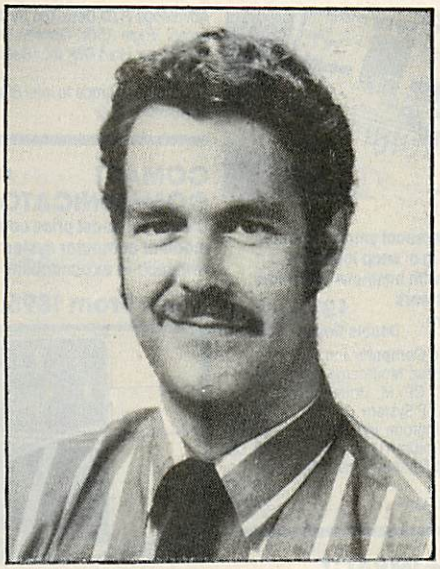

CP/M will remain with us for a long time yet. Certainly Intel must be thinking along those lines, because it has put the CP/M-86 code on to a 16K ROM chip coded the 80150.

CP/M in any of its versions normally resides on a disc, and is loaded into RAM during system initialisation by a small ROM-based bootstrap routine. It therefore takes up disc space, takes up

by Roy Coles

RAM space, and of course takes time to load. Having it available in a ROM is a big improvement.

Making up the 16K of firmware in the 80150 are three separate packages: the CCP or console command processor, the BDOS or basic disc operating system, and the BIOS or basic input/output sytem. The first two packages are pure CP/M-86 but the last has been developed by Intel to provide driver software for standard Intel peripheral devices such as the 8251 serial I/O controller, the 8255 parallel I/O controller, the 8275 CRT controller and, of course, the 8272 floppy-disc controller.

For most computer hobbyists bulk storage means cassette tapes or, for the lucky few, floppy discs. Yet the magnetic storage scene is changing fast, and before long even the humblest computer budget will find the funds for a low-cost micro-floppy drive or two.

The future lies with hard discs such as the Winchester, which consists of a rigid disc coated like a floppy and kept in a sealed container along with its associated read and write heads. The dust-free environment and the mechanical precision of the Winchester drive make it possible to pack much more information on to the floppy-sized magnetic disc, with the result that it is possible to pack tens of megabytes into the space previously required for hundreds of kilobytes.

Like all new developments, Winchester drives are expensive at the moment — but not for long, thanks to mass production and the omnipotent LSI chip. One device which will help to make the Winchester more attractive for use in low-cost personal computers is the μPD-7261 hard disc controller from NEC Electronics.

The 7261 is a 40-pin 5V operation NMOS chip. It is stacked to the pins with very clever circuitry, including an on-board microprocessor. The chip can handle as many as eight drives and under its own steam it can carry out the disc formatting, sector seek, read data and write data functions and so unload an otherwise onerus burden from the main processor. Data can be transferred to or from the chip at an incredible 12MHz rate, which puts it ahead of any current microprocessor. While it is reading the data it avoids mistakes by automatically detecting and correcting many errors by means of CRC or polynomial error-check codes generated during the write operation.

The on-board microprocessor is an eight-bit device with 64 bytes of RAM and 2.5K of ROM containing control code for the drive-management and data-transfer functions. The microprocessor makes the 7261 a "smart" chip which can be programmed to handle either of the two popular Winchester interface schemes, SMD or ST-506 — which are quite different in many respects. The microprocessor also acts as an interpreter of the hard-disc interface "language" which has 16 high-level commands such as Read Data, Write Data, Detect Error, and Seek.


Interfacing to the 7261 itself is made easier by the TTL compatibility of all the I/O lines, but some external logic is required between it and the drives. To take advantage of the high speed of the Winchester itself and the 12MHz transfer rate of the 7261 it will also be necessary to use a direct memory access, DMA, connection to the host microprocessor so that the whole disc sectors can be transferred without interruption.

With devices like the μPD-7261 becoming available, the "people's Winchester" cannot be too far away.

THE MOST DIFFICULT THING ABOUT GETTING A COMPUTER IS GETTING THE RIGHT ONE.

BBC MICROCOMPUTER


BBC Micro Model B.....364.00
Microvitec 14" Colour Monitor inc. Cables.....249.00
12" Monochrome Monitor.....90.00
Single Disk Drive 100K.....199.00
Dual Disk Drives 200K.....369.00
Dual d/s Disk Drives 800K.....619.00
Torch Z80 Disk Pack inc. CP/M Compatible Op. System 96K RAM.....780.00
Disk Interface.....95.00
Disk Cable.....15.00
Format Disk and Doc.....15.00
Epson MX80 FT III.....389.00
Games Paddles.....11.30
Selection of business, educational, graphics and games software available from.....3.50
Selection of teach yourself BBC publications



EPSON HX-20 PORTABLE COMPUTER

Diminutive fully featured business computer that is small and light enough to slip into a briefcase. Specification includes integrated LCD screen, printer and microcassette; 16K RAM expandable to 32K and its own rechargable power supply. Ideal for people on the move – data can be subsequently 'down loaded' on to a larger machine when you return to base.

402.00 ex. VAT



CROMEMCO C-10 PERSONAL COMPUTER

A full feature personal business computer system including software – for the price of a VDU. Also the entry point into the renowned Cromemco range.

1350.00 ex. VAT



C-10 SP Personal Computer Superpak inc. Z80A Processor, 64K Memory, Single 5¼" 390K Byte Floppy Disk, 24 × 80 Screen, CKBA Keyboard. CP/M Compatible Operating System, plus Word Processing, Financial Planning & 32K BASIC Software.....1350.00
Additional 5¼" Floppy Disk Drive.....510.00



OSBORNE

Truly portable personal small computer system housed in a 'snap together' case complete with business programs, so you can start work almost anywhere.

1375 ex. VAT
Double Density Version

Osborne Portable Computer inc. Standard Software – Wordstar, Mailmerge, Supercalc, MBASIC, CBASIC, CP/M: Double Density Version inc. USDC-P System.....1375.00
Double Density Upgrade inc. Fitting.....175.00
Screen Pack 80 Column Upgrade.....225.00
Screen Pack and Double Density Upgrade inc. Fitting.....350.00
Osborne to Epson Cable.....24.00


PRINTERS – IMPACT

Anadex DP9500A 132 Cols., 150CPS Matrix Printer with Graphics. 10, 12.5, 13.3, 16.4 Char/In, Low Noise.....1150.00
Anadex DP9501A 132 Cols, 150CPS Matrix Printer 10, 12, 15, 16.4 Char/In, Low Noise.....1150.00
Anadex DP9620A 200CPS Printer, Low Noise, 10, 12, 15, 16.4 Char/In 100 CPS in Double Pass Enhanced Mode.....1250.00
Anadex WP6000 Dual Mode Printer 132 Cols, 150/180CPS Correspondence Quality, 300/330CPS Draft and Graphics Mode. Diablo 630 Protocol Emulation.....1950.00
Epson MX80T/3 Tractor only 80CPS.....349.00
Epson MX80FT/3 Friction and Tractor.....389.00
Epson MX100FT/3 Friction and Tractor 100CPS.....499.00

Phone for new Epson model prices

PRINTERS – DAISY WHEEL

Brother HR1.....650.00
Brother 8300.....458.00
Crown Ranier – Brother 19CPS.....795.00
Diablo 620RO 25CPS.....995.00
Diablo 630RO.....1575.00
Smith Corona TP1.....475.00



NORTH STAR ADVANTAGE

Two versatile desk top options to choose from featuring high quality business graphics with either 720Kb floppy or 5Mb hard disk storage.

From 2195.00 ex. VAT


Advantage Desk-Top System inc. Keyboard, Graphics, Screen (Green), 64K Byte RAM, Z80A Processor, Serial Interface, Dual 350R Byte Diskette Drives and Business Graphics Software.....2195.00
Advantage H/D Desk-Top System, as above except single 350K Diskette Drive + 5M Byte 5" Winchester Hard Disk Inc. Business Graphics Software.....2995.00
Advantage upgrade to Intel 8088 Processor with 64KB Memory@.....320.00

COMART COMMUNICATOR

PRICES EXCL. VAT

Clearly the most price competitive modular computer system on the market with built-in expandability – inside and out.

Inc. CP/M **From 1895.00 ex. VAT**



COMART COMMUNICATOR Z80A MODULAR SYSTEMS

Comart CP100 'Communicator' Micro Computer: Z80A Processor, 64K Byte Memory, Dual 5¼" Floppy Diskette Drives each storing 390K Bytes of Data. Dual Serial and Parallel Ports. 10 Slot S100 Bus. CP/M Version 2 included.....1895.00
Comart CP200 as CP100 except Dual 790K Byte Diskette Drives.....2195.00
Comart CP500 as CP100 except one 790K Byte Diskette Drive and one 5" Winchester Drive having 4.8M Bytes of Formatted Data..2995.00
Comart CP520 as CP100 except one 790K Byte Diskette Drive and one 5" Winchester Drive having 19M Bytes of Formatted Data...3995.00

COMART COMMUNICATOR 8086 MODULAR SYSTEMS

Comart CP1100 Communicator Micro Computer: 6MHz 8086 Processor, 128K Byte Memory with Parity, Dual 5¼" Floppy Disk Drives each storing 390K Bytes. Dual Serial and Parallel Printer Ports. 10 Slot S100 Bus inc. CP/M86 & MS-DOS.....2295.00
Comart CP1202 As CP1100 except Dual 790K Byte Diskette Drive with 256K Byte Memory.....2745.00
Comart CP1522 As CP1202 except 1 × 790K Byte Diskette Drive and 1 × 5" Winchester Disk having 19M Bytes of Formatted Data with 256K Byte Memory.....4545.00

UPGRADE KITS
Wide range of 8 to 16 Bit and floppy to hard disk upgrade kits available for Communicator Systems

COMART SUBSYSTEMS

Comart CB200 Cartridge Tape Back-Up Subsystem for Hard Disk.....2495.00
Comart HD520 5" × 20M Byte Hard Disk Subsystem (requires HDCONT or can be added to a CP520 or CP 1520).....2395
Comart HDCONT Winchester Disk Controller for 2, 20M Byte Drives.....195.00
Comart FD800 8" Floppy Single Disk Drive Subsystem; Single Sided, Single Density IBM 3740 Compatible (requires C-IFDC).....995.00
Comart MP/MSUB Hardware & Software to Upgrade Communicator to MP/M. Includes MP/M, two 48K Byte CRAM 48 Memory and 4SIO Serial Interface Card.....1150.00

COMART MULTI USER CONFIGURATIONS

Comart CP520/M CP520 Communicator System with 256K Byte Memory and 6 Serial Interfaces. Includes CP/M and MP/M11.....4995.00
Comart CP1525M CP1520 Communicator with a total of 512K Byte Memory and 10 Serial Interfaces. Includes CP/M86 and MP/M86.....5995.00

S100 BOARDS

Comart CRAM64 64K Byte Dynamic RAM with Bank Select.....200.00
Comart CRAM48 48K Byte Dynamic RAM with Bank Select.....180.00
Comart CRAM256 256K Byte Dynamic RAM with Parity. 8 and 16 Bit Data. IEEE696 Compatible. Also supports 8 Bit Bank Switching.....550.00
Comart C-CPU86 8086 Processor Card, with Dual Serial and Parallel Ports. Monitor in 8K EPROM and 4K RAM.....300.00
Comart C-IFDC Intelligent Diskette Drive Controller with Z80A Processor.....295.00
Comart C-CPU Z80A system Processor Board incl. 2 Serial/1 Parallel Port.....200.00
Comart 4SIO 4 Channel Synch/Asynch Interface Board.....250.00
Dual Systems CLK24 Battery Supported Real Time Calendar Disk.....295.00
Dual Systems CMEM32 32K CMOS Battery Supported Memory.....1195.00
Dual Systems CMEM16 16K CMOS Battery Supported Memory.....895.00

CROMEMCO 68000/Z80A SUPER MICRO SYSTEMS

Cromemco CS1D2 System 1 inc. Dual 390K 5' Floppy Disks, DPU, 256KZ and 16 FDC Cards in 8 Slot S100 Card, Table Top Enclosure.....3730.00
Cromemco CS1HD2E System 1 including Single 390K 5" Floppy Disk, 5.5M Byte 5" Winchester Disk, DPU, MCU, 256MSU, 16FDC, WD12.....6345.00
Cromemco CS 1HD2 As System 1 except 256KZ Memory without MCU 5970.00
Cromemco CS 1HD5E as CS1HD2E but with 512MSU.....7090.00
Cromemco CS3D5E System 3 including Dual 1.2M Byte Floppy Disk Drives, 21 Slot Card Cage, DPU, MCU, 512MSU, 16FDC...7465.00
Cromemco CS3HD5E as CS3D5E but with 5" 5.5MB Winchester Disk and WD1 ....9330.00

CROMEMCO SOFTWARE FOR 68000/Z80A SERIES

Cromemco CRO-D Cromix (Multi-User/Multi Tasking (Unix Based Operating System .445.00
Cromemco FOR-D Fortran '77.....445.00
Cromemco PAS-D ISO Pascal.....445.00
Cromemco ASM-D 68000 Macro Assembler.....445.00
Cromemco STB-D 32K Structured BASIC @.....445.00
Cromemco CCC-D C-Compiler @.....445.00
Cromemco COB-D Cobol Compiler @ .445.00
Note: All 68000 Languages (Suffix D) require Cromix (CRO-D). All Software is available on 5" or 8" Floppy Disks – Please Specify.
@ = Availability TBA

VDU'S & MONITORS

Comart WY100 Visual Display Terminal, Green Display, 24 × 80 and Status Lines. Detached 105 Key Keyboard with Numeric Pad, Function, Cursor and Editing Controls. Swivel and Tilt Display.....725.00
Volkercraig 4404.....595.00
Volkercraig 4404WS.....695.00
Cromemco RGB14LP. High Resolution Colour Monitor.....1395.00
12" Green Screen Monitor.....99.00

BOOKS
Very wide range of computer books stocked at all shops.

DISKETTES

Byteshop 5¼" Single Sided, Single Density.....1.70ea
Byteshop 5¼" Single Sided, Double Density.....2.13ea
Dysan 5¼" Double Sided, Double Density.....3.90ea
Dysan 8" Double Sided, Double Density 4.40ea
Full range of 5¼" & 8" Diskettes in stock

BUG–BYTE SOFTWARE

All Tapes Available For Acorn, VIC, BBC, ZX81. Spectrum. Call for availability.

CP/M SOFTWARE

BASCOM Microsoft Basic Compiler.....227.46
BASIC-80 Microsoft Basic Interpreter.....205.27
BAZIC Micromikes Basic Language.....120.00
BSTAM BYROM Software Communications Package *.....115.00
BSTMS BYROM Software Communications Package.....115.00
CALCSTAR Micropro Financial Planning Electronic Spread Sheet Package.....90.00
CARDBOX Caxton Store/Search System 155.00
CB80 Digital Research Basic Compiler.....314.00
CBASIC Digital Research Basic Language 94.00
CBASIC/86 D/R Basic Language.....204.00
CIS COBOL Microfocus COBOL Language *.....425.00
COBOL-80 Microsoft COBOL Compiler.....421.63
CP/M for SBC Digital Research Operating System.....126.00
CP/M-86 DISPWR Digital Research Operating System.....204.00
CP/M-86 + CB86 DW Digital Research Operating System + Language.....380.00
DATASTAR Micropro Database Package .175.00
DBASE II Ashton-Tate Relational Database + ZIP.....435.00
FILESTAR Microsec's Disk Reformatter CP/M to IBM, DEC, Motorola and Intel Formats.....110.00
FMS-80 DJR Assoc. Database/FM.....650.00
FMS-81/82 from.....350.00
FORMS 2 Microfocus Table Maker.....110.00
FORTRAN-80 Microsoft FORTRAN Compiler.....288.48
GBS Bytesoft General Business System..810.00
INFOSTAR Micropro Database/Reporter.295.00
ISL Bytesoft Accounting Package.....1110.00
KSAM80 EMS Database.....350.00
MACRO-80 Microsoft Macro Assembler. 116.50
MAILMERGE Micropro Wordprocessing Enhancement to link with WORDSTAR * 145.00
MARS Sapphire Business System *.....295.00
MICROSTAT Ecosoft Statistics Package *.....195.00
MILESTONE Organic Software Critical * Path Package.....225.00
with Speed Programming Tool.....314.00
PASCAL/MT + D/R Pascal Language.....220.00
PASCAL/MT + 86 Digital Research Pascal Language for 16 Bit Systems.....377.00
PEACHTREE Basic Accounting System per module.....325.00
PEACHTREE Business Management System per module.....600.00
PERSONAL PEARL Pearl Data Base/FM. 185.00
PLANNERCALC Comshare Financial Planning Package.....39.00
PL/I-80 Digital Research Language *.314.00
REPORTSTAR Micropro Reporter.....210.00
SPELLSTAR Micropro Proofreading Utility to link with WORDSTAR.....145.00
SUPERCALC Sorcim Financial Planning/Budgeting Spread Sheet Package *.....190.00
SUPERSORT Micropro Sort Utility.....145.00
SUPERVYZ Epic Application Control.....86.00
T/MAKER II Lifeboat Associates Financial Planning/Spread Sheet Package.....195.00

IBM PERSONAL COMPUTER



Following on from the successful launch, we're delighted with our appointment as IBM Authorised Dealers in the UK for the fantastic new IBM PC. The most significant microcomputer introduction for years, the IBM PC can be employed by, for example, the small businessman as a stand alone desk top system, or the large corporate user as an intelligent terminal for a main frame. Our 'star' configuration is the 320K Byte Disk model with 128K RAM, UK specified keyboard and screen. At the Byteshop you'll also find that we've given a lot of thought to supporting the IBM PC. Our IBM trained staff can offer you a comprehensive portfolio of IBM PC software and programmes plus add on's and add in's and specialist interfaces for just about every kind of commercial, industrial and laboratory application. Come and talk to us about an inspired machine. The IBM PC.

IBM PC Single 160K Byte Disk Drive 64K Byte RAM UK Keyboard and Screen.....
IBM PC Dual 320K Byte Disk Drives 64K Byte RAM UK Keyboard and Screen.....2080.00
IBM PC Dual 320K Byte Disk Drives 128K Byte RAM UK Keyboard and Screen.....2630.00
IBM Colour Adapter Card.....
IBM Printer inc. Stand and Cable.....2973.00
Microvitec Colour Monitor High. Res......216.00
KAGA Colour Monitor Med. Res......469.00
.....550.00
.....335.00

SOFTWARE FOR THE IBM PC

BSTAM Byrom Communications Package.....115.00
CBASIC Compiler (CB86) D/R Basic Language.....377.00
CBASIC/86 Digital Research Language Package.....204.00
CCP/M-86 Digital Research Concurrent CP/M Operating system.....220.00
CP/M86 For IBM PC D/R Operating System.....38.00
DBASE II Ashton-Tate Database Package.....435.00
EASYFILER IUS Database Package.....229.00
EASYPLANNER IUS Financial Planning Package.....143.00
EASYSPELLER II, IUS Word Processing Package.....71.00
EASYWRITER II, IUS Word Processing Package.....200.00
FAST-GRAPH Business Graphics Package.....299.00
FLIGHT SIMULATER Microsoft Training/Games Package.....34.00
MAILMERGE Micro Pro Word Processing Enhancement.....145.00
MARS Sapphire Business System.....395.00
MICROSTAT Ecosoft Statistics Package.....195.00
PASCAL MT + 86 Digital Research Language.....377.00
SPELLSTAR Micro Pro Word Processing Enhancement.....145.00
SUPERCALC Sorcim Financial Planning Package.....190.00
WORDSTAR Micro Pro Word Processing Package.....295.00
WS + MAILMERGE Micro Pro Word Processing Package .390.00
WS + MM + SP/S Micro Pro Word Processing Package .510.00
WS + SPELLSTAR Micro Pro Word Processing Package...415.00

TECMAR PC MATE ADD ON'S AND ADD IN'S FOR THE IBM PC

TECMAR Winchester Share/5 Expansion 5M.Byte, H/D with shared system adapter for up to 4 × IBM PC's inc. expansion unit.....1995.00
TECMAR Five in one W/64K Bytes; 64K Byte dynamic memory card c/w serial and parallel ports, clock and calendar.....380.00
TECMAR Five in one W256K Bytes; 256K Byte dynamic memory card c/w serial and parallel ports, clock and calendar.....655.00
TECMAR Dynamic Memory 64K Bytes.....260.00
TECMAR Dynamic Memory 256K Bytes.....530.00
TECMAR Scribe Tender with one serial and parallel cable.....175.00
TECMAR High Res. Colour Graphics.....445.00
TECMAR IEEE488 Interface.....295.00
TECMAR DAD10 Digital to Analog Converter.....295.00

The above is just a small selection from the 60 plus Tecmar IBM PC compatible add in's and add on's and specialist interfaces that we offer. There are data storage expansion cards; industrial, scientific and laboratory interfaces; extended input/output expansion cards; general support; communications and software utilities. Please contact us for a full listing. Our Microserve Centres in all our stores can offer full maintenance and service facilities for all Tecmar PC add on's.

WORDSTAR Micropro Wordprocessing Package * Also available with Mailmerge and Spellstar.....295.00
WP WORKSHOP MAC Ltd Training Guide for WORDSTAR or MAILMERGE.....75.00
X BASIC Xitan Language.....185.00
X CP/M Xitan/DR Operating System...118.00

Many Utilities, Programming Tools and Training Packages available. Also extensive range of diskette formats. Prices include configuration on machines supplied by ourselves. We are totally committed to after sales service and future support.
*These software packages are available for both CP/M And CP/M86.

ALL PRICES EXCLUSIVE OF VAT

* Barclaycard Visa & Access cards taken in payment.
* Shop opening hours 9 – 5.30, check individual shops for details of Saturday opening times.
* Phone Mail Orders accepted. Please contact nearest shop for P.P. & Delivery Rates. Regret no C.O.D.

*Some items may be subject to a dollar surcharge if the dollar exchange rate changes more than 5 cents. Prices will be adjusted in line with the rate prevailing at the time of purchase.

*Prices subject to change without notice E. & O.E. and are valid for the cover date life of this magazine. (April 83)
*Whilst we carry a vast range of stock, we cannot guarantee that every advertised item will be available in each shop.
*All goods are new and include factory warranties.
*No refunds on opened software.
*Orders from Government Depts. & Colleges etc. welcome.
*Leasing & HP facilities available – apply for written details.
*Detailed prices available on request.

CRA

● Circle No. 121

There are so many micro computers on the market that choosing the right one is far from easy.

And it isn't made any easier when you find them cheek by jowl with cameras, hi-fi and a host of other electrical equipment. What you need is someone that is single minded. And that means us.

Byteshops are totally dedicated to microcomputers. So not surprisingly, we can offer you a wider range because we sell nothing else.

Our prices are keener too. So are our staff. Each one is an expert who can make sure you get the computer that's exactly right for you – whether it's a home micro or a £20,000 business system.

What's more we'll freely advise you on expanding or upgrading your system as your knowledge grows or your requirements change. While our Microserve Centres offer service and maintenance on site and at our shops.

After all, we are the UK's longest established microcomputer specialists. Come and see us soon.

THE BYTE SHOP

Your Specialist Computer Centre

LONDON
The Byteshop
324 Euston Road NW1
Tel: 01-387 0505

BIRMINGHAM
The Byteshop
94-96 Hurst Street
Tel: 021-622 7149

GLASGOW
The Byteshop, Magnet House
61 Waterloo Street
Tel: 041-221 7409

MANCHESTER
The Byteshop
11 Gateway House, Piccadilly,
Station Approach Tel: 061-236 4737

NOTTINGHAM
The Byteshop
92A Upper Parliament Street
Tel: 0602 40576

SOUTHAMPTON
Also at XITAN Systems
23 Cumberland Place
Tel: 0703 334711

Members of the Comart Group of Companies

THE WRAPS ARE OFF

the lowest priced 10 MB CP/M system

£1995



FEATURING:

- 10 MByte Winchester
- 500K Byte Floppy
- Fast Z80A Processor
- Continuous Background Diagnostics
- Two Printer Interfaces
- British Made

INCLUDES:

- ONE YEARS ON-SITE MAINTENANCE

ANOTHER COUNTRY PRODUCT **MADE IN BRITAIN**

For more details:

Country Computers Limited

Pipers Road, Park Farm Industrial Estate,
Redditch, Worcs. B98 0HU.
Tel. 0527 29826
Telex: 337497 Fistex G C.C.L.


(Quantity and Dealer Discounts Available)



CP/M is the registered trade mark of Digital Research

● Circle No. 122

WHEN IT COMES TO MICROCOMPUTER SOFTWARE WE WROTE THE BOOK

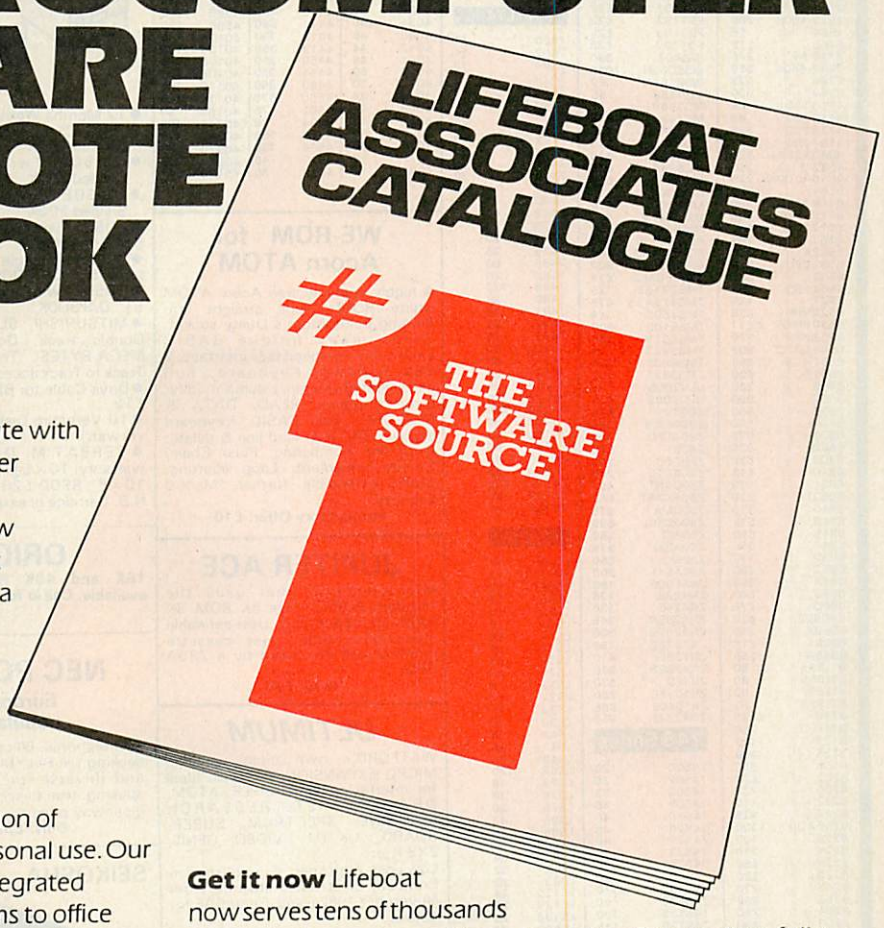

How do you stay up-to-the-minute with the rapidly changing world of microcomputer software? Get the Lifeboat Catalogue.

The latest innovations The new Lifeboat Catalogue is packed with the latest state-of-the-art software. And if we publish a new program after the latest catalogue has gone to press, we enclose a flash bulletin in your copy.

The greatest selection Because Lifeboat is the world's largest publisher of microcomputer software, our catalogue offers you the greatest selection of programs for business, professional and personal use. Our more than 200 programs range from the integrated accounting and professional practice systems to office tools for book-keepers and secretaries to sophisticated tools for programmers. Included are business systems, word processors, programming languages, database management systems, application tools and advanced system utilities.

We specialise in software that runs on most small business computers. Our more than 60 media formats, including floppy disks, data cartridges, magnetic tape and disk cartridges, support well over 100 different types of computer.

Get full service We give the crucial dimension of after-sales service and full support to everything we sell.

That includes:

- An update service for software and documentation.
- Telephone, telex and mail-order services in the London office and at overseas offices in the United States, France, Switzerland, West Germany and Japan.
- Subscriptions to Lifelines,™ the monthly magazine that offers comparative reviews, tips, techniques, identified bugs and updates that keep you abreast of change.

Get it now Lifeboat now serves tens of thousands of satisfied customers with our breadth of up-to-date, fully tested, fully supported and competitively priced software.

You may not need all we offer, but we offer just what you need. After all, we wrote the book.

#1 Lifeboat Associates

World's foremost software source

Mail coupon to: Lifeboat Associates
PO Box 125, London WC2H 9LU or call 01-836 9028

☐ Please send me a free lifeboat catalogue.

Name

Title

Company

Address

Postcode

Copyright © 1981, by Lifeboat Associates.

Lifeboat Worldwide offers you the world's largest library of software. Contact your nearest dealer of Lifeboat.

USA Lifeboat Associates 1651 Third Ave. New York NY 10028 Tel (212) 860-0300 Telex 640693 (LBSOFT NYK) TWX 710 581-2524 **JAPAN** Lifeboat Inc. OK Bldg. 5F 1-2-8 Shiba-Daimon Minato-ku Tokyo 105 Japan Tel 03-437-3901 Telex 2423296 (LBJTYO) **ENGLAND** Lifeboat Associates Ltd PO Box 125 London WC2H 9LU England Tel 01-836 9028 Telex 893709 (LBSOFTG) **SWITZERLAND** Lifeboat Associates GmbH Hinterbergstrasse Postfach 251 6330 Cham Switzerland Tel 042-36-8686 Telex 865265 (MICO CH) **W GERMANY** Intersoft GmbH Schlossgartenweg 5 D-8045 Ismaning W. Germany Tel 089-966-444 Telex 5213643 (ISOFD) **FRANCE** Lifeboat Associates SARL 10 Grande Rue Charles de Gaulle 92600 Asnieres France Tel 1-733-08-04 Telex 250303 (PUBLIC X PARIS)

● Circle No. 123

WATFORD ELECTRONICS

33b Cardiff Road, Watford, Herts, England
Tel Watford (0923) 40588. Telex: 8956095

ALL DEVICES FULL SPEC. AND FULLY GUARANTEED. TERMS OF BUSINESS: CASH/CHEQUE/P.O.S. (OR ACCESS) WITH ORDER. GOVERNMENT AND EDUCATIONAL INSTITUTIONS OFFICIAL ORDERS ACCEPTED. TRADE AND EXPORT INQUIRIES WELCOME. (P&P add 50p on all cash orders). Unless stated otherwise.
VAT ALL PRICES ARE EXCLUSIVE OF VAT. PLEASE ADD 15% TO THE TOTAL COST INCLUDING P&P. SHOP HOURS: 9.00am-6.00pm MONDAY TO SATURDAY. AMPLE FREE CAR PARKING SPACE AVAILABLE. FOR QUANTITY PRICES PHONE WATFORD (0923) 40588

Computer IC's

1702	350
1802CP	650
2114L-200n	95
2147-3	425
2532-450n	300
2564	£8
2708	225
2716-5v	225
2732-450n	350
2764	575
3242	590
4116 150	85
4116 200	80
4118 250	325
4164 200	425
(CMOS 2114)	325
4532-3	350
4816A 100nS	225
5101	220
6116 150nS	350
6116L 120nS	550
6117 100n	490
6167-6	795
6502A	450
6502 CPU	325
6503	600
6504 250	550
6521	125
6522 VIA	295
6530 RRIOT	£11
6532 RIOT	570
6545 CRTC	899
6551 ACIA	650
6592 PC	£20
6800	220
6802	250
6803	850
6804	160
6805	670
6808	520
6809	630
6810	115
6821	110
68821	220
6840	375
6843	£12
6845	650
6847	650
6850	110
6852	250
6854	599
6875	500
6800	£78
74C922	420
8080A	250
8088	£18
8085A	350
81LS95	80
81LS96	80
81LS97	80
81LS98	85
8118	£225
8118-10	250
8123	125
8155	350
8156	350
8202	£25
8205	225
8212	110
8214	425
8215A 300	300
8216	100
8224	110
8226	250
8228	220
8243	270
8250	850
8251	250
8253	400
8255	255
8256A	£35
8257	400
8259	395
8271	£32
8279	385
8282	450
8283	450
8285	365
8284	350
8288	£10
8T26A	99
8T27-3	150
8T28A	120
8T31	350
8T95N	90
8T97N	90
8364AP	550
9602	220
AM26LS31C	125
AM26LS32A	125
AY 3 890	£438
AY 3 1095	300
AY 3 1270	£675
AY 3 8910	375
AY 5 1013	300
AY 5 1350	388
AY 5 2376	600
AY 5 3600	750
COM8017	275
COM8116	700
DM8131	275
DP8304BN	250
DS3691N	320
DS88LS120N	275
DS8830	110
E9365	38
E9366	38
FD1761	£15
FD1771	£15
FD1791	£22
FD1793	£23
FD1795	£28
FD1797	£28
IM6402	380
INS8060N	1050
INS8154N	£9
MC1488	55
MC1489	55
MC14411	675
MC14412	725
MC3446	215
MC3447P	315
MC6846	625
MM5280D	695
MM5303	635
MM5307	1275
MM5387A	475
MM58174	700
RO 3 2513L	650
RO 3 2513U	600
SFF96364E	800
SP0256AL2	£18
TMS27163	725
TMS4164 15	475
TMS4500	14
TMS5100	600
TMS6011	365
TMS9927	14
TMS9929	£20
TMS9995	£12
ULN2003	75
UPD7002	425
Z80B	875
Z8CPU2.5	299
Z80ACPU	300
Z80B	875
Z80CTC	250
Z80ACTC	260
Z80DART	495
Z80ADART	550
Z80DMA	675
Z80ADMA	895
Z80PIO	260
Z80APIO	275
Z80SIO	850
Z80ASIO	900
ZN419CE	180
ZN423E	138
ZN424E	130
ZN425EB	345
ZN426EB	300
ZN427EB	130
ZN428E	410
ZN429EB	210
ZN459	570
ZN1034E	200
ZN1040E	665
ZNA234E	850

74S Series

74S00	30
74S02	30
74S03	32
74S08	40
74S10	40
74S20	40
74S27	40
74S32	70
74S74	75
74S112	80
74S132	110
74S133	60
74S138	100
74S139	115
74S155	39
74S158	195
74S175	260
74S188	140
74S189	140
74S194	195
74S201	250
74S225	240
74S274	390
74S241	250
74S244	290
74S257	170
74S260	50
74S262	850
74S287	225
74S288	210
74S289	200
74S301	000
74S365	000
74S374	365
74S470	325
74S471	620
74S472	1150
74S475	25
74S571	620

75 Series

751078	95
75110	90
75150/54	125
75182/3	99
75118/9	55
7532	140
75450	86
75451/2	52
75454	70
75491/2	65
74S112	90

TTL74

7400	11
7402	11
7404	13
7410	14
7411	15
7423	18
7414	20
7420	15
7422	20
7427	18
7430	14
7442	32
7447	40
7400	11
7448	40
7473	24
7474	20
7475	25
7485	60
7486	20
7489	170
7490	20
7491	35
7492	25
7493	25
74100	80
74116	50
74121	25
74125	35
74126	35
74143	210
74148	60
74150	50
74151	40
74153	40
74154	55
74186	470
74188	250
74383	99

74LS

LS00	11
LS02	11
LS04	12
LS08	12
LS10	12
LS11	12
LS13	15
LS14	26
LS19	58
LS20	13
LS22	12
LS27	12
LS32	13
LS30	12
LS42	28
LS47	35
LS48	55
LS83	120
LS73	18
LS74	18
LS75	20
LS85	42
LS86	16
LS90	24
LS91	60
LS92	32
LS93	23
LS125	24
LS126	25
LS138	25
LS139	28
LS148	70
LS151	40
LS153	40
LS156	36
LS157	25
LS158	30
LS175	36
LS240	55
LS241	55
LS242	55
LS243	55
LS244	50
LS245	70
LS273	54
LS373	60
LS374	55
LS393	42
LS471	629
LS640	180
LS641	180
LS645	180
LS668	125
LS669	120
LS670	100
LS673	550

CMOS

4000	10
4001	10
4002	12
4009	24
4010	24
4011	10
4012	16
4016	20
4017	32
4018	45
4023	13
4025	13
4027	20
4034	140
4040	40
4042	44
4051	45
4052	60
4053	50
4066	24
4068	14
4069	13
4070	13
4076	50
4077	13
4081	13
4093	20
4099	75
4160	95
4161	99
4162	99
4163	99
4174	99
4175	105
4411	690
4412	790
4419	350
4450	350
4451	350
4490	350
4500	675
4501	75
4504	75
4505	185
4508	130
4511	46
4519	30
4528	50
4549	375
4569	175
4583	90
4584	40
4585	60
4597	330
4598	290
4599	290
40101	130
40105	105
40106	35
40108	198
40110	198
40114	240
40163	50
40244	195
40245	195
40373	160
40374	245
45106	595

WE-ROM© for Acorn ATOM

A highly sophisticated Acorn ATOM Utility ROM. Plugs straight into floating point Atom's Utility socket. Gives many unique BASIC Extentions: Hi-speed tape interface; 2 Key rollover Keyboard; Full disassembler; Memory dump modify; Error trapping; READ, DATA & RESTORE; Full BASIC Keyboard scanner BBC like; Find line & delete; Auto line numbering; Plus: Chain, Cursor movement, Loop aborting. Easily extendible further. Manual supplied.

Introductory Offer: £10

JUPITER ACE

Microcomputer that uses the Ultrafast FORTH. Has 8K ROM 3K RAM, 32×24 display. User definable characters, timer fast cassette interface, all controlled by a Z80A CPU.

Only: £78

ULTIMUM

WATFORD's own most versatile MICRO EXPANSION SYSTEM. Ideal for interfacing with APPLE, ATOM, DRAGON, PET, RESEARCH MACHINE, SPECTRUM, SUPERBOARD, UK101, VIDEO GENIE, ZX81, etc.

Low cost, high spec. As published in Practical Electronics starting from November 1982 issue. Send SAE for details.


BBC MICRO & UPGRADE KITS

Upgrade your BBC Micro with our Upgrade & Kits and save yourself £sss...

- Model A £299
- Model B £399
- 16K Memory (8×4816AP-100nS) BBC1 **£18.00**
- Printer User I/O Port BBC2 **£8.20**
- Complete Printer Cable 36" **£12.00**
- Disc Interface Kit BBC3 **£41.00**
- Analogue I/O Kit BBC4 **£6.75**
- Serial I/O Kit BBC5 **£7.60**
- Expansion Bus Kit BBC6 **£6.50**
- Model A to Model B Upgrade Kit **£45.00**
- Joysticks for BBC (per pair) £12
- Complete range of Connectors & Cables available. Send SAE for list.

We specialise in BBC Peripherals, Software and Accessories. Just phone us for your requirements.

FLOPPY DISC DRIVES



- 12 Months Warranty on DRIVES
- TEAC CS-50A Single Cased 40 track S/sided 100K **£180**
- CS-50A Twin Cased 40 track S/sided 200K **£350**
- CS-50E Single Cased 80 track S/sided 200K **£250**
- CD50E Twin Cased with PSU, 80 track, 5¼" S/S 400K **£475**
- CS50F — Single Cased with PSU, 80 track, 5¼" D/S 400K **£330**
- CD50F Twin Cased with PSU, 80 track 5¼" D/S 800K **£599**
- MITSUBISHI SLIM LINE: Uncased. Double track, Double Density, ONE MEGA-BYTES. Track Density 96TPI, Track to Track access time 3mSec **£249**
- Drive Cable for BBC: Single £8; Double £12
- 10 Verbatim Diskettes 5¼" DSSSD (5 yrs warr) £20
- VERBATIM DISKETTES (5 yrs warranty) 10×5¼" SSD £20; DSDD £30 10×8" SSDD £28.

N.B. Carriage is extra.

ORIC — 1

16K and 48K RAM versions now available. Call in for a demonstration.

NEC PC8023-C

Europes most popular printer

Bi-directional, 80 column, 100CPS, Logic seeking, Hi-Res, block graphic Forward and Reverse line feed, proportional spacing, true descenders, 2K buffer, at a giveaway price:

Only: £320 (carr. £7)

SEIKOSHA GP100A



Price includes FREE 500 Sheets

Unihammer Printer, gives normal and double width characters as well as dot resolution graphics. 10" Tractor feed. Parallel interface standard. **£175 (£7 car.**

SEIKOSHA GP250X **Only: £235 (£7 carr.)**

SOFTY-2

Price includes FREE 2532

Softy is an intelligent EPROM Programmer & Emulator. Has Memory Map, TV Display, RS232 & Centronics I/P & O/P. Copies, Emulates and Programs EPROMS. RS232 & Centronic routines standard. Includes PSU. Price: £169


SPECIAL OFFER

	1+	25+
2532	300p	275p
2732	320p	290p
2764	475p	425p
4116-200n	85p	80p
6116	390p	360p



Just 'phone your order through, we do the rest.

EPSON



PRINTERS price includes FREE 500 sheets of paper

MX80FT/3 10" Tractor & Friction Feed 9×9 matrix, 80 column, speed 80cps, Bidirectional, Centronic Interface, Baud rate 110-960 (RS232) Hi-res, Bit image graphics, Subscript & superscript, Italic & Underlining facility. Fully guaranteed. **Only: £324 (carr. £7)**

MX100FT/3 136 columns, 15" carriage, plus all the facilities of MX80FT/3. **Only: £425 (carr. £7)**

ACCESSORIES

- **TEX EPROM ERASER.** Erases up to 32 ICs in 15-30 min. £33
- **TEX EPROM ERASER** with incorporated Safety Switch £38
- **Electronic Timer** Solid state. Connects directly to above Erasers. Protects your expensive Chips from overcooking. Our timer pays for itself in no time. £15
- **Tex Eprom Eraser** including the Electronic timer. £44
- **Spare** UV lamp bulbs £9
- Power supply regulated, overload protection variable: 5V to 15V @ HA £38
- **Multirail psu** kit including Case. Output: +5V 5A; +12V, +25V, −5V, −12V @ 1A. **Only £39 (p&p 95p)**
- Attractive Beige Brown **ABS CASE** for Superboard UK101 or Home Brew £26
- **C12 Cassettes** in Library Cases 40p
- **8" Fan fold paper** (1000 sheets) £7
- **9½" Fan fold paper** (1000 sheets) £7
- **Teleprinter Roll** 250p
- **UHF Modulator 6MH2** 350p
- **UHF Modulator 8MH2** 450p
- **Stack Pack** the unique stackable twin drawer racking system for Computer Cassettes. 5 Drawers (10 sections) including 10×C12 Computer Cassettes and Labels £6.00

CRYSTALS

32.768KH	100	16.0MHz	200
1MHz	275	18.0MHz	180
1.6MHz	392	18.432M	150
1.8MHz	395	19.968M	150
1.843M	200	20.0MHz	200
2.0MHz	225	24.0MHz	170
3.2768M	150	24.930M	325
3.57594	98	48.0M	175
3.6864M	300	100.0M	375
4.0MHz	150		
4.433619	100		
5.0MHz	160		
6.0MHz	140		
6.144MHz	150		
6.5536M	200		
7.0MHz	150		
7.168MHz	160		
7.68MHz	200		
8.0MHz	150		
9.0MHz	200		
9.375M	350		
10.0MHz	175		
10.7MHz	150		
10.24MHz	200		
12.0MHz	175		
12.528M	300		
14.31818	170		

WEMON

Watford's specially designed 4K Ultimate Monitor IC for UK101 & Superboard

Only £10.

IDC CONNECTORS

Speed block type	PCB Plug with latch Strt Pins	PCB Plug with latch Angle Pins	Female Header Socket	Female Card Edge Connectors
10 way	90p	99p	85p	120p
16 way	130p	150p	120p	—p
20 way	145p	166p	125p	195p
26 way	175p	200p	150p	240p
34 way	205p	236p	160p	320p
40 way	220p	250p	190p	340p
50 way	235p	270p	200p	395p

JUMPER LEADS Ribbon Cable Assembly DIL Plug (Headers)

Single Ended Lead 24" Long Length	14pin	16pin	24pin	40pin
24"	145p	165p	240p	325p
Double Ended Leads				
6"	185p	205p	300p	465p
12"	198p	215p	315p	490p
24"	210p	235p	345p	540p
36"	230p	250p	375p	595p

IDC female receptacle jumper leads

	20way	26way	34way	4way
24" 1 end	160p	200p	260p	300p
2 end	290p	370p	480p	525p

DIL SOCKETS

	Low Prof	Wire Wrap
8pin	8p	25p
14pin	10p	35p
16pin	10p	42p
18pin	16p	52p
20pin	16p	52p
22pin	25p	70p
24pin	25p	70p
28pin	28p	80p
40pin	30p	99p

RIBBON CABLE

Ways	Grey	Colour
	Price per Foot	
10	15p	28p
16	25p	40p
20	30p	50p
26	40p	65p
34	60p	85p
40	70p	90p
64	100p	135p

DIL PLUGS (Headers)

	Solder	(Dc
14pin	38p	95p
16pin	42p	100p
24pin	88p	130p
40pin	195p	218p

AMPHENOL PLUGS

24way IEEE	560p
36way Centronics Parallel	550p

ZIF DIL SOCKETS

24way	575p
28way	850p
40way	975p

VIDEO MONITORS

- ZENITH 12" Hi-Res, Green Monitor. 40/80 column select switch. Attractively finished **£80**
- BMC BM1401 14" Colour Monitor RGB Input **£235**
- MICROVITEC 1431, 14" Colour Monitor. RGB Input. Cable included **£250**

EURO (DIN) CONNECTORS

	Female Strt Pins	Female Angle Pins	Male Strt Pins	Male Angle Pins
DIN41617 31way 41612 A B	170p	—	—	175p
2-32way 41612 A C	275p	320p	220p	285p
2-32way 41612 A B C	295p	340p	240p	300p
3-32way	360p	385p	260p	395p

EDGE CONNECTORS

	.156"	.1"
TWO ROWS		
2×18way	145p	180p
2×22way	200p	199p
2×23way		185p
2×25way		225p
2×28way		210p
2×30way		245p
2×36way		295p
2×40way		315p
2×43way		395p

D CONNECTORS: Miniature

	9 way	15 way	25 way	37 way
Male				
Solder	80p	110p	160p	250p
Angle	160p	210p	250p	355p
Pins	120p	130p	195p	295p
Female				
Solder	110p	160p	210p	350p
Angle	165p	215p	290p	440p
Pins	150p	180p	240p	420p
Covers	100p	95p	100p	110p

(DC 25way D plug 385p Set 440p)

● Circle No. 124

When we say- 'We're the Biggest Apple Dealer in the South West'

-some people get funny ideas...

It does, however, happen to be true. In three short years we have grown to handle more Apple systems than anyone else in the region.

Why? – Knowledge, genuine interest, hard-nosed realistic pricing and good old-fashioned hard work – that's why.

If you want to climb on the wagon – contact us today and we'll put you in the picture.



DATALINK

Microcomputer Systems Limited
10 Waring House, Redcliffe Hill, Bristol BS1 6TB
Tel: Bristol (0272) 213427 Telex: DATAL G 44807

Authorised ACORN COMPUTER | BBC DEALER

Authorised apple computer Dealer
BBC REFERRAL CENTRE


IBM Personal Computer
IBM Authorised Dealer

● Circle No. 125

sirton computer systems THE SPECIALISTS IN S100 SYSTEMS

MIDAS S100 SYSTEMS

MIDAS 1: From £895
MIDAS 2: From £1,890
MIDAS 3D: From £3100
MIDAS 3HD: From £5,495
MIDAS 86 — 16 Bit: From £3520

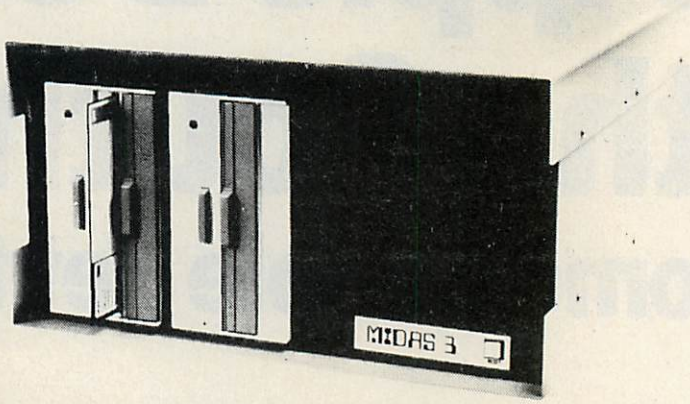

- Our versatile **Z80** Microcomputers are available as standard units or custom configured to your exact specification from a comprehensive range of stocked **S100** boards.
- Disc storage capacity of the **MIDAS 3** can be 2M Bytes, expandable to over 80M Bytes with a Winchester Hard Disc Unit in our **MIDAS 3HD** range.
- **MIDAS** runs **CP/M** and MP/M. Other Software includes M-BASIC, C-BASIC, FORTRAN, COBOL, CIS-COBOL, PASCAL and Word Processing.
- A **MIDAS 3D** with 64K RAM and 2M Bytes storage on two 8" drives with two Serial I/O Ports and CP/M only **£3,100.**
- Printers, VDUs and other peripherals stocked to give complete package system at keen prices.

BOARDS

We stock over 50 different S100 Boards all from quality manufacturers: Advanced Micro Digital, Godbout, SSM, Micromation, Dual, CCS, S.D. Systems, Morrow, Pickles & Trout, etc.

PROCESSOR
Z80 Starter Kit
Single Board Computers
8085/8088 CPU
Z80A CPU 4MHz (4 types)
8086

EPROM
2716 EPROM (2×16K)
2708/2716/2732 Programmer

VIDEO BOARDS
24×80 I/O Drive
24×80 Memory Mapped

DISK CONTROLLERS
Single Density 5" or 8
Double Density DMA
Floppy or hard Controllers

RAM
Static RAM 16-64K 24 Bit addressing
Static RAM 8×64K or 16×32K RAM/Battery Back-up
Memory Manager

I/O BOARDS
2S/2P or 4S/2P or 3P/1S etc
A/D & D/A 8 or 12 bit
IEEE 488 Interface

MISCELLANEOUS
Real Time Clocks
Graphics 512 ×256 (B/W)
Colour Graphics 312×290
Maths Board AMD 9511
Extender Boards/Logic Probe
Motherboards 7-20 slot

MAINFRAMES
We are the sole UK Distributor for Integrand Mainframes and Disc Enclosures, available in nine models including Desk Top and Rack Mounting, with or without provision for Disc Drives. All units totally enclosed, painted on all external surfaces and complete with power supply etc.

SOFTWARE
CP/M 1 & 2, MP/M, PL/1, C-BASIC 2, M-BASIC V5, XYBASIC, FORTRAN 80, COBOL 80, CIS-COBOL, PRO-PASCAL, Forth, MAC, ZSID, Disassembler, Wordstar, Datastar, Supercalc, Wordmaster, Supersoft etc etc.

Prices exclusive of VAT

We are pleased to discuss your requirements and will advise you as to whether your needs can be met with one of our computers.

All of our systems are specials as they are configured to suit your specification, thus ensuring that you get what you want rather than what happens to be available.

Write or phone for a catalogue.

Unit 14, 29 Willow Lane, Mitcham, Surrey
Telephone: 01-640 6931/2/3

sirton computer systems

● **Circle No. 127**

TTLs

74 SERIES

7406	18p
7407	18p
7416	18p
7417	18p
7425	18p
7497	90p
74100	80p
74121	25p
74128	38p
74150	50p
74159	75p
74182	40p
74184	90p
74185A	90p

74LS SERIES

74LS00	11p
74LS01	11p
74LS02	11p
74LS03	12p
74LS04	12p
74LS05	12p
74LS08	12p
74LS09	12p
74LS10	13p
74LS11	13p
74LS12	13p
74LS13	15p
74LS14	25p
74LS15	12p
74LS20	13p
74LS21	13p
74LS22	13p
74LS26	14p
74LS27	13p
74LS28	14p
74LS30	13p
74LS32	13p
74LS33	14p
74LS37	14p
74LS38	14p
74LS42	39p
74LS47	39p
74LS48	45p
74LS51	14p
74LS55	14p
74LS73	18p
74LS74	18p
74LS75	18p
74LS78	18p
74LS83	39p
74LS85	40p
74LS86	18p
74LS90	22p
74LS92	20p
74LS93	22p
74LS95	40p
74LS96	50p
74LS107	20p
74LS109	27p
74LS112	20p
74LS113	20p
74LS114	22p
74LS122	25p
74LS123	34p
74LS124	90p
74LS125	24p
74LS126	25p
74LS132	34p
74LS133	25p
74LS136	25p
74LS138	27p
74LS139	27p
74LS145	70p
74LS147	100p
74LS148	75p
74LS151	40p
74LS153	40p
74LS154	80p
74LS155	30p
74LS156	36p
74LS157	25p
74LS158	30p
74LS160	38p
74LS161	36p
74LS162	36p
74LS163	38p
74LS164	40p
74LS165	50p
74LS166	60p
74LS170	70p
74LS173	55p
74LS174	40p
74LS175	40p
74LS181	90p
74LS183	120p
74LS190	38p
74LS191	36p
74LS192	36p
74LS193	36p
74LS194	35p
74LS195	35p
74LS196	45p
74LS197	45p
74LS221	50p
74LS240	55p
74LS241	55p
74LS242	55p
74LS243	55p
74LS244	55p
74LS245	70p
74LS251	30p
74LS253	30p
74LS256	150p
74LS257	30p
74LS258	35p
74LS259	55p
74LS260	22p
74LS266	20p
74LS273	55p
74LS279	30p
74LS280	100p
74LS283	40p
74LS293	40p
74LS295	90p
74LS298	90p
74LS299	180p
74LS321	150p
74LS323	160p
74LS324	150p
74LS348	90p
74LS352	60p
74LS353	60p
74LS356	250p
74LS363	140p
74LS364	140p
74LS365	30p
74LS367	30p
74LS368	30p
74LS373	55p
74LS374	55p
74LS375	70p
74LS377	70p
74LS378	45p
74LS390	45p
74LS393	45p
74LS395	90p
74LS399	160p
74LS445	100p
74LS540	90p
74LS541	80p
74LS610	£19
74LS626	150p
74LS628	150p
74LS640	100p
74LS641	100p
74LS642	100p
74LS643	100p
74LS644	100p
74LS645	100p
74LS668	100p
74LS669	100p
74LS670	120p
74LS682	300p
74LS684	300p
74LS687	400p

74S SERIES

74S00	30p
74S02	30p
74S04	30p
74S05	60p
74S08	60p
74S10	40p
74S11	50p
74S20	40p
74S30	40p
74S32	70p
74S37	60p
74S38	70p
74S51	70p
74S74	75p
74S85	450p
74S86	180p
74S112	90p
74S113	90p
74S114	90p
74S124	300p
74S132	110p
74S133	60p
74S138	120p
74S139	120p
74S151	250p
74S157	250p
74S163	300p
74S174	250p
74S175	320p
74S194	320p
74S195	500p
74S225	510p
74S240	300p
74S241	300p
74S244	300p
74S260	70p
74S261	300p
74S262	850p
74S373	400p
74S374	400p

VOLTAGE REGULATORS FIXED PLASTIC

	+ve		−ve	
1A				
5V	7805	40p	7905	45p
12V	7812	40p	7912	45p
15V	7815	40p	7915	45p
18V	7818	40p	7919	45p
24V	7824	40p	7924	45p
5V 100mA	78L05	30p	79L05	50p
12V 100mA	78L12	30p	79L12	50p
15V 100mA	78L15	30p	79L15	50p

OTHER REGULATORS

LM309K	140p	78H05KC	550p
LM317K	325p	78GU1C	200p
LM323K	450p	79GU1C	225p
LM337T	225p	79HGKC	700p
LM723N	30p	ICL7660	200p
TL494	300p	TL497	300p
78540	225p	LM305AH	250p
78HGKC	600p		

BBC MICRO COMPUTER

OFFICIAL DEALER

BBC Model B £399incl VAT Carr £8

Model A to Model B upgrade kit £50
Fitting charge £15
Partial Upgrades also available

BBC FLOPPY DISC DRIVES

FD Interface	£70	Installation £20
Single Drive	5¼"	100K £235 + £6 carr
Dual Drive	5¼"	800K £799 + £8 carr

BBC COMPATIBLE DRIVES

These are drives with TEAC FD50 mechanism and are complete with power supply.

SINGLE:	100K £190	200K £260	400K £340
DUAL:	200K £360	400K £490	800K £610

ACORN WORD PROCESSOR 'VIEW' £52
SECOND PROCESSOR 6502 £170
SECOND PROCESSOR Z80 £290
TELETEXT ADAPTOR £195; PRESTEL ADAPTOR £90

Full Range of Connectors in Stock
Please phone to check availability of items

SOFTY II INTELLIGENT PROGRAMMER

The system micro processor development system for Engineers and Hobbyists. You can develop programs, debug, verify and commit to EPROMS or use in host computer by using softy as a romulator. Powerful editing facilities permit bytes, blocks of bytes changed, deleted or inserted and memory contents can be observed on ordinary TV. Accepts most +5v Eproms. Softy II complete with PSU, TV Lead and Romulator lead **£169.**

COMPUTER COMPONENTS

CPUs

1802CE	650p
2650A	£12
6502	350p
6502A	500p
6800	225p
6802	250p
68B09	£12
6809	650p
6809E	£12
68B09	£12
8035	350p
8039	£3
8080A	250p
8085A	450p
8088A	£22
8748	£18
INS8060	£11
TMS9980	£20
Z8	£24
Z80	290p
Z80A	320p
Z80B	£12
8088	£18
TMS9995	£12

SUPPORT DEVICES

3242	800p
3245	450p
6520	280p
6522	350p
6532	550p
6551	650p
6821	100p
68B21	220p
6840	375p
68B40	650p
6850	110p
68B50	280p
6852	250p
6854	£7
6875	500p
8154	950p
8155	350p
8156	350p
8205	225p
8212	110p
8216	100p
8224	180p
8226	250p
8228	220p
8243	280p
8250	850p
8251	250p
8253	390p
8255	250p
8256	£36
8257	£4
8259	£4
8271	£36
8279	440p
82B4	350p
8288	£11
8755A	£15
9902A	300p
Z80PIO	250p
Z80APIO	280p
Z80CTC	250p
Z80ACTC	280p
Z80ADART	700p
Z80ADMA	£10
Z80AS10.0.1.2	£9
Z80SIO 1/2	£9

MEMORIES

2101A	400p
2101 2L	120p
2107B	500p
2111A	300p
2114 2L	100p
2147	450p
4027 3	300p
4116 15	120p
4116 20	100n
4118 3	500p
4118 4	450p
4164 2	£5
4164 15 (TI)	£4
4416 15 (TI)	£6
4816AP3	280p
5101	210p
6116P 3	420p
6810	120p
7489	180p
74S189	225p
74S201	350p

ROM & PROM

74S188	325p
74S287	225p
74S288	225p
74S387	350p
74S471	650p
74S473	650p
74S474	400p
74S570	650p
74S571	650p
74S573	900p

EPROMs

2708	250p
2716	250p
2564	£12
2516	250p
2532	375p
2732 3	700p
2732 35	600p
2732 45	375p
2716 350	£5
2732 350	600

BAUD RATE GENERATORS

COM8116	£7
74MC14411	675p
4702B	750p

UARTs

AY 3 1015P	300p
AY 5 1013P	300p
IM6402	450p
TR1602	300p
COM8017	300p

MODULATORS

6MHz UHF	375p
8MHz UHF	450p

INTERFACE ICs

AD558CJ	775p
AD561J	£20
7581	1150p
AM25S10	350p
AM26LS2521	£2
AM26LS32	125p
COM8116	£8
DAC80	£28
DM8131	275p
DP8304	250p
DS8831	140p
DS8832	250p
DS8833	225p
DS8835	200p
DS8836	150p
LF13201	450p
MC1488	55p
MC1489	55p
MC14411	675p
MC3486	500p
MC3418	950p
MC3446	300p
MC3480	850p
MC3486	500p
MC3487	300p
MC4024	325p
MC4044	325p
MM58174	800p
ULN2003A	75p
ULN2004A	75p
75107	90p
75110	90p
75112	160p
75114/15	160p
75150P	120p
75182	90p
75361/63	150p
75365	150p
75451/2	72p
75491/2	65p
81LS95/96	80p
81LS97/98	80p
BT26 28	120p
BT95 96	90p
9602	220p
9637AP	160p
ZN425E 8	350p
ZN426E 8	350p
ZN427E 8	650p

CRT CONTROLLER

COM5027	£18
COM5037	£18
SFF93634	£8
TMS9927	£18
6545	950p
6845	650
6847	650p
9365	£60
TMS9918	£60
TMS9929	£20
EF9366	£48

CRYSTALS

17.7	200p
32 768kHz	100p
100kHz	250p
200kHz	280p
1 0MHz	290p
1 008MHz	275p
1 8432MHz	210p
2 00MHz	225p
2 4570MHz	280p
3 0688MHz	150p
3 5795MHz	100p
3 686MHz	300p
4 00MHz	150p
4 194MHz	200p
4 43MHz	110p
5 00MHz	175p
5 068 MHz	210p
6 0MHz	150p
6 144MHz	150p
7 0MHz	150p
7 168MHz	175p
8 86MHz	175p
10 00MHz	175p
10 7MHz	150p
12 00MHz	150p
14 318MHz	150p
16 00MHz	200p
18 00MHz	200p
18 432MHz	150p
19 968MHz	150p
20 000MHz	200p
24MHz	£3
26 690MHz	150p
27 145MHz	200p
38 667MHz	175p
48 00MHz	175p
55 5MHz	400p
116MHz	300p

KEYBOARD ENCODER

AY5 2376	700p
74C922	420p
74C923	450p

CHARACTER GENERATOR

RO-3-2513U	750p
RO-3-2513L	£7
74S262	£10

DISC CONTROL

FD1771	£20
FD1791	£22
FD1793	£23
FD1795	£28
FD1797	£28
WD1691	£15
WD2143	550p
8271	£36
8272	£22

TELETEXT DECODER ICs

SAA5020	600p
SAA5030	£9
SAA5041	£16
SAA5050	£9

TEXTOOL ZIF SOCKETS

24 pin	600p
28 pin	800p
40 pin	£10

LOW PROFILE DIL SOCKETS BY TEXAS

8 pin	9p	18 pin	16p	24 pin	24p
14 pin	10p	20 pin	18p	28 pin	26p
16 pin	11p	22 pin	22p	40 pin	30p

WIRE WRAP SOCKETS BY TEXAS

8 pin	25p	18 pin	50p	24 pin	70p
14 pin	35p	20 pin	60p	28 pin	80p
16 pin	40p	22 pin	65p	40 pin	100p

PRINTERS

EPSON MX100 F/T3 £430
(Carriage £8/Unit)



NEC PC 8023 BE-C
100 CPS, 80 cols Logic Seeking, Bidirectional, Forward and Reverse Line Feed, Proportional Spacing, Auto Underline, Hi-Res and Block Graphics. Greek Char. Set. Only **£320** + carr. **£8.00.**

SEIKOSHA GP 100A 80 cols 30CPS Full ASCII & Graphics 10'' Wide Paper Now only **£190** + **£6.00** carr. Ask for details on GP 250A.

MICROTIMER

6502 Based Programmable clock timer with
* 224 switching times/week cycle
* 24 hour 7 day timer
* 4 independent switch outputs directly interfacing to thyristor/triacs.
* 6 digit 7 seg. display to indicate real time, ON/OFF and Reset times.
* Output to drive day of week switch and status LEDS.

Full details on request. Price for kit £57.00.

ALSO AVAILABLE FROM STOCK FULL RANGE OF TTL's, CMOS and LINEAR IC's
FOR DETAILED PRICE LIST PLEASE SEND S.A.E.

CONNECTOR SYSTEMS

JUMPER LEADS

24'' cable with 25 way D Conn.
Male **550p** Female **600p**

24'' Cable with DIP Headers

	14pin	16pin	24pin	40pin
Single	145p	165p	240p	380p
Double	210p	230p	345p	540p

Cable with Sockets

	20way	26way	34way	40way
Single 24''	185p	210p	270p	300p
Double 18''	260p	385p	400p	540p

ID CONNECTORS (SPEED BLOC TYPE)

	St.Pin	Ang. Pin	Recep-ticles	Edge Conn.
10 way	90p	90p	85p	200p
20 way	145p	160p	125p	240p
26 way	175p	190p	150p	300p
34 way	200p	215p	160p	380p
40 way	220p	230p	190p	550p
50 way	235p	260p	200p	600p

AMPHENOL CONNECTORS

36 way plug/socket	£5.50
24 way plug/socket	£5.50

Available in IDC or Solder version

EUROCONNECTORS

	Plug	Socket
DIN 41617 21 way	180p	180p
DIN 41617 31 way	200p	200p
DIN 41612 2 × 32 way		
Straight pins	290p	330p
2 × 32 way Ang. pin	325p	400p
2 × 32 way wire wrap	325p	375p
3 × 32 way St. pins	250p	400p
3 × 32 way Angled pins	350p	–
IDC Connector A + B	–	475p
IDC Connector A+ C	–	525p
2 × 32 way U Connector	£15	

(please specify a + b or a + c)

MIN D CONNECTORS

	MALE			
No. of ways	9	15	25	37
Solder	95p	135p	160p	250p
Angled	160p	230p	210p	425p
	FEMALE			
Solder	110p	160p	210p	350p
Angled	175p	240p	275p	500p
Hood	100p	100p	100p	130p

(Top or Side Entry)

EDGE CONNECTORS

	0.1''	0.156
2x18 way	—	140p
2x22 way	200p	250p
2x23 way	200p	—
2x25 way	225p	300p
1x43 way	260p	—
2x43 way	395p	—
1x77 way	700p	—

DIP HEADERS

	14pin	16pin	24pin	40pin
Solder type	40p	50p	£1	£2
IDC type	120p	140p	£2	£2.25

RIBBON CABLE (Grey)

Price/meter	
10 way 50p	26 way 120p
14 way 60p	34 way 180p
16 way 70p	40 way 180p
20 way 80p	50 way 330p
24 way 115p	64 way 370p

DIL SWITCHES

4 way 70p	8 way 90p
6 way 80p	10 way 100p

SPECIAL OFFER

	1-24	25-99
2114-200nS	80p	75p
2716 (+5V)	250p	225p
2532	350p	335p
4116-2	80p	75p
4164-2	450p	435p
6116P-3	350p	335p

MONITORS

MICROVITEC 1431 14'' Colour Monitor **£249** + **£8** Carr.
SANYO 14'' Colour Monitor RGB **£255** + **£8**carr.
SANYO 12'' Hi-Res Green Monitor **£99** + **£6** Carr.

UV ERASERS

UVIB up to 6 Eproms	£47.50
UV140 up to 14 Eproms	£61.50
UVIT with Timer	£60.00
UV141 with Timer	£78.00

(Carr £2/eraser)

All erasers are fitted with mains switches and safety interlocks.

TECHNOMATIC LTD

MAIL ORDERS TO: 17 BURNLEY ROAD, LONDON NW10 1ED
SHOPS AT: 17 BURNLEY ROAD, LONDON NW10
(Tel: 01-452 1500, 01-450 6597. Telex: 922800)
305 EDGWARE ROAD, LONDON W2

PLEASE ADD 40p p&p & 15% VAT
(Export: no VAT, p&p at Cost)

Orders from Government Depts. & Colleges etc. welcome.

Detailed Price List on request.
Stock items are normally by return of post

● Circle No. 126

SUBSCRIBE NOW!

And get a Practical Computing BINDER -worth £4- free of charge!



Yes, now's the time not only to ensure a year's supply of Practical Computing for just £12.00 but also to obtain a handsome binder, in which to store a year's issues, ABOLUTELY FREE OF CHARGE.

Practical Computing is one of Britain's most popular personal computer magazines providing practical guidance and advice for its readers. A typical issue:

- Examines the latest microcomputers and prints Conclusions highlighting the strong and weak points of each system;
- Reviews software, including programs such as Visicalc and its successors, which are of particular interest to business people;
- Describes how microcomputers are being used in practice for a wide variety of tasks in business, administration and the professions;
- Provides regular sections containing programming tips and advice for users of Apple, BBC, Commodore, Sinclair and Tandy computers.

Little wonder then that Practical Computing has come to be regarded as essential reading and a useful work of reference by a growing body of businessmen, professional people, teachers and administrators.

Now you can guarantee that this information is available to you and at the same time be certain that your copies of Practical Computing are stored safely where they can be referred to without fear of loss or damage, by taking advantage of our Subscription plus FREE binder offer.

All you have to do is complete the coupon and return it with your cheque or postal order for £12.00 payable to IPC Business Press. But hurry! The free binder offer is open only as long as we have supplies available.

To: Practical Computing, Free Binder Offer, Subscription Manager, IPC Business Press, Stuart House, Perrymount Road, Haywards Heath, West Sussex, RH16 3DH.

Please send me a copy of Practical Computing every month for a year together with a FREE binder. I enclose a cheque/PO for £12 (UK)/£18 (Overseas) payable to IPC Business Press Ltd.

Alternatively, I would like to pay by credit card.

Please debit my Barclaycard/Access/American Express/Diners Card* account

Account Number ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐ *Please delete as appropriate

Signature ..... Date .....

Name .....


Address .....

.....

.....

PC4/83

The WM 2000 prints so fast it's ahead of its time

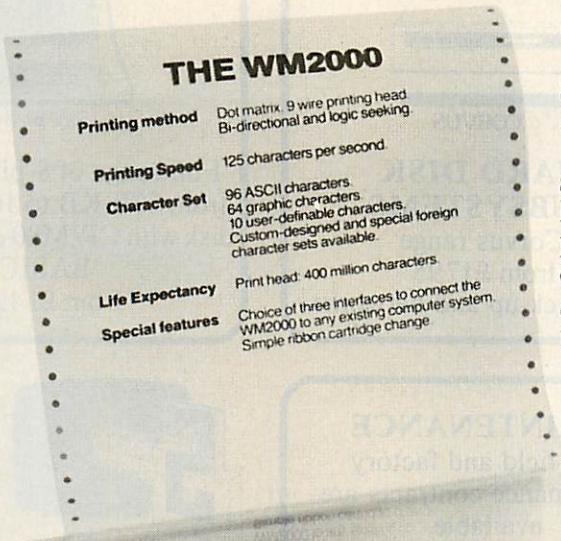


These are just a few of the specifications of the WM2000 from Walters Microsystems.

It has one of the most advanced specifications of any printer of its kind. And it's British.

It certainly makes sense to build this superior technology into your system. It's used by the Ministry of Defence (NATO Number pending) and by the Department of Industry & Education. Because quite simply any other printer takes second place.

WALTERS MICROSYSTEMS INTERNATIONAL

'Cetec House', Lincoln Road,
High Wycombe,
Buckinghamshire

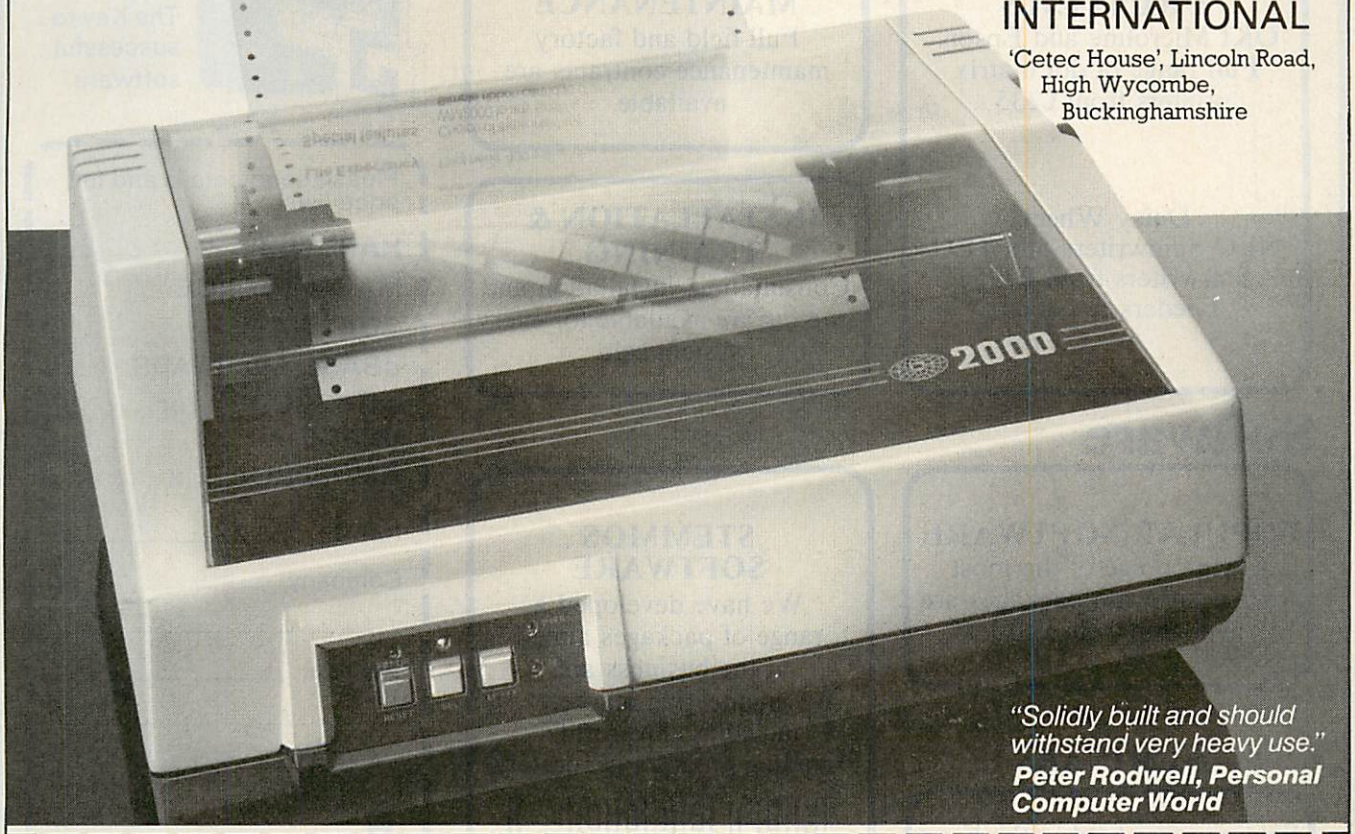

"Solidly built and should withstand very heavy use."
Peter Rodwell, Personal Computer World

To: **Walters Microsystems International Ltd** 'Cetec House' Lincoln Road High Wycombe Buckinghamshire
I want to know more about the world-beating WM2000

PC1

Name _____ Address _____

Company _____ Position _____ Telephone Number _____

Dealer/OEM enquiries welcomed.

● **Circle No. 128**

Britain's specialists in software London's choice for hardware


Our reputation in software makes us a choice for hardware

Hardware

A copy of our own Autocode 1, the world's leading automatic program generator is given with our compliments for every hardware sale over £1,500



Full range of 16 bit machines up to 896K RAM and 10 MB hard disk with CP/M86, MSDOS & Microsoft BASIC from £2396.



HARD DISK SUBSYSTEMS
Corvus range from £1795
Tape back-up and networks.




Full range of 8 bit machines from 330 KB to 10 MB hard disk with CP/M80 & Microsoft BASIC from £1495.

PRINTERS
OKI Microline and Epson. Full range of dot matrix printers from £235.

Daisy Wheel
NEC Spinwriters and TEC Starwriters from £995, Feeders & hoods.

MAINTENANCE
Full field and factory maintenance contracts are available.

INSTALLATION & TRAINING
Consultation, installation and training are available for every system sale.



STEMMOS
The Key to successful software

Software

POPULAR SOFTWARE
A wide range of the most popular software packages are available from £125.

SEMINARS

Seminars are held in the heart of London on our speciality, dBase II.

STEMMOS SOFTWARE
We have developed a range of packages aimed at the business and engineering market including the world's leading program generator

AUTOCODE 1

for dBASE II and CIS COBOL

Please send details and full price lists

- HARDWARE ☐
- MAINTENANCE ☐
- SOFTWARE ☐
- dBASE SEMINARS ☐
- AUTOCODE I for dBASE II ☐
- CIS COBOL ☐

Name _____

Company _____

Address _____

STEMMOS
344 Kensington High Street
London W14 8NS Tel: 01-602 6242
Telex: 893003 STEMOS G

● Circle No. 129

Paperwork getting on top of you?



Get TIM III- the microcomputer user's best friend

Why not use your microcomputer to wrestle with the sheer volume of data which your business generates? Already working for thousands of users in the USA, TIM III, the data management system for personal computers, could reduce your filing and retrieval problems to micro-size in no time at all.

At a cost of just £399.00 complete, TIM III will bring a whole new level of efficiency to your business, speeding up information access and streamlining productivity in the generation of records, lists and reports.

The real beauty of TIM III is that it could take just one hour to grasp its intricacies. With step-by-step menu operation and on-screen help available at every stage, TIM III can be mastered by even the most inexperienced operator in under a day.

And TIM III also interfaces with popular financial modelling and word processing software packages to provide an even wider range of facilities.

So get the most out of your micro – get TIM III. From selected dealers throughout the UK, or post the coupon to: Electronic Office Services, 235/241, Blackfriars Road, London, SE1 8NW.

EOS TIM III®
Total Information Management

Please send me details of TIM III and the name of my nearest distributor. ☐

Address

Post to Electronic Office Services, 235/241 Blackfriars Road, London, SE1 8NW.

● Circle No. 130

No1 source for software

SOFT OPTION SOFTWARE CENTRE

When you're thinking software, think Soft Option first. Chances are we'll have the right product, in the right format, on the shelf in quantity.

We despatch fast from stock. We also offer a dealer pricing system to suit individual needs with cumulative discounts available.

Finally, we *know* about software—we can give you technical support when it's needed.

So make Soft Option your first call. We'll soon become your first choice.



CP/M 80 CP/M 86 MS-DOS

and IBM PC Software



SOURCES INCLUDE:

We hold stocks of most software manufacturers including:

MICROPRO
MICROSOFT
DIGITAL RESEARCH
SORCIM
IUS
ASHTON TATE



MACHINE FORMATS INCLUDE:

Software can be made available in 8 BIT or 16 BIT formats to suit most micro-computers currently on the market including:

Superbrain
North Star Horizon
North Star Advantage
Columbia PC ▪ IBM PC
Televideo ▪ Apple
CP/M 8" ▪ Rair ▪ Sirius



PROGRAMS INCLUDE:

Our complete list of software is too long to publish and changes by the hour but here are a few examples to whet your appetite.

WORDSTAR	MICROPRO's comprehensive word processing system.
PL/I-80	DIGITAL's PL/I Compiler.
BASIC-80	MICROSOFT's popular and powerful basic Interpreter. There is a Compiler too.
FORTRAN-80	Fortran Compiler to ANSI X3.9 1966 except COMPLETE data.
SUPERCALC	SORCIM's spread sheet and modelling system.
EASYFILER	Data Recording System for the IBM PC from IUS.
dBASE II	Relational Database Management from Ashton Tate.

RING THE SOFTLINE Grantham (0476) 860171

All products are supplied complete with full originator's documentation.
Please send large s.a.e. for full details.
TRADE ENQUIRIES WELCOME.

BARCLAYCARD VISA




Soft option

SOFTWARE CENTRE

The Soft Option (UK) Ltd. Home Farm House Colsterworth Grantham Lincolnshire NG33 5HZ Tel: Grantham (0476) 860171

● Circle No. 131

Cumana drives BBC Micro best!

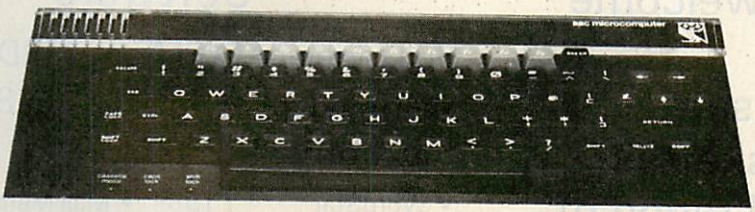


CUMANA DRIVES + OWN POWER SUPPLY =BIG PLUS FOR BBC MICRO USERS . . . JUST FOR STARTERS

The 'ice on the cake' is that because the Cumana Drive has its own power supply, it can be used with many other Micros when connected via the appropriate cable. Cumana supply a Drive connecting cable which has a standard 34 way edge connector plus 34 way BBC connector in the same cable length. This allows the Cumana Drive to be connected to numerous makes of micro without the need to change connecting cable. And the Japanese manufactured disk drives are quiet and utterly dependable.

12 MONTH FULL WARRANTY

£199 100K

£619 800K

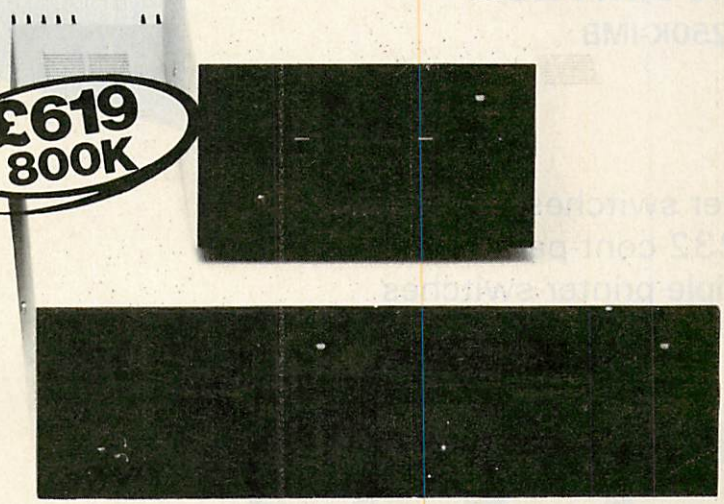

CS50A	Single 40 track drive 100K	**£199**
CD50F	2 double sided 80 Track TEAC Drives with cabinet and power supply 800K	**£619**
	Disk formatter and instructional manual	**£15**
	Model A-B upgrade kits **£65**	

Many other Disk Models available for BBC. Call or write for Data Sheet.

CUMANA LTD

Unit 1, The Pines Trading Estate, Broad Street, GUILDFORD, Surrey GU3 3BH (0483) 503121
Telex: 859380 CUMANA


Please add VAT to all prices

DEALER & EDUCATIONAL ENQUIRIES WELCOME – GENEROUS DISCOUNTS AVAILABLE

● **Circle No. 132**

BOARDS FOR THE IBM PC



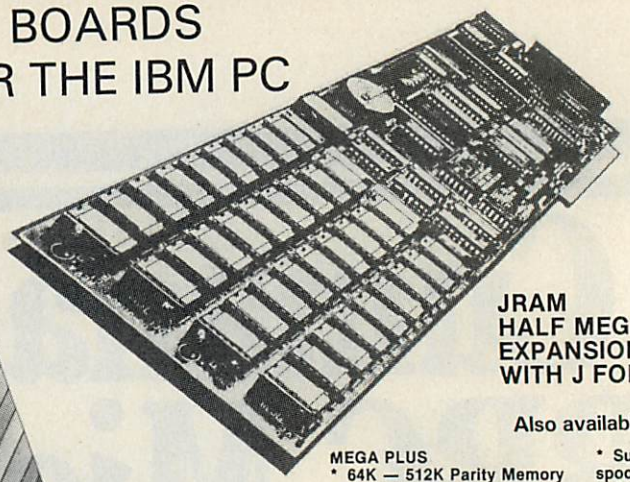

JRAM
HALF MEGABYTE MEMORY EXPANSION BOARD COMES WITH J FORMAT £695.00

Also available

MEGA PLUS
- 64K — 512K Parity Memory
- Clock Calendar (Std)
- IBM Compatible Async Port 1 (Std)
- IBM Compatible Async Port 2 (Opt)
- IBM Compatible Printer Port (Opt)
- 512K with Mega Pak Option
- Super drive included (disc emulator Prog)
- Super spool included (print spooler prog)
- Split memory addressing

COMBO PLUS
- 64K — 256K Parity Memory
- Clock Calendar (Std)
- IBM Compatible Async Port (Opt)
- IBM Compatible Printer Port
- Super Drive included
- Super Spool

Dealer enquiries welcome

dy San

Dysan Diskettes full range of disks available


Software

Full range of C/PM and MSDOS Software available for IBM PC Sirius and most other Micros.

• WordStar	£195	• Mail Merge	£ 7
• Spell Star	£130	• Super Calc	£17
• CON/CPM	£250	• DBase II	£37
• Auto Code	£120	• Milestone	£19

Call for Full Price List.


DISK DRIVES
250K-IMB



Full range of CDC drives from 250K to 1MByte sub systems/Bare drives Winchester available. BBC, NASCOM, GEMINI, TANDY, VIDEO GENIE AND MANY MORE.



Printer switches
RS 232 cont-para
multiple printer switches

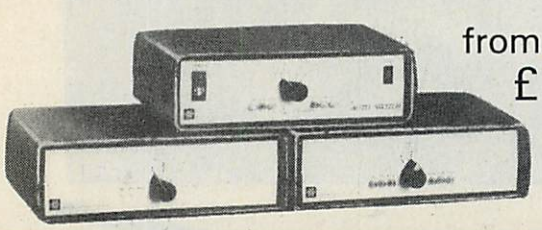


from £79

EPSON HX-20

MICROWARE
LONDON LTD.

01-272 6237
01-272 6398

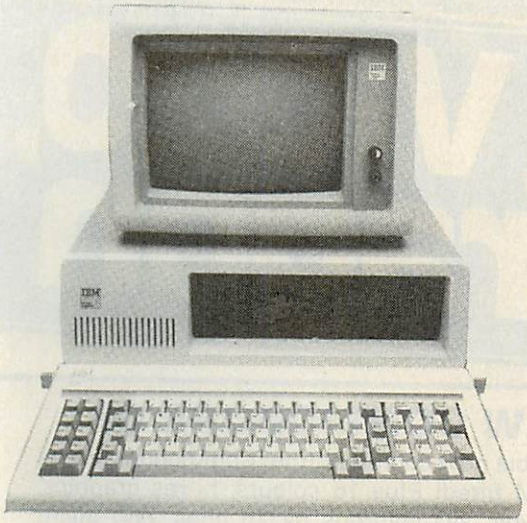

We can upgrade your IBM PC to Dual Disk Drive, 640K or 1.2MB Hard Disks also available.

WE EXPORT WORLD WIDE!

NEW COLOUR MONITOR
for the IBM PC

* Styled for IBM PC
* 80 x 26 Display
* 690 Horizontal Resolution
* NEC 0.31mm dot Pitch CRT

OSBORNE 1

FREE WITH EVERY MACHINE
Monitor, 10 Discs, CPM, Super Calc, WordStar and Mail Merge.



ACT sirius 1



Z80 Card and full range of software available



SUPERBRAIN™

From 320K to 15MByte available

CALL FOR CASH AND CARRY PRICES

MICROWARE
LONDON LTD.

01-272 6237
01-272 6398

● Circle No. 134



If your order contains over £120 worth of computer hardware apply now for interest free credit by telephoning: Mail-order: (0702) 552911. London Shop: 01-748 0926. Birmingham Shop: 021-356 7292. Southend Shop: 0702 554000 or write to P.O. Box 3, Rayleigh, Essex SS6 8LR.

You pay 10% down, then 10% per month for a further nine months (to nearest penny). Example: Atari 400 48K. Cash price £299. Credit terms: £29.90 down, then £29.90 per month for nine months. Total £299. Credit quotations on request. This offer subject to approval which can take up to 48 hours (APR = 0%).

THE NEW COMMODORE 64

The incredible new computer from Commodore comes with 64K RAM fitted! Plus 16 colours, hi-res graphics, 320 x 200 pixels, 40 columns by 25 lines, Z80 micro processor can be added — that means you can run CP/M software, 8 independently movable Sprites with collision detection, and a sound generator with 3 voices, 4 wave-forms, envelope and filter to rival some dedicated music synthesisers. And all this at the most incredible price ever.

(AF56L) Only £339.00

DRAGON 32



The amazing new British computer with a full-travel standard keyboard, a 16-bit microprocessor, 32K RAM fitted (expandable to 64K and later to 256K!!), 9 colours, hi-res graphics and Microsoft extended colour BASIC (the very best BASIC to learn with). It can be used with virtually any ordinary cassette recorder, it has a printer interface (Centronics-type), joysticks are available and it's in-credible value for money.

(AF57M) Only £199.50.


Lots of new Dragon software available.

THE AMAZING ATARI COMPUTERS

4 Consoles Available:

Atari 400, 16K RAM (AF36P) £199.95
Atari 400, 48K RAM (AF37S) £249.00
Atari 800, 16K RAM (AF02C) £399.00
Atari 800, 48K RAM (AF55K) £440.00

★All above with BASIC & handbooks Carriage free, delivery next day by Datapost

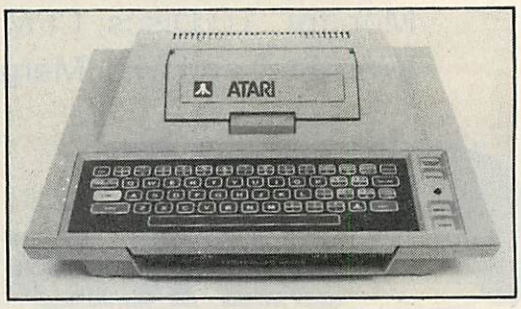



Other hardware:		
Cassette Recorder	(AF28F)	£50.00
Disk Drive	(AF06G)	£299.95
Thermal Printer	(AF04E)	£199.95
Epson MX80T Mk III	(AF38R)	£399.95
Epson MX80F/T Mk III	(AF40T)	£447.35
Printer Interface for 400	(AF41U)	£59.95
Printer Interface for 800	(AF42V)	£59.95
Interface Module	(AF29G)	£135.00
Versawriter	(AF43W)	£199.95
16K RAM Module	(AF08J)	£55.00
48K RAM Module for 400	(AF44X)	£99.95
48K Upgrade for 400	(AF45Y)	£75.00
Floppy Disk	(YX87U)	£2.50
Le Stick	(AC45Y)	£24.95
Joystick Controllers (Pair)	(AC37S)	£13.95
Paddle Controllers (Pair)	(AC30H)	£13.95

For full details ask for our hardware leaflet (XH54J) SAE appreciated

JOIN THE U.K. ATARI COMPUTER OWNERS' CLUB

An independent users' group. Four issues of the club magazine for only £3.00! Address your subscription to Ron. Issue 1 of the club magazine featured a tutorial on character set redefinition and contained a collection of demonstration and games programs and lots more. Issue 2 featured a tutorial on player/missile graphics, an article about graphics on computers, a selection of members' contributions to the program library and much more.

THE FINEST SELECTION OF ATARI SOFTWARE

Teach Yourself Programs		
Conversational French	5C-16K-YG44X	£39.95
Conversational German	5C-16K-YG45Y	£39.95
Conversational Spanish	5C-16K-YG46A	£39.95
Conversational Italian	5C-16K-YG47B	£39.95
Touch Typing	2C-16K-YG49D	£19.95
States & Capitals	1C-16K-YG56L	£14.95
Euro Countries & Capitals	1C-16K-YG57M	£14.95
*Kids 1 (3 Programs)	1C-16K-BG00A	£11.75
*Kids 2 (3 Programs)	1C-16K-BG02C	£11.75
My First Alphabet	1D-32K-KB23A	£29.95
Learn Programming		
Invitation To Programming 1	1C-8K-YG43W	£19.95
Invitation To Programming 2	2C-8K-BQ67X	£22.95
Invitation To Programming 3	2C-8K-BQ68Y	£22.95
*Basics of Animation	1C-16K-BQ57M	£14.50
*Player Missile Graphics	1C-32K-BQ59P	£21.25
*Display Lists	1C-16K-BQ51F	£14.50
*Horiz/Vertical Scrolling	1C-16K-BQ53H	£14.50
*Page Flipping	1C-16K-BQ55K	£14.50
*Sounds & Music	1C-16K-BG04E	£14.50
*Tricky Tutorials First 6 Page 6	3C-32K-BG06G	£69.95
	1D-24K-KB24B	£27.50
Business Programs		
Visicalc	1D-32K-YL39N	£119.95
Atari Word Processor	1C&3D-48K-YG42V	£99.95
Text Wizard	1D-32K-BQ99H	£75.00
*Mini Word Processor	1C-32K-BG08J	£14.50
File It 2	1D-48K-BG10L	£33.87
Filemanager 800	1D-40K-BG59P	£75.00
Graph It	2C-16K-YG51F	£14.95
Statistics	1C-16K-YG52G	£14.95
Mortgage & Loan Analysis	1C-16K-BQ66W	£14.95
*Bob's Business	1C-32K-BG11M	£10.59
Adventure Games		
Galactic Empire	1C-32K-BQ14Q	£14.50
Galactic Trader	1C-32K-KB25C	£14.50
*Galaxy	1C-16K-BG75S	£14.95
*Rescue At Rigel	1C-32K-BQ21X	£20.75
*Datestones of Ryn	1C-32K-BQ22Y	£13.80
*Star Warrior	1C-32K-BG59P	£75.00
*Voyager I	1C-32K-BQ95D	£14.95
*Invasion Orion	1C-24K-BQ23A	£17.25
*GFS Sorceress	1C-48K-KB26D	£21.95
*Planet Miners	1C-24K-BG89W	£11.95
Star Flight	1D-40K-BG26D	£14.95
*Journey To The Planets	1C-32K-KB28F	£20.45
*Crush Crumble & Chomp	1C-32K-BQ83E	£20.75
Mission Asteroid	1D-40K-BQ91Y	£17.19
Wizard & The Princess	1D-40K-BQ25C	£21.79
Ulysses & Golden Fleece	2D-40K-BQ92A	£20.64
Dr Goodcode's Cavern	1D-48K-KB04E	£21.95
Escape From Vulcan's Isle	1D-40K-KB30H	£20.75
Zork I	1D-32K-BQ94C	£29.95
Zork II	1D-32K-BQ95D	£29.95
Zork III	1D-32K-KB31J	£29.95
Ali Baba & The 40 Thieves	1D-32K-BQ78K	£25.93
*Temple Of Apshai (Part 1)	1C-32K-BQ85G	£27.45
*Upper Reaches (Part 2)	1C-32K-BQ87U	£13.80
*Curse Of Ra (Part 3)	1C-32K-BQ89W	£13.80
Dragon's Eye	1D-40K-KB32K	£20.75
Crypt Of The Undead	1D-40K-KB33L	£20.75
*Empire Of The Overmind	1C-40K-BG73Q	£21.95
*King Arthur's Heir	1C-16K-KB97F	£20.75
*Lords Of Karma	1C-40K-BG79L	£14.95
Nightmare	1D-40K-KB35Q	£20.75
Analog Adventure	1D-32K-BQ33L	£16.95
Adventure Land	1C-24K-BQ00A	£17.95
Pirate Adventure	1C-24K-BQ01B	£17.95
Mission Impossible	1C-24K-BQ02C	£17.95
Voodoo Castle	1C-24K-BQ03D	£17.95
The Count	1C-24K-BQ04E	£17.95
Strange Odyssey	1C-24K-BQ05F	£17.95
Mystery Fun House	1C-24K-BQ06G	£17.95
Pyramid Of Doom	1C-24K-BQ07H	£17.95
Ghost Town	1C-24K-BQ08J	£17.95
Savage Island I	1C-24K-BQ09K	£17.95
Savage Island II	1C-24K-BQ10L	£17.95
Golden Voyage	1C-24K-BQ11M	£17.95
Treasure Quest	1C-16K-KB36P	£10.95
Softporn Adventure	1D-40K-BQ93B	£20.64
Deadline	2D-32K-BQ96E	£37.35
Starcross	1D-32K-KB37S	£29.95
Energy Czar	1C-16K-YG53H	£14.95
Kingdom	1C-8K-YG55K	£14.95
Space Shuttle Module I	1D-32K-BG65V	£18.95
War Games		
The Shattered Alliance	1D-48K-BQ98G	£28.95
Legionnaire	1C-16K-KB00A	£25.95
*The Battle Of Shiloh	1C-40K-BG63T	£28.95
*Dnieper River Line	1C-48K-BG71N	£18.95
*Tanktics	1C-24K-BG93B	£17.45
*Nth Atlantic Convoy Raider	1C-16K-BG83E	£11.95
*Midway Campaign	1C-32K-BG81C	£11.95
*Battle For Normandy	1C-32K-KB38R	£28.95
*Tigers In The Snow	1C-40K-KB01B	£28.95
War	1D-32K-KB40T	£17.95
*B1 Nuclear Bomber	1C-16K-BG68Y	£11.95
*Nukewar	1C-16K-BG87U	£11.95
*Conflict 2500	1C-32K-BG85G	£11.95
*Cytron Masters	1C-32K-KB41U	£28.95
Arcade Games		
Star Raiders	1E-8K-YG66W	£29.95
*Choplifter	1E-16K-KB87U	£34.95

Commodore 64
32 computer hardware



THE NEW MAPSOFT CATALOGUE

48 full colour pages of Atari Dragon and VIC 20 hardware and software. A comprehensive guide to what's available. Price £1.





THE NEW MAPLIN CATALOGUE

contains full details of all the computers and most of the software shown here and much more. On sale now in all branches of W.H. Smith price £1.25. Or send £1.50 to P.O. Box 3, Rayleigh, Essex.

ATARI SOFTWARE continued

Embargo	-1E-8K-KB43W	£34.95
Caverns Of Mars	-1D-16K-BQ69A	£29.95
K-Star Patrol	-1E-8K-BG52G	£34.95
*Protector	-1E-16K-KB88V	£34.95
*Space Chase	-1C-16K-BG42V	£10.95
Gorf	-1E-16K-KB44X	£34.95
Andromeda	1D-24K-KB17T	£22.50
Bomber Attack	-1C-16K-BG70M	£11.95
Asteroids	-1E-8K-YG60Q	£29.95
*Stellar Shuttle	-1C-16K-KB45Y	£23.50
*Race In Space	-1C-16K-BQ35Q	£14.95
Missile Command	-1E-8K-YG64U	£29.95
Space Invaders	-1E-8K-YG70M	£29.95
Deluxe Invaders	-1E-16K-KB89W	£31.95
K-razy Kritters	-1E-8K-BG51F	£34.95
*Rear Guard	-1C-16K-KB47B	£14.50
*Shootout At OK Galaxy	-1C-16K-BG97F	£14.95
Defender	-1E-16K-KF10L	£29.95
Galaxian	-1E-16K-KF11M	£29.95
*Stratos	-1C-16K-KB53H	£24.95
*Galactic Chase	-1C-16K-BQ62S	£16.95
Threshold	-1D-40K-BG18U	£27.54
*Space Games (3 Programs)	-1C-32K-KB55K	£17.95
*Lunar Lander	-1C-24K-BQ16S	£10.95
*Nautilus	-1C-32K-KB13P	£27.50
Seafox	-1D-48K-KB57M	£23.50
*Sea Dragon	-1C-16K-KB58N	£24.95
K-razy Shoot Out	-1E-8K-BQ63T	£34.95
*Shamus	-1E-16K-KB90X	£34.95
Serpentine	-1E-8K-KB60Q	£34.95
Centipede	-1E-16K-BQ70M	£29.95
Angle Worms	-1C-8K-BG50E	£10.95
*Bug Off!	-1C-16K-KB61R	£21.95
*Bug Attack	-1C-24K-BG36P	£23.95
*Tutti Frutti	-1C-16K-KB63T	£17.95
*Genetic Drift	-1C-16K-KB65V	£23.50
*Haunted Hill	-1C-16K-BG38R	£16.95
Claim Jumper	-1E-16K-KB67X	£34.95
*Chicken	-1E-16K-KB91Y	£34.95
*Canyon Climber	-1C-16K-BG44X	£23.50
*Frogger	-1C-16K-KB68Y	£22.95
*Preppie	-1C-16K-KB07H	£21.95
*Pacific Coast Highway	-1C-16K-BG13P	£23.50
Fire Bird	-1E-4K-KB70M	£29.95
*Apple Panic	-1C-16K-KB92A	£23.50
Track Attack	-1D-32K-KB05F	£23.50
Pac Man	-1E-8K-BQ71N	£29.95
Ghost Hunter	-1C-16K-BQ64U	£19.95
*Jawbreaker	-1C-16K-BG17T	£20.64
Mouskattack	1D-32K-BQ77J	£22.95
K-razy Antiks	-1E-8K-KB16S	£34.95
Pathfinder	-1D-32K-BG33L	£26.66
*Labyrinth	-1C-16K-KB71N	£23.50
*Crossfire	-1E-16K-KB93B	£34.45
Tumble Bugs	-1D-24K-BG46A	£23.50
Wizard Of Wor	-1E-16K-KB94C	£34.95
*Time Bomb	-1C-16K-BG40T	£10.95
Thunder Island	-1C-16K-BQ37S	£10.95
TT Racer	-1C-16K-KB73Q	£19.95
*Dodge Racer	-1C-16K-BG29G	£27.50
*Matchracer	-1C-16K-BG31J	£22.50
*Baja Buggies	-1C-16K-KB74R	£22.95
*Zaxxon	-1C-16K-KF20W	£31.50
*Moon Shuttle	-1C-16K-KF22Y	£27.50
Roadracer/Bowler	-1C-16K-BG99H	£11.95
*Shooting Gallery	-1C-16K-BQ36P	£14.95
*Shooting Arcade	-1C-16K-BG15R	£23.50
Rasterblaster	1D-32K-BQ35Q	£22.95
David's Midnight Magic	-1D-48K-KB78K	£27.50
Super Breakout	-1E-8K-YG67X	£24.95
*Clowns & Balloons	-1C-16K-KB79L	£23.50
Guns Of Fort Defiance	-1C-32K-BG78K	£14.95
Mountain Shoot	-1C-16K-BQ12N	£10.95
*Tank Trap	-1C-16K-YL34M	£9.95

Home Entertainment

Scram	-1C-16K-YG58N	£19.95
Knockout	-1C-16K-KB81C	£14.95
Basketball	-1E-8K-YG61R	£24.95
Cypher Bowl	-1C-16K-BQ20W	£29.50
Sunday Golf	-1C-16K-BQ13P	£10.95
Golf Challenge	-1C-16K-KB82D	£17.19
Tournament 8-Ball Pool	-1C-16K-BQ45Y	£19.95
*Ricochet	1C-16K-BG47B	£13.80
Computer Chess	-1E-8K-YG63T	£24.95
Fast Gammon	-1C-8K-YL33L	£16.95
*Gomoku	-1C-16K-BQ18U	£14.95
*Reversi	-1C-16K-BQ19V	£14.95
*Acquire	-1C-16K-BG66W	£14.95
*Stocks & Bonds	-1C-32K-BG91Y	£14.95
Cribbage & Dominoes	-1C-16K-BQ43W	£14.95
*Poker Solitaire	-1C-16K-BQ17T	£10.95
Blackjack	-1C-8K-YG62S	£14.95
Hangman	-1C-8K-YG54J	£14.95
Wordrace	1D-32K-KB09K	£19.65
Wordrace (Part 2)	-1D-32K-KB10L	£15.66
Abuse	1D-40K-KB11M	£19.65
Super Cubes & Tilt	-1C-16K-BQ48C	£14.95
Humpty Dumpty Jack & Jill	1C-16K-BQ38R	£14.95
Hickory Dickory & Baa Baa	-1C-16K-BQ39N	£14.95
European Scene Jigsaws	2C-16K-BQ41U	£14.95
Video Easel	-1E-8K-BQ72P	£24.95
Micro Painter	-1D-48K-BG56L	£27.50
Paint	-1D-48K-KB22Y	£29.95
Music Composer	-1E-8K-YG48C	£35.95
Movie Themes	-1C-8K-BQ34M	£9.95

Computer Languages

Assembler	-1C-16K-YL32K	£21.95
Syn Assembler	-1D-48K-KB83E	£38.95
Assembler Editor	-1E-8K-YG68Y	£34.50
Macro Assembler	-1D-32K-BQ73Q	£59.95
Basic A+ & Op System A+	-1D-48K-BQ32K	£59.95
Microsoft Basic	-1D-32K-BQ74R	£59.95
Pilot (Educator)	-1E & 2C-16K-BQ75S	£79.95
Pilot (Consumer)	-1E-8K-YG69A	£54.00
QS Forth	-1D-24K-YL29G	£62.95
Tiny C	-1D-48K-BG62S	£67.80
Inter-Lisp/65	-1D-48K-BG61R	£99.00

Utilities

SAM (Speech Synthesiser)	-1D-32K-KB15R	£47.19
Programming Aids Pack	-1C-16K-BG60Q	£10.95
*Basic Routines	-1C-16K-KB84F	£24.95
*6502 Disassembler	-1C-8K-YL30H	£9.95
Atari World	-1D-40K-BQ27E	£47.95
*3D Supergraphics	-1C-40K-BQ29G	£31.95
The Next Step	-1D-32K-BG64U	£27.54
K-DOS	-1D-32K-BQ76H	£59.95
Diskey	-1D-32K-KB86T	£39.95
Disk Manager	-1D-32K-BG58N	£27.50
Disk Detective	-1D-16K-BG57M	£23.50
MAC 65 & Op System A+	-1D-32K-BQ30H	£59.95
Telelink	-1E-8K-YG59P	£21.95

Disk versions also available though price and memory size may be different

Books

Master Memory Map	-XH57M	£4.00
De Re Atari	-WG56L	£16.95
Operating System User's Manual & Hardware Manual	-WA46A	£16.95
Atari Basic-Learning By Using	-WG55K	£6.24
Games For The Atari	-WA47B	£4.45
Atari Basic	-WG05F	£7.65
Atari Sound & Graphics	-WA39N	£8.25
Your Atari Computer	-WA40T	£13.45
6502 Assembly Language Subroutines	-WA05F	£14.90
Advanced 6502 Interfacing	-WA41U	£11.64
Beyond Games (6502)	-WA45Y	£13.00
Computers For People	-WA00A	£8.25
Analog: The Magazine For Atari (6 issues) Annual Subscription	-GG24B	£9.00

Send sae now for our new software leaflet with details of all the above programs.
Order As XH52G -- Issue 3.

Key: C = Cassette. D = Disk. E = Cartridge.
2C = 2 Cassettes etc. 8K, 16K shows minimum memory requirement.

Note: Order codes shown in brackets. Prices correct at time of going to press (Errors excluded).

VIC20 COLOUR COMPUTER

Hardware

VIC20 Console	(AF47B)	£159.99
C2N Cassette Unit	(AF48C)	£44.95
VIC Printer	(AF49D)	£230.00
VIC Disk Drive	(AF50E)	£299.99
3K RAM Cartridge	(AF51F)	£29.95
8K RAM Cartridge	(AF52G)	£44.95
16k RAM Cartridge	(AF53H)	£59.95

Joysticks and Paddles

Single Joystick	(AC53H)	£7.50
Pair of Joysticks	(AC37S)	£13.95
Le Stick	(AC45Y)	£24.95
Pair of Paddles	(AC30H)	£13.95

Programming Aid Cartridges

Super Expander: 3K RAM and Hi-res graphics	(AC54J)	£34.95
Programming Aid: Additional commands, function Key programming etc	(AC55K)	£34.95
Machine Code Monitor	(AC56L)	£34.95

Software (all 3K unless stated)

Introduction to BASIC Cassettes

Part 1	(AC57M)	£14.95
Part 2	(AC58N)	£14.95

Game Programs

Avenger Cartridge	(AC59P)	£19.95
Star Battle Cartridge	(AC60Q)	£19.95
Super Slot Cartridge	(AC61R)	£19.95
Jelly Monsters Cartridge	(AC62S)	£19.95
Alien Cartridge	(AC63T)	£19.95
Super Lander Cartridge	(AC64U)	£19.95
Road Race Cartridge	(AC65V)	£19.95
Rat Race Cartridge	(AC66W)	£19.95
Blitz Cassette	(AC67X)	£4.99
Mole Attack Cartridge	(AC85G)	£24.95
Adventureland Cartridge	(AC86T)	£24.95
Pirate Cove Cartridge	(AC84F)	£24.95
Mission Impossible Cartridge	(AC87U)	£24.95
Voodoo Castle Cartridge	(AC88V)	£24.95
The Count Cartridge	(AC89W)	£24.95
Sargon 2 Chess Cartridge	(AC77J)	£24.95
Gorf Cartridge	(AC90X)	£24.95
Omega Race Cartridge	(AC91Y)	£24.95
Another VIC in The Wall Cassette	(AC78K)	£7.00
VIC Panic Cassette	(AC79L)	£7.00
Cosmiads Cassette	(AC80B)	£7.00
Backgammon Cassette (+3K)	(AC81C)	£7.00
VIC-Men Cassette	(AC82D)	£7.00
VIC Asteroids Cassette	(AC83E)	£7.00

Business Programs

Simplicalc Disk (+16K)	(AC92A)	£24.95
Simplicalc Cassette (+16K)	(AC93B)	£19.95
VIC Stock Control Cassette (+8K)	(AC94C)	£19.95
VIC File Disk (+16K)	(AC95D)	£24.95
VIC Writer Disk (+8K)	(AC96E)	£24.95
VIC Writer Cassette (+8K)	(AC97F)	£19.95

Education (CSE & GCE O Level Revision)
All cassette based and require at least 8K expansion memory.

English Language	(AC98G)	£9.99
Mathematics 1	(AC99H)	£9.99
Mathematics 2	(BC00A)	£9.99
Biology	(BC01B)	£9.99
Chemistry	(BC02C)	£9.99
Physics	(BC03D)	£9.99
Computer Studies	(BC04E)	£9.99
Geography	(BC05F)	£9.99
History	(BC06G)	£9.99
Arithmetic for 9 to 11 year olds	(BC07H)	£9.99
Reading for 9 to 11 year olds	(BC08J)	£9.99
General Knowledge for 9 to 11 year olds	(BC09K)	£9.99
Spelling for 9 to 11 year olds	(BC10L)	£9.99

Home Programs
All cassette based and require at least 8K expansion memory.

Quizmaster	(BC11M)	£9.99
Know Your Own IQ	(BC12N)	£9.99
Junior IQ	(BC13P)	£9.99
Know Your Own Personality	(BC14Q)	£9.99
The Robert Carrier Family Menu Planner	(BC15R)	£9.99
VIC Money Manager	(BC16S)	£9.99
VIC Road User & Highway Code	(BC17T)	£9.99
Garden Planner	(BC18U)	£9.99
Interior Designer	(BC19V)	£9.99
BBC "Ask The Family"	(BC20W)	£9.99
BBC "Mastermind"	(BC21X)	£9.99
"Mastermind" additional General Knowledge		
Data 1	(BC22Y)	£2.50
Data 2	(BC23A)	£2.50
Data 3	(BC24B)	£2.50
Data 4	(BC25C)	£2.50
"Mastermind" additional Specialist Knowledge		
Wine & Food	(BC26D)	£2.50
Music	(BC27E)	£2.50
Sport & Games	(BC28F)	£2.50
Films & TV	(BC29G)	£2.50

Books About VIC

Learn Programming on the VIC	(WA31J)	£2.50
VIC Revealed	(WA32K)	£10.00
VIC Programmers Reference Guide	(WA33L)	£9.95
VIC Graphics	(WA48C)	£10.00

Lots of new VIC20 software now available.

MAPLIN

Maplin Electronic Supplies Ltd., P.O. Box 3, Rayleigh, Essex. Tel: Southend (0702) 552911/554155.

Demonstrations at our shops NOW. See the computers in action at 159-161 King St., Hammersmith W6. Tel: 01-748 0926
284 London Road, Westcliff-on-Sea, Essex. Tel: (0702) 554000
Lynton Square, Perry Barr, Birmingham: Tel: (021) 356 7292.

● Circle No. 135

BEEBUG

REGISTERED REFERRAL CENTRE FOR THE BBC PROJECT

BEEBUG FOR THE BBC MICRO

INDEPENDENT NATIONAL USER GROUP FOR THE BBC MICRO

MEMBERSHIP NOW EXCEEDS 14,000

14,000 MEMBERS CAN'T BE WRONG — BEEBUG PROVIDES THE BEST SUPPORT FOR THE BBC MICRO. BEEBUG MAGAZINE — NOW 56 PAGES INCLUDING NEW PRODUCT GUIDE SUPPLEMENT — DEVOTED EXCLUSIVELY TO THE BBC MICRO.

Programs — Hints & Tips — Major Articles — News — Reviews — Commentary. PLUS members discount scheme with National Retailers. PLUS members Software Library — a growing range of software from around £3.50 per cassette. 10 Magazines a year. First issue April 1982. Reprints of all issues available to members.

July/August Issue: Program Features: Beeb Invaders Patchwork Programming Screen Dump. Plus Teletext articles using the mode. BBC Cassette, Bugs Fix, Software Review, using the User Port, more on Structuring in Basic, Using User Defined Keys, Input Function and many Hints & Tips.

September Issue: Games Programs: Higher/Lower and Hangman, plus String Search Program. Articles on Debugging Programs, a safe verify, new user guide, Errata, Creating and Moving Multicoloured Characters, Logic on the Beeb, Ideas on Colouring and Shading, Acorns ROM replacement charge, plus much more.

October Issue. Program Features: Alien Attack, Calender Generator, Union Jack, and Memory Display Utility. Plus articles on Debugging, Improving Key Detection, Acorn Press Release on O.S. 1.2 and Issue II Basic, The Tube and Second Processor Options, a New Series for Less Experienced Users and Software Reviews.

Dec/Jan Issue. Program Features: Space City (Invader type game), Breakout, Artist (Joystick painting program), Rescue (Miraculously retrieves programs after Bad Loading or "Bad Program Message") and Pack — a program to compact basic programs and disc system review, Software reviews — including Wordwise, Book reviews, adding Joysticks interface to Model A; How to access the video controller chips and ideas for the newcomer; plus a new crop of hints and tips.

February Issue: Program Features: Beebmaze — Find your way through the random maze, guided by 3D views from inside the maze — an excellent game. Five Dice — a Beeb implementation of Yahtzee (R), a novel dice game. Also a listing of Windy Field — a creation from Acornsoft, Spiroplot screen doodler, and a complete memory display program in a user key. Plus Machine Code Screen Dumps for the Epson and Seikosha Printers; articles on Using Files, Ideas on Animation (Including a Rotating Cube program) an Introduction to the use of Procedures, a Survey of Books on the BBC Micro, and a Roundup of Disc System Hints. Plus a variety of Hints, Tips and Info, including a single VDU command to perform a Sideways Scroll. Win a Colour Monitor, Wordwise Word Processors and Acornsoft Graphics Books in our Third Software Competition.

MEMBERS SOFTWARE LIBRARY +
BEEBUGSOFT: BEEBUG SOFTWARE LIBRARY
offers members a growing range of software from £3.50 per cassette.
1. STARFIRE (32k), 2. MOONLANDER (16k), 3D NOUGHTS AND CROSSES.(32k) 3. SHAPE MATCH (16k), MINDBENDER (16k), 4. MAGIC EEL (32k), 5. Cylon Attack (32k) 6. Astro-Tracker (32k).
Utilities: 1. Disassembler (16k). Redefine (16k). Mini Text Ed (32k).
Applications: 1. Superplot (32k). 2. Masterfile (3k)
13% discount to members on the excellent wordwise word processing package — this represents a saving of over £5.00.

STOP PRESS
BEEBUG has negociated a deal with ACORN over the new 1.2 Operating System ROM. BEEBUG members are offered the ROM at around half-price. See BEEBUG Feb issue for details

Send £1.00 & SAE for Sample.
Membership: UK £5.40 for six months
£9.90 for one year
Overseas one year only:
Europe £16.00 Middle East £19.00
Americas & Africa £21.00
Other Countries £23.00

Make cheques to BEEBUG and send to:
BEEBUG Dept 5, 374 Wandsworth Rd London SW8 4TE

Editorial Material to PO Box 50, St Albans, Herts, AL1 1AR

CRYSTAL RESEARCH LTD

XTAL BASIC 3

A Z80 based Interpreter. Disc and Cassette versions including CP/M are available now or in the near future.

FEATURES

1 Has over **110** Commands and Functions and is user extendable.
2 **Xtal BASIC 3** incorporates its own editor that is independent of VDU or terminal being used but appears to have the facilities of the most sophisticated direct screen editing, in brief the editor contains the following:
Lines of 127 characters (can be extended up to 254)
Full on screen editing, up, down, left, right.
Auto insertion of lines.
HOME CURSOR, CLEAR SCREEN, DELETE LEFT, DELETE RIGHT, INSERT CHARACTER, ERASE WHOLE LINE, ERASE TO END OF SCREEN, PRINT SCREEN CONTENTS TO PRINTER, and ABANDON LINE. A LINE EDIT MODE IS INCLUDED AS STANDARD.
3 Variables can be of any length. First five characters used to distinguish one variable from another. Multi-dim arrays, string arrays and integer arrays.
4 Full Tape and Disc file handling.
5 32 standard error messages and traps. Ability to trap **BREAK KEYS.** Error table is extendable.
6 Possible to run programs larger than memory capacity.
7 Special features allow transfers of programs from machine to machine.
8 **Xtal BASIC 3** is designed to be compatible with most available BASICS and a program is supplied for many BASIC to BASIC conversions.
9 The manual, consisting of over **100 pages,** includes full description of the BASIC, sample programs, useful Machine Code Subroutines in Xtal BASIC 3, examples of extra commands and functions.
10 **SIZE 12K to 14K** depending on the System.
11 Available on **Cassette** and/or **Disc.** Please contact Crystal Research Ltd., for availability on your particular machine.
12 On Cassette **£40.00** + **VAT** On Disc **£60.00** + **VAT**
OEM and Manufacturers are invited to contact Crystal Research Ltd., for licence details.

Open 0930-1200 1300-1730 except Saturday & Sunday
40 Magdalene Road, Torquay,
Devon, England Tel: 0803 27890
Access and Barclaycard

XTAL BASIC

● Circle No. 136

APPLE USERS

GIVE YOUR BUSINESS PRESENTATIONS MORE IMPACT

The Executive Briefing System allows you to make computer slide shows for effective visual presentations — ideal for meetings, demonstrations and conferences. Up to 32 slides can be stored per diskette, and presentations can span as many as you like.


Text — with just 3 keystrokes you're ready to create lettering from a range of 8 different typefaces.

Graphs and Charts — visiplots and other graphs and charts can be modified and incorporated into the slides.

Diagrams — you can create line drawings of any type, in black and white or colour.

Special Effects — special effects such as rising and falling curtains, dissolves, and slides spiralling off-screen can all be included in the display.

Hard copy — the Executive Briefing System provides printer drivers for Epson, Integral Data and Silentype printers.

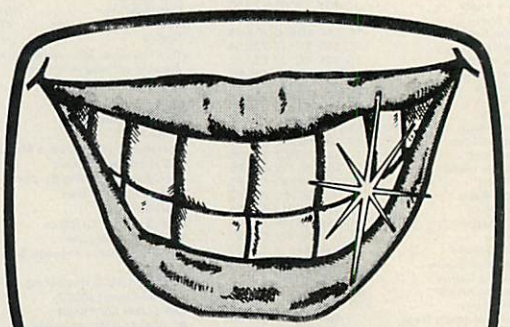


ORCHARD SOFTWARE

Executive Briefing System — only £135 + V.A.T.

Send cash with order, or quote your Access or Diners card number to: Orchard Software, 17, Wigmore Street, London W.1. Telephone 01-580-5816. Dealer enquiries welcome.

● Circle No. 137

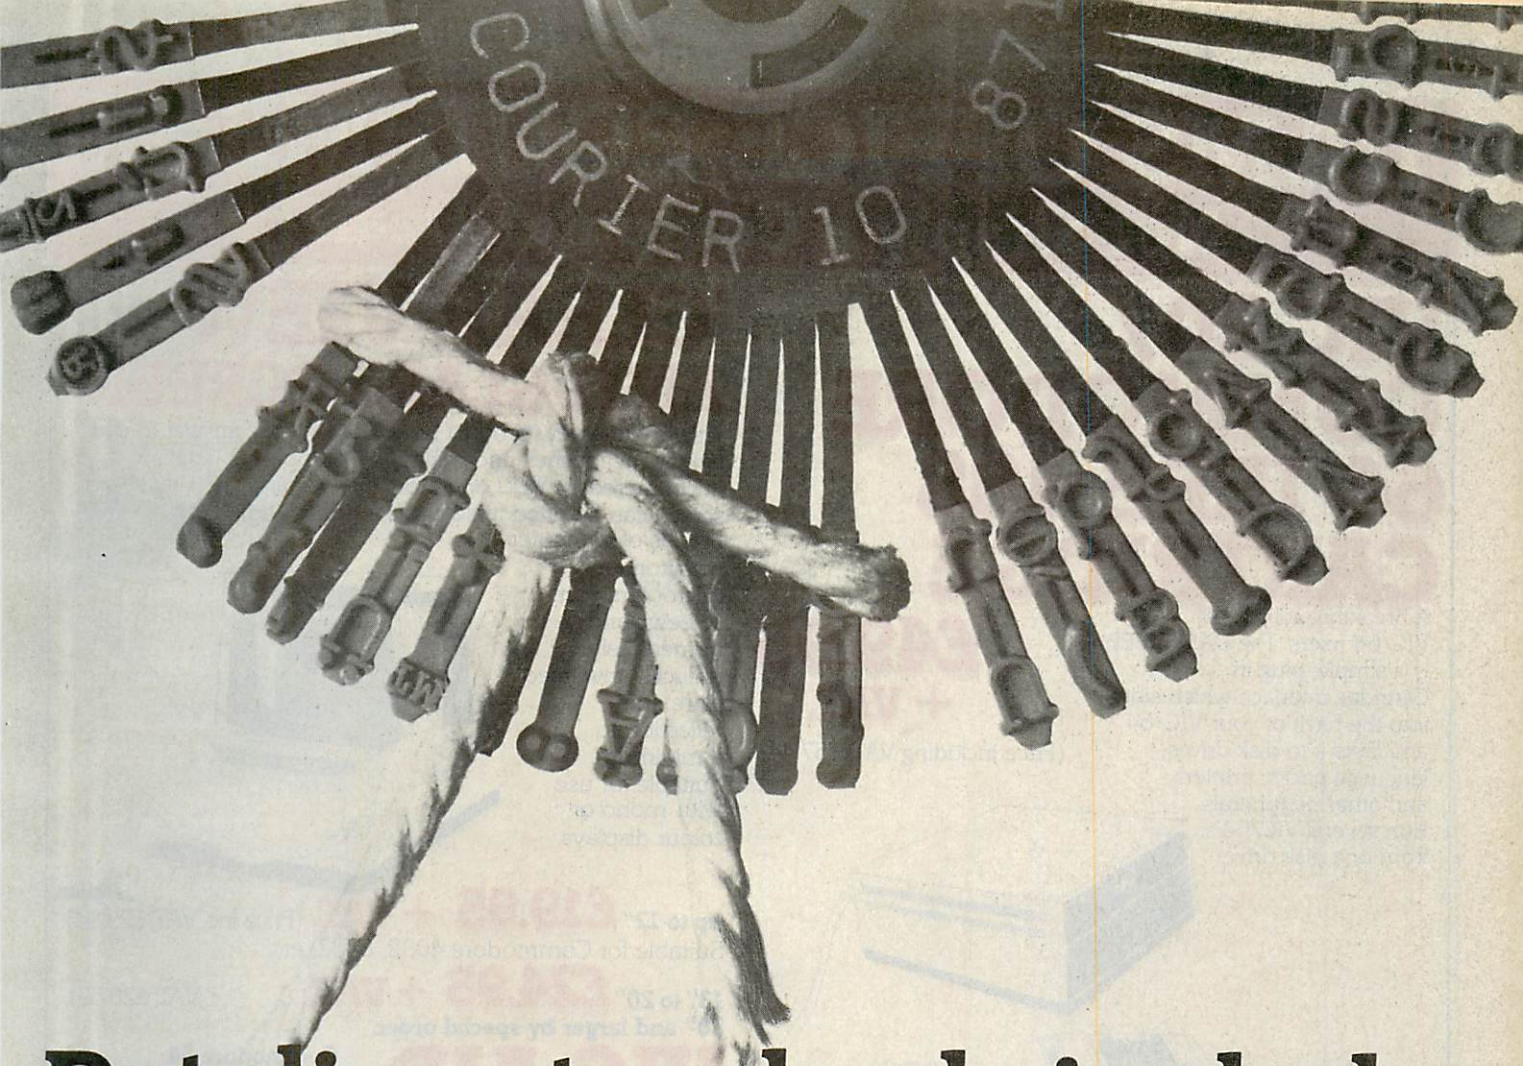


Dataline standards include no loss of character


The Dataline daisywheel printers offer you many special features as standard.
You start with the major advantage of an 8K buffer and bi-directional printing.
You have a printer manufactured by Ricoh, with Dataline software for all the popular interfaces already built-in, including IEEE, Centronics, RS232C Serial.
And a wide choice of line feeds, up to 204 columns, pause button, comprehensive self-test facility and a very helpful nationwide after-sales service.
What is more, you don't lose any characters from the daisywheel; you have the use of all 124 all the time. On other machines it's standard to be restricted to only 96 characters at any one time.

But we do offer some useful options. You can choose from the RP1300 at 35cps or the high speed RP1600 at 60cps.
Your machine can be supplied with a 16K buffer, automatic paper feed, or tractor feed, as extras.
Whatever you opt for, you'll find a very competitive price is standard too.

Give us a call on (0533) 56215 for the full story and the name of your nearest dealer.
You've nothing to lose.

Hestair Dataline Limited
60 Charles Street
Leicester LE1 1FB.
Tel: Leicester (0533) 56215.

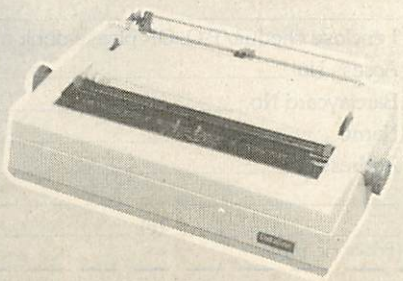



Member of the Hestair plc Group

Dataline RP1600 and RP1300


DAMS OFFICE EQUIPMENT
Not Simply a Computer Dealer


VIC 20/ COMMODORE 64 IEEE 488 CARTRIDGE

A breakthrough for all VIC/64 users. The DAMS IEEE is a simple, plug-in Cartridge interface which slots into the back of your VIC/64 and links it to disk drives, language packs, printers and other peripherals. Run several VIC/64's. from one disk drive.

£49.95 + VAT.

(Price including VAT. £57.44).



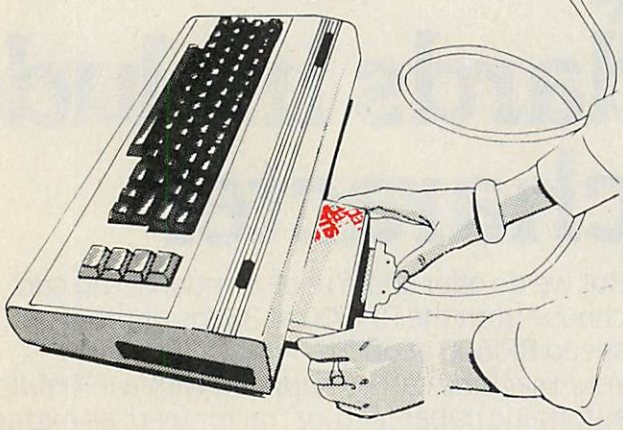

VIC 20 RAM'N ROM BOARD


Doubles the memory capacity of your VIC and gives you the facility to fit extra functions (VIC AID, VIC MON etc). Comes complete with specially designed cover.

£22.95 + VAT. (Price inc. VAT. £26.39).

Technical leaflets available on all products.

'CLEAR-VIEW' ANTI-GLARE SCREEN

This exciting new product from DAMS is the answer to eye fatigue, headaches and migraine - symptoms regularly encountered by VDU operators. The 'Clear-View' screen can be fitted in seconds to most leading brands of computer monitors or microcomputer screens, and immediately reduces unwanted glare and reflection to a minimum. Suitable for use with mono or colour displays.

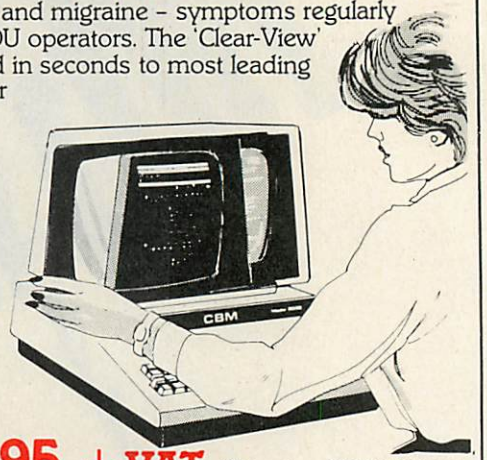

up to 12" £19.95 + VAT. (Price inc. VAT. £22.94).
Suitable for Commodore 4032, 8032, etc.

13" to 20" £24.95 + VAT. c. VAT. £28.69).
20" and larger by special order.

VIC AID

Commodore 64 version available on disk or cassette

Vic Aid is a chip which slots easily into the DAMS RAM'N ROM Board, and offers two sets of Utilities in one for the keen programmer:

Programmers Tool Kit
Gives extra commands: Auto, Number, Help, Delete, Change, Trace, Step, Light Pen, Break etc.

Machine Code Monitor
Gives Save, Memory. Display, Load, Verify etc. (similar to TIM on PET).

£19.95 + VAT. (Price inc. VAT. £22.94).

VIC MON

Commodore 64 version available on disk or cassette

Another fine product to enhance the machine - code capabilities of the VIC, VICMON is the ultimate programming aid, incorporating: Assembler, Dissassembler, Fill, Re-Locate, Identify, Printing, Display Status Register, Display Memory with pause facility, Full Screen Assembly Edit, Software re-set from loops, Single step with variable speed etc. Slots into the DAMS RAM'N ROM board or similar.
If similar please state type.

£19.95 + VAT. (Price inc. VAT. £22.94).

DAMS OFFICE EQUIPMENT LTD.
GORES ROAD, KIRKBY INDUSTRIAL ESTATE, KIRKBY, NEAR LIVERPOOL. L33 7UA.
TEL: 051-548 7111

CREDIT CARD TELEPHONE ORDERS WELCOME (Normal Office Hours).

DEALER ENQUIRIES WELCOME
Send your business card, and receive our dealer 'fact pack' NOW!
12 months parts & labour guarantee on all products.

E & O E

Please send me the following items

_____

_____

_____

I enclose cheque/P.O. OR please debit my:
Access No. _____
Barclaycard No. _____
Name _____
Address _____

_____ Tel: _____

(Prices inc. p+p) PC.4.

● Circle No. 139

The printer that thinks it's a computer!


FACT With internal microprocessor, 8K buffer store and total compatibility, the Ricoh Flowriter range has proved itself the most intelligent and reliable range of printers on the world market.
FACT Ricoh Flowriters can assume the characteristics of **any** popular 'intelligent' printer and plug into **any** hardware configuration.
FACT Ricoh Flowriters perform **all** your processing and printing needs while leaving the host computer free for other work.
FACT Ricoh Flowriters do all this, give you exceptional print quality, yet **cost the same as ordinary daisy wheel printers!**

FEATURES
- Internal microprocessor
- 8K buffer under full program control
- Includes RS232, Centronics and IEEE 488 interfaces
- 60cps print on the RP1600, 37cps on the RP1300
- Qume, Diablo and NEC Spinwriter wp commands-compatible
- Auto-bidirectional and logic seeking high-speed printing
- Graphics capability down to 1/120"
- Built-in proportional spacing tables
- Automatic margin justification, even on proportional spacing
- 128-character printwheels, wide choice of fonts
- Wide range of accessories – sheetfeeds, tractor feeds, ribbons, printwheels
- Detachable keyboard option for using Flowriter as an intelligent typewriter or KSR terminal

For intelligent printing that frees the host computer **and** gives you exceptional print quality and speed, find out more about the Ricoh Flowriter – the printer that **knows** it's a computer, yet costs the same as those that aren't!



The RP1300 Flowriter

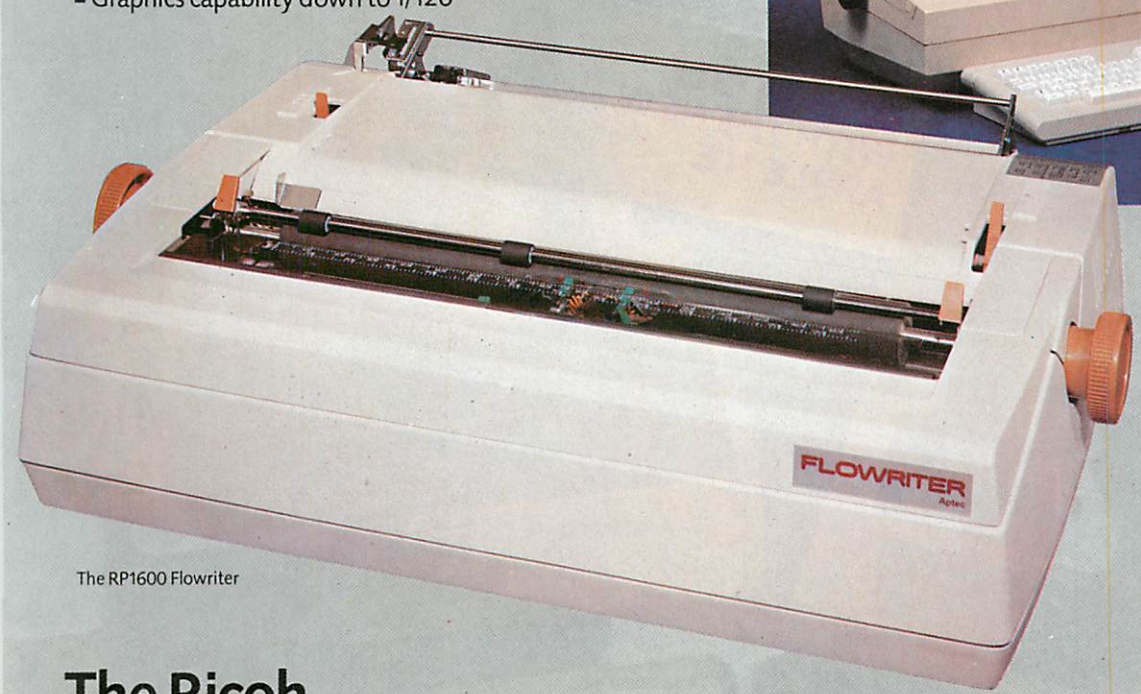

The RP1600 Flowriter

Dealer Enquiries welcome.
The Ricoh/Flowriter range is only available from APTEC and their authorised dealers, backed by a nationwide service network.

APT EC

APPROPRIATE TECHNOLOGY LTD.
2-4 Canfield Place
London NW6 3BT
Tel: 01-625 5575/5134
Telex 264538 SSE G

The Ricoh FLOWRITER

● Circle No. 140

NEW FROM DIGITEK


Super PRINTMASTER III©

The new range of printer cards to link your apple II to most popular printers

The Super Printmaster III is so advanced there is no other like it in the world.

It means you now have the opportunity to operate with all the features of a word processing system and graphics,in colour. Sales letters will carry more impact, even graphics displays such as graphs, bar charts, can be printed in up to sixteen different colours and with a simple command,can be printed 16 times larger than normal size with as many copies as required.





It doesn't stop there! Used in conjunction with a Ram-Master you will be able to store all the data onto the ramcard, thereby freeing the computer during printing. This allows you to use the Apple for other functions — a real time saver. No additional software or hardware is required.

The Super Printmaster III, as well as having many hi-text features, also dumps from the screen both Hi-Res and Lo-Res graphics.

In the buffering mode your Super Printmaster III will 'cue' up to 255 of your print files; in fact it will take over the whole of your printer management.

So make the most of your Apple system, install the Super Printmaster III. You certainly won't be disappointed. The Super Printmaster III operates with the following dot matrix printers –

Black and White: **Epson, NEC, TEC, C/ITOH, CENTRONICS, ANADEX, PRISM**

Colour: **PRISM**

Dealer Enquiries Welcome

COMPATIBLE WITH THE NEW APPLE II E



Please send me
Super Printmaster III B/W £105 ☐
Super Printmaster III B/W Prism only £139 ☐
Super Printmaster III Colour Prism only £159 ☐
Further Information ☐

Printer Model _____
Name _____
Address _____
_____
_____
_____ Post Code _____

I enclose my cheque for £ _____
Payable to Digitek (International) Ltd.
Add 15% VAT P&P FREE

Card _____
No. _____
Telephone Order 0403 66550

Digitek (International) Ltd.
37c West Street, Horsham,
West Sussex, RH12 1PP

Digitek, Super Printmaster III, Screenmaster 80, and Ram-Master are trademarks of Digitek (International) Ltd. Apple is a trademark of Apple Computers Incorporated.

DIGITEK®
EXPANDER CARDS

● Circle No. 141





COMMODORE 700 SERIES

ALSO:

APPLES

SEE THE NEW

SYSTIME

Systime S500

MULTI-USER, MULTI-TASKING 16BIT MICRO. VERY FAST & POWERFUL

ACT Sirius 1

NorthStar

CBM 64 VIC-20



We have a constant changing range of 2nd Hand and Ex-Demo Equipment

Call us on 01-952 0526
For Latest Stock.

SOFTWARE

Word-processing	Sales Ledger
Payroll	Purchase Ledger
Incomplete Records	Record Keeping
Book-keeping	Financial Packages
Invoicing	Time Recording
Stock Control	Silicon Office
	Data Base

PROFESSIONAL ADVICE GIVEN

ACCESSORIES

Floppy Discs
Printer Ribbons
Stationery
Labels
Installation & Training
Maintenance


BOOKS

Full Range of
Computer Books on show

DEMONSTRATION AT YOUR PLACE

PLEASE CALL FOR AN APPOINTMENT ANY TIME


MATRIX PRINTERS



MX80FT-3

OPTIONAL 16K BUFFER

DAISY WHEEL PRINTERS



BROTHER HR-1
Daisywheel Printer 16-20 CPS
+ 2K BUFFER



FLOWRITER RP 1600
60 CPS + 2K or 8K BUFFER

DaVinci Computer Shop

DAVINCI COMPUTER SHOP

65 High Street, Edgware, Middx. HA8 7DD.

Open Mon-Fri 9.00-5.30
Sat 9.30-5.00

Telephone: 01-925 0526

Buy it with Access

BARCLAYCARD VISA

● Circle No. 142

WORDSTAR TRAINING COURSES

A) Two day course on using WORDSTAR. Assuming little or no experience of word processing £150 per person

B) One day course on using WORDSTAR with Mailmerge
Assuming course (A) experience
£75.00 per person

All courses are given on our premises with individual attention during hands on use of our systems.

All prices include appropriate documentation but are exclusive of V.A.T.

Training can be given on your own premises using your own equipment

Please Telephone or Write for further details

SLOGGER SOFTWARE

215 Beacon Road
Chatham, Kent ME5 7BU

Tel: MEDWAY (0634) 811634

● Circle No. 143

PD4 digital XY plotter

NEW Software and Interface now available for APPLE II



Standard specification includes:-

- IEEE-488 AH1, L1, E1 Interface
- Full A4 format • 700 mm/s max. writing speed
- Suitable for direct connection to PET and many other computers
- Optional software including character generator available

Price including IEEE Interface £596 + VAT

JJ INSTRUMENTS

J.J. LLOYD INSTRUMENTS LTD.

Brook Avenue, Warsash, Southampton, SO3 6HP.
England. Tel: Locks Heath 4221 (STD 048 95).
Telex: 477042 – JAY JAY – SOTON.

● Circle No. 144

You don't need a brain the size of a planet to use...

Up to now, any software package that had a reasonable capability needed a relative of Einstein to drive it. If it was easy to use, it couldn't do a whole lot.

Now there is Silicon Office. And until you've seen it, you can't know just how incredibly ingenious it is.

It's a computer system that the layman can finally understand. It packs more power and versatility than any other system available. Accounts, word processing, filing, statistics. Yet all that power is released with just a few, simple commands.

It's like suddenly being a computer expert. With information and control at your fingertips. Yet without the need for several years of study. Or the need to spend thousands of pounds on specialised software. Or a brain the size of a planet.

Fill in the coupon for further details of Silicon Office.

Bristol Software Factory, Kingsons House, Grove Avenue, Queen Square, Bristol BS1 4QY.
Telephone (0272) 292098.

BSF

Please send me details of Silicon Office.

Name _____


Position _____

Company _____

Address _____

Telephone No _____


● Circle No. 145

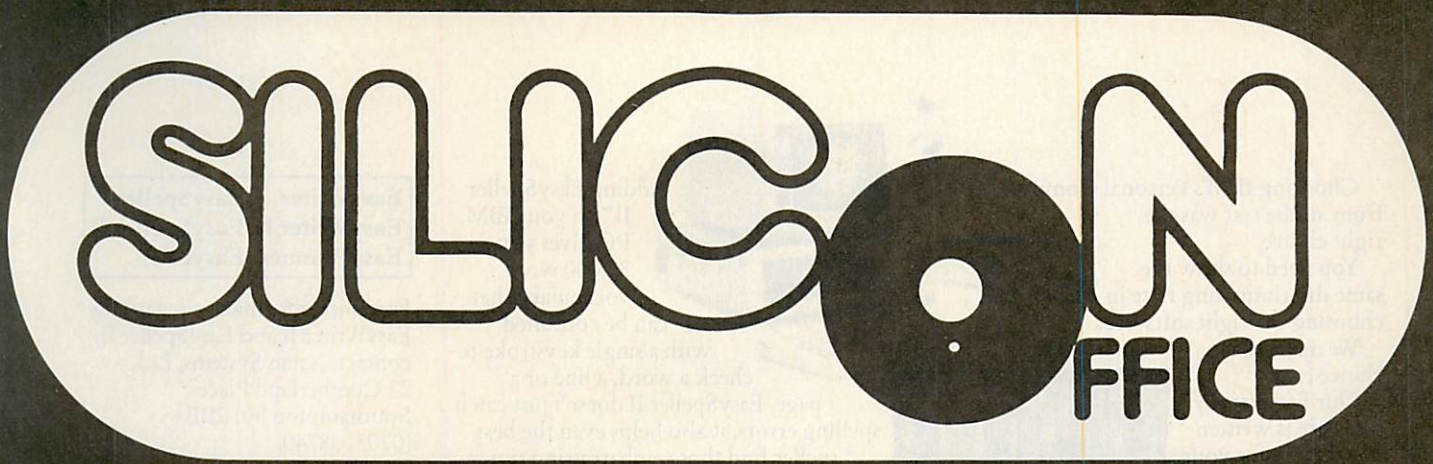

THE FLEXIBLE SOFTWARE SYSTEM

Now available on
ACT Sirius and Victor 9000

WHILE YOU WAITED FOR THE RIGHT HARDWARE, WE DEVELOPED THE RIGHT SOFTWARE.

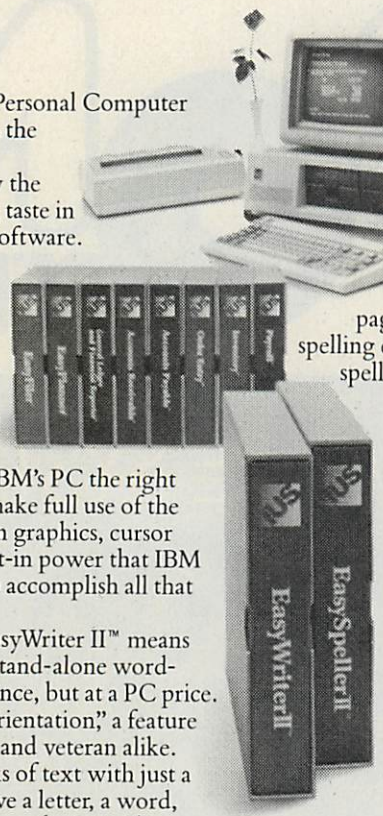

Choosing IBM's Personal Computer from all the rest was the right choice.

You need to show the same discriminating taste in choosing the right software.

We make that choice easy.

Our EasyFamily™ software is written specifically for your IBM PC, and designed to take full advantage of all the features that made IBM's PC the right choice. We let you make full use of the function keys, screen graphics, cursor control and the built-in power that IBM provides. We let you accomplish all that very easily.

Simply adding EasyWriter II™ means that you now have stand-alone word-processing performance, but at a PC price. It gives you "page orientation," a feature preferred by novice and veteran alike. You can move blocks of text with just a few keystrokes. Move a letter, a word, a line, a page, a paragraph, instantly.

Adding EasySpeller II™ to your IBM PC gives you an 89,000 word vocabulary that can be consulted with a single keystroke to check a word, a line or a page. EasySpeller II doesn't just catch spelling errors, it also helps even the best speller find those embarrassing typos.

You get dramatic results when you combine EasyWriter II with EasySpeller II, and add them both to your IBM PC. They let you check suspect words as you write, or the entire document when finished. All without changing programs—and the only current micro-computer software that offers this capability.

All our programs are easy to learn, easy to use and easy to buy. We make your work simpler, easier and more productive. So make it easy on yourself.

EasyWriter	**EasySpeller**
EasyWriter II	**EasySpeller II**
EasyPlanner	**EasyFiler**

For more information regarding EasyWriter II and EasySpeller II, contact: Xitan Systems, Ltd.
23 Cumberland Place
Southampton S01 2BB
(0703) 38740

Icarus Computer Systems, Ltd.
27 Greenwood Place
London NW5 1NN
(01) 485-5574

Timon Associates
21 College Hill
London EC4
(01) 248-8720

Electronic Office Services, Ltd.
29/31 Fleet Lane
London EC4M 4YA
(01) 928-3377

or write
Information Unlimited Software, Inc.
2401 Marinship Way
Sausalito, CA 94965
U.S.A.

Ad No. 90-3-1047
EasyWriter/EasySpeller Consumer Ad
INFORMATION UNLIMITED SOFTWARE
Full Page B&W Ad
Updated 1/83
Prepared by
D'Arcy-MacManus & Masius, Inc.
San Francisco

● Circle No. 146

Come to Kenilworth for
SHARP OFF-THE-SHELF RELIABILITY

We have MZ80 A & B and PC 1500 with Software back-up expertise to advise you on your requirements. See the advanced technology of SHARP on demonstration.

THE LARGEST U.K. NASCOM DEALER

Come to Kenilworth
THE LARGEST UK NASCOM DEALER

We are the largest NASCOM distributors in the U.K. and are up-to-date with all the latest hardware and software. Colour, Sound, Speech, Educational, Business, Home, or any application you have in mind.

Kit Computers with power supply, £260 excl. VAT.

Built Computers with power supply, £327.50 excl. VAT

Come to Kenilworth for
DRAGON
FANTASTIC VALUE FOR MONEY

British built and designed. 32K RAM as standard, (expandable to 64K Bytes). Plus extensive facilities for colour graphics. 9 colour, 5 resolution display. Advanced sound. Prices from only £199. inc. VAT.

Full ranges of Software – tapes, cartridges, joysticks, books etc.

THE VERY POPULAR

Come to Kenilworth for
QUIBS
BUSINESS SYSTEMS

An integrated Nominal, Purchase and Sales Ledger with optional invoicing and stock packages using the QUANTUM (British) with up to 2.25 M BYTE of floppy discs. Very competitive prices. But best of all friendly, professional advice on the best system.

Come to Kenilworth for
SINCLAIR
A MOST POPULAR MODEL

SINCLAIR ZX81 at £49.95
16K RAM PACK at £29.95
SINCLAIR PRINTER at £59.95

XZ81 1K RAM, one-touch Keyboard, complete with all connecting leads. 16K RAM pack plugs into expansion port enabling use of sophisticated ZX Software. ZX printer has full alphanumerics and graphics, 50cps, 32 characters per line.

EDUCATIONAL USES

Our main product line – Nascom – will act as an excellent stand-alone system, optionally with High Resolution Colour Graphics and will attach to an economical Local Area Network. Ask for details of our recent installations in the educational field.

NASCOM SOFTWARE CATALOGUE

B & L Microcomputers announce their new Software Division offering a range of high quality but inexpensive programs for the NASCOM.

Most of the programs have an educational content. The catalogue includes programs enabling owners to make the best use of the NASCOM. Send S.A.E. (9 × 6) please.

Yes...come to Kenilworth
Business & Leisure Micro Computers
16, The Square, Kenilworth, Warwickshire CV8 1EB.
Telephone: (0926) 512127.

● Circle No. 147



The MICRO DECISION is a beautifully designed, compact desk-top microcomputer that comes packaged with a wide selection of software and comprehensive documentation, providing you with all the basics needed to get started. The Micro Decision is very economical, and as advanced and sophisticated as other microcomputers costing several times the price.

MICRO DECISION HARDWARE FEATURES:

* *Two RS232C Serial Interfaces.*
* *Z80A Processor at 4MHz.*
* *Floppy disk controller for up to four drives.*
* *64K bytes RAM.*
* *Format compatible with Osbourne, Xerox, IBM PC.*

The following software is included, as standard, with every Micro Decision computer:

* *WordStar: MicroPro's Word Processing System.*
* *Correct-It: Morrow's Spelling Checker.*
* *LogiCalc: Software Product's Financial Modeller.*
* *CP/M 2.2: Digital Research's Operating System.*
* *BASIC-80: MicroSoft's BASIC Interpreter.*
* *BaZic: Micro Mike's BASIC (N* compatible).*
* *Pilot: Morrow's Implementation of Pilot language.*
* *Micro Menus: Morrow's Operator Roadmap thru' CPM.*

The Morrow Designs optional intelligent VDU sits equally attractively on top of the Micro Decision or along side it. The VDU has a high resolution, green phosphor, anti-glare screen with 80 characters by 24 lines, and detachable keyboard allows positioning for maximum user comfort.

With the addition of a printer the Micro Decision system has all the hardware and software necessary for word processing, proof reading, financial modelling and programming.

Please telephone or write (Freepost — no stamp required) for full details.

†*Price subject to change, excludes VAT and carriage.*



TRADE / CONTRACT ENQUIRIES ARE WELCOME

INTERAM
Microcomputer Specialists
46 Balham High Road London SW12 9AQ Tel: 01-675 5325/6/7 Telex: 925 859

● Circle No. 148

NEW FROM ACT



The 10 Megabyte Winchester Sirius — — £3995·00

Once again, ACT introduces a new price/performance breakthrough in personal computing: An ACT Sirius 1 16-bit personal computer with 128 Kbytes of RAM COMPLETE with integral 10 Mbyte Winchester for just £3995.

And, it's available now. Ready to take on the large business applications that previously called for much more expensive minicomputer systems.

Both access speed and data integrity are enhanced compared with floppy-based systems. The user can divide the disk into multiple volumes each of which appears as a discrete entity. And more than one operating system can access the Winchester.

Like all the Sirius range it's backed by the strength and resources of ACT: The PULSAR range of true 16-bit application software for accounting, planning and word processing; ACT Training Centres in London and Birmingham open to all; nationwide field service; a full range of printers and consumables. And, the most complete and professional dealer network in personal computing.

The new Sirius Winchester is the latest addition to the 16-bit ACT Sirius 1 family. Prices start at just £2395 for a dual floppy drive system with 1.2 Mbytes and £2895 for the double-sided floppy drive version offering 2.4 Mbytes. All provide an Intel 8088 16-bit processor and 128 Kbytes of RAM.

NEW SIRIUS WINCHESTER: THE FACTS

Winchester Subsystem

- 10.6 Mbyte (formatted) 5¼" integral Winchester drive
- 218 msec average access time
- Intelligent disk controller
- DMA interface to system memory
- Multiple operating systems
- User configurable

General Specifications

- 128 Kbytes RAM
- Intel 8088 16-bit processor unit
- 1.2 Mbyte double-sided floppy disk drive for back-up
- 800 x 400 pixel high resolution graphics
- Multiple operating systems
- Parallel/IEE 488 port
- 2 x RS 232 asynchronous/synchronous ports
- User port

For more information on the new Sirius Winchester clip the coupon and return to

ACT (Sirius) Ltd

FREEPOST
Birmingham B63 1BR
or call
021-501 2284

™ indicates registered trade mark.
Ownership details on request.
Prices exclude VAT.

Please send me further details of the new Sirius Winchester.

Name _____

Position _____

Company _____

Address _____

_____


Tel _____

● Circle No. 145

SC1



THE BEST SELLER OF 1982

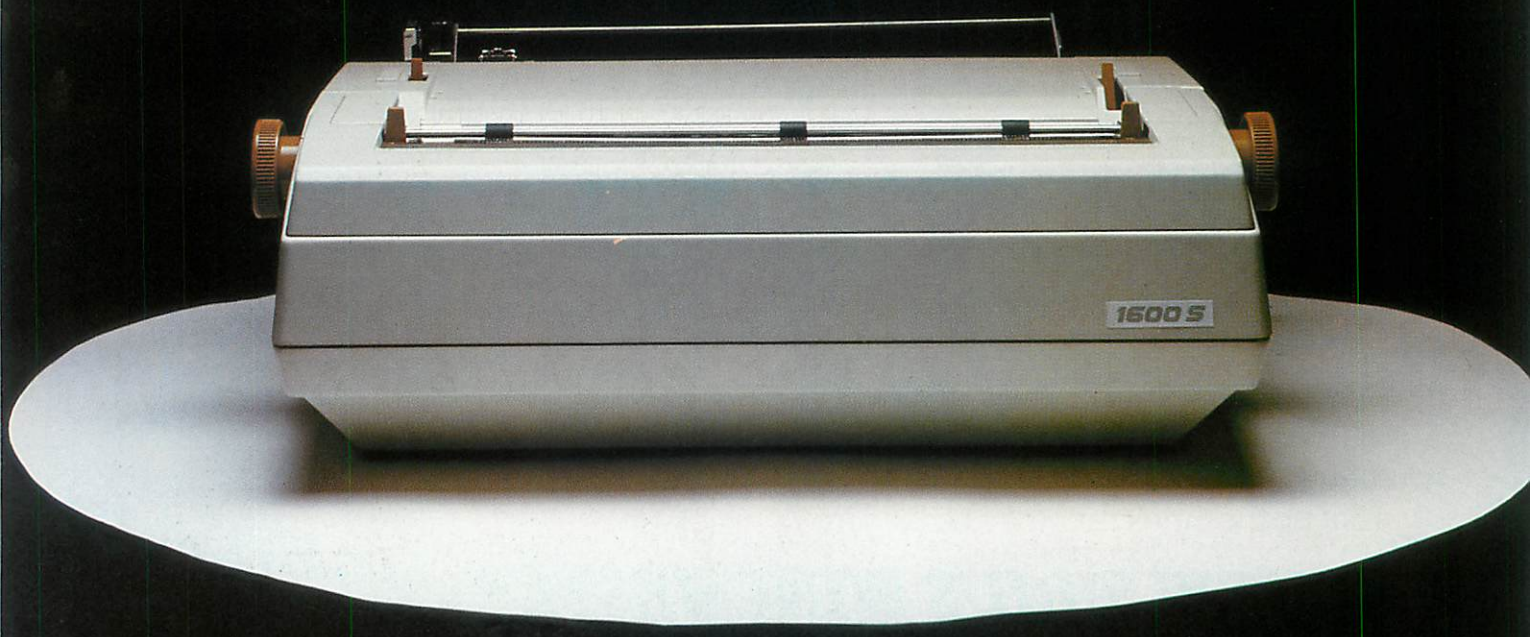

In 1982 the RICOH 1600S outsold every other comparable printer because of its speed, reliability, intelligence, flexibility and sophistication.

Because it is compatible with all known systems and software packages.

Because of the 12 month warranty that Micropute offer.

Because Micropute are a company who care, who are constantly aware of changing needs and who can fulfill any special requirements.

Not least of all, because of the price

In 1983, there will be thousands more satisfied customers.

We hope that you will be one of them.

ONLY MICROPUTE GIVE YOU SUPERCOVER

As an extra bonus Micropute Supercover will provide a 12 month on site maintenance for only £99.00 parts and labour.

DON'T FORGET THE RICOH 1300S

...a little bit slower but every bit as clever.

Please send details of the RICOH 1600S and 1300S

Name: _____

Position: _____

Company: _____

Address: _____

_____

_____ Telephone: _____

● **Circle No. 150** RP2

MICROPUTE

Micropute, Catherine Street, Macclesfield, Cheshire SK11 6QY. Tel: (0625) 615384.

LONDON COMPUTER CENTRE



ACT Sirius 1

1.2 Mb Disk Storage £2395
2.4 Mb Disk Storage £2895

Now available
Z 80 CP/M Add-on board to run all CP/M 8 bit or 16 bit software

NEW

Sirius Hard Disk 10 Mb Available Now! £3995

Wordstar Magic Wand Spellbinder
Spellstar D Base II T/Maker Calcstar
Milestone Datastar Microstar
Fortran Cobol Pascal or any CP/M software

NEW



EPSON QX10

the revolutionary small Business Computer

CP/M 2.2
196K RAM
£1730


TELE-VIDEO SINGLE-USER TO MULTI-USER



CP/M Software

Wordstar	**£195**
Spellstar	**£130**
Grammatik	**£65**
Foot Note	**£75**
CPM/IBM	**£99**
CPM/DEC	**£99**
T Maker II	**£150**
D Base II	**£395**
Autocode	**£120**
Milestone	**£195**
Task	**£195**

NEW




EPSON FX-80
160 CPS

EPSON HX20
the Portable Computer £402



NEW

New Superbrain 2 from £1595
Dedicated Wordstar Keypad



AUTO SHEET FEEDER £580
New! 12" Wide Automatic Sheet Feeder fits all below



NEW

AUTHORISED TANDY DEALER
11 Mb Hard Disk model 11/16 runs CP/M & TRS DOS £1895

Model 16 128K from **£3129**

Model II with TRS DOS and CPM at no extra charge from **£1995**


Model III
16K **£599**
48K **£649**
48K with 2 disk drives **£1395**



DAISY WHEEL PRINTERS LETTER QUALITY PRINTING.

FLOWRITER RP 1600 CPS £1500.

*** TEC 40. 40 CPS**
JAPANESE DIABLO 630 uses Diablo Daisy Wheel & Ribbons **£1135.**
TEC F1500 25 CPS £590



McCombo

System 1.5 £1695 complete
Televideo 950 type terminal, 1.5 Mb Disk Storage
4 RS2343, Centronics Port.
CP/M 2.2 Z80A (4Mhz)

OPTIONS: Additional 2 Drives = 3Mb Storage 10Mb Hard Disk.
8" Drives Available.

HARD DISKS

for Superbrain, TRS 80 Model II, Apple

Model 6 6 Mb Formatted **£1595**
Model 12 11.5 Mb Formatted **£1895**
* Specially designed Hybrid heavy duty power supply
* Data Error Recovery



All prices are Exclusive of VAT and Delivery. Dealer Enquiries invited on all Products.
Large range of CPM Software available. Please phone for Prices.
Demonstrations on all models.

43 GRAFTON WAY, LONDON W1P 5LA (Opposite Maples)
OPENING HOURS: 11-7 MON-FRI 12-4 SAT Tel: 388 6991/2
24 hour answer phone: 01-388 5721

● Circle No. 151

Our spreadsheet sys
But let's start with

Today, computers, micros and more importantly business planning systems are no longer considered luxuries.

They allow you to make better decisions by providing better information on budgeting, cash flow, project profitability, Acquisition Appraisal, Lease vs Purchase analysis and much more.

You stay one step ahead of your business and your business stays one step ahead of the competitors.

But which system should you buy? Surely no one system can meet the needs of all businesses?

Fortunately Comshare is not like most companies. We see the need for different systems to suit different people.

NEW USERS START HERE

PlannerCalc at £85.00* is now accepted as the first choice for people new to financial planning.

Designed for 8-bit micros, it boasts the kind of features that you'd expect to pay twice as much for. (Buy PlannerCalc's nearest rival and you'll have to.)

Unlike all other 'calc' products it allows you to enter calculations in a language you understand. Plain English.


For example:

LINE 1 SALES=100, 150, 175, 210
LINE 2 EXPENSES=GROW 70 BY 15% FOR 4
LINE 3 NET=SALES−EXPENSES
LINE 4 CSALES=CUM SALES
COLUMN 5 YEAR=SUM OF COL 1 THRU COL 4

So it's much easier to use.

It uses the popular "spreadsheet" approach with a window that can be rolled in all directions.

Which means you can enter new figures and rules and immediately see their effect on everything else in the model.

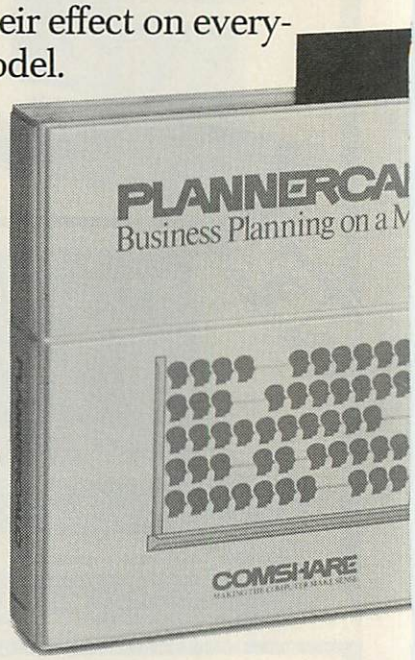

It comes with the best manual on the market and it's suitable for most micros with a ™CP/M 2.2 operating system, 64K of memory, giving at least 900 cells, minimum screen width of 80 characters and 2 floppy disc drives.

MUCH MORE POWER, NOT MUCH MORE MONEY

MasterPlanner is the most powerful spreadsheet system currently available with its increased matrix size, 2000-3000 cells on most 64K micros. (But at £245* it certainly isn't the most expensive.)

Consolidation of models, allows you to create separate plans for each department and then combine them into an overall company

COMSHARE DEALERS

Aberdeen
Ablext Ltd
(0224) 647074

Aldershot
EMS (UK) Ltd
(0252) 313551

Altrincham
Mercator Tech Services Ltd
(061) 941 4225

Aylesbury
Helistaar Systems Ltd
(0296) 630364

Barnsley
Brook Office Supplies Ltd
(0226) 88916

Bedford
MSC Hiland Ltd
(0234) 50260

Blackburn
BEC Systems Services Ltd
(0254) 677215
TDS Bus Systems Ltd
(0254) 676915

Bradford
Compright
(0274) 668890
Raven Computers Ltd
(0274) 306966

Bristol
Avon Microcentre Systems Ltd
(0272) 277774
C.C.E. (Europe Ltd.)
(0454) 321088
Mercator Computer Systems Ltd
(0272) 731079
Transtec Ltd
(0272) 277462

Bury St. Edmunds
S.T.R.C.S. Ltd
(0284) 62022

Camberley
Alexander Systems Ltd.
(0276) 28971

Canterbury
Kent Micro Systems
(0227) 50200

Cardiff
Bowstrings Computer Services Ltd
(0222) 36825

Clevedon
Bard Computer Systems Ltd
(0272) 878 157

Cranbrook
The Soft Option U.K. Ltd.
(058080) 310

Doncaster
Briarstar Computer Centre
(0302) 67135

Dublin
Transtec Ltd
(0001) 718521

Fareham
Electronequip Ltd.
(0329) 230670

Glasgow
The Prospectus Partnership
(0236) 211294

Gosport
Vauntberry Ltd
(0329) 235846

Harpenden
Irradion Ltd
(05827) 62421

Hastings
BMS Computer Services Ltd
(0424) 439190

Hereford
Honeysett Computers Ltd
(0432) 279404

Ipswich
Anglia Microsystems
(0449) 740046

Leamington Spa
Words Ltd
(0926) 30209

Leicester
Leicester Micro Centre
(0533) 551869

Lisburn
MKM Electronic Ltd
(08462) 3184/3665

Liverpool
BEC (Liverpool) Ltd
(051) 263 5738

London
BD Computer Systems
01-435 4442
Business Information Systems
01-373 3408
Clenio Computer Systems Ltd
01-670 4202
Computer Aided Systems Ltd
01-487 3869
Computer Aided Sysiems Ltd
01-518 1414
Corporate Modelling Consults
01-628 4107
Dantedale Ltd
01-519 7004
DIR Computer Systems Ltd
01-439 4354
Equinox Computers Ltd
01-739 2387
Ferrari Software Ltd
01-751 5791
Jarrogate Ltd
X1-671 6321
Ludhouse Computing Ltd
01-679 4321
Matmas Electronics Ltd.
01-373 6607
Mayfair Business Systems Ltd
01-688 3836
MGE Systems Ltd
01-439 9617
Micronics Telesystems Ltd
01-263 6926
P.W. Hare & Associates
01-551 1988
Archives U.K. Ltd.
01-223 1688
Software Ltd
01-387 9927
Spectrum Systems Ltd
01-405 1250
Stag Terminals Ltd
01-943 0777
Statacom Ltd
01-661 2266
Sumlock Bondain Ltd
01-250 0505
Sun Business Services Ltd
01-739 7949
Transam Computers Ltd
01-402 8137
Whispix Ltd
01-556 9151

Louth
Comput-A-Crop
(0507) 604271

Malvern
Malvern Micro Systems
(06845) 68500

Melksham
Cifer Systems Ltd
(0225) 706361
ICEN Ltd
(0225) 702133

Midhurst
Wordskill Automation Ltd
(073081) 6641

Milton Keynes
Pericom Data Systems Ltd
(0908) 614242

Navan
S. Triple S Ltd
(046) 28472

Nottingham
Micropeople Ltd
(06074) 69117

Oxford
Choice Business Systems
(049161) 2697

Redcar
Applestop
(0642) 474707

Richmond
Tritech Computer Services
01-948 4213

Rutland
Microspecific Ltd
(0572) 2528

Slough
KGB Micros Ltd
(75) 38581

Southampton
Xitan Systems Ltd
(0703) 38740

St Albans
St Albans Computer Services Ltd
(0727) 77700

St Helier
The Processor Centre
(0534) 77070
Thomas & Company Ltd
(0534) 77700

West Byfleet
Fergusson Computers Ltd
(91) 41810

Weston-Super-Mare
Eastern Ltd
(0934) 418346

Winchester
Modular Office Systems Ltd
(0962) 55759

Yeovil
Dale Computer Systems Ltd
(0935) 72000

● Circle No. 152

tems start at £85.00. why you need one.


plan. Data transfer to word processing and other systems lets you incorporate figures in reports and output to a data base. It also has extensive formatting facilities which means you can produce reports that wouldn't look out of place in the board room.

It can store up to 25 standard reports to run when you need them. It's got full WHAT IF? analysis and direct editing of both spreadsheet and logic display.

JUST AS EASY TO USE

All this increased power doesn't mean you'll need a degree in advanced computing to understand MasterPlanner.

It works on exactly the same system as PlannerCalc and models written on PlannerCalc run without modification on MasterPlanner.



16 BIT VERSION

A new version of MasterPlanner has been specifically designed for the 16 bit micros like the Sirius 1 under ™CP/M-86 or the IBM personal using either CP/M-86 or ™MS DOS 1.1. With a vast matrix size of over 7000 cells on 128K and even more with larger memory, you'll at last be able to make the most of your micro.

ULTIMATE POWER

Fastplan is the top Comshare micro planning system.

It's file-based, allowing development of large scale models; with a staggering 18,000 cell matrix; full financial functions plus backwards iteration, file input and output; and much more. Yet, because it can be menu driven it is easy to use. For the full story, tick the Fastplan box when you return the coupon.

OVER 10 YEARS EXPERIENCE

When you invest in MasterPlanner or PlannerCalc you're not just getting the best software money can buy.



You're also getting the kind of back up and after-sales service that only a company of Comshare's track-record can guarantee.

If you'd like to know more about any product, call in at your local dealer or fill in the coupon and send it to us. *Plus VAT and post & package.

COMSHARE
Making the computer make sense.

*CP/M and ™CP/M-86 are the registered trade marks of Digital Research Inc.
Comshare Ltd., 32-34 Great Peter Street, London SW1P 2DB. Telephone: 01-222 5665.

To: Department PC3, Comshare Ltd., 32-34 Gt. Peter Street, London SW1P 2DB.
Please send me:


Qty	Product	Micro	Op System	Disc Size	K	Amount £	p.
	PlannerCalc @ £99.50 (8 bit only)		CP/M 2.2	8"/5¼"			
	MasterPlanner @ £282.95		CP/M 2.2	8"/5¼"			
	MasterPlanner	IBM PC	MS DOS 1.1	8"/5¼"			
	MasterPlanner		CP/M-86	8"/5¼"			
All prices include VAT and postage & packing					TOTAL		
Please send me information about Fastplan ☐							

I enclose a cheque/postal order for £_____ made payable to Comshare Ltd.
Please debit my Access Card No._____ for £_____
Barclaycard No._____ for £_____
Signature_____
Name_____
Address_____
Tel. No._____
Please allow 28 days for delivery. VAT No. 238418649. Registered No. 980406.

Comshare reserve the right not to accept any orders. Any acceptance will be subject to Comshare's terms and conditions.

The LEEDS COMPUTER CENTRE

For all your computer needs



CPU £125.00 plus V.A.T.
CPU plus 64k RAM **£225.00** plus V.A.T.
64k RAM £125.00 plus V.A.T.
COMPLETE TWIN DISK SYSTEM £675.00 plus V.A.T.
I/O Card £125.00 plus V.A.T.




MULTIBOARDS use 80-Bus and are fully Nascom compatible e.g. disks, enhanced video, Input/Output or Ram expansion.



MULTIBOARDS make computers **MULTIBOARDS** enhance:–
GEMINI, Nascom or QUANTUM
Send for full details

The QUANTUM 2000 is ideal for business applications. It can have up to THREE drives giving 2.4 megabytes of disk storage. Its expansion capabilities are almost infinite, thanks to the flexibility of Multiboard plus 80-Bus.






GEMINI GALAXY 64K 2.2 CP/M MICROCOMPUTER
A cost effective solution to the small business, educational or home user requiring a reliable Z80 based CP/M computer
From **£1,450.00** plus V.A.T.

We are an official Sharp computer centre

As one of **SHARP'S** biggest distributors, we always have stocks. We have the expertise to advise you on interfaces and software. We developed the QUANTUM MZ 80k Hi-Res which gained official SHARP approval.

PLEASE CALL FOR LATEST PRICES.
MZ80A with £75.00 free software **£475.00** plus V.A.T.
MZ80B with 64k plus GRAPHICS RAM **£850.00** plus V.A.T.
PC1211 £65.00 plus V.A.T.
CE122 PRINTER £60.00 plus V.A.T.
PC1500 £145.00 plus V.A.T.
CE150 PLOTTER £130.00 plus V.A.T.
QUANTUM MZ80k HI-RES **£100** plus V.A.T.



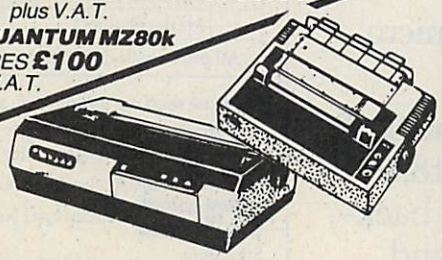

We stock the following printers:–
EPSON, SEIKOSHA,
and more important, we know how to interface them to a variety of computers.

Only the new HX20 portable computer from Epson fulfils your requirements





From **£402** plus VAT

HX-20 PORTABLE COMPUTER

The first truly portable computer with full size keyboard, built-in printer, micro cassette drive, high resolution display, rechargeable batteries give hours & hours of use and give enough power to retain memory when computer is switched off, and is only 1.7ins. thick and about A4 size.
THINK it in England, COMPUTE it over France, PRINT it in Saudi and SAVE it on your main system back in England. That's what HX20 can do for you – and it's cheaper too. For a standard desk top of roughly the same power as HX20 you could pay about twice as much – that's real value for money!

BITS P.C.s
COMPUTER PRODUCTS LTD
Trading as Leeds Computer Centre.
Please call or write for full details
Leeds Computer Centre, The Balcony, 60/62 Merrion Centre, LEEDS.
Tel: 0532-458877

VISA

● **Circle No. 153**

We take all the guessing out of terminal buying



Micropute is a fast developing distributor with the sole aim of guiding you through the systems jungle. We carefully test, evaluate and then select the best product from its own marketplace. We then add our own extensive product knowledge and all the necessary ancillaries related to the main product. All this fully backed and protected by fast, comprehensive nationwide servicing and maintenance coverage.

K9 Terminal

Main features:

- 80 x 25 (including status line)
- Green display
- Seperate keyboard
- Function keys
- Self test
- Reverse video
- Underlining
- Half intensity
- Protected mode
- Line and block graphics
- Televideo compatible
- Baudrates to 9600

The K9 Terminal is undoubtedly one of the most competitively priced terminals available on the market today which can offer so many outstanding features.

The K9 Terminal is supplied to us by I.C.L. and includes the type of back-ups and product development that you would expect from a major manufacturer.

Delivery is ex-stock and this amazing terminal is now available at the incredible price of only: **£525.00** + V.A.T.

Insight Terminal

Main features:

As the K9 Terminal plus,

- Deeper contrast on screen
- Black screen surround (eliminates reflections)
- Deeper recessed screen
- Customised for Wordstar
- Optional 15" screen
- Optional graphic display
- Alternative emulations. VT52, Beehive

The Insight Terminal is again, extremely competitively priced offering an even greater amount of features than the K9.

The latest addition to the already impressive list of this terminals features is the option of full graphic display, which is now available as an ex-stock item.

Delivery on all Insight Terminals is ex-stock and prices start from as little as **£595.00** + V.A.T.

All Micropute products are backed by a nationwide service and maintenance team.

For further technical data and the name of your nearest dealer send the coupon now!

MICROPUTE Catherine Street, Macclesfield, Cheshire SK11 6QY. Tel: (0625) 612759

Name _____ Position _____

Company Name _____

Company Address _____

_____

_____


Tel. No. _____

MICROPUTE

Catherine Street, Macclesfield, Cheshire SK11 6QY. Tel: (0625) 612759


● Circle No. 154

A new star is born

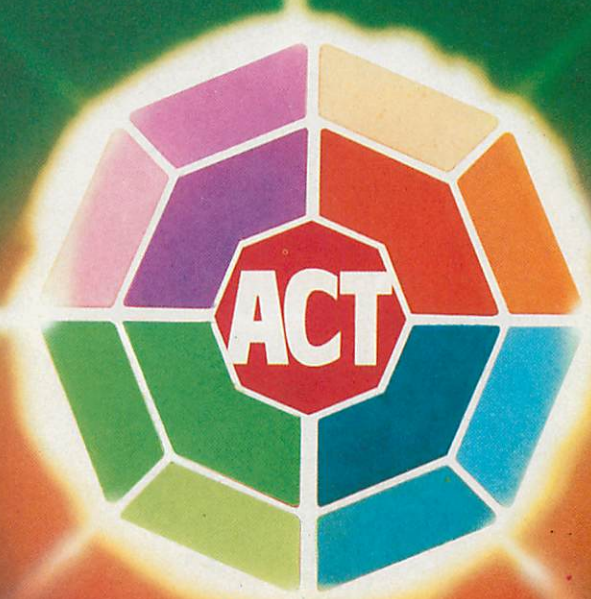

pulsar

16 BIT BUSINESS SOFTWARE

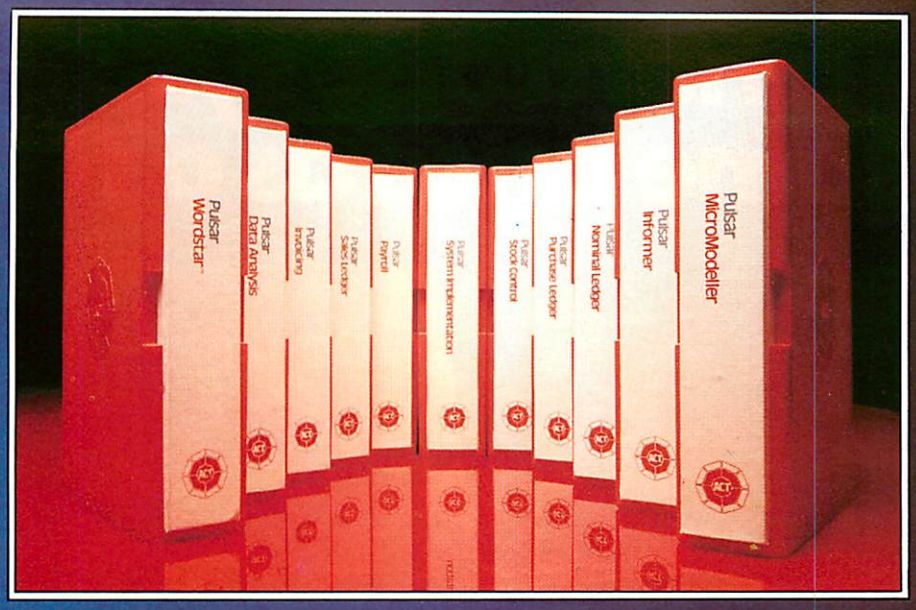

PULSAR business software is the creation of ACT – the company behind the Sirius 1 and recognised leader in 16-bit personal computing.

The new PULSAR range, developed by ACT at a cost in excess of £1 million, takes full advantage of the power and expandability of 16-bit computers.

It is inherently faster and more powerful than traditional 8-bit software.

And it is a true 16-bit range, designed and developed by ACT's own software engineers.

PULSAR offers more of all the key requirements in business software:

MORE PORTABILITY

Written thoughout in machine-independent portable languages to protect your software investment.

LONGER PEDIGREE

ACT has more than 17 years experience in developing business software. Thousands of companies throughout the world use ACT packages.

GREATER INTEGRATION

All the PULSAR packages are designed to share information, avoiding duplication of files and eliminating re-entering of data.

MORE USER-FRIENDLY

ACT's unique UFO (user-friendly origination) routines allow even the inexperienced user to quickly and easily configure a PULSAR system to precise requirements.

BETTER TRAINING

Two training centres, in London and Birmingham are open to all PULSAR users.

MORE SUPPORT

A "hot line" telephone support scheme to instantly resolve any operating queries.

PULSAR SOFTWARE CENTERS

Only PULSAR is available through the unique network of PULSAR Software Centers. These are hand-picked computer dealers who handle a range of personal computers but who specialise purely in PULSAR to meet all business needs.

THE PULSAR RANGE

Sales Ledger	£195	Informer Database	£295
Purchase Ledger	£195	Micromodeller	£595
Nominal Ledger	£195	SuperCalc™	£150
Payroll	£195	MultiPlan™	£159
Stock Control	£195	WordStar™	£295
Invoicing	£195	Select™	£295
Data Analysis	£195	MailMerge™	£95
		dBase II	£395

AVAILABLE NOW FOR SIRIUS – IBM PC and DEC Rainbow coming soon.

For more information on the new PULSAR Range clip the coupon and return to

ACT (Pulsar) Ltd
FREEPOST,
Birmingham B16 1BR
or call
021-454 8585

Please send me further details of the new PULSAR Range.

Name _____

Position _____

Company _____

Address _____

_____

Tel _____

● Circle No. 155

SC I

™ indicates registered trade mark. Ownership details on request. ALL prices exclude VAT.

Now a hard disc system for the same price as a floppy



The Shelton signet

It's here! The new hard disc system that really means business.

From the bewildering range of computers, all claiming a technical advantage, Micropute have selected the machine best suited to the needs of small and medium sized businesses. The requirements of such a system were: Integral Hard Disc, Compact Design, Extremely Competitive Price, The CP/M Operating System giving access to a vast range of programmes for data and word processing, and The Capacity For Ease Of Upgrading To Multi-User. Which all adds up to a fully comprehensive and sophisticated computer.

The price?
From an incredible £2,695 (ex V.A.T.)

Micropute Supercover

As an extra bonus to this amazing package Micropute Supercover will provide a 12 month on site maintenance for only £99.00 parts and labour.

Faster Than a 16 BIT

BENCHMARK TIMINGS			
	PRODUCT		
	SIG/NET 8 BIT	IBM 16 BIT	SIRIUS 16 BIT
BM. 1.	1.1	1.5	2.0
BM. 2.	3.7	5.2	7.4
BM. 3.	9.9	12.1	17.0
BM. 4.	9.8	12.6	17.5
BM. 5.	10.5	13.6	19.8
BM. 6.	18.7	23.5	35.4
BM. 7.	29.6	37.4	55.9
BM. 8.	5.1	3.5	4.3

These figures are extracted from a recent article in, 'Personal Computer World' Publication.

Micropute Ltd Catherine Street, Macclesfield, Cheshire SK1 6QY Tel: (0625) 615384.

Name _____ Position _____

Company Name _____

Company Address _____

_____

_____

Tel. No. _____

MICROPUTE

Micropute Ltd., Catherine Street, Macclesfield, Cheshire SK1 6QY Tel: (0625) 615384.

● Circle No. 156

OLIVETTI M-20



Jack Schofield tests this good-looking office micro built round the Z-8001 16-bit chip.

MOST COMPUTER MANUFACTURERS like to lead, or at least follow, the pack. Hence the proliferation of standard 64K CP/M micros over the last couple of years, and the current flood of 16-bit versions. At first glance the Olivetti M-20 looks as though it is designed to compete with the rest of the pack. On closer examination it looks individual, if not idiosyncratic. As one of the world's leading typewriter, word processor, computer and office-equipment manufacturers, Olivetti obviously feels it can go its own way. The danger is that it may end up going nowhere.

Equipment supplied for test was an L1 M-20 with two 5.25in. floppy-disc drives, black and white screen, and the PR-1450 80-column dot-matrix printer. All of it was made in Italy and to 220/240V standard.

Setting up is extremely simple. The main console includes both the drives and the keyboard. The tiltable VDU screen sits on top and is connected by only one cable, which also carries mains power. The printer is connected in the normal way but needs its own mains plug. Though they are not labelled each one only fits one port so there is no obvious way to connect them wrongly.

Turn on the power using the switch on the back and the M-20 beeps. After about five seconds it invites you to

Insert diskette and type Return

Hopefully even inexperienced users will know this is the key with a bent arrow.

You can insert the system disc in either drive as the M-20 checks both. This is fortunate as you can spend ages hunting through the documentation to find out which is which. As you learn from page 6 of chapter 10, Olivetti has not been boring enough to label the drives A and B, but 0 and 1. Drive 0 is the first drive — the one on the right. Drive 1 is the second drive — the one on the left. What a useful continental system this is.

Obeying instructions produces the systems information. In this case:

Total memory size: 160 Kbytes.
User memory size: 58390 Bytes.
Disk drive(s): 1 Ready.

This is not meant to imply the second drive is down, merely that it does not have a disc in it. It also provides the opportunity for some speculation. Where is the missing 100K?

Rather than equipping its machine with an obviously boring operating system such as MS-DOS, as on the IBM-PC, or CP/M-86 Olivetti has taken the trouble to write its own. Assuming it takes up about 40K, which would be reasonable, then where is the other 60K? Surely PCOS cannot take up 105,808 bytes. Looking at the files reveals PCOS.Sav at 73482 bytes, and PCOS loads Basic as well, incidentally there is a file called Edit. Abs at 19436 Bytes. A 19K editor? Whew!

Typing "basic" — all-lower-case commands are accepted — sends you instantly into PCOS Basic, which provides a user memory of only 34365. Note that this is a machine fitted with a 32K memory-expansion board, yet there is only 33.5K

(continued on next page)

Benchmarks

	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
Olivetti M-20	1.1	4.0	8.0	8.4	9.2	17.1	26.5	1.2
IBM PC	1.4	5.2	12.1	12.6	13.6	23.5	37.4	3.5
Sirius 1	2.0	7.4	17.0	17.5	19.8	35.4	55.9	42.5

The Z-8001 based Olivetti ran the Benchmarks noticeably quicker than competitive Intel 8088-based machines. Unfortunately we did not have 8086-based and 68000-based micros available for direct comparison, though we will run these tests for a future issue.

OLIVETTI M-20

(continued from previous page)

free to Basic. It certainly makes you wonder about the advantages of buying a 16-bit micro. The 128K version would leave you just 1,939 bytes free to play with, which is only a moderate advance on the ZX-81 and well under the massive 3.5K user RAM provided by the Vic-20.

Presumably Olivetti did not write PCOS for fun but because it could not take MS-DOS or CP/M-86 off the shelf. And Olivetti could not do that because instead of building its 16-bit micro around the popular 8086/8088 microprocessor, the designers chose the obscure Zilog Z-8001.

But starting from scratch has its advantages. Everyone agrees that CP/M is not user friendly and MS-DOS is only slightly less hostile. The way is open to produce something much better, and with 128K of RAM to play with surely the space is there.

Granting that PCOS ought to be wonderful, the actual result is disappointing. Instead of using a friendly, menu-driven system like that on certain home computers and some expensive business machines, PCOS is effectively just like CP/M, only different. In one respect it is better: it uses simple, memorable two-letter commands such as vr for VRename or Rename Volume and fc for FCopy or Copy file. In another respect it is worse — all the things you already know about CP/M become a positive disadvantage. You already know you want Dir, but you have to think of the Olivetti for it. Ah, vl for Volume List.

One of the worst things about CP/M is the error reporting. It tells you things like, to give a famous example,

BDOS ERROR ON B: BAD SECTOR

when it should really say "Close the drive door, dummy" Here again PCOS does not represent much of an improvement. It simply says Error 92. You look this up in the manual. Again it does not say "close drive door" but "command not found — an invalid keyword has been entered". This is annoying, as a valid instruction certainly has been entered — it is just not an error the designers have allowed for.

Anyway, the manual says there are 127 PCOS error codes, and though not all of them are used 28 are given in the manual. They range from Error 7, when the program is too big for the memory available, to Error 111, invalid device name. You can get some puzzling unutilised errors for which there is no explanation. In Basic, but not in PCOS, they are given the additional explanation "unprintable error", which is jolly useful as it saves you looking it up in the manual only to find it isn't there.

Olivetti has provided an extra facility for those users with masses of spare RAM. It is possible to PLoad the Eprint. Sav file, which takes up just over 1K, and which then becomes part of PCOS. This then has the function of adding a little comment to the error number, so you get


ERROR 92 — command not found

It is possible to type "he", for help, and then key in the error number. The PCOS system disc includes a large number of .Dat files which provide fuller explanations of the error codes without driving you back to the manual.

If all this were part of CP/M it would be wonderful. As part of PCOS it makes the system just about bearable, but in the end error numbers belong to 1979, not 1983.

PCOS does have some good points. For example, our vl will page all the files in order with the number of bytes, number of sectors used and allocated, and other information. Using vq provides a quick CP/M-type listing. Using va provides an alphabetical list — as long as the disc is not write-protected.

It also includes utilities that should prove valuable to the business user. The built-in password-protection scheme is an example. It is very simple to set up the parameters to control Olivetti printers, as you just need to type SForm then enter the parameters.

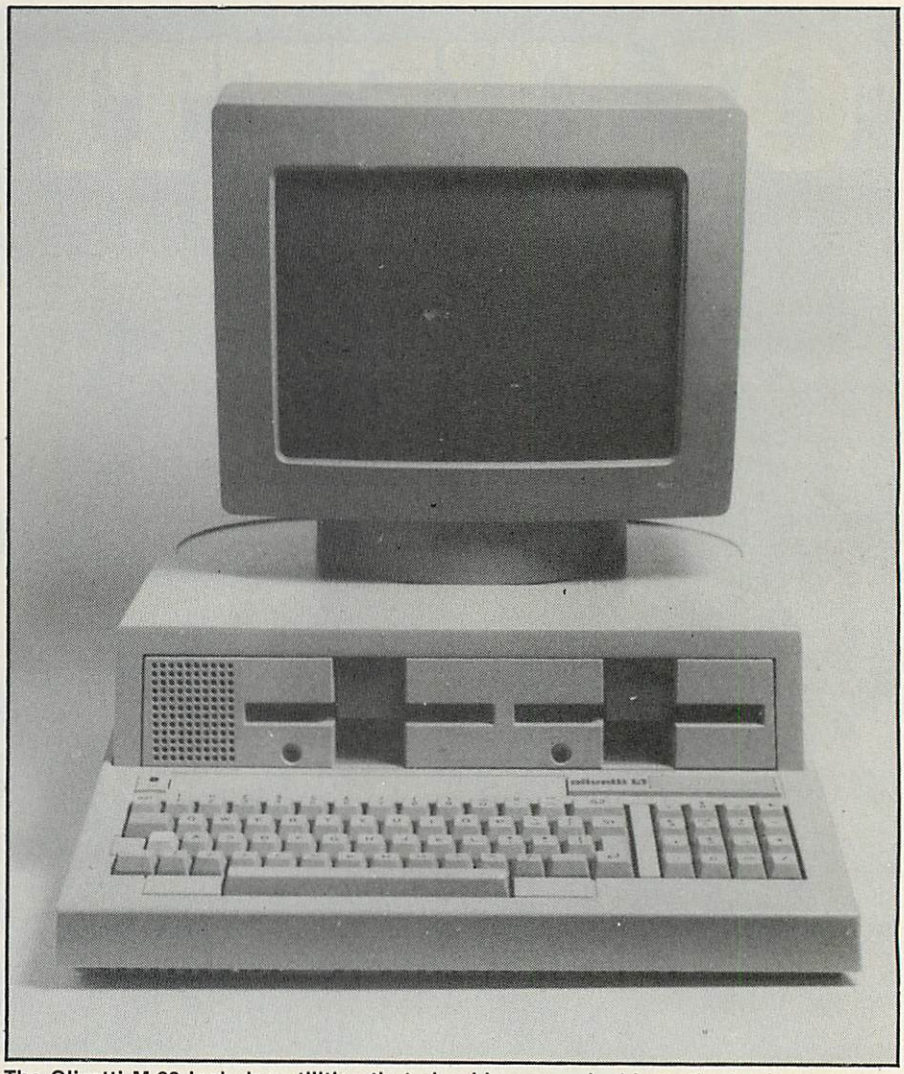

The Olivetti M-20 includes utilities that should prove valuable to the business user.

Specification

CPU: Z-8001 running at 4MHz
Operating system: PCOS
Memory: 128K RAM expandable to 224K with three 32K boards; as tested — 160K
Bus: five-slot expansion bus
Discs: two 5.25in. with 320K of unformatted storage each; transfer rate 250Kbit/s
Standard interfaces: parallel printer interface: RS-232C serial interface

KEYBOARD
Type: built-in with 72 keys, including 16-key numeric/cursor control pad
Features: auto-repeat on all keys; top row can be used as function keys; Basic language keywords optionally available on ASCII version

DISPLAY
Type: detached 12in. monochrome screen with brightness control
Displays: 64 characters by 16 lines, or 80 by 25 lines; 512 by 256 pixels
Colour: optional

DIMENSIONS
Basic unit: 430 × 519 × 155mm., weight 11kg.
Display: 334 × 310 × 260mm., weight 9kg.



The keyboard is typewriter style with a 16-key numeric keypad added and two curious extra Return keys S1 and S2.

For printer type you just give the number — though one wonders what happens with non-Olivetti models. PCOS provides good facilities for customising both the keyboard and the operating system by adding to it but not, unfortunately, by subtracting from it — so it is suitable for turnkey applications. All you need is an Init.Bas file on your program disc and the M-20 scoots through the system stuff, and Basic, and loads and runs this straight away.

Does the world need PCOS? No it does not, and if Olivetti wants to appeal to the general microenthusiast then the sooner it offers both a CP/M-80 emulator and CP/M-86 the better.

The M-20 is effectively a one-piece unit, though the screen is not actually attached to the top of the console. It is not particularly small, and monopolises a desk in a way that micros with detached keyboards do not.

The keyboard is typewriter style with a 16-key numeric keypad added. The keys have a nice feel and give a positive mechanical click when pressed.

At first the keyboard looks short of programmable function keys. However, the top 12 keys from 1 to ^ are effectively function keys when pressed with either the unlabelled orange Command key or the light-blue unlabelled Control key on the left of the keyboard. Templates can be fitted into two slots just above the keys. A template supplied with the Oliword program includes such functions as Forced Blank, Center and Decimal Tab.

The keys on the numeric keypad may also be programmed and in Oliword can be used for macros via the Learn/Execute utility, but then they can no longer be used as numbers. The 5 on the keypad is the centre of a logical cross-shaped cursor-control pad accessed using the shift key or Ctrl.

The oddest thing about the keyboard is the use of two extra Return keys labelled S1 and S2. They are really function keys and their use varies. In Oliword, S1 becomes Cancel and S2 an auxiliary key for special commands. It is a moot point as to whether this is more trouble than it is worth, as the use is not consistent from package to package.

The keyboard layout is standard English with a £ over the figure 3 and " over the 2. The colon and semicolon are on adjacent keys, which is quite useful. The most inconvenient thing is the lack of an Inst Del, Cancel or simple Backspace key. Deleting a letter means pressing Ctrl-H, which is not a particularly friendly idea.

The screen is very convenient and can be turned or tilted to suit. It has only one control, a brightness adjustment, but the contrast is excellent. The character set is very legible and program lines are well-spaced in Basic, which makes programming a pleasure.

The only flaw was that the cable connector was a loose fit and kept popping out of the console. Also, in certain positions, the fan inside the console would produce a vibrating resonance with the VDU — annoying, but curable by moving the VDU slightly. This is not a problem that has been noted on any other sample of the M-20, and could be due to the unit having been frequently transported.

A colour monitor is also available. It involves the use of one of the expansion slots, and reduces the amount of RAM that can be plugged into 192K.

The Basic-8000 Rev. 1.3 supplied on the system disc appears to be an Olivetti product. However, it is very close to the *de facto* MicroSoft standard — it could well be MicroSoft 5.2 — and offers the same type of string handling — Mid$, Left$ etc.

Commands include TROn and TROff, Auto for line numbering and Renum for renumbering. And it renumbers Gotos and Gosubs. Statements include Def FN, If-Goto-Else and If-Then-Else, Print Using, Swap, On Error Goto and While-Wend. For graphics and screen handling, statements include Circle, Color, Paint, Scale, Window and Close Window.

Scale enables you to switch between a display mode of 64 characters by 16 lines Scale 0,511,0,255, and 80 by 2 — Scale 0,479,0,255. Scale also enables you to set the screen according to your problem co-ordinates, so you can graph things without working out the number of pixels and translating each time.

The only bad thing about the Basic is the error-checking and report, which is only slightly better than PCOS. Errors are not picked up on line entry, and this is a facility which it is unpleasant to live without once you have become used to it. Error reporting is then on the level of

Syntax error in 35

— your problem, mate. You find it.

Editing is not bad, but not everyone will like it. When the program run throws up an error, the line number is reprinted at the end of the OK prompt. Pressing the space bar then prints out the line, so you can edit it. It saves retyping, but at this point Basic turns nasty. If you want to delete characters, use Ctrl-X; if you want to insert characters, that needs Ctrl-I, if you want to extend the line, that needs Ctrl-X.

If you want to delete the rest of the line then enter the Insert mode, use Ctrl-H — H for hack. And so on and so on, over five pages of the manual. Unfortunately you cannot simply use the cursor-control keys

(continued on next page)

OLIVETTI M-20

(continued from previous page)

to zip up the screen to insert that missing colon or whatever. You have to do it the hard way. It may be good for the soul but it is not good for the temper.

Standard benchmark tests reveal that the Basic is extremely fast at executing the trivial tasks they cover. In practical use, however, the Olivetti does not seem subjectively as fast as, say, the BBC Microcomputer, because disc access appears relatively slower.

The Olivetti supplied for review came with two standard packages: the Oliword word processor, and the popular Multiplan spreadsheet — thankfully not rechristened "Olicalc".

Oliword seems to be unique to Olivetti. Many people like it a lot, but this reviewer is not one of them. As with editing in Basic, it is tedious to actually do anything with it. It is somewhat like WordStar, and the editing is about as horrible as Apple Writer II.


On screen the top nine lines are normally devoted to instructions and function menus. The bottom five lines are devoted to mode, text and system information. This leaves a narrow strip of only nine lines across the middle where you can actually write. A word processor ought either to be as common and familiar as WordStar, or much better. Oliword is neither.

Multiplan seems to be the big software hit of 1983. Practically every major company is implementing this Microsoft program, including IBM, Wang, Apple, Philips and 20 others. It is easy to load by entering mp and pressing Return. After the Olivetti copyright — no mention of Microsoft — the blank spreadsheet appears.

To be different from VisiCalc, commands are entered at the bottom of the screen, using the first letter of any of the 20 options displayed. The initial grid is seven columns by 20 rows. And here is the worst thing about Multicalc: both the columns and rows are numbered, instead of one being numbered and the other lettered. This is because there are 63 columns and 255 rows but only 26 letters in the alphabet — a fact for which one cannot blame MicroSoft. Still, so many people confuse rows and columns anyway, a different notation would help.

One of the many nice things about Multiplan is that it continuously updates a "percentage free" total at the bottom of the screen, so you know when a model is becoming dangerously complex. It has many others, but they are not specific to the M-20, where the program — again, subjectively — does not seem to run quite as fast as on the Wang Professional micro.

As with Oliword and PCOS, Multiplan comes with a template that slots in above the keyboard and makes it convenient to use the Ctrl and CMD function keys to use the top row as function keys. Functions offered include page movements, word and character movements, Delete and Recalc. Thus Olivetti has not simply implemented Multiplan, but has configured it to use the somewhat limited 72-key keyboard to the full.

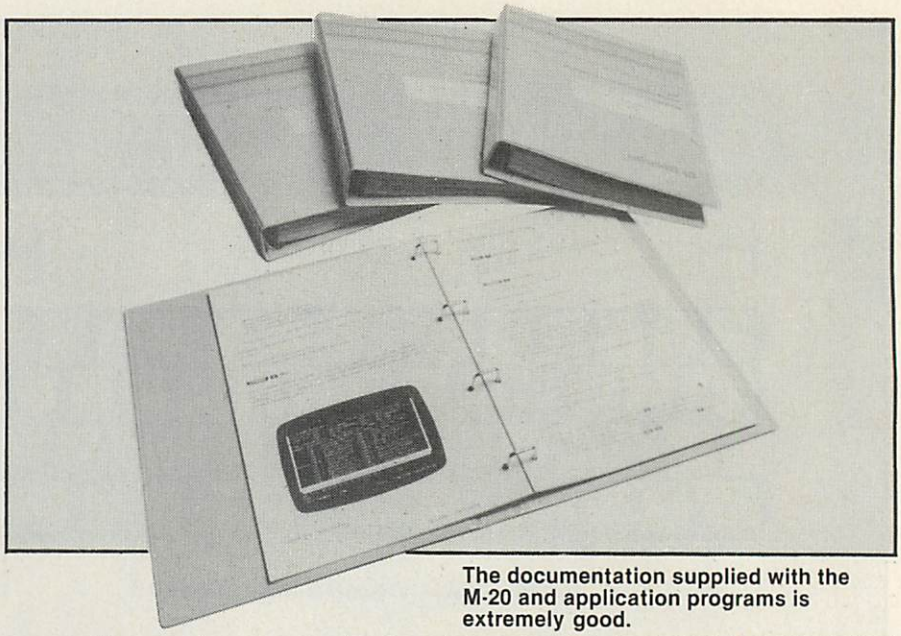

The documentation supplied with the M-20 and application programs is extremely good.

Olivetti produces an application guide which lists a large number of other programs of various types. Many are general accounting packages, but some are specialised such as Hotel Billing, Kitplan and Kitcost for kitchens, Windows and DGlaze, Newdist for newsagents and QSuite for Quantity Surveyors. The Olivetti range includes Olientry for data entry, Olispec accounting, Olisort, Olistat, Olimaster and Olitutor. This last named is a self-teaching guide to the M-20 itself, and probably well worth having.

The documentation supplied with the M-20 and application programs is extremely good — certainly among the best there is. It is thorough, well laid out and reasonably accessible. It is aimed at the absolute beginner, which makes it slow and somewhat frustrating for the slightly more knowledgeable. The user who knows, say, CP/M or WordStar could really do with a quick summary of the essential differences without having to search through dozens of pages that explain, in great detail, what everything means.

Pocket reference guides are included with the main manuals, but they are not quite as accessible as the manuals themselves — which defeats the whole purpose of having them. The Oliword quick reference card is good; the Multiplan one incomprehensible. Fortunately Multiplan itself has a good Help facility.

In the main manuals, cross-referencing is excellent but of the four supplied, three lacked an index. With such massive and detailed manuals, an index is a real help.

Conclusions

● The Olivetti L1 M-20 is attractively styled, solidly constructed and easy to install.

● It uses an idiosyncratic operating system, PCOS, which is not likely to prove a strong attraction either to complete beginners or to those familiar with CP/M. With CP/M-86 available and a CP/M-80 emulator it would become a more attractive system. Running only under PCOS it will not attract in numbers the business user who is also a computer enthusiast.

● The Basic is fast, but the amount of RAM free to Basic is disappointingly small. The advantages of having a 16-bit machine are by no means obvious from the M-20.

● The ergonomics are good and the screen display is excellent, but the built-in keyboard, while no disadvantage in a laboratory or factory, makes the machine intrusive on an office desk top.

● The documentation is excellent and makes the machine suitable for a complete beginner. However, a beginner would probably be better off, in the long run, learning on an industry-standard operating system such as CP/M-86 or MS-DOS.

● The M-20 could be very attractive to systems houses writing turnkey packages: Olivetti will sell the machine effectively and support the hardware but the software market will be less competitive than for more popular micros such as the IBM PC and Sirius 1. Any software will need to insulate the inexperienced user from the machine.

● At £2,395 plus VAT for the twin-floppy version, the price is competitive. A single-floppy and hard-disc versions are also available.

● The Olivetti L1 M-20 is distributed by Olivetti, Olivetti House, PO Box 89, 86/88 Upper Richmond Road, London SW15 2UR. Telephone: 01-785 6666.

Software that isn't hard...

Accounting Plus *is a comprehensive software package, comprising eight individual programs, purpose built for the modern responsive business.*

Each program can be bought individually and then used as a 'building block' in a fully integrated system.


Programs cover most aspects of modern business — Sales Ledger, Sales Order Processing, Bought Ledger, Purchase Order Processing, Nominal Ledger, Stock Control, Point of Sale and Payroll.

Look carefully at the integration diagram below and consider how many of our competitors offer you this sort of coverage and this sort of flexibility. This sort of integration.

And it isn't hard.

A single key entry updates information in all other related programs. Automatically. Without fuss.

Consider again how much valuable time and effort this will save.

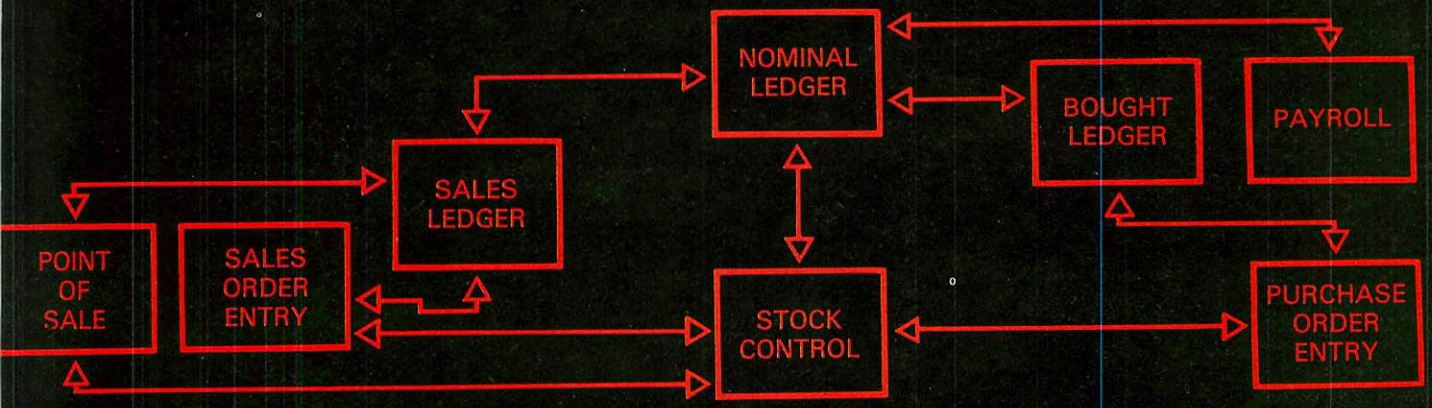

Our competitors make extravagant claims about integration. None is as complete as Accounting Plus. Perhaps the hard-nosed industry reviewers are our best recommendation:

Dr. Kathy Lang *writing of Accounting Plus in* **Micro Computer Week** *said, "The system certainly seems to live up to its claim of integration: basic transactions were followed through all the way to Profit and Loss and to the balance sheet . . ."*

In **Practical Computing, Simon Rushbrook Williams** *thought, ". . . the software is remarkable in its completeness, its thorough error messages and its uncrashability."*

Neville Ash *reviewing Accounting Plus in* **Micro Decision** *commented, "Accounting Plus does not let you make mistakes."*

High praise indeed! Accounting Plus really is a complete, 'user friendly' system. Easily understood prompts, error and help messages appear on screen leading you through the program.

Training is available and, naturally, the Mediatech name for reliability means that you can be sure that help and technical back-up are just a phone call away.

...so you see, Software doesn't have to be hard to be good

Please send me an explanatory brochure on Accounting Plus.

NAME _____

POSITION _____

COMPANY _____

ADDRESS _____

_____

TELEPHONE _____

I may qualify for a dealership.
Please send a dealer application pack. ☐

PC4/83

MEDIATECH SOFTWARE

Woodside Place, Alperton, Wembley, Middlesex HAO 1XA England
Tel. 01 903 4372 Telex 8814541

● Circle No. 159



ORIC-1™

TIMELESS TECHNOLOGY FROM ORIC PRODUCTS INTERNATIONAL

The Computer Challenge

16 colours professional keyboard full graphics real sound

- Superb styling
- Choice of 16K, 32K or massive 48K RAM
- Ergonomic keyboard with 57 moving keys
- 28 rows x 40 characters high resolution
- Teletext/viewdata compatable graphics
- 6 octaves of real sound plus Hi-Fi output
- Centronics printer interface and cassette port
- Comprehensive user manual

OPTIONAL MODEM OFFERS COMPUTER PHONE LINK FOR:
● ELECTRONIC MAIL ● TELESOFTWARE ● PRESTEL

THE REAL COMPUTER SYSTEM FROM
£99.95 incl VAT

COMING SOON, TO COMPLETE YOUR SYSTEM: ORIC MICRO-DRIVE DISCS & SPEED PRINTER

FOR HOME: The ORIC-1 is the professional alternative for home computing. Superbly styled, the 57 key layout is based upon computers costing many times more than the ORIC, and will help the whole family to learn and understand computing, right from day one. The ORIC incorporates an improved version of Basic for ease of programming and use. For the enthusiasts the computer has laser zaps, explosions, etc. pre-programmed for games use, with Hi-Fi output for incredible effect. The communications Modem will allow 'Telesoftware', message sending, and Prestel use.

FOR BUSINESS: The ORIC-1 is the answer to many day to day problems. Software is becoming available for payroll, accounts, stock-control, and many more systems to help your day to day business organising and control. In addition, the ORIC COMMUNICATIONS MODEM will allow you to access up to 200,000 pages of Prestel information, to send and receive 'electronic mail', to book hotels, and flights (and pay for them) and to look at the latest stock-market and share indexes. In short the ORIC-1 is a must for all businesses large or small.

HOW TO ORDER YOUR ORIC-1: By phone: Just ring our telesales number Ascot (0990) 27641. By post: You can pay by cheque, postal order ACCESS – BARCLAYCARD – AMEX – DINERS.

ORIC-1
The Real Computer System

ORIC PRODUCTS INTERNATIONAL LTD Coworth Park Mansion, Coworth Park, London Road, Sunninghill, Ascot, Berks SL5 7SE.

● Circle No. 160

Prices Include VAT

ORIC-1 16K RAM	£ 99.95
ORIC-1 48K RAM	£169.95
ORIC Communications Modem	£ 79.95
Postage and Packing	£ 5.95
TOTAL	£

(Money back if not satisfied)

*Please delete/complete as applicable.
*I enclose a cheque/P.O. payable to: ORIC PRODUCTS INTERNATIONAL LIMITED for £_____

Please charge my Access, Barclaycard Amex, Diners Club account no.

Name

Address

If you require a brochure please tick ☐ PC

© Copyright ORIC PRODUCTS INTERNATIONAL 1982

ORIC 1

Colour, good sound and a price of under £100 make the Oric an attractive beginners' micro.

THE LAUNCH of the Oric 1 comes at a watershed in the development of the micro industry's private subset of English, a language which is called computerspeak. Computerspeak — or if you're really on the ball, ComputerSpeak — has been developed by the people who write press releases, advertising copy and brochures.

It is a language where horrible grotty keyboards are described as "professional"; where £99 microcomputers can be used by businessmen; and where delivery in 28 days means we might get round to sending you a machine one day, but in the meantime we will hang on to your money.

To be fair to the grey faces behind the Oric, they didn't invent Computerspeak. They are, nevertheless, proficient in its use. The Oric looks horrible, which in Computerspeak translates as "superb styling". It does not have a proper keyboard, which is described as "professional". The "comprehensive" user manual is, in fact, impenetrable, and the review machine was supplied with a provisional manual which for a large part was actually wrong.

I could go on, but it would be unfair. Other micro manufacturers are just as bad, but the Oric tops them all by claiming to be "the real computer system". In fact it is a toy.

If the Oric is treated as the toy that it obviously is, it is terrific, except for one thing: the colour does not seem to work on the *Practical Computing* television. These "problems" will be ironed out, says Oric. In fact the new manual is already being sent out, and at least it is correct. Oric says that an adjustment has been made to the TV modulator — which incidently is unique in that it can be programmed — which will result in crisp, sharp pictures on U.K. television sets. A second sample we obtained did, in fact, give bright, attractive colours.

The Oric, though ugly, is very sturdy. It will be able to take the kind of thumping that is commonly associated with micro-computer games. The keyboard, though in no way professional, is vastly superior to that of the Spectrum, which is the Oric's nearest rival. The keys actually depress, but unlike those on the Spectrum they don't make your flesh creep when you touch them. The keyboard is laid out like a typewriter keyboard, with a space-bar and cursor controls in sensible places.

This means that a home computer user could use the Oric as a cheap word-processor, as long as he does not actually know how to type. The keys are more like buttons, and need a firm press. Also they are very small. However, they are suitable for use by a slow two-finger typist.

When each key is pressed it makes a loud blip. This very quickly becomes irritating but it can be turned off by pressing a control character.

There is a word-processor package for the Oric which is due to be released shortly. Designed by John Dawson, it should be usable by a student or a child learning about these matters, and suitable for limited home use.

There are four pads under the Oric, to stop the micro from scratching the kitchen table. They also stop it from sliding about.

In addition to a TV output on the rear of the Oric there is a monitor output. This is strange in two ways. First, it has non-standard pin-configuration. Second, who in their right mind would want to pay £200 for a colour monitor when their micro is only worth £99? There might conceivably be a point if the screen resolution warranted it, but that is not the case with the Oric.

Adding a monitor output costs the manufacturer very little, and so the machine might be no cheaper without it, but it is really only a cosmetic addition. Next to the monitor port is a cassette/sound output port. In fact the loudspeaker built into the Oric is loud enough on its own, but some music or sounds might be wanted for sound effects elsewhere.

Still, being able to take sound from the machine and store it in analogue form on tape just might be a good idea, and it does not cost the manufacturer much to add the facility. The main use of this port is for CSave and CLoad operations to tape. The Oric saves at 2,400 baud, with a 300 baud option for greater reliability. Saving the screen contents or machine-code routines is commendably straightforward.

Next to the cassette/sound port is a 20-pin parallel printer port. It should make adding a Centronics-type printer a comparatively simple task. The Oric does not have an

Specification

Microprocessor: 6502
Memory: 16K or 48K
Keyboard: 57 push-button keys
Sound: three channels across six octaves plus games sounds
Colour: eight colours
Display: 40 characters by 28 lines; high resolution, 240 × 200 points
Ports: TV, RGB monitor, cassette/sound, printer, expansion port.
Price: 16K, £99.95; 48K, £169.95.
Manufacturer: Oric Products International, Coworth Park Mansion, Coworth park, London Road, Sunninghill, Ascot, Berkshire SL5 7SE.



RS-232C compatible port and this is a shame. After all, RS-232 is a fairly standard serial port, and it would be more use than a colour-monitor output to the majority of users.

The bus expansion is 34-pin, allowing access to some of the 6502 bus lines. It is similar to that on the back of the Acorn Atom or the BBC Micro. No doubt this is where the Microdrives will plug in. There do not seem to be any disc-handling commands provided in Basic.

The case can be removed by taking out six screws. Five of them are obvious; the sixth is hidden beneath a sticker which warns that removing the back of the case will invalidate your warranty. Clearly, the maker does not want you to play around with the insides.

Inside the Oric is a 1W speaker, which can make a sound loud enough to wake the neighbours. The Oric really does have excellent games sound, and it should make a substantial difference to any game.

When an explosion really sounds like an explosion, and a zap sounds like a zap, you begin to realise that you are close to what microcomputers in the home are all about. It is one thing to spend an evening in front of a colour television giving yourself a backache and severe eye strain playing Space Invaders. Being able to go deaf to boot is something else.

In addition to the sound effects accessible from Basic — namely Zap, Shoot, Explode and Ping — there are three more music commands which are more powerful than any to be seen on cheap micros.


Sound is followed by three parameters: Channel, Period and Volume. There are three channels and they can have any value between 1 and 6: 1,2 and 3 give pure, musical tones, while 4, 5 and 6 mix the tone channels with a dose of noise.


The command Music is used to create music of a sort, as opposed to mere sounds. The command allows you to set notes, their octaves and volumes. The Play command has an envelope parameter which allows some interesting sounds to be created easily. As a synthesiser system the Oric is a good, cheap introduction.

The graphics on the Oric were difficult to use, and the manual did not help much either. The difficulty may have something to do with Oric's Prestel adaptor origins. Although the graphics are fast, there is not much that can be done with them, and compared with other micros they are not very powerful.

In most respects the Tangerine Basic supplied with the Oric is of the standard Microsoft type. String handling uses the Left$, Right$ and Mid$ conventions, rather than string slicing. If-Then-Else is the only real extension to standard Basic.

The other extras are of the games and graphics type. As well as those already mentioned, colour and graphics commands include Draw, Fill, Pattern, Circle, Ink and Paper. As well as the standard text mode, you can have double-height, flashing characters and user-defined characters.

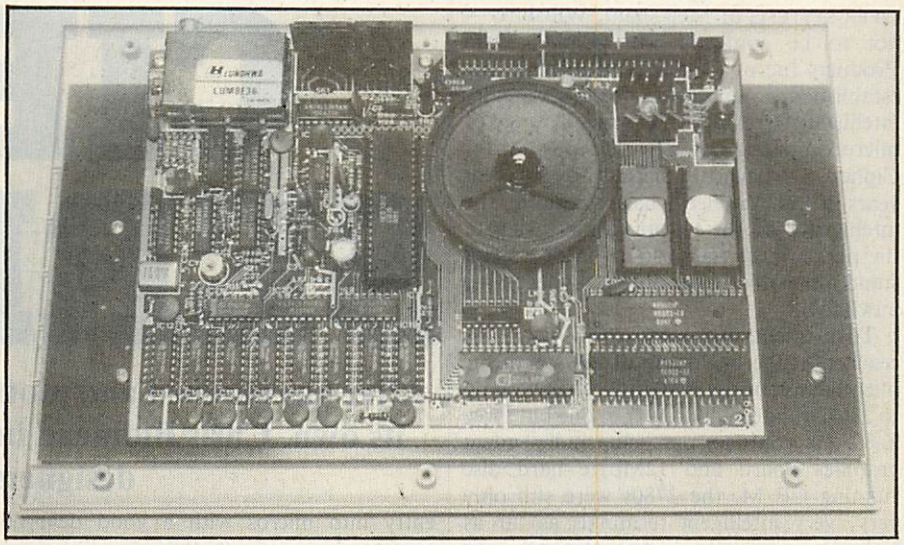

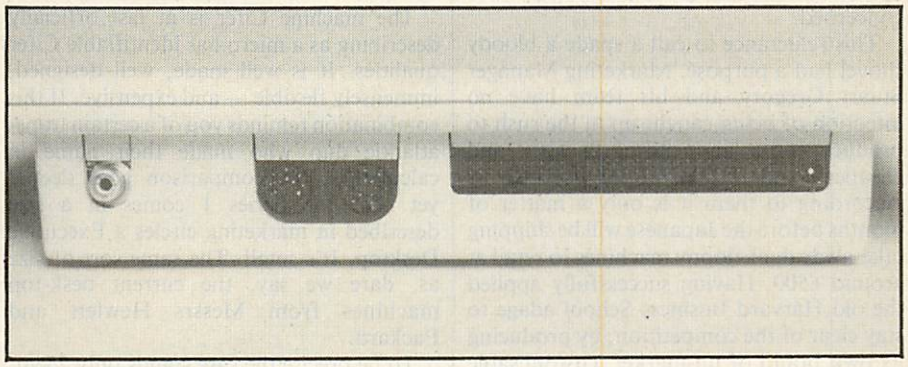



To reach the high-resolution mode, type Hires. It gives a screen 240 points across by 200 points down, with a three-line text window at the bottom. The similar four-line text window you can have with the Apple and Atari micros is easy to remove, but how it can be done with the Oric remains a mystery.

If you plan to stay in the text mode, typing Grab grabs some of the RAM reserved for high-resolution graphics. On powering up, the Oric claims to have 47,870 bytes free, on the 48K version, with 39,421 bytes free to Basic. Typing Grab provides an extra 7,167 bytes. The Oric's RAM figures are more honest than is now often the case.

The main problem with Basic is the editing, which is pathetic — so bad in fact that rewriting a line is often quicker. All that Control-A-ing becomes a bit much after a while. What is worse, once a change has been made it is impossible to just hit Return; you have to use Control-A again.

One moan about the final manual. It is insubstantial, illogical and lacks an index. It is better than the provisional manual, but it is still not much of a help, especially to people who know nothing about computing. And they are the people who are, after all, most likely to buy the machine.

Conclusions

- **The Oric is the cheapest home micro that offers colour and sound. The sound is far better than the Spectrum sound and one of the Oric's best points.**
- **The keyboard in not professional, and poor for word processing, but again it is better than the Spectrum's offering.**
- **While there is no software available, as the Oric uses the popular 6502 many games should soon be converted to run on it. The Spectrum has the advantage that masses of software already exists.**
- **The Oric is not suitable for business use. Because of the poor manual it is not as effective as it should be as a learning micro for beginners.**
- **It would appear that the main design criterion was price, and consequently an inferior machine has been produced. For a little more money, a joystick port — and perhaps an RS-232C port — would have been worth having.**
- **The Oric undercuts the Spectrum, and should give Sinclair Research a run for its money.**

CIFER SERIES 1

Cifer has planned and plotted a machine in a market of its own. Chris Bidmead investigates the degree of the designers' success.

CIFER SYSTEMS of Melksham, Wiltshire — not to be confused with Cipher Data Products Inc of Camberly, Surrey — has established a reputation for high-quality intelligent terminals. The series 1 range of microcomputers is a newish departure for Cipher — "newish", because over recent years Cifer-watchers have noticed the intelligence of the terminals increasing to the point where the production of a Cifer stand-alone micro was obviously becoming inevitable.

To all intents and purposes this point was reached at the beginning of 1982 with the introduction of the 2780 range. Yet with up to 256K of internal RAM, not one but three Z-80 microprocessors, an independent graphics board and 12Mbyte hard disc running CP/M, the 2780s were still only very, very intelligent terminals as far as Cifer's marketing department was concerned.

This reluctance to call a spade a bloody shovel had a purpose. Marketing Manager Stuart Gregory and his team have no intention of being caught up in the rush to produce more and more, cheaper and cheaper standard general-purpose micros. According to them it is only a matter of months before the Japanese will be shipping take-away dual-floppy machines to retail at around £500. Having successfully applied the old Harvard Business School adage to stay clear of the competition, by producing its own brand of up-market, customisable product, Cifer has been plotting its overt entry into micros with a good deal of caution.

The machine Cifer is at last officially describing as a micro has identifiable Cifer qualities. It is well made, well designed, immensely flexible — and expensive. If this combination reminds you of a certain trans-atlantic duo who made their name in calculators, the comparison goes deeper yet. For the Series 1 comes in a size described in marketing circles a Executive Desktop. It's small. The same sort of size as, dare we say, the current desk-top machines from Messrs Hewlett and Packard.

To be precise the case stands only 25cm. high, and takes up just 45cm. by 40cm. of desk space, with an extra 45cm. by 24cm. for the slim, detachable keyboard. Inside these lilliputian confines the Series 1 is able to cram all the hardware of the enhanced 2780 series as well as a Teac soft-sectored mini-floppy drive with a formatted capacity of 800K.

This compression is achieved in two ways. Firstly the screen is smaller than Cifer users have come to expect at 10in. diagonally rather than 12in., making room for two drives to the right of the screen and saving an enormous amount of volume at the rear of the tube. Secondly the component to air-space ratio, generous in the 2600 range of terminals, is pushed very tight, though the filtered fan seems to cope



adequately with cooling. It would be foolish to jump to conclusions, but personally I would feel easier with more air in the box.

The logical architecture is profoundly different from the run-of-the-mill CP/M micro. The Series 1 is really more a unified local area network than a single-processor machine. You will not be far off if you think of it as four separate subsystems: a screen, central processor and core memory, graphics, and the disc system. Each is autonomous and intelligent and capable of communicating with any or all of the others by way of the IEEE-488 bus which links them. Managing communication along the bus is the responsibility of an internal operating system called Ciops. Ciops is the true resident operating systems, CP/M being loaded in on top of it as a visitor.

The fifth and very important element is the package of CP/M utilities developed in-house by Cifer. They are .Com files — often with explanatory .Doc files — that are identified by names preceded with &. Their presence helps to make the Series 1 a system rather than just another micro.

The manual that arrived with the machine, intended for OEM's and development houses, is a formidable three days had study. Readability is not helped by it being an update, complete with insert pages and emendations, of the documentation for the 2680 range of machines. Like other Cifer documentation is it printed in dense dot-matrix format that suggests the rough draft of a Russian novel.

Overcome this initial impression and you will find the manual intelligently sectionalised, with detailed discussions under clear subheadings followed by tabulated data in appendices for subsequent reference. Tables of contents precede the sections and a comprehensive index brings up the rear. One section provides an overview of the CP/M manuals and offers some useful tips. For example, the standard CP/M utility Ed.Com requires the insert command i to be keyed as lower case, otherwise all subsequent text will be written to disc as upper case, however it looks on the screen. This is not made clear in Digital Research's documentation, so Cifer provides the warning. Would that all CP/M computer manufacturers knew the CP/M software environment this well.

However well the contents stand up to scrutiny, in practice you need three hands to hold it open. The whole 3kg. of manual bulges out of the standard Cifer floppy cardboard cover, its uncountable and unnumbered pages held together with a twopenny wire clip. I give it three for presentation, nine for content and a big round zero for star quality.

The hardware itself is a quite different proposition. It looks, feels and even smells like a star. The keyboard has a slightly soft touch that spells luxury, but might take a little getting used to, particularly if you have been brought up on the IBM layout.

I object to the arrangement for repeating characters by way of a separate Repeat key,



Some models include a 10Mbyte Winchester as well as floppies.

which is awkwardly placed between the right-hand Shift key and the Delete key, rather than just holding down any old character you want to machine-gun across the screen. There is a perfectly respectable reason why Cifer does it this way — it minimises the demands made on the central processor in multi-user environments — but if you are used to auto-repeat on every character key you will miss the facility. If you buy a Cifer, a separate repeat key is what you get, but keyboard design is important, at least until voice entry comes along and offices are filled with the sound operators shouting at their screens, trying to nudge cursors to the right position: "Left a bit, bit more, now down . . . "

On the positive side the Series 1 keyboard is very reconfigurable indeed. There are only three function keys as such, but the whole top row of 20 keys, dedicated to terminal functions like dumping to the printer, local screen editing, toggling graphics and so forth, can have alternative user functions downloaded into them, as can the right-hand numeric keypad and its associated cursor keys.

The display is a pale, rather acid green with clear, stable characters that are very easy on the eye, though the size of the screen struck users in this office as not really suitable for sustained use through the working day. Matters are not helped by a slight tendency for the image to jolt when the adjacent Winchester hard disc whirrs into action.

One very useful feature is the ability of the internal screen memory to hold seven screenfuls of text quite independently of the disc subsystem that drives it. You can scroll back and reread vanished data, or even edit it using the local edit keys and write it back to a file using Pip.

The screen allows several forms of highlighting: inverted, half-intensity, blinking, double-size, underlining and more; and these characteristics can be combined. For general use, in WordStar or the various CP/M Visiclones say, half-intensity in conjuction with inverted video makes a restful way of differentiating sections of the screen.

Additionally, protected fields may be set up that are immune to destruction by the cursor. Data-entry programs that call this feature will have to be specially written; ordinary commercial packages like DataStar have their own way of creating protected fields that do not depend on clever hardware.

Like the 2600 range of terminals — from which the Series 1's features are derived — the screen optionally displays an inverted, low-intensity 25th line that shows the status of the screen subsystem. It indicates such things as cursor position by row and column, data communication speed and protocol with the slave printer, whether the numeric keypad has been switched to its alternative function key mode, and so forth. Unlike the 2600 terminals the screen intensity can be changed through dialogue with the status line. A simple escape sequence directed at the screen is all that is necessary to dispose of this line, or replace it with a programmed message.

But this is only half the story as far as the screen is concerned because the physical display can also be driven simultaneously from the graphics board. Two games supplied to demonstrate this feature are downloaded from the disc system. The graphics is high resolution, smooth and fast, and can overlay pictures on the screen text quite independently from the disc subsystem.

The screen facilities are illustrated rather usefully by a Cifer program called &GClock, which sets and maintains a moving representation of an analogue clock-face. The intensity of the picture can be dimmed to background level and be left to tick away the seconds to the next coffee break while WordStar, directories or whatever go scrolling by.

The 256K of internal RAM on the main processor board presented somthing of a puzzle at first, as none of the software that came with the machine was able to access it. The documentation that arrived later explained all: Cifer has its sights on MP/M and CP/M 3, to be launched shortly by Digital Research as CP/M Plus.


Cifer's implementation of MP/M exists already, although we were not able to test it, and here the 256K of RAM is bank switched in 48K segments in the conventional way, with bank-identifying values being sent to a control port. In many respects the RAM behaves just as if it were so many separate S-100 boards. But the configuration is softer than this: a 256-by-eight static-RAM chip maps the memory area into 32 2K blocks, allowing software-changeable bank sizes and the possibility of write-protecting areas of memory.

There are five boards in all. A sandwiched pair comprise the disc subsystem that looks after the Teac and Rodime drives, and three other cards contain the screen system, the main CPU electronics and the graphics components.

There are a lot of chips — we counted 150 and then gave up. All those on the the main boards are socketed rather than soldered in, an expensive construction method adopted by manufacturers who take servicability seriously. I regard it as a mark of high-class merchandise. Other Cifer products show the same fondness for socketing.

The memories are state-of-the-art Texas

(continued on next page)

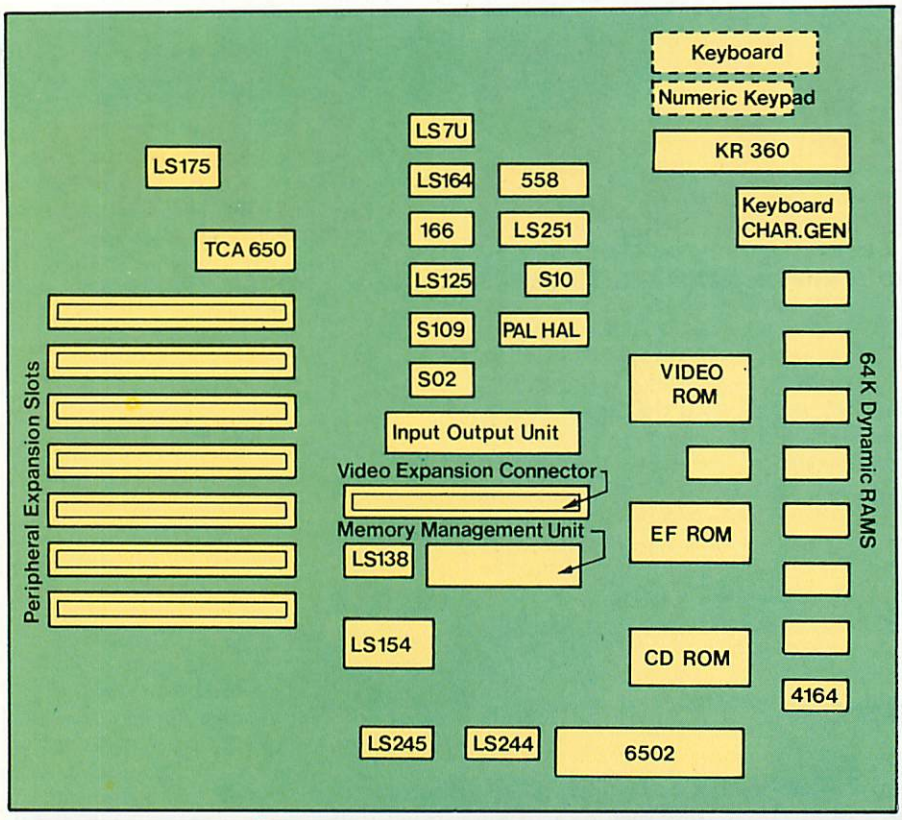


APPLE

(continued from previous page)

oped other devices — ranging from the esoteric exemplified by the Mountain Hardware Supertalker, the Heuristics Speech Recognition Card and the Alpha Syntauri synthesiser, to more general applications including Modems, buffered printer drivers and 80-column monitor display controllers. Several manufacturers have produced cards with alternative processor chips, using the Apple's 6502 for keyboard, I/O control and other housekeeping duties. The most significant of these are Z-80 boards, which enable Apple users to run the CP/M operating system and hence make available an extensive range of applications software.

From the outside the IIe could easily be mistaken for an Apple II. The case is the same both in size and shape, and the colour is virtually identical although the keyboard is lighter. It is the keyboard that provides the first indication that there is a different beast beneath the outer skin. The space bar is shorter and several new keys have appeared.

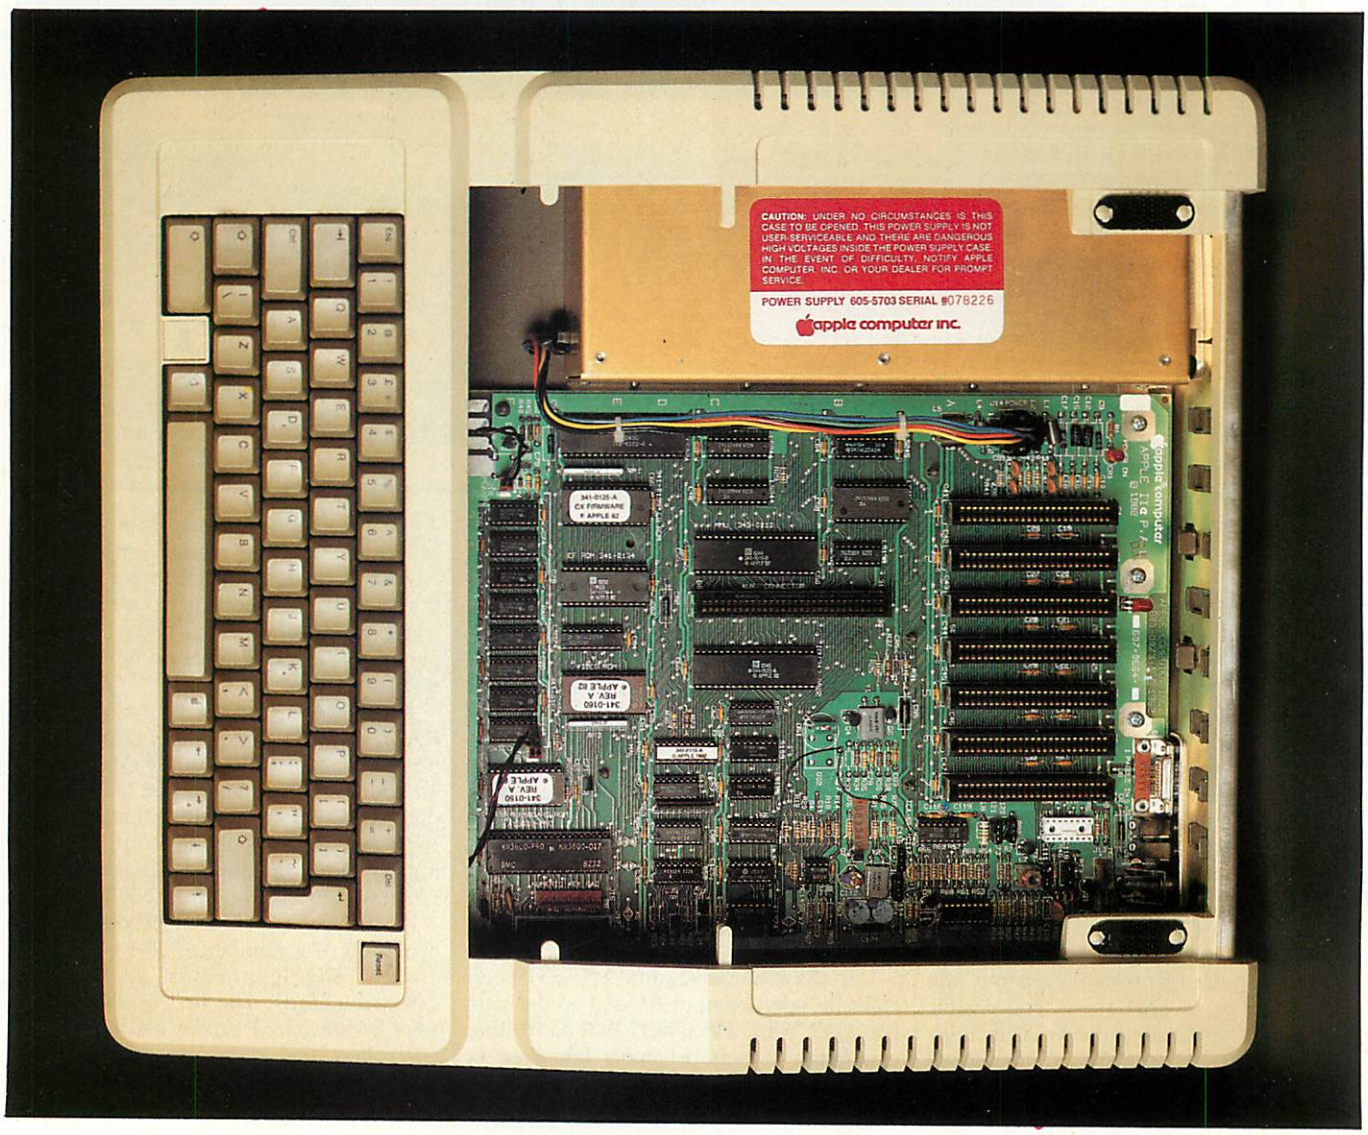

RS-232C compatible port and this is a shame. After all, RS-232 is a fairly standard serial port, and it would be more use than a colour-monitor output to the majority of users.

The bus expansion is 34-pin, allowing access to some of the 6502 bus lines. It is similar to that on the back of the Acorn Atom or the BBC Micro. No doubt this is where the Microdrives will plug in. There do not seem to be any disc-handling commands provided in Basic.

The case can be removed by taking out six screws. Five of them are obvious; the sixth is hidden beneath a sticker which warns that removing the back of the case will invalidate your warranty. Clearly, the maker does not want you to play around with the insides.

Inside the Oric is a 1W speaker, which can make a sound loud enough to wake the neighbours. The Oric really does have excellent games sound, and it should make a substantial difference to any game.

When an explosion really sounds like an explosion, and a zap sounds like a zap, you begin to realise that you are close to what microcomputers in the home are all about. It is one thing to spend an evening in front of a colour television giving yourself a backache and severe eye strain playing Space Invaders. Being able to go deaf to boot is something else.

In addition to the sound effects accessible from Basic — namely Zap, Shoot, Explode and Ping — there are three more music commands which are more powerful than any to be seen on cheap micros.


Sound is followed by three parameters: Channel, Period and Volume. There are three channels and they can have any value between 1 and 6: 1,2 and 3 give pure, musical tones, while 4, 5 and 6 mix the tone channels with a dose of noise.


The command Music is used to create music of a sort, as opposed to mere sounds. The command allows you to set notes, their octaves and volumes. The Play command has an envelope parameter which allows some interesting sounds to be created easily. As a synthesiser system the Oric is a good, cheap introduction.

The graphics on the Oric were difficult to use, and the manual did not help much either. The difficulty may have something to do with Oric's Prestel adaptor origins. Although the graphics are fast, there is not much that can be done with them, and compared with other micros they are not very powerful.

In most respects the Tangerine Basic supplied with the Oric is of the standard Microsoft type. String handling uses the Left$, Right$ and Mid$ conventions, rather than string slicing. If-Then-Else is the only real extension to standard Basic.

The other extras are of the games and graphics type. As well as those already mentioned, colour and graphics commands include Draw, Fill, Pattern, Circle, Ink and Paper. As well as the standard text mode, you can have double-height, flashing characters and user-defined characters.

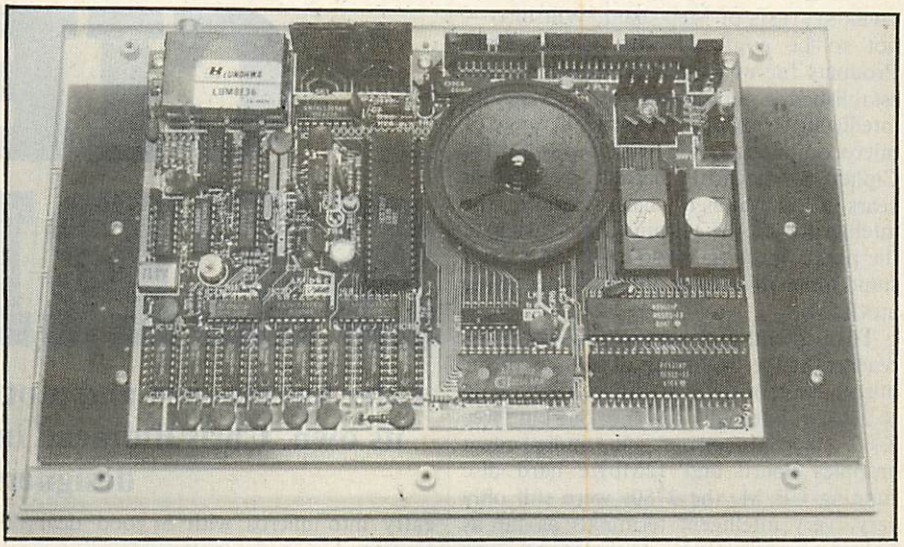

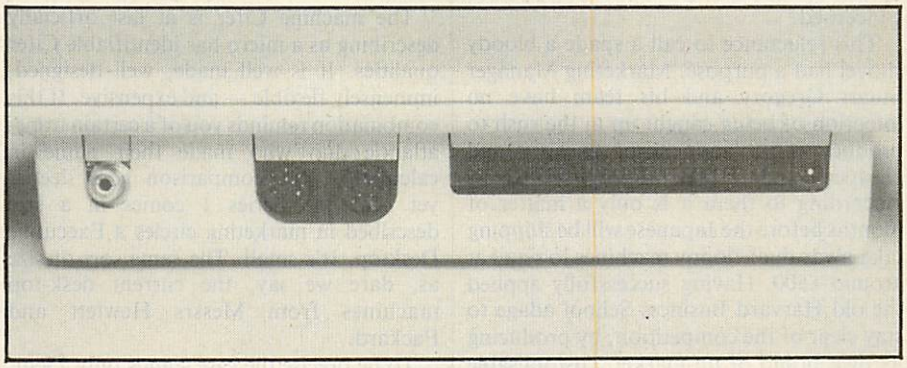



To reach the high-resolution mode, type Hires. It gives a screen 240 points across by 200 points down, with a three-line text window at the bottom. The similar four-line text window you can have with the Apple and Atari micros is easy to remove, but how it can be done with the Oric remains a mystery.

If you plan to stay in the text mode, typing Grab grabs some of the RAM reserved for high-resolution graphics. On powering up, the Oric claims to have 47,870 bytes free, on the 48K version, with 39,421 bytes free to Basic. Typing Grab provides an extra 7,167 bytes. The Oric's RAM figures are more honest than is now often the case.

The main problem with Basic is the editing, which is pathetic — so bad in fact that rewriting a line is often quicker. All that Control-A-ing becomes a bit much after a while. What is worse, once a change has been made it is impossible to just hit Return; you have to use Control-A again.

One moan about the final manual. It is insubstantial, illogical and lacks an index. It is better than the provisional manual, but it is still not much of a help, especially to people who know nothing about computing. And they are the people who are, after all, most likely to buy the machine.

Conclusions

● The Oric is the cheapest home micro that offers colour and sound. The sound is far better than the Spectrum sound and one of the Oric's best points.

● The keyboard in not professional, and poor for word processing, but again it is better than the Spectrum's offering.

● While there is no software available, as the Oric uses the popular 6502 many games should soon be converted to run on it. The Spectrum has the advantage that masses of software already exists.

● The Oric is not suitable for business use. Because of the poor manual it is not as effective as it should be as a learning micro for beginners.

● It would appear that the main design criterion was price, and consequently an inferior machine has been produced. For a little more money, a joystick port — and perhaps an RS-232C port — would have been worth having.

● The Oric undercuts the Spectrum, and should give Sinclair Research a run for its money.

CIFER SERIES 1

Cifer has planned and plotted a machine in a market of its own. Chris Bidmead investigates the degree of the designers' success.

CIFER SYSTEMS of Melksham, Wiltshire — not to be confused with Cipher Data Products Inc of Camberly, Surrey — has established a reputation for high-quality intelligent terminals. The series 1 range of microcomputers is a newish departure for Cipher — "newish", because over recent years Cifer-watchers have noticed the intelligence of the terminals increasing to the point where the production of a Cifer stand-alone micro was obviously becoming inevitable.

To all intents and purposes this point was reached at the beginning of 1982 with the introduction of the 2780 range. Yet with up to 256K of internal RAM, not one but three Z-80 microprocessors, an independent graphics board and 12Mbyte hard disc running CP/M, the 2780s were still only very, very intelligent terminals as far as Cifer's marketing department was concerned.

This reluctance to call a spade a bloody shovel had a purpose. Marketing Manager Stuart Gregory and his team have no intention of being caught up in the rush to produce more and more, cheaper and cheaper standard general-purpose micros. According to them it is only a matter of months before the Japanese will be shipping take-away dual-floppy machines to retail at around £500. Having successfully applied the old Harvard Business School adage to stay clear of the competition, by producing its own brand of up-market, customisable product, Cifer has been plotting its overt entry into micros with a good deal of caution.

The machine Cifer is at last officially describing as a micro has identifiable Cifer qualities. It is well made, well designed, immensely flexible — and expensive. If this combination reminds you of a certain trans-atlantic duo who made their name in calculators, the comparison goes deeper yet. For the Series 1 comes in a size described in marketing circles a Executive Desktop. It's small. The same sort of size as, dare we say, the current desk-top machines from Messrs Hewlett and Packard.

To be precise the case stands only 25cm. high, and takes up just 45cm. by 40cm. of desk space, with an extra 45cm. by 24cm. for the slim, detachable keyboard. Inside these lilliputian confines the Series 1 is able to cram all the hardware of the enhanced 2780 series as well as a Teac soft-sectored mini-floppy drive with a formatted capacity of 800K.

This compression is achieved in two ways. Firstly the screen is smaller than Cifer users have come to expect at 10in. diagonally rather than 12in., making room for two drives to the right of the screen and saving an enormous amount of volume at the rear of the tube. Secondly the component to air-space ratio, generous in the 2600 range of terminals, is pushed very tight, though the filtered fan seems to cope



adequately with cooling. It would be foolish to jump to conclusions, but personally I would feel easier with more air in the box.

The logical architecture is profoundly different from the run-of-the-mill CP/M micro. The Series 1 is really more a unified local area network than a single-processor machine. You will not be far off if you think of it as four separate subsystems: a screen, central processor and core memory, graphics, and the disc system. Each is autonomous and intelligent and capable of communicating with any or all of the others by way of the IEEE-488 bus which links them. Managing communication along the bus is the responsibility of an internal operating system called Ciops. Ciops is the true resident operating systems, CP/M being loaded in on top of it as a visitor.

The fifth and very important element is the package of CP/M utilities developed in-house by Cifer. They are .Com files — often with explanatory .Doc files — that are identified by names preceded with &. Their presence helps to make the Series 1 a system rather than just another micro.


The manual that arrived with the machine, intended for OEM's and development houses, is a formidable three days had study. Readability is not helped by it being an update, complete with insert pages and emendations, of the documentation for the 2680 range of machines. Like other Cifer documentation is it printed in dense dot-matrix format that suggests the rough draft of a Russian novel.

Overcome this initial impression and you will find the manual intelligently sectionalised, with detailed discussions under clear subheadings followed by tabulated data in appendices for subsequent reference. Tables of contents precede the sections and a comprehensive index brings up the rear. One section provides an overview of the CP/M manuals and offers some useful tips. For example, the standard CP/M utility Ed.Com requires the insert command i to be keyed as lower case, otherwise all subsequent text will be written to disc as upper case, however it looks on the screen. This is not made clear in Digital Research's documentation, so Cifer provides the warning. Would that all CP/M computer manufacturers knew the CP/M software environment this well.

However well the contents stand up to scrutiny, in practice you need three hands to hold it open. The whole 3kg. of manual bulges out of the standard Cifer floppy cardboard cover, its uncountable and unnumbered pages held together with a twopenny wire clip. I give it three for presentation, nine for content and a big round zero for star quality.

The hardware itself is a quite different proposition. It looks, feels and even smells like a star. The keyboard has a slightly soft touch that spells luxury, but might take a little getting used to, particularly if you have been brought up on the IBM layout.

I object to the arrangement for repeating characters by way of a separate Repeat key,

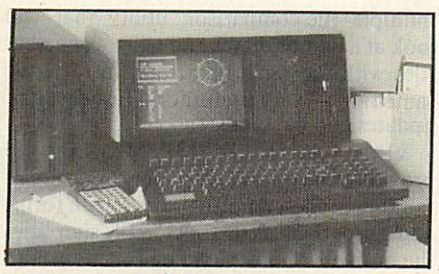

Some models include a 10Mbyte Winchester as well as floppies.

which is awkwardly placed between the right-hand Shift key and the Delete key, rather than just holding down any old character you want to machine-gun across the screen. There is a perfectly respectable reason why Cifer does it this way — it minimises the demands made on the central processor in multi-user environments — but if you are used to auto-repeat on every character key you will miss the facility. If you buy a Cifer, a separate repeat key is what you get, but keyboard design is important, at least until voice entry comes along and offices are filled with the sound operators shouting at their screens, trying to nudge cursors to the right position: "Left a bit, bit more, now down . . . "

On the positive side the Series 1 keyboard is very reconfigurable indeed. There are only three function keys as such, but the whole top row of 20 keys, dedicated to terminal functions like dumping to the printer, local screen editing, toggling graphics and so forth, can have alternative user functions downloaded into them, as can the right-hand numeric keypad and its associated cursor keys.

The display is a pale, rather acid green with clear, stable characters that are very easy on the eye, though the size of the screen struck users in this office as not really suitable for sustained use through the working day. Matters are not helped by a slight tendency for the image to jolt when the adjacent Winchester hard disc whirrs into action.

One very useful feature is the ability of the internal screen memory to hold seven screenfuls of text quite independently of the disc subsystem that drives it. You can scroll back and reread vanished data, or even edit it using the local edit keys and write it back to a file using Pip.

The screen allows several forms of highlighting: inverted, half-intensity, blinking, double-size, underlining and more; and these characteristics can be combined. For general use, in WordStar or the various CP/M Visiclones say, half-intensity in conjuction with inverted video makes a restful way of differentiating sections of the screen.

Additionally, protected fields may be set up that are immune to destruction by the cursor. Data-entry programs that call this feature will have to be specially written; ordinary commercial packages like DataStar have their own way of creating protected fields that do not depend on clever hardware.

Like the 2600 range of terminals — from which the Series 1's features are derived — the screen optionally displays an inverted, low-intensity 25th line that shows the status of the screen subsystem. It indicates such things as cursor position by row and column, data communication speed and protocol with the slave printer, whether the numeric keypad has been switched to its alternative function key mode, and so forth. Unlike the 2600 terminals the screen intensity can be changed through dialogue with the status line. A simple escape sequence directed at the screen is all that is necessary to dispose of this line, or replace it with a programmed message.

But this is only half the story as far as the screen is concerned because the physical display can also be driven simultaneously from the graphics board. Two games supplied to demonstrate this feature are downloaded from the disc system. The graphics is high resolution, smooth and fast, and can overlay pictures on the screen text quite independently from the disc subsystem.

The screen facilities are illustrated rather usefully by a Cifer program called &GClock, which sets and maintains a moving representation of an analogue clock-face. The intensity of the picture can be dimmed to background level and be left to tick away the seconds to the next coffee break while WordStar, directories or whatever go scrolling by.

The 256K of internal RAM on the main processor board presented somthing of a puzzle at first, as none of the software that came with the machine was able to access it. The documentation that arrived later explained all: Cifer has its sights on MP/M and CP/M 3, to be launched shortly by Digital Research as CP/M Plus.

Cifer's implementation of MP/M exists already, although we were not able to test it, and here the 256K of RAM is bank switched in 48K segments in the conventional way, with bank-identifying values being sent to a control port. In many respects the RAM behaves just as if it were so many separate S-100 boards. But the configuration is softer than this: a 256-by-eight static-RAM chip maps the memory area into 32 2K blocks, allowing software-changeable bank sizes and the possibility of write-protecting areas of memory.

There are five boards in all. A sandwiched pair comprise the disc subsystem that looks after the Teac and Rodime drives, and three other cards contain the screen system, the main CPU electronics and the graphics components.

There are a lot of chips — we counted 150 and then gave up. All those on the the main boards are socketed rather than soldered in, an expensive construction method adopted by manufacturers who take servicability seriously. I regard it as a mark of high-class merchandise. Other Cifer products show the same fondness for socketing.

The memories are state-of-the-art Texas

(continued on next page)

CIFER SERIES 1

(continued from previous page)

4164 64K RAMs. The top graphics and disc boards have eight of them each making 64K, and the main CPU board has an impressive four-by-eight array of them, providing 256K in all. Zilog or Zilog second-source peripheral chips — Darts, SIOs, PIOs and DMAs — are used extensively. They support internal data transfer and external transactions though the single IEEE-488 socket for an additional Winchester drive, and the four 25-way D-type connectors at the rear of the machine. One of these, rather confusingly, is actually a Centronics parallel interface; the remainder are regular RS-232.

A fifth rear socket allows extra floppy drives to be daisychained on. As the ability to mix'n'match a very large number of different disc formats is an important feature of the machine, Cifer supplied us with external 8in. slim-line drives housed in a handsome, long black box to supplement the single built-in 5.25in. drive.

Head size on the 8in. drives means that in single-density mode they are only able to read, not write, and there is the obvious physical limitation that the drives require the discs to be soft-sectored. But within these constraints, aided by a Cifer systems utility called &SDef, the machine can handle combinations of 20 different disc formats, including IBM-standard single-density 8in., Superbrain and Televideo.

By tweaking variables in the interface between CP/M and Ciops, &SDef not only alters the disc parameters, but can also juggle with the logical-to-physical mappings. It is up to you, for example, whether drive A: is the hard disc or one of the peripheral 8in. discs.

Two features seem to be missing, however. There is no way of splitting the hard disc into a pair of logical drives — much the best way to handle a 12Mbyte Winnie for most ordinary applications — and there appeared to be no possibility of addressing the same physical drives as different formats under different CP/M drive names. On some systems, for example, the same pair of 8in. drives can be A: and B: and look like standard single density, or be C: and D: in which case they become double density. Format change always has to be made explicitly by way of &Set.

&SDef is one of a number of Cifer utilities that help the user to tap the power of the machine's unusual features. Another is &Veri, a file-compare program that takes the names of two files that may or may not be the same and hex dumps them to the screen a record at a time with the non-matching bytes highlighted; &MVeri is a multiple file-comparison utility that will look at a pair of drives and tell you whether files with the same name are, in fact, the same files — very useful for a fast check of updates and back-ups.

&Eraq works like MP/M's Eraq to provide rapid query and response erasure of families of files. &Form draws screen forms and stores them as text files, &FK simplifies the business of downloading functions into the keyboard, and &Backup in conjunction with &Restore is a Winchester disc back-up utility that is capable of splitting large files between floppies and joining them together again if the back-up needs to be reloaded.

&Set works a little like Stat in its IOByte mode, establishing linkages between logical I/O devices and their physical implementations. But it goes a lot further than the ordinary CP/M utility in offering many more linkage options and fanning out linkages. The LPT: device, for example, becomes two or even three output ports simultaneously, and &Set can change input and output protocols.

&Format, as you might expect, initialises blank discs for use with the system, but turned out to have an odd bug. When formatting a disc in drive B: — the internal floppy in the configuration we were using — this drive became drives A: and B: on existing from the program, and the Winchester could only be accessed by rebooting.

With this minor exception all the foregoing programs worked as documented, but I was not so lucky with &Xfer, which is designed to manage the transfer of text files between machines. I just could not get it to do anything. Cifer says that &Xfer is in its early version, although it is perfectly possible that the problems encountered were hardware bugs in the external non-Cifer equipment, or just stupidity on my part.

Cifer is following a route parallel to Televideo's, from smart terminals to stand-alone micros, but its software department has clearly been keeping abreast of things. With these additional &*.Com utilities Cifer's implementation of CP/M matches the very high quality of the hardware.

To balance my enthusiasm for the product as a whole I should list a number of minor dislikes about the machine. To start with the most trivial, although booting up is very flexible — W to boot on the Winchester; 0,1,2, or 3 to boot on the floppy drives; an empty Return to seek a system on each of the drives in turn, and ? for a Help screen to explain the booting procedure — there is a silly inconsistency: the W requires a Carriage Return.

The excellent Rodime drives occasionally give out a bright chirruping sound that would be good news from a canary, but sound to anyone with an ear for machinery as if a bearing is about to burn out. It isn't and doesn't, in fact, and the sound soon goes away again. I've noticed the same effect in other Rodimes in other machines, and I suppose it's no more than resonance in the casing.

My biggest, though still minor objection is that the clever "operating system within an operating system" idea slugs Winchester disc access time. Subjectively it seems to be something like twice to three times as slow as I have become used to on an almost identical Rodime drive in the Almarc Series 8. Admittedly the Almarc machine does not allow the sophisticated route mapping of the Cipher, but I would be inclined to trade speed for sophistication for the applications, which are mostly text manipulation, that go on in this office.

A partial answer is provided by Cifer in the shape of a number of alternative CP/M implementations of various sizes and smartnesses, offered as Sysgenable files. Only one of these smaller and faster alternatives supports the Winchester. It offers a 53.75K TPA as opposed to the 50.75K TPA of the full CP/M version, but sacrifices the ability to switch the disc formats or alter the external port baud rate. It also eliminates the Centronics port, and is still noticeably slower than the uncluttered Almarc implementation. But if you are used to floppies the Cipher is still very fast.

Conclusions

- **This computer is a very compact and extremely comprehensive eight-bit machine. The screen size is probably too small for day-long work, but outputs are provided to other terminals or to a video display.**
- **It comes with CP/M in several sizes, offering access to a great deal of commercial software. But essentially CP/M acts as the outer shell to the hardware-dependent Ciops operating system with some overhead in speed of execution.**
- **The provision to read and write to a variety of different disc formats makes it a useful machine for software houses. Unfortunately the configuration we tested was not able to write to 8in. discs in single-density format.**
- **It is made in the U.K. and Cifer is in a position to offer excellent support.**
- **The Cifer Series 1 is a beautifully made, beautifully designed eight-bit machine.**
- **For information contact Cipher Systems. Telephone: Bath (0225) 706361.**

Series 1 systems

Model 1886: two 5.25in. floppies, 64K RAM, CP/M 2.2, price £2,795.

Model 1887: one 5.25in floppy, one 10Mbyte Winchester, 128K RAM, CP/M 3, IEEE-488 interface, price £4,995.


Model 1888: three 5.25in floppies, 64K RAM, CP/M 2.2, price £3,245.

Model 1889: as model 1887 with one extra floppy, price £5,395.

High-resolution graphics, extra RAM, MC-68000 processor, 21Mbyte Winchester, MP/M and Unix are all available as options at extra cost.

APPLE IIe

The old workhorse lives on in a new incarnation. Roger Cullis put it through its paces.

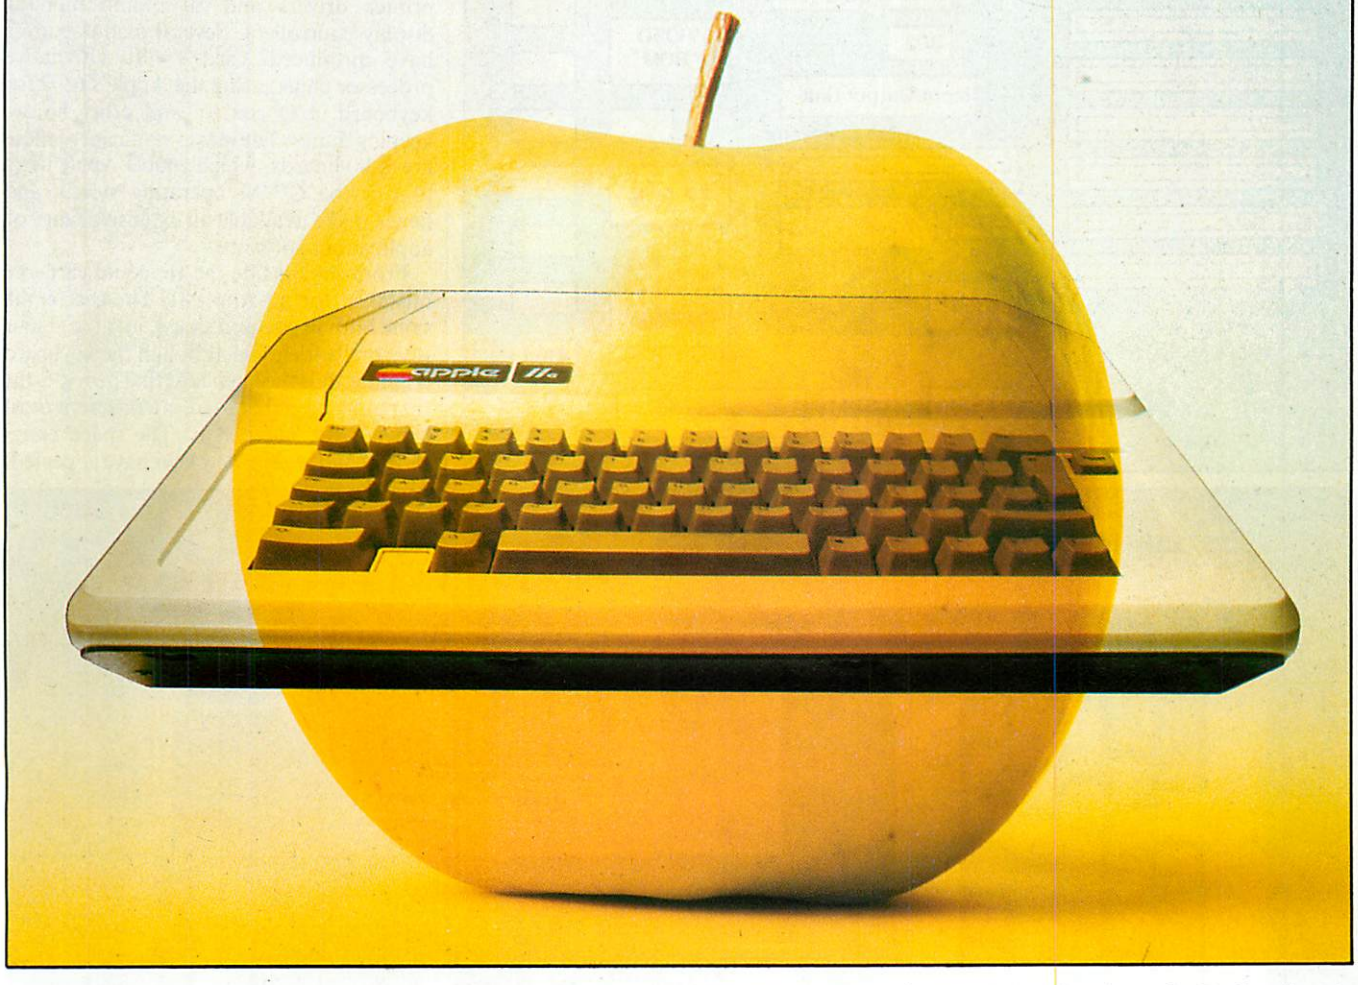

DURING THE LAST year or so manufacturers have used developments in microcomputing technology to give us more powerful machines at the same price as a standard eight-bit, 64K computer. The ACT Sirius and the IBM Personal Computer and all its look-alikes, have been made possible by increased packing density and the increased complexity of chips. Apple, instead of jumping on the 16-bit bandwagon, has applied the improvements to a well-tried and successful formula. The result is the Apple IIe, best described as a state-of-the-art Apple II.

Over half-a-million sales demonstrate that Apple got it right the first time. The product spawned a whole satellite industry engaged in manufacturing peripherals and writing software for every conceivable application. Apple has proved convincingly that software sells hardware and will also sell peripheral hardware designed for special purposes. With a ready-made base of applications packages there was no reason to break new ground.

It is apparent that Apple has gone to great lengths to ensure that the new computer is compatible with its predecessor, even to the extent of perpetuating hardware compromises which are a legacy from the days when 4K RAM chips cost as much as 64K chips do now.


Apple has drastically reduced the number of chips, a factor which will both increase reliability and ultimately permit a significant reduction in the selling price. New features such as built-in diagnostics, lower-case text and extra cursor controls make the IIe even more attractive to the business user.

For the uninitiated, the Apple II is an eight-bit microcomputer based on the 6502 processor chip, which has a 64K addressing capability. It was originally launched in 1977 with a rather limited integer Basic interpreter. Subsequently it was replaced by Applesoft, a floating-point Basic written by Microsoft. Versions of the computer with Applesoft resident in ROM were known as the Apple II Plus. Since then there has been a whole range of internal revisions, transparent to the user as they do not affect his software.

A 16K RAM card means that additional RAM, mapped into the address space occupied by the interpreter ROM, permits an additional language to be loaded from disc. An alternative Basic to that present in ROM is provided as standard on the Systems Master Disc, but other languages such as UCSD-p and Fortran are also available.

A feature of the motherboard is the provision of a number of 50-way printed-circuit edge-connector sockets for expansion cards. The first available cards were produced by Apple and added disc controllers and serial/parallel interfaces. Independent manufacturers quickly devel-

(continued on next page)

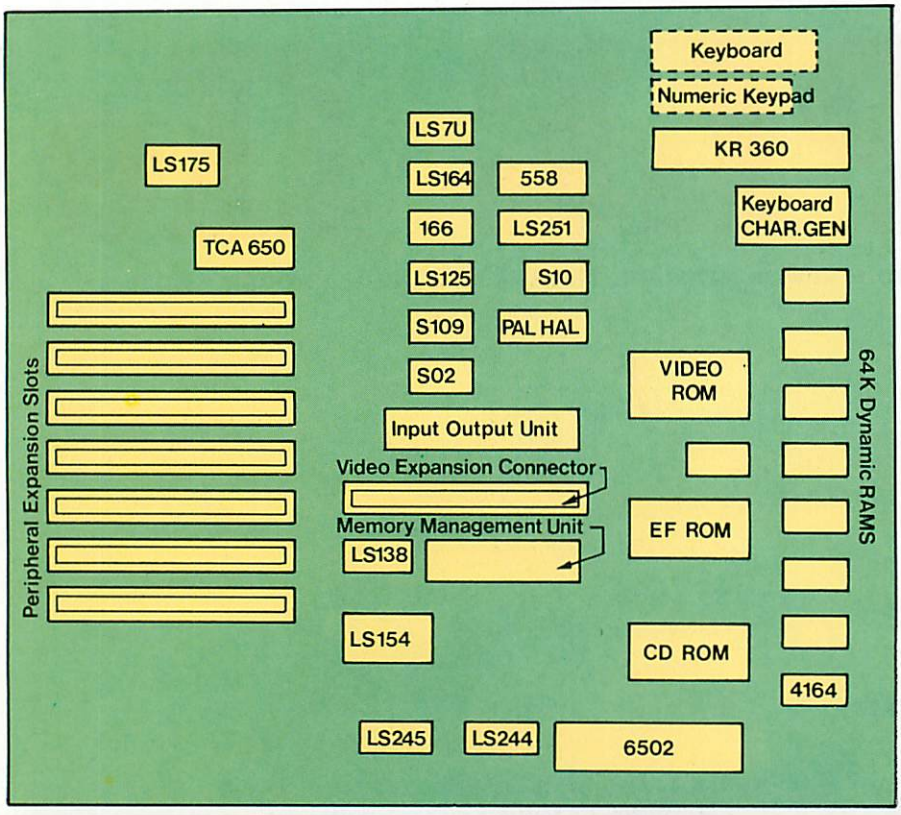


APPLE

(continued from previous page)

oped other devices — ranging from the esoteric exemplified by the Mountain Hardware Supertalker, the Heuristics Speech Recognition Card and the Alpha Syntauri synthesiser, to more general applications including Modems, buffered printer drivers and 80-column monitor display controllers. Several manufacturers have produced cards with alternative processor chips, using the Apple's 6502 for keyboard, I/O control and other housekeeping duties. The most significant of these are Z-80 boards, which enable Apple users to run the CP/M operating system and hence make available an extensive range of applications software.

From the outside the IIe could easily be mistaken for an Apple II. The case is the same both in size and shape, and the colour is virtually identical although the keyboard is lighter. It is the keyboard that provides the first indication that there is a different beast beneath the outer skin. The space bar is shorter and several new keys have appeared.

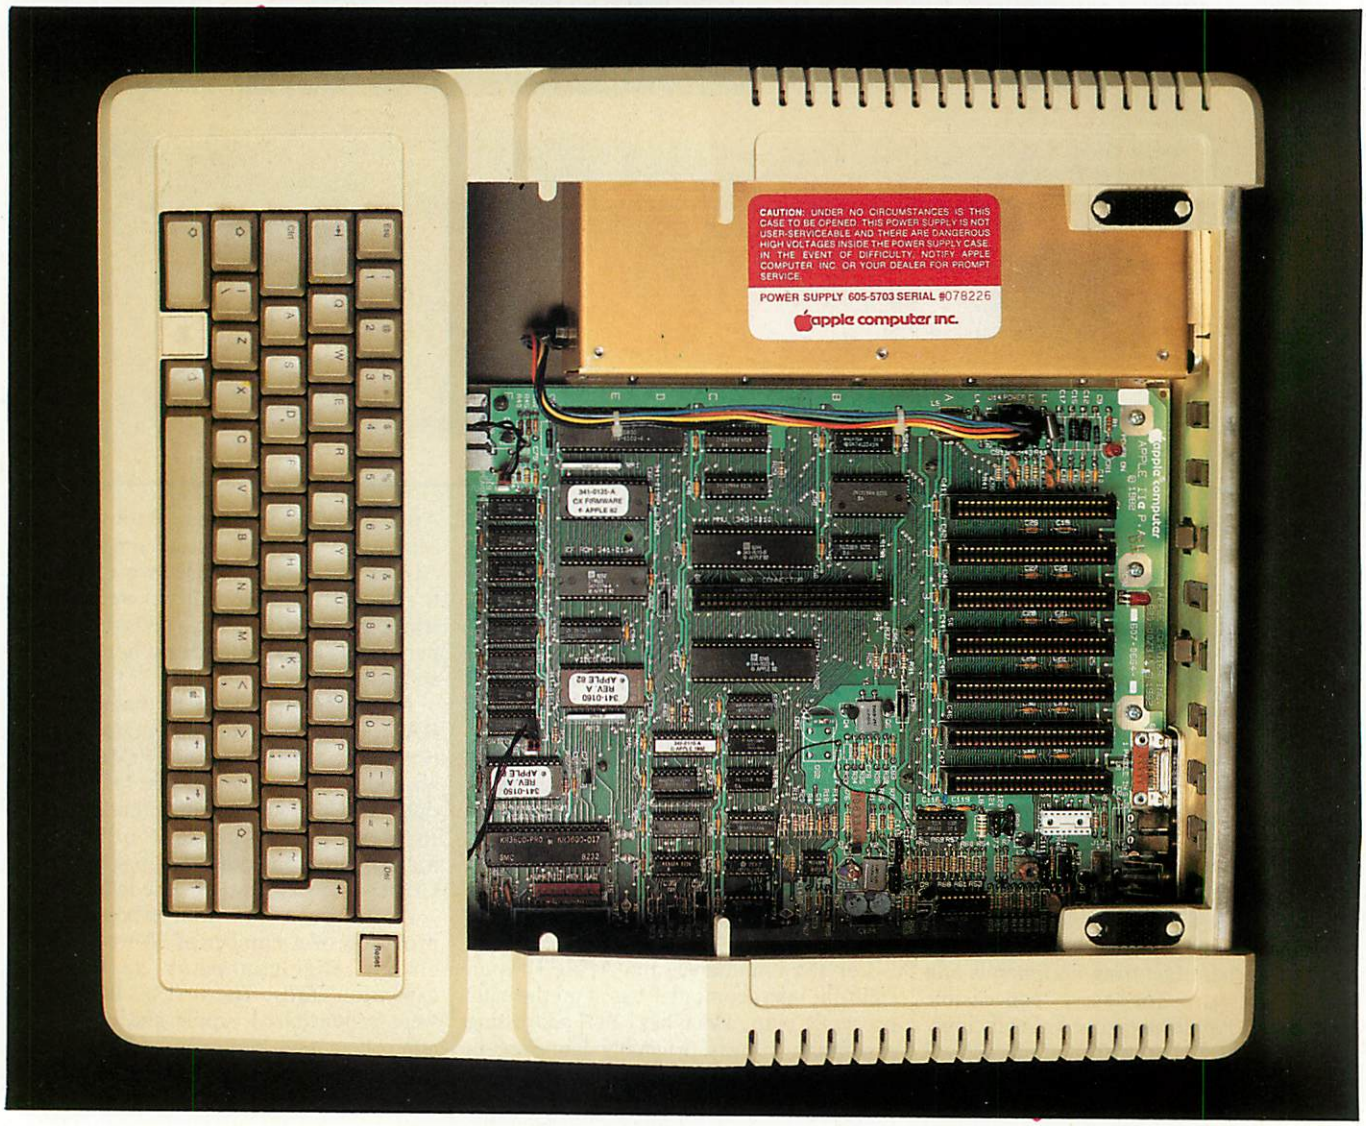

These perform mainly conventional functions such as Delete and Tab or provide ASCII characters like | and [, which were not present on the original Apple II, but two are unique.

At each end of a shortened space bar is a special key, the one on the left bearing an outline Apple symbol and the one on the right a filled apple. These keys are connected to one-bit game inputs and can be used as conventional games controls, say, to fire laser cannons or more mundanely in a custom graphics program to switch to an alternative mode, or make a back-up copy of a high-resolution screen.

When used in conjunction with the Control and Reset keys the open apple initiates a cold boot; the closed Apple starts a self-test using built-in diagnostics routines. If everything is functioning satisfactorily it responds with the message "Memory OK". During the cold boot routine the IIe carries out a partial memory wipe, a feature which has been introduced because many software vendors used it to protect programs run on the II Plus.

Cursor up and down keys have been added, although the Escape commands which perform those functions on the II Plus may still be implemented. The Apple II is gradually accumulating a proliferation of ways of moving the cursor, since the II Plus in turn had inherited four Escape commands for this purpose from the original II.

The Reset key has been moved to a less vulnerable position slightly away from the main bank of keys. It is lower and must be used in conjunction with the Control key to perform a warm boot, in contrast with the original Apple II where Reset could be, and frequently was, operated accidentally. In the later revisions of the II Plus the dual-key operation was an option selected by a switch on the keyboard encoder printed-circuit card.

Apart from the provision of additional characters many of the ancillary symbols have been moved. For example, the inverted commas and the apostrophe have deserted the 2 and the 7 and have joined forces on a new key next to Return, while the & is now to be found above the 7 instead of the 6. It will provide no difficulty for new users or those accustomed to the ISO standard keyboard layout, but owners of the II or II Plus will have to stop and think when they are using a IIe.

Although it is not difficult to make the change there may be mis-keying problems when the IIe is installed beside the old machine. Ergonomically it would be better if the IIe were a different colour, to provide a visual stimulus when changing from one to the other.

Apple could have made more use of the switch which it thoughtfully installed on the underside of the case for selecting the ISO standard or an alternative national keyboard. To cater for the requirements of different languages, there are some 22 different arrangements of the keys, the corresponding character set being defined by a ROM on the motherboard. It would presumably be a relatively simple matter to emulate the layout of the II Plus as the alternative character set.

The Repeat key has disappeared. All of the keys now have auto-repeat — a welcome improvement.

The previous Apple had a random array of ribbon cables, which meandered from cards in the expansion slots, through slits in the back of the case, to devices such as disc drives and printers which were in separate boxes. Moving the computer was an exercise in logistics, often requiring the removal of peripheral cards. Apart from the damage which could be sustained by the card, particularly those containing MOS chips, frequent removal and insertion of the cards sometimes causes hairline cracks in the motherboard printed circuit — with obvious results.

The IIe has overcome the problem with a new sheet-metal back punched with holes ready to take Cannon D-type and other connector sockets. Peripherals can now be plugged in at will using a robust sheathed cable. If a more permanent connection is desired it can be held in place with retaining screws, which prevent accidental displacement.

On opening the lid the first impression is one of emptiness. The motherboard indicates the changes in semiconductor device technology since the II was first launched. Although with 89 capacitors, six transistors and 43 resistors the discrete component count has not been changed unduly, a mere 40 integrated circuits have replaced the 85 or so chips on the old motherboard.

Nowadays memories are made of 64Kbit or larger dynamic RAMs, so the equivalent of an Apple II motherboard RAM and a 16Kbyte language card is to be found in the eight chips at the bottom edge of the printed circuit. Gone, too, are the D0, D8, E0, E8, F0 and F8 ROM which have been with us in various forms since the beginning.

In their place are three large 2364 ROM chips: the Memory Management Unit or MMU; the Input/Output Unit or IOU — no cracks about cycle stealing please; and Programmed Array Logic or PAL — not to be confused with the European standard colour TV circuits which are elsewhere; and two smaller ones, the keyboard decoder and the character generator. For the decoder a 2316 suffices, but for the character generator a 2332 has been chosen to permit straight-through bit-mapping for the graphics modes, but avoiding the need for additional switching circuitry.

The keyboard has no piggyback encoder PCB, but is connected directly to the motherboard via a ribbon cable and 25-way connector. A useful new feature is provision for the connection of a numeric keypad, an optional extra. With a basic microcomputer like the IIe, this increases the flexibility of the machine and is in keeping with the modular approach which Apple has adopted. Here it is particularly convenient because the keypad can be customised for a specific application, such as VisiCalc or word processing.

It is even feasible to plug in different keypads on different occasions, and we may expect to see peripheral suppliers including a keypad as well as a disc and expansion card with their applications packages. Full upper and lower case are present, but the Apple II can be emulated using the Caps Lock key.

The other internal change which is immediately apparent is the translation of slot 0 to a different position. In the process it has gained an extra 10 connections and has been renamed the video expansion connector. Slot 0 was the traditional home of the Apple language card, but since in the IIe the extra 16K is now provided in the motherboard RAM, its main purpose has disappeared.

Apple has made provision for an 80-column display by launching a new 80-column text card and an extended 80-column text card, either of which plugs into the video expansion connector. The two

(continued on next page)

Specification

Microprocessor: 6502A eight-bit data, 16-bit address bus
Operating system: Apple DOS 3.3
Memory; 64K dynamic RAM, 16K bank-switched with ROM
16K ROM
additional 1K RAM with 80-column card
additional 64K RAM with extended 80-column card
Disc storage: single-sided, soft-sectored 143K per disc
two drive-controller card plugs into expansion slot.
Keyboard:
ISO standard with 63 keys
optional plug-in keypad
Display:
40 character x 24 lines text
80 character x 24 lines text with 80-column card
40 x 48 pixel 16-colour low-resolution graphics.
192 x 280 pixel six-colour high-resolution graphics
192 x 560 pixel six-colour high-resolution graphics with optional 80-column card
Dimensions: height × width × depth
100 × 385 × 450 mm
Prices:
Apple IIe with 64K RAM, £845
80-column card, £80
extended 80-column card, £180
disc drive with controller card, £345
dot-matrix printer, £425
daisywheel printer, £1,350

APPLE

(continued from previous page)

cards simply add 80-column text display and, unlike existing pripheral cards such as the Screen-Master 80 or the Comms-Master 4880 which plug into slot 3, do not support high-resolution graphics or terminal emulation.

When either of the 80-column cards is installed in the video expansion connector, it is not possible to use a peripheral card with on-board firmware in slot 3. In 80-column operation a high-resolution monitor with at least 14MHz bandwidth is needed to achieve a satisfactory performance; otherwise it functions in a similar manner to the 40-column text mode. Upper and lower cases in normal and inverse modes are available, but flashing characters are not implemented.

The IIe carries a Pal encoder together with a colour killer switch on the motherboard, which produces an unmodulated signal. To drive a television receiver it will be necessary to use an interface such as the Digitek modulator card, which can be mounted in slot 7 or adjacent to the keyboard ribbon-cable connector.

To achieve software compatibility the organisation of the IIe is very similar to its predecessor, even to the extent of adopting the same idiosyncratic memory map with the high-resolution screen buffers positioned in the middle of the user program space. The processor is a 6502A, clocked at the same rate as the 6502 of the II and II Plus. With an unchanged Applesoft interpreter the performance is identical, as the benchmark comparisons with the latest revision of the II Plus show. The differences lie within the tolerance variations to be expected in the clock crystals of individual machines.

The Monitor ROM has been completely rewritten, but the starting addresses of all the routines remain the same. It means that Basic and machine-code programs for the Apple II, which reference the monitor, will run satisfactorily on the IIe provided that they call the starting address of the sub-routine. But if they jump to an address within the subroutine they will crash.

Provision of 80-column display capability carries with it the need to double the size of the text buffer, because the amount of information displayed on the screen is twice that of the 40-column mode. In the new 80-column card it is achieved by the provision of an auxiliary 1K RAM on the card. The extra RAM is mapped into the same address space, $400 to $7FF, as the existing text buffer Page 1, and is referred to as Text Buffer 1X — the necessary switching of the display being carried out by the MMU. If the relevant soft switch is toggled the 80-column display mode remains, but every other character disappears from the screen.


The extended 80-column card carries a complete 64K of additional RAM, which is mapped into the entire address space of the 6502. It provides a complete parallel memory which can be substituted for the main memory by soft switches in the I/O block, $C000 to $CFFF.

With the extended 80-column card it is possible to define an enhanced horizontal-resolution 560-dot high-resolution graphics mode. It uses an auxiliary high-resolution graphics buffer Page IX mapped into $2000 to $3FFF in the auxiliary memory. Current DOS 3.3 and Applesoft do not support this mode — therefore it can only be used at present by machine-code programs.

For switching purposes, the memory map is divided into one small section and two large sections — stack and Page 0, $0 to $1FF; normal 48K RAM, $200 to $BFFF; and bank-switched memory, $D000 to $FFFF. As with current RAM cards, addresses $D000 to $FFFF support 16K banks of RAM. Two 4K sub-banks are mapped into $D000 to $DFFF and read- and write-enabled by soft switches.

As with the II Plus, In/Out functions are controlled by soft switches in the space $C000 to $C07F, but with the IIe certain addresses serve more than one purpose. It is important to distinguish between Read- and Write operations as the effect will be different. Expansion slots have their own dedicated addresses in the ranges $C080 to $C7FF and share the region $C800 to $CFFF.

The existence of two completely parallel sets of memory offers interesting

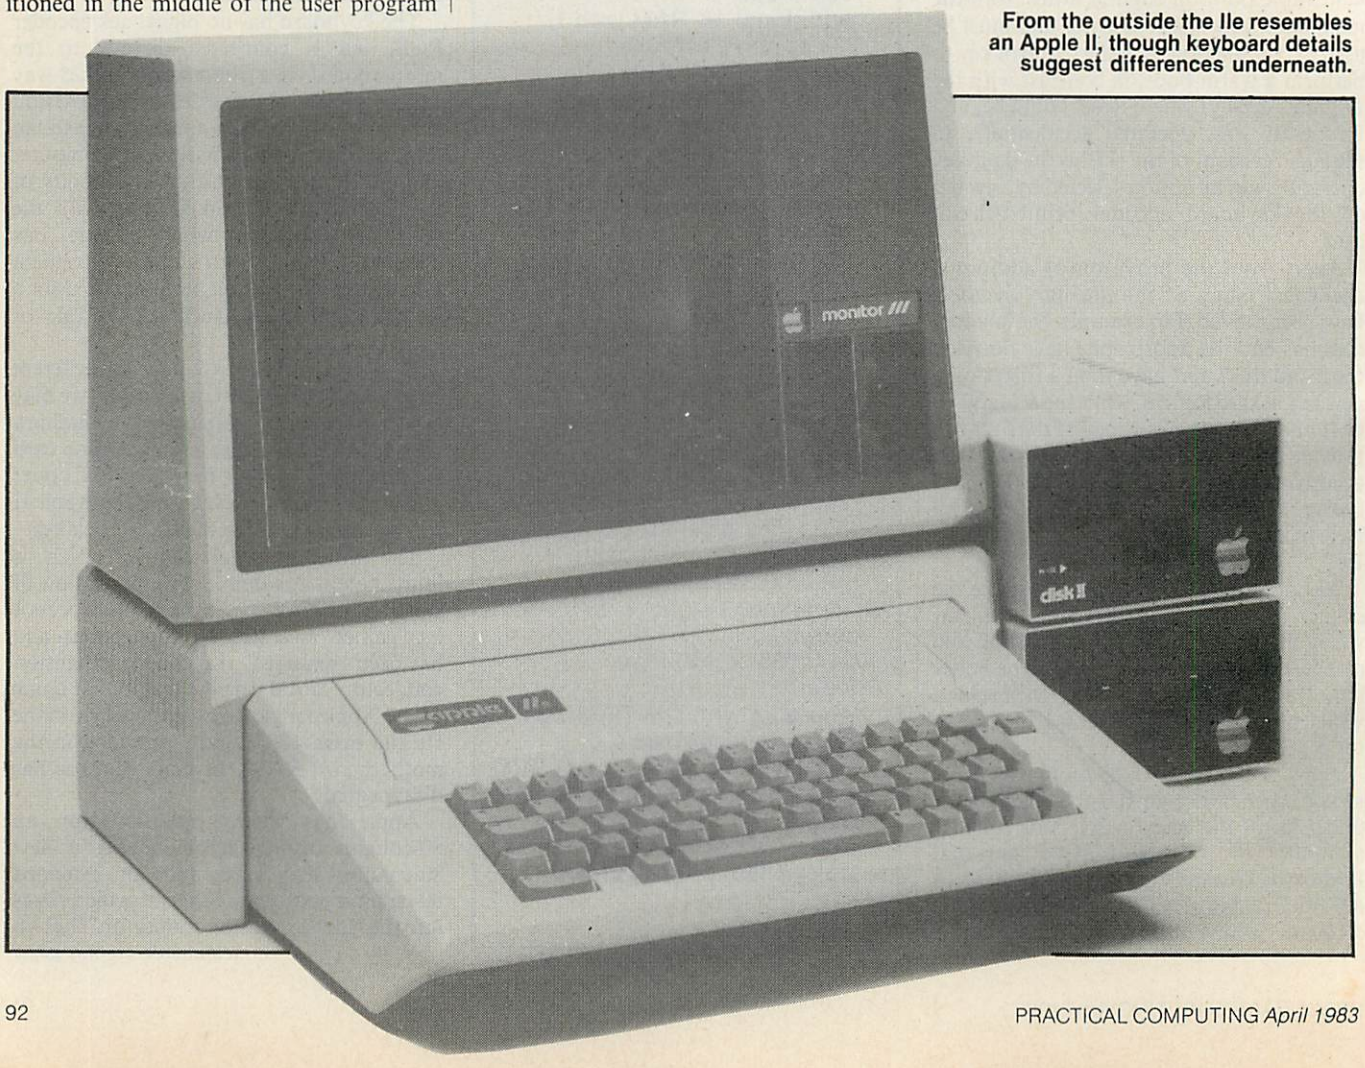

From the outside the IIe resembles an Apple II, though keyboard details suggest differences underneath.

possibilities for modular programming, but will have to be approached with great caution to ensure that the correct program segments are associated with the correct page 0 and stack. Routines have been provided in the new monitor to move blocks between main and auxiliary memory, and to transfer program control at the appropriate time.

It has only been possible to perform superficial tests on software and peripheral devices. Pascal and CP/M run on the IIe as do a number of major machine-code packages such as VisiCalc. Applewriter II has been re written to accommodate the new 80-column cards, but the existing version works satisfactorily in 40-column mode, or with 80-column cards produced by other vendors when used in conjunction with a pre-boot disc.

VisiCalc takes advantage of the extra on-board memory to permit the construction of larger models. It also works equally well with a variety of other RAM cards, including 128K cards which take their refresh from the motherboard by plugging a ribbon cable into a socket previously occupied by a RAM chip. Apple has also introduced a special version of the multiplan spreadsheet for the IIe.

Conventional Applesoft programs function in exactly the same way as on the Apple II Plus and so do Speed Star compiled programs. Bit copiers such as Nibbles Away II work normally and I ran a program using UBI, universal boot initialiser, which is a non-standard fast-booting DOS. Graphics programs, both in Applesoft and machine code performed in a satisfactory way.

Turning to hardware, I drove an Epson MX-100 printer through a Super Printmaster III parallel interface card in text and graphics modes. A Screen-master 80-column card worked normally in slot 3 using 40- and 80-column text modes and high- and low-resolution graphics modes. A Z-80 Softcard booted up CP/M, but shortage of time prevented thorough exercising. The Double-Time printer which uses a special monitor ROM requires a firmware fix.


With the launch of the IIe Apple has re-evaluated the needs of its customers, whom it has encapsulated in the aphorism "The end-user is now at a lower level of understanding". As a result it will follow the lead of one of the independent peripheral-device manufacturers and supply a four-disc training pack and a single owner's manual, in place of the array of technical manuals which accompany the II Plus. The detailed manuals, which have in the past been one of Apple's great strengths, will be available as an extra. Since in the vast majority of cases users only read the instruction manual if all else fails, this approach will greatly simplify the instruction process.

Conclusions


● The Apple IIe is simply an Apple II with updated semiconductor technology. Existing users will be pleased to know that current software and accessories will function equally successfully on the new machine.

● It is clearly aimed at the bottom end of the business market, but at £845 its price includes a substantial premium for the software base. Although machines with an equivalent or better specification are available at less than half the price, without proven applications packages they are of value only to the computer enthusiast, for entertainment or educational purposes.


● Despite the fact that the basic design is now six years old and creaking at the seams — the first Apple IIs were shipped in June 1977 — the existence of countless firms writing software and manufacturing peripheral devices for specialist applications will ensure that the IIe is a best seller.

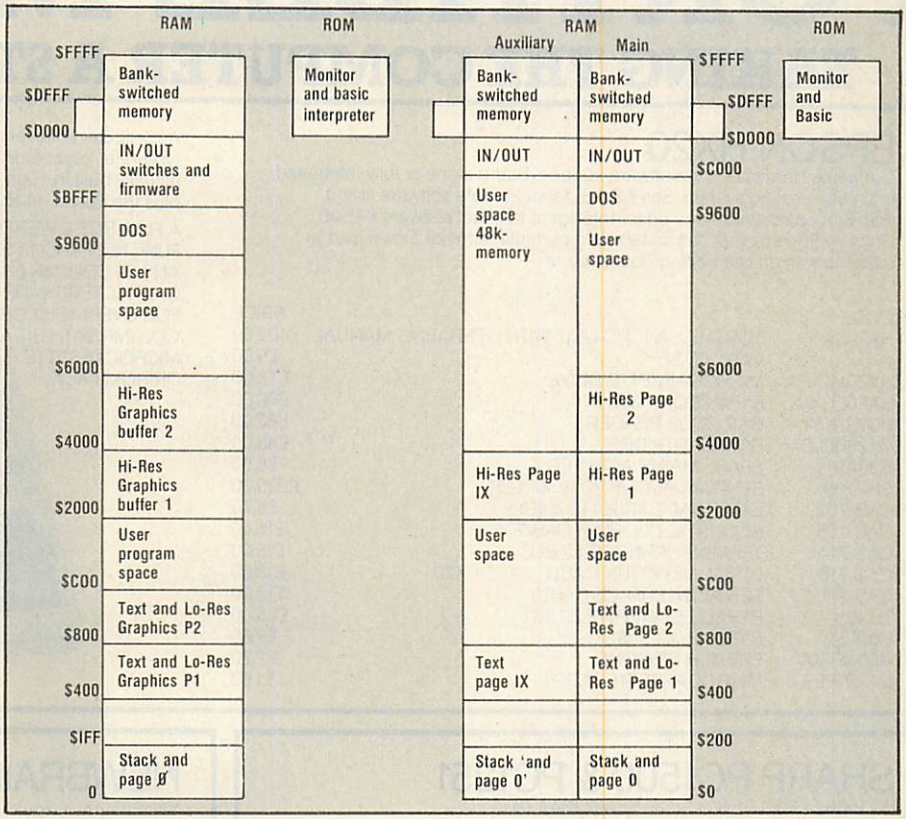

The IIe has an entirely different memory structure (right) from its predecessor (left).

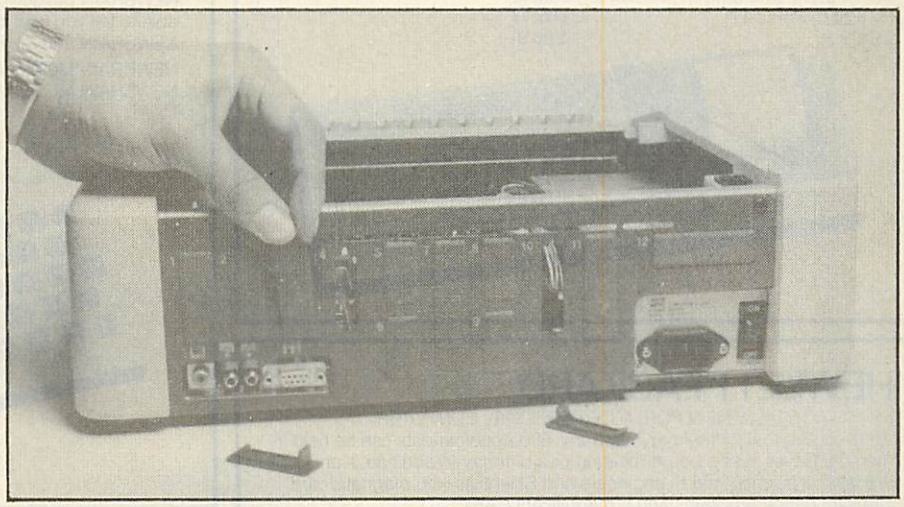

Holes punched in the back of the case can be fitted with connector sockets.

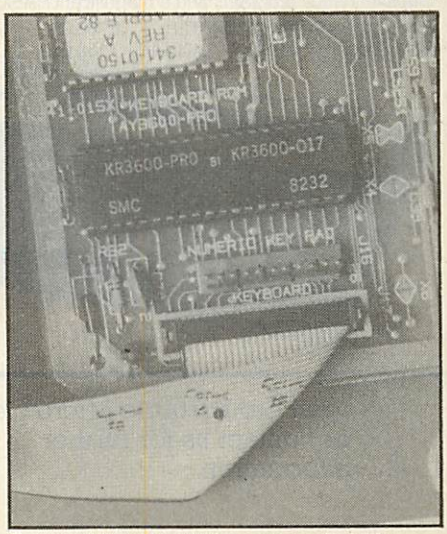

Fewer chips should increase reliability and, ultimately, reduce price.

PORTABLE MICROS

TAKING THE COMPUTER A STEP FURTHER

EPSON HX20

Complete Hardware and software support. Stand alone or fully integrated into your existing system. Send S.A.E. for up to date software listing. Transam communications-editor-intelligent terminal software £45.00. Links HX20 into other computers as a portable terminal. Down load to cassette with off line editing/data capture.

CODE		PRICE
HX20UA	PORTABLE MICRO UNIT WITH OPERATING MANUAL	£402.00
	VINYL CASE	£9.00
HX20MC-SA	MICROCASSETTE DRIVE	£75.00
HX20EU-SA	EXPANSION UNIT	£80.00
H00BR-JA	BAR CODE READER	£82.00
HX20RC-SA	ROM CARTRIDGE	£45.00
H00AAU	SPARE MAINS ADAPTER	£8.50
SHX700	SENDATA ACOUSTIC COUPLER	£220.00
CAB 702	EXTERNAL CASSETTE CABLE	£5.70
CAB 705	ACOUSTIC COUPLER CABLE	£15.00
CAB 714	TERMINAL PRINTER CABLE	£15.00
CAB 716	LOCAL NETWORK CABLE HX20/HX20	£15.00
CAB 717	SERIAL INTERFACE CABLE	£15.00
THX01	PARALLEL INTERFACE UNIT	£85.00
H00RP	PAPER ROLLS (5)	£2.60
H00CR-RA	PRINTER RIBBONS	£2.20
MC-TAPES	MICROCASSETTE TAPES	£1.60

A computer small enough to fit into a briefcase yet with a full size typewriter keyboard, LCD virtual screen, printer and microcassette facility actually built in. High speed serial communication with other computers plus the Epson reliability – a world beater.

A FULL SIZE QWERTY KEYBOARD WITH 68 KEYS INCLUDING 5 FUNCTION AND 13 SPECIAL KEYS. LCD DISPLAY WINDOW SHOWING ANY 20 COLUMN BY 4 LINE PART OF A VIRTUAL SCREEN UP TO 255 CHARACTERS WIDE. 50 HOURS BATTERY LIFE WITH MAINS ADAPTER FOR OVERNIGHT CHARGING. BUILT IN PRINTER 5 x 7 MATRIX, 24 COLUMN WITH BIT ADDRESSABLE GRAPHICS. OPTIONAL BUILT IN MICROCASSETTE OR ROM PACK.



SHARP PC1500 & PC1251

PC 1500 COMPUTER	£147.78
CE150 PRINTER/TAPE INTERFACE	£130.39
CE155 8K RAM MEMORY MODULE	£69.52
PC1251 COMPUTER	£65.17
CE128	£86.91



NEWBRAIN

You thought it would never arrive, but here it is with all those promises fulfilled. We never appreciated the full computing potential of the NEWBRAIN but suffice to say, it's a machine with a great future. We'll be able to tell you how to fully utilize the considerable power of the NEWBRAIN and take advantage of all that CP/M software.

NEWBRAIN MODEL A	£234.00
NEWBRAIN MODEL AD	£260.00



HEWLETT PACKARD

HP75C A TOTALLY NEW PORTABLE PERSONAL COMPUTER
An executive tool for the man in a hurry. 600 appointments can be held in memory. Never miss a board meeting or a birthday. In addition, – an impressive scientific aid to engineers and Scientists with magnetic card strips for handy programs and a magnificent BASIC.

HP75C PORTABLE COMPUTER	£768.00
HP-82700A 8K MEMORY MODULE	£150.00



COMPUTER SYSTEMS AND SOFTWARE PRODUCTS GUIDE

Please send S.A.E. for our price list giving full details of our Portables and CP/M Systems and Software. We stock a very comprehensive range of hardware and peripherals, all at competitive prices!

AVAILABLE NOW!

Visit our Portable Micro Centre or contact us for further information.

Transam
Microsystems Limited

Telephone and mail orders accepted on Barclaycard or Access
All prices exclude carriage and VAT

59/61 Theobald's Rd. London WC1X 8SF. Tel: 01-405 5240/2113. Telex: 24224 (Ref. 1422).

For full proposed range of Portable Computers and typewriters, including the Osborne, Kaypro II, Teleram, Panasonic, Toshiba, and NEC please contact us for price and availability. Not all items are yet in production so it is best to telephone for delivery details.

● Circle No. 162

possibilities for modular programming, but will have to be approached with great caution to ensure that the correct program segments are associated with the correct page 0 and stack. Routines have been provided in the new monitor to move blocks between main and auxiliary memory, and to transfer program control at the appropriate time.

It has only been possible to perform superficial tests on software and peripheral devices. Pascal and CP/M run on the IIe as do a number of major machine-code packages such as VisiCalc. Applewriter II has been re written to accommodate the new 80-column cards, but the existing version works satisfactorily in 40-column mode, or with 80-column cards produced by other vendors when used in conjunction with a pre-boot disc.

VisiCalc takes advantage of the extra on-board memory to permit the construction of larger models. It also works equally well with a variety of other RAM cards, including 128K cards which take their refresh from the motherboard by plugging a ribbon cable into a socket previously occupied by a RAM chip. Apple has also introduced a special version of the multiplan spreadsheet for the IIe.

Conventional Applesoft programs function in exactly the same way as on the Apple II Plus and so do Speed Star compiled programs. Bit copiers such as Nibbles Away II work normally and I ran a program using UBI, universal boot initialiser, which is a non-standard fast-booting DOS. Graphics programs, both in Applesoft and machine code performed in a satisfactory way.

Turning to hardware, I drove an Epson MX-100 printer through a Super Printmaster III parallel interface card in text and graphics modes. A Screen-master 80-column card worked normally in slot 3 using 40- and 80-column text modes and high- and low-resolution graphics modes. A Z-80 Softcard booted up CP/M, but shortage of time prevented thorough exercising. The Double-Time printer which uses a special monitor ROM requires a firmware fix.


With the launch of the IIe Apple has re-evaluated the needs of its customers, whom it has encapsulated in the aphorism "The end-user is now at a lower level of understanding". As a result it will follow the lead of one of the independent peripheral-device manufacturers and supply a four-disc training pack and a single owner's manual, in place of the array of technical manuals which accompany the II Plus. The detailed manuals, which have in the past been one of Apple's great strengths, will be available as an extra. Since in the vast majority of cases users only read the instruction manual if all else fails, this approach will greatly simplify the instruction process.

Conclusions


● The Apple IIe is simply an Apple II with updated semiconductor technology. Existing users will be pleased to know that current software and accessories will function equally successfully on the new machine.

● It is clearly aimed at the bottom end of the business market, but at £845 its price includes a substantial premium for the software base. Although machines with an equivalent or better specification are available at less than half the price, without proven applications packages they are of value only to the computer enthusiast, for entertainment or educational purposes.


● Despite the fact that the basic design is now six years old and creaking at the seams — the first Apple IIs were shipped in June 1977 — the existence of countless firms writing software and manufacturing peripheral devices for specialist applications will ensure that the IIe is a best seller. ◻

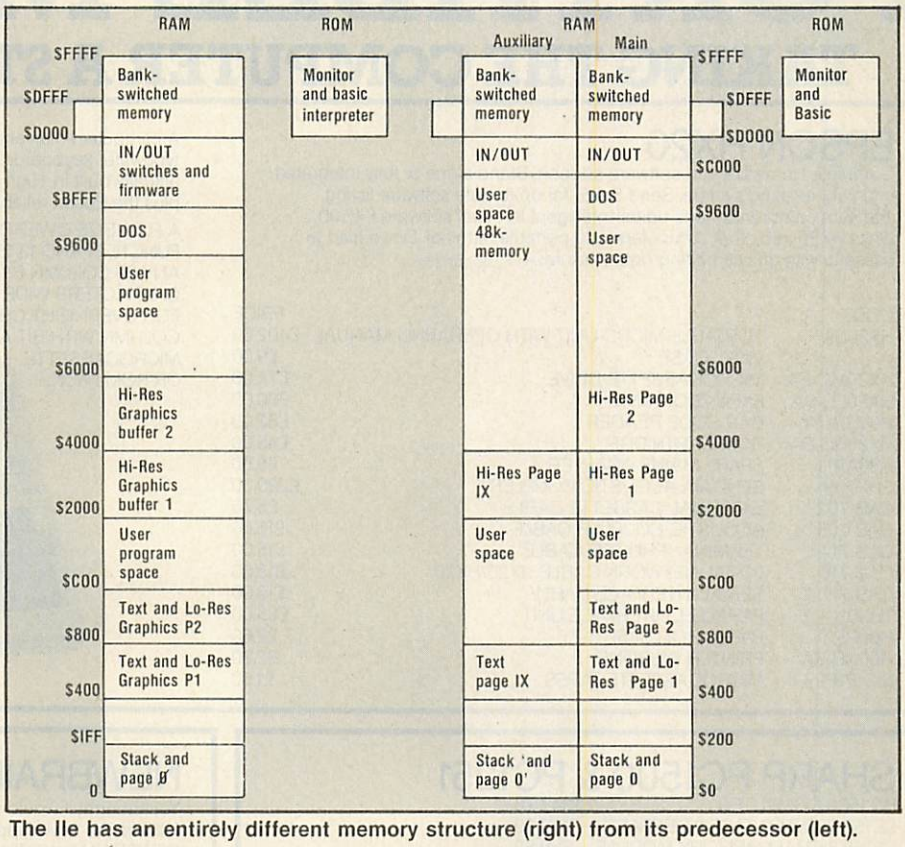

The IIe has an entirely different memory structure (right) from its predecessor (left).

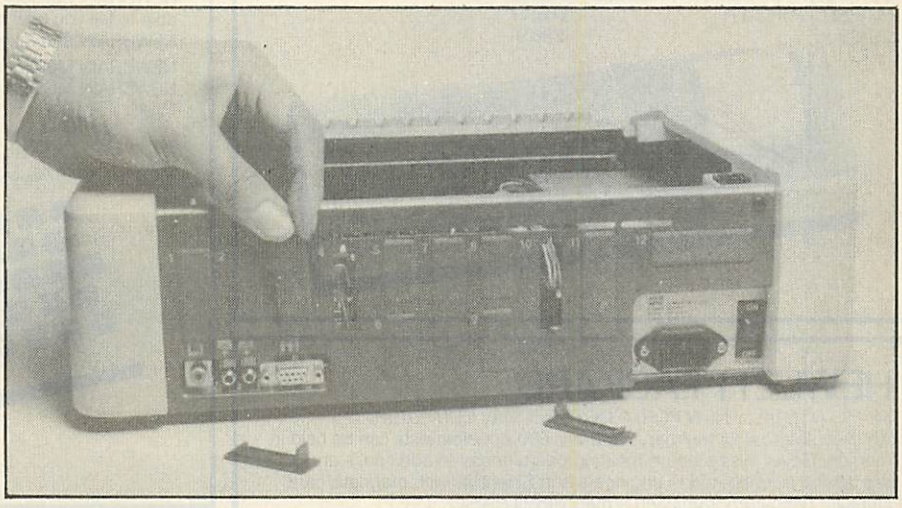

Holes punched in the back of the case can be fitted with connector sockets.

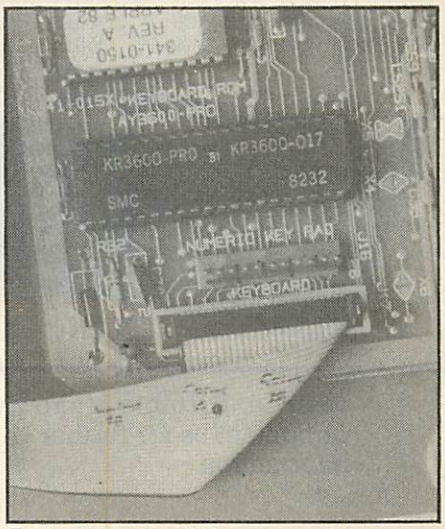

Fewer chips should increase reliability and, ultimately, reduce price.

PORTABLE MICROS

TAKING THE COMPUTER A STEP FURTHER

EPSON HX20

Complete Hardware and software support. Stand alone or fully integrated into your existing system. Send S.A.E. for up to date software listing. Transam communications-editor-intelligent terminal software £45.00. Links HX20 into other computers as a portable terminal. Down load to cassette with off line editing/data capture.

CODE		PRICE
HX20UA	PORTABLE MICRO UNIT WITH OPERATING MANUAL	£402.00
	VINYL CASE	£9.00
HX20MC-SA	MICROCASSETTE DRIVE	£75.00
HX20EU-SA	EXPANSION UNIT	£80.00
H00BR-JA	BAR CODE READER	£82.00
HX20RC-SA	ROM CARTRIDGE	£45.00
H00AAU	SPARE MAINS ADAPTER	£8.50
SHX700	SENDATA ACOUSTIC COUPLER	£220.00
CAB 702	EXTERNAL CASSETTE CABLE	£5.70
CAB 705	ACOUSTIC COUPLER CABLE	£15.00
CAB 714	TERMINAL PRINTER CABLE	£15.00
CAB 716	LOCAL NETWORK CABLE HX20/HX20	£15.00
CAB 717	SERIAL INTERFACE CABLE	£15.00
THX01	PARALLEL INTERFACE UNIT	£85.00
H00RP	PAPER ROLLS (5)	£2.60
H00CR-RA	PRINTER RIBBONS	£2.20
MC-TAPES	MICROCASSETTE TAPES	£1.60


A computer small enough to fit into a briefcase yet with a full size typewriter keyboard, LCD virtual screen, printer and microcassette facility actually built in. High speed serial communication with other computers plus the Epson reliability – a world beater.

A FULL SIZE QWERTY KEYBOARD WITH 68 KEYS INCLUDING 5 FUNCTION AND 13 SPECIAL KEYS. LCD DISPLAY WINDOW SHOWING ANY 20 COLUMN BY 4 LINE PART OF A VIRTUAL SCREEN UP TO 255 CHARACTERS WIDE. 50 HOURS BATTERY LIFE WITH MAINS ADAPTER FOR OVERNIGHT CHARGING. BUILT IN PRINTER 5 x 7 MATRIX, 24 COLUMN WITH BIT ADDRESSABLE GRAPHICS. OPTIONAL BUILT IN MICROCASSETTE OR ROM PACK.



SHARP PC1500 & PC1251

PC 1500 COMPUTER	£147.78
CE150 PRINTER/TAPE INTERFACE	£130.39
CE155 8K RAM MEMORY MODULE	£69.52
PC1251 COMPUTER	£65.17
CE128	£86.91

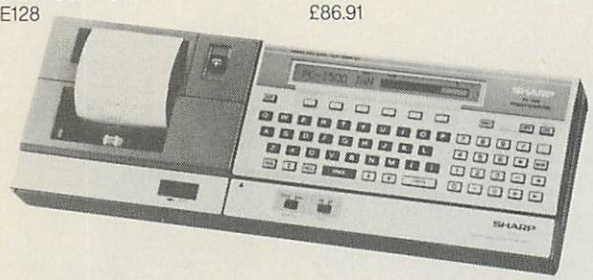

NEWBRAIN

You thought it would never arrive, but here it is with all those promises fulfilled. We never appreciated the full computing potential of the NEWBRAIN but suffice to say, it's a machine with a great future. We'll be able to tell you how to fully utilize the considerable power of the NEWBRAIN and take advantage of all that CP/M software.

NEWBRAIN MODEL A	£234.00
NEWBRAIN MODEL AD	£260.00



HEWLETT PACKARD

HP75C A TOTALLY NEW PORTABLE PERSONAL COMPUTER

An executive tool for the man in a hurry. 600 appointments can be held in memory. Never miss a board meeting or a birthday. In addition, – an impressive scientific aid to engineers and Scientists with magnetic card strips for handy programs and a magnificent BASIC.

HP75C PORTABLE COMPUTER	£768.00
HP-82700A 8K MEMORY MODULE	£150.00



COMPUTER SYSTEMS AND SOFTWARE PRODUCTS GUIDE

Please send S.A.E. for our price list giving full details of our Portables and CP/M Systems and Software. We stock a very comprehensive range of hardware and peripherals, all at competitive prices!

AVAILABLE NOW!

Visit our Portable Micro Centre or contact us for further information.

Transam
Microsystems Limited

Telephone and mail orders accepted on Barclaycard or Access
All prices exclude carriage and VAT

59/61 Theobald's Rd. London WC1X 8SF. Tel: 01-405 5240/2113. Telex: 24224 (Ref. 1422).

For full proposed range of Portable Computers and typewriters, including the Osborne, Kaypro II, Teleram, Panasonic, Toshiba, and NEC please contact us for price and availability. Not all items are yet in production so it is best to telephone for delivery details.

● Circle No. 162

VIEW

How good a word processor can you squeeze into a 16K ROM? John Harris has been looking at Acorn's plug-in system for the BBC Micro.

RECEIVING Acornsoft's word processor View will doubtless have much the same effect on you as winning the pools. Having waited in vain for so long it comes as quite a shock to realise that it has finally turned up.

For your £59.80 you are supplied with a 16K ROM, a teaching manual called *Into View*, the View Guide reference manual which follows the now obligatory A5 spiral-bound format, and a function-key label card to fit under the transparent plastic strip.

Installing View allows an option: you can decide either to have your machine cold start straight into View, or into Basic as normal. There are five parallel ROM sockets on the BBC processor board, with the operating system sitting in the left-most, the disc-filing system — if you have one — in the next, Basic, View and spare. Whichever chip is in the right-most occupied socket is selected on powering-up, after which switching from one to another is done by prefixing the utility name required with an asterisk, as in *Basic or *Word.

View will operate in any mode, giving a maximum document size in memory of 25K in mode 7 down to 10K in mode 3. These two modes are the only ones of significance to word processing on the BBC: mode 7 gives 40 characters by 25 lines for use with a television or, for larger documents, mode 3 gives 80 characters by 25 lines, for use with a monitor and up to, say, five pages of A4 letter, which is a longer letter than most. Mode 0 provides 80 characters by 32 lines, but the extra seven lines visible costs almost half the remaining space.

In any mode the maximum document width is 132 characters, which falls well short of the maximum usable 240 or so on most 13in. printers operating in condensed mode. It will surely be frowned on by those easily peeved or with good reason to want the wider format. On hitting the right or left screen edge with the cursor, and being under the influence of a permissive ruler, the display will jump left or right to allow continued text entry on the current line.

Three command types exist on View. Command mode commands are reached from Text mode by pressing Esc, and give access to Save, Load, all DFS utilities, printing, word counting and Search and Replace options. Immediate commands are given in Text mode, which is in turn reached from Command mode by pressing Esc.

```
=>*HELP STORED

VIEW A1.4
  CE text              RJ text
  DM xx                EM
  PE (lines)           EP
  OP                   BM lines
  FM lines             HM lines
  TM lines             PL lines
  LM margin            LS lines-1
  FO 0/1               HE 0/1
  HT type code         TS 0/1 margin
  SR r value
  DF /left/centre/right/
  DH /left/centre/right/

OS 1.00
```

CE text — Centre line against ruler
CM xx — Define macro labelled xx
PE (lines) — Page eject, if lines not left
OP — Odd page ejection
FM lines — Footer margin
TM lines — Top margin
LM margin — Left margin
FO 0/1 — Footers off/on switch
HT type code — Redefine highlight function
SR r value — Set register number; for example, SR P=P+10 will skip 10 on page numbering
DF/left/centre/right/ — Define footer
DH/left/centre/right/ — Define header
RJ text — Right justify line against ruler
EM — End macro definition
EP — Even page ejection
BM lines — Bottom margin
HM lines — Header margin
PL lines — Set lines per page
LS lines-1 — Line spacing
HE 0/1 — Headers off/on switch
TS 0/1 margin — Two sided document off/on switch and margin

Table 1. View stored commands.

They are accessed through the red function keys, and they generate different functions to their base functions if the Shift or Control keys are depressed at the same time to give 30 possible immediate functions, only one of which is not used. The third command type is the embedded print-formatting instruction, responsible for line and page formatting, header, footer and macro definition.

So, you are sitting looking at the empty screen page. What can be done with it? There is a default ruler with tabs every eight spaces and 74 characters wide, or 35 characters in mode 7. Together with the current ruler it can be copied, amended or reinvented from scratch. Up to 127 user-defined rulers may be added to it throughout the document.

The ruler which is active immediately precedes the cursor position and is duplicated on the top line of the screen. Besides allowing tabbing, the ruler defines the left and right margin for justification and formatting, which controls wrap-around at the end of each line. Both formatting and justification can be toggled on/off, and are indicated at the top left of the screen.

Six markers are known to the system. The first two are shown on the screen as inverse video, the remainder being invisible. They may be set individually, and the visible ones may be cleared together. The makers provide bounds for such activities as Save, Read, Count, Search, Change, Goto, and the Block Copy, Move, Delete and Format. The Read operation copies a file from disc or cassette into memory.

Putting text on the screen is a simple process. Once you have typed a few pages the cursor movement commands become significant. The arrow key moves the cursor to anywhere on the page, though if you press a character with the cursor beyond the bounds of the ruler, the toggle Release Margins determines whether it stays there or starts a new line. Shift Up and Shift Down pages through the document; Shift Left and Shift Right jumps words instead of characters. Commands available for cursor manipulation are Top and Bottom, for movement to top and to bottom of text; End of line and Go to marker; and the commands Search, with wildcard, an unselective Change, and Replace selective.

Character manipulation is available through Swap Case, Delete and Insert character, Delete to end of line, and the unusual Delete up to a given character. Lines may also be Inserted, Deleted, split and concatenated. An Insert mode toggle allows for continuous insertion or overwriting on amendment.

Continuous processing is an option for disc users only, and involves Editing from file 1 to file 2, requesting More as occasion demands and ending on Finish or Quit. It is a serial process and results in the original and

(continued on next page)

```
=>*HELP CMODE

VIEW A1.4
  LOAD file              SAVE file
  READ file (1)          WRITE file (1 2)

  EDIT filein fileout
  More (1)               Finish
  QUIT

  SCREEN file1...n
  Print file1...n        SHEETS file1...n

  MODE                   COUNT (1 2)
  FIELD chr              FORMAT (1 2)
  PRINTER file           MICROSPACE spacing
  NEW                    OLD

  Search target (1 2)
  Change target result (1 2)
  Replace target result (1 2)

OS 1.00
```

(continued from previous page)

updated files being available on disc at the end. The size of files handled is limited only by the capacity of half a disc. It seems there is no provision for the input file to be resident on one drive and the output on another.

Printing is achieved in Command mode by typing Print or Sheets or Screen file list, where file list has one or more entries to a presumed maximum of around 90. Print is for continuous stationery and a full printout, Sheets for single feed or selective printing, and Screen will show you on the screen what would come out on the printer if you used Print.

The file list is a neat way round the limiting memory effect on document size if you do not want the operational inconvenience of continuous processing, as page and line counts, headers and footers continue as though file list were a single file. All printing operations are performed from cassette or disc only and not from the file in memory, the contents of which are unaffected.

The embedded print-formatting instructions allow line manipulation by way of centring and right justification. Page formatting is by page length, line spacing, margin specification at top, bottom, header, footer and left of page, and page ejection on all, odd or even pages. Line spacing varies from single space to one line per page. Single-line headers and footers may be defined, selected and deselected, and two-sided document margins are provided for.

Macros are areas of predefined text which can be duplicated and expanded at any point in the main text body by a macro call. The duplication and expansion takes place during printing. The macro once defined to the print process by being met in the text — though not printed at that point — remains in effect throughout file list, thereby allowing the printing files to be prefixed in file list by the required macro file libraries. Macros can, of course, also be embedded anywhere in the text itself.

Macros can be multi-line, with up to 10 parameters, and are identified by a two-character mnemonic which may not be an existing command code. A macro is called within the text by using the identifier as a command code itself and carrying the parameters on the remainder of the command.

Number registers are available for command arithmetic operations coded A to Z though not text ones; P is automatically maintained as the page counter and L the line counter. All may be amended at any point in the text and will be printed when prefixed by the split vertical ASCII 124.

When it comes to embedding printer control codes within the text body for highlighting, underlining, double width, condensed mode and so on, the quick-reference guide suddenly becomes very coy. What it says is: "The highlight codes give instructions to your printer to print text underlined (1), or in bold type (2) ... For other Highlight effects and use of the HT command, see the Technical Appendix to *Into View* booklet. Note: for Highlight commands to take effect, your computer must first be operating the correct 'driver' for your printer."

The HT command allows Highlight 1 and 2 to represent any printer function recognised by the printer driver. The driver which is needed to use them and the in-built highlight commands, however, is sold separately on cassette for an additional £9.95. It is a wicked con to say that View sells at £59.80; it costs £69.75 if you are going to use it properly, a tenner less if you are not too fussy.

Format block	F0
Top of text in memory	F1
Bottom of text in memory	F2
Delete to end of line	F5
Move to beginning of line	F4
Move to end of line	F5
Insert line	F6
Delete line	F7
Insert character	F8
Delete character	F9
Move block of text	Shift-F0
Swap case of character at cursor	Shift-F1
Release margins	Shift-F2
Delete up to character	Shift-F3
Start/end Highlight 1	Shift-F4
Start/end Highlight 2	Shift-F5
Go to marker	Shift-F6
Set marker	Shift-F7
Edit stored command	Shift-F8
Delete stored command	Shift-F9
Delete block	Control-F0
Next match for search or replace	Control-F1
Toggle format mode	Control-F2
Toggle justify mode	Control-F3
Toggle insert mode	Control-F4
Copy default ruler to current line	Control-F5
Split line at cursor	Control-F6
Concatenate lines	Control-F7
Mark line as ruler	Control-F8
Move left one character	Left Arrow
Move right one character	Right Arrow
Move up one line	Down Arrow
Move to beginning of last word	Shift-Left Arrow
Move to beginning of next word	Shift-Right Arrow
Move screen one page up	Shift Up Arrow
Move screen one page down	Shift-Down Arrow
Copy block	Copy
Copy current ruler to current line	Shift Copy
Toggle text and command modes	Escape
Delete last character typed	Delete
Insert a Tab and move to next stop	Tab

Table 2. View Immediate commands.

Conclusions


● The View package includes a 16K plug-in ROM, a teaching manual and a reference manual. It costs £59.80, including VAT.

● View operates in conjunction with a BBC Micro with the 1.0 operating system or later.

● To take full advantage of View a printer driver cassette is required, costing an extra £9.95, including VAT.

● View handles well, and is certainly the best word-processing system of its size, but it does lack certain features like the numeric Tab which are available on more expensive word processors.

The Big Screen Micro from KCB at under £1800 is the best buy around!

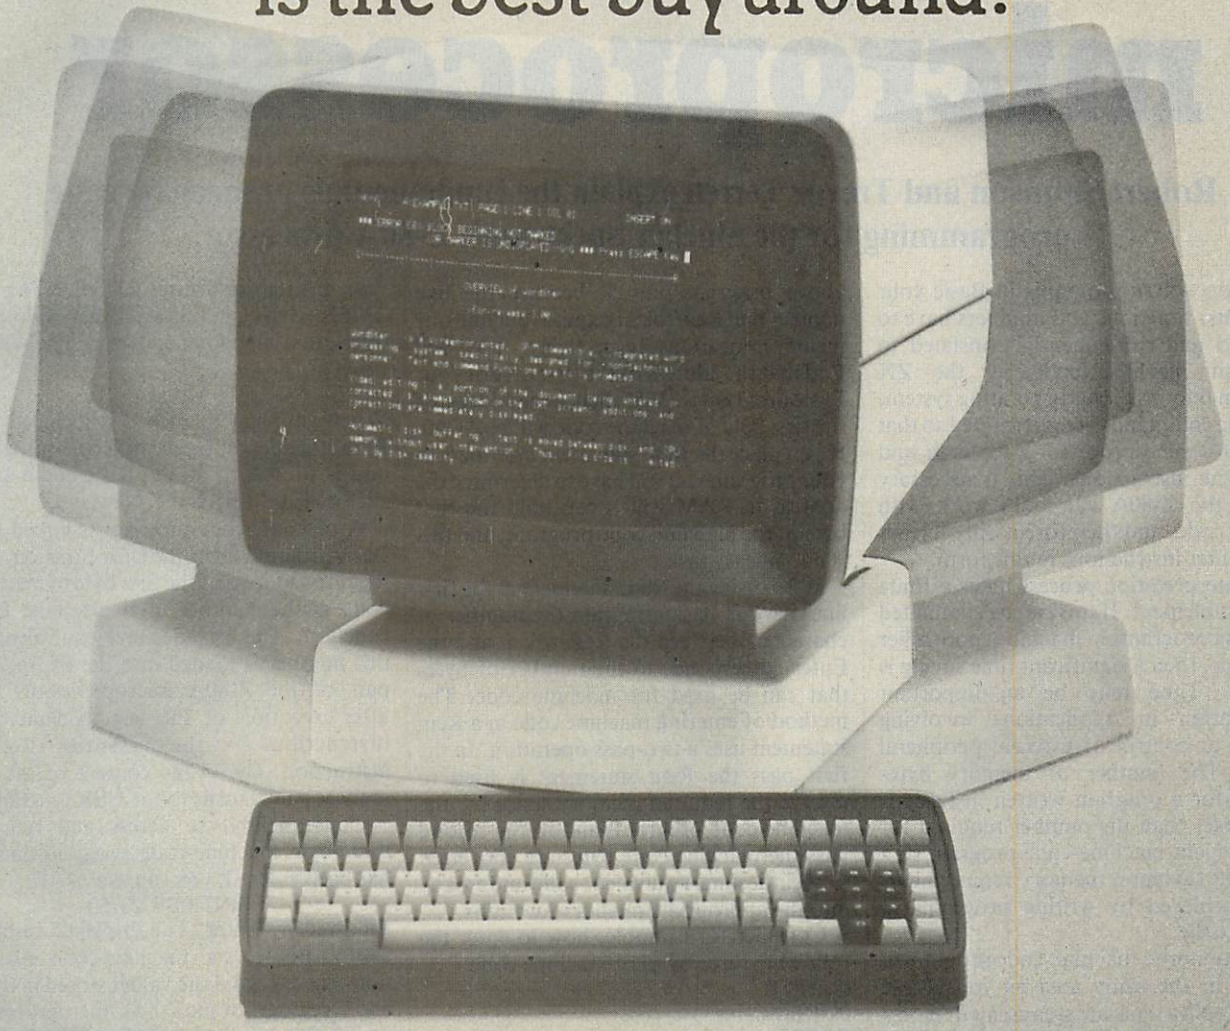

Videcom Apollo

15 inch green screen, Full tilting and swivelling VDU, Detachable keyboard, Optional 132 column screen, 25 function keys dedicated to Wordstar. Two models: 750K or 1.5MB disk drives, CP/M based.

KCB MICROS LIMITED

word processing + accountancy + financial modelling + calculation
record keeping + sales office management + accounts + payroll + graphics
engineering + communications + languages + solicitors + CAD

14 Windsor Road Slough SL1 2EJ Tel: Slough (0753) 38581/38319. Telex 23152 KMICRO
and in Scotland: Micro Change Ltd. Telfer House, 74/78 Miller Street, Glasgow Tel: 041 204 1929

● **Circle No. 163**

Programming the Z-80 microprocessor

Robert Simpson and Trevor Terrell explain the fundamentals of machine-code programming for the Sinclair Spectrum's Z-80A processor.

WHEN YOU WRITE programs in Basic your statements, functions and numbers have to be stored and subsequently translated to equivalent machine code by the ZX Spectrum interpreter and operating system. The Basic commands are interpreted so that the Z-80A microprocessor can fetch and execute the instructions. This is necessary because the Z-80A can only work with machine code, and therefore it only fetches and executes instructions in this form.

The interpretation process takes a finite time to implement. If this can be eliminated by writing programs in machine code rather than Basic, then a significant time saving is achieved. Time may be an important consideration in applications involving graphics or control of external peripheral devices. The number of memory bytes required for a program written in Basic is much larger than the number required for the equivalent machine-code program so a significant saving in memory requirements is also achieved by writing programs in machine code.

You can store a machine-code program in memory in the same area as your Basic program or in a separate area created for this purpose between RAMtop and user-defined graphics — see figure 1. To include machine code within a Basic program you may use an appropriate Rem statement.

From a practical point of view, the choice of where to place the Rem statement is governed by the necessity to know the address of the first byte of the machine-code program. When the Rem is the first line of your Basic program, the address of the first byte used for the Basic program is determined by Peeking into the system variable program. This may be achieved using:

```
10 LET x = PEEK 23635
15 LET y = PEEK 23636
20 PRINT "Address of First Byte of
   BASIC"" IS "; x + 256*y
```

The address of the first machine-code byte will be the address obtained using the above program plus 5, because the line number and Rem token require four and one memory locations respectively. You will find that the address of the first byte of your Basic program is 23755, hence the address of the first byte of machine code will be 23760. If you place the Rem statement elsewhere in your program you will have to determine the address in RAM which can hold the first byte of the machine-code program, and this is not an easy task.

When using the Rem statement in the first line of your Basic program the number of characters between the Rem token and the Enter corresponds to the number of bytes that can be used for machine code. The method of entering machine code in a Rem statement uses a two-pass operation. In the first pass the Rem statement is used to reserve the required memory space for the machine-code program, and in the second pass the machine-code bytes are converted to their decimal equivalent code and Poked into the appropriate memory locations.

Consider for example, how to enter the following three bytes of machine code:

```
04 INC B
0D DEC C
C9 RET
```

The first pass operation to reserve the required three memory bytes is achieved by entering:

```
1 Rem bbb
```

where the three characters bbb correspond to the memory bytes for the machine code. The bytes of the machine code must now be converted to their decimal equivalent, that is

04 converts to 04,
0D converts to 13
C9 converts to 201.

The decimal values are subsequently Poked into memory addresses 23760, 23761 and 23762. On completing this two-pass operation your Rem statement line will be listed as

```
1 REM ?
```

When your machine code is included in a Rem statement it is part of a Basic program and is subject to all the Basic commands, such as Edit, List, Save, New, etc.

A machine-code program is linked to a Basic program using the USR function. The memory address of the first byte of machine code is the number used after the USR function. The hexadecimal equivalent of this number is loaded into the BC register pair of the Z-80A microprocessor, and after execution of the last machine-code instruction — the essential Return instruction, C9 — the content of the BC register pair returns to the USR function.

Consequently, to access and run the three-byte machine-code program once it has been entered, you can use

```
PRINT USR 23760
```

followed by Enter. The displayed result is 24015. Before the machine-code instructions are executed the values stored in the B and C registers of the Z-80A microprocessor are 92 and 208 since 23760 = (92 × 256) + 208. After executing the first instruction, INC B, the register contents are 93 and 208, and then after executing the second instruction, DEC C, the register contents are 93 and 207. After the Return instruction, RET, the USR function returns with the value (93 × 256) + 207, or 24015. The USR function is used in a line of Basic program to access the machine-code program, and if you use

```
25 LET x = USR 23760
```

then, after executing the simple machine-code program, the value of x is set equal to 24015.

A Return instruction, RET, must always be included as the last op code in a machine-code program. Otherwise it is quite possible that your ZX Spectrum will fetch and execute the codes which exist in the RAM

The authors are from the Systems and instrumentation division of of Preston Polytechnic. This article is an edited extract from their forthcoming book, *ZX Spectrum User's Handbook*, to be published by Newnes Technical Books.

locations following the end of your machine-code program; since these are unspecified, a crash condition may then result. If that happens, the operating system loses control and the microcomputer becomes incapable of doing anything useful. For example, you will recognise this condition when you are unable to input control commands from the keyboard. The only way to deal with a crash condition is to momentarily disconnect the 9V power supply.

It is possible to store a machine-code program in an area which you create above RAMtop but below the user-defined graphics area. This is the area to be used when you do not wish to have your machine-code program erased by New. In the Spectrum the user-defined graphics area occupies the top 168 bytes of RAM, and RAMtop is normally the next address below this — see figure 1. In the 16K Spectrum RAMtop is normally at address 32599, whereas in the 48K Spectrum it is at 65367.

You can redefine the address of RAMtop by putting the desired RAMtop value in a Clear statement using the form

CLEAR Desired RAMtop value

The Clear command also clears all the program variables, the display file CLS, and Gosub stack, the latter being put at the new RAMtop; it also does a Restore, and resets the Plot position.

When you have redefined RAMtop to reserve sufficient memory bytes for your machine-code program above RAMtop and

(continued on next page)

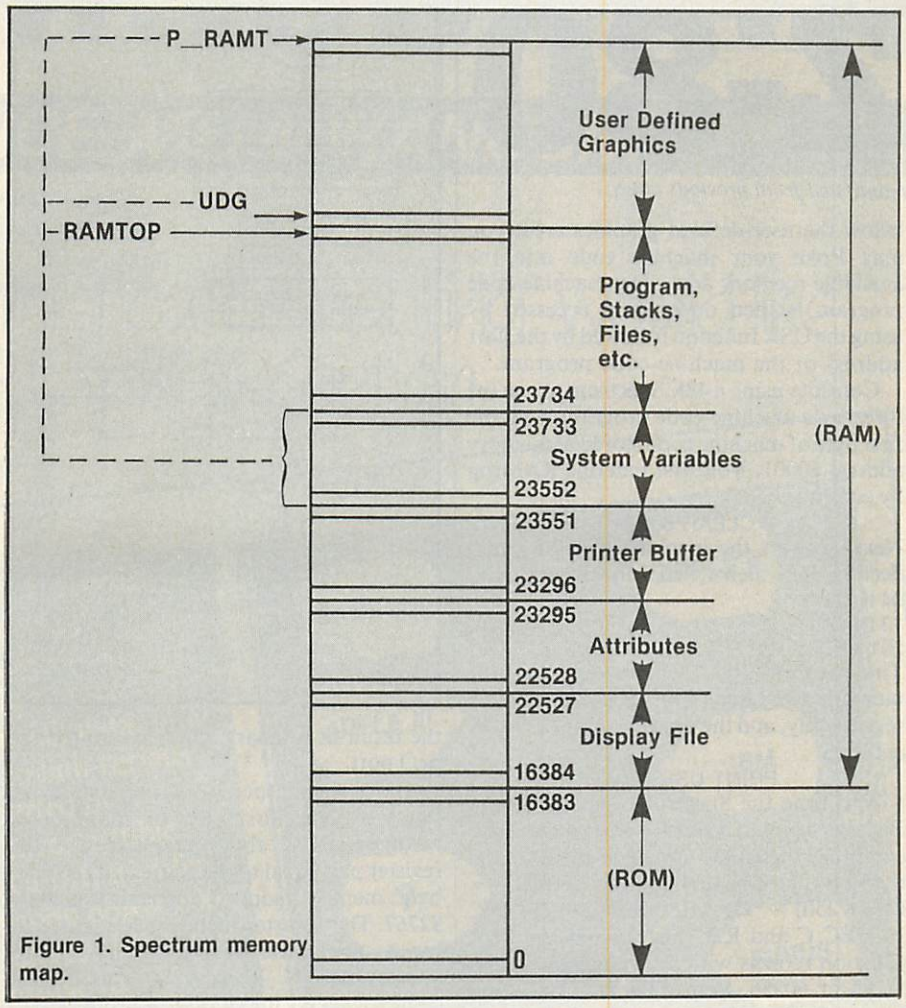


Figure 1. Spectrum memory map.

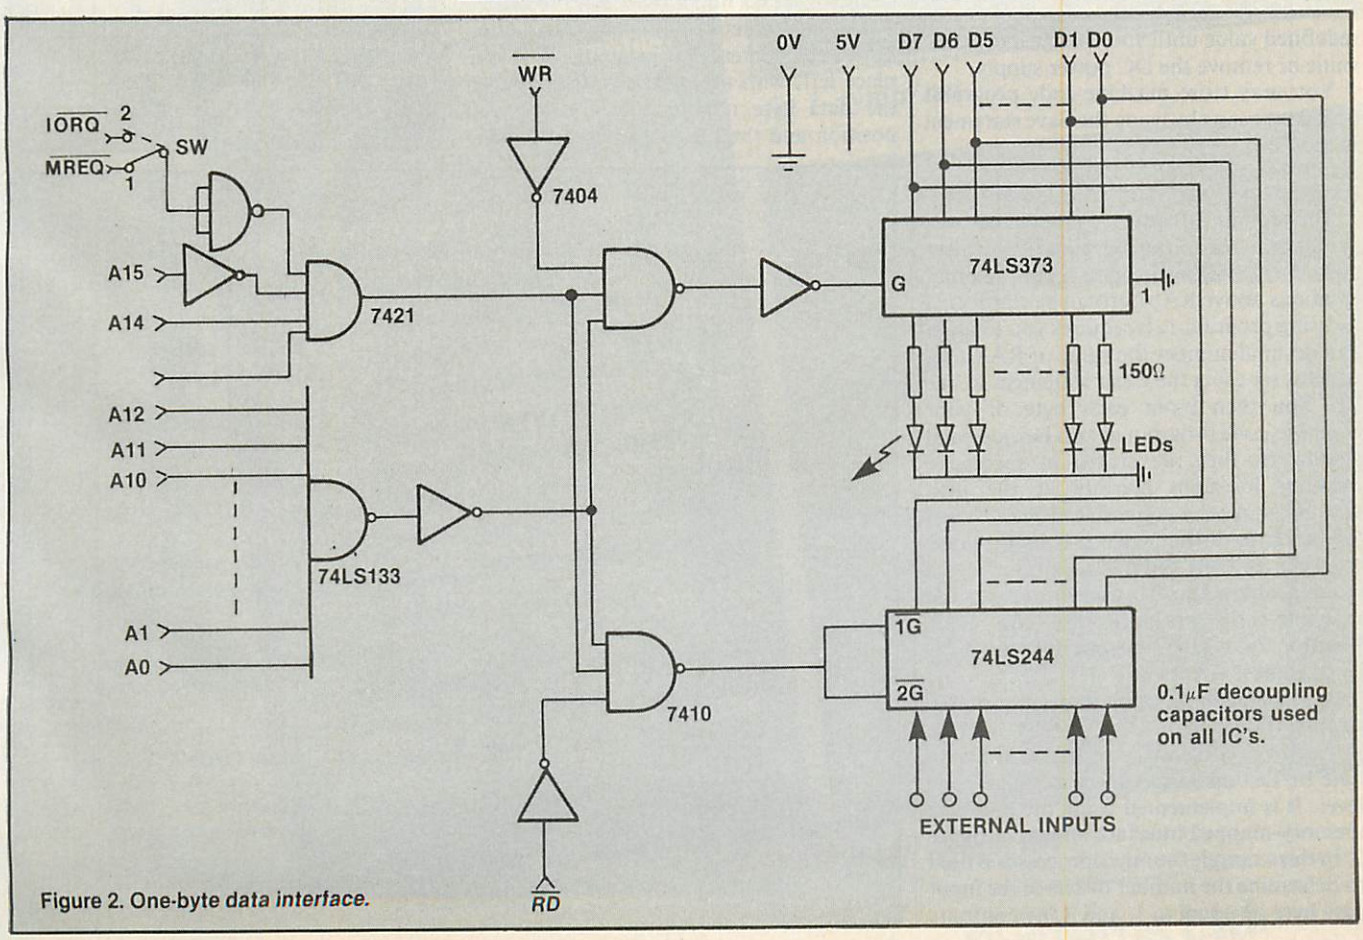


Figure 2. One-byte data interface.

APPLE IBM PC SIRIUS CP/M

● Circle No. 164

BRITISH TECHNOLOGY AT ITS BEST

Big fish caught in small pond

When William Green was sold a faulty micro he demanded his money back. The supplier refused, so he went to court.

EARLY IN 1982 I bought one of the popular low-price personal computers. I will not name it, suffice to say it do not live up to the claims made for it in the advertisements. After trying unsuccessfully to get a machine that worked I decided to demand my money back.

I think it is a good rule to keep copies of correspondence about any relatively expensive purchase — memory is not always



Memory is not always adequate.

adequate. Accordingly I had kept a record of the symptoms of the faults I had experienced. I had written to the supplier describing these symptoms and had exchanged parts of the machine found to be faulty. I had kept copies of all my letters and the supplier's replies.

Having decided to recover my money I wrote to the supplier explaining that I was not satisfied with the machine and asking for my money back. At the same time I returned the machine. A mistake — because in so doing I passed all the actual evidence of a faulty machine to the supplier. In the event it made no difference, although it might have done with a less scrupulous supplier.

The supplier's reply was as expected. It claimed that policy prevented refunds except within a short period of purchase. Since it was not known to me when I bought the computer it was not binding on me. I wrote back pointing this out and promising that should my money not be refunded within a fortnight I would sue. I sent the letter by recorded delivery to avoid any doubt that my threat to sue had been received. I sent the letter to the company's registered address, the official address of the company.


Some years earlier I had successfully sued for a small sum of money in the Small Claims Court and so decided to try that court again. The refund I wanted was under £200 and therefore well within the limits for the Small Claims Court. The Small Claims Court is a branch of the County Court, and not to be confused with a Magistrates Court.

In the Small Claims Court legal and other costs and expenses are limited. The person doing the sueing is asking only for a limited sum of money and will not face possibly high legal costs. An opponent has less opportunity to frighten a poorer adversary by the use of ostentatious, expensive legal assistance. For small amounts it is a very useful way of fighting against a relatively rich opponent. In my case my opponent was a rich company, in another court I might well have faced the possibility of very heavy costs were I to lose. In the Small Claims Court solicitors are not necessary. On the previous occasion I had done without a solicitor and I decided to do so again.

There is a free booklet called *Small Claims in the County Court*. It is revised from time to time and it is important to use the latest version. A copy can be obtained from any County Court. It is written in plain language and explains how to use the Small Claims Court without a solicitor. It does however deserve careful reading. The booklet explains that the person sueing is the plaintiff, the sued is the defendant. It is not essential, but using "plaintiff" and "defendant" in the various papers in the case saves continually writing out names and addresses.

To sue the defendant it is necessary to issue a summons. It saves time if the summons is issued by the correct court. The country is divided into court districts. The correct court is the one in the defendant's district. The booklet explains this. In my case, the correct court was about eight miles away from my home — not too far. It is sometimes possible to arrange to have the case dealt with by a court in another district. Usually it can be arranged only with the defendant's permission.

I confirmed the choice of court by a visit to the office of the Chief Clerk of the Court. The people in that office are available to advise about procedure but cannot advise about the case itself. A word of warning is necessary here: as in all occupations, some of those in the Chief Clerk's office have more enthusiasm than knowledge. If doubtful about the advice obtained consult the offices of two courts, say your local court as well as the court the case will

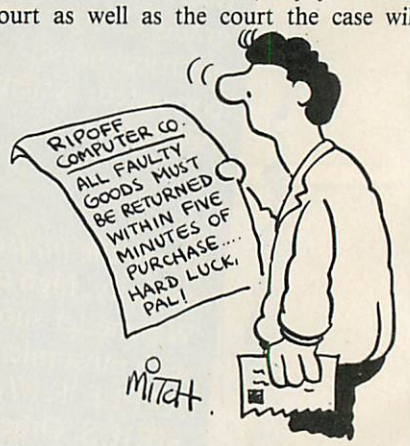

Policy prevented refunds except within a short period of purchase.

proceed in. My first experience of the Small Claims Court included wrong advice about which court to use. However, should you issue the summons through the wrong court, only time is lost, the court will help you correct the error.

There are two kinds of summons, an ordinary summons and a default summons. I was advised by the Court Office that for my case the correct summons would be a default summons.

Another visit to the local County Court was needed to collect a Form of Request, the form that enables the summons to be issued. At the same time I found out what fee would be payable for serving the summons. In 1982 the minimum fee was £4, the maximum £29.

The case had now to be written, in plain language as simply as possible, giving the main facts and details of what I claimed. It is referred to as the particulars of claim. In

INTER-OFFICE MEMORANDUM

John
Saw this in Practical Computing Would like demo A.S.A.P please action
M.B.

symb/net. *(n) (see fig 1)* **1.** speedy long range, local area network system, capable of ranges to 9km. utilises fibre optic cable and semi conductor laser to transmit data; **symbnet** enables user to link various microcomputers supported by **symbfile** *(see below)* **2.** compatible with DOS,PASCAL,CP/M; transfer rate 50 kHZ, transmission power 800 micro W cable, fire retardant P.V.C. grade 32, signal insensitive to electrical noise, ∴ cannot be corrupted; system nucleus **symbfile** *(see below).*

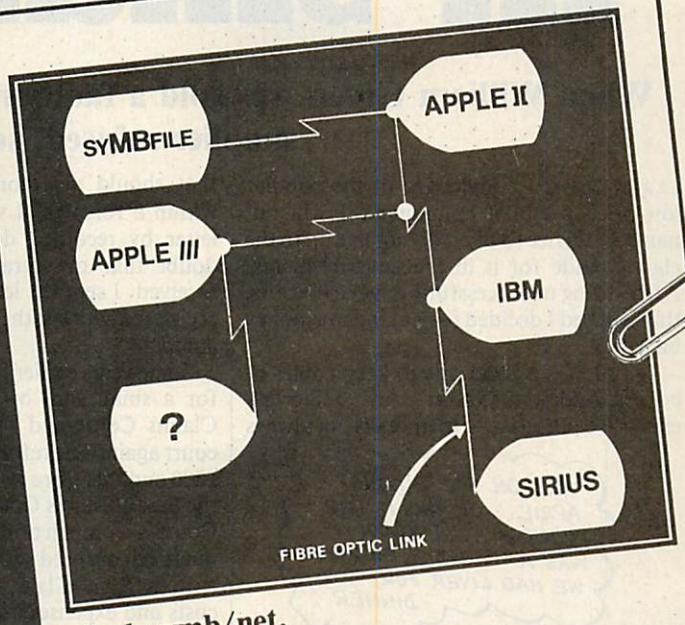


fig 1 **symb/net.**

symb/file *(n) (see fig II)* **1.** high capacity, high quality, $5\frac{1}{4}$" Winchester sub-system, compatible with most microcomputers including APPLE II, III, IBM PC, and SIRIUS. Other features include **2.** a cold booting facility **3.** one year's full warranty. Also available on **symbfile** top quality software including database, word processing and accounting packages. **4.** capacities range from 3-84 megabytes; average speed of access 90ms, 32 sectors per track; rotational speed 3600 (rpm) **5.** used at the centre of network system — **symbnet** (*see above*).



fig II **symb/file**

Symbiotic Computer Systems Ltd.
32 Elmwood Road, Croydon, CR9 2TX. Telephone: 01-683 1137 (PBX) Telex: 893815

APPLE IBM PC SIRIUS CP/M PASCAL DOS

● Circle No. 164

BRITISH TECHNOLOGY AT ITS BEST

Big fish caught in small pond

When William Green was sold a faulty micro he demanded his money back. The supplier refused, so he went to court.

EARLY IN 1982 I bought one of the popular low-price personal computers. I will not name it, suffice to say it do not live up to the claims made for it in the advertisements. After trying unsuccessfully to get a machine that worked I decided to demand my money back.

I think it is a good rule to keep copies of correspondence about any relatively expensive purchase — memory is not always



Memory is not always adequate.

adequate. Accordingly I had kept a record of the symptoms of the faults I had experienced. I had written to the supplier describing these symptoms and had exchanged parts of the machine found to be faulty. I had kept copies of all my letters and the supplier's replies.

Having decided to recover my money I wrote to the supplier explaining that I was not satisfied with the machine and asking for my money back. At the same time I returned the machine. A mistake — because in so doing I passed all the actual evidence of a faulty machine to the supplier. In the event it made no difference, although it might have done with a less scrupulous supplier.

The supplier's reply was as expected. It claimed that policy prevented refunds except within a short period of purchase. Since it was not known to me when I bought the computer it was not binding on me. I wrote back pointing this out and promising that should my money not be refunded within a fortnight I would sue. I sent the letter by recorded delivery to avoid any doubt that my threat to sue had been received. I sent the letter to the company's registered address, the official address of the company.

Some years earlier I had successfully sued for a small sum of money in the Small Claims Court and so decided to try that court again. The refund I wanted was under £200 and therefore well within the limits for the Small Claims Court. The Small Claims Court is a branch of the County Court, and not to be confused with a Magistrates Court.

In the Small Claims Court legal and other costs and expenses are limited. The person doing the sueing is asking only for a limited sum of money and will not face possibly high legal costs. An opponent has less opportunity to frighten a poorer adversary by the use of ostentatious, expensive legal assistance. For small amounts it is a very useful way of fighting against a relatively rich opponent. In my case my opponent was a rich company, in another court I might well have faced the possibility of very heavy costs were I to lose. In the Small Claims Court solicitors are not necessary. On the previous occasion I had done without a solicitor and I decided to do so again.

There is a free booklet called *Small Claims in the County Court*. It is revised from time to time and it is important to use the latest version. A copy can be obtained from any County Court. It is written in plain language and explains how to use the Small Claims Court without a solicitor. It does however deserve careful reading. The booklet explains that the person sueing is the plaintiff, the sued is the defendant. It is not essential, but using "plaintiff" and "defendant" in the various papers in the case saves continually writing out names and addresses.

To sue the defendant it is necessary to issue a summons. It saves time if the summons is issued by the correct court. The country is divided into court districts. The correct court is the one in the defendant's district. The booklet explains this. In my case, the correct court was about eight miles away from my home — not too far. It is sometimes possible to arrange to have the case dealt with by a court in another district. Usually it can be arranged only with the defendant's permission.

I confirmed the choice of court by a visit to the office of the Chief Clerk of the Court. The people in that office are available to advise about procedure but cannot advise about the case itself. A word of warning is necessary here: as in all occupations, some of those in the Chief Clerk's office have more enthusiasm than knowledge. If doubtful about the advice obtained consult the offices of two courts, say your local court as well as the court the case will



Policy prevented refunds except within a short period of purchase.

proceed in. My first experience of the Small Claims Court included wrong advice about which court to use. However, should you issue the summons through the wrong court, only time is lost, the court will help you correct the error.

There are two kinds of summons, an ordinary summons and a default summons. I was advised by the Court Office that for my case the correct summons would be a default summons.

Another visit to the local County Court was needed to collect a Form of Request, the form that enables the summons to be issued. At the same time I found out what fee would be payable for serving the summons. In 1982 the minimum fee was £4, the maximum £29.

The case had now to be written, in plain language as simply as possible, giving the main facts and details of what I claimed. It is referred to as the particulars of claim. In

preparing the particulars of claim do not be tempted to use legal language. Legal people understand English — use it.

I took the particulars of claim, with the Form of Request and appropriate fee to the court. I had to supply in addition a self-addressed envelope in which the court sent me, about a week later, the plaint note, which is both notice that the case has commenced and a receipt for the fee paid. The court issues the summons after receiving the Form of Request, particulars of claim and fee. The case is given a number, the plaint number. All papers to do with the case must be labelled with the plaint number. The plaint number is used in the court office for filing the papers in the case. No plaint number, no papers, no case! The plaint number is given on the plaint note.

My case was one of those for which arbitration was considered appropriate. Aribitration is the alternative to a full court procedure. The smallest claims are automatically subject to arbitration, in other cases the the plaintiff can ask for arbitration. In this case the arbitrator was a Registrar of the County Court. A court Registrar is second



I found it difficult to hear the Registrar.

only to a judge and is one of the more qualified and experienced people in the legal profession. With arbitration there is first a pre-trial review. At the review the plaintiff and defendant appear, and arrangements about the conduct of the trial itself are made. Either party to the case can take up matters which seem important. For example, in my case I tried to get an immediate judgment in my favour.

I failed. What had happened was that the defendant had not put forward a defence until three weeks after the issue of the summons. From reading the notice informing me that the summons had been served, it seemed to me that unless the defence was put up within a fortnight of the summons being issued the plaintiff was entitled to judgment. The Registrar thought differently.

The pre-trial review was something of a shock in other respects. On the previous occasion I had used the Small Claims Court the pre-trial review was held in a small room containing a small table, some quite ordinary chairs and the Registrar, myself and the defendant — a very quiet, informal occasion. That was in another district and at another time.

On this occasion the venue was a real court room. At the front was a dais containing a real judge's chair, complete with the Royal Coat of Arms. Here sat the Registrar. In front of him was the Clerk of the Court behind a bench. In front of his bench was the bench for lawyers, labelled plaintiff at one end and defendant at the other. That was not all. The court was full of people — all the plaintiffs and defendants in that afternoon's cases were there, all talking among themselves.

Those involved in each case had to talk to the Registrar and each other behind the lawyer's bench while the hubbub continued. When my case was finally reached I found that the defendant had sent a solicitor. He had been present in the court almost as long as I had, but did not report his presence to the Clerk until the last minute. It had the effect of delaying my case by a good hour. I found it difficult to hear the Registrar, who spoke very quietly while looking down at the case papers. Most of the time in fact I was not sure what was happening. The defendant's solicitor introduced himself, but while I was trying to say who I was the Clerk was standing between me and the Registrar. I am sure the Registrar never heard me. At one stage I believe the Registrar thought I was a solicitor representing another company.

The solicitor asked for permission to use an expert's report. The Registrar agreed because, he said, computer cases can become technical. The solicitor then asked for disclosure, which is in effect a request to be told of papers possessed by the other side, in this case me, which might be relevant. The request is not always as innocent as it sounds: sometimes papers not disclosed cannot afterwards be used in court, therefore it is wise to include everything you might want to use. Solicitors know this, most other people do not. In this case the relevant papers in my possession were only the letters between me and the defendant, and the advertisement which led to my buying the computer.

The Registrar asked for an estimate of how long the case might take; I had no idea. The solictor shouted: "two hours". The Registrar accepted this, made an Order for Disclosure and one expert's report on each side, and said the trial would be about 10 weeks from then. The whole process took about six minutes. As I left the court the defendant's solicitor advised me to use a standard solicitor's form for the Disclosure. I ignored the advice as I thought that to use a legal form might involve the wrong use of legal terms.

The Order for Disclosure duly arrived. It was a completely unreadable copy of an original — quite useless. I took it to the Chief Clerk's office where I was given a readable copy with an apology. The order required both the defendant and me to supply each other with a list of known relevant documents within 21 days of the date of the order. The poor copy I had been sent nearly caused me to overrun the time given. It had not been sent until nearly two weeks after the pre-trial review, the date of the order. I asked the Court Office if the list had to be sent direct to the defendant and was told I could send the list through the Court Office. This I did so as to avoid any risk that the defendant might not receive the list by the due time.

I never received a list from the defendants and I did not arrange for an expert's report or ask the defendant for a copy of his expert's report. According to the advertisement for the computer you did not need to be an expert to use it.

The date of the trial came and I attended the court. There I found that the trial was due to be held not in the court room where the pre-trial review had been held but in Chambers, in fact the office of the Registrar




Some patience is required.

who was to arbitrate. The Registrar was not the one who had presided at the pre-trial review. Neither the defendant nor his solicitor turned up. The Registrar, after asking me to briefly recount my case, made a judgment in my favour for the full amount I had claimed, plus the fee I had paid for the summons.

The order gave a date by which time the full amount had to be paid by the defendant into court. The court would then pay me. Should the defendant not pay by the due date the plaintiff can issue a warrant of execution. A standard form can be obtained from the Court Office for the purpose. A fee is payable, but advice on how to complete the form can be obtained from the Court Office. The fee is recovered, in addition to your claim, by the bailiff who executes the warrant. In my case, the defendant paid up just one day late. I was about to issue a warrant when the court told me the money I was owed had been paid in.

As from April there could be a *NEW* magazine in your life . . .

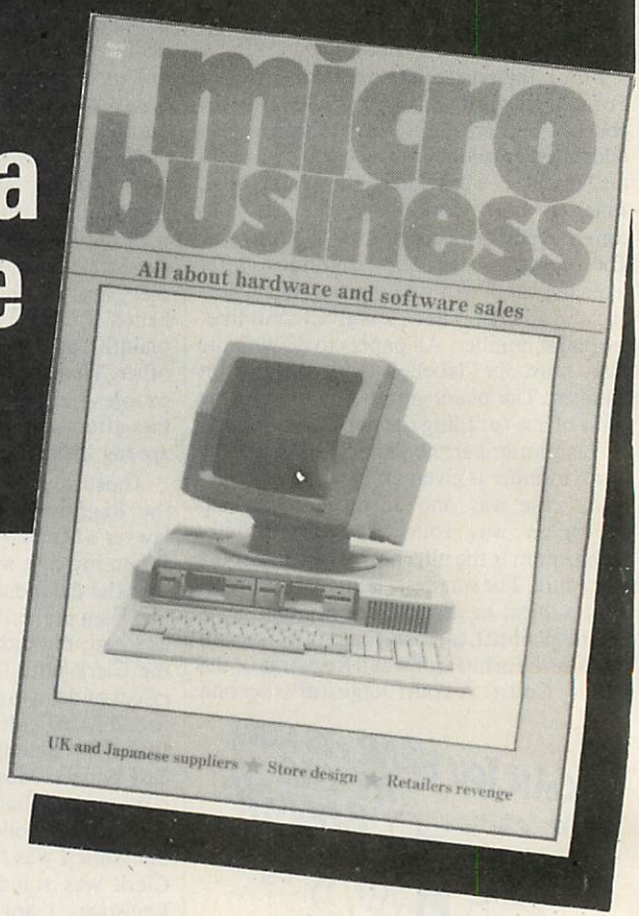

micro business

● Micro Business is designed to bridge the gap between those who are producing microcomputer hardware and software and those who are selling it.

● Micro Business is the magazine which makes sense of the micro scene, identifying the pitfalls and explaining the complexities of the microcomputer jungle.

● Micro Business is produced by the publishers of Practical Computing; Your Computer; Systems International; Computer Weekly; Electrical & Radio Trading and Electrical & Electronic Trader — Britain's leading journals in the computer and electrical retail markets.

● Micro Business will bring new hardware and software products to the attention of dealers and retail outlets throughout the UK.

That all adds up to an effective marketing and sales aid for companies producing microcomputer hardware and software. And an important source of market information for those at the sharp end — the retailers and dealers who are selling direct to the general public. If you fall into either of these categories please complete the coupon and return it to us, to obtain Micro Business free of charge.

To: Chris Hipwell, Publishing Director, Micro Business, Room 309H, Business Press International Ltd, Quadrant House, The Quadrant, Sutton, Surrey

I am professionally involved in the production and/or sale of microcomputer hardware and/or software products.

Please tick appropriate box(es)

☐ Please send me a reader application card so that I can register for free copies of Micro Business.

☐ Please send me your advertisement brochure as I am interested in advertising in Micro Business.

Name_____

Job Title_____

Company Name_____

Company Address_____

PC

TELEWRITER™
the DRAGON 32 Word Processor

TELEWRITER

Telewriter is the powerful word processor designed specifically for the DRAGON 32 Computer. It can handle almost any serious writing job and is extremely easy to use. It has all the advanced features you need to create, edit, store, format and print any kind of text. With Telewriter you can quickly produce perfect, finished copy for letters, reports, term papers, articles, technical documentation, stories, novels, screenplays, newsletters. It is also a flexible and efficient way to take notes or organize ideas and plans.

51 × 24 DISPLAY

The DRAGON 32 is an incredibly powerful and versatile computer, but for text editing it has some major drawbacks. The small 32 character by 16 line screen format shows you too little of the text and, combined with its lack of lower case letters, bears little resemblance to the way text really looks on the page. Reverse video in place of lower case just adds confusion.

Telewriter eliminates these shortcomings with **no hardware modifications required.** By using software alone, Telewriter creates a new character set that has **real lower case letters,** and puts 24 lines of 51 characters on the screen. That's more on-screen characters than Apple II, Atari or TRS-80 Model III. That's more than double the DRAGON 32's standard display.

FULL SCREEN EDITOR

The Telewriter editor is designed for maximum ease of use. The commands are single key (or single key plus control key), fast, and easy to remember. There is no need to switch between insert modes and delete modes and cursor movement modes. You simply type. What you type is inserted into the text at the cursor, on the screen. What you see on the screen is always the current state of your text. You can move quickly through the text with one key cursor movement in all 4 directions, or press the shift key simultaneously for fast, auto-repeat. You can jump to the top or bottom of the text, and beginning or end of a line, move forward or backward a page at a time, or scroll quickly up or down. When you type past the end of the line, the wordwrap feature moves you cleanly to the next.

You can copy, move or delete any size block of text, search repeatedly for any pattern of characters, then instantly delete it or replace it with another. Telewriter gives you a tab key, tells you how much space you have left in memory, and warns you when the buffer is full.

. . . truly a state of the art word processor . . . outstanding in every respect

The only one with all these features for your DRAGON 32

51 column × 24 line screen display
Sophisticated full-screen editor
Real lower case characters
Powerful text formatter
Works with any printer
Special MX-80 driver
Requires absolutely no hardware modifications
★ Tandy colour version also available

FORMAT FEATURES

When it comes time to print out the finished manuscript, Telewriter lets you specify: left, right, top, and bottom margins, line spacing and lines per page. These parameters can be set before printing or they can be dynamically modified during printing with simple format codes in text.

Telewriter will automatically number A4 pages (if you want) and centre lines. It can chain print any number of text files from cassette without user intervention. You can tell it to start a new page anywhere in the text or pause at the bottom of the page.

You can print all or any part of the text buffer, abort the printing at any point, and there is a "Typewriter" feature which allows you to type straight to your printer. Because Telewriter lets you output numeric control codes directly (either from the menu or during printing), it works with any printer (Tandy, Seikosha, MX-80, Okidata, NEC 8023, C. Itoh 8510, Centronics, GE Terminet, Smith Corona TP-1, etc.). There's even a special driver for the Epson MX-80 that lets you simply select any of its 12 fonts and do underlining with a single underline character.

CASSETTE INPUT/OUTPUT

Because the Telewriter makes using cassette almost painless, you can still have a powerful word processor without the major additional cost of a disk. The advanced cassette handler will search in the forward direction till it finds the first valid file, so there's no need to keep retyping a load command when you are lost in your tape. The Verify command checks your cassette save to make sure they're good. You can save all or any part of the text buffer to cassette and you can append pre-existing files from those you have in the buffer

ASCII COMPATIBLE

Telewriter turns your DRAGON 32 into the most powerful, lowest cost, word processor in the world today. But that's not all. The simple ASCII conversion program provided with Telewriter means you can use the full power of the Telewriter editor for creating and editing BASIC and assembly language programs. It means you can use Telewriter to prepare or edit text files used with any data communications program.

Telewriter costs £49.95 on cassette and is

AVAILABLE FROM DRAGON 32 DEALERS NATIONWIDE
OR DIRECT FROM
MICRODEAL
41 TRURO ROAD, ST. AUSTELL, CORNWALL PL25 5JE
24 HOUR ORDERLINE 0726 67676

WE WELCOME ACCESS

SEND FOR OUR FREE SOFTWARE LISTS FOR DRAGON 32 & TANDY RANGE OF COMPUTERS.
PLEASE STATE WHICH COMPUTER YOU OWN

Name _____

Address _____

_____

_____

_____

Make / type of computer

_____

Please include a 1st Class Stamp

. . . one of the best programs for the Color Computer I have seen . . .

● Circle No. 165

Software News

INNOVATIVE
TRS 80-GENIE SOFTWARE

from the professionals

LDOS

* DOUBLE Sided & DOUBLE Density support.
* AUTOMATIC Density recognition.
* 35, 40, 77, 80 and any other track counts are supported.
* All available drive stepping rates are supported.
* Hard Drive support, can be HANDLED AS A SINGLE DRIVE.
* Hard drive partitioning, one drive can act as up to six.
* Intermix 5", 8" and Hard drives, up to a total of 8 drives.
- Compatible with the Model I Radio Shack Expansion Interface.
- Upward compatible with TRSDOS (2.3 & 1.2 as documented).
- Fully supports Microsoft language products for the TRS-80.
- Complete media compatibility Model I to Model III and back.
- Full support for LOBO's LX-80 interface.
- Full support for PERCOM's DOUBLER II.
- Complete documentation (well over 250 pages).
- Complete technical information.
- A liberal update policy.
- An enhanced BASIC (LBASIC) including:
  - > Upward compatible with Microsoft Basic.
  - > High speed LOAD and SAVE.
  - > Run multiple programs with common variables.
  - > BLOCKED (variable length) files are supported.
  - > DOS commands may be executed from LBASIC.
  - > Built in string array. SORT.
  - > Single stepper for debugging.
  - > Several new statements and file modes.
- A compiled JOB CONTROL LANGUAGE (JCL).
- CONVert utility to move files from Model III TRSDOS.
- An Extended Debugging and Monitor program (with disk access).
- CMDFILE for movement of disk and/or tape system (/CMD) files.
- Device independent operation.
- Full LINKing, ROUTEing, FILTERing and SETting are supported.
- MiniDOS feature for constant access to certain DOS commands.
- RS-232 DRIVER for serial support.
- Sophisticated communications software included.
- Wildcard characters and partial Filespecs are supported.
- DATED FILES, show when a file was last written to.
- Backup: Mirror, by Class, if Modified, by Date, by Extension, etc.
- Selectable PURGE for fast disk "cleanup" of unwanted files.
- Print formatter, for control of printer output.
- Built in printer SPOOLER, to both disk and ram.
- Joblog to record all system operations with time stamps.
- UPPER and **lower** case support, throughout the system.
- Blinking cursor with selectable cursor character.
- 128 character TYPE AHEAD buffering for keyboard input.
- Assign strings to individual keys with Key Stroke Multiply (KSM).
- SUPER FAST operation with the SYSRES feature.
- Extensive user control and system feedback.
- Advanced PATCH utility for easy maintenance.
- Complete transportability of software among all Z-80 LDOS systems through the use of the LDOS high ram supervisory call system (SVC).

* Specific hardware is required to use these features.

LDOS for TRS-80 I/III and all current Genie machines
£85.00 + V.A.T. and P & P £3 Receipted Parcel Post

With the addition of a driver, LDOS will now support the Cumana hard disk drive for the Tandy Model III machine. This driver is available from Molimerx at a cost of £15 plus VAT. It will only be supplied to customers who purchase LDOS from Molimerx or their dealers.

LDOS also supports the Tandy hard drive for the Model III and this is supplied by Tandy themselves.

other machines

We have started to supply some of our more popular programs in non TRS-80 format for other machines as follows:

BBC (MODEL B - O/S 0.1)

JUMBO
The 747 simulation that has swept the TRS-80 community worldwide! So memory tight that there was no room for full colour.

Cassette **£17.25**

MYSTERIOUS ADVENTURES
The English written, machine language series of adventures. Seven in number, at the moment the following are presently available on the BBC:

The Golden Baton
The Time Machine
Arrow of Death Part I
Arrow of Death Part II
Escape from Pulsar 7
Circus
Feasibility Experiment

Cassette (each) **£10.06**

FAIRYTALE
Basic adventure mainly aimed at the kids but for all the family! Uses a scenario of nursery rhymes and fairy-tales within which to find the treasures.

WONDERLAND
A follow-up Basic adventure to Fairytale. Fairytales and nursery rhymes again plus cartoon characters.

Cassette (each) **£10.06**

V.A.T. included

P. & P. 75p for any quantity

TEL: [0424] 220391/223636

MOLIMERX™ LTD
A J HARDING (MOLIMERX)

TELEX 86736 SOTEX G

1 BUCKHURST ROAD, TOWN HALL SQUARE, BEXHILL-ON-SEA, EAST SUSSEX.

TRS-80 & VIDEO GENIE SOFTWARE CATALOGUE £1.00 plus £1 postage.

● Circle No. 166

ACORN ATOM

Turtle Talk	version of Logo in ROM	Baker	£18
Lisp	5.5K cassette-based interpreter	Acornsoft	£17.25
BBC Basic	with both ROM and RAM	Acornsoft	£49.95
Forth	interpreter, cassette based	Acornsoft	£17.25

APPLE

Tasc	Applesoft Compiler	Apple dealers	£99
TransForth	special Apple version of Forth	Pete and Pam	£60
Mickie	special-purpose query language	Systemics	£50
Pascal	complete language system	Apple dealers	£250
Apple Pilot		Apple dealers	£79
GraForth	Apple graphics language	Pete and Pam	£65
Business Basic	for the Apple III	Apple dealers	
Pascall III	UCSD for the Apple III	Apple dealers	
Transforth III	Forth for the Apple III	Pete and Pam	
Basic Compiler	for Apple II	Pete and Pam	
Cobol-80	business language	Pete and Pam	
Fortran-80	scientific compiled language	Pete and Pam	
App-L-isp	Lisp for the Apple II	Pete and Pam	
MuLisp	small implementation of Lisp	Pete and Pam Computers	

ATARI

Basic	included with 800	Maplin	£49.95
Basic A +	disc	Silica Shop	£48.95
MicroSoft Basic	more advanced	Maplin	£59.95
Pilot	on cassette or cartridge	Maplin	£54
Pilot (educator)		Maplin	£79.95
QS Forth		Maplin	£49.95
Tiny-C		Maplin	£64.95
InterLisp/65		Maplin	£87
Extended FigForth	full implementation	Silica Shop	£28.45
Pascal	requires two disc drives	Silica Shop	£35.95

BBC MICRO

Forth	cassette-based system	Acornsoft	£16.85
Lisp	5.5K machine-code cassette	Acornsoft	£16.85
BCPL	16K ROM	Acornsoft	
Cesil	cassette-based	Webb	£8
r q Forth	cassette-based	Level 9 Computing	£10
Logo II	graphics programming	Computer Concepts	£10
Forth	ROM-based system	HCCS Associates	£34.72

DRAGON 32

Dragon Forth	FigForth and Basic	Oasis Software	£18.95

COMMODORE VIC-20

VicForth	plug-in cartridge	Adda	£38.95
Forth	plug-in cartridge	Audiogenic	£24.95
BUTI	Extension to Basic	Audiogenic	£39.99

COMMODORE 64

Petspeed	Basic compiler	Oxford Computer Systems	£125

COMMODORE PET

Forth	FigForth with extensions	Kobra	£172
Petspeed	Basic compiler	Oxford Computer Systems	£125

RESEARCH MACHINES

Cobol	version of Cis Cobol compact	Research Machines	£325
Cobol	standard version	Research Machines	£425
Pascal	UCSD 8in. disc systems only	Research Machines	£180
TCL Pascal	for all disc systems	Research Machines	£120
Logo	includes turtle graphics	Research Machines	
Fortran IV	scientific language	Research Machines	£199
Z-80 Algol	structured language	Research Machines	£99
Cesil	interpreter	Research Machines	£14

TANDY TRS-80

Pilot	cassette-based interpreter	Molimerx	£12
Basic 80	disc-based CP/M interpreter	Molimerx	£195
Basic Compiler	full Basic compiler needs 32K	Molimerx	£115
Basic Compiler	works under TRS-DOS	Molimerx	£199
Basic Compiler	runs under CP/M	Molimerx	£199
Enhanced Basic	cassette or disc	Molimerx	£24/£27
Extended Basic	disc-based advanced language	Molimerx	£94.50
Fortran	disc-based compiler	Molimerx	£65
Pascal	compiler, requires two disc drives	Molimerx	£60
PL/B	highly structured Basic	Molimerx	£97.50
MicroCobol	business language	MPSL	£400
Tiny Pascal	models 1 and 3	Tandy dealers	£14.95/ £12.95
Logo	ROM pack for color Computer	Tandy dealers	£29.95
Logo	disc-based	Tandy dealers	£49.95

Suppliers

Acornsoft Ltd 4a Market Hill, Cambridge CB2 3NJ

Adda Computers Mercury House, Hanger Green, London W5 3BA

Apple dealers — contact Apple Computer (U.K.) Ltd, Eastman Way, Hemel Hempstead, Hertfordshire HP2 7HQ. Telephone: (0442) 60244.

Audiogenic Ltd PO Box 88, Reading, Berkshire.

ASRO Information Systems Ltd. PO Box 159, Brighton, Sussex BN1 3LU. Telephone: (0273) 21979.

Baker 23 Dalford Court, Hollinswood, Telford, Shropshire.

Computer Concepts 16 Wayside, Chipperfield, Hertfordshire WD4 9JJ. Telephone: (09277) 62955.

Computer Solutions Treway House, Hanworth Lane, Chertsey, Surrey KT16 9LA. Telephone: (09328) 65292.

Crystal Research 40 Magdalene Road, Torquay, Devon. Telephone: (0803) 22699.

Digital Equipment Corp. PO Box 53, Reading, Berkshire. Telephone: (0734) 868711.

Digital Devices 134 London Road, Southborough, Tunbridge Wells, Kent. Telephone: (0892) 37977.

Digital Research Oxford House, Oxford Street, Newbury, Berkshire RG13 1JB

KobraMicro Marketing Farm Road, Henley-on-Thames, Oxfordshire.

Inner Product Eagle House, 73 Clapham Common South Side, London SW4 9DG.

(continued on next page)

Level 9 Computing 229, Hughenden Road, High Wycombe, Buckinghamshire HP13 5PG. Telephone: (0494) 26871.
Lifeboat Associates PO Box 125, London WC2H 9LU. Telephone: 01-836 9028.
Microprocessor Engineering 21 Hanley Road, Shirley, Southampton SO1 5AP. Telephone: (0703) 775482.
Micro Focus contact Microcomputer Products International, 8/11 Cambridge House, Cambridge Road, Barking, Essex. Telephone: 01-591 6511.
Maplin PO Box 3, Rayleigh, Essex. Telephone: (0702) 552911.
Molimerx 1 Buckhurst Road, Town Hall Square, Bexhill-on-Sea, East Sussex. Telephone: (0424) 220391.
MPSL, 87-89 Saffron Hill, London EC1. Telephone: 01-831 8811.
Oasis Software Lower North Street, Chedder, Somerset. Telephone: (0934) 515265.
Oxford Computer Systems. Hensington Road, Woodstock, Oxford OX7 1JR. Telephone: (0993) 812700.
Pete and Pam New Hall Hey Road, Rossendale, Lancashire BB4 6JG. Telephone: (0706) 227011.
Prospero Software 37 Gwendolen Avenue, London SW15 6EP. Telephone: 01-785 6848.
Research Machines Mill Street, Oxford OX2 0BW. Telephone: (0865) 49866.
Richards Computer Products Brookside, Westbrook Street, Blewbury, Didcot, Oxfordshire OX11 9QA. Telephone: (0235) 850218.
Silica Shop 1-4 The Mews, Hatherley Road, Sidcup, Kent DA14 4DX. Telephone: 01-301 1111.
Small Systems Engineering 2-4 Canfield Place, London NW6 3BT. Telephone: 01-328 7145.
Software Ltd Duchess House, 18/19 Warren Street, London W1P 5DB. Telephone: 01-387 9927.
Systemics 21-23, The Bridge, Harrow, Middlesex HA3 5AG. Telephone: 01-863 0079.
Tamsys Pilgrim House, 2-6 William Street, Windsor, Berkshire SL4 1BA. Telephone: Windsor 849462.
TCL Software 59/61 Theobalds Road, London WC1X 8SF.
Xitan 23 Cumberland Place, Southampton SO1 2BB. Telephone: (0703) 38740.

Basic comparison

This chart compares 10 versions of Basic, the most popular microcomputer language, as found on a representative cross-section of micros. The Sinclair Spectrum, Dragon 32 and Atari 400 are basically home computers; the Lynx, the Atari 800, the BBC and Commodore 64 sit in the middle ground; and the Newbrain and Epson are portables, both with the powerful Basic normally associated with "serious" micros. The IBM PC is a 16-bit micro aimed more at the business user than the hobbyist and the Tandy model III is a fairly typical eight-bit micro. What is remarkable is not the differences between machines, but what they have in common. Remember that more commands does not necessarily mean a more powerful or easier to use system. A good example is the graphics commands on the Dragon 32 — there are a lot of them, but they are difficult to use.

	Sinclair Spectrum	Dragon 32	Lynx	Grundy Newbrain	Atari Basic	Commodore 64	BBC Basic	Epson HX-20	IBM PC	TRS-80 I and III
Variable name										
long	●				●		●	●	●	
short	●	●	1char	●	●	●		●		●
Numeric types										
integer						●	●	●	●	●
floating point	●	●	●		●	●	9 sig figs	●	●	●
double precision								●	●	●
Declarations										
DEF INT, SNG, DPL, STR								●	●	●
Arrays										
DIM	●	●	●	●	●	●	●	●	●	●
numeric	●	●	●	●	●	●	●	●	●	●
string	●	●		●		●	●	●	●	●
double precision								●		●
multi dimensional	●	●		●	2 max	●	●	●	●	●
OPTION BASE				●				●	●	
Arithmetic										
binary floating point	●			●				●	●	●
16-bit integer								●	●	
BCD floating point					●					
Operators										
arithmetic: *, /, +, −	●	●	●	●	●	●	●	●	●	●
relational: <, >, =	●	●	●	●	●	●	●	●	●	●
AND	●	●	●	●	●	●	●	●	●	
/ DIV: integer division							●		●	
XOR, EOR: exclusive Or							●	●	●	
NOT	●	●	●	●	●	●	●	●	●	
OR	●	●	●	●	●	●	●	●	●	
IMP: implication								●	●	
string concatenation	●	●	●	●	●	●	●	●	●	
string relational	●	●		●			●			●
Functions										
ABS: absolute magnitude	●	●	●	●	●	●	●	●	●	●
ACS, ARCCOS: arc cosine	●		●				●			
ADR: address of string					●					
ADVAL: analogue/digital conversion							●			
ALPHA: location of character			●							


	Sinclair Spectrum	Dragon 32	Lynx	Grundy Newbrain	Atari Basic	Commodore 64	BBC Basic	Epson HX-20	IBM PC	TRS-80 I and III
ANTILOG			•							
ARCSIN, ASN	•		•				•			
ARCTAN, ATN	•	•	•	•	•	•	•	•	•	•
ASC/CODE: ASCII code of first letter	•	•		•	•	•	•	•	•	•
BIN: binary number	•		•							
CDBL: convert to double precision									•	•
CHR$: character string	•	•	•	•	•	•	•	•	•	•
COS: cosine	•	•	•	•	•	•	•	•	•	•
DEG: radians to degrees			•		•		•			
DPEEK: two-byte Peek			•							
EXP: e raised to power	•	•	•	•	•	•	•	•	•	•
FACT: factorial			•							
FIX: transaction		•						•	•	•
FN: user-designed function	•			•		•	•	•	•	
FRE, FREE, MEM: remaining memory		•	•	•	•	•	•	•	•	•
FRAC: fractional port			•							
GETN, GET$, INKEY$: checks keys pressed	•	•	•	•	•		•	•	•	•
HEX$		•						•	•	
INF: simulates infinity			•							
INSTR: string-in-string search		•		•			•	•	•	
INT, CINT: integer part	•	•	•	•	•	•	•	•	•	•
LEFT$, RIGHT$: string slicing		•	•	•		•	•	•	•	•
LEN: length of string	•	•	•	•	•	•	•	•	•	•
LN, LOG: natural logarithm	•	•	•	•	•	•	•	•	•	•
LOG: base-10 logarithm			•				•			
MID$: string slicing		•	•	•		•	•	•	•	•
MOD: modulus							•	•	•	
NOT: returns 1 if x = 0, otherwise returns 0	•				•					
OCT$: octal conversion								•	•	
PEEK: look at memory byte	•	•	•	•	•	•		•	•	•
PI: 3.14159265	•		•	•			•			
POINT: look at pixel	•	•			•		•		•	•
POS: cursor position		•	•	•	•	•	•		•	•
RAD: degrees to radians			•		•		•			
RND, RAND: random numbers	•	•	•	•	•	•	•	•	•	•
SGN: sign determination	•	•	•	•	•	•	•	•	•	•
SIN: sine	•	•	•	•	•	•	•	•	•	•
SQR: square root	•	•	•	•	•	•	•	•	•	•
STR$: character to string	•	•		•	•	•	•	•	•	•
STRING$: copies string		•					•	•	•	•
TAN: tangent	•	•	•	•		•	•	•	•	•
TIME, TIMER: returns current time		•					•	•	•	•
UPC$: converts to upper case			•							
USR: machine-code jump	•	•			•	•	•		•	•
VAL: string to number	•	•	•	•	•	•	•	•	•	•
VAL$: number to string	•									
VAPTR: variable pointer		•							•	•
Control of program flow										
GOTO (line number)	•	•	•	•	•	•	•	•	•	•
GOSUB-RETURN	•	•	•	•	•	•	•	•	•	•
ON..... GOTO, GOSUB		•		•	•	•	•	•	•	•
GOTO (label)			•							
IF-THEN	•	•	•	•	•	•	•	•	•	•
IF-THEN-ELSE		•	•				•	•	•	•
WHILE-WEND			•					•	•	
PROC-ENDPROC			•				•			
FOR-NEXT-STEP	•	•	•	•	•	•	•	•	•	•
REPEAT-UNTIL			•				•			
CALL, EXEC, SYS		•	•			•	•		•	
STOP	•	•	•	•	•	•	•	•	•	
END		•	•	•	•	•	•	•	•	•
CONT, CONTINUE	•	•	•	•	•	•		•		•
PAUSE, WAIT	•		•			•			•	

(continued on next page)

(continued from previous page)

	Sinclair Spectrum	Dragon 32	Lynx	Grundy Newbrain	Atari Basic	Commodore 64	BBC Basic	Epson HX-20	IBM PC	TRS-80 I and III
EDIT: call editor	●	●							●	●
REM: comment line	●	●	●	●	●	●	●	●	●	●
RUN:	●	●	●	●	●	●	●	●	●	●
LIST:	●	●	●	●	●	●	●	●	●	●
NEW:	●	●	●	●	●	●	●	●	●	●
DEL, DELETE		●	●	●			●	●	●	●
RENUM: renumbers program		●	●				●	●	●	
AUTO			●				●	●	●	●
MON: calls monitor			●					●		
CLEAR: deletes variables	●			●			●	●	●	●
SYSTEM: return to DOS									●	●
BYE					●					
OLD							●			
ERASE: clear specific arrays								●	●	
Cassette commands										
BGET#, GET #: get byte						●	●			
BPUT#, PUT #						●	●			
APPEND			●							
LOAD, CLOAD	●	●	●	●	●	●	●	●		●
MLOAD: machine-code load	●	●	●				●	●		
SAVE, CSAVE	●	●	●	●	●	●	●	●		●
TAPE: alter baud rate			●							
VERIFY	●		●	●		●				●
MERGE	●			●				●		●
AUDIO		●								
EOF #		●					●	●		●
MOTOR: turns motor on		●						●	●	
SKIPF: skip to end of program		●								
INPUT#: input data		●				●	●			
PRINT#: write data		●				●	●			
OPEN#						●	●			
CLOSE#		●				●	●			
CHAIN							●		●	
Editing commands										
Abbreviations				●						●
AUTO			●					●	●	●
DEL, DELETE		●	●	●		●		●	●	●
EDIT	●	●							●	●
Multi-statement line	●	●		●	●	●	●	●	●	●
Screen Editor	●			●	●	●		●		
Line editor		●	●	●		●	●	●		●
RENUM, RENUMBER		●	●				●		●	
Listing device commands										
LLIST, LIST	●	●	●		●		●	●	●	●
OPEN: opens channel		●				●			●	
PRINT, LPRINT	●	●	●		●	●	●	●	●	●
LINK			●							
COPY: screen-printer dump	●							●		
LIST O: list option							●			
Disc Commands	Microdrive commands CAT CLOSE# DELETE ERASE FORMAT MOVE OPEN#			CLOSE GET # FILE$ INPUT# LINPUT# LOAD# LIST# MERGE# OPEN PRINT# PUT # SAVE# VERIFY#	CLOSE DOS LOAD NOTE OPEN POINT PRINT PUT SAVE STATUS XIO	CLOSE CMD GET # INPUT# LOAD OPEN PRINT# SAVE VERIFY	BGET# BPUT# CLOSE# EOF # EXT # INPUT# LOAD OPEN IN OPEN OUT PRINT# PTR# SAVE		BLOAD BSAVE CLOSE FILES GET INPUT# LINE INPUT# KILL LOAD MERGE NAME OPEN PRINT# PRINT# USING PUT RESET SAVE WRITE#	CLOSE CMD GET # INPUT# OPEN PRINT# CVD CVI CVS CDBL CINT CSNG MKD$ MKI$ MKS$ EOF KILL LOF FIELD LSET RSET
Input/Output statements										
DATA-READ	●	●	●	●	●	●	●	●	●	●
RESTORE	●	●	●	●	●	●	●	●	●	●
RESTORE (line number)	●		●	●			●		●	
GET				●	●	●	●	●	●	
INPUT	●	●	●	●	●	●	●	●	●	●
LINE INPUT, LINPUT		●		●				●	●	●
KEYN: code of key pressed			●					●		
PRINT	●	●	●	●	●	●	●	●	●	●
PRINT AT, PRINT@	●	●	●							●
PRINT USING		●						●	●	●
TAB	●	●	●	●		●	●	●		●
WIDTH							●	●		

	Sinclair Spectrum	Dragon 32	Lynx	Grundy Newbrain	Atari Basic	Commodore 64	BBC Basic	Epson HX-20	IBM PC	TRS-80 I and III
SPC: Space						●	●	●		●
POS: returns cursor position			●	●	●	●	●	●		
CLS: clear screen	●	●	●				●	●	●	●
BRIGHT	●									
FLASH	●									
INK: ink colour	●		●							
INVERSE	●									
PAPER: background colour	●		●							
OVER	●									
CCHAR: defines cursor character			●							
CFR: set cursor rate			●							
OUT: byte to port	●		●							●
IN, INP: value of port	●		●							●
ROUND ON, ROUND OFF			●							
EVAL							●			
VPOS, CSRLIN			●				●	●		
VDU							●			
SCROLL	●							●		
COUNT: counts printed characters							●			
COLOUR							●		●	
LOCATE: position cursor									●	
WRITE									●	
Other Basic Statements										
LET	●	●	●	●	●	●	●	●	●	●
TROFF: trace off		●	●				●	●	●	
TRON: trace on		●	●				●	●	●	
CODE: stores hex			●							
ERROR: generates error code			●	●			●	●	●	●
EXT: allows for extensions			●							
RANDOM, RANDOMIZE	●		●	●					●	●
RESERVE: moves stack			●	●						
SWAP: swaps two variables			●						●	
ATTR: attribute	●									
SCREEN$	●									
ON ERROR GOTO				●			●	●	●	●
REPORT				●			●			
ERL: error line number				●			●	●	●	
LOCAL: local variable							●			
OPT: option							●			
DATE$								●	●	
DAY								●		
Machine language	PEEK POKE USR	DEFUSR EXEC PEEK POKE USR VARPTR	full machine-code monitor	CALL FREE GET PUT RESERVE TOP PEEK POKE	ADR PEEK POKE USR	PEEK POKE SYS USR	CALL HIMEM LOMEM PAGE TOP USR	CALL DEF SEG DEF USR PEEK POKE USR VARPTR	DEFUSR INP OUT PEEK POKE VARPTR	DEFUSR EXEC PEEK POKE USR VARPTR
Graphics commands	BORDER CIRCLE DRAW INK OVER PAPER PLOT	CIRCLE COLOR DRAW GET LINE PAINT PCLEAR PCLS PCOPY PMODE PRESET PSET PUT RESET SCREEN SET	DRAW INK MOVE PAPER PLOT WINDOW	OPEN COLOR DRAW DRAWBY MOVE MOVEBY TURN TURNBY CENTRE RANGE DOT ARC AXES FILL BACK-GROUND WIPE MODE	COLOR DRAWTO GRAPHICS SET COLOR LOCATE PLOT	Peek and poke only PLOT VDU	CLG COLOUR DRAW GCOL MODE MOVE PRESET POINT PUT SCREEN	CIRCLE COLOR DRAW GET LINE PAINT PSET	SET RESET Peek and pokes	GRAPHICS COLOR SCREEN LINE PSET PRESET
Sound commands	BEEP	PLAY SOUND	BEEP SOUND	need additional hardware	SOUND	Peek and Poke only	ADVAL ENVELOPE SOUND	BEEP SOUND	additional hardware	SOUND
Sensing world	IN OUT	JOYSTK	INP OUT	GET and PUT	PADDLE PTRIG STRICK STRIG	Peek and Poke	ADVAL	COM ON COM ON PEN GOSUB ON STRIG GOSUB PEN STRIG OUT INP STICK	IN OUT	Peek and Poke requires extra hard- ware

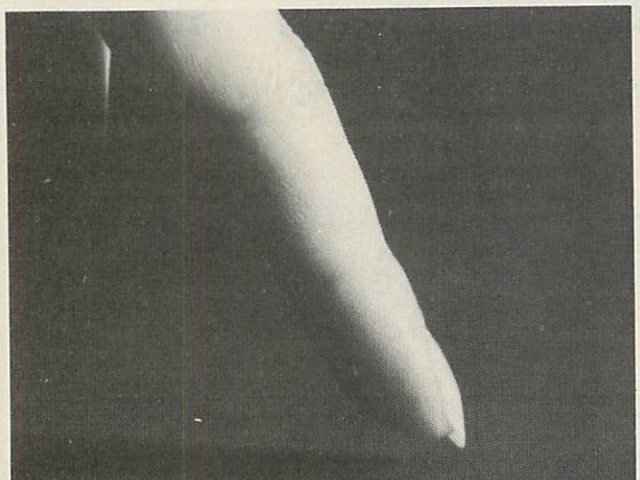

With this simple tool, and plain English, you can create your own microsoftware

It sounds so easy . . . and it is!

Gone are the days when business persons needed to learn a complex computer language to write their own application programs, enter the program generator. Dynatech Microsoftware are specialists in the development of program generators such as Codewriter, designed to enable beginners to write their own systems in English.

Also available is Techwriter, a program generator for the professional which saves 90% of program development time, provides information faster and improves efficiency.

Dynatech program generators are available for most popular microcomputers.

DYNATECH MICROSOFTWARE LTD.

Summerfield House, Vale, Guernsey, C.I.
Telephone: 0481 45934. Telex: 4191130.

For further details on Dynatech's Program Generators please complete this coupon.

What type of microcomputer do you have or are considering purchasing? _____

Name _____

Address _____

_____

Telephone no. _____ PC

● Circle No. 170

P.M.S. Developments

0432-265768

**22 Tarsmill Court
Rotherwas Ind. Est.
Hereford**

ZENITH 16-Bit Computer with High Resolution Colour Graphics (640 by 250), 8088 and 8085 processors, 128K user ram, 2 DSDD 320KB drives, 2 Serial ports, 1 Parallel port, Disk controller supporting 4 each 8″ drives and 4 each 5.25″ drives, 4 slots of S-100 bus for options, Light-pen socket. Supplied with MSDOS, CP/M85 and 16-Bit Microsoft Colour Basic with FULL GRAPHICS implementation, complete documentation including MSDOS assembler listings (7 manuals).

With 12 Month Warranty. From £2,072

8″ DISK SUBSYSTEM, Capacity: 2.4MBytes, 2 Double-sided Double Density Drives in case 9″w x10″h x18″d with PSU, Fan, 50-way data connector, 1.5M data cable, mains cable.

Only £1,050

ZENITH ZVM-121 12″ Green screen monitors	**£85.00**
OSBORNE I personal computer and software	**£1,250**
OSBORNE II Double Density Disk model Supplied with FREE 12″ Green Monitor!	**£1,375**

INTELLIGENT EPROM PROGRAMMER. 4K Buffer, RS 232. Interface.
Programs: 2716, TMS 2716, TMS 2516, TMS 2508, TMS 2708, 2732, 2532, TMS 2532. On screen editing, Can be used with Terminal only!.....£349.00

COLOUR MONITOR, 13 inch RGB monitor. Bandwidth: 20 MHz resolution 684 lines × 480 lines. **£400**


COLOUR SOFTWARE: Wordstar and Supercalc

All types of Printers supplied

We are unable to list all our items. If you would like details of these or more information on the above, please contact us.

Please add VAT to all prices.

● Circle No. 172

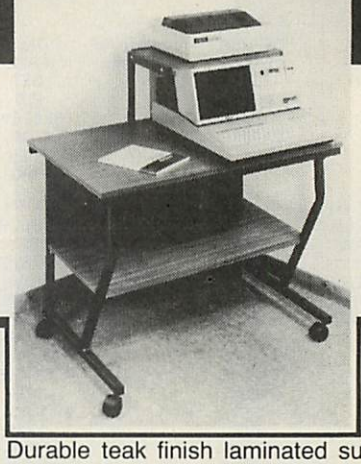

COMPUTER STANDS

From **£38.00*** + VAT

A full range of moderately-priced robust units for offices, schools and computer rooms

Durable teak finish laminated surfaces, rugged steel frames, simple assembly without tools.
Optional features include **. . . Modesty panels . . . Storage shelves . . . VDU turntables . . . Security devices . . . Corner units . . . Double roller castors . . . Monitor shelves.**


- Stands also supplied custom-wired
- Repairs to personal computers and instrumentation
- Authorised Sharp Service Centre

**With 3ft x 2ft worktop and height-adjustable gliding feet*

PROTOTYPE DEVELOPMENT SYSTEMS LTD

Enterprise House, 44-46 Terrace Road,
Walton-on-Thames, Surrey, KT12 2SD
Telephone: Walton-on-Thames (093 22) 45670

● Circle No. 174

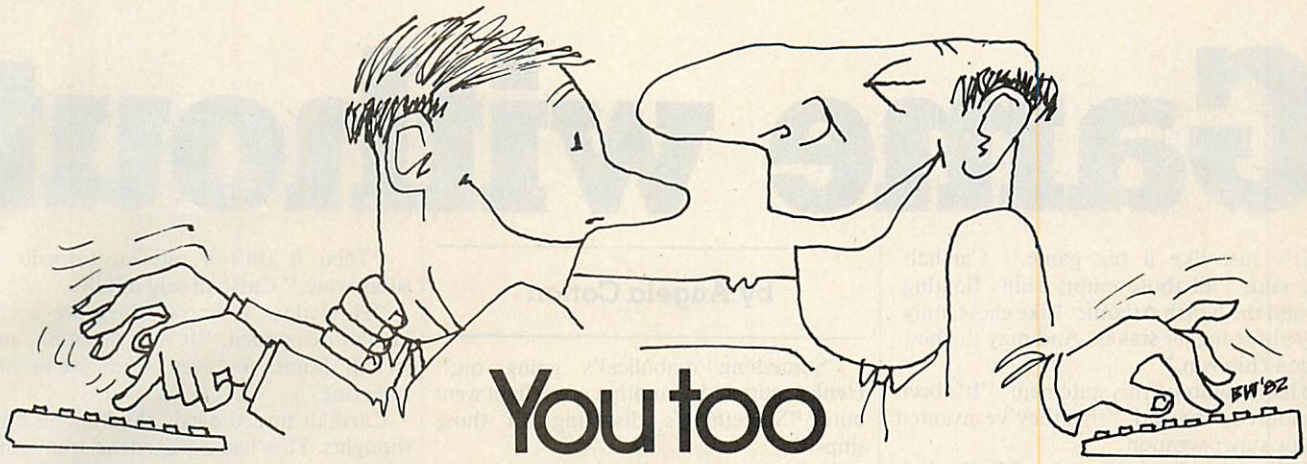

You too can be a good mixer

PRO PASCAL Full ISO Standard Pascal **PRO FORTRAN** Full ANSI 66 Fortran

These implementations individually meet the most demanding requirements. And they can be combined together, allowing applications to take advantage of the best features of each language.

Available now for Z80 micros with CP/M or CDOS. Versions for 8086 and 68000 under development.

Prospero
LANGUAGES FOR MICROCOMPUTERS

Prospero Software Ltd. 37 Gwendolen Avenue London SW15 6EP Tel: 01-785 6848

● Circle No. 173

HIGH QUALITY FLOPPY DISKS AND ACCESSORIES

NASHUA and **BASF** are two of the World's leading magnetic media manufacturers. We stock only the best!!

FREE Plastic Library Box with every ten disks ordered.

5.25" DISKS – Boxes of 10

	1–4	5–9
BASF 606-1 S/Sided: S/Density: S/Sect: 40 track.	£17.00	£16.50
BASF 606-1D S/Sided: D/Density S/Sect: 40 track.	£20.90	£19.90
BASF 606-2D D/Sided: D/Density: S/Sect: 40 track	£24.90	£23.90
NASHUA MD1 S/Sided: S/Density S/Sect: 40 track	£16.90	£16.40
NASHUA MD1D S/Sided: D/Density: S/sect 40 track	£18.95	£18.55
NASHUA MD2D D/Sided: D/Density: S/Sect: 40 track	£23.00	£22.00
NASHUA MD1F S/Sided: Quad Density: 77 track	£25.50	£25.00
NASHUA MD2F D/Sided: Quad Density: 77 track	£32.90	£32.20

8" DISKS – Boxes of 10

	1–4	5–9
BASF 606-1 S/Sided: S/Density: S/Sect:	£19.60	£18.90
BASF 606-1D S/Sided: D/Density S/Sect:	£23.80	£22.50
BASF 606-2D D/Sided: D/Density: S/Sect:	£27.60	£25.80
NASHUA FD1 S/Sided: S/Density S/Sect:	£20.50	£19.50
NASHUA FD1D S/Sided: D/Density: S/sect	£24.00	£23.50
NASHUA FD2D D/Sided: D/Density: S/Sect:	£26.80	£25.20

Hard sectored disks 5.25" and 8" at same prices

ACCESSORIES

Additional Library Boxes 5.25"	£2.10
Additional Library Boxes 8"	£2.40
Lockable Trays. Capacity 50. 5.25"	£14.00
Lockable Trays. Capacity 90. 5.25"	£18.00
Head Cleaning Kit (inc. 50 Discs + Fluid)	£16.50
PETKITS. Head Cleaning Kit recommended by Commodore	£28.00

POSTAGE AND PACKING RATES (U.K.)

5¼ Disks	75p/Box:	8" Disks	£1.30/Box:
Lib Box	50p/Box:	Lockable Tray	£2.10
Head Cl. Kit	£1.30	Petkit	£2.30

ALL PRICES EXCLUDE VAT

MICRODISC have been supplying Computer Consumables for over five years and we pride ourselves on our reputation for RELIABILITY, SERVICE and KEEN PRICES.
Same day despatch. Hosts of other items in stock

ORDER FORM PC

QTY.	ITEM DESCRIPTION	TOTAL
		£
		£
		£
		£

TOTAL POSTAGE/PACKING £.....

TOTAL EXCL. VAT £.....

VAT at 15% £.....

TOTAL CHEQUE/P.O. £.....

Name:.....

Address:.....

.....Tel.No:.....

MICRODISC
150 HOLLAND STREET, GLASGOW G2 4NG.
Tel: 041-331 2777/8

● Circle No. 171

Game without

by Angela Cotton

"It's just like a big game," Carshalt said, "all those empty ships floating around the North Atlantic. Like chess, only played for higher stakes. And may the best silicon chip win."

Henley ignored this statement. "It's been rumoured," he said, "that they've invented a new super-weapon."

"Oh, what kind of weapon?" Carshalt asked cheerfully. The game needed livening up.

"The rumour doesn't say. We don't know anything about it, except that it seems to work."

"Overcomes jamming, I expect," Carshalt opined flippantly. Henley looked sad.

"No, it's better than that. Not electromagnetic at all: can't be stopped. We can't even detect the damn thing."

"Probably uses a different wavelength," Carshalt said. "There are a few bands considered so useless that we never bothered with them."

Henley shook his head. "Not EM at all," he repeated.

Well, why not? Carshalt thought. They had exhausted that line of research. Nevertheless, the news disturbed him a little. Secure in their laboratories with their computers and their simulated weapons, the scientists were out of touch with the realities of the game. Carshalt could barely conceive of this war as being real, could not picture the real ships which the computers moved about the sea.

To widen his horizons, he had read about the wars of the past, incredulously picturing soldiers running at one another with swords or bayonets. He read with disbelief the learned theses designed to prove that nuclear war would be final. But most homes had a fallout shelter now, and men no longer served in modern war machines. Strategic nuclear weapons had never been used anyway.

War held no horrors for Carshalt; it was all unreal, no less than the electronic drama of the present. They were civilised now. They played their games with computers.

Henley had left the room. Carshalt followed him to join Commander Finns RN, in the adjacent terminal room. Here one could watch the light move about on the large screen, following the computer-controlled movements of the fleet. Picturesquely, the enemy ships were indicated by red. There were few of them; nothing like the number which the simulations and previous wars had led the computer to expect. Their own ships were denoted by green and were steadily decreasing in number.

"Something diabolical's going on," Henley muttered as another green light went out. "Something's disabling all those ships."

The spot where the ship had been was now showing yellow, indicating that an aircraft or another ship had picked up on its radar the inert hulk of metal.

"They're not hitting us with their missiles. Our computers just stop working," Finns accused Henley, who had helped to equip those ships and to program their computers.

Finns had been watching it all day as ship after ship found its computer system failing to operate.

"It's clever, I agree," said Carshalt. "First they disable them, then the big ships or the aircraft move in with their missiles." He noticed that one of the red lights had moved and was now closer to the yellow. In a while, a missile would be fired at the undefended ship, the yellow light would be gone and another ship sunk.

It would not take long: the ships were quite close together. Their separation was determined by that compromise which made a strike most difficult for the enemy at minimum cost to their own missile accuracy. Under normal circumstances it would mean deadlock, for the automatic attack and defence systems were evenly matched. It had always meant deadlock, until now.

"There's nothing we can do, they're just wiping us out one by one," Henley moaned. He reminded Carshalt of a chess player who was watching his opponent systematically removing his pieces from the board without regard to the rules of the game.

"I expect Command computer will recommend surrender at any moment now before we lose all our ships," Henley added. "Not to mention billions of pounds worth of equipment."

The stakes are higher than that, Carshalt thought. Aloud he asked, "What do the aircraft instruments show us of this 'super weapon'?"

"Nothing. Absolutely nothing except sea-clutter. There's just nothing there, either under the sea or above it."

"Then it's something your instruments can't detect," Commander Finns observed shortly. Henley reacted in anger to this criticism of his scientific work. "There's nothing there. We can detect a missile as short as this —" he spread his arms "— and there are none around. Not a single missile, torpedo or submarine."

"Then it isn't a missile, torpedo or submarine," Carshalt said mildly.

"How does it know where we are?" Henley demanded. "It isn't radiating, and it still homes in even when we're not radiating."

Carshalt turned away, thinking his own thoughts. They had expected this war — this game — to be like all the others, with the only losses those caused by faulty equipment, ending in stalemate. It had happened every time ...

A shout from Finns brought him back to reality. "Look at this, Henley."

"What? Oh, my God! I never thought it would ..."

Carshalt turned too, his eyes enquiring of Henley what had happened.

"Command computer recommended surrender, and the recommendation went through ... but they won't let us. They won't let us!" He was almost screaming it. Carshalt walked over to the printed message on Finns' terminal.

In the two relevant languages, it said: "Our Command computer regrets that surrender cannot be accepted at this stage. It is too late to alter our plans until 0900 GMT. We will, however, cease from sinking those ships which have been disabled."

"Nine o'clock!" Henley exploded. "Information travels at the speed of light, and they can't tell their ships to stop till tomorrow morning!"

"They aren't using EM radiation," Carshalt reminded him quietly.

"Dammit man, what are they using?" Henley rounded on him.

"I have an idea ... but it's too fantastic." He turned to Finns, "Can you get me some of the video tapes from aircraft fly-bys?"

Finns nodded and typed something on the keyboard in front of him. Unnoticed behind him, another green light winked out and became yellow. The yellow light did not go out.

"Why did we ever let it start?" Henley moaned. He was beginning to realise what it meant.


"We didn't start it," Finns said stiffly. "It was their inexcusable actions."

We didn't have to declare war just because of them occupying a petty little state like that ... "

We declared war, Carshalt mused, because it was the thing to do. Because we thought it would make our position clear; then the war would end in stalemate and we'd compromise and they'd water down their demands and nobody would lose face.

He stared at the TV monitor on which the video tapes were being displayed, pondering

rules

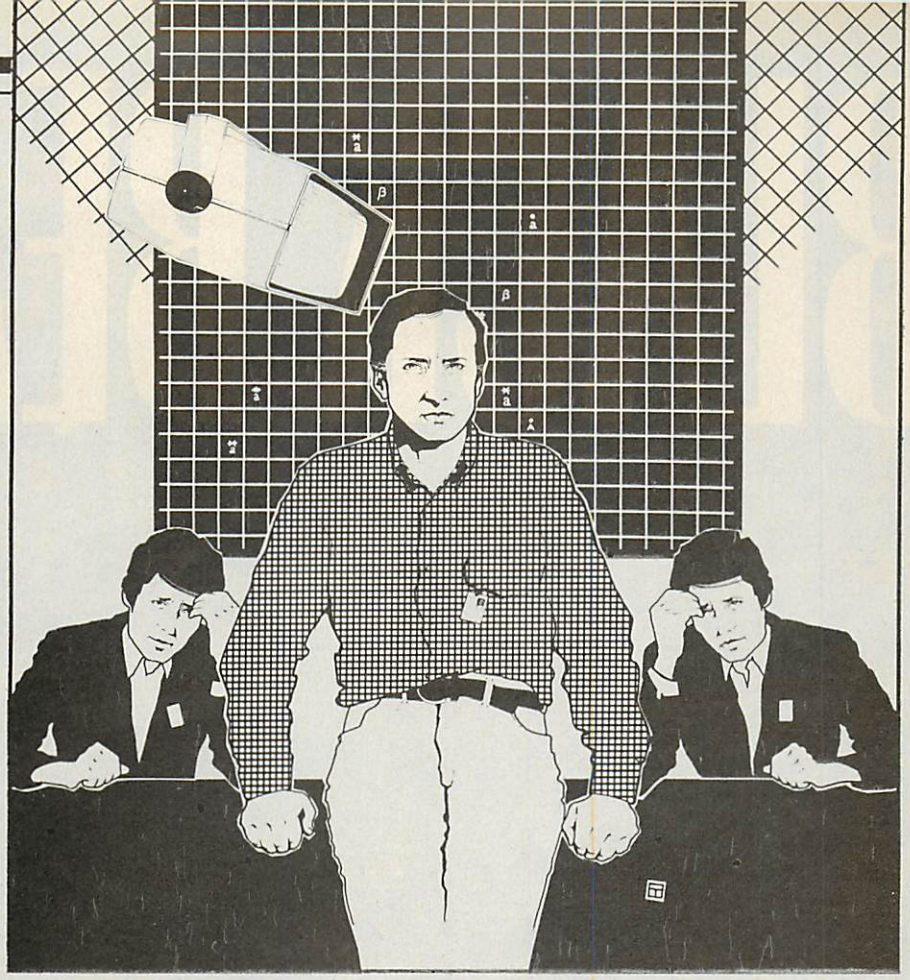

how sour the game had turned. Behind him, Finns and Henley were discussing the non-use of the nuclear option. It was one of the rules of the game that if you had pledged not to be the first to use strategic nuclear weapons, then you did not do so. Command computer had no doubt been programmed with that rule.

Ignoring the conversation, Carshalt watched the video. Daylight TV, low-light TV, thermal imager: he could take his choice, but it would do him no good. The quality of the tape was poor. It had been computer enhanced, and it was still poor. Better, but still poor. Useless for his purpose.

"Damn computer," Carshalt said. "It was programmed with what to expect, so that when the unexpected came it processed it right out of the picture."

"We thought we knew what to expect," Henley said. His team had produced the software for the video processing. "We knew all their electronic capabilities, just as they do ours. In the simulations —"

"Forget your simulations," Finns said. He turned to Carshalt: "What did you expect to see?"

"Until today, the same as Henley." Carshalt headed a research team, too. He was not blameless in the catastrophe that had befallen them. "Now I'm not sure. Something, maybe, so small that it's indistinguishable from the sea background, moving almost at random, so slowly that Doppler radar won't notice it, something using so little heat that it's effectively the same temperature as the sea."

"No such thing exists," Henley said. "You need power, a homing device, speed and manoeuvrability."

"It exists," Carshalt stated, "and it's knocking out our ships. Look."

They looked. The fleet had been decimated. Yellow lights, disabled ships, were dotted about the screen. As promised, they had not actually been sunk. Without the ships to protect them, the aircraft were being shot down. Command had ceased its reconnaissance flights, knowing they were useless against the invisible enemy.

A new message appeared on Finn's screen.

"The PM's personally offered to surrender," Henley read, "but their Command computer says it isn't possible yet. But we're still choosing not to go nuclear. Damn them, this'll cost a fortune to rebuild."

Carshalt changed the subject. He had lost interest in the game, but he wanted to understand the secret weapon: "Are there any unenhanced tapes available?"

"Of course not," Henley snapped. His thoughts still ran on the tramlines of the game. Too bad.

"Then tell Command to get one. I want an aircraft to fly as low as possible over any ship beginning to show computer malfunctions. Use every wavelength we can get, and I want the raw tapes. I don't care if we lose the plane."

"It's beyond my authority to order that," Finns said, but he typed his request on the console, and they waited.

Tapes came for Carshalt, and he viewed them while they waited. A message arrived, formally accepting surrender from 0900 and promising that an occupying force and machines would be sent in anticipation of that time.

Messages came from their allies, regretting the situation but reaffirming that no aid could be sent. The country had started the war alone, and alone she must face the consequences.

As nine o'clock approached, Carshalt found what he was looking for. He knew now why the computer couldn't find the secret weapon. Programmed with the rules of the game, it failed to recognise the pattern of the weapon and subtracted it with the noise from any sensor on which it registered. The computer was blind to it.

The scene showed on daylight TV. Carshalt replayed it, adjusting the contrast and brightness, marvelling at the daring of it. They almost deserve to win, he thought, if they can make a scheme like this work.

He called Henley and Finns over, and replayed the tape. It was a beautiful shot, catching the secret weapon in the act of destruction. In spite of himself, Carshalt smiled. They might have lost the game, but at least they knew the weapons that had beaten them.

Then he smiled again at the expressions on the other two faces as they realised what he was showing them. Henley was incredulous; Finns' stern face cracked into an expression of horror, then almost amusement. "Why, it's barbaric — how could they dare?"

"Wars always used to be barbaric," Carshalt reminded him. "Why should it be different now, just because we do it in a civilised way with electronics and computers?"

Carshalt froze the replay and let them look at the scene more closely.

The man stood on the edge of the ship, barely holding the rifle with which he had systematically sabotaged the entire computer network. Below him, barely in view, was the vessel in which he had rowed, or perhaps earlier sailed, to reach the ship. His companion waited for him.


Carshalt released the Freeze button and let the tape play on to its end, watching without sorrow as the small boat suddenly keeled over, and the man with the rifle swayed and lost his balance and slipped into the sea. Seconds later the scene exploded as the undefended aircraft, which had recorded the scene guided only on this kamikaze course, was hit by a missile.

Alone now, the dead ship floated uselessly, at the cost only of two expendable enemy lives.

"Just a simple game," Carshalt muttered, "a game without rules." But only one side had been playing the game. It was nine o'clock and they had lost for real.

Beyond him, out in the street, screams were heard as the first enemy tanks rolled into London.

BLACK BEAUTY

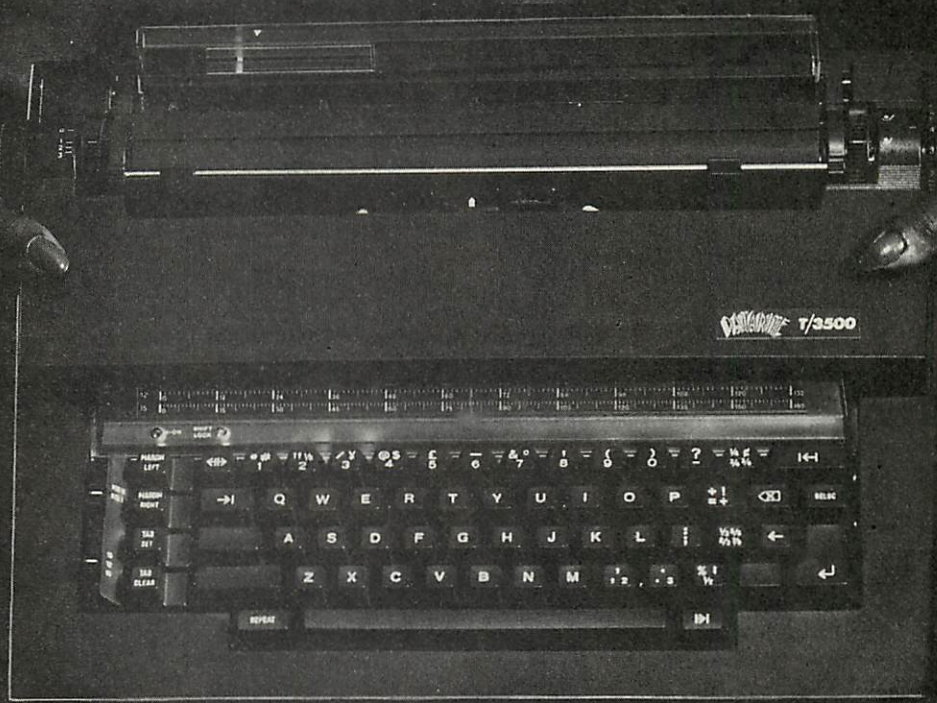

The new T/Printer 3500 is not only black and beautiful, it's also pretty sensational in terms of sheer value for money.

And just right for the average user.

Because when you're finished using the T/Printer 3500 as a daisy wheel printer for your computer, it's ready to go right on working as an electronic typewriter. Plus it's also a genuine full KSR terminal, able to send data as well as receive. So you get triple value for your money.

Both Centronics parallel and RS-232C interfacing are built-in.

But that's only the beginning.

The T/Printer 3500 differs from other computer printers in being distinctly portable. So we include a tough ABS moulded carrying case. It's also a totally integrated unit (no separate interface boxes). You'll find your T/Printer 3500 an ideal companion for the new generation of micro computers.

It has a few other advantages as well. Such as a Z80 microprocessor, interchangeable 100 character Olivetti daisywheels, plus a 960 character buffer and keyboard control of all functions. There's also triple pitch (10, 12 and 15 c.p.i.) so you can get up to 165 characters per line. All with an operating speed of up to 120 words per minute. And tough enough to give you years of reliable service.

If you don't need all the features of the T/Printer 3500, take a look at our budget-priced T/Printer 350. It's Centronics parallel and read-only, but is otherwise identical to the T/Printer 3500. Except in price.

The choice is yours. The T/Printer 350 costs only £475, while the T/Printer 3500 with all its features is just £535. All prices are exclusive of VAT.


DATARITE TERMINALS LTD, CALDARE HOUSE.
144-146 HIGH ROAD, CHADWELL HEATH, ESSEX RM6 6NT
TEL: 01-590 6022 01-590 1155

DATARITE

● Circle No. 278

A RESOURCE INDUSTRIES INTERNATIONAL COMPANY

TWO MICRO COMPUTERS IN ONE

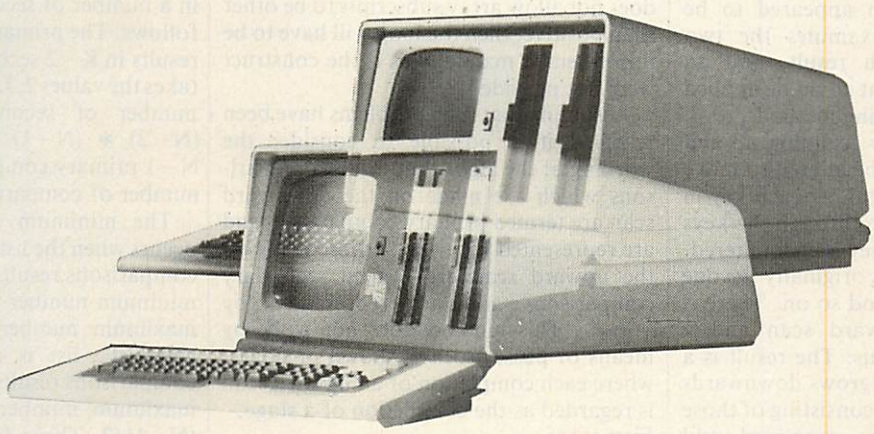

A 16 BIT MICRO & AN 8 BIT MICRO ALL IN THE SAME COMPACT UNIT FOR ONLY £2,390

What's the right micro for your business — now and in the future a 16-bit system or an 8-bit system?

The LSI System M-Four gives you both in one unit, at low cost.

As an 8088 16-bit micro, the System M-Four offers you multi-tasking capability plus features such as — immediately available disk options: floppies plus Winchester drive — 128K to 256K RAM — full range of operating systems: MSDOS, CP/M, CP/M86, M/PM86.

Press a button — and its a sophisticated Z80B 8-bit micro, using proven business applications software such as SUPERCALC MAP and WORDSTAR.

"To err is human . . ."

. . . So LSI software packages have their own 'Software Application Mat' which fits over the keyboard and allows complex multi-key functions to be performed with a single key-stroke. It makes everyone an expert – and reduces errors.

British built for British users.

LSI is part of the CPU group — which also supplies terminals and other peripherals to leading micro manufacturers.

We can provide immediate support and assistance through our network of Regional Business Centres.

Find out more about LSI

Complete the coupon and we'll send you more information on the LSI System M-Four.

LSI COMPUTERS

LSI Computers Limited, Copse Road, St. Johns, Woking, Surrey GU21 1SX. Telephone: (04862) 23411 Telex: 859592

PUTS BRITAIN BACK IN FRONT

Please send me more information on LSI System M-Four

Name _____

Position _____

Company _____

Address _____

_____

_____ Telephone _____

LSI Computers Limited, Copse Road, St. Johns, Woking, Surrey GU21 1SX. D4

● Circle No. 175

Know your sort

Andrew Featherstone completes his survey of simple sorting methods with the shuttle, delayed-exchange and shell sorts.

THE FIRST ARTICLE in this series — March issue, page 120 — examined four linear sorting methods. Starting from the simplest way to sort a list of items it worked through a sequence of refinements of the initial method, leading to a point at which a new approach appeared to be needed. This article examines the two further methods which result, and an additional technique that could be applied to any of the six preceding methods.

Instead of repeatedly scanning up and down, the method can be altered to move down through the list, taking each key in turn and lifting it up up through the keys above it until a lighter key is encountered. Then the key which was originally the one below it is examined, and so on. There is then only one downward scan and a number of upward scans. The result is a sorted sequence, which grows downwards from the top of the list, consisting of those keys which have been examined and moved up as far as necessary. This is called the shuttle sort.

The algorithm for this method is shown in figure 1. The variables are as before except for the disappearance of PB, PP, PF, PT and the appearance of two new variables:

FP — forward pointer, marking the element reached on the downward scan.

BP — backward pointer, marking the element reached on the upward scans.

It is quite possible that statement 5

Repeat - Until BP ≦ 0 ∨ K$ (BP + 1) ≧ K$(BP)

could cause problems. If the language used does not supply the Repeat-Until construct the facility has to be provided manually. At the end of the statements in the loop would have to be written


If BP > 0 ∧ K$ (BP + 1) < K$ (BP) Then go to beginning of loop.

Different systems will treat this statement in different ways. Economical systems will use the result of the first simple condition to decide whether or not the second simple condition needs to be evaluated in order to determine the outcome of the compound condition, and so will not bother to evaluate the rest if BP = 0. Pedantic systems will want to evaluate both simple conditions before establishing the truth of the compound condition by using the logical operator. Such systems will come unstuck if BP = 0 in attempting to access K$(0).


If the manual Repeat-Until is being used, the way round this is to replace the And with a Then If. Otherwise, the way out is to use the sentinal technique. Declare K$ such that it includes an element K$(0), to which K$(FP) is moved before the inner Repeat-Until commences, and drop BP ≦ 0 and the Or from the termination condition. If the language you are using does supply the Repeat-Until construct but does not allow array subscripts to be other than positive, then the loop will have to be implemented manually as if the construct were not provided.

Assuming that such problems have been resolved it is possible to consider the working of the algorithm. Those comparisons which are made on the downward scan are termed primary comparisons and are represented by ⟶ ; those made on the upward scan are termed secondary comparisons and are represented by ⟵ . This method does not work by means of passes so it is shown in stages, where each completion of an upward scan is regarded as the completion of a stage.


First stage




Second stage




Third stage



Fourth stage



Fifth stage



At the end of the fifth stage the keys are in the following order:

E I K O R S S T Y

The downward scan has reached the end of the list and so the sort is complete; in terms of the algorithm FP > NK. The total number of comparisons is

3 + 2 + 6 + 6 + 4 = 21

and the total number of exchanges is

1 + 1 + 4 + 6 + 2 = 14

The new method has in this case reduced the number of comparisons by four, though the usual analysis again does not show this increased efficiency.

The minimum number of comparisons occurs when the list is ordered. In that case no secondary comparisons result from any of the N − 1 primary comparisons, so the minimum number of comparisons is N − 1.

The maximum number of comparisons occurs when the list is reversed, when each of the N − 1 primary comparisons results in a number of secondary comparisons as follows. The primary comparison at key K results in K − 2 secondary comparisons; K takes the values 2,3, . . . N so that the total number of secondary comparisons is (N − 2) * (N − 1)/2. Together with the N − 1 primary comparisons the maximum number of comparisons is N * (N − 1)/2.

The minimum number of exchanges occurs when the list is ordered: none of the comparisons results in an exchange so the minimum number of exchanges is 0. The maximum number of exchanges occurs when the list is reversed: each of the comparisons results in an exchange, so the maximum number of exchanges is N* (N − 1)/2. These figures are the same as before, so the new method does not appear to have made any improvement. However, in the general case the new method does lead to a satisfactory reduction in the number of comparisons.

There is still room for improvement, though to the number of exchanges rather than the number of comparisons. Suppose there is a key which has to be moved several places up the list. It is done by comparing the key with its predecessor, exchanging them, comparing it with its new predecessor, exchanging them, and so on.

The trouble is that an exchange has to be made by extracting the offending key from the list, moving the preceding key down one place, and inserting the extracted key into the space vacated by its erstwhile predecessor. The key which is moving up will repeatedly be replaced and removed before it reaches the right position, but it would be better not to replace the key until the right position has been found.

Figure 2 describes this new procedure. As before, statement 6

Repeat - Until BP ≦ 0 ∨ T$ ≧ K$(BP)

could cause problems. It might appear that it will be a trifle difficult to count the exchanges made by a method which does not actually seem to make exchanges as such. It can be done, though. An exchange entails removing a key, moving down its predecessor and replacing the key — three distinct data transfers or moves. These three moves are all present in the improved method so the exchanges can be counted by counting each of these moves as one-third of an exchange.

Figure 1.

```
(1) FP: = 2
(2) repeat (3) BP: = FP – 1
          (4) if K$(FP) < K$(BP)
              then (5) repeat (6) T$: = K$(BP + 1)
                              (7) K$(BP + 1): = K$(BP)
                              (8) K$(BP): = T$
                              (9) BP: = BP – 1
                   until BP ≦ 0 ˅ K$(BP + 1) ≧ K$(BP)
          (10) FP: = FP + 1
   until FP > NK
```

Figure 2.

```
(1) FP: = 2
(2) repeat (3) BP: = FP – 1
          (4) if K$(FP) < K$(BP)
              then (5) T$: = K$(FP)
                   (6) repeat (7) K$(BP + 1): = K$(BP)
                              (8) BP: = BP – 1
                        until BP ≦ 0 ˅ T$ ≧ K$(BP)
                   (9) K$(BP + 1): = T$
          (10) FP: = FP + 1
   until FP > NK
```

Figure 3.

```
(1) I: = 2**INT(LN(NK – 1)/LN(2))
(2) repeat (3) CALL SORT (NK,K$(NK),I)
          (4) I: = I/2
   until I < 1
```

```
1500 REM SHUTTLE SORT
1501 LET FP=2
1502 LET BP=FP-1
1503 IF K$(FP)>=K$(BP) THEN GOTO
 1509
1504 LET T$=K$(BP+1)
1505 LET K$(BP+1)=K$(BP)
1506 LET K$(BP)=T$
1507 LET BP=BP-1
1508 IF BP>0 THEN IF K$(BP+1)<K$
(BP) THEN GOTO 1504
1509 LET FP=FP+1
1510 IF FP<=NK THEN GOTO 1502
1511 RETURN

1600 REM DELAYED EXCHANGE SORT
1601 LET FP=2
1602 LET BP=FP-1
1603 IF K$(FP)>=K$(BP) THEN GOTO
 1609
1604 LET T$=K$(FP)
1605 LET K$(BP+1)=K$(BP)
1606 LET BP=BP-1
1607 IF BP>0 THEN IF T$<K$(BP) T
HEN GOTO 1605
1608 LET K$(BP+1)=T$
1609 LET FP=FP+1
1610 IF FP<=NK THEN GOTO 1602
1611 RETURN

1700 REM SHELLSORT
1701 LET I=2**INT (LN (NK-1)/LN
2)
1702 GOSUB 1800
1703 LET I=I/2
1704 IF I>=1 THEN GOTO 1702
1705 RETURN
```


The illustration of the working of the new procedure shows a sequence of events very similar to those which occurred last time. However, each exchange is now reduced to a move, the moving down of a key. Each set of secondary comparisons implies just two further moves, the removal of the key to be moved up at the start and its replacement at the end, of the set of secondary comparisons.

Using ↓ to represent the removal of a key, ⇝ to represent the moving down of a key and ↑ to represent the replacement of a key, the sequence of events is as follows:


First stage




Second stage




Third stage



Fourth stage



Fifth stage



At the end of the fifth stage the keys are in the following order

E I K O R S S T Y

(continued on next page)

Table 1. Performance of sorts given ordered, reverse ordered and random lists.

List: A B C D B E F G H I J K L M N O P Q R	(1)	(2)	(3)	(4)	(5)	(6)
comparisons	153(271)	17(59)	17(59)	17(59)	17(59)	17(59)
exchanges	0(0)	0(0)	0(0)	0(0)	0(0)	0(0)
List: R Q P O N M L K J I H G F E D C B A						
comparisons	153(271)	153(87)	153(83)	153(83)	153(69)	153(69)
exchanges	153(21)	153(21)	153(21)	153(21)	153(21)	62(21)
List: C M O N Y B M O J F H W Y X A J Q Q						
comparisons	153(271)	150(134)	125(125)	114(96)	79(74)	79(74)
exchanges	64(23)	64(23)	64(23)	64(23)	64(23)	30(20)
List: F K U F S M B R G E N M Q E O S A U						
comparisons	153(68)	153(68)	137(68)	95(68)	83(68)	83(74)
exchanges	68(21)	68(21)	68(21)	68(21)	68(21)	32(19)
List: P T S V P B X O I H K B U M E N A C						
comparisons	153(27)	153(142)	151(127)	140(119)	122(81)	122(81)
exchanges	107(30)	107(30)	107(30)	107(30)	107(30)	45(26)
List: F A G Z S I T J C D I S E R N U S T						
comparisons	153(271)	125(113)	98(108)	90(104)	68(79)	68(79)
exchanges	52(26)	52(26)	52(26)	52(26)	52(26)	27(23)
List: P U V R S A F I C E E Y J C X J N V						
comparisons	153(271)	138(119)	117(105)	114(97)	90(76)	90(76)
exchanges	74(25)	74(25)	74(25)	74(25)	74(25)	34(23)
List: M I O L C G G F I R G U O Y A K V X						
comparisons	153(271)	150(134)	117(117)	86(102)	69(75)	69(75)
exchanges	55(25)	55(25)	55(25)	55(25)	55(25)	27(22)

(1) straight exchange sort; (2) ripple sort with logical flag; (3) ripple sort with integer flag; (4) shaker sort; (5) shuttle sort; (6) delayed exchange sort. The figures in brackets refer to algorithms run with the shell sort technique.

Know your sort

(continued from previous page)

The downward scan has reached the end of the list and so the sort is complete; in terms of the algorithm FP > NK. The total number of comparisons is 21 and the total number of exchanges is 8. The improved method has in this case reduced the number of exchanges by six, and this increase in efficiency is reflected in the usual analysis.

The minimum and maximum numbers of comparisons are the same for this method as for the shuttle sort, for exactly the same reasons. So the minimum is N − 1 and the maximum is N − 1 + (N − 1)* (N − 2)/2 = (N − 1)* N/2.

When the list is ordered, none of the primary comparisons results in any moves or secondary comparisons. So the minimum number of exchanges is 0. When the list is reversed, each of the primary comparisons results in three moves: extract the current key, move down its predecessor, insert the key when the top of the list is reached. Each of the secondary comparisons results in one move: move down the next key up. So the maximum number of exchanges is N − 1 + 1/3* (N − 1)* (N − 2)/2 = (N − 1)* (N + 4)/6.

In the general case, the number of exchanges is reduced by about one-half in the new procedure. There seems to be little room left for improvement to this much improved basic sort, but there is a device which can further reduce the number of comparisons and exchanges. It is not so much another sorting procedure as a technique which could be used in conjunction with any of the six procedures already described.

All the methods, except for the first, perform much better with an ordered list than with a reversed one. Similarly, a list which is fairly well ordered, with few keys far from their final position, will result in fewer comparisons and exchanges than a list which is badly ordered. Obviously, the further a key is from its proper place, the greater the number of comparisons and exchanges necessary to move it there.

The problem is that it is adjacent keys which are compared and exchanged. This is just right for keys which are only misplaced by one position, but very slow for keys which are misplaced by, say, 10 positions. By comparing and exchanging keys which are not adjacent it would be possible to make some kind of coarse adjustment, resulting in a list which is less badly ordered and so more amenable to the fine adjustment of comparing and exchanging keys which are adjacent.

This is just what the shell sort does. Given a list of N keys, it starts by finding the largest power of 2 which is less than N — P, say — and runs through the list comparing, and exchanging if necessary, keys which are P positions apart.

It then divides P by 2 and repeats the process. It continues with successively smaller values of P until P is equal to 1, when it is comparing adjacent keys. The difference between this method and that of comparing and exchanging only adjacent keys is somewhat analogous to that between the binary and serial search techniques.

The algorithm for the shell sort is shown in figure 3. The variables are:

NK — number of keys
K$(NK) — list of keys
I — increment: comparisons are to be made between keys I positions apart
Int — an intrinsic function which yields the largest integer less than or equal to its arguments
LN — an intrinsic function which yields the natural logarithm of its argument
Sort — an external subroutine which performs a sort given NK, K$(NK) and I.

Step 1 sets I to the largest power of 2 which is less than NK. Step 3 calls a sorting procedure such as any one of the six procedures already described, to sort keys that are I positions apart. Some small alterations are necessary to render the sorting algorithms suitable for use within the shell sort algorithm.

In the straight exchange sort the following steps are changed to:

```
(3) PP: = I + 1
(5) If K$(PP − I) > K$(PP) Then . . .
(7) K$(PP): = K$(PP − I)
(8) K$(PP − I): = T$
(10) PB: = PB − I
(2) Repeat . . . Until PB < I + 1.
```

In the ripple sort with logical flag the following steps are changed to:

```
(4) PP: = I + 1
(6) If K$(PP − I) > K$(PP) Then . . .
(8) K$(PP): = K$(PP − I)
(9) K$(PP − I): = T$
(12) PB: = PB*PF − I (2) Repeat . . . Until
  PB < I + 1
```

In the ripple sort with integer flag the following steps are changed to:

```
(4) PP: = I + 1
(6) If K$(PP − I) > K$(PP) Then . . .
(8) K$(PP): = K$(PP − I)
(9) K$(PP − I): = T$
(12) PB: = PF − I
(2) Repeat . . . Until PB < I + 1
```

In the shaker sort the following steps are changed to:

```
(1) PT: = I + 1
(7) If K$(PP − I) > K$(PP) Then . . .
(9) K$(PP): = K$(PP − I)
(10) K$(PP − I): = T$
(13) PB: = PF − I
(17) If K$(PP − I) > K$(PP) Then . . .
(19) K$(PP): = K$(PP − I)
(20) K$(PP − I): = T$
(23) PT: = PF + I
```

In the shuttle sort the following steps are changed to:

```
(1) FP: = I + 1
(3) BP: = FP − I
(6) T$: = K$(BP + I)
(7) K$(BP + I): = K$(BP)
(9) BP: = BP − I
(5) Repeat . . . Until BP ≦ 0 ˇ K$(BP + I)
  ≧ K$(BP)
```

In the delayed exchange sort the following steps are changed:

```
(1) FP: = I + 1
(3) BP: = FP − I
(7) K$(BP + I): = K$(BP)
(8) BP: = BP − I
(9) K$(BP + I): = T$
```

Assessing the efficiency of this technique is no easy matter. Given an ordered list, it causes more comparisons to be made than would be made without it because it passes more than once through the list. Given a reversed list, it greatly reduces the numbers of comparisons and exchanges — except when used with the straight exchange sort, when the number of comparisons is increased.

Given a random list, it seems invariably to reduce the number of exchanges made by each of the six sorts, and usually to reduce the number of comparisons, except when used with the straight exchange sort.

The efficiency of the technique depends to an extent on the increments used. For instance, suppose that the first increment is almost as large as the number of keys. It is not really likely that the list is so badly ordered that the keys at the bottom should be at the top. Much work has been done to try and find the best increments. It turns out that decreasing powers of 2 are rather poor. According to Knuth, the best way to choose the increments is to let $h_1 = 1$, $h_{s+1} = 3h_s + 1$, and stop at h_t, when $h_{t+2} \geqq N'$. This gives the sequence 1, 4, 13, 40, 121, . . .

For example, if you have 100 keys, use an increment of 13 on the first pass, 4 on the next one, and 1 on the last. Using these increments certainly improved performance, although the shell sort remains inefficient when used on a list which is to any degree ordered.

All the algorithms were run on their own and with the shell sort technique, to arrange a list of 18 letters in alphabetical order. Table 1 demonstrates the performance of the sorting methods in terms of the number of comparisons and number of exchanges needed. The most efficient method is the delayed exchange sort.

More complex sorting methods have been devised, such as C A R Hoare's Quicksort. *The Art of Computer Programming; Volume III: Sorting and Searching* by D E Knuth is a very comprehensive book, though somewhat difficult to follow, providing unstructured algorithms and detailed analyses of the methods discussed. The comprehensive *Sorting and Sort Systems* by H Loring, provides exceptionally lucid discussions of methods.

I'M HAPPY AND PROUD TO PRESENT:



GGK

Open File

This regular section of *Practical Computing* appears in the magazine each month, incorporating Tandy Forum, Apple Pie, Sinclair Line-up and other software interchange pages.

Open File is the part of the magazine written by you, the readers. All aspects of microcomputing are covered, from games to serious business and technical software, and we welcome contributions on CP/M, BBC Basic, Microsoft Basic, Apple Pascal and so on, as well as the established categories.

Contributors receive £30 per published page and pro rata for part pages, with a minimum of £6. Send contributions to: Open File, *Practical Computing*, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Commodore Corner: Flipping Pet screens; Pop command; Selective Restore; Competition "skill and judgement"; Monitor hardware fix 151


Tandy Forum: Commas for Gotos; Race 2000 game; Inserting Basic lines 158

BBC Bytes: Space Invaders bug; Graph plotting; One-line word processor 165

Research Machines Review: Graphics input 168

Apple Pie: Simon game; Enhanced file indexing 171

End of File: Dragon 32 high-resolution dump; Curve integration routine; Recursive anagram; Save and Load on UK 101; Simon on Dragon 32 174

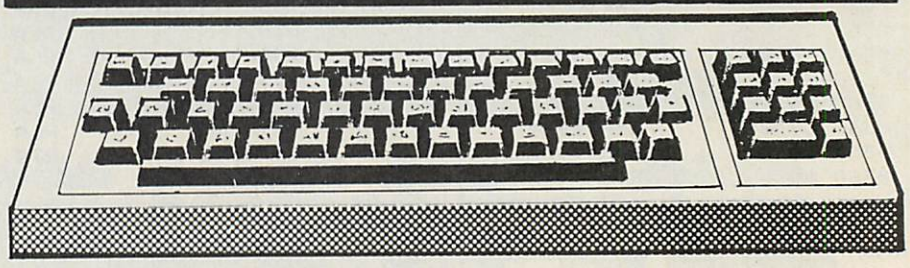

Guidelines for contributors


Programs should be accompanied by documentation which explains to other readers what your program does and, if possible, how it does it. It helps if documentation is typed or printed with double-line spacing — cramped or handwritten material is liable to delay and error.

Program listings should, if at all possible, be printed out. Use a new ribbon in your printer, please, so that we can print directly from a photograph of the listing and avoid typesetting errors. If all you can provide is a typed or handwritten listing, please make it clear and unambiguous; graphics characters, in particular, should be explained.

We can accept material for the Pet, Vic and Sharp MZ-80K on cassette, and material for the larger machines can be sent on IBM-format 8in. floppy discs.

COMMODORE CORNER

by Mike Todd



Flipping Screen

THE FIRST three programs this month are simple utilities. Although all three reside in the second cassette buffer they are all fully relocatable. You could put them in any unused and protected area of memory just by changing the start address which appears in line 1000.

The first of the utilities, from Miss Bunn of Stourbridge, West Midlands, is a screen flip, which has a variety of uses. It swaps the contents of the screen with the contents of the top 1,000 bytes of memory and it is so fast that it effectively gives you a second screen.

The routine is actually written for an 8K Pet and stores the screen image from location 7192 onwards. If you want to use a 16K or 32K Pet then the 16th byte, at the end of line 2000 in the program, needs to be changed according to the table.

It is also necessary to protect the top 1,000 bytes from being overwritten by Basic, and this is done using:

POKE 52,A: POKE 53,B: CLR

at the very start of your program, where the values A and B are found from the table.

This routine will work on all 40-column Pets, although for very early old-ROM Pets you should Poke locations 134/135 instead of 52/53. Every time you want to flip to the alternate screen, just use Sys826.

Popping out

Many micros have a Pop command which allows you to remove the last Gosub entry from the stack. It can be useful if you want to abort a subroutine without returning to the calling statement.

Christopher Carter of Formby in Merseyside has sent an equivalent routine for the Pet which is designed for use on Basic 2/3 Pets, but could be used on others by changing the two subroutine calls according to the table.

It is called with Sys826 and will produce a

(continued on next page)

I'M HAPPY AND PROUD TO PRESENT:



GGK

You were impressed by the unique portable Epson Computer that fits into your briefcase.



Now take a look at the one that sits on your desk.

The QX-10. A fully integrated Desktop Microcomputer System. A new member of the Epson family.

But there's more to the functional and stylish lines of this remarkable machine (just to prove that beauty isn't only skin deep).

The lightweight CPU, monitor and Keyboard units are very easy to use – even for a first time operator. You could say that our system takes all the hard work out of using software, and once used...you probably will.

What's more, when it comes to cost you'll find there's more power for your money.

Just look at these qualities.

192k upgradable to 256k RAM, Z80A CPU, RS-232C and parallel interfaces. CP/M and multifont BASIC comes as standard.

The QX-10 offers an incredible graphics capability. The 80 columns x 25 line display has 640 x 400 resolution and full bit image control for greater definition, 16 : 1 zoom and special effects.

Not to mention a unique split screen facility enabling different typestyles and graphics to be shown together. A major first for educational applications.

For even more power – simply slot in up to 5 optional interface cards for cassette, bar code reader, joysticks, sound generator, plus a Universal Interface card for developing your own interfaces. Clock, calendar and full battery back-up complete the system.

As with all the other respected Epson products, you are assured of high quality. (We even manufacture the slim line disc drives ourselves.)

So, at last there's a desktop microcomputer system that really works together. To really work for you.

See it soon. We know you'll be impressed.

QX-10

THE HUMAN COMPATIBLE BUSINESS MICRO

EPSON

Extraordinary product. Exceptional quality.

Epson (UK) Limited, Freepost, Wembley, Middlesex HA9 6BR. Freefone: 2730. Telex: 8814169

☐ I would like a demonstration of the QX-10.

☐ Please send me details and the name of my local stockist.

Name_____

Position_____

Company_____

Address_____

_____

_____ Tel:_____

● Circle No. 182

Flipping screen.

```
1000 S = 826
1010 READ A: IF A>255 THEN 1030
1020 POKE S,A: C=C+A: S=S+1: GOTO 1010
1030 IF A<>C THEN PRINT"CHECKSUM ERROR"
2000 DATA 169,  0,133,  0,169,128,133,  1,169, 24,133, 48,133, 52,169, 28
2010 DATA 133, 49,133, 53,160,  0,169,  0,177,  0,133, 50,177, 48,145,  0
2020 DATA 165, 50,145, 48,200,208,241,230,  1,230, 49,165,  1,201,132,208
2030 DATA 231, 96
2040 DATA 5517
```

```
033A A9 00      LDA #$00
033C 85 00      STA $00
033E A9 80      LDA #$80
0340 85 01      STA $01
0342 A9 18      LDA #$18
0344 85 30      STA $30
0346 85 34      STA $34
0348 A9 1C      LDA #$1C
034A 85 31      STA $31
034C 85 35      STA $35
034E A0 00      LDY #$00
0350 A9 00      LDA #$00
0352 B1 00      LDA ($00),Y
0354 85 32      STA $32
0356 B1 30      LDA ($30),Y
0358 91 00      STA ($00),Y
035A A5 32      LDA $32
035C 91 30      STA ($30),Y
035E C8         INY
035F D0 F1      BNE $0352
0361 E6 01      INC $01
0363 E6 31      INC $31
0365 A5 01      LDA $01
0367 C9 84      CMP #$84
0369 D0 E7      BNE $0352
036B 60         RTS
```

Popping out.

```
1000 S = 826
1010 READ A: IF A>255 THEN 1030
1020 POKE S,A: C=C+A: S=S+1: GOTO 1010
1030 IF A<>C THEN PRINT"CHECKSUM ERROR"
2000 DATA 162,255,133, 71, 32,170,194,154
2010 DATA 201,141,240,  3, 76,232,199,104
2020 DATA 104,104,104,104,96
2030 DATA 2879

033A A2 FF      LDX #$FF
033C 85 47      STA $47
033E 20 AA C2   JSR $C2AA
0341 9A         TXS
0342 C9 8D      CMP #$8D
0344 F0 03      BEQ $0349
0346 4C E8 C7   JMP $C7E8
0349 68         PLA
034A 68         PLA
034B 68         PLA
034C 68         PLA
034D 68         PLA
034E 60         RTS
```

(continued from previous page)

Return Without Gosub error message if there is no Gosub entry on the stack. Purists may say that there should be no need for such things in a well-structured program — but I'm sure someone will find a use for it.

Selective restoration

Also from Christopher comes a selective Restore routine which allows a Read statement to start at a given line of data. This would otherwise have to be done with a For-Next loop to search for the start of the desired data, which can be long and tedious.

The routine is called by using Sys826, X where X is the line number at which you want to start reading. If the line number does not exist, or if there is no Data statement on it, the routine just ignores the instruction.

This routine is also for Basic 2/3 Pets, but can be converted using the table.

Skill and judgement

Are you a competition nut? Do you enter every multiple choice competition that you see? You know the sort, "using your skill and judgement, arrange the following attributes into order and win ..." If you do, then Nick Higham of Eccles has produced a program to help you.

Most of these competitions allow multiple entries and, having chosen the preferred order of entries, permuting these to produce an entry can be very tedious. This program simplifies it all and after telling it how many

(continued on page 157)

Selective restoration.

```
1000 S = 826
1010 READ A: IF A>255 THEN 1030
1020 POKE S,A: C=C+A: S=S+1: GOTO 1010
1030 IF A<>C THEN PRINT"CHECKSUM ERROR"
2000 DATA  32,112,  0, 32,139,204, 32,210
2010 DATA 214, 32, 44,197,144, 33,160,  4,177
2020 DATA  92,240, 27,200,201,131,208,247
2030 DATA 165, 17,133, 60,165, 18,133, 61
2040 DATA 136,152,166, 93, 24,101, 92
2050 DATA 144,  1,232,134, 63,133, 62, 96
2060 DATA 5493

033A 20 70 00    JSR $0070
033D 20 8B CC    JSR $CC8B
0340 20 D2 D6    JSR $D6D2
0343 20 2C C5    JSR $C52C
0346 90 21       BCC $0369
0348 A0 04       LDY #$04
034A B1 5C       LDA ($5C),Y
034C F0 1B       BEQ $0369
034E C8          INY
034F C9 83       CMP #$83
0351 D0 F7       BNE $034A
0353 A5 11       LDA $11
0355 85 3C       STA $3C
0357 A5 12       LDA $12
0359 85 3D       STA $3D
035B 88          DEY
035C 98          TYA
035D A6 5D       LDX $5D
035F 18          CLC
0360 65 5C       ADC $5C
0362 90 01       BCC $0365
0364 E8          INX
0365 86 3F       STX $3F
0367 85 3E       STA $3E
0369 60          RTS
```

Flipping screen table.

	8K	16K	32K
16th byte	28	60	124
Poke 52,A	24	24	24
Poke 53,B	28	60	124

Popping out table.

BASIC2/3	BASIC1	BASIC4
C2AA	C2AC	B322
C7E8	C7D8	B86B

Selective restoration table.

BASIC2/3	BASIC1	BASIC4
CC8B	CCA4	BD84
D6D2	D6DA	C92D
C52C	C522	B5A3

Open File

This regular section of *Practical Computing* appears in the magazine each month, incorporating Tandy Forum, Apple Pie, Sinclair Line-up and other software interchange pages.

Open File is the part of the magazine written by you, the readers. All aspects of microcomputing are covered, from games to serious business and technical software, and we welcome contributions on CP/M, BBC Basic, Microsoft Basic, Apple Pascal and so on, as well as the established categories.

Contributors receive £30 per published page and pro rata for part pages, with a minimum of £6. Send contributions to: Open File, *Practical Computing*, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Commodore Corner: Flipping Pet screens; Pop command; Selective Restore; Competition "skill and judgement"; Monitor hardware fix 151


Tandy Forum: Commas for Gotos; Race 2000 game; Inserting Basic lines 158

BBC Bytes: Space Invaders bug; Graph plotting; One-line word processor 165

Research Machines Review: Graphics input 168

Apple Pie: Simon game; Enhanced file indexing 171

End of File: Dragon 32 high-resolution dump; Curve integration routine; Recursive anagram; Save and Load on UK 101; Simon on Dragon 32 174

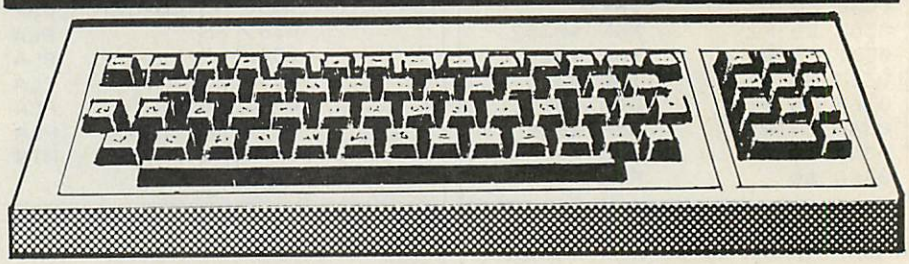

Guidelines for contributors


Programs should be accompanied by documentation which explains to other readers what your program does and, if possible, how it does it. It helps if documentation is typed or printed with double-line spacing — cramped or handwritten material is liable to delay and error.

Program listings should, if at all possible, be printed out. Use a new ribbon in your printer, please, so that we can print directly from a photograph of the listing and avoid typesetting errors. If all you can provide is a typed or handwritten listing, please make it clear and unambiguous; graphics characters, in particular, should be explained.

We can accept material for the Pet, Vic and Sharp MZ-80K on cassette, and material for the larger machines can be sent on IBM-format 8in. floppy discs.

COMMODORE CORNER

by Mike Todd



Flipping Screen

THE FIRST three programs this month are simple utilities. Although all three reside in the second cassette buffer they are all fully relocatable. You could put them in any unused and protected area of memory just by changing the start address which appears in line 1000.

The first of the utilities, from Miss Bunn of Stourbridge, West Midlands, is a screen flip, which has a variety of uses. It swaps the contents of the screen with the contents of the top 1,000 bytes of memory and it is so fast that it effectively gives you a second screen.

The routine is actually written for an 8K Pet and stores the screen image from location 7192 onwards. If you want to use a 16K or 32K Pet then the 16th byte, at the end of line 2000 in the program, needs to be changed according to the table.

It is also necessary to protect the top 1,000 bytes from being overwritten by Basic, and this is done using:

```
POKE 52,A: POKE 53,B: CLR
```

at the very start of your program, where the values A and B are found from the table.

This routine will work on all 40-column Pets, although for very early old-ROM Pets you should Poke locations 134/135 instead of 52/53. Every time you want to flip to the alternate screen, just use Sys826.


Popping out

Many micros have a Pop command which allows you to remove the last Gosub entry from the stack. It can be useful if you want to abort a subroutine without returning to the calling statement.

Christopher Carter of Formby in Merseyside has sent an equivalent routine for the Pet which is designed for use on Basic 2/3 Pets, but could be used on others by changing the two subroutine calls according to the table.

It is called with Sys826 and will produce a

(continued on next page)

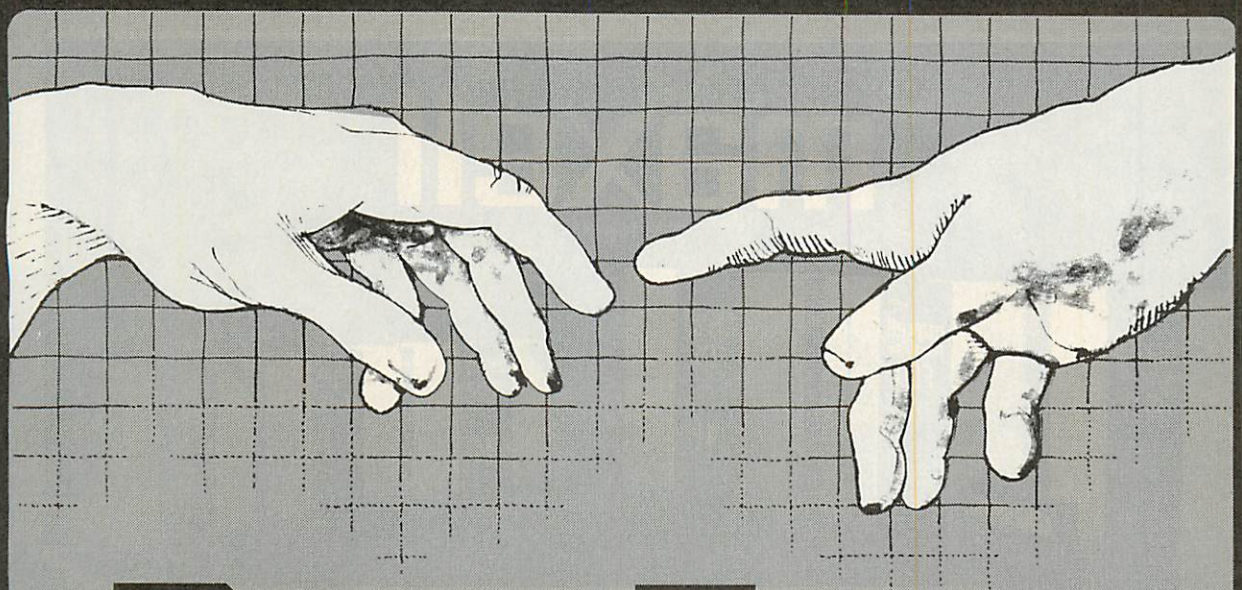

DataFlex™

SOFTWARE FOR CREATORS

Bring your CP/M software applications to life with DataFlex.

From menu to multi-key ISAM, DataFlex has the features and power you need to create complete turn-key software applications in a RELATIONAL DATA BASE ENVIRONMENT.

Compare . . . what else gives you up to 125 data files with 4 indexes each, fast on-line multi-key ISAM file maintenance, a multi-file report generator, on-line multi-file transaction processing, an easy-to-use Query, even a "soft" menu to replace the CP/M command mode. All of this using DataFlex's configuration utilities, and NO PROGRAM CODE!

It is easy to use, You can type in a Screen format "image" of a file with your text editor. Then DataFlex's AUTODEF utility will create the file definition from the screen image . . . in about five seconds.

DataFlex will handle your multi-user requirements too! It runs under the TURBOdos networking operating system with full data protection.

If the 16-bit world is your domain, an 8086 version of DataFlex will be available in early 1983. You can develop now on your Z80 system and transport completed applications to the 8086/8088.

If you need applications now, a Library of DataFlex applications is being developed by other users. For highly specialised requirements, DataFlex's PASCAL Library is available to application developers.

DataFlex can change the way you do business. And at £495, (excl. VAT), with all its facilities we consider it the best value in the business. A demo package, which limits file sizes internally, is available for computer professionals.

Get the full system, or get the demo, but get your hands on DataFlex – software for creators.

Trademarks:
CP/M; Digital Research **DataFlex;** Data Access.
TURBOdos; Software 2000

OEM, SYSTEM HOUSE AND DEALER ENQUIRIES INVITED.

EQUINOX
MULTI-USER SOFTWARE
16 Anning Street, New Inn Yard,
London EC2A 3HB. Tel: 01-739 2387
Telex: 27341

● **Circle No. 181**

maxell®



WHEN ONLY THE BEST IS GOOD ENOUGH

CONTACT:

CFM
Excell House, Trust Industrial Estate,
Wilbury Way, Hitchin,
Hertfordshire. SG4 0UZ
0462 51511

Loadplan
28 Hereford Road, London, W2 5AJ
01 221 0005

Symons Computer Services
4A Porchester Place, Bournemouth,
Hampshire. BH8 8JS
0202 23776

Word Perfect (Anglia)
4A Granville Street,
Peterborough, Cambridgeshire. PE1 2RJ
0733 310828

Constat Business Forms
92 Warren Gardens, Lisburn,
Co. Down, Northern Ireland. BT28 1HW
08462 82131

Data Total Computers
Haywood Way, Ivy House Lane,
Hastings, Sussex. TN35 4PL
0424 444460

Disking International
Moonrakers, Wheatsheaf Enclosure,
Liphook, Hampshire. GU30 7EJ
0428 722563

Michael Collins Computer Supplies
Canbury House, Tolworth Close,
Tolworth, Surbiton, Surrey. KT16 7EW
01 390 5655

Hestair Dataline
2nd Floor, 60 Charles Street,
Leicester. LE1 1FB
0533 56215

Alan Henry Computer Services
Effective House, Rainhill Road,
Rainhill, Merseyside. L35 4LD
051 430 0111

Computer Supplies Co.
8–18 Union Street, Bo'ness,
West Lothian, Scotland.
0506 823393 Telex 727479

Scotmedia Computer Supplies Ltd
Unit D, 46 Bavelaw Road,
Balerno, Midlothian. EH14 7AE
031 449 5557

Vlasak Computer Systems
Vlasak House, 8 Stewart Road,
High Wycombe, Buckinghamshire.
HP13 6AG.
0494 448633

maxell®

UK distribution through CPU Peripherals. Tel: Walton-on-Thames 46433/4/5/6.

● Circle No. 180

Computerise without compromise



The new All British QUANTUM 2000 computer system is outstanding among all the fine microcomputers now on the market. The explanation is simple. All microcomputer designers see Versatility on a high scale as their aim for the future. In the QUANTUM 2000 this ideal has actually been achieved, therefore it is demonstrably more advanced than any other.

QUANTUM 2000 offers every feature experts would look for in a new high technology 2.2 CP/M based microcomputer *plus* an expansion potential which a few years ago would have required planning permission.

What QUANTUM means by Versatility:

1. Available with 1, 2 or 3 disk drives.
2. Disk drives can be 400K or 800K floppies OR
3. 5 or 10 meg. Winchester OR
4. A mixture of floppy and Winchester.
5. 192K of extra RAM can be added, in addition to the standard 64K.
6. If the standard Centronics plus RS232 ports are insufficient, just plugging in a board adds a few more.
7. I EEE 488? No problem! Plug in a card.
8. Other expansion cards available:

1. REAL TIME CLOCK
2. SPEECH SYNTHESIS
3. NETWORKING (UP TO 32 TERMINALS)
4. HIGH RES COLOUR
5. A/D — D/A CONVERSION

Quantum QM 2000

A MULTIBOARD COMPUTER


Quantum Computer Systems Limited The Leeds Computer Centre
60–62 The Balcony, Merrion Centre, Leeds LS2 8NG Telephone (0532) 458877 • Circle No. 179

COMPSOFT'S DMS – winner of the 1982 RICA Awards, 'Software Product of the Year.

Now Compsoft announce Delta – the **very** powerful, **very** friendly database* that the world has been waiting for.

* For micro computers with CP/M, MP/M, MSDOS or Commodore operating systems. Including IBM PC.

Compsoft Training Centre

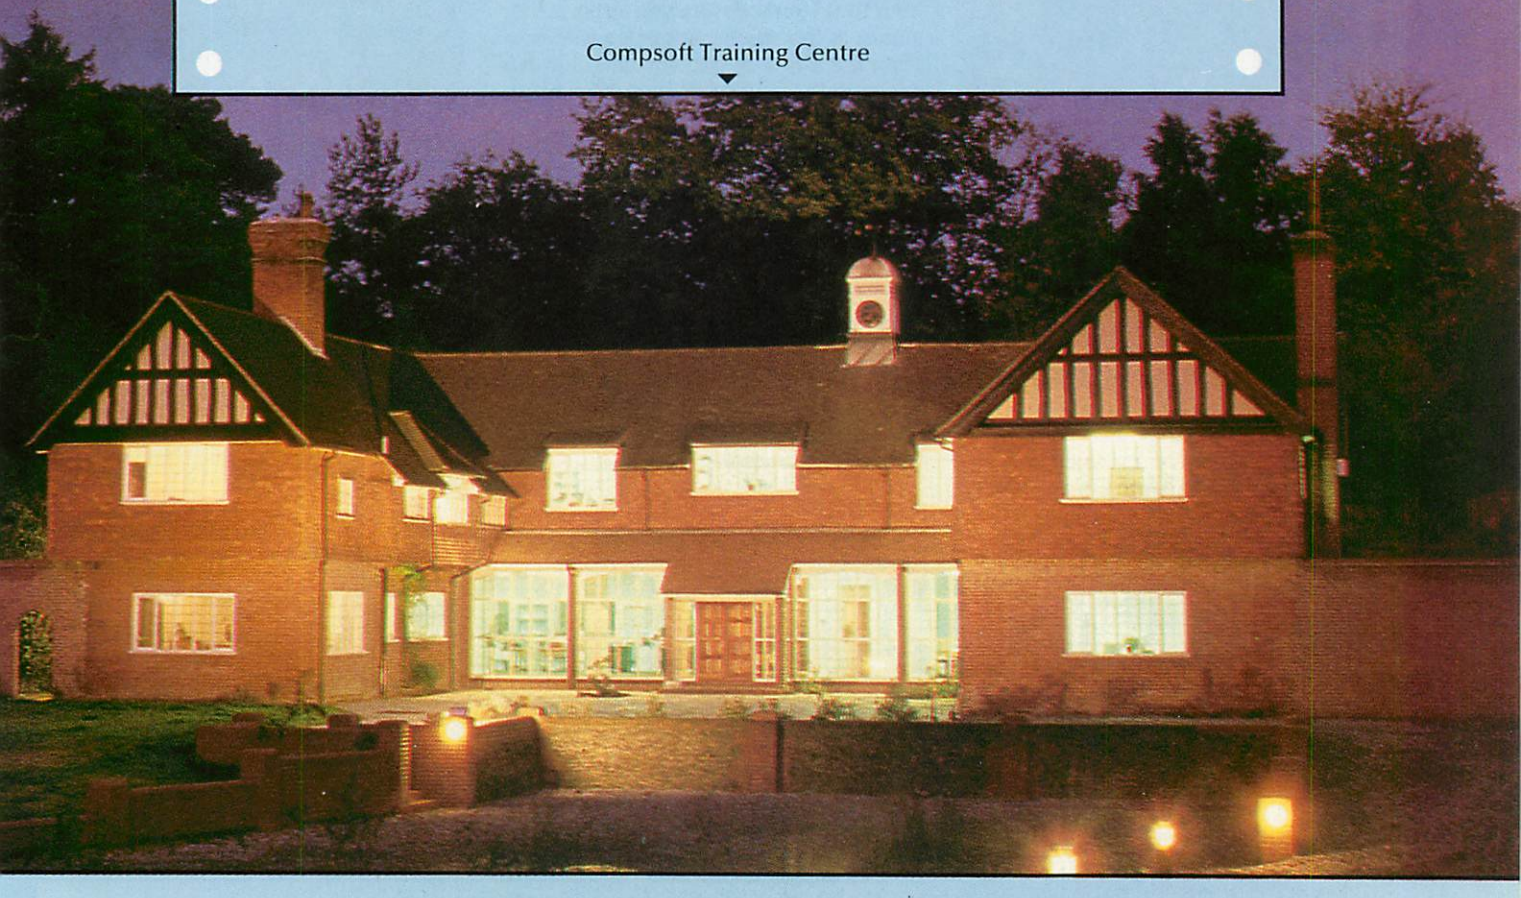

If part of your microcomputer's job is to store information, you need Compsoft's software.

Compsoft DMS is already Britains No. 1 record keeping program. And with 4000 users to our credit, we can honestly say we know more about information storage & retrieval than anyone else. We listen to your comments & requests and now we've produced a world first – the Delta – a true transactional database.

If you'd like to know more, we have general brochures, full technical specifications & free guides to DMS handling a multitude of business situations from order processing, invoicing & stock recording, through to library, personnel & hospital record management.

Find out more about the database revolution. Either telephone the office or clip the coupon now.

Compsofts Delta – taking microcomputers into the third dimension.

Compsoft Limited
Hallams Court
Shamley Green
Nr Guildford, Surrey
England GU4 8QZ
Telephone: Guildford (0483) 898545
Telex: 859210 CMPSFT

● Circle No. 178


Please send me further details

Company

Contact

Address

Tel No.

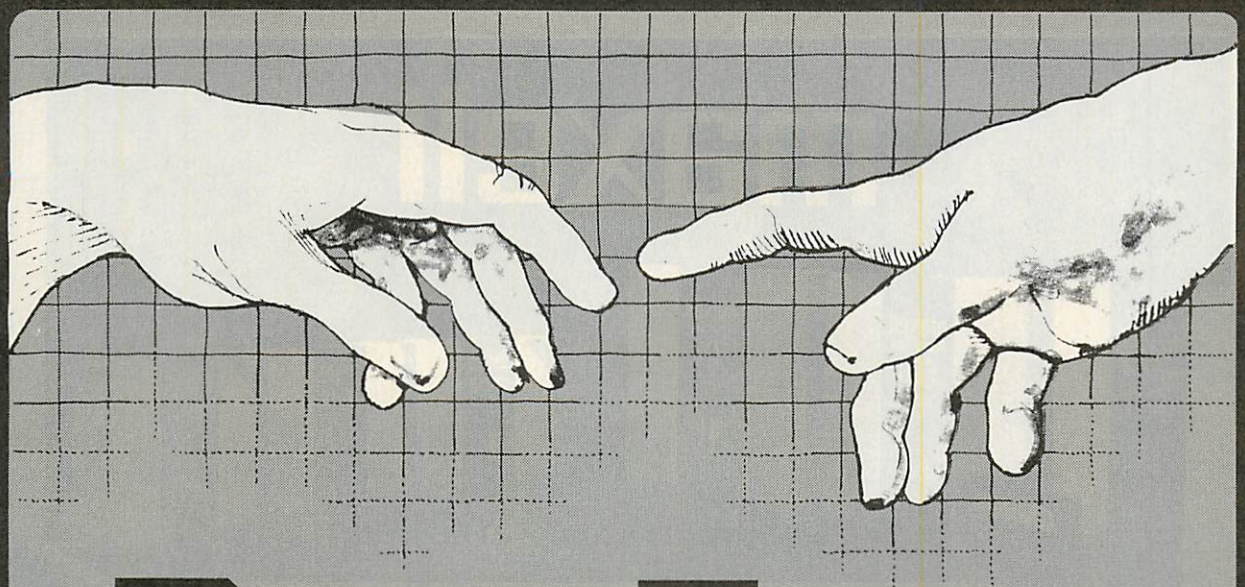

DataFlex™

SOFTWARE FOR CREATORS

Bring your CP/M software applications to life with DataFlex.

From menu to multi-key ISAM, DataFlex has the features and power you need to create complete turn-key software applications in a RELATIONAL DATA BASE ENVIRONMENT.

Compare . . . what else gives you up to 125 data files with 4 indexes each, fast on-line multi-key ISAM file maintenance, a multi-file report generator, on-line multi-file transaction processing, an easy-to-use Query, even a "soft" menu to replace the CP/M command mode. All of this using DataFlex's configuration utilities, and NO PROGRAM CODE!

It is easy to use, You can type in a Screen format "image" of a file with your text editor. Then DataFlex's AUTODEF utility will create the file definition from the screen image . . . in about five seconds.

DataFlex will handle your multi-user requirements too! It runs under the TURBOdos networking operating system with full data protection.

If the 16-bit world is your domain, an 8086 version of DataFlex will be available in early 1983. You can develop now on your Z80 system and transport completed applications to the 8086/8088.

If you need applications now, a Library of DataFlex applications is being developed by other users. For highly specialised requirements, DataFlex's PASCAL Library is available to application developers.

DataFlex can change the way you do business. And at £495, (excl. VAT), with all its facilities we consider it the best value in the business. A demo package, which limits file sizes internally, is available for computer professionals.

Get the full system, or get the demo, but get your hands on DataFlex – software for creators.

Trademarks:
CP/M; Digital Research **DataFlex;** Data Access.
TURBOdos; Software 2000

OEM, SYSTEM HOUSE AND DEALER ENQUIRIES INVITED.

EQUINOX
MULTI-USER SOFTWARE
16 Anning Street, New Inn Yard,
London EC2A 3HB. Tel: 01-739 2387
Telex: 27341

● **Circle No. 181**

maxell®



WHEN ONLY THE BEST IS GOOD ENOUGH

CONTACT:

CFM
Excell House, Trust Industrial Estate,
Wilbury Way, Hitchin,
Hertfordshire. SG4 0UZ
0462 51511

Loadplan
28 Hereford Road, London, W2 5AJ
01 221 0005

Symons Computer Services
4A Porchester Place, Bournemouth,
Hampshire. BH8 8JS
0202 23776

Word Perfect (Anglia)
4A Granville Street,
Peterborough, Cambridgeshire. PE1 2RJ
0733 310828

Constat Business Forms
92 Warren Gardens, Lisburn,
Co. Down, Northern Ireland. BT28 1HW
08462 82131

Data Total Computers
Haywood Way, Ivy House Lane,
Hastings, Sussex. TN35 4PL
0424 444460

Disking International
Moonrakers, Wheatsheaf Enclosure,
Liphook, Hampshire. GU30 7EJ
0428 722563

Michael Collins Computer Supplies
Canbury House, Tolworth Close,
Tolworth, Surbiton, Surrey. KT16 7EW
01 390 5655

Hestair Dataline
2nd Floor, 60 Charles Street,
Leicester. LE1 1FB
0533 56215

Alan Henry Computer Services
Effective House, Rainhill Road,
Rainhill, Merseyside. L35 4LD
051 430 0111

Computer Supplies Co.
8–18 Union Street, Bo'ness,
West Lothian, Scotland.
0506 823393 Telex 727479

Scotmedia Computer Supplies Ltd
Unit D, 46 Bavelaw Road,
Balerno, Midlothian. EH14 7AE
031 449 5557

Vlasak Computer Systems
Vlasak House, 8 Stewart Road,
High Wycombe, Buckinghamshire.
HP13 6AG.
0494 448633

maxell®

UK distribution through CPU Peripherals. Tel: Walton-on-Thames 46433/4/5/6.

● Circle No. 180

Computerise without compromise



The new All British QUANTUM 2000 computer system is outstanding among all the fine microcomputers now on the market. The explanation is simple. All microcomputer designers see Versatility on a high scale as their aim for the future. In the QUANTUM 2000 this ideal has actually been achieved, therefore it is demonstrably more advanced than any other.

QUANTUM 2000 offers every feature experts would look for in a new high technology 2.2 CP/M based microcomputer *plus* an expansion potential which a few years ago would have required planning permission.

What QUANTUM means by Versatility:

1. Available with 1, 2 or 3 disk drives.
2. Disk drives can be 400K or 800K floppies OR
3. 5 or 10 meg. Winchester OR
4. A mixture of floppy and Winchester.
5. 192K of extra RAM can be added, in addition to the standard 64K.
6. If the standard Centronics plus RS232 ports are insufficient, just plugging in a board adds a few more.
7. I EEE 488? No problem! Plug in a card.
8. Other expansion cards available:

1. REAL TIME CLOCK
2. SPEECH SYNTHESIS
3. NETWORKING (UP TO 32 TERMINALS)
4. HIGH RES COLOUR
5. A/D — D/A CONVERSION

Quantum QM 2000

A MULTIBOARD COMPUTER

Quantum Computer Systems Limited The Leeds Computer Centre
60–62 The Balcony, Merrion Centre, Leeds LS2 8NG Telephone (0532) 458877 • Circle No. 179

MicroSoft's flight simulator is awesome. It simulates flying in a little Cessna 182 with astonishing accuracy. In the absence of a joystick the keyboard controls are finnicky — especially as the full game uses about 45 different keys — but nonetheless the plane is incredibly responsive and a joy to fly.

This simulator was designed by Bruce A Artwick, who wrote his Master's thesis on "A Versatile Computer-Generated Dynamic Flight Display" before joining the Hughes Aircraft Corporation. He left to start his own company, Sublogic, and launched the A2-FS1 flight simulator for the Apple II. The IBM PC version from MicroSoft is, apparently, a huge advance on this.

The best thing about it is that fully half of the screen is devoted to a full three-dimensional colour display. You can also switch to sideways, downwards and backwards views, so you really can fly past a building and then look back at it. The IBM redraws the frames without benefit of any special graphics techniques, but quickly enough to present the illusion of continuity — it's almost as good as a movie on video.

The controls are amazing. It is claimed that the display meets full FAA specifications. The control panel is a faithful, detailed replica of the Cessna. You can even control the carburettor heat and the magneto switch.

There are 10 flight modes, including a demonstration mode and an Easy Flight mode. You can also fly in different kinds of weather, or in Advanced mode where the ailerons and rudder are controlled independently. Wind and weather then have more effect.

You set the mode on a two-screen menu which allows you to set all the other parameters, from the barometric pressure and the amount of cloud to the season of the year. You fly in a 24-hour format, so obviously dawn and dusk come at different times in the different seasons. There are 40 spare modes so you can, using the parameter settings, create your own and save them to disc for reuse later.

On booting up you always start at Meigs airport between Chicago Heights and O'Hare airports. You do not have enough fuel to fly across the U.S. but you can switch to start near Los Angeles, Illinois or Seattle. The database includes major buildings and geographical features so you can, flying visually, see where you are.

Finally the documentation is excellent. The disc comes with a book of about 100 pages. The instructions are comprehensive, helpful, and written in good English. There are excellent diagrams, including airplane drawings to show how the ailerons and rudder work.

In sum, the MicroSoft Flight Simulator is fantastically detailed, incredibly versatile, and a truly remarkable graphics program. Every IBM Personal Computer owner should have one.

The Hobbit

THIS IS an impressively packaged Adventure game which makes good use of the Spectrum's colour graphics to draw little pictures of the main locations. The cassette is boxed and comes complete with a copy of Tolkien's novel of the same name, plus a helpful 20-page instruction book.

You are Bilbo and make your way through Middle Earth, meet Gandalf and liberate the Dragon's treasure. Well, more likely you get eaten by a troll, but that's the idea. The interaction with other characters is limited, but above average for an Adventure game. This makes the action turn out slightly differently in each game.

The input routines accept instructions that are closer to English than usual, and you can enter several together. For convenience you can enter simple directions as single letters, or use the cursor-control keys, unshifted. The back of the instruction book contains a list of the 68 dictionary words the game understands — which saves endless hours of trying every word you can think of in the hope that something will work.

If you stop entering commands, after a while you get a wait entry, and the game goes on without you. For example, "You wait. Time passes. Gandalf closes the round green door." Later, "You wait. Time passes. Gandalf gives the curious map to you. Thorin waits." And later, "You wait. Time passes. Gandalf goes north." "You wait. Time passes." You wait. Time passes. Thorin says 'Hurry up!' "

The Hobbit was written by Philip Mitchel and Veronika Megler, with Alfred Milgrom and Stuart Ritchie, over a period of 18 months. They have not only produced one of the best games for the Spectrum, but given everyone else a lesson in good game design. Only one criticism: it's a pity the trolls do not spell better.

Specification

Type: Adventure game, text with some colour graphics and real-time components.
Format: cassette
System: 48K Spectrum
Manufacturer: Melbourne House, 131 Trafalgar Road, London SE10
Price: £14.95
Rating: 16/20



Defender

IT'S VERY HARD to review Defender, mainly because it's very hard to stop playing it. It is one of those games that, while luck plays a part, recognises and rewards skill. You just know you can get a better score next time. "Just one more go" can keep you up half the night.

Like many of Atari's best games it is readily available in the arcades, so if you are one of the unfortunate few who is not familiar with it, go and look now. Take a couple of pounds, because it is not easy to get the hang of it. First you have to learn the controls, then adopt a Zen attitude of detached tranquility and blast everything on sight.

The Atari version is played with a joystick instead of a lever and Thrust and Reverse buttons. Moving the joystick left or right sends your Defender left or right. To fire, press the joystick button. The smart bomb is operated by the space bar, and you jump through space by hitting any other key except Shift, etc.

In other respects, the Atari Defender seems to be a nearly exact copy of the arcade game. Movement on the Atari version is faster and smoother, but of course the screen is smaller. In particular, mutant humanoids are more vicious, but you soon learn how to deal with them ...


Unlike the arcade game, however, the home-computer version offers three different levels of play — easy, normal and hard. I only tried easy. Two-player versions and a demonstration mode are also included.

There is only one thing lacking: the computer does not record your highest score, let along best today or best of all time. This may be because it is not possible to fit more than 16K into a cartridge, and there just is not room for it.

Even so, Defender is outstanding, and could the the second-best home computer game ever written — after the immortal Star Raiders, of course.

Specification


Type: Real-time arcade game with outstanding colour and sound.
Format: Plug-in ROM pack CXL-4025
System: Any Atari 400 or 800 plus joystick
Manufacturer: Atari
Price: £34.95
Rating: 18/20

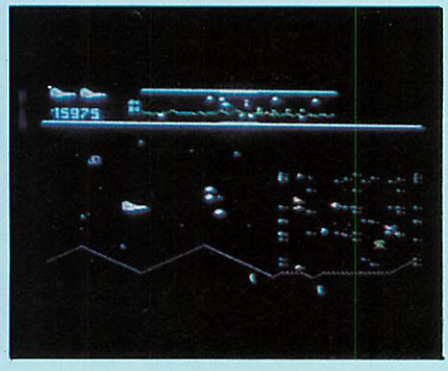

Flights of fancy

Jack Schofield gives his fantasies free rein with an assortment of simulation games.

SIMULATION is one of the most interesting aspects of computing, and advanced graphics techniques have been pioneered commercially by flight-simulation experts such as Rediffusion. Many personal-computer owners can also "learn" to fly using a simulation program, though the actual aim is entertainment rather than instruction. To establish the range of the field I tried three: Nightflight for the Sinclair Spectrum, Jumbo Jet Pilot for the Atari, and MicroSoft's flight simulator for the IBM Personal Computer.

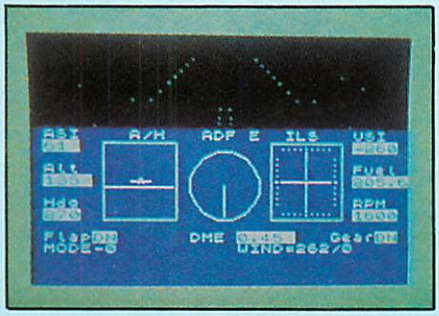

Nightflight on the Spectrum.

Nightflight comes on cassette and loaded on the third attempt — about par for the course with the Spectrum. It presents a menu of options including two demonstration modes, take-off and landing modes, and flying by two different types of navigation.

Graphically the simulation is about as good — or as bad — as you would expect: it is rather primitive, but not bad considering the limitations of the Spectrum. The cockpit view is a narrow strip at the top of the screen. As this is a night flight, it is plain black most of the time. There's also a map screen you can switch to, but it is confusingly presented.

The cockpit controls are also hard to follow, and the poor instruction sheet lacks a diagram. The blurb says Nightflight was written by a pilot. I believe it. He should have got a total ignoramus to write the instructions and so explain the stuff to the rest of us who aren't. As usual, the Spectrum sound is pathetic. However, the light plane is quite responsive, and that makes the weaknesses acceptable.


Jumbo Jet Pilot from Thorn EMI is a very different effort. Being written for the more powerful Atari 400 and 800 micros, the graphics are vastly superior. The simulation itself is also far more detailed, and the controls far more complicated. For example, elevating the flaps lifts the nose and this registers, along with a change in cockpit view, before it starts to affect altitude. There is also a map mode, which is simple but perfectly adequate.

Jumbo Jet Pilot comes on a plug-in ROM, so loading is simplicity itself. Control is partly by the keyboard, but also uses a standard joystick which makes it much more user-friendly.


The problem with Jumbo Jet Pilot is that it is unbelievably tedious to play. The plane is not responsive to the controls: you need 10 minutes to take off and about an hour to fly to the destination airport. It's almost as though the simulation was in real-time. I'm surprised you don't have to queue on the runway or get delayed by strikes.

I tried two flights. The second time I didn't bother with the runway — you can take off anywhere. I did not spot any landmarks between the two airports so the landscape appears uniformly green and boring, and the night-flight option is the same. The sound is also unimaginative.

Incidentally, the instructions are very poor compared with those for Atari's own games. They do at least contain a tiny diagram of the controls, labelled from a to p, but are hardly easy to read.

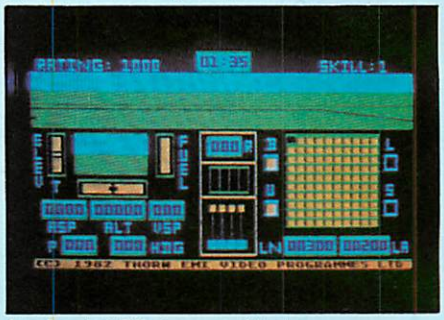

Jumbo Jet Pilot on an Atari.

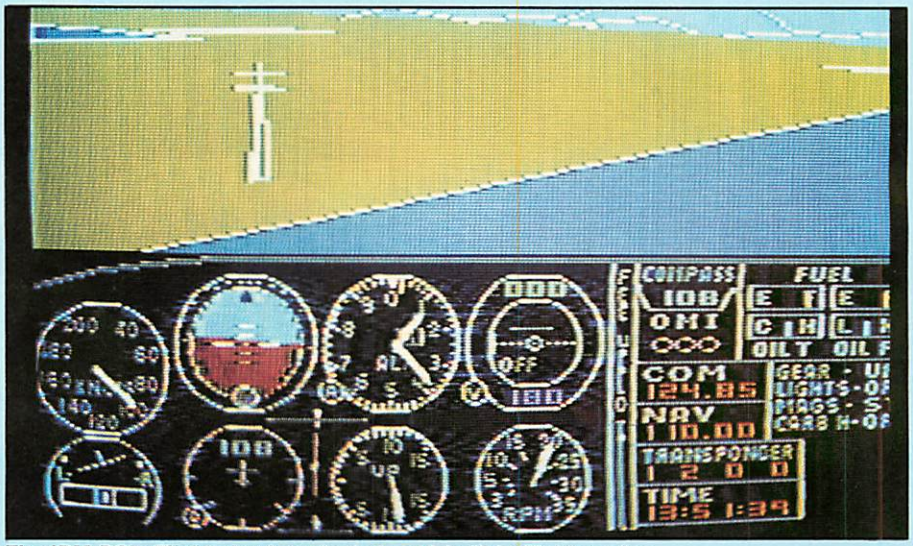

The IBM PC's Flight simulator includes 10 built-in flight modes.

Flight-simulator specifications


	Nightflight	Jumbo Jet Pilot	Flight Simulator
Type: real-time flight simulation with colour graphics and some sound			
Format:	cassette tape	plug-in ROM	5.25in. floppy disc
System:	48K Spectrum	Atari 400 or 800 with joystick	IBM PC with colour-graphics adaptor
Manufacturer:	**Hewson Consultants,** 60A St Mary's Street, Wallingford, Oxfordshire OX10 OEL	**Thorn EMI,** Thorn EMI House, Upper St Martin's Lane, London WC2	**MicroSoft,** Bulbourne House, Gossoms End, Berkhamsted, Hertfordshire
Price:		£34.95	$50
Rating:	10/20	12/20	19/20

COMPSOFT'S DMS – winner of the 1982 RICA Awards, 'Software Product of the Year.

Now Compsoft announce Delta – the **very** powerful, **very** friendly database* that the world has been waiting for.

* For micro computers with CP/M, MP/M, MSDOS or Commodore operating systems. Including IBM PC.

Compsoft Training Centre

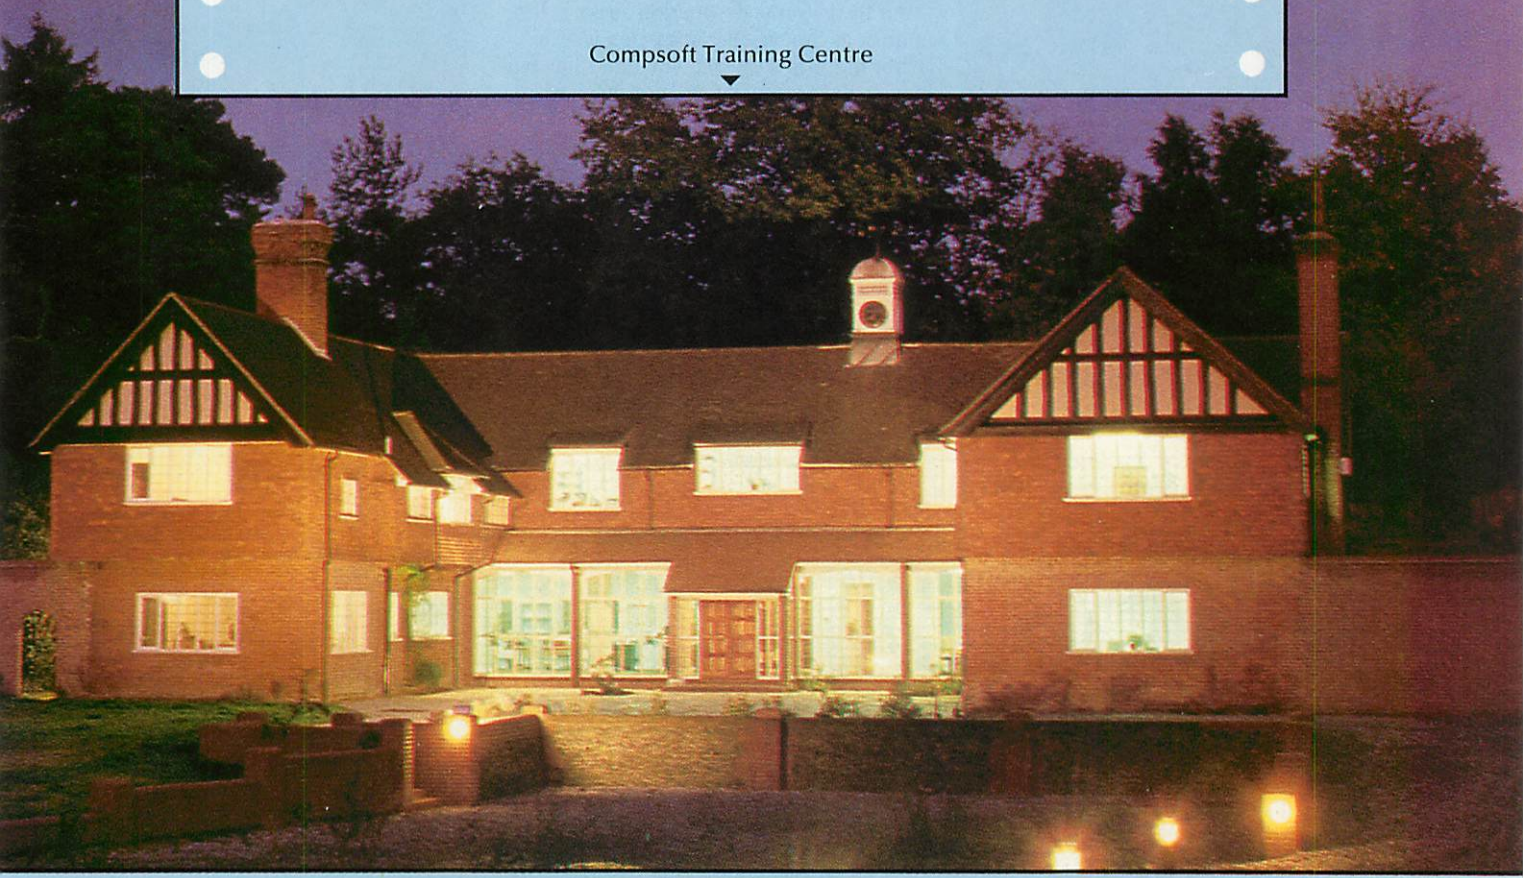

If part of your microcomputer's job is to store information, you need Compsoft's software.

Compsoft DMS is already Britains No. 1 record keeping program. And with 4000 users to our credit, we can honestly say we know more about information storage & retrieval than anyone else. We listen to your comments & requests and now we've produced a world first – the Delta – a true transactional database.

If you'd like to know more, we have general brochures, full technical specifications & free guides to DMS handling a multitude of business situations from order processing, invoicing & stock recording, through to library, personnel & hospital record management.

Find out more about the database revolution. Either telephone the office or clip the coupon now.

Compsofts Delta – taking microcomputers into the third dimension.

Compsoft Limited
Hallams Court
Shamley Green
Nr Guildford, Surrey
England GU4 8QZ
Telephone: Guildford (0483) 898545
Telex: 859210 CMPSFT

COMPSOFT

● Circle No. 178

Please send me further details

Company

Contact

Address

Tel No.

Recursive Kalman filters

(continued from previous page)

process state variable x_k and the state variable estimate $\hat{x}_o$. The program then asks for the initial value of the estimation error variance $p_o(-)$, and finally for the maximum and minimum values you wish the screen vertical axis to represent.

In practice, the initial values of the state-variable estimate and the estimation error variance are not known, so the initial estimate is a pure guess. Consequently the initial estimation error variance must be set to a high value, 10E06 for example, in order to tell the filter that you have little confidence in the initial guess. Of course in this simulation you do know what the actual initial state variable value is because you are also simulating the system itself. You can set x_o and $\hat{x}_o$ to the same value if you like, or use different values to see if the filter estimates converge to somewhere near the system values.

The program makes use of the Apple II high-resolution graphics screen to plot the system state variable and the filter's estimate of it, with the time axis of the filter estimate shifted 60 lines above the actual state-variable time axis for clarity. They should, of course, be plotted on top of each other, but on a black and white monitor it would be difficult to distinguish estimate from actual state. Because the RND function in Applesoft Basic has an approximately flat probability-distribution profile the program incorporates a small routine to generate roughly Gaussian random variables in order to simulate the Gaussian white noise present in the measurement and input.

The input to the system is simulated using the games paddle 0; turning it to a different position will cause the state to converge to a different steady-state value. The filter estimate should follow suit within a couple of time steps. Moving the games paddle to a new position is equivalent to changing the air temperature in the thermocouple simulation. The filter gain G_k is printed below the high-resolution screen after every time step.

The gain converges to a steady value after a few time steps even if the system itself is unstable and the state variable increases exponentially with time. The recursive filter equations are often dispensed with, and the constant gain is pre-computed and used instead in the recursive filter estimation equation in figure 5. All the other recursive filter gain equations in figure 3 then become unnecessary. Try running the simulation and note the value that G converges to. Then alter the program so that this is used from the beginning, and run it again. There is very little difference in the filter performance.

If you use the thermocouple model parameters in the simulation program summarised in table 1, then the program produces a plot like that given in figure 9. The filter estimate of v_k is good. Remember that the filter is estimating v_k purely from the noisy measurement y_k. In this case the filter is not being taxed much since the measurement noise is low, and so the measurement is a good indicator of the actual value of v_k.

The Kalman filter really becomes useful when the measurement noise level is higher and you want to filter out the measurement noise to get a good estimate of the state variable. Try rerunning the simulation, but this time pretend that the measurement noise is higher by specifying a larger measurement-noise variance. The filter estimate is still very good, even for much higher measurement noise variances.

This model is based on an actual thermocouple consisting of two wires of NiCr and NiAl of 0.114mm. diameter. The dynamic equation describing the thermocouple is:

$dv/dt = 9.59v + 0.39(T + \text{random noise})$

where v is the potential difference produced by the thermocouple in mV, T is the temperature of the air in the duct. The random noise which is added to the temperature varies about a mean of zero.

The measurement model is given by:

$y = 1000v + \text{random noise}$

The amplifier gain is 1,000

The discrete version of this equation for a time step of 0.1s is:

$v_{k+1} = 0.383v_k + 0.025(T + \text{random noise})$

and

$y_k = 1000v_k + \text{random noise}$

The variances of the noises in the temperature and the measurement are:

variance of temperature noise = 8.0

variance of measurement noise = 0.0025

Figure 7. The dynamic model of the thermocouple temperature measurement system for the hot-air duct example.

Recursive filter estimation equation stays exactly the same, since noise is not taken into account by the deterministic filter model of the system.

One of the gain equations is slightly altered:

$p_{k+1}(-) = \Phi^2 p_k(+) + \Delta^2 W$

where W is now the variance of the input noise of the following system.

$x_{k+1} = \Phi x_k + \Delta(u_k + w_k)$

where w_k is the input noise.

Figure 8. Modifications to the Kalman filter equations if the noise is produced in the input rather than in the process itself.

Bibliography

Control and Dynamic Systems by Takahashi, Rabins and Auslander; Addison-Wesley, 1970.

"Kalman Mileage Predictor-Monitor" by Jerry Lobdill; *Byte* July 1981.

"A new approach to linear filtering and prediction problems" by R E Kalman, *Journal of Basic Engineering Transactions of the ASME Series D,* **82,** (1960), page 33.

"New results in linear filtering and prediction theory" by R E Kalman and R S Bucy; *Journal of Basic Engineering Transactions of the ASME Series D,* **83,** (1961) page 95.

Estimation Theory With Applications to Communications and Control by Sage and Melsa; McGraw-Hill, 1971.

Uncertain Dynamic Systems by Schweppe; Prentice-Hall, 1973.

Introduction to Stochastic Control Theory by Åström; Academic Press, 1970.

Figure 6.


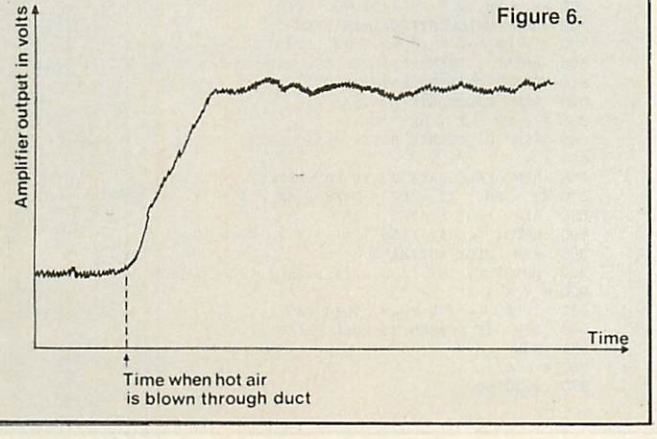


Figure 9.

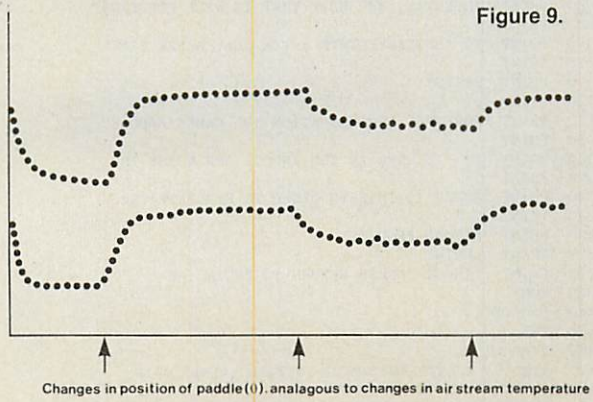

prediction of x_k, that is the latest estimate of x_k based on k measurements.

If you examine figure 4, you will see that the filter evaluates the error between the measurement of the process and the measurement as predicted by the model of the process on the computer. The error is then fed to the model in order to control the error in the state-variable estimate. The whole technique is thus in effect a feedback loop, and hence self-compensating. It is actually recursive, and draws on the past estimate in order to compute the present estimate.

The recursive feature means that past trends are automatically taken into account in the evaluation of the latest estimate, so the technique is vary fast. Figure 4 shows how the predicted measurement error $\hat{e}_{k+1}(-)$ is multiplied by a weighting factor, or gain, G which is recursively calculated from the Kalman filter equations, which are given in figure 5. The filter equations are quite straightforward, and because of their recursive nature do not require storage of previous values of the gain G or previous values of the state variable estimate $\hat{x}$.

If you have an analogue-to-digital converter interfaced to your micro, you could use the Kalman filter to estimate an unknown state variable of some process from a noisy measurement. You will have to model the process mathematically first. It is possible to use the computer to simulate both the sytstem and the filter to show how the Kalman filter works without actually needing the hardware for on-line measurements of a system. The simulation given here is based on thermocouple readings of the temperature of air flowing through a duct. Turbulence in the air stream makes the temperature fluctuate randomly about a mean value, and there is also some electrical noise generated by the thermocouple and amplifier circuit.

The thermocouple can be modelled as a first-order system. If it is placed in the duct and the temperature of the air is suddenly changed, then the voltage output from the thermocouple amplifier looks like that shown in figure 6. The voltage rises steeply before the output settles to a steady state which is modified by random fluctuations.

The model equations for this system are given in figure 7. The first-order differential equation is converted to a difference equation for use in the discrete filter. The air temperature acts as an input to the system, and random fluctuations in air temperature are strictly speaking input noise rather than process noise. This distinction is reflected in changes to the filter equations — see figure 8. The variance in the input noise has been calculated as approximately 8, and the variance of the measurement noise as 0.0025: the main source of the noise is therefore from the air-stream temperature fluctuations.

The problem here is to estimate the thermocouple voltage v_k from the noisy measurement voltage y_k. Once you know v_k then you can, if you wish, calculate the air stream temperature using the relationship for this particular type of thermocouple:

$$t_k(\text{in °C}) = 25v_k(\text{mV})$$

An Applesoft program is given in the listing which will perform a filter simulation for a general first-order system. The program asks for the parameters Φ and Δ of the dynamic equation which describes the system and uses these values for the filter model. Next you have to input the noise variances, the initial values of the actual

(continued on next page)

The discrete version of the linear equations in figure 3 are:

$x_{k+1} = \Phi x_k + \Delta u_k + w_k$

$y_k = Cx_k + v_k$

$W = E(w_k^2)$ and $V = E(v_k^2)$ are the noise variances, which are known; w_k and v_k are assumed not to be totally independent of each other. The recursive filter estimation equation is:

$\hat{x}_{k+1}(+) = \Phi\hat{x}_k(+) + \Delta u_k + G_{k+1}[y_{k+1} - C(\Phi\hat{x}_k(+) + \Delta u_k)]$

The recursive filter gain equations are:

$G_{k+1} = (Cp_{k+1}(-) \div (C^2p_{k+1}(-) + V)$

$p_{k+1}(-) = \Phi^2p_k(+) + W$

$p_k(+) = [1 - G_kC]p_k(-)$

with the initial condition

$p_o(-) = E[(x_o - \hat{x}_o)^2]$

Figure 5. The Kalman filter equations for a scalar system like that given in figure 3.

```
10  TEXT
20  HOME
30  PRINT "PROGRAM TO DEMONSTRATE THE KALMAN FILTER"
40  PRINT "FOR A FIRST ORDER SYSTEM"
50  PRINT : PRINT : INPUT "INPUT PHI    ";PH
60  PRINT : INPUT "INPUT DELTA  ";DE
70  PRINT : INPUT "INPUT C      ";C
80  PRINT : PRINT : INPUT "INPUT THE VARIANCE OF THE INPUT NOISE    ";VI
90  PRINT : PRINT : PRINT "INPUT THE VARIANCE OF THE MEASUREMENT"
100  INPUT "NOISE    ";VM
110  HOME
120  PRINT "INPUT THE INITIAL VALUE OF THE"
130  INPUT "STATE VARIABLE  ";X
140  PRINT "INPUT THE INITIAL VALUE OF THE"
150  INPUT "STATE VARIABLE ESTIMATE  ";XE
160  PRINT : PRINT
170  PRINT "INPUT THE INITIAL VALUE OF THE"
180  INPUT "VARIANCE OF THE ESTIMATION ERROR  ";PM
190  PRINT
200  PRINT "NOW DEFINE SCREEN MATHEMATICAL SPACE"
210  PRINT : INPUT "INPUT UPPER VALUE ";UV
220  PRINT : INPUT "INPUT LOWER VALUE ";LV
230  HOME
240  PRINT "IN THIS DEMONSTRATION THE FILTER GAIN IS"
250  PRINT
260  PRINT "BEING CALCULATED ON LINE AT EACH TIME"
270  PRINT
280  PRINT "INTERVAL, BUT NOTE THAT IT WILL CONVERGE"
290  PRINT
300  PRINT "TO A STEADY STATE AFTER ONLY A FEW TIME"
310  PRINT
320  PRINT "STEPS"
330  PRINT
340  PRINT "FOR THIS DEMONSTRATION THE GAMES PADDLE"
350  PRINT
360  PRINT "(0) IS USED AS THE INPUT, AND NOISE IS"
370  PRINT
380  PRINT "ADDED TO THIS IN ORDER TO SIMULATE THE"
390  PRINT
400  PRINT "ACTUAL PROCESS"
410  PRINT : PRINT
420  PRINT : INPUT "PRESS RETURN TO BEGIN";A$
430  HOME
440  HCOLOR= 3
450  HGR
460  VTAB 21
470  REM  CALCULATE AND PRINT INITIAL KALMAN GAIN
480 G = PM * C / (C ^ 2 * PM + VM)
490  PRINT : PRINT "FILTER ESTIMATE SHOWN ABOVE ACTUAL VALUE"
500  PRINT "FILTER GAIN= ";G
510  REM  PLOT INITIAL STATE & STATE ESTIMATE
520 K = 0
530  HPLOT K, INT (159 * (1 - X / (UV - LV)))
540  HPLOT K, INT (159 * (1 - XE / (UV - LV)) - 60)
550 K = K + 4
560  REM  GAMES PADDLE SIMULATES INPUT
570  REM  U CAN HAVE A VALUE BETWEEN 0 & 255
580 U =  PDL (0)
590  REM
600  REM  SLOW DOWN THE PROGRAM TO SEE HOW GAIN CHANGES
610  FOR I = 1 TO 500: NEXT I
620  REM  GENERATE GAUSSIAN RANDOM NOISE VARIABLES
630  REM  V IS THE NOISE IN THE MEASUREMENT
640  REM  W IS THE NOISE IN THE INPUT
650 V = 0:W = 0
660  FOR I = 1 TO 50
670 V = V +  RND (1)
680 W = W +  RND (1)
690  NEXT
700 V =  SQR (12 / 50) * (V - 25) *  SQR (VM)
710 W =  SQR (12 / 50) * (W - 25) *  SQR (VI)
720  REM
730  REM  ADD NOISE TO INPUT
740 U = U + W
750  REM  UPDATE ESTIMATION ERROR VARIANCE
760 PP = (1 - G * C) * PM
770 PM = PH ^ 2 * PP + DE ^ 2 * VI
780  REM  CALCULATE KALMAN GAIN
790 G = PM * C / (C ^ 2 * PM + VM)
800  PRINT : PRINT "FILTER ESTIMATE SHOWN ABOVE ACTUAL VALUE"
810  PRINT "FILTER GAIN= ";G
820  REM  CALCULATE STATE
830 X = PH * X + DE * U
840  REM  CALCULATE NOISY MEASUREMENT
850 Y = C * X + V
860  REM  CALCULATE STATE ESTIMATE
870 XM = PH * XE + DE * U:XE = XM + G * (Y - C * XM)
880  REM  PLOT STATE
890  HPLOT K, INT (159 * (1 - X / (UV - LV)))
900  REM  PLOT ESTIMATE
910  HPLOT K, INT (159 * (1 - XE / (UV - LV)) - 60)
920 K = K + 4
930  IF K   = 279 THEN  GOTO 580
940  REM  IF SCREEN IS FULL CLEAR IT
950  HGR
960 K = 0
970  GOTO 580
```

Recursive Kalman filters

(continued from previous page)

ments in such a way as to make it impossible to estimate the state vector x at all. The system is then unobservable and unless you can specify different measurements you will not be able to use a Kalman filter. But the majority of cases are observable, and there is a test to check that they are.

Rather than consider the multivariable filter, it is easier to look at the single-variable or scalar case. The extension of the scalar filter equations to the multivariable case is quite straightforward. Figure 3 gives the model equations for a scalar stochastic system. The covariances referred to in figure 2 are just the multivariable equivalent of the scalar variance. Although you do not know the values of the process and measurement noises directly, you must have some idea of the magnitude of the noises in order to use a Kalman filter and so you must know what the noise variances are. In many practical cases the variances of the noises are not known exactly, but educated guesses or values taken from past experiments often suffice.

Most applications of Kalman filters are on digital computers, so it is necessary only to consider what is called discrete filtering. Both the model and filter equations are given in terms of equations rather than differential equations, because a computer will have to sample the measurements at discrete intervals, and then perform any calculations between the intervals. The system itself can still be a continuous process of course, while the filter works in discrete jumps.

If you have a continuous model of the process in terms of a differential equation you will have to rewrite the differential equation as a difference equation. If the sampling interval is small, it is usually sufficient to use the approximation for dx/dt:

$$dx/dt \simeq (x_{k+1} - x_k)/\delta t$$

where δt is the sampling time, that is the time between sampling intervals k and k+1. Thus for example, $dx/dt = 10x + u$ could be written as:

$$(x_{k+1} - x_k)/\delta t = 10x_k + u$$

which rearranges to:

$$(x_{k+1} = 10\delta t + 1)x_k + \delta t u$$

So if $\delta t = 1$ second, for example, then:

$$x_{k+1} = 11x_k + u$$

which can be written as:

$$x_{k+1} = \Phi x_k + \Delta u$$

where $\Phi = 11$ and $\Delta = 1$. If the model is not a first-order differential equation but of higher order the higher-order differential equation can be written as a group of simultaneous first-order differential equations, though that again is a multivariable case.

A block diagram of the discrete Kalman filter is shown in figure 4. It shows how the filter uses a model of the process internally. This model consists of equations like those in figure 3, but without the noise, since the exact noise values are not known. The filter's internal model is thus a deterministic model of the stochastic system; deterministic means exact, and not governed by the laws of probability.

The circumflex accents above the symbols in figure 4 signify filter estimates, as opposed to the actual system values. The plus and minus signs in brackets show whether the estimates are based on all the measurements made so far (+), or all the measurements apart from the latest one (−). This effectively means that $\hat{x}_k(-)$ is a prediction of x_k based on k−1 measurements, whereas $\hat{x}_k(+)$ is an updated

Φ	0.383
Δ	0.025
C	1000.0
variance of input noise	8.0
variance of measurement noise	0.0025
initial value of the state variable	10.0
initial value of the estimate	0.0
initial value of the variance of the estimation error	10E+06
upper screen value	40
lower screen value	0

Table 1. Typical values to be used with the Kalman filter simulation program for the thermocouple example given in the text.

System equation:

$$\frac{dx}{dt} = Ax + Bu + w$$

Measurement model equation:

$$y = Cx + v$$

where: x is a single variable, called the state variable; y is a scalar measurement made on the system; u is a scalar input to the system; w is a scalar Gaussian random noise in the process itself; v is a scalar Gaussian random noise in the measurement; A, B and C are scalar coefficients. The variances W and V of the noises w and v are assumed known. (Variance is defined as:


$W = E(w^2)$

$V = E(v^2)$

The variance is the expected — that is, the mean — value of the squared noise.

Figure 3. Linear single-variable system equations.

Figure 4.

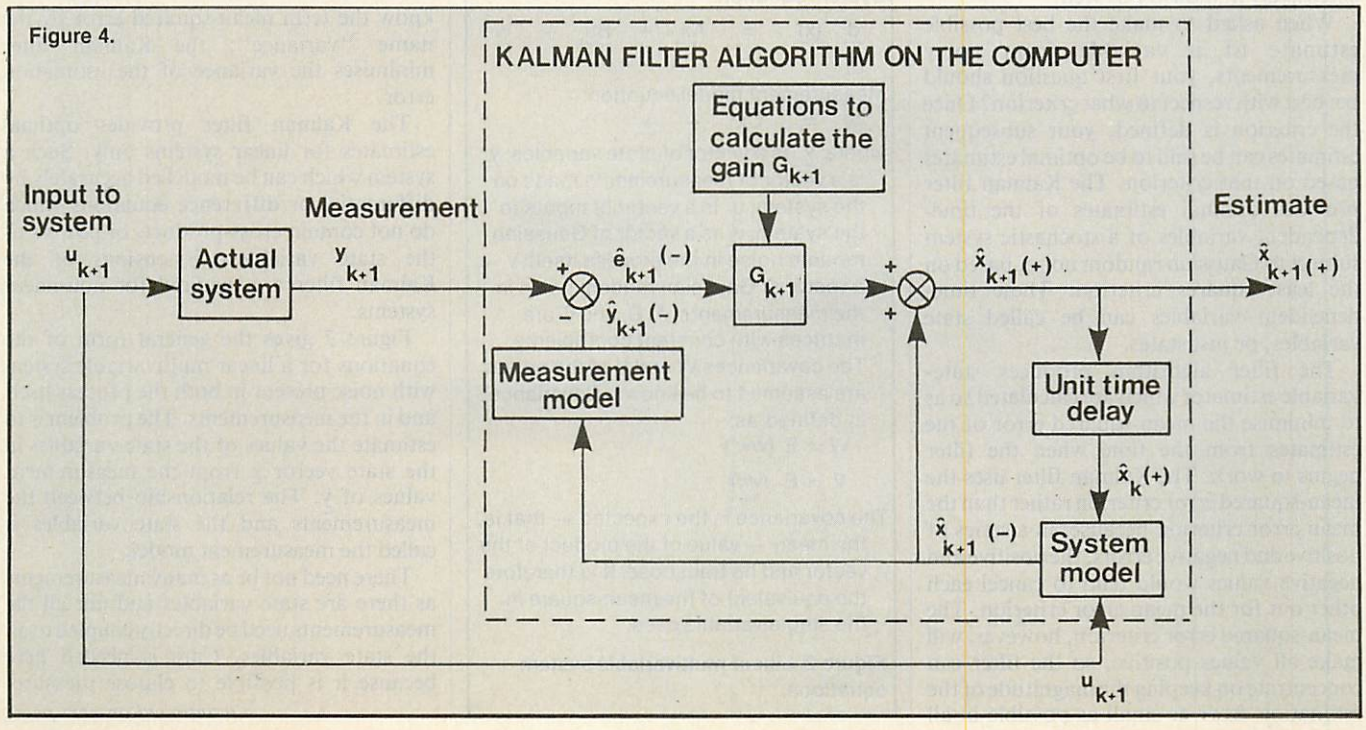

Recursive Kalman filters

What do the steel rolling mills, the Space Shuttle and Exocet missiles have in common? Bill Hill explains.

THE KALMAN FILTER is, in essence, a filter for removing noise. It is a recursive algorithm on a digital computer which estimates the values of the variables of a stochastic system from measurements which contain randomly fluctuating noise. In many cases the estimates are needed to control the system. For example, an Exocet missile skimming across the waves contains equipment to measure its height above the surface and keep it at a steady level. With lots of little wavelets superimposed on the ocean swell, together with electrical noise in its circuits, the measurements it receives may look something like the pattern in figure 1. To control the height of the missile it is necessary to estimate the height with the noise filtered. A Kalman filter provides such an estimate, which would look something like the dashed curve shown in figure 1.

A Kalman filter can also be used to estimate variables which are not even directly reflected in the measurements made on the system. For example, a power station's boiler only has a few thermocouples placed in strategic positions. Suppose an engineer needs to know what the steam temperature or pressure is elsewhere, perhaps in some totally inaccessible part of the boiler? Using the few available measurements, a Kalman filter can be used to estimate the otherwise inaccessible variables.

R E Kalman, an American academic, formulated the filter algorithm in the early 1960s. His contribution was to construct a recursive algorithm which decreases the computational burden at each time step, and consequently makes real-time estimation a practical proposition. Previously mathematicians and control engineers had tried to solve the estimation problem using complicated mathematical techniques. Although there are plenty of military uses for Kalman filters they are also used extensively in industry as well.

When asked to make the best possible estimate of a variable from noisy measurements, your first question should be: best with respect to what criterion? Once the criterion is defined, your subsequent estimates can be said to be optimal estimates based on that criterion. The Kalman filter provides optimal estimates of the time-dependent variables of a stochastic system subject to Gaussian random noise, based on the least squares criterion. These time-dependent variables can be called state variables, or just states.

The filter algorithm produces state-variable estimates which are calculated so as to minimise the mean-squared error of the estimates from the time when the filter begins to work. The Kalman filter uses the mean-squared error criterion rather than the mean error criterion because, in a series of positive and negative errors, the positive and negative values would tend to cancel each other out for the mean error criterion. The mean-squared error criterion, however, will make all values positive, so the filter can concentrate on keeping the magnitude of the estimation error as small as possible in all cases. Those familiar with statistics will know the term mean-squared error by the name "variance"; the Kalman filter minimises the variance of the estimation error.

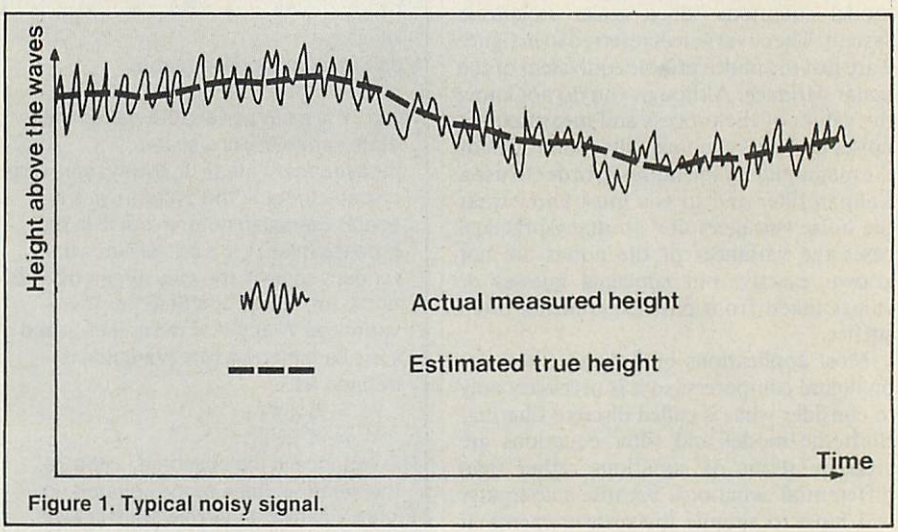


Figure 1. Typical noisy signal.

System equation:

$$\frac{d}{dt}(\underline{x}) = A\underline{x} + B\underline{u} + \underline{w}$$

Measurement model equation:

$$\underline{y} = C\underline{x} + \underline{v}$$

where: $\underline{x}$ is a vector of state variables; $\underline{y}$ is a vector of measurements made on the system; $\underline{u}$ is a vector of inputs to the system; $\underline{w}$ is a vector of Gaussian random noise in the process itself; $\underline{v}$ is a vector of Gaussian random noise in the measurements; A, B, and C are matrices with constant coefficients. The covariances W and V of the noises are assumed to be known. Covariance is defined as:

$$W = E(\underline{w}\underline{w}')$$

$$V = E(\underline{v}\underline{v}')$$

The covariance is the expected — that is, the mean — value of the product of the vector and its transpose. It is therefore the equivalent of the mean-square in the single-variable case.

Figure 2. Linear multivariable system equations.

The Kalman filter provides optimal estimates for linear systems only. Such a system which can be modelled accurately by differential or difference equations which do not contain cross-products or powers of the state variables. Extensions of the Kalman filter are required for non-linear systems.

Figure 2 gives the general form of the equations for a linear multivariable system with noise present in both the process itself and in the measurements. The problem is to estimate the values of the state variables in the state vector $\underline{x}$ from the measurement values of $\underline{y}$. The relationship between the measurements and the state variables is called the measurement model.


There need not be as many measurements as there are state variables and not all the measurements need be directly coupled to all the state variables. Care is needed here because it is possible to choose measure-

(continued on next page)


Auto Word

Drive down disc drive prices!



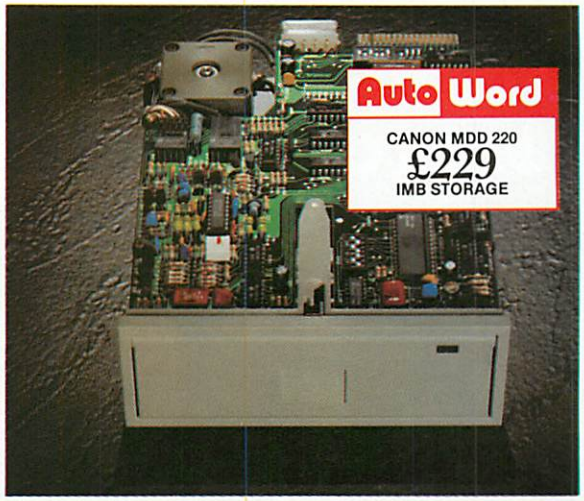



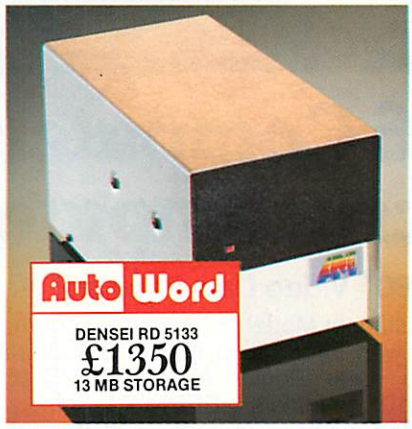

OUR FLOPPY DISC DRIVES ARE COMPATIBLE WITH THE FOLLOWING SYSTEMS:
BBC MICRO ™ TRS 80™ NASCOM™ VIDEO GENIE™ SUPERBRAIN™ ETC.

CANON MDD 5¼" SLIM FLOPPY DISC DRIVES

MODEL	NAKED DRIVE	SINGLE BOXED & PSU	DUAL BOXED & PSU
6106 (40 TK SS DD)	£139	£169	£329
6108 (40 TK DS DD)	£169	£199	£389
*120 (80 TK SS DD)	£189	£219	£429
*220 (80 TK DS DD)	£229	£259	£509

*HARDWARE/SOFTWARE SELECTABLE TO RUN IN 40 TK OR 80 TK MODE WITH LED MODE SELECT DISPLAY

5¼" WINCHESTER HARD DISC UNITS.
THE DENSEI HARD DISC (6.7M/13.3M) CONFIGURED TO RUN ON:
***TRS 80 III™ *APPLE II™ *IBM P.C.™**

MODEL	PRICE	TRS 80 III/APPLE II	IBM PC
RD 5067 (6.7M)	£1195	With case, power supply, host adaptor, disk controller and software patches	To fit existing system with host adaptor and software patches
RD 5133 (13.3M)	£1350		

ALL CANON & DENSEI DRIVES CARRY A 12 MONTH WARRANTY!

LOWEST PRICES ON SHUGART AND CDC FLOPPY DISK DRIVES

SHUGART SA800/801 (8" SS DD)	£319
SHUGART SA850/851 (8" DS DD)	£429
CDC 9408 20 ms step (40 TK SS DD)	£119
CDE 9408 5 ms step (40 TK SS DD)	£159
CDC 9409 5 ms step (40 TK DS DD)	£219
CDC 9409T 5 ms step (80 TK DS DD)	£269

THE AUTOWORD EXECUTIVE RANGE OF DUAL 5.1/4" (CDC) AND 8" (SHUGART) BOXED DRIVES. TOP QUALITY UNITS. ALSO AVAILABLE WITH OWN LOGO AND COLOURS. FROM £419

HAVE YOUR FLOPPIES FLOPPED? AUTOWORD LEAD THE FIELD IN ACROSS THE RANGE DISC DRIVE REPAIR. COMPETITIVE PRICES ON APPLICATION.

ALL PRICES ARE EXCLUSIVE OF VAT

N.B. DISCOUNTS AVAILABLE

The Auto Word is spreading!

AutoWord Services Ltd. 164 St. Pauls Avenue Slough Berks SL2 5ER Telephone: (0753) 78424/79599

● **Circle No. 177**



Tandy TRS-80™ Model 16 Computer Our Most Advanced Microcomputer

The TRS-80 Model 16 is capable of 512K internal RAM and 2½ megabytes of disk storage. It has a 32/16-bit microprocessor for greatly increased speed and larger amounts of internal memory to allow more complex tasks to be accomplished with ease! In addition to the 32/16-bit main processor, the Model 16 incorporates - the Z-80 to maximise 16-bit operations. Dual Processor design permits Model 16 to use Model II software. The Model 16 features all new thin line double-sided, double-density 8-inch disk drives. Model 16 is so powerful that three people can use it at the same time - just add two low cost terminals. (Requires hard disk 384K Memory and Xenix O.S. for Multi-User).

Dual Processor Design

A second processor, a Z-80A, handles "housekeeping" chores and frees the main CPU to take full advantge of its speed and memory.

This also means that the model 16 can run software designed for our highly-respected TRS-80 Model II business computer. It also allows present Model II owners to upgrade to 16/32 bit processing - *without losing any investment in software*

The Model 16 begins as a single drive (1.25 megabyte), 128K RAM configuration. Cat. No. 26-6001 price £3599.00 inc. V.A.T.

TRS-80™ Video Data Terminal

Ideal for our multi-user Model 16, or with a modem use it to time share with information networks. Compatible with TeleVideo®, Lear Siegler® ADM-5, ADDS 25 and Hazeltine® 1410 terminals. EEPROM retains the protocol when power is off. Features user programmable keys, repeating keys, electronic bell and more.(Cat. no. 26-6050 - £699.00).

Find out more about the revolutionary TRS-80 Model 16 at the Tandy Computer Centre, store or participating Dealer near you - today!

Tandy®



Send For Your FREE 1983 TRS-80 RSC-8 Computer Catalogue

Name .....

Address .....

.....

Computer Marketing, Tandy Corporation (Branch UK), Tameway Tower, Bridge Street, Walsall, West Midlands. WS1 1LA PC5

● Circle No. 176


AutoWord

Drive down disc drive prices!







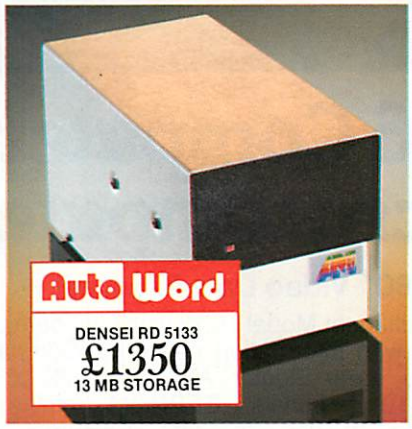

OUR FLOPPY DISC DRIVES ARE COMPATIBLE WITH THE FOLLOWING SYSTEMS:
BBC MICRO ™ TRS 80™ NASCOM™ VIDEO GENIE™ SUPERBRAIN™ ETC.

CANON MDD 5¼" SLIM FLOPPY DISC DRIVES

MODEL	NAKED DRIVE	SINGLE BOXED & PSU	DUAL BOXED & PSU
6106 (40 TK SS DD)	£139	£169	£329
6108 (40 TK DS DD)	£169	£199	£389
*120 (80 TK SS DD)	£189	£219	£429
*220 (80 TK DS DD)	£229	£259	£509

*HARDWARE/SOFTWARE SELECTABLE TO RUN IN 40 TK OR 80 TK MODE WITH LED MODE SELECT DISPLAY

5¼" WINCHESTER HARD DISC UNITS.
THE DENSEI HARD DISC (6.7M/13.3M) CONFIGURED TO RUN ON:
***TRS 80 III™ *APPLE II™ *IBM P.C.™**

MODEL	PRICE	TRS 80 III/APPLE II	IBM PC
RD 5067 (6.7M)	£1195	With case, power supply, host adaptor, disk controller and software patches	To fit existing system with host adaptor and software patches
RD 5133 (13.3M)	£1350		

ALL CANON & DENSEI DRIVES CARRY A 12 MONTH WARRANTY!

LOWEST PRICES ON SHUGART AND CDC FLOPPY DISK DRIVES

SHUGART SA800/801 (8" SS DD)	£319
SHUGART SA850/851 (8" DS DD)	£429
CDC 9408 20 ms step (40 TK SS DD)	£119
CDE 9408 5 ms step (40 TK SS DD)	£159
CDC 9409 5 ms step (40 TK DS DD)	£219
CDC 9409T 5 ms step (80 TK DS DD)	£269

THE AUTOWORD EXECUTIVE RANGE OF DUAL 5.1/4" (CDC) AND 8" (SHUGART) BOXED DRIVES. TOP QUALITY UNITS. ALSO AVAILABLE WITH OWN LOGO AND COLOURS. FROM £419

HAVE YOUR FLOPPIES FLOPPED? AUTOWORD LEAD THE FIELD IN ACROSS THE RANGE DISC DRIVE REPAIR. COMPETITIVE PRICES ON APPLICATION.

ALL PRICES ARE EXCLUSIVE OF VAT

N.B. DISCOUNTS AVAILABLE

The AutoWord is spreading!

AutoWord Services Ltd. 164 St. Pauls Avenue Slough Berks SL2 5ER Telephone: (0753) 78424/79599

● Circle No. 177



Tandy TRS-80™ Model 16 Computer Our Most Advanced Microcomputer

The TRS-80 Model 16 is capable of 512K internal RAM and 2½ megabytes of disk storage. It has a 32/16-bit microprocessor for greatly increased speed and larger amounts of internal memory to allow more complex tasks to be accomplished with ease! In addition to the 32/16-bit main processor, the Model 16 incorporates - the Z-80 to maximise 16-bit operations. Dual Processor design permits Model 16 to use Model II software. The Model 16 features all new thin line double-sided, double-density 8-inch disk drives. Model 16 is so powerful that three people can use it at the same time - just add two low cost terminals. (Requires hard disk 384K Memory and Xenix O.S. for Multi-User).

Dual Processor Design

A second processor, a Z-80A, handles "housekeeping" chores and frees the main CPU to take full advantge of its speed and memory.

This also means that the model 16 can run software designed for our highly-respected TRS-80 Model II business computer. It also allows present Model II owners to upgrade to 16/32 bit processing - *without losing any investment in software*

The Model 16 begins as a single drive (1.25 megabyte), 128K RAM configuration. Cat. No. 26-6001 price £3599.00 inc. V.A.T.

TRS-80™ Video Data Terminal

Ideal for our multi-user Model 16, or with a modem use it to time share with information networks. Compatible with TeleVideo*, Lear Siegler* ADM-5, ADDS 25 and Hazeltine* 1410 terminals. EEPROM retains the protocol when power is off. Features user programmable keys, repeating keys, electronic bell and more.(Cat. no. 26-6050 - £699.00).

Find out more about the revolutionary TRS-80 Model 16 at the Tandy Computer Centre, store or participating Dealer near you - today!

Tandy®



Send For Your FREE 1983 TRS-80 RSC-8 Computer Catalogue

Name .....

Address .....

.....

Computer Marketing, Tandy Corporation (Branch UK), Tameway Tower, Bridge Street, Walsall, West Midlands. WS1 1LA PC5

● **Circle No. 176**

YOUR FRIENDLY IBM PERSONAL COMPUTER.

You've heard a lot about small computers, but so far you've not actually taken the plunge?

For one thing, you may have felt a little confused at the sheer choice that confronts you. For another, you may have felt put off by the unfamiliar jargon of 'computerese'.

And this is a pity, because a small computer could indeed do a great deal for you. Which is where the friendly IBM Personal Computer comes in.

Not only is it brought to you by one of the better known computer makers in the world, but we've gone out of our way to make it really intelligible.

Its brochures are in lucid English. Its general appearance is clean and unbaffling. And whether you're a businessman or a private individual, you'll find it takes no more than a few fascinating hours to strike up a rewarding relationship.

And whether you go to an IBM authorised dealer or IBM Retail Centre, you'll find sympathetic staff who will spell out in human terms exactly what the IBM Personal Computer can do for you.

Your IBM authorised dealers and IBM Retail Centres are here:

ABERDEEN
Abtex Computer Systems Ltd. 0224 647074

BEDFORD
MMS Ltd. 0234 40601

BELFAST
Medical and Scientific
Computer Services Ltd 0846 77533

BELPER, DERBY
Midlectron Ltd 077-382 6811

BIRMINGHAM
CPS (Data Systems) Ltd 021-707 3866
The Byteshop Ltd. 021-622 7149

BOOTLE, LIVERPOOL
Stack Computer Services Ltd 051-935 5511

BRADFORD
RAM Computer Services Ltd 0274 391166

BRISTOL
Colston Computer Centre Ltd. 0272 276619
Datalink Microcomputer Systems Ltd . . . 0272 213427

CARDIFF
Sigma Systems Ltd 0222 34869

COLCHESTER, ESSEX
Dataview Ltd 0206 865835

EDINBURGH
Microcentre (Complete Micro-Systems) Ltd 031-556 7354

FAREHAM, HAMPSHIRE
The Personal Computer Connection Ltd . 0329 230870

GLASGOW
The Byteshop Ltd. 041-221 7409

LONDON
Bonsai Ltd, WC1 . . . . . 01-580 0902
Currys Micro-Systems Ltd, NW1 . . . . . 01-387 9275
Digitus Ltd, WC2 . . . . . 01-379 6968
Personal Computer Ltd, EC2 . . . . . 01-377 1200
Planning Consultancy Ltd, SW1 . . . . . 01-839 3143
Sumlock Bondain Ltd, WC1 . . . . . 01-250 0505
The Byteshop Ltd, NW1. . . . . 01-387 0505

MANCHESTER
Currys Micro-Systems Ltd 061-834 0144
Cytek (UK) Ltd. 061-872 4862
The Byteshop Ltd. 061-236 4737

NOTTINGHAM
Keen Computers Ltd. 0602 412777
The Byteshop Ltd. 0602 40576

PAIGNTON
Devon Computers. 0803 526303

SHEFFIELD
Datron Micro Centres 0742 585400

SOUTHAMPTON
Computerland 0703 39574
Xitan Systems Ltd 0703 38740

SWINDON
Computacenter Ltd. 0793 612341

WASHINGTON, TYNE AND WEAR
Microcomputing Ltd 0632 476018


IBM RETAIL CENTRES
London SW1. . . . . 01-828 6640
EC2. . . . . 01-600 8111
W1. . . . . 01-486 9487
Birmingham. 021-454 7070

Or phone 01-578 4399 for more information on our expanding dealer network.

IBM



● Circle No. 183

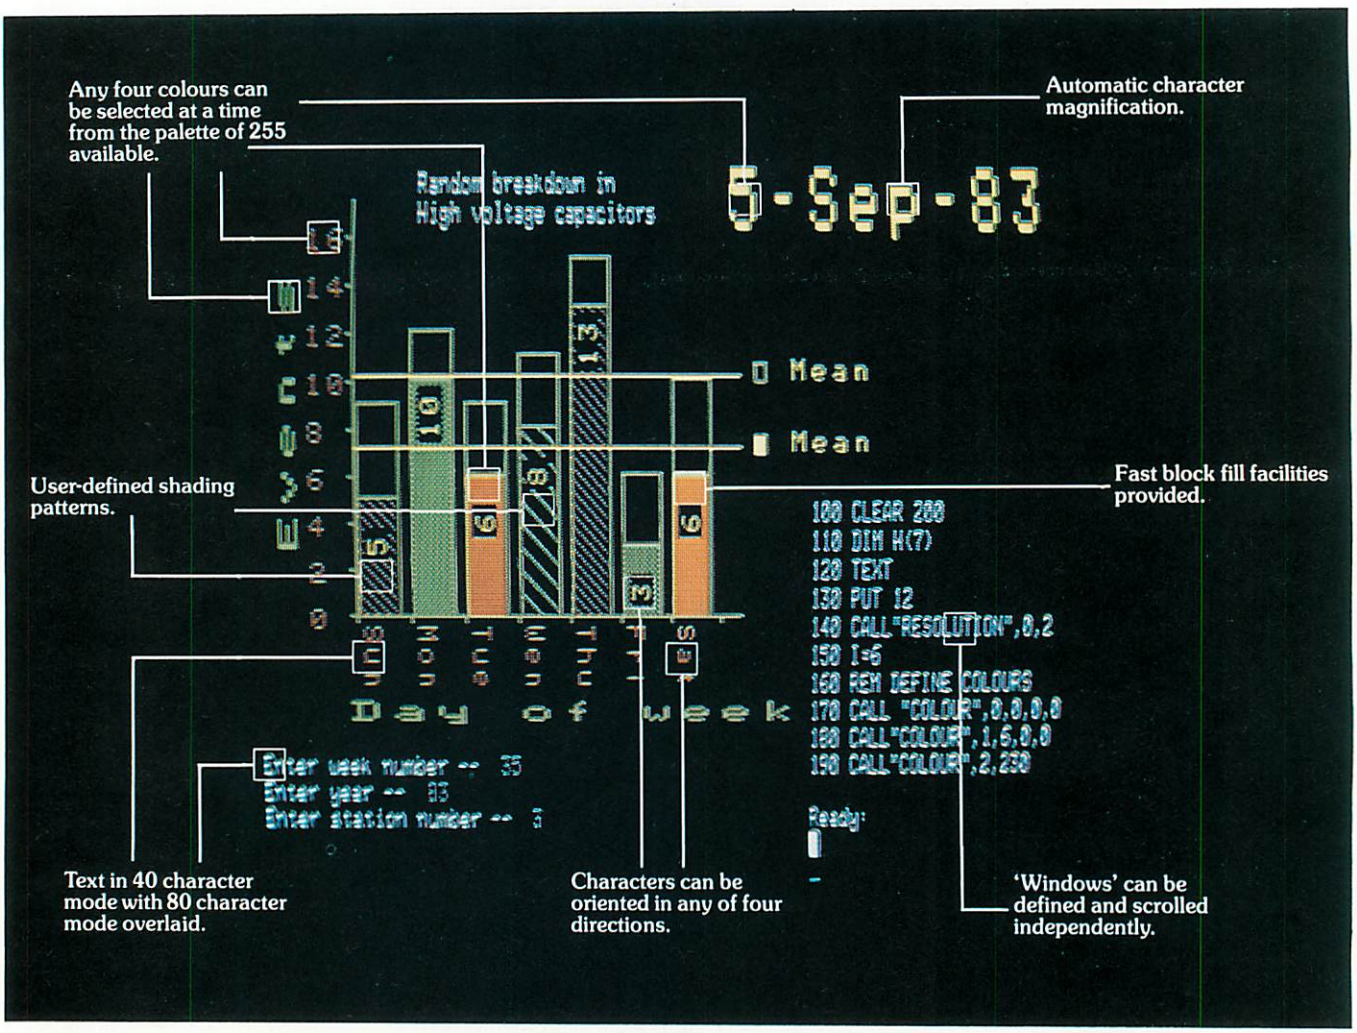

GRAPHICS MACHINE

A picture may be worth a thousand words but it still tells only half the story about graphics on the 380Z.

For a start, our standard graphics functions include point plotting, line drawing, instant block fill, block copying, offsetting, and Exclusive Or Plotting.

Then there is the important fact that our High Resolution Graphics is supported by Basic, Algol and Fortran. And since the Graphics is contained in its own 16K of RAM, every byte of user memory remains available for applications program use.

It is also worth noting that 380Z graphics are equally effective in monochrome — for 'colour' just read 'shades of grey'. Again there are 255 shades available, and there's also a very useful facility for fading up and down throughout the grey scale.

There are also the special effects — such as moving between graphics 'pages' for pseudo-animation, or the ability to produce 'instant' graphics by drawing them with the colour 'switched' off and then 'switching' on.

Next, not only can 380Z graphics pictures be saved on and retrieved from disc, they can also be output to one of a range of popular dot matrix printers.

Remember, too, that HRG is not a third-party add-on but designed, developed, and supported by Research Machines itself as an integral part of the 380Z.

And finally, we've now implemented GINO. So for the first time this well-established, professional suite of flexible, device-independent graphics software from the CAD Centre is available on a micro.



If you are interested in graphics — for scientific, technical, and industrial research; or in secondary or higher education; or for design, engineering, or control, then you will be interested in the 380Z.

RESEARCH MACHINES
MICROCOMPUTER SYSTEMS

RESEARCH MACHINES LTD Mill Street, Oxford OX2 0BW, Tel: (0865) 249866

(continued from page 152)

letters, are being used, each letter corresponding to an attribute, and the number required it asks you to assign a weighting from 1 to 100 for each letter. The higher the weighting, the greater the likelihood of the letter being chosen.

The program is self-explanatory, although there are three subroutines at the end, which may be worth noting as they could be useful in your own programs. Lines 8000 to 8010 simply wait for any key to be pressed, although it is a rather over-complex way of doing things.

The Poke 158,0 clears any spurious characters from the keyboard buffer, in case you may have pressed a key before the program is ready, and the Wait 158,1 simply waits for a key to be pressed. The Poke 216,25 forces the next Print statement to be placed on the bottom line of the screen. Lines 8500 to 8540 form a routine which simply flashes a question mark on the screen while waiting for any character, except Return, to be pressed and exits the routine with Z$ holding the character.

The Return CHR$(13) is detected in line 8530 using the ASC function. The Z$ + "" in the brackets is used to avoid an Illegal Quantity error if Z$ does not contain anything. The routine at lines 9000 to 9070 flashes its own cursor and acts like an Input statement, except that cursor movements other than Delete are not allowed, and Z$ contains the typed characters when Return is pressed.

It is a very useful bomb-proof replacement for Input and could be used on a Pet or Vic, provided that the Poke 158,0 in line 9000 is either omitted or changed. If you want to use the program on any Pet other than Basic 2, 3 or 4 Pets, then the Pokes and Wait will have to be changed as in the table. Unfortunately, the program does not write a tie-break slogan for you.

Hardware

Normally Open File covers software and not hardware, but here are some comments from P A Ramsdale of Swindon which may help those who wish to feed the vision signal from one of the new 12in. screen Pets to a monitor.

The user port provides a video, pin 2; vertical sync, pin 9; and horizontal sync, pin 10. They can be combined to produce a composite video signal suitable for a monitor. For old 8in. screen Pets, there are various circuits available to do the combination, but with the new 12in. Pets the signals have been inverted and the line timings have been changed. The line timing, which is about 100ms. rather than the standard 64ms., means that normal monitors will not lock. Fortunately these Pets use a programmable video controller MC-6845, and it is possible to reduce the line time sufficiently for the monitor to synchronise by:

POKE 59520,0 : POKE 59521,X

where X = 62 for 80 columns and X = 59 for 40 columns.

It is also necessary to move the line-sync pulse position so that the lines start at the left-hand side of the screen:

POKE 59520,2 : POKE 59521,Y

where Y = 47 for 80 columns and Y = 49 for 40 columns. The reduction in line timing results in a squeezing of characters on the Pet's screen, but they will appear normally on the monitor. It is also possible that some adjustment of the line-sync pulse width may be needed using:

POKE 59520,3 : POKE 59521,Z

Z starts off at 15 and the pulse can be adjusted by increasing this value.

Whenever the screen mode is altered for instance using Print CHR$(142), all the values in the video controller are reset, and so these Pokes are required whenever it is done. The video combining unit used with the 8in. Pets requires inversion of the video and horizontal signals. The user-port signals could be applied directly to the inputs of a 4066 quad analogue switch to produce a suitable video output.

Skilled judgement table.


Basic 2/3/4	Basic 1	Vic
POKE 158,0	POKE 525,0	POKE 198,0
WAIT 158,1	WAIT 525,1	WAIT 198,1
POKE 216,25	POKE 245,25	POKE 214,22

Skilled judgement.

```
10 REM** AWARD EACH LETTER A WEIGHTING FROM
20 REM** 1-100 AND THE COMPUTER WILL
30 REM** CHOOSE AN ORDERING OF THE LETTERS
40 REM** BASED ON THE WEIGHTINGS ASSIGNED,
50 REM** BUT WITH A RANDOM FACTOR.
80
100 PRINT"■■■■■■■■■■■■■■MULTIPLE CHOICE■"
110 PRINTSPC(10);"■COMPETITION ENTERER■"
120 PRINT"■■HOW MANY LETTERS TO CHOOSE FROM? ";:GOSUB9000:X=VAL(Z$):PRINT
130 PRINT"■HOW MANY LETTERS SHALL I CHOOSE? ";:GOSUB9000:N=VAL(Z$):PRINT
140 DIMA$(X),A(X),C(X),B(X)
150 PRINT"■■ENTER THE LETTERS ONE AT A TIME, EACH"
160 PRINT"■FOLLOWED BY IT'S RELATIVE WEIGHTING"
165 PRINT"■ON A SCALE 1-100 INCLUSIVE."
170 GOSUB8000
180 PRINT"■■LETTER";SPC(5);"WEIGHTING■":PRINT"──────";SPC(5);"──────────"
190 FORI=1TOX:PRINT"   ";:GOSUB9000:A$(I)=Z$:PRINTSPC(10);
200 GOSUB9000:A(I)=VAL(Z$):PRINT:NEXTI
220 GOSUB7500:GOSUB8000
230 GOSUB7000
250 PRINT"■■■WHICH COMBINATION NUMBER WOULD YOU LIKE "
252 PRINT"TO CHANGE? - (HIT 'RETURN' IF NONE) ";
255 GOSUB9000:PRINT
260 IFZ$=""GOTO300
265 C=VAL(Z$)
270 PRINT"CHANGE ";A$(C);" TO ";:GOSUB9000:A$(C)=LEFT$(Z$,1)
280 PRINT" AND ";A(C);" TO ";:GOSUB9000:A(C)=VAL(Z$):GOSUB7500: GOSUB7000
290 GOTO250
300 GOSUB7500
310 PRINT"■■■"
350 FORI=1TOX:C(I)=I:NEXTI
360 FOR I=1TOX:B(I)=A(I)*RND(1):NEXTI
400 FORI=1TOX-1:FORJ=1TOX-1
410 IFB(J)>=B(J+1)GOTO430
420 T=B(J):B(J)=B(J+1):B(J+1)=T:T=C(J):C(J)=C(J+1):C(J+1)=T
430 NEXTJ:NEXTI
450 PRINT"SELECTION:-":PRINT"──────■
500 FORI=1TON:PRINTA$(C(I));" ";:NEXTI
550 PRINT:PRINT"■■■PRESS■  FOR ANOTHER SELECTION."
560 PRINT"■R■■  TO DISPLAY TABLE AND/OR
570 PRINT"   CHANGE WEIGHTINGS.
580 PRINT"■E■■  TO END.":PRINT"■
600 GOSUB8500:PRINTZ$;
620 IFZ$="D"GOTO230
630 IFZ$="E"THENPRINT"■":END
635 GOTO310
640 PRINT"■■";:GOTO600
6999
7000 PRINT"■";:PRINT"■LETTER";SPC(5);"WEIGHTING■"
7005 PRINT"──────";SPC(5);"──────────":PRINT
7010 FORI=1TOX:IFI<10THENPRINTI;:GOTO7015
7012 PRINT"■■";I;
7015 PRINT" ";A$(I);SPC(10);A(I):NEXT
7020 RETURN
7500 FORI=1TOX-1:FORJ=1TOX-1:IFA(J)>=A(J+1)GOTO7530
7510 T=A(J+1):A(J+1)=A(J):A(J)=T
7520 T$=A$(J+1):A$(J+1)=A$(J):A$(J)=T$
7530 NEXT:NEXT:RETURN
7999
8000 PRINT"■":POKE158,0:POKE216,25:PRINTTAB(7)"■■PRESS ANY KEY TO CONTINUE■"
8010 WAIT158,1:GETZ$:RETURN
8500 POKE158,0:ZC=1
8510 T=TI
8520 IFTI-T>20THENPRINTMID$("? ",ZC,1)"■";:ZC=3-ZC:GOTO8510
8530 GETZ$:IFZ$=""ORASC(Z$+" ")=13GOTO8520
8540 RETURN
8999
9000 POKE158,0:ZC=1:Z$="":ZL=0
9010 T=TI
9020 IFTI-T>20THENPRINTMID$("■ ",ZC,1)"■";:ZC=3-ZC:GOTO9010
9030 GETZZ$:IFZZ$=""GOTO9020
9040 ZA=ASC(ZZ$):IFZA=13THENPRINT" ";:RETURN
9045 IFZA=20ANDZL>0THENPRINTZZ$;:ZL=ZL-1:Z$=LEFT$(Z$,ZL):GOTO9020
9050 IFZA>140ANDZA<158GOTO9020
9060 IFZA>13ANDZA<31GOTO9020
9065 IFZL>254GOTO9020
9070 ZL=ZL+1:Z$=Z$+ZZ$:PRINTZZ$;:GOTO9020
```

TANDY FORUM

by John Wellsman



Commas for Gotos

In the January issue, I described how it is, under some circumstances, possible to use a comma instead of Goto and Then. P V Bamfield of Brighton has written to point out that while this does work, if you use a utility program to renumber the program you are likely to run into difficulties.

Mr Bamfield says that with two renumbering utilities he had error messages. I tried this myself with the Newdos and Ldos routines, and though I got no error messages and superficially correct renumbering I found that the lines numbers after the commas had not been changed. My apologies for not having checked this earlier.

Race 2000

R S Powell of Coventry sent in a game program which he calls Race 2000. Instructions for the game, which is a racing-car obstacle course rather than a race, are included in the listing, which is in Tandy level 2 Basic. It also includes a machine-language sound routine in the last eight lines.

The machine code is string-packed, avoiding the necessity of reserving any memory. The Put (X,Y) commands in the listing call the sound routine to produce a variety of engine noises. To hear them you have to plug in your cassette lead and connect the large grey jack to an amplifier. The £ signs between quotes represent spaces wherever they occur — except in line 1080, which tells you that the car is represented by a shifted 3 CHR$(35).

Basic insert

This routine was sent in by Mark Emery of Orpington, Kent. It enables you to insert a line of Basic into a program while it is still running, and without losing any variables except those used by the routine. Although the inserted line in this program is the last line of the program, it can be anywhere, and be defined as the variable Lin with a separate input.

The listing is for level 2 or DOS 48K machine. For a 16K machine two addresses in line 40 must be changed: —8192 becomes 29952, and —12288 becomes 28672. Line 45 should be changed to

DATA 33,0,112,205,192,27,201,0,0,0".

This program is not unlike Andrew Parsonage's program in last month's Tandy Forum. If you are interested to know how the computer handles Basic, a close study of this sort of program is both helpful and interesting.

On Run the first thing that a computer must know is the location in memory of the program. The start address of any Basic program is stored in addresses 16548/9, the least-significant byte being stored first and most-significant last. These two addresses are in an area of RAM which is reserved for housekeeping items like this. So the expression

PEEK(16548) + PEEK(16549)*256

will give the starting address of a resident Basic program. By Peeking at and above this address it is possible to see how the computer stores a Basic program.

Type in the test program exactly as shown without any spaces in the first three lines. If you do not have a printer, for line 130, substitute

PRINT PEEK(P + Y);

and read from the screen.

Make sure that the printer is on line and loaded and then Run. The output is a column of figures followed by a line of dots on which you can write notes. Write on the top line the figure given by line 105 in the

(continued on page 160)

Race 2000.

```
1 CLEAR 100:DEFINTA-Z:GOSUB
1000:GOTO 3000:
5 GOTO 100
20 FOR I=0 TO 18 STEP 2
30 SET(X+I,Y):NEXT:RETURN
50 FOR I=8 TO 26:RESET
(I,25):NEXT:RETURN
80 GOTO 5
100 CLS
110 PRINT@66,"*R A C E   P R A C T
I C E *";
120 PRINT@130,"=======* 2 0 0 0
*=======";
130 PRINT@258,"* S P E E D *£££* C
O U N T *";
140 PRINT@450,"* T E M P . *£££££*
O I L *";
150
PRINT@514,"L";:PRINT@526,"H£££E";:P
RINT@542,"F";
160 PRINT@642,"D I S T A N C E :";
170 PRINT@116,"F U E L :";
180 PRINT@504,"P I
T";:PRINT@568,"S T O
P";:PRINT@632,"A R E A";
190 PRINT@952,"*START*";
200 FOR Y=0 TO
47:SET(0,Y):SET(1,Y)
210 SET(64,Y):SET(65,Y):SET(127,Y)
220 NEXT
230 FOR X=0 TO 64
240 SET(X,47):SET(X,10):SET(X,34)
250 SET(X,19):SET(X,28):SET(X,0)
260 NEXT:FOR Y=10 TO 27:FOR X= 1
TO 2:
270 SET(31+X,Y):NEXT X,Y
280 FOR X= 110 TO 127:SET(X,47)
290
SET(X,17):SET(X,35):SET(X,40):SET(X
,0)
300 NEXT:FOR X=100 TO
110:SET(X,47)
310 SET(X,10):SET(X,0):NEXT
320 FOR Y=0 TO 10:
SET(100,Y):SET(101,Y):NEXT
330 FOR Y=10 TO 47:
SET(109,Y):SET(110,Y):NEXT
340 FOR Y=42 TO
47:SET(100,Y):SET(101,Y):NEXT
350 FOR Y=21 TO 32: SET
(100,Y):SET(101,Y):NEXT
360 X=8:Y=26:GOSUB 20
370 X=39:GOSUB 20
380 X=104:Y=8:GOSUB 20
385 REM ------------INITIAL
SETTING AT LINE 390-----------
390
A=50:F=122:C=0:D=0:T=7:O=57:V=16244
:M=64:B=0
400 FOR X=39 TO
57:SET(X,25):SET(X+65,7):NEXT
410
PUT(200,255):PRINT@824,"(READY)";:P
OKEV,35:FOR I=1 TO 500:NEXT
420
PUT(100,175):PRINT@824,"-*SET*-";:F
```

(listing continued on page 160)

C/WP BITES £200 OFF APPLE II E

Meet the Apple II E, the brand new much improved version of the tried and trusty Apple II. The "E" has (almost) everything you ever wished the Apple had. The memory has been increased to 64k with an optional expansion to 128k. The keyboard has sprouted extra keys, making 63 in all, with proper shift keys and four arrow keys to drive the cursor round the screen. The screen boasts capitals and lower case letters (40 to a line—or 80 with a low cost optional add-on). And for brilliant colour the "E" has a built-in PAL encoder—just add a modulator and it plugs straight into your colour television set.

The 80 column card is only £70 (no, it won't work with the Apple II Europlus). For £150, you can buy another card which provides both 80 columns and an extra 64k of memory which switches in and out as required.

Apple II has joined the big league.

But there's one thing Apple Computer has not changed. The "E" still runs all (or almost all) Apple II's enormous library of software without reprogramming or adaption. And you can still use the disc drives and expansion cards from the Europlus except for the 16K RAM card which you no longer need).

Alas, the "E" costs more than its predecessor. But C/WP has had its way and is cutting £200 off the recommended retail price. The "E" is yours for a modest £645 plus VAT.



Prices do not include VAT.		RRP	C/WP Price
Apple II E		£845	£645
80 column card		£80	£70
80 column card + 64k		£180	£150
Monitor and stand		£170	£130
Disc drive with controller		£345	£270
Disc drive without controller		£245	£220
C/WP Contour Winchester Disc	3 Mb	—	£995
	6 Mb	—	£1195
	12 Mb	—	£1495
	21 Mb	—	£1995
Multiplan		£185	£175

C/WP

OUR PRICES STILL TURN OTHERS GREEN

108 Rochester Row,
London SW1P 1JP
Telephone: 01-828 9000

● Circle No. 161

(continued from page 158)

program. The actual addresses will vary according to your system and memory size though their relationship will be the same, so I will give the values from my own machine.

My program starts at 27206 and the first two numbers are 83 and 106; the third and fourth are 10 and 0 — and will be the same in your printout if you have copied the program exactly. The first two are the least- and most-significant bytes of the address of the next line, line 20, of the program. In this case it is 83 + 256*106 = 27219. The second pair are the least- and most-significant bytes of the program line number.

These two pairs of numbers are followed by the text of the program line. The command words such as For, Next, and so on are not stored as words but as tokens or single bytes, and in the example the first number following the line pair 10,0 is 129, which is the token for For. It is followed by 88, the ASCII code for X and then 213, which is the token for the function of equality — not to be confused with the character =. Then 49, ASCII 1; 189, the token for To; followed by 49,48,48, for 1,0,0. Finally there is an end-of-line indicator, 0.

(continued on page 162)

(listing continued from page 158)

```
OR I=1 TO 500:NEXT
430 PUT(50,75):PRINT@824,"*-GO-*";
435 REM ----------MAIN PROGRAM
STARTS HERE ---------
440 IF A=<0 THEN
A=0:PRINT@327,"100";:GOTO 460
450
S=(52-A)*2:PRINT@327,STR$(S);"£";
455 S=50/A
460 C=C+1:PRINT@343,STR$(C);:IF A
<50 THEN A=A+B ELSE IF B =-5 THEN
A=A+B
470 POKEV+M,32:POKEV,35:I=0
480 I=I+1
481 IF S=0 THEN PUT(1,1) ELSE
PUT(S,1)
490 PRINTCHR$(15);:K$=INKEY$:IF
K$<>"" THEN 590
500 IF I<A THEN 480
510 V=V-M: IF V<15360 THEN POKE
V+M,32:V=V+1088:GOTO 810
520 IF PEEK(V) <> 32 THEN 940
530 IF RND(3)>1 THEN 440
540 IF RND(2)>1 THEN 570
550 X=RND(15)+32:Y=RND(15)*64
560 FOR I=0 TO
RND(2):PRINT@Y+X+I,"+";:PUT(10,5):N
EXT:GOTO 440
570 Y=RND(15)*64:FOR I=33 TO
48:PRINT@Y+I,"£";:NEXT
580 GOTO 440
590 IF K$="8" THEN M=64:GOTO 440
600 IF K$="7" THEN M=65:GOTO 440
610 IF K$="9" THEN M=63:GOTO 440
620 IF K$="5" THEN B=-5: GOTO 440
630 IF K$="2" THEN B=0:GOTO 440
640 IF K$="." THEN B=10:GOTO 440
650 IF K$="1" THEN IF INKEY$=""
THEN 650 ELSE 440
660 IF K$<>CHR$(13) THEN 500
670 X=V-15360:Y=X/64:X=X-(Y*64)
680 IF X<52 OR X>54 THEN 500
690 IF Y< 6 OR Y>11 THEN 500
700 PRINT@770," * R E - F U E L I
N G *";
710 IF F<122 THEN F=F+1:SET (F,7)
715 PUT ((130-F)*8,20)
720 IF O=57 THEN IF F=122 THEN 770
ELSE 470
730 O=O+1:SET(O,25)
740 T=T-RND(T-7):A=50:GOSUB 50: IF
T<7 THEN T=7
745 FOR I= 7 TO T:SET(I,25):NEXT
749 I=0
750 I=I+1
752 IF INKEY$=CHR$(13) THEN 790
755 IF I>O THEN 710
765 'PUT(255,255)
770 PRINT@770," * T A N K S  F U L
L *";
772 PRINT@835,": PRESS ENTER TO
CONT. *";
780 PRINT@312,"£FULL££";:IF
INKEY$<>CHR$(13) THEN 780
790 PRINT@770,"
   ";' (-- 24 spaces
791 PRINT@834,"
   ";' (-- 24 spaces
800 PRINT@312,"£££££";
810 N=S/100:I=-1
820 I=I+1:IF I>N THEN 850
830 RESET(F,7): IF F> 103 THEN
F=F-1:GOTO 820
840 PRINT@312,"*EMPTY*";:GOTO 960
850 IF F<110 THEN
PRINT@312,"RE-FUEL";:'PUT(10,10)
860 D=D+1:PRINT@660,STR$(D);:C=C+1
870 IF (D+1)/2=INT((D+1)/2) THEN
RESET (O,25):O=O-1
880 IF O=38 THEN PRINT@770," O I L
 E M P T Y";:PUT(2,20):GOTO 960
885 'PUT (2,20)
905 IF RND(5)>1 THEN 930
910 SET( T,25):T=T+1
920 IF T>19 THEN PRINT@770," O V E
R  H E A T I N G
";:PUT(30,70):GOTO960
925 'PUT(30,70)
930 GOTO 440
940
PRINT@V-15360,"BANG";:PUT(10,87):PU
T(46,63):PUT(65,01):PUT(99,28):PUT(
34,25):PUT(34,25)
950 PRINT@770, "YOU HAVE HIT AN
OBSTACLE...!";
960 PRINT@898,"PRESS < ENTER > FOR
A NEW GAME. ";
970 PRINT@834,"Y O U  H A V E  L O
S T !";
975 K$=INKEY$
980 K$=INKEY$:IF K$="" THEN 980
990 IF K$=CHR$(13) THEN 5 ELSE END
1000 CLS
1010 PRINTTAB(12)"WELCOME TO RACE
PRACTICE 2000"
1015
PRINTTAB(12)"=====================
=======
1020 PRINT
1030 PRINT"YOU HAVE TO COMPLETE AS
MANY LAPS AS POSSIBLE!"
1040 PRINT"BUT WATCH OUT FOR THOSE
OBSTACLES - THEY CAN POP ANYWHERE"
1050 PRINT"ALONG THE ROAD!"
```

(listing continued on page 162)



LOOK WHAT "O" DID FOR OSBORNE

O-Computers has done wonders for Osborne I. We call it Super Osborne. We added refinements and lowered prices to make it the best value-for-money microcomputer you can find. For £1599 + VAT (as an introductory offer) we'll sell you our Super Osborne I with double density discs (RRP £1375) and all of Osborne's free software, a portable daisy-wheel printer (RRP £485) with cable, a 12 inch amber screen monitor (normally £110) and a built-in 80 column adaptor (estimated value £175).

WE GAVE IT 80 COLUMNS

Yes, our Super Osborne allows you to see lines of 80 characters on the screen. You can say goodbye to all that juggling with sideways scrolling that ordinary Osborne users do. Our design engineers have developed a circuit which fits inside the Osborne and provides video to British standards. You can plug any British monitor into your Super Osborne and get a rock steady message 80 columns wide.

WE GAVE IT A WINCHESTER

And while we were about our redesign, we added to the 80 column circuitry some further cleverness to allow the Super Osborne to use a CONTOUR Winchester disc. That means that when the time comes you can plug in a CONTOUR and suddenly the world is yours with up to 21 million characters of storage. A 3 million character CONTOUR, baby of the range, costs £995 + VAT.

WE MAKE YOU AN EXTRAORDINARY OFFER

Use the Osborne in your office and bask in the luxury of the CONTOUR Winchester disc's massive storage capacity. Come Friday, copy the files you need onto Osborne's new double density floppies, unplug the CONTOUR and carry your Osborne Electronic Office home for a weekend's work. Or use it with its portable electronic printer to catch up on your private correspondence.



Take advantage of our £1599 introductory offer. Add a 3 megabyte CONTOUR for £995, 6 megabytes for £1195, 12 megabytes for £1595, 21 megabytes for £1995. But hurry. Offer ends 1st May 1983. • Circle No. 185

O-COMPUTERS
A member of the C/WP Group
104-106 Rochester Row, London SW1
Telephone: 01-828 9000

(continued from page 160)

From the first number to the end of line, there are 13 numbers. Using my starting address, 13 + 27206 equals 27,219 which is the 14th line and brings you to the start of the second line where again you find two pairs of numbers, the first two being the LSB and MSB of the beginning of the third line, and the second pair being the LSB and MSB of the current line number.

In line 120 of the test program above I have only Peeked into the first 29 addresses, covering the first three program lines. You could increase this number and look at the rest of the program which does the Poking and Peeking.

If you do not have a table of command tokens it should be quite easy to construct one by writing dummy programs using all the commands, reading them out as described and then decoding the listing.

May I enter a plea to those who send in programs. Please, never, ever use I or O for subscripting variables. Many people use I especially in this way, but A(I) and A(1) can be so easily confused when typing in programs, so please use something else. O is just as bad, though is used less often. There are 24 other characters which can cause no confusion.

(listing continued from page 160)

```
1060 PRINT"ALL THE INFORMATION
REQUIRED IS DISPLAYED, SO BE
OBSERVANT."
1066 PRINT"THE INFORMATION
INCLUDES:"
1067
PRINT"SPEED":PRINT"COUNT":PRINT"DIS
TANCE":PRINT"TEMPERATURE":PRINT"FUE
L":PRINT"OIL":
1070 GOSUB 1180:CLS:PRINT
1075 PRINTTAB(10)"THE CONTROLS ARE
AS FOLLOWS :"
1080 PRINT"'&'.....IS THE CAR"
1090 PRINT"'7'.....GO LEFT"
1100 PRINT"'9'.....GO RIGHT"
1110 PRINT"'8'.....GO UP"
1120 PRINT"'5'.....TO ACCELERATE"
1130 PRINT"'.'.....TO DECELERATE"
1140 PRINT"'2'.....TO KEEP SPEED
CONSTANT"
1150 PRINT"'1'.....TO FREEZE"
1160 PRINT"'0'.....TO CONTINUE"
1170 PRINT"'ENTER'.TO
RE-FUEL/CONTINUE
1175 PRINT:PRINT:PRINT"THE GAME
START WITH 'READY' - 'SET' -
'GO!'"
1176 GOTO 1192
1180 '
1190 PRINTTAB(15)"PRESS ANY KEY TO
CONTINUE"
1191 GOTO 1200
1192 GOSUB 1180::CLS:PRINT"ONE
LAST NOTE:- SOUND FOR THIS PROGRAM
IS PLAYED THROUGH THE CASSETTE
PORT AND MAY BE OBTAINED BY PUTING
SOME SORT OF AMPLIFIER ON";
1193 PRINT" THE CASSETTE
OUTPUT.":PRINT:PRINT:PRINTTAB(15)"-
---** PRESS ANY KEY TO START
**----"
1200 IF INKEY$="" THEN 1200 ELSE
RETURN
2999 REM ==MACHINE CODE ROUTINE
LOADER==
3000 CLS:MX$=".....MACHINE CODE
ROUTINE STORED IN THIS
VARIABLE....."
3020
C=VARPTR(MX$)+1:LO=PEEK(C):HI=PEEK(
C+1):POKE 16771,LO:POKE16772,HI
3030 LO=256*HI+LO
3040 FOR I=LO TO
LO+41:READA:POKEI,A:NEXT:GOTO 3080
3050
DATA197,207,40,205,28,43,71,197,207
,44,205,28,43,193,79
3060
DATA197,207,41,193,197,193,197,62,1
,211,255,16,254,193,197
3070
DATA62,2,211,255,16,254,193,13,32,2
35,193,201
3080 GOTO 5
60000 GOTO 60000
60023 SAVE"RACEPOWE/002:1
```


Basic insert listing 1.

```
 1 CLS:CLEAR 5000
 2 LIN=9999
 5 GOSUB 150:REM FIND BEGINNING OF
   LINE LN
 10 PRINT"ENTER THE LINE TO BE
PLACED AT";LIN
 20 LINEINPUT")";F$
 25 F$=F$+":REM "
 30 FOR T=1 TO  LEN(F$):
M$=MID$(F$,T,1):
POKE-12288+T,ASC(M$):NEXT
 40 DEFUSR1=-8192:FOR T = 0 TO
  7:READ D:POKE-8192+T,D: NEXT
 45 DATA 33,0,208,205,192,27,201,
  0,0,0
 50 A=USR1(0):X=16551
 60 X2=PEEK(X)+PEEK(X+1)*256
 70 FOR T=0 TO 255
 80 IF PEEK(T+X2)=0 THEN 120
 90 POKE RL+T,PEEK(T+X2-1)
 100 NEXT
 120 PRINT"DONE":LIST 9999
 150 ST=PEEK(16548)+PEEK(16549)*256
 170 A1=PEEK(ST):A2=PEEK(ST+1):
A3=A1+A2*256
 180 SU=PEEK(ST+2)+PEEK(ST+3)*256:
    IF SU()LIN THEN ST=A3:GOTO 170
 190 RL=ST+4
 200 RETURN
 9999 ..............................
 ..................................
 ..................................
 ..................................
 ..................................
 ................
```

Basic insert listing 2.

```
10 FORX=1TO100
20 Z=X+2
30 NEXT
100 P=PEEK(16548)+PEEK(16549)*256
105  LPRINT"PROGRAM STARTS  AT";P;"
IN RAM":
120 FOR Y=0 TO 28
130                              LPRINT
PEEK(P+Y);".............":
140 NEXT
```


● Circle No. 186 ▶

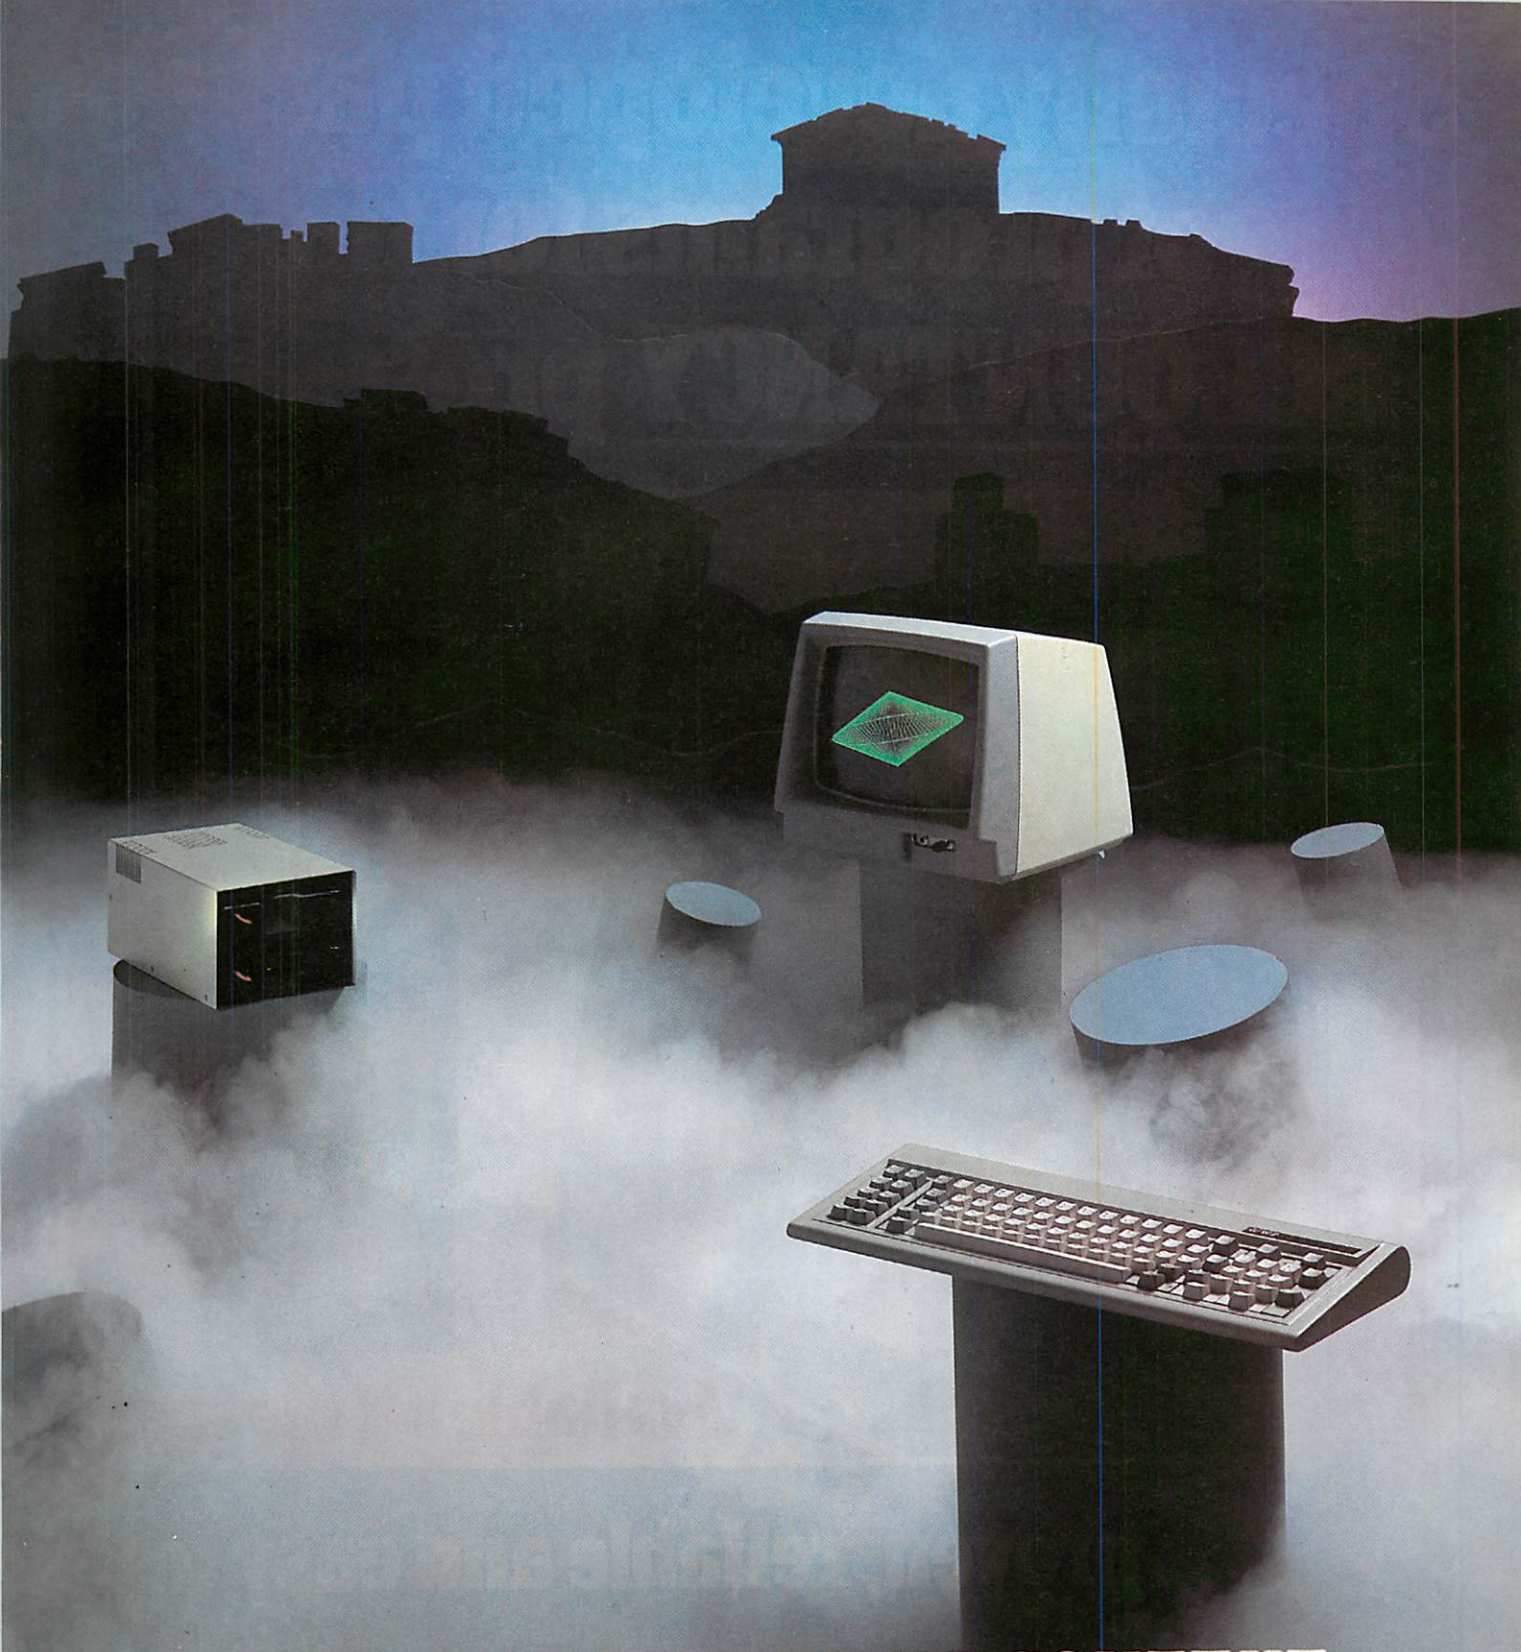

IT'S NOT ALL GREEK TO CONTEXT

Microcomputers have become part of our culture. Yet most of them expect users to communicate in cyber hieroglyphs. C/WP CONTEXT is a new type of microcomputer designed to be easier to communicate with. In fact, it's two computers in one. Computer number 1 (a Z80A with 64k RAM, if you want a little jargon) does the hard slog on your programmes – any standard CP/M programmes. Computer number 2 (a 6502 with 32k RAM) concerns itself only with talking to you – in words or pictures – on the clear 12 inch screen. You'll be delighted by the sharp speedy graphics, and the steady readable characters. And you can mix words and pictures as much as you wish. But that's not all. CONTEXT'S screen handling computer allows you to overlay one character over another, add in accents, or underlining, or bold characters, and to make your own symbols Russian, Greek, mathematical, what you will. It's certainly not all Greek to CONTEXT. And you'll enjoy the price too – computers, screen, twin disc drives, Wordstar, software all for £1495.

C/WP CONTEXT

Write or phone for details: C/WP Computers, 108, Rochester Row, London SW1 Tel.: 01-828 9000

THE REALLY VERY FRIENDLY COMPUTER

Specially developed package of programs for the ACCOUNTANCY profession



... proven, reliable and easy to use

PADA/C – A special software package – Incomplete Records Accounting and Time/Cost Recording for only £399 (+ VAT), available for microcomputers with CP/M 2.2, CP/M 86 or MSDOS.

Incomplete Records Accounting System enables a full set of financial accounts to be produced quickly and easily from details of postings entered onto a transactions file.

Time/Cost Recording keeps an accurate record of time spent and costs incurred when working for a client or on a job.

Also available on PADMEDE's product range on over thirty different microcomputers – a suite of financial management programs priced at £249 each: SALES LEDGER, PURCHASE LEDGER, NOMINAL LEDGER, INVOICING and STOCK CONTROL.

For further information simply send your business card or compliment slip quoting PADA/C or PBCS (for other products) to:


Padmede
COMPUTER SERVICES

351 Fleet Road, Fleet, Hampshire.
Telephone: Fleet (02514) 21892/3
Telex: 858893 FLETEL G

● Circle No. 187

BBC BYTES

by John Harris



Space Invaders

The Space Invaders program by P Mclean in the BBC Bytes column on page 141 of the February issue contains a keying error on line 400, which should read

400 FOR Q = 1 TO NI

The program runs as far as screen 6 before blowing up with the subscript error because the variable I, which I mistakenly substituted for NI when keying in the listing, can never exceed NI + 1; the For statement on line 100 keep it within this limit. NI, the number of invaders, reaches 7 on screen 6 giving a maximum value of I of 8, which exceeds the maximum dimensions for X%( ) and Y%( ) for the first time.

Normally we not only proof read BBC Bytes programs back to the original hard-copy version submitted by contributors, but also test the program through all visible pathways before publishing. Because I couldn't react fast enough to get past screen 2, I never met the bug which has given more expert players such a frustrating time.

When testing a tax or stock-control program there is a logical pathway to be followed; testing games requires that the tester is capable of playing the game to a satisfactory standard. Apologies all round, and thanks to the many readers who wrote in to point out the bug.

Graph

We have been sent two graph-plotting programs and fittingly, since graph plotting is an academic pursuit, the two contributors both have an academic background. Ann Kitchen of Stockport Grammar school comes from the teaching side, and A P Walker of Hayling Island, Hampshire from the taught.

Mrs Kitchen has written her program around the capabilities of the Tandy four-colour pen graphic printer. The printer sells for under £150, so true graph plotting is now affordable within school budgets. The program is designed to handle either cartesian or parametric equations, the Eval facility enabling both limits and equations to be entered while the program is running. The exercise remains under the control of the program operator from start to finish.

Both equation and limits are input and

(continued on next page)

Graph 1 by A P Walker.

```
>REM /////////// THIS IS THE
>REM LISTING FOR GRAPH (1)
>REM BY A.P.WALKER
>LOAD"A.APW2"
>LIST
   10 MODE7
   20 PROCINTRO
   30 MODE1
   40 PROCINTRO2
   50 ON ERROR GOTO1190
   60 DIMA$(15):XBOT=-20:XTOP=20:YBO
T=-20:YTOP=20:@%=&100030A:A=0
   70 *KEY 10 OLD|M RUN|M
   80 MODE1
   90 PROCLETTERS
  100 PROC_INPUT:PROCDRAW:GOTO100
  110 DEFPROCDRAW
  120 CLS
  130 REM********** DRAW AXIS ******
****
  140 VDU29,PX;PY;
  150 VDU5
  160 MOVE-PX,0:DRAW1280-PX,0
  170 MOVE0,-PY:DRAW0,1024-PY
  180 REM********** CALCULATE WHERE
NOS. ********************* SHOULD BE
 ************
  190 IF TY=2 THEN T1X=0:TESTX0=1E-1
0
  200 IF TX=2 THEN T1Y=0:TESTY0=1E-1
0
  210 IF TY=2 AND TX=2 THEN TESTX0=0
  220 IF TY=1 THEN T1X=1012-PY:TESTX
0=0
  230 IF TX=1 THEN T1Y=1140-PX:TESTY
0=0
  240 IF TY=1 AND TX=1 THEN TESTX0=X
TOP
  250 IF TX=0 THEN T1Y=140-PX:TESTY0
=0
  260 IF TY=0 THEN T1X=-PY:TESTX0=0
  270 IF TY=0 AND TX=0 THEN TESTX0=X
BOT
  280 REM****PUT ON NOS. AND REFEREN
CE LINES**********************
  290 FOR X=XBOT TO XTOP STEP XRANGE
/8
  300 GCOL0,1
  310 IF X<>0 THEN MOVEX/XRANGE*1000
,1000*YTOP/YRANGE
  320 IF X<>0 THEN DRAWX/XRANGE*1000
,1000*YBOT/YRANGE
  330 GCOL0,3
  340 FOR XCOUNT=1TOLEN(STR$(X))
  350 MOVEX/XRANGE*1000,T1X
  360 PLOT0,0,69*SGN(ABS(ABS(SGN(TY-
2))-1))+SGN(ABS(SGN(TY)-1))*(LEN(STR
$(X))+1)*32+SGN(ABS(ABS(SGN(TY-1))-1
))*20-(XCOUNT*30)
  370 IF X<>TESTX0 THEN PRINT;CHR$(1
79+ASC(MID$(STR$(X),XCOUNT,1)))
  380 NEXT:NEXT
  390 FORY=YBOT TO YTOP STEP YRANGE/
8
  400 IF Y<>0 THEN GCOL0,1:MOVE1000*
XBOT/XRANGE,1000*Y/YRANGE
  410 IF Y<>0 THEN DRAW1000*XTOP/XRA
NGE,1000*Y/YRANGE
  420 GCOL0,3
  430 IF TY=1 AND Y=YTOP THEN O=0 EL
SE O=1
  440 IF TY=0 AND Y=YBOT THEN O1=1 E
LSE O1=0
  450 MOVET1Y-LEN(STR$(Y))*35*SGN(AB
S(ABS(SGN(TX-1))-1)),Y/YRANGE*1000+3
0*SGN(ABS(SGN(Y)-1))*O+O1*30
  460 IF Y<>TESTY0 THEN PRINT;Y
  470 NEXT
  480 REM**********DRAW GRAPH
  490 I=0
  500 I=I+1
  510 TEST%=0
  520 GCOL0,2
  530 X=XBOT
  540 DEFPROCGRAPHY
  550 X=X+XRANGE/250
  560 Y=EVAL(A$(I))
  570 X1=X:Y=Y/YRANGE*1000:X1=X/XRAN
GE*1000:IF ABS(Y)<1000*YTOP/YRANGE A
ND Y>1000*YBOT/YRANGE AND TEST%=1 TH
EN DRAW X1,Y ELSE MOVE X1,Y:TEST%=1
  580 IF X<=XTOP THEN GOTO550
  590 GCOL0,3
  600 IF I<A THEN500
  610 WAIT=GET
  620 ENDPROC
  630 DEFPROC_INPUT
  640 REM***************INPUT SECTIO
N
  650 CLS:VDU4
  660 PRINTTAB(10,0);"INPUT SECTION"
  670 PRINTTAB(10,1);"=============
  680 PRINT''"To ENTER an equation j
ust press ""F1"".""To DELETE an equ
ation just press ""F2"".""To DRAW t
he graph just press ""F3"".":IF A>0
 THEN PRINT"The present equations ar
e shown below:-"'
  690 IF A>0 THEN FOR PRI%=1 TO A:PR
INT;PRI%;". Y= "A$(PRI%)':NEXT
  700 IF INKEY(-114)<>0 THEN740 ELSE
 IF INKEY(-115)<>0 AND A>0 THEN710 E
LSE IF INKEY(-116)<>0 THEN750 ELSE 7
00
  710 INPUT "Delete equation number.
..      "nodelete:IF nodelete=0 OR no
delete>A THEN650
  720 FOR I=nodelete TO A:A$(I+1)=A$
(I):NEXT
  730 A=A-1:GOTO750
  740 A=A+1:PRINT:A;:INPUT". Y= "A$(
A)
  750 PRINTTAB(0,4)STRING$(158," ")
  760 INPUTTAB(0,5)"Is this equation
 O.K ",Y$:Y$=LEFT$(Y$,1):IFY$<>"Y" T
HEN650
  770 PRINTTAB(0,7):STRING$(40," ")
  780 PRINTTAB(0,5):"Is the range O.
K :-
 "" X:(";XBOT;" TO ";XTOP;") and Y:
(";YBOT;" TO ";YTOP;")";:INPUT,Y$:Y$
=LEFT$(Y$,1):IFY$="Y" THEN PROCTESTA
XIS:ENDPROC
  790 PRINTTAB(0,5);STRING$(80," ")

  800 INPUTTAB(0,5)"Bottom of 'X' ra
nge",XBOT
  810 INPUT"Top of 'X' range",XTOP
  820 IF XBOT>XTOP THEN TEMP=XTOP:XT
OP=XBOT:XBOT=TEMP
  830 IF FNTEST(XTOP-XBOT)=0 THEN790
  840 PRINTTAB(0,5):STRING$(80," ")
  850 INPUTTAB(0,5)"Bottom of 'Y' ra
nge",YBOT
  860 INPUT"Top of 'Y' range",YTOP
  870 IF YBOT>YTOP THEN TEMP=YTOP:YT
OP=YBOT:YBOT=TEMP
  880 IF FNTEST(YTOP-YBOT)=0 THEN840
  890 GOTO770
  900 DEFPROCTESTAXIS
  910 PX=ABS(XBOT)/(ABS(XBOT)+ABS(XT
OP)):TX=2
  920 IF XBOT>0 THEN PX=-XBOT/(XTOP-
XBOT):TX=0:GOTO940
  930 IF XTOP<=0 THEN PX=ABS(XBOT)/(
ABS(XBOT)+ABS(XTOP)):TX=1:GOTO940
  940 PX=PX*1000+140
  950 PY=ABS(YBOT)/(ABS(YBOT)+ABS(YT
OP)):TY=2
  960 IF YBOT>=0 THEN PY=-YBOT/(YTOP
-YBOT):TY=0:GOTO980
  970 IF YTOP<=0 THEN PY=ABS(YBOT)/(
ABS(YBOT)+ABS(YTOP)):TY=1:GOTO980
  980 PY=PY*1000+12
  990 YRANGE=FNRANGE(TY,YTOP,YBOT)
 1000 XRANGE=FNRANGE(TX,XTOP,XBOT)
 1010 ENDPROC
 1020 DEFFNRANGE(T,ITOP,BOT)
 1030 IFT=2 THEN RANGE=ABS(BOT)+ABS(
ITOP) ELSE IF T=1 THEN RANGE=ABS(BOT
-ITOP) ELSE RANGE=ITOP-BOT
 1040 =RANGE
 1050 DEFFROCLETTERS
 1060 VDU23,224,&00,&08,&08,&08,&08,
&08,&08,&08
 1070 VDU23,225,&00,&00,&00,&C0,&C0,
&00,&00,&00
 1080 VDU23,227,&00,&3E,&7F,&59,&4D,
&7F,&3E,&00
 1090 VDU23,228,&00,&40,&42,&7F,&7F,
&40,&40,&00
 1100 VDU23,229,&00,&42,&63,&71,&59,
&4F,&46,&00
 1110 VDU23,230,&00,&22,&63,&49,&49,
&7F,&36,&00
 1120 VDU23,231,&00,&18,&1C,&16,&7F,
&7F,&10,&00
 1130 VDU23,232,&00,&27,&67,&45,&45,
&7D,&39,&00
 1140 VDU23,233,&00,&3C,&7E,&4B,&49,
&79,&30,&00
 1150 VDU23,234,&00,&01,&71,&79,&0D,
&07,&03,&00
 1160 VDU23,235,&00,&36,&7F,&49,&49,
&7F,&36,&00
 1170 VDU23,236,&00,&06,&4F,&49,&49,
&3F,&1E,&00
 1180 ENDPROC
 1190 DEFFNTEST(DIFF)
 1200 PRINTTAB(0,5)STRING$(80," ")
```

(listing continued on next page)

One line-word processor.

```
>REM /////////// THIS IS THE ONE LINE WORD PROCESSOR MENTIONED IN GRAPH (1)
>WIDTH 36
>LOAD"A.APW1"
>LISTO1
>LIST
   1 DIMA$(100):FORI=1TO100:PRINT;I
;:INPUT LINE A$(I):NEXT:PRINT"TURN O
N PRINTER":INPUT F:FORI=1TO100:PRINT
A$(I):PRINT:NEXT:END
```


● Circle No. 187

(listing continued from previous page)

```
 1210 IF DIFF=0 THENPRINTTAB(0,5);"T
his range is not acceptable.":FORDEL
AYLOOP=1TO5000:NEXT
 1220 =DIFF
 1230 IF ERR=20 OR ERR=18 OR ERR=21
OR ERR=22 OR ERR=23 OR ERR=24 THEN P
ROCGRAPHY:GOTO100 ELSE GOTO100
 1240 DEFPROCINTRO
 1250 VDU23;8202;0;0;0;
 1260 PRINTTAB(15,9);CHR$141"GRAPH":
PRINTTAB(15,10);CHR$141"GRAPH":PRINT
TAB(27,15);"By A.P.Walker":FORI=1TO5
000:NEXT
 1270 ENDPROC
 1280 DEFPROCINTRO2
 1290 VDU23;8202;0;0;0;
 1300 CLS:PRINTTAB(15,0);"GRAPH":PRI
NTTAB(14,1);"========"
 1310 PRINT''"This program takes one
or more equations, and plots their g
raph .The equations  should be ente
red using the following:-""  ""*"" f
or multiplication ."" ""^"" for pow
ers ."" ""/"" for division ."" ""+
"" for addition ."
 1320 PRINT" ""-"" for subtraction .
""and ""("" and "")"" wherever nece
ssary .""''All equations should be e
xpressed in  terms of 'X'"
 1330 PRINT"Multiplication signs can
't be ""assumed"",e.g:-""  '5X'
""should be written as:-""  '5*X
'""''All 'trig' functions are in rad
ians .""''To continue after the grap
hs have been  drawn ,just press any
key ,or 'BREAK'."
 1340 COLOUR1:PRINT''';"  PRESS AN
Y KEY TO CONTINUE":WAIT=GET
 1350 ENDPROC
```

Graph 2 by Ann Kitchen.

```
>REM THIS IS THE LISTING
>REM FOR GRAPH (2)
>REM BY ANN KITCHEN
>LOAD"A.KITCH"
>LIST
   10 REM  GRAPH PLOTTING ROUTINE
   20 REM  Copyright Ann Kitchen,198
2  Stockport Grammar School
   30 MODE7
   40 PRINT''"This program will plot
 curves on the  screen and also pr
int them on a TANDY  COLOR GRAPHIC
PRINTER if it is available"''
   50 PRINT"The curves may be either
 parametric or  cartesian in form an
d any limits may be selected. These
may be entered as 4*PI  or LN(4) if
desired but must be a"
   60 PRINT"recognised BASIC express
ion."
   70 PRINT''"PRESS ANY KEY TO START
"
   80 A$=GET$
   90 IF A$="" THEN 80
  100 CLS
  110 ERR=0
  120 CC=1
  130 MODE4
  140 XL$="-10":XH$="10":YL$="-10":Y
H$="10"
  150 TX$="T":TY$="T":Y$="X"
  160 TL$="0":TH$="4*PI"
  170 K$="M"
  180 PRINT"ARE COORDINATES CARTESIA
N OR PARAMETRIC C/P"
  190 C$=GET$
  200 PRINT"DO YOU WANT PRINTED OUTP
UT Y/N"
  210 P$=GET$
  220 PROCINIT
  230 IF C$="C" THEN GOTO 430
  240 IF C$="P" THEN GOTO 1190
  250 IF P$="Y" THEN VDU2:PRINT"H":V
DU1,17,10,10,10:VDU3
  260 PRINT"ANOTHER GRAPH Y/N"
  270 A$=GET$:IF A$="Y" THEN 180
  280 MODE7:END
  290 REM ************************
********
  300 DEFPROCLIMX
  310 CLS
  320 PRINTTAB(0,2);"DO YOU WANT TO
CHANGE LIMITS ";XL$;"<X<";XH$,YL$"<
Y<";YH$;"  Y/N"
  330 A$=GET$
  340 IF A$="N" THEN 380
  350 CLS:PRINTTAB(0,2);"ENTER XL,XH
,YL,YH"'" WHERE XL<X<XH AND YL<Y<YH
";
  360 INPUT XL$,XH$,YL$,YH$
  370 CLS:GOTO320
  380 XL=EVAL(XL$):YL=EVAL(YL$):XH=E
VAL(XH$):YH=EVAL(YH$)
  390 XINC=(XH-XL)/400:YINC=(YH-YL)/
400
  400 XC=1/XINC:YC=1/YINC
  410 ENDPROC
  420 REM ************************
********
  430 REM ROUTINE FOR CARTESIAN GRAP
H
  440 PROCLIMX
  450 CLG
  460 PROCAX
  470 CLS:PRINTTAB(0,3);"DO YOU WISH
 TO ALTER THE EQUATION Y=";Y$;"  Y/N
"
  480 A$=GET$:IF A$="N"THEN500
  490 PRINT"ENTER EQUATION Y=";:INPU
T Y$
  500 K$="M"
  510 X=XL
  520 ON ERROR GOTO 600
  530 Y=EVAL(Y$)
  540 I=INT((X-XL)*XC):J=INT((Y-YL)*
YC)
  550 IF J>400 THEN J=400:K$="M" ELS
E IF J<0 THEN J=0:K$="M"
  560 PROCDR
  570 IF P$="Y" THEN PROCPR
  580 IF J=400 OR J=0 OR I=400 OR I=
0 THEN K$="M" ELSE K$="D"
  590 GOTO610
  600 IF ERR=180R ERR=20 HEN K$="M":
GOTO610 ELSE REPORT:GOTO250
  610 X=X+XINC*4:IF X<=XH THEN 530
  620 ON ERROR OFF
  630 IF P$<>"Y"THEN700
  640 VDU2
  650 PRINT"Q1"
  660 PRINT"S0"
  670 PRINT"R";30-10*CC;",0"
  680 PRINT"PY=";Y$
  690 PRINT"Q0"
  700 VDU3
  710 CLS:PRINT"Y=";Y$
  720 PRINT XL$;"<X<";XH$,YL$;"<Y<";
YH$
  730 PRINT"ANOTHER CURVE ON THESE A
XES Y,N":R$=GET$
  740 IF R$="N" THEN 820
  750 IF P$<>"Y" THEN 490
  760 CC=CC-1:IF CC<0 THEN CC=3
  770 VDU2
  780 PRINT"C";CC
  790 PRINT"H":VDU3
  800 CLS
  810 GOTO490
  820 CLG:CLS:PRINT"H":VDU3:GOTO250
  830 REM ************************
**********
  840 DEFPROCINIT
  850 IF P$="Y" THENVDU2:VDU1,18:PRI
NT"M0,-400":PRINT"I":PRINT"C0":VDU3
  860 VDU24,0;0;800;800;:VDU28,0,5,3
9,0
  870 ENDPROC
  880 REM ************************
**********
  890 DEFPROCAX
  900 XAX=INT((-XL)*XC)
  910 IF XL>0 THEN XAX=0
  920 IF XH<0 THEN XAX=400
  930 YAX=INT((-YL)*YC)
  940 IF YL>0 THEN YAX=0
  950 IF YH<0 THEN YAX=400
  960 IF P$="Y" THEN VDU2:PRINT"M0,"
;YAX:PRINT"D400,";YAX:PRINT"M";XAX;"
,0":PRINT"D";XAX;",400"
  970 MOVE 0,YAX*2:DRAW 800,YAX*2
  980 MOVE XAX*2,0:DRAW XAX*2,800
  990 IF P$="N"THEN1060
 1000 PRINT"S1"
 1010 PRINT"M0,";YAX-15:PRINT"PX";XL
$:PRINT"M400,";YAX-15:PRINT"PX";XH$:
PRINT"M";XAX;",0":PRINT"PY";YL$:PRIN
T"M";XAX;",400":PRINT"PY";YH$
 1020 PRINT"H"
 1030 PRINT"C3"
 1040 CC=3
 1050 VDU3
 1060 ENDPROC
 1070 REM ************************
************
 1080 DEFPROCDR
 1090 IFK$="M" THEN MOVE I*2,J*2
 1100 DRAW I*2,J*2
 1110 ENDPROC
 1120 REM ************************
************
 1130 DEFPROCPR
 1140 VDU2
 1150 PRINTK$;I;",";J
 1160 VDU3:PRINTTAB(0,0);"
                          ";TAB(0,0)
 1170 ENDPROC
 1180 REM ************************
************
 1190 REM ROUTINE FOR PARAMETRIC CUR
VES
 1200 PROCLIMX
 1210 PROCLIMT
 1220 PROCAX
 1230 K$="M"
 1240 CLS:PRINTTAB(0,5);"DO YOU WISH
 TO ALTER THE EQUATIONS"'" X=";TX$;"
 Y=";TY$;" Y/N"
 1250 A$=GET$:K$="M"
 1260 IF A$="N" THEN 1290
 1270 CLS:PRINTTAB(0,5);"X=";:INPUTT
X$
 1280 PRINTTAB(0,6);"Y=";:INPUTTY$
 1290 T=TL:ON ERROR GOTO1380
 1300 X=EVAL(TX$):Y=EVAL(TY$)
 1310 I=INT((X-XL)*XC):J=INT((Y-YL)*
YC)
 1320 IF J>400 THEN J=400:K$="M" ELS
E IF J<0 THEN J=0:K$="M"
 1330 IF I>400 THEN I=400:K$="M" ELS
E IF I<0 THEN I=0:K$="M"
 1340 PROCDR
 1350 IF P$="Y"THENPROCPR
 1360 IF J=400 OR J=0 OR I=400 OR I=
0 THEN K$="M" ELSE K$="D"
 1370 GOTO1390
 1380 IF ERR=18 OR ERR=20 THEN K$="M
":GOTO1390 ELSE REPORT:GOTO250
 1390 T=T+TINC:IF T<=TH THEN 1300
 1400 ON ERROR OFF
 1410 IF P$<>"Y" THEN 1470
 1420 VDU2
 1430 PRINT"Q1":PRINT"S0";PRINT"R";3
0-10*CC;",0"
 1440 PRINT"PX=";TX$;"  Y=";TY$
 1450 PRINT"Q0"
 1460 VDU3
 1470 CLS:PRINT"X=";TX$,"      Y=";TY
$:PRINTXL$;"<X<";XH$,YL$"<Y<";YH$:PR
INTTL$;"<T<";TH$
 1480 PRINTTAB(0,4);"ANOTHER CURVE O
N THESE AXES Y/N":R$=GET$
 1490 IF R$="N" THEN 1550
 1500 CC=CC-1:IF CC<0 THEN CC=3
 1510 VDU2
 1520 PRINT"C";CC
 1530 PRINT"H":VDU3
 1540 GOTO1240
 1550 CLG:CLS:PRINT"H":VDU3:GOTO250
 1560 REM ************************
**********
 1570 DEFPROCLIMT
 1580 CLS:PRINTTAB(0,2);"DO YOU WISH
 TO ALTER THE LIMITS OF T"'" TL=";TL
$;"  TH=";TH$;"  Y/N"
 1590 A$=GET$
 1600 IF A$="N" THEN 1630
 1610 PRINTTAB(0,5);"TL=";:INPUT TL$
:PRINT"TH=";:INPUT TH$
 1620 CLS:GOTO1580
 1630 TL=EVAL(TL$):TH=EVAL(TH$):TINC
=(TH-TL)/100
 1640 ENDPROC
 1650 REM ************************
**********
```

(continued from previous page)

evaluated, after which axes are drawn and the curve plotted. Further equations may then be superimposed on the same axes, or new axes selected. Each curve on the graph will have a different colour — though they start to repeat after the fourth — and its equation is printed alongside. The end values of the axes are also output to the plotter and printed horizontally or vertically, as appropriate.

In order to overcome the error interrupt generated on division by zero, the main line of the program has been kept free of procedure calls and ForNext statements, both of which invalidate the error-trapping On Error facility which is used to allow, for example, the function $Y = 1/X$ to be plotted through $X = 0$.

Mr Walker's program is for the screen only, and is an exercise in superimposition. Up to 10 equations may be input, amended and deleted, the resulting graphs plotted on selected axes, limits amended and the whole repeated as often as required. The VDU23 character-define command is used to provide axis labelling on screen both horizontally and vertically, and the whole screen is used to give the greatest definition to the result.

The two programs complement each other, each having a separate purpose. I recall spending entire evenings with pencil and graph paper attempting to answer curious arithmetic homework questions; I suppose those of even greater antiquity would have looked askance at my slide rule.

Mr Walker not only wrote his letter and program description on his machine, he also wrote the word processor to do it with, and sent a copy of it to supplement his main contribution. It is very brief, very effective, and for anyone with a printer and no text editor it might prove invaluable.



TECHNICAL SPECIFICATION

Master Station
★ Nascom 3 with 48k memory, disk capacity up to 3 MBytes.

Number of Satellites
★ Up to 32 satellites can be linked providing the ideal classroom environment. Each station comprises Nascom 3 with 16-48k memory.

Transmission Rate
★ 65 kilobaud giving fast response.

Transmission Distance
★ At least 50 feet without line drivers.

Versatility
★ Full retention of disc commands by master. Satellites may be disconnected and used in local mode at any time.

Powerful Software includes
★ Full access to disc by satellites
★ Printer spooling
★ Broadcasting
★ Satellite interrogation by master
★ File protection
★ Optional cassette on each satellite

Lucas

Please send me further details on NAS-NET

Name .....

Educational Establishment .....

Address .....


.....

No. of pupils .....

PC.4.83

Paul Bloom, Lucas Logic Limited,
Lucas Nascom Microcomputer Division,
Welton Road, Wedgnock Industrial Estate,
Warwick CV34 5PZ Telephone: 0926-59411

● Circle No. 188

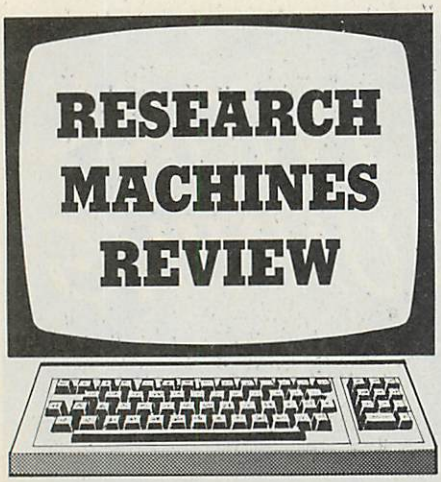

Graphics input

A SHORT GRAPHICS PROGRAM to run on the Research Machines 380-Z comes from S M Roach and G M Bush of Weston-super-Mare, Avon. It enables the user to draw a diagram or picture on to the screen by means of a movable point, controlled via the keyboard. When the program is run the instructions are displayed, and then the computer asks the user to input the position on the screen at which he wishes to begin, that is the X and Y co-ordinates.

When these values have been input, the computer will recognise that point as the origin. This means the final diagram can be moved to any point on the screen. The point selected as the origin will then flash, and the user can move the dot seen on the screen to the desired position. Pressing A will draw a line from the first selected position to the position where the dot is present. The user can then move the dot to another position and draw a line from that point to the last point, and so on.

If, however, the user presses B instead, a line will not be drawn, but a point will be plotted to which the following line will be drawn. If a mistake is made in drawing a line, pressing the Delete key will erase it. When the picture is complete, pressing Z will ask the user to input a file name, and the picture will then be saved under that name.

When saving is complete, the screen will be cleared and the diagram that has been saved will be redrawn on the screen and the user will then be asked if they wish to continue: if so the computer will reopen the file and flash the original again, but the point will move from where it left off before. The next line will be drawn to the origin, unless the point is plotted instead. When completed, the new picture will be saved under the same name as before.

These picture files can be accessed during any program by:

DimQ(500)Z(500)
K — x co-ordinate to change origin
L — y co-ordinate to change origin
B$ — filename

and copying lines 610 to 730 from the program. The program does not allow for simply seeing what is on a file, but this can be done by typing 610, instead of copying lines 610 to 730.

The main features of the program are:

Lines 10-310 set up the program and give instructions.
Line 320 flashes the origin.
Lines 340-500 move a point and save desired points in arrays of Q and Z. A line will be drawn from point to point unless -999 is found in the array, in which case a point will be plotted instead.
Lines 510-9999 are used as the End of File marker.
Lines 520-600 saves all the points in the arrays of Q and Z.
Lines 610-730 are the routine for displaying the contents of the file on the screen, noting the origin, and the plot markers from the file.
Lines 740-860 are a routine to reoopen file and move to the End of File marker, erase the marker and continue the drawing, leaving the file open to save the rest of the picture when the user has fininshed.

Graphics input.

```
10 REM ***********  GRAPHICS PROGRAM EXTRA-ORDINAIRE  ***********
20 REM
30 REM                          WRITTEN BY
40 REM
50 REM ++++++++++    G. ROACH        AND        G. BUSH   ++++++++++++
60 REM              /+/+/+/+/+/+                /+/+/+/+/+
70 REM ************************************************************
80 ON BREAK GOTO 872
90 ?CHR$(31);PUT27,"=1C"
100 CALL"RESOLUTION",0,2
110 ?:?:?"     THIS PROGRAM ENABLES YOU TO DRAW A PICTURE ON THE SCREEN USING A"
120 ?:?"                          MOVING POINT."
130 PUT27,"=0C"
140 ?:?:?TAB(10);"I = UP-LEFT"TAB(30);"P = UP"TAB(50);"9 = UP-RIGHT"
150 ?:?TAB(10);"L = LEFT"TAB(50);"; = RIGHT"
160 ?:?TAB(10);", = DOWN-LEFT"TAB(30);". = DOWN"TAB(50);"/ = DOWN-RIGHT"
170 PUT27,"=1C"
180 ?:?:?"           WHEN YOU WISH TO DRAW A LINE "CHR$(34)"A"CHR$(34)" MUST BE
 PRESSED"
190 ?:?"           IF YOU WISH TO MOVE WITHOUT DRAWING PRESS ":CHR$(34);"B":CHR
$(34)
200 ?:?"                 "CHR$(34)"Z"CHR$(34)" WILL END THE DRAWING SESSION"
210 A$=GET$(0):A$=GET$()
220 CLEAR2000
230 DIM Q(500),Z(500)
240 CALL"RESOLUTION",0,2
250 ?CHR$(31):?:?:?:?"FIRSTLY INPUT THE COORDS OF THE FIRST POINT"
260 ?:?:?"      1st VALUE  - 0 ( VALUE ( 319
270 ?:?"      2nd VALUE  - 0 ( VALUE ( 191
280 ?
290 INPUTK,L
300 IFK(0ORK)320RL(0ORL)191THEN250
310 CALL"OFFSET",-K,-L
320 PUT12:FOR LOOP =1 TO 10:CALL"PLOT",0,0,0:FORDEL=0TO100:NEXT:CALL"PLOT",0,0,3
:FORDEL=0TO100:NEXT:NEXT
330 IFD$="Y"THEN?"YOU CAN CONTINUE NOW!!!"
340 X1=1
350 REM ************  ROUTINE TO MOVE POINT  **************
360 A$=GET$(2):A$=GET$()
370 IFA$="Z"THEN512
380 IFA$="P"THENY=Y+1:CALL"PLOT",X,Y-1,2
390 IFA$="."THENY=Y-1:CALL"PLOT",X,Y+1,2
400 IFA$=";"THENX=X+1:CALL"PLOT",X-1,Y,2
410 IFA$="L"THENX=X-1:CALL"PLOT",X+1,Y,2
420 IFA$="O"THENX=X-1:Y=Y+1:CALL"PLOT",X+1,Y-1,2
430 IFA$="9"THENX=X+1:Y=Y+1:CALL"PLOT",X-1,Y-1,2
440 IFA$="/"THENX=X+1:Y=Y-1:CALL"PLOT",X-1,Y+1,2
450 IFA$=","THENX=X-1:Y=Y-1:CALL"PLOT",X+1,Y+1,2
460 CALL"PLOT",X,Y,3
470 IFA$="A"THENQ(X1)=X:Z(X1)=Y:CALL"PLOT",Q(X1-1),Z(X1-1),3:CALL"LINE",X,Y,3:X1
=X1+1
480 IFA$="B"THENQ(X1)=-999:Q(X1+1)=X:Z(X1)=-999:Z(X1+1)=Y:CALL"PLOT",X,Y,3:X1=X1
+2
490 IFA$=CHR$(127)THENQ(X1-1)=-999:Z(X1-1)=-999:Q(X1)=X:Z(X1)=Y:CALL"PLOT",Q(X1-
2),Z(X1-2),0:CALL"LINE",X,Y,0:X1=X1+1
500 GOTO360
510 Q(X1)=-9999
520 REM **************  CREATE AND WRITE TO FILE  ***************
530 IFD$()"Y"THEN?"INPUT THE FILENAME":INPUTB$
540 IFD$()"Y"THENCREATE#10,B$
550 IFD$()"Y"THENOPEN#10,B$
560 FORX1=1TO500
570 PRINT#10,Q(X1)
580 PRINT#10,Z(X1)
590 NEXT
600 CLOSE#10
610 REM **************  DISPLAY DIAGRAM ON FILE  ****************
620 OPEN#10,B$:CALL"CLEAR":PUT12
630 CALL"OFFSET",-K,-L
640 ONEOFGOTO730
650 CALL"PLOT",0,0,0
660 FORX1=1TO500
670 INPUT#10,Q(X1)
680 INPUT#10,Z(X1)
690 IFQ(X1)=-999THENINPUT#10,Q(X1+1):INPUT#10,Z(X1+1):CALL"PLOT",Q(X1+1),Z(X1+1)
,3:X1=X1+1:GOTO720
700 IFQ(X1)=-9999THEN730
710 CALL"LINE",Q(X1),Z(X1),3
720 NEXT
730 CLOSE#10
740 REM **************  ADD TO FILE OPTION  ***************
750 ?:?:?:?:?"DO YOU WISH TO CONTINUE"
760 D$=GET$(0):D$=GET$():IFD$()"Y"ANDD$()"N"THEN760ELSEIFD$="Y"THEN770ELSEEND
770 OPEN#10,B$
780 RENAME"A:NEWFILE",B$
790 OPEN#10,"A:NEWFILE
800 CREATE=10,B$
810 ONEOFGOTO850
820 INPUT#10,Z:IFZ=-9999THEN850
830 PRINT#10,Z
840 GOTO820
850 ERASE"A:NEWFILE"
860 GOTO320
870 PUT27,"=0C"
```

GALAXY 2 COMPUTER SYSTEM

WHATEVER REQUIREMENTS YOU HAVE



GM813 – CPU/ 64K RAM Board

- ★ 4 MHz Z80A CPU
- ★ 64K Dynamic RAM
- ★ RS232 Serial Interface
- ★ Two 8-Bit I/O Ports
- ★ 1200 Baud Cassette Interface
- ★ Extended and Page Addressing Modes

GM812 – IVC Board

- ★ 80x25 Display Format
- ★ On-board Z80A Microprocessor
- ★ Buffered Keyboard Input
- ★ Programmable Character Generator
- ★ 160x75 Pixel Graphics
- ★ Light Pen Input

GM 829 – FDC/ SASI Board

- ★ Single/Double density operation
- ★ Single/Double sided drive operation
- ★ Up to 3 mixed 3.5", 5.25" and 8" drives
- ★ Industry Standard SASI hard-disk interface

TWO SPARE SLOTS

The cost-effective solution to your computer needs for only £1,495*

For just £1,495 the Galaxy 2 provides the basic requirements for a small business system:

- **Central Processor Unit with 64K of RAM**
- **Twin disk drives (400K storage per drive)**
- **Keyboard and 12" monitor**

But unlike many other small-business systems the Galaxy System is specially designed for expansion and flexibility to meet changing requirements. It uses the world's best selling micro processor, the Z80A, and is based on industry-standard 80-Bus boards. The business system uses only 3 boards in the 5 spaces available, so extra cards can be "plugged-in" to expand the system; for example to expand the memory, or to give a colour facility, or to develop the Galaxy for the particular requirements of education, research, software development etc.

It has a CP/M operating system which gives access to the largest range of software available for any machine. In particular, Gemini can offer QUIBS; a small-business package developed especially for the Galaxy.

The Galaxy has industry-standard interfaces (parallel and serial), and Gemini Microcomputers can supply a full range of compatible hardware including a Winchester sub-system and printer.

The Galaxy offers the most cost-effective way of obtaining a basic unit which is capable of developing to meet your particular requirements; now and tomorrow.

Features include:

- Twin Z80 Processors
- 64K Dynamic RAM
- 800K Disc Based Storage
- 80 x 25 Screen Format
- Dual Printer Interfaces
- Modular Design
- Extra Disc Drives Easily Added
- Winchester Expansion Available
- Net Working System Available
- Additional Slots for 2 Cards
- 12" Green or Amber Monitor



**Price is exclusive of VAT*

MULTIBOARD COMPUTERS

Gemini Microcomputers 18 Woodside Road, Amersham, Bucks HP6 5EQ. Tel: (02403) 28321.

● Circle No. 189



The New British Minstrel FROM £2,455
with Winchester Drive

Generous Dealer and Local Authority Discounts

Winchester Drive makes Minstrel the preferred professional Computer

Read the remarkable specification of this truly professional new British machine, with unrivalled reliability, versatility, software and support.

TECHNICAL SPECIFICATION

- Versatile and highly adaptable
- Built for reliability and ease of servicing
- Horizon compatible
- Superlative software: CP/M, MINOS, Turbo-DOS, and multi-user application packages
- British manufacture

CHECK THESE OUTSTANDING FEATURES

Standard system

- S100
- 5-20 Mb Winchester drive
- 64K RAM
- Horizon compatible, 400 Kb – 1.6 Mb floppies
- Z80 Processor

Other Configurations Available

- Multi-user systems
- Multi-processor systems
- 16-bit processor using powerful 68000 processor

Invitation **For more information about the brilliant new British Minstrel computer, or to find out your nearest U.K or European Dealer, write or telephone: Andrew Ward or Tony Harris**

Minstrel Hotel Microsystems Ltd. **01-328 8737**
69 Loudoun Road, London NW8 0DQ Telex: 266828

● Circle No. 190

BACK NUMBERS ORDER FORM

Please send me the back numbers of Practical Computing detailed overleaf for which I enclose Cheque/PO for £....

Prices per copy (including post and packing) U.K. £1.50. Europe (excluding U.K.) £2. Elsewhere overseas (airmail) £2.50.

PAYMENT WITH ORDER ONLY

Name .....

Address .....

.....

.....

Company Registered in England Reg. No. 151537.
Reg. Office, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

This card is valid for six months only

FREE READER ENQUIRY SERVICE

Please send me more information on the items circled below:

101	102	103	104	105	106	107	108	109	110	111	112	113	114	115
116	117	118	119	120	121	122	123	124	125	126	127	128	129	130
131	132	133	134	135	136	137	138	139	140	141	142	143	144	145
146	147	148	149	150	151	152	153	154	155	156	157	158	159	160
161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
176	177	178	179	180	181	182	183	184	185	186	187	188	189	190
191	192	193	194	195	196	197	198	199	200	201	202	203	204	205
206	207	208	209	210	211	212	213	214	215	216	217	218	219	220
221	222	223	224	225	226	227	228	229	230	231	232	233	234	235
236	237	238	239	240	241	242	243	244	245	246	247	248	249	250
251	252	253	254	255	256	257	258	259	260	261	262	263	264	265
266	267	268	269	270	271	272	273	274	275	276	277	278	279	280
281	282	283	284	285	286	287	288	289	290	291	292	293	294	295
296	297	298	299	300	301	302	303	304	305	306	307	308	309	310
311	312	313	314	315	316	317	318	319	320	321	322	323	324	325
326	327	328	329	330	331	332	333	334	335	336	337	338	339	340
341	342	343	344	345	346	347	348	349	350	351	352	353	354	355
356	357	358	359	360	361	362	363	364	365	366	367	368	369	370
371	372	373	374	375	376	377	378	379	380	381	382	383	384	385
386	387	388	389	390	391	392	393	394	395	396	397	398	399	400
401	402	403	404	405	406	407	408	409	410	411	412	413	414	415
416	417	418	419	420	421	422	423	424	425	426	427	428	429	430

NAME .....

ADDRESS .....

.....

.....

.....Tel: .....

SUBSCRIPTION ORDER FORM

☐ Please send me Practical Computing each month for 12 months

Cheques should be made payable to Business Press International Ltd. Cash with order please.

Name .....

Address .....

.....

.....

.....

Signed .....Date .....

☐ Subscription rate U.K. £12
☐ Overseas £18

Airmail rates can be supplied on application to the Subscription Department.

PRACTICAL COMPUTING
SUBSCRIPTION MANAGER
BUSINESS PRESS INTERNATIONAL LTD
OAKFIELD HOUSE
PERRYMOUNT ROAD
HAYWARDS HEATH
SUSSEX RH16 3DH

AFFIX STAMP HERE

Company Registered in England Reg. No. 151537.
Reg. Office, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

PRACTICAL COMPUTING APRIL 1983 PCO 8364

BACK NUMBERS ORDER FORM

MONTH	YEAR	QUANTITY

PRACTICAL COMPUTING APRIL 1983 PCO 8364

PRACTICAL COMPUTING
READER SERVICE DEPARTMENT
OAKFIELD HOUSE
PERRYMOUNT ROAD
HAYWARDS HEATH
SUSSEX RH16 3DH

AFFIX STAMP HERE

SUBSCRIPTION ORDER FORM

☐ Please send me Practical Computing each month for 12 months

Cheques should be made payable to Business Press International Ltd. Cash with order please.

Name .....

Address .....

.....

.....

.....

Signed .....Date .....

☐ Subscription rate U.K. £12
☐ Overseas £18

Airmail rates can be supplied on application to the Subscription Department.

Company Registered in England Reg. No. 151537.
Reg. Office, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

PRACTICAL COMPUTING APRIL 1983 PCO 8364

PRACTICAL COMPUTING
SUBSCRIPTION MANAGER
BUSINESS PRESS INTERNATIONAL LTD
OAKFIELD HOUSE
PERRYMOUNT ROAD
HAYWARDS HEATH
SUSSEX RH16 3DH

AFFIX STAMP HERE

APPLE PIE

by John Harris



Simon

THE GAME of Simon is available commercially, though not necessarily on a computer. It is essentially a memory test, with the program playing a sequence of notes to which it adds one more each time you demonstrate your retention of what has gone so far.

Running the program by J Bamford of Wells, Somerset, I have reached 15 but Mr Bamford, possibly optimistically, has set the game to push on as far as 100 before admitting defeat. Mr Bamford claims that line 430 contains three embedded Control-G characters; it would take a better man than I to prove him wrong.

Enhanced File indexing

In November 1982 this column carried a File Index utility by Mr A Hourd of

(continued on page 173)

Enhanced file indexing.

```
10  ONERR  GOTO 9900
20 GM = 0
100  TEXT : HOME
110  HTAB 3: PRINT " ************
     **********************"
115  HTAB 3: PRINT " *
                          *"
120  HTAB 3: PRINT " *   MASTER C
     ATALOGUE OF DISKS   *"
130  HTAB 3: PRINT " *
                          *"
140  HTAB 3: PRINT " ************
     **********************"
150  VTAB 10: HTAB 4: PRINT "CHOO
     SE FROM :-": VTAB 12: HTAB 1
     0
160  PRINT "1. MAKING A CATALOGUE
     "
170  PRINT : HTAB 10: PRINT "2. R
     EADING A CATALOGUE"
172  PRINT : HTAB 10: PRINT "3. C
     ATALOG"
175  PRINT : HTAB 10: PRINT "4. Q
     UIT THE PROGRAM."
180  PRINT : PRINT : PRINT "PRESS
      1-4 ";
190  GET A$:AC =  VAL (A$)
192  IF AC < 1 OR AC > 4 THEN 190

195  IF AC = 3 THEN  GOSUB 12000:
      RUN
200  ON AC GOTO 1000,4000,100,146
     0
1000  REM ************************
     **
1010  REM *** DISK FILE INDEX DOS
      3.3 ***
1020  REM ************************
     **
1030  HIMEM: 34000
1040  TEXT : HOME : PRINT
1050  HTAB 8: PRINT "************
     ************"
1060  HTAB 8: PRINT "*** DISK FIL
     ES INDEX ***"
1070  HTAB 8: PRINT "************
     ************"
1080  VTAB 20: HTAB 8: PRINT "PRE
     SS SPACE WHEN READY.";
1090  GET AN$: IF AN$ <  > " " THEN
      1090
1100  PRINT
1110 BA = 34500:TR = 1:FA = 0:EF =
     0:AD = 768:ID = AD + 9:TW =
     2
1120  REM *** NAMES OF FILES IN N
     A$() DIMENSIONED FOR 500 FIL
     ES ***
1130  REM ************
1140  DIM NA$(500)
1150 S3$ = "000"
1160  TEXT : HOME
1170  PRINT "PUT FIRST DISK IN,EN
     TER ITS I.D.": PRINT
1180  PRINT : INPUT "(ONLY 4 CHAR
     S PLEASE)  ";DN$
1190  IF  LEN (DN$) < 4 THEN DN$ =
      DN$ + " ": GOTO 1190
1200  IF  LEN (DN$) > 4 THEN 1180

1210  PRINT : PRINT : FLASH : PRINT
      " WORKING....PLEASE WAIT ": NORMAL
     : PRINT
1220 EN = 0
1230  GOSUB 1480
1240  REM  ***SHELL-METZNER SORT
     ***
1250  HOME : VTAB 10: PRINT  CHR$
     (7)"NOW WAIT WHILE ";EN;" FI
     LES ARE SORTED.": PRINT : FLASH
     : PRINT " DO NOT INTERRUPT..
     .....": NORMAL
1260  GOSUB 2310
1270  PRINT  CHR$ (7) CHR$ (7) CHR$
     (7)
1280  REM   *** END OF SORT ROUTI
     NE ***
1285 EF = 0
1290  GOSUB 2100
1295 EF = 1
1300  HOME : PRINT : PRINT "HARD
     COPY ?(Y/N)"
1310  GET Z$: IF Z$ = "N" THEN 14
     50
1320  IF Z$ <  > "Y" THEN 1310
1330  HOME : VTAB 5: PRINT " MAKE
      SURE A PRINTER IS CONNECTED
      !!": PRINT "THEN PRESS SPAC
     E TO GO ON."
1340  GET AN$: IF AN$ <  > " " THEN
      1340
1350  PRINT : PRINT  CHR$ (4)"PR£
     1"
1360  REM  *** COULD NEED 'PRINT
     CHR$(9);"BON" FOR SOME PRINT
     ERS ***
1370  PRINT : PRINT  SPC( 15);"MA
     STER CATALOGUE   PAGE1": PRINT

1380  FOR X = 1 TO EN
1390  PRINT  SPC( 10); LEFT$ (NA$
     (X),1); SPC( 2); MID$ (NA$(X
     ),2,20);
1400  PRINT  SPC( 2); MID$ (NA$(X
     ),22,3); SPC( 2);"DISK "; RIGHT$
     (NA$(X),4)
1410  IF X / 55 =  INT (X / 55) THEN
      PRINT  CHR$ (12): PRINT : PRINT
     : PRINT  SPC( 15);"MASTER CA
     TALOGUE     PAGE "; INT (X /
     55) + 1: PRINT
1420  NEXT
1430  PRINT : PRINT  CHR$ (4);"PR
     £0"
1440  PRINT  CHR$ (7) CHR$ (7) CHR$
     (7) CHR$ (7) CHR$ (7)"FINISH
     ED"
1450  IF GM <  > 1 THEN  GOSUB 21
     00
1455  VTAB 22: PRINT "PRESS SPACE
      TO GO ON"
1456  GET A$: IF A$ <  > " " THEN
      1456
1457  RUN
1460  GOSUB 2270: HOME : PRINT "'
     BYE FOR NOW."
1465  POKE 216,0
1470  VTAB 5: FLASH : PRINT " RET
     URNING TO DISK MENU ": NORMAL
     : PRINT : PRINT  CHR$ (4)"RU
     NMENU"
1480 PO = 0:RS = 0:SC = 0
1490  REM  *** RESET ALL PARAMETE
     RS FOR EACH DISK ***
1500  GOSUB 1950
1510 BP = BA - 256:NT = 17:NS = 1
     5
1520  REM  *** MAIN LOOP FOR READ
     ING EACH DISK CATALOG ***
1530 BP = BP + 256
1540  POKE ID + 9, INT (BP / 256)
     : POKE ID + 4,NT: POKE ID +
     5,NS
1550  CALL 768
1560  GOSUB 2010
1570  IF EF = TR THEN 2030
1580 SC = SC + 1:NT =  PEEK (BP +
     1):NS =  PEEK (BP + 2)
1590  IF NT > 0 AND NS > 0 THEN 1
     530
1600  REM  *** PUSH DATA INTO STR
     INGS ***
1610  FOR CS = 1 TO SC
1620  FOR SE = 1 TO 7
1630 RS = (BA - 256) + (CS * 256)
      + 11 + (SE - 1) * 35
1640 FT =  PEEK (RS + 2)
1650  IF ( PEEK (RS) = 255) OR ( PEEK
     (RS + 33) = 0) THEN 1800
1660 EN = EN + 1: REM *** UPDATE
     NO. OF ENTRIES ***
1670  IF FT >  = 128 THEN FT = FT
      - 128: REM *** IGNORE LOCKE
     D CODE ***
1680  IF FT = 0 THEN FT$ = "T": GOTO
      1730
1690  IF FT = 1 THEN FT$ = "I": GOTO
      1730
1700  IF FT = 2 THEN FT$ = "A": GOTO
      1730
1710  IF FT = 4 THEN FT$ = "B": GOTO
      1730
1720 FT$ = "?": REM *** ONE OF TH
     E UNUSUAL FILE TYPES.EG. 'R'
      ***
1730 FS =  PEEK (RS + 33):FS$ = S
     3$ +  STR$ (FS):FS$ =  RIGHT$
     (FS$,3)
1740 NA$(EN) = ""
1750  FOR PO = 1 TO 20
1760 N$ =  CHR$ ( PEEK (RS + TW +
     PO))
1770 NA$(EN) = NA$(EN) + N$
1780  NEXT
1790 NA$(EN) = FT$ + NA$(EN) + FS
     $ + DN$
1800  NEXT
```

(listing continued on page 173)

Simon.

```
100  REM  SIMON BY J.BAMFORD 1983


110  GOTO 1010
200  REM SUB ROUTINE TO PLAY NOTE
      AND DISPLAY KEY NUMBER
210  POKE 38377,128: HTAB (21): PRINT
     "4";: GOTO 260
220  POKE 38377,171: HTAB (20): PRINT
     "3";: GOTO 260
230  POKE 38377,203: HTAB (19): PRINT
     "2";: GOTO 260
240  POKE 38377,0: HTAB (18): PRINT
     "1";: GOTO 260
250  POKE 38377,64
260  POKE 38378,DR: REM  POKE DUR
     ATION
270  CALL 38379: REM  PLAY NOTE
280  HOME : REM  CLEAR SCREEN OF
     KEY NUMBER
290  RETURN : REM  END OF SUBROUT
     INE
400  REM GAME STARTS HERE
410  HOME : PRINT "HERE WE GO....
     ..": FOR W = 1 TO 1000: NEXT
     W:K = 0: REM  CLEAR SCREEN,
     PRINT, WAIT, START NEW GAME
420 K = K + 1: REM  INCREMENT SEQ
     UENCE COUNTER
430  IF K > MN THEN  PRINT "YOU W
     IN.": END
440 TABLE(K) =  INT ( RND (1) * 4
      + 1): REM SET KEY NUMBER FO
     R NEXT NOTE IN TABLE
450 DUMMY =  PEEK (49168): REM  C
     LEAR KEYBOARD STROBE
460  REM NOW PLAY NOTE SEQUENCE
470  FOR C = 1 TO K
480  ON TABLE(C) GOSUB 240,230,22
     0,210: REM PLAY NOTE
490  NEXT
500  FOR C = 1 TO K
510  GET A$:B =  ASC (A$) - 48: REM
      GET KEY AND CONVERT TO NUMBE
     R
520  IF B = 0 THEN  HOME : PRINT
     "BYE";: END
530  IF B < 1 OR B > 4 THEN 510: REM
      CHECK FOR SUITABLE KEY
540  IF B <  > TABLE(C) THEN  GOSUB
      250: PRINT "YOUR SCORE WAS "
     K - 1" THAT TIME.":FLAG = 1:
     C = K: GOTO 560: REM IF WRON
     G KEY,END GAME,PRINT SCORE,E
     XIT CLEANLY FROM FOR LOOP
550  ON B GOSUB 240,230,220,210: REM
      PLAY NOTE
560  NEXT C
570  FOR W = 1 TO 1000: NEXT W: REM
      WAIT
580  IF FLAG = 1 THEN FLAG = 0: GOTO
      410: REM START NEW GAME
590  GOTO 420
1000  REM INITIALIZE MACHINE
1010  HIMEM: 38376: PRINT : PRINT
      CHR$ (4)"PR£0": NORMAL : HOME
1020 MN = 100: REM SET MAXIMUM NU
     MBER OF NOTES
1030  DIM TABLE(MN)
1040  REM POKE SUBROUTINE TO PLAY
      NOTES
1050  POKE 38379,173: POKE 38380,
      48: POKE 38381,192: POKE 383
     82,136: POKE 38383,208: POKE
     38384,5: POKE 38385,206: POKE
     38386,234: POKE 38387,149: POKE
     38388,240: POKE 38389,9
1060  POKE 38390,202: POKE 38391,
      208, POKE 38392,245: POKE 38
     393,174: POKE 38394,233: POKE
     38395,149: POKE 38396,76: POKE
     38397,235: POKE 38398,149: POKE
     38399,96
1070  REM PRINT INSTRUCTIONS
1080  PRINT "THIS PROGRAM PLAYS '
     SIMON'.": PRINT
1090  PRINT "SPEED (0-9) / "; GET
     A$: PRINT A$:SP =  ASC (A$)
      - 48: REM GET KEY,PRINT IT,
     AND CONVERT TO A NUMBER
1100  IF SP < 0 OR SP > 9 THEN  HTAB
      (1): GOTO 1090: REM IF VALUE
      UNACCEPTABLE, GET ANOTHER K
     EY
1110  PRINT : PRINT :DR =  INT (2
     50 / (10 ^ (SP / 9))): REM S
     ET DURATION OF NOTES
1120  PRINT "USE THE KEYS 1 TO 4
      TO ENTER YOUR NOTES.": PRINT

1130  PRINT "PRESS 0 WHEN YOU ARE
      READY TO START.": PRINT
1140  PRINT "PRESS 0 AGAIN WHEN Y
     OU WANT TO STOP.": PRINT
1150  PRINT "TRY THE KEYS 1 TO 4
     NOW.": PRINT
1160  GET A$:B =  ASC (A$) - 48: HOME
     : REM GET KEY,CONVERT TO NUM
     BER,CLEAR SCREEN
1170  IF B = 0 THEN 410: REM STAR
     T GAME
1180  IF B  1 OR B  4 THEN 1160
      REM              CHECK FOR SU
     ITABLE KEY
1190  ON B GOSUB 240,230,220,210:
      REM PLAY NOTE
1200  GOTO 1160
```

Ø1 COMPUTERS 01-228-2207. Ø1 COMP

YOU SIMPLY CANNOT AFFORD TO MISS THIS OFFER


REMEMBER! WE SPECIALISE, YOU BENEFIT

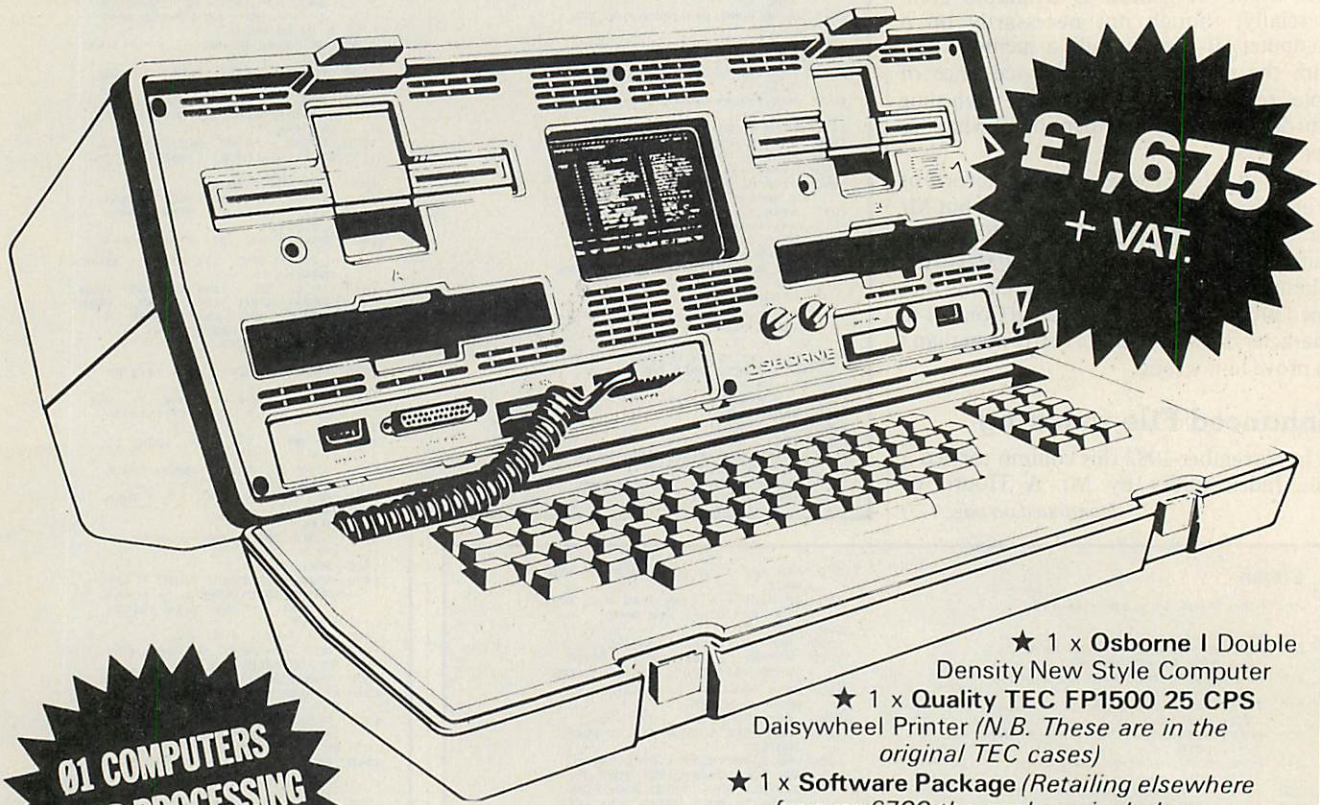

£1,675 + VAT.

★ 1 x **Osborne I** Double Density New Style Computer
★ 1 x **Quality TEC FP1500 25 CPS** Daisywheel Printer *(N.B. These are in the original TEC cases)*
★ 1 x **Software Package** *(Retailing elsewhere for over £700 the package includes:– CP/M, WORDSTAR/MAILMERCE, C.BASIC and M.BASIC, SUPERCALC).*

Ø1 COMPUTERS WORD PROCESSING WONDER PACKAGE

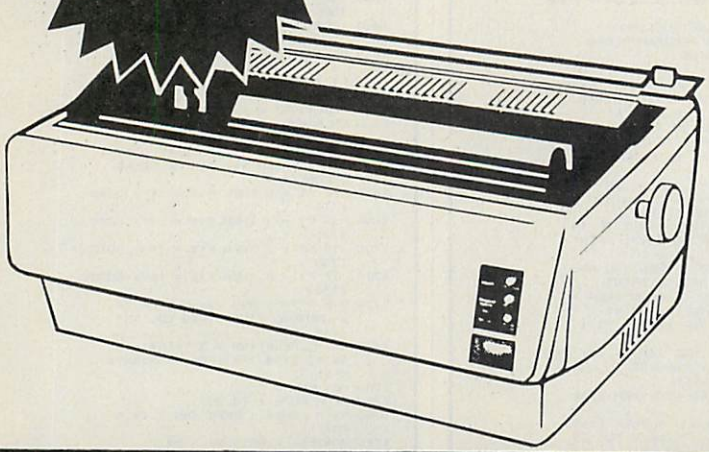

PLUS ! PLUS ! PLUS!

Only while stocks last, ***free*** with double density models – D.BASE II the Ashton Tate Database Management Package.

ALL FROM Ø1 COMPUTERS

Also available

★ Extended Warranties ★ On Site Comprehensive Maintenance Contracts ★ Combined Acoustic Coupler and Modem ★ Incomplete Records ★ Time & Cost Recording ★ Accounts Packages ★ Games ★ Rentals

CALL NOW FOR OUR LATEST LIST OF EXTRAS

LONDON SALES OFFICE: 01-228 2207
NORTHERN SALES OFFICE: 0904-470013

PUTERS 01-228-2207. Ø1 COMPUTERS Ø1

● **Circle No. 191**

(listing continued from page 171)

```
1810  NEXT
1820 X9 =  FRE (0)
1822  HOME : PRINT : PRINT EN" FI
     LES READ SO FAR": PRINT
1830  PRINT : PRINT "ANOTHER DISK
     TO DO ?(Y/N)";
1840  GET AN$: PRINT AN$: IF AN$ =
     "N" THEN  RETURN
1850  IF AN$ <  > "Y" THEN 1830
1852  VTAB 5: PRINT "
                                  "
1860  PRINT "FREE MEMORY = ";X9
1870  PRINT : PRINT "(LAST DISK R
     EF. WAS ";DN$" )"
1880  PRINT : PRINT "PUT NEXT DIS
     K IN,ENTER ITS I.D."
1890  PRINT : INPUT "(ONLY 4 CHAR
     S. REMEMBER!)";DN$
1900  IF  LEN (DN$) < 4 THEN DN$ =
     DN$ + " ": GOTO 1900
1910  IF  LEN (DN$) > 4 THEN 1890

1920  PRINT : FLASH : PRINT " WOR
     KING.....PLEASE WAIT ": NORMAL
     : PRINT
1930  GOTO 14B0
1940  REM  *** DISK READ SUBROUTI
     N AND PARAMETER TABLE ***
1950  RESTORE
1960  FOR X = 0 TO 29: READ Y: POKE
     AD + X,Y: NEXT : RETURN
1970  DATA 169,3,160,9,32,217,3,9
     6,0,1,96,1,0,17,15,26,3,196,
     134,0,0,1,0,0,98,1,0,1,239,2
     16
1980  REM  *** ERROR CHECKING ROU
     TINE ***
1990  REM  *** RETURNS ERROR CODE
      AS PAGE 97 OF DOS MANUAL (I
     BSTAT) ***
2000  REM  *** IN DECIMAL, NOT HE
     X !!! ***
2010  IF  PEEK (IO + 13) = 0 THEN
     EF = FA: RETURN
2020 EF = TR: RETURN
2030  PRINT : CALL  - 1052: CALL
      - 1052
2040  PRINT "ERROR NO. "; PEEK (I
     O + 13);" TRACK ";INT;" SECTO
     R ";NS
2050  PRINT : PRINT "YOU CAN TRY
     SAME DISK AGAIN OR PUT IN A"

2060  PRINT : PRINT "FRESH DISK W
     ITH A NEW I.D."
2070  PRINT : PRINT : PRINT "PRES
     S SPACE TO CONTINUE...";
2080  GET AN$: IF AN$ <  > " " THEN
     2080
2090  GOTO 1B20
2100  TEXT : HOME
2110  PRINT : PRINT "SAVE TO DISK
     ? (Y/N)"
2120  GET AN$: IF AN$ = "N" THEN
     HOME : PRINT "'BYE FOR NOW
     THEN": RETURN
2130  IF AN$ <  > "Y" THEN 2120
2140 GM = 1:JW = 1
2150 D$ =  CHR$ (4)
2160  PRINT : PRINT "TYPE IN THE
     NAME YOU WANT THIS FILE": PRINT
     "TO HAVE      ": INPUT FI$
2170  PRINT : PRINT D$;"OPEN";FI$

2180  PRINT : PRINT D$"DELETE";FI
     $
2190  PRINT : PRINT D$"OPEN";FI$
2200  PRINT : PRINT D$;"WRITE";FI
     $
2210  PRINT EN
2220  FOR K = 1 TO EN: PRINT NA$(
     K): NEXT
2230  PRINT : PRINT D$;"CLOSE";FI
     $
2240  PRINT : PRINT D$;"LOCK";FI$

2250  TEXT : HOME
2260  PRINT  CHR$ (7) CHR$ (7): PRINT
      : PRINT "FINISHED": RETURN
```

(continued from page 171)

Brundell, Norfolk. Since then enhanced versions based on this original have been sent in, with the intention of improving the sort — which, as Mr Hourd confessed at the time, was atrocious — and providing a hard-copy back-up to disc in case of printer failure during the final printing stage. It is silly to spend 10 minutes on a utility only to have to repeat the exercise from the beginning when you find the paper was misaligned, for instance.

One of these enhanced versions we are printing this month. It is admittedly very long, and not easy for those who keyed the original to merely type in modifications to what they have. Mr G Miles of Auchinleck Academy has provided a very thorough error-checking routine and a greatly enhanced sort. The resulting utility is a solid usable result which is worth printing in full, despite the apparent duplication of a previous submission.

```
2270  TEXT : HOME : PRINT : PRINT
     "ANOTHER RUN ?(Y/N)"
2280  GET Z$: IF Z$ = "N" THEN  RETURN


2290  IF Z$ <  > "Y" THEN 2280
2300  RUN
2310 ZC = 0:ZS = 0:ZA = 1:ZN = BN
2320  IF Z > ZA > ZN THEN 2350
2330 ZA = ZA + 1
2340  GOTO 2320
2350 ZF = Z - ZA - 1
2360 ZF =  INT (ZF / 2)
2370  IF ZF = 0 THEN  RETURN
2380 ZD = ZN - ZF
2390 ZB = 1
2400 ZA = ZB
2410 ZE = ZA + ZF
2420 ZC = ZC + 1
2430  IF NA$(ZA) > NA$(ZE) THEN 2
     470
2440 ZB = ZB + 1
2450  IF ZB > ZD THEN 2360
2460  GOTO 2400
2470 ZS = ZS + 1
2480 ZT$ = NA$(ZA):NA$(ZA) = NA$(
     ZE):NA$(ZE) = ZT$
2490 ZA = ZA - ZF
2500  IF ZA < 1 THEN 2440
2510  GOTO 2410
4000  GOSUB 4340
4010  PRINT : PRINT  CHR$ (4)"OPE
     N";FI$
4020  PRINT : PRINT  CHR$ (4)"REA
     D"FI$
4030  INPUT N
4040  DIM N$(N)
4050  FOR K = 1 TO N
4060  INPUT N$(K): NEXT
4070  PRINT : PRINT  CHR$ (4)"CLO
     SE"FI$
4080  TEXT : HOME : PRINT  CHR$ (
     7) CHR$ (7)
4090  PRINT : PRINT "HARD COPY ?
     (Y/N)"
4100  GET Z$: IF Z$ = "Y" THEN 42
     20
4110  IF Z$ <  > "N" THEN 4100
4120  TEXT : HOME : PRINT CH$
4130  PRINT
4140  POKE 34,2
4150  FOR K = 1 TO N
4160  PRINT  LEFT$ (N$(K),1); SPC(
     2); MID$ (N$(K),2,20);
4170  PRINT  SPC( 2); MID$ (N$(K)
     ,22,3); SPC( 2);"DISK "; RIGHT$
     (N$(K),4)
4180  IF (K / 18) =  INT (K / 18)
     THEN  GOSUB 4310
4190  NEXT
4200  POKE 34,0
4210  GOTO 4510
4220  PRINT : PRINT  CHR$ (4)"PRE
     1"
4230  PRINT : PRINT  SPC( 10);CH$
     ; SPC( 6);"PAGE 1": PRINT : PRINT



4240  FOR K = 1 TO N
4250  PRINT  SPC( 15); LEFT$ (N$(
     K),1); SPC( 2); MID$ (N$(K),
     2,20);
4260  PRINT  SPC( 2); MID$ (N$(K)
     ,22,3); SPC( 2);"DISK "; RIGHT$
     (N$(K),4)
4270  IF K / 55 =  INT (K / 55) THEN
      PRINT  CHR$ (12): PRINT : PRINT
     : PRINT  SPC( 15);CH$; SPC(
     6);"PAGE "; INT (K / 55) + 1
     : PRINT : PRINT
4280  NEXT
4290  PRINT : PRINT  CHR$ (4)"PRE
     .O"
4300  GOTO 4510
4310  INVERSE : PRINT : PRINT : PRINT
     "PRESS SPACE FOR THE REST":
     NORMAL
4320  GET Z$: IF Z$ <  > " " THEN
     4320
4330  HOME : RETURN
4340  TEXT : HOME
4350  PRINT : PRINT  SPC( 5):: INVERSE

     : PRINT " MASTER CATALOGUE F
     ILE READER ": NORMAL
4360  VTAB 5: HTAB 2: PRINT "IS D
     ATE REQUIRED ?(Y/N)"
4370  GET Z$: IF Z$ = "N" THEN MT
     $ = "":YN$ = "": GOTO 4430
4380  IF Z$ <  > "Y" THEN 4370
4390  VTAB 5: HTAB 2: PRINT "ENTE
     R MONTH AS WORD       ": INPUT
     MT$
4400  IF MT$ = "" THEN 4390
4410  VTAB 7: HTAB 2: PRINT "ENTE
     R YEAR (EG. 1982)": INPUT YN
     $
4420  IF YN$ = "" THEN 4410
4430  PRINT : PRINT "TYPE IN A HE
     ADING THEN PRESS RETURN"
4440  INPUT CH$
4450  IF CH$ = "" THEN CH$ = "MAS
     TER CATALOGUE"
4460 CH$ = CH$ + "   " + MT$ + "
     " + YN$
4470  TEXT : HOME : PRINT : PRINT
     "ENTER NAME OF FILE TO BE RE
     AD": INPUT FI$
4480  IF FI$ = "" THEN 4470
4485 JW = 0
4490  TEXT : HOME : FLASH : PRINT
     : PRINT " READING ";FI$;" "
4500  NORMAL : RETURN
4510  PRINT : PRINT "READ ANOTHER
     FILE ? (Y/N)";
4520  GET Z$: IF Z$ = "N" THEN  RUN

4530  IF Z$ <  > "Y" THEN 4520
4540  CLEAR : GOTO 4000
9900  REM *** ERROR MESSAGES ***
9902  TEXT : HOME : PRINT  CHR$ (
     7) CHR$ (7)
9905 ER =  PEEK (222)
9910  IF ER = 255 THEN  POKE 216,
     0: TEXT : HOME : PRINT  CHR$
     (7)"YOU PRESSED CTRL-C": PRINT
     : PRINT : PRINT "'BYE FOR NO
     W": END
9915  IF ER = 4 THEN 11100
9917  IF ER = 5 THEN 11150
9920  IF ER = 6 THEN 11200
9925  IF ER = 8 THEN 11300
9930  IF ER = 9 THEN 11400
9935  IF ER = 10 THEN 11500
9940  IF ER = 11 OR ER = 16 THEN
     11600
9942  IF ER = 13 THEN 11700
9945  POKE  - 16303,0: PRINT  CHR$
     (7) CHR$ (7): PRINT "ERROR N
     O....";  PEEK (222): PRINT "G
     ET HELP OR TYPE RUN TO TRY A
     GAIN.": END
10000  VTAB 23: HTAB 10: INVERSE
     : PRINT " PRESS SPACE BAR TO
     GO ON "
10005  NORMAL
10010 Z =  PEEK ( - 16384) - 128
10020  IF Z = 32 THEN  POKE  - 16
     368,0: RETURN
10030  GOTO 10010
11000  REM ***** ERROR HANDLING R
     OUTINES ***
11100  PRINT : PRINT "YOU CANNOT
     RECORD ON THIS DISK! IT IS"
11110  PRINT "WRITE PROTECTED. RE
     MOVE THE TAPE ON THE"
11120  PRINT "RIGHT HAND SIDE OF
     THE DISK THEN TRY"
11130  PRINT "AGAIN."
11140  GOTO 13000
11150  PRINT : PRINT "THAT FILE D
     IDN'T EXIST ON THIS DISK,OR"
     : PRINT "ELSE IT DIDN'T HAVE
     ANY INFORMATION IN"
11155  PRINT "IT.": PRINT : PRINT
     "TRY AGAIN.": GOTO 14000
11200  PRINT : PRINT "THERE'S NO
     FILE/PROGRAM/PICTURE/DISPLAY
     "
11210  PRINT "OF THAT NAME ON THI
     S DISK. EITHER CHECK"
11220  PRINT "YOUR SPELLING OR TR
     Y ANOTHER DISK."
11230  GOTO 13000
11300  PRINT : PRINT "THERE'S AN
     INPUT/OUTPUT ERROR (I/O):"
11310  PRINT "THE COMMON CAUSES O
     F THIS ARE:-": PRINT "NO DIS
     K IN THE DRIVE"
11320  PRINT "DOOR OF THE DRIVE U
     NIT NOT CLOSED"
11330  PRINT "DISK NOT BEEN INITI
     ALISED"
11340  PRINT "USING A 13 SECTOR D
     ISK (USE 'MUFFIN'"
11350  PRINT "FROM THE APPLE MAST
     ER DISK TO CORRECT)
11355  PRINT : PRINT "SORT OUT TH
     E PROBLEM AND THEN CONTINUE.
11360  IF JW = 1 THEN JW = 0: GOTO
      13000
11365  GOTO 14000
11400  PRINT : PRINT "THERE IS NO
     T ENOUGH ROOM ON THE DISK"
11410  PRINT "TO SAVE THE CATALOG
     UE. FIND A DISK WITH"
11420  PRINT "ENOUGH FREE SECTORS
     ON IT CALCULATED BY ABOUT"
11430  PRINT "1/8TH OF THE NUMBER
     OF FILES SORTED."
11440  PRINT : PRINT "AT SOME STA
     GE DELETE THE FILE YOU JUST"

11450  PRINT "TRIED TO SAVE FROM
     THE FULL DISK SO AS"
11455  PRINT "TO AVOID COMPLICATI
     ONS ON THAT DISK."
11457  GOTO 13000
11500  PRINT : PRINT "THERE IS AL
     READY A FILE/PROGRAM/DISPLAY
     "
11510  PRINT "BY THAT NAME ON THI
     S DISK AND IT IS"
11520  PRINT "LOCKED. EITHER RENA
     ME YOUR FILE OR"
11530  PRINT "UNLOCK THE FILE AND
     TRY ANOTHER RUN."
11540  PRINT : PRINT "RENAME OR U
     NLOCK ?(R/U)    ";
11545  GET Z$
11550  IF Z$ = "R" THEN 13000
11560  IF Z$ <  > "U" THEN 11545
11565  PRINT : PRINT  CHR$ (4);"U
     NLOCK";FI$
11570  PRINT : PRINT FI$;" IS NOW
     UNLOCKED.": GOTO 13000
11600  PRINT : PRINT "THERE HAS B
     EEN A SPELLING MISTAKE AT"
11610  PRINT "LINE NUMBER "; PEEK
     (218) +  PEEK (219) * 256
11620  PRINT : PRINT : PRINT "CHE
     CK THEN RUN PROGRAM AGAIN": END

11700  PRINT : PRINT "THAT FILE I
     S ON THE DISK BUT IT IS"
11710  PRINT "EITHER A BINARY FIL
     E OR AN APPLESOFT"
11720  PRINT "PROGRAM. YOUR FILE
     SHOULD BE A TEXT FILE."
11730  IF JW = 1 THEN 11750
11740  GOTO 14000
11750  PRINT "RENAME YOUR FILE AF
     TER PRESSING SPACE.": GOTO 1
     3000
12000  TEXT : HOME
12010  PRINT : PRINT  CHR$ (4)"CA
     TALOG"
12011  PRINT : PRINT
12012  GOSUB 10000
12020  RETURN
13000  GOSUB 10000: TEXT : HOME
13010  IF EF <  > 1 THEN  GOSUB 2
     100: GOTO 1300
13020  GOSUB 2100: GOTO 1455
14000  GOSUB 10000: RUN
```

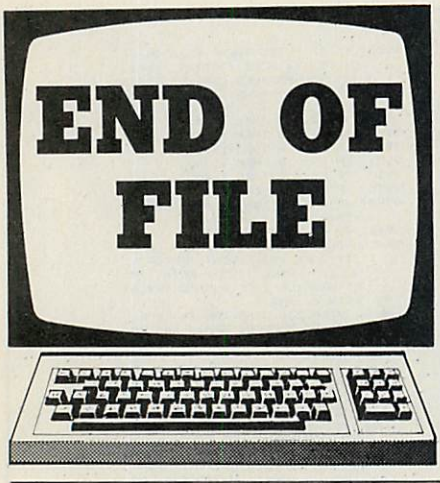

DRAGON 32

High-resolution dump


A SHORT Basic and machine-code routine which allows high-resolution screen data to be dumped to a printer, comes from R A Shackleford of Hamilton, Strathclyde.

High resolution dump.

```
1900 'BASIC SUBROUTINE AND DISASSEMBLED M/C CODE ROUTINE TO ALLOW SCREEN
1910 'DUMPING OF DRAGON 32 HIGH RESOLUTION GRAPHICS TO A TANDY LP VII.
1920 'FULL SCREEN TRANSFER TAKES ABOUT FIVE MINUTES"
1930 '
1940 ' BY   R A SHACKLEFORD
1950 '      7 CEDAR CRESCENT
1960 '      HAMILTON
1970 '      ML3 7LW
1980 '      5/NOV/1982
1990 '
2000 PRINT#-2,CHR$(18)
2010 FORI=0TO26
2020 FORJ=0TO31
2030 X=1536+224*I+J
2040 XH=INT(X/256):XL=X-256*XH
2050 POKE&H6F12,XH:POKE&H6F13,XL
2060 Z=USR0(Z)
2070 FORK=0TO7
2080 PRINT#-2,CHR$(PEEK(&H6F08+K));
2090 NEXTK,J:PRINT#-2,CHR$(13);:NEXTI:PRINT#-2,CHR$(30):RETURN
```

```
6F10   10 8E 1C DF      LDY    #1CDF
6F14   8E 6F 00         LDX    #6F00
6F17   C6 07            LDB    #07
6F19   A6 20            LDA     0,Y
6F1B   31 A8 20         LEAY   $20,Y
6F1E   A7 80            STA    ,X+
6F20   5A               DECB
6F21   26 F6            BNE    6F19
6F23   86 08            LDA    #08
6F25   10 8E 6F 08      LDY    #6F08
6F29   8E 6F 00         LDX    #6F00
6F2C   1C FE            ANDCC  #FE
6F2E   C6 07            LDB    #07
6F30   69 80            ROL    ,X+
6F32   66 20            ROR     0,Y
6F34   5A               DECB
6F35   26 F9            BNE    6F30
6F37   1A 01            ORCC   #01
6F39   66 A0            ROR    ,Y+
6F3B   4A               DECA
6F3C   26 EB            BNE    6F29
6F3E   39               RTS
```

```
30 'SAMPLE PROGRAM SHOWING OUTPUT TO PRINTER
40 '
50 DEF USR0= &H6F10
60 CLEAR200,25000
100 PMODE4,1:PCLS:SCREEN1,1
110 FORL=10 TO 90 STEP5
115 CIRCLE(128,96),L:NEXTL
120 GOSUB2000:END
```

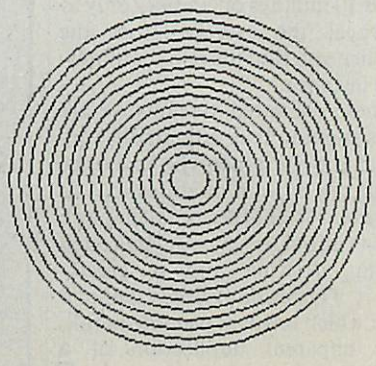

BASIC ROUTINE

Area under curve

THE PROGRAM by R Glynn Owens for calculating the area under a normal curve is one that is very useful and can be generalised to provide integration under other curves, writes M J Campbell of Southampton. This program is more specialised but gives a similar accuracy and is very much faster. Of course, whether you wait for 0.5 seconds or five seconds for the answer matters little if you are only running the program once, but if it forms part of a larger program — a simulation for example — where it may be run hundreds of times, the time element becomes important. The algorithm is based on one given by R A Lew in the journal *Applied Statistics,* (1981) **22**, page 209.

If H(x) is the area between x and infinity and $h(t) = (2\pi)^{-\frac{1}{2}} \exp(-t^2/2)$, then H(x) is approximated by

$$0.5 - (2\pi)^{-\frac{1}{2}}(x - x^3/7)$$

for $0 \leqq x \leqq 1$, and by

$$(1 + x)h(x)/(1 + x + x^2)$$

for $x > 1$.

The area between two points a and b, $a < b$ is given by H(a) − H(b). The layout is the same as that of Owens, except that 2π is calculated as 8* ATN(1). A further increase in speed would be obtained by putting $(2\pi)^{\frac{1}{2}}$ as 2.5066283.

BASIC ROUTINE

Recursive anagram

AN EXAMPLE of a problem which, in its general form, can only be solved by using a recursive procedure comes from A M Treder of Hounslow, Middlesex. The resulting program has quite powerful applications in many problems.

The program inputs a string and prints out all the possible permutations of the characters. If the string is entered with its characters in alphabetical or numerical order then the resulting permutations will also be printed in order.

Lines 100 to 140 set up the initial variables and counters. A$(X) stores the string available at a given depth of the recursion; LE(X) stores the length of that string; CO(X) stores the count which that level as reached; and R$(X) stores the character which has been chosen from the available string during this count at this level of recursion.

Line 150 is the main program and line 200 delimits the recursive process. Line 210 increments the counter for this level. Lines 220 to 240 select and remove a character from the available string before storing that as the available string for the next level.

Line 250 stores the current counter, adjusts X for the next recursive step and proceeds to it. Line 260 is only reached after

(listing continued from page 171)

```
1810  NEXT
1820 X9 =  FRE (0)
1822  HOME : PRINT : PRINT EN" FI
     LES READ SO FAR": PRINT
1830  PRINT : PRINT "ANOTHER DISK
     TO DO ?(Y/N)":
1840  GET AN$: PRINT AN$: IF AN$ =
     "N" THEN  RETURN
1850  IF AN$ <  > "Y" THEN 1830
1852  VTAB 5: PRINT "
                                   "
1860  PRINT "FREE MEMORY = ";X9
1870  PRINT : PRINT "(LAST DISK R
     EF. WAS ";DN$" )"
1880  PRINT : PRINT "PUT NEXT DIS
     K IN,ENTER ITS I.D."
1890  PRINT : INPUT "(ONLY 4 CHAR
     S. REMEMBER!";DN$
1900  IF  LEN (DN$) < 4 THEN DN$ =
     DN$ + " ": GOTO 1900
1910  IF  LEN (DN$) > 4 THEN 1890

1920  PRINT : FLASH : PRINT " WOR
     KING.....PLEASE WAIT ": NORMAL
     : PRINT
1930  GOTO 1480
1940  REM  *** DISK READ SUBROUTI
     N AND PARAMETER TABLE ***
1950  RESTORE
1960  FOR X = 0 TO 29: READ Y: POKE
     AD + X,Y: NEXT : RETURN
1970  DATA 169,3,160,9,32,217,3,9
     6,0,1,96,1,0,17,15,26,3,196,
     134,0,0,1,0,0,96,1,0,1,239,2
     16
1980  REM  *** ERROR CHECKING ROU
     TINE ***
1990  REM  *** RETURNS ERROR CODE
      AS PAGE 97 OF DOS MANUAL (I
     BSTAT) ***
2000  REM  *** IN DECIMAL, NOT HE
     X '!' ***
2010  IF  PEEK (IO + 13) = 0 THEN
     EF = FA: RETURN
2020 EF = TR: RETURN
2030  PRINT : CALL  - 1052: CALL
     - 1052
2040  PRINT "ERROR NO. "; PEEK (I
     O + 13);" TRACK ";NT;" SECTO
     R ";NS
2050  PRINT : PRINT "YOU CAN TRY
     SAME DISK AGAIN OR PUT IN A"

2060  PRINT : PRINT "FRESH DISK W
     ITH A NEW I.D."
2070  PRINT : PRINT : PRINT "PRES
     S SPACE TO CONTINUE...";
2080  GET AN$: IF AN$ <  > " " THEN
     2080
2090  GOTO 1820
2100  TEXT : HOME
2110  PRINT : PRINT "SAVE TO DISK
     ? (Y/N)"
2120  GET AN$: IF AN$ = "N" THEN
      HOME : PRINT "'BYE FOR NOW
     THEN": RETURN
2130  IF AN$ <  > "Y" THEN 2120
2140 GM = 1:JW = 1
2150 D$ =  CHR$ (4)
2160  PRINT : PRINT "TYPE IN THE
     NAME YOU WANT THIS FILE": PRINT
     "TO HAVE      ": INPUT FI$
2170  PRINT : PRINT D$;"OPEN";FI$

2180  PRINT : PRINT D$"DELETE";FI
     $
2190  PRINT : PRINT D$"OPEN";FI$
2200  PRINT : PRINT D$;"WRITE";FI
     $
2210  PRINT EN
2220  FOR K = 1 TO EN: PRINT NA$(
     K): NEXT
2230  PRINT : PRINT D$;"CLOSE";FI
     $
2240  PRINT : PRINT D$;"LOCK";FI$

2250  TEXT : HOME
2260  PRINT  CHR$ (7) CHR$ (7): PRINT
     : PRINT "FINISHED": RETURN
```

(continued from page 171)

Brundell, Norfolk. Since then enhanced versions based on this original have been sent in, with the intention of improving the sort — which, as Mr Hourd confessed at the time, was atrocious — and providing a hard-copy back-up to disc in case of printer failure during the final printing stage. It is silly to spend 10 minutes on a utility only to have to repeat the exercise from the beginning when you find the paper was misaligned, for instance.

One of these enhanced versions we are printing this month. It is admittedly very long, and not easy for those who keyed the original to merely type in modifications to what they have. Mr G Miles of Auchinleck Academy has provided a very thorough error-checking routine and a greatly enhanced sort. The resulting utility is a solid usable result which is worth printing in full, despite the apparent duplication of a previous submission.

```
2270  TEXT : HOME : PRINT : PRINT
     "ANOTHER RUN ?(Y/N)"
2280  GET Z$: IF Z$ = "N" THEN  RETURN


2290  IF Z$ <  > "Y" THEN 2280
2300  RUN
2310 ZC = 0:ZS = 0:ZA = 1:ZN = BN
2320  IF 2 > ZA > ZN THEN 2350
2330 ZA = ZA + 1
2340  GOTO 2320
2350 ZF = 2  ZA - 1
2360 ZF =  INT (ZF / 2)
2370  IF ZF = 0 THEN  RETURN
2380 ZD = ZN - ZF
2390 ZB = 1
2400 ZA = ZB
2410 ZE = ZA + ZF
2420 ZC = ZC + 1
2430  IF NA$(ZA) > NA$(ZE) THEN 2
     470
2440 ZB = ZB + 1
2450  IF ZB > ZD THEN 2360
2460  GOTO 2400
2470 ZS = ZS + 1
2480 ZT$ = NA$(ZA):NA$(ZA) = NA$(
     ZE):NA$(ZE) = ZT$
2490 ZA = ZA - ZF
2500  IF ZA < 1 THEN 2440
2510  GOTO 2410
4000  GOSUB 4340
4010  PRINT : PRINT  CHR$ (4)"OPE
     N"FI$
4020  PRINT : PRINT  CHR$ (4)"REA
     D"FI$
4030  INPUT N
4040  DIM N$(N)
4050  FOR K = 1 TO N
4060  INPUT N$(K): NEXT
4070  PRINT : PRINT  CHR$ (4)"CLO
     SE"FI$
4080  TEXT : HOME : PRINT  CHR$ (
     7) CHR$ (7)
4090  PRINT : PRINT "HARD COPY ?
     (Y/N)"
4100  GET Z$: IF Z$ = "Y" THEN 42
     20
4110  IF Z$ <  > "N" THEN 4100
4120  TEXT : HOME : PRINT CH$
4130  PRINT
4140  POKE 34,2
4150  FOR K = 1 TO N
4160  PRINT  LEFT$ (N$(K),1); SPC(
     2); MID$ (N$(K),2,20);
4170  PRINT  SPC( 2); MID$ (N$(K)
     ,22,3); SPC( 2);"DISK "; RIGHT$
     (N$(K),4)
4180  IF (K / 18) =  INT (K / 18)
     THEN  GOSUB 4310
4190  NEXT
4200  POKE 34,0
4210  GOTO 4510
4220  PRINT : PRINT  CHR$ (4)"PRE
     1"
4230  PRINT : PRINT  SPC( 10);CH$
     : SPC( 6);"PAGE 1": PRINT : PRINT



4240  FOR K = 1 TO N
4250  PRINT  SPC( 15); LEFT$ (N$(
     K),1); SPC( 2); MID$ (N$(K),
     2,20);
4260  PRINT  SPC( 2); MID$ (N$(K)
     ,22,3); SPC( 2);"DISK "; RIGHT$
     (N$(K),4)
4270  IF K / 55 =  INT (K / 55) THEN
      PRINT  CHR$ (12): PRINT : PRINT
     : PRINT  SPC( 15);CH$; SPC(
     6);"PAGE "; INT (K / 55) + 1
     : PRINT : PRINT
4280  NEXT
4290  PRINT : PRINT  CHR$ (4)"PRE
     .O"
4300  GOTO 4510
4310  INVERSE : PRINT : PRINT : PRINT
     "PRESS SPACE FOR THE REST";:
     NORMAL
4320  GET Z$: IF Z$ <  > " " THEN
     4320
4330  HOME : RETURN
4340  TEXT : HOME
4350  PRINT : PRINT  SPC( 5);: INVERSE

     : PRINT " MASTER CATALOGUE F
     ILE READER ": NORMAL
4360  VTAB 5: HTAB 2: PRINT "IS D
     ATE REQUIRED ?(Y/N)"
4370  GET Z$: IF Z$ = "N" THEN MT
     $ = "":YN$ = "": GOTO 4430
4380  IF Z$ <  > "Y" THEN 4370
4390  VTAB 5: HTAB 2: PRINT "ENTE
     R MONTH AS WORD       ": INPUT
     MT$
4400  IF MT$ = "" THEN 4390
4410  VTAB 7: HTAB 2: PRINT "ENTE
     R YEAR (EG. 1982)": INPUT YN
     $
4420  IF YN$ = "" THEN 4410
4430  PRINT : PRINT "TYPE IN A HE
     ADING THEN PRESS RETURN"
4440  INPUT CH$
4450  IF CH$ = "" THEN CH$ = "MAS
     TER CATALOGUE"
4460 CH$ = CH$ + "   " + MT$ + "
     " + YN$
4470  TEXT : HOME : PRINT : PRINT
     "ENTER NAME OF FILE TO BE RE
     AD": INPUT FI$
4480  IF FI$ = "" THEN 4470
4485 JW = 0
4490  TEXT : HOME : FLASH : PRINT
     : PRINT " READING ";FI$;" "
4500  NORMAL : RETURN
4510  PRINT : PRINT "READ ANOTHER
     FILE ? (Y/N)"
4520  GET Z$: IF Z$ = "N" THEN  RUN

4530  IF Z$ <  > "Y" THEN 4520
4540  CLEAR : GOTO 4000
9900  REM *** ERROR MESSAGES ***
9902  TEXT : HOME : PRINT  CHR$ (
     7) CHR$ (7)
9905 ER =  PEEK (222)
9910  IF ER = 255 THEN  POKE 216,
     0: TEXT : HOME : PRINT  CHR$
     (7)"YOU PRESSED CTRL-C": PRINT
     : PRINT : PRINT "'BYE FOR NO
     W": END
9915  IF ER = 4 THEN 11100
9917  IF ER = 5 THEN 11150
9920  IF ER = 6 THEN 11200
9925  IF ER = 8 THEN 11300
9930  IF ER = 9 THEN 11400
9935  IF ER = 10 THEN 11500
9940  IF ER = 11 OR ER = 16 THEN
     11600
9942  IF ER = 13 THEN 11700
9945  POKE - 16303,0: PRINT  CHR$
     (7) CHR$ (7): PRINT "ERROR N
     O....."; PEEK (222): PRINT "G
     ET HELP OR TYPE RUN TO TRY A
     GAIN.": END
10000  VTAB 23: HTAB 10: INVERSE
     : PRINT " PRESS SPACE BAR TO
     GO ON "
10005  NORMAL
10010 Z =  PEEK ( - 16384) - 128
10020  IF Z = 32 THEN  POKE  - 16
     368,0: RETURN
10030  GOTO 10010
11000  REM ***** ERROR HANDLING R
     OUTINES ***
11100  PRINT : PRINT "YOU CANNOT
     RECORD ON THIS DISK' IT IS"
11110  PRINT "WRITE PROTECTED. RE
     'MOVE THE TAPE ON THE"
11120  PRINT "RIGHT HAND SIDE OF
     THE DISK THEN TRY"
11130  PRINT "AGAIN."
11140  GOTO 13000
11150  PRINT : PRINT "THAT FILE D
     IDN'T EXIST ON THIS DISK,OR"
     : PRINT "ELSE IT DIDN'T HAVE
     ANY INFORMATION IN"
11155  PRINT "IT.": PRINT : PRINT
     "TRY AGAIN.": GOTO 14000
11200  PRINT : PRINT "THERE'S NO
     FILE/PROGRAM/PICTURE/DISPLAY
     "
11210  PRINT "OF THAT NAME ON THI
     S DISK. EITHER CHECK"
11220  PRINT "YOUR SPELLING OR TR
     Y ANOTHER DISK."
11230  GOTO 13000
11300  PRINT : PRINT "THERE'S AN
     INPUT/OUTPUT ERROR (I/O):"
11310  PRINT "THE COMMON CAUSES O
     F THIS ARE:-": PRINT "NO DIS
     K IN THE DRIVE"
11320  PRINT "DOOR OF THE DRIVE U
     NIT NOT CLOSED"
11330  PRINT "DISK NOT BEEN INITI
     ALISED"
11340  PRINT "USING A 13 SECTOR D
     ISK (USE 'MUFFIN'"
11350  PRINT "FROM THE APPLE MAST
     ER DISK TO CORRECT)
11355  PRINT : PRINT "SORT OUT TH
     E PROBLEM AND THEN CONTINUE.
11360  IF JW = 1 THEN JW = 0: GOTO
      13000
11365  GOTO 14000
11400  PRINT : PRINT "THERE IS NO
     T ENOUGH ROOM ON THE DISK"
11410  PRINT "TO SAVE THE CATALOG
     UE. FIND A DISK WITH"
11420  PRINT "ENOUGH FREE SECTORS
     ON IT CALCULATED BY ABOUT"
11430  PRINT "1/8TH OF THE NUMBER
     OF FILES SORTED."
11440  PRINT : PRINT "AT SOME STA
     GE DELETE THE FILE YOU JUST"

11450  PRINT "TRIED TO SAVE FROM
     THE FULL DISK SO AS"
11455  PRINT "TO AVOID COMPLICATI
     ONS ON THAT DISK."
11457  GOTO 13000
11500  PRINT : PRINT "THERE IS AL
     READY A FILE/PROGRAM/DISPLAY
     "
11510  PRINT "BY THAT NAME ON THI
     S DISK AND IT IS"
11520  PRINT "LOCKED. EITHER RENA
     ME YOUR FILE OR"
11530  PRINT "UNLOCK THE FILE AND
      TRY ANOTHER RUN."
11540  PRINT : PRINT "RENAME OR U
     NLOCK ?(R/U)    ";
11545  GET Z$
11550  IF Z$ = "R" THEN 13000
11560  IF Z$ <  > "U" THEN 11545
11565  PRINT : PRINT  CHR$ (4);"U
     NLOCK";FI$
11570  PRINT : PRINT FI$;" IS NOW
     UNLOCKED.": GOTO 13000
11600  PRINT : PRINT "THERE HAS B
     EEN A SPELLING MISTAKE AT"
11610  PRINT "LINE NUMBER "; PEEK
     (218) +  PEEK (219) * 256
11620  PRINT : PRINT : PRINT "CHE
     CK THEN RUN PROGRAM AGAIN": END

11700  PRINT : PRINT "THAT FILE I
     S ON THE DISK BUT IT IS"
11710  PRINT "EITHER A BINARY FIL
     E OR AN APPLESOFT"
11720  PRINT "PROGRAM. YOUR FILE
     SHOULD BE A TEXT FILE."
11730  IF JW = 1 THEN 11750
11740  GOTO 14000
11750  PRINT "RENAME YOUR FILE AF
     TER PRESSING SPACE.": GOTO 1
     3000
12000  TEXT : HOME
12010  PRINT : PRINT  CHR$ (4)"CA
     TALOG"
12011  PRINT : PRINT
12012  GOSUB 10000
12020  RETURN
13000  GOSUB 10000: TEXT : HOME
13010  IF EF <  > 1 THEN  GOSUB 2
     100: GOTO 1300
13020  GOSUB 2100: GOTO 1455
14000  GOSUB 10000: RUN
```

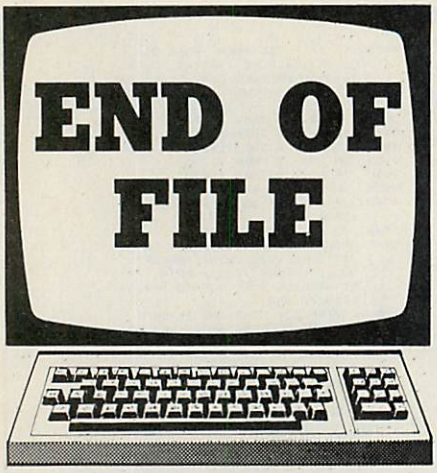

DRAGON 32

High-resolution dump

A SHORT Basic and machine-code routine which allows high-resolution screen data to be dumped to a printer, comes from R A Shackleford of Hamilton, Strathclyde.

BASIC ROUTINE

Area under curve

THE PROGRAM by R Glynn Owens for calculating the area under a normal curve is one that is very useful and can be generalised to provide integration under other curves, writes M J Campbell of Southampton. This program is more specialised but gives a similar accuracy and is very much faster. Of course, whether you wait for 0.5 seconds or five seconds for the answer matters little if you are only running the program once, but if it forms part of a larger program — a simulation for example — where it may be run hundreds of times, the time element becomes important. The algorithm is based on one given by R A Lew in the journal *Applied Statistics,* (1981) **22**, page 209.

If H(x) is the area between x and infinity and $h(t) = (2\pi)^{-\frac{1}{2}} \exp(-t^2/2)$, then H(x) is approximated by

$$0.5 - (2\pi)^{-\frac{1}{2}}(x - x^3/7)$$

for $0 \leqq x \leqq 1$, and by

$$(1 + x)h(x)/(1 + x + x^2)$$

for $x > 1$.

The area between two points a and b, $a < b$ is given by H(a) − H(b). The layout is the same as that of Owens, except that 2π is calculated as 8* ATN(1). A further increase in speed would be obtained by putting $(2\pi)^{\frac{1}{2}}$ as 2.5066283.

BASIC ROUTINE

Recursive anagram

AN EXAMPLE of a problem which, in its general form, can only be solved by using a recursive procedure comes from A M Treder of Hounslow, Middlesex. The resulting program has quite powerful applications in many problems.

The program inputs a string and prints out all the possible permutations of the characters. If the string is entered with its characters in alphabetical or numerical order then the resulting permutations will also be printed in order.

Lines 100 to 140 set up the initial variables and counters. A$(X) stores the string available at a given depth of the recursion; LE(X) stores the length of that string; CO(X) stores the count which that level as reached; and R$(X) stores the character which has been chosen from the available string during this count at this level of recursion.

Line 150 is the main program and line 200 delimits the recursive process. Line 210 increments the counter for this level. Lines 220 to 240 select and remove a character from the available string before storing that as the available string for the next level.


Line 250 stores the current counter, adjusts X for the next recursive step and proceeds to it. Line 260 is only reached after

High resolution dump.

```
1900 'BASIC SUBROUTINE AND DISASSEMBLED M/C CODE ROUTINE TO ALLOW SCREEN
1910 'DUMPING OF DRAGON 32 HIGH RESOLUTION GRAPHICS TO A TANDY LP VII.
1920 'FULL SCREEN TRANSFER TAKES ABOUT FIVE MINUTES"
1930 '
1940 '  BY   R A SHACKLEFORD
1950 '       7 CEDAR CRESCENT
1960 '       HAMILTON
1970 '       ML3 7LW
1980 '       5/NOV/1982
1990 '
2000 PRINT#-2,CHR$(18)
2010 FORI=0TO26
2020 FORJ=0TO31
2030 X=1536+224*I+J
2040 XH=INT(X/256):XL=X-256*XH
2050 POKE&H6F12,XH:POKE&H6F13,XL
2060 Z=USR0(Z)
2070 FORK=0TO7
2080 PRINT#-2,CHR$(PEEK(&H6F08+K));
2090 NEXTK,J:PRINT#-2,CHR$(13);:NEXTI:PRINT#-2,CHR$(30):RETURN
```

```
6F10   10 8E 1C DF     LDY    #1CDF
6F14   8E 6F 00        LDX    #6F00
6F17   C6 07           LDB    #07
6F19   A6 20           LDA     0,Y
6F1B   31 A8 20        LEAY   $20,Y
6F1E   A7 80           STA    ,X+
6F20   5A              DECB
6F21   26 F6           BNE    6F19
6F23   86 08           LDA    #08
6F25   10 8E 6F 08     LDY    #6F08
6F29   8E 6F 00        LDX    #6F00
6F2C   1C FE           ANDCC  #FE
6F2E   C6 07           LDB    #07
6F30   69 80           ROL    ,X+
6F32   66 20           ROR     0,Y
6F34   5A              DECB
6F35   26 F9           BNE    6F30
6F37   1A 01           ORCC   #01
6F39   66 A0           ROR    ,Y+
6F3B   4A              DECA
6F3C   26 EB           BNE    6F29
6F3E   39              RTS
```

```
30 'SAMPLE PROGRAM SHOWING OUTPUT TO PRINTER
40 '
50 DEF USR0= &H6F10
60 CLEAR200,25000
100 PMODE4,1:PCLS:SCREEN1,1
110 FORL=10 TO 90 STEP5
115 CIRCLE(128,96),L:NEXTL
120 GOSUB2000:END
```

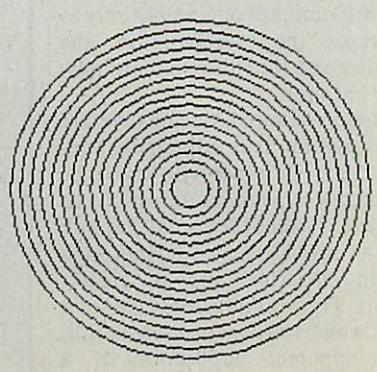

a Return from line 330. Line 270 checks the counter and readjusts it if the end of the string has been reached, in which case it returns to the next higher level. Otherwise line 280 takes the program to where it chooses the next available character.

Lines 290 to 330 simply concatenate the chosen characters and print the resulting permutation. Line 330 then returns to line 260 to choose the next available character.

I have found that Clear 100 is sufficient space for a string of 10 characters. Obviously more can be cleared for longer strings. The program can be immediately rewritten into single-statement lines with the exception of line 270 which would require an extra If statement to return.

As an example of a non-crossword application consider line 320 replaced by Gosub 400 and include

400 for I = 1 to Y-1
410 X$ = LEFT$(R$,I): Y$ = RIGHT$(R$,Y-1)
420 X = VAL(X$): Y = VAL(Y$)
430 NEXT I
440 RETURN

The input to A$ must now be a purely numeric one. The program now yields in X and Y all possible pairs of numbers that can be formed by using all the digits given once and only once.

UK 101

Save/Load routine

THE PROGRAM by N V Davies of Haverfordwest, Dyfed, enables named Basic programs complete with all variables to be saved on cassette and then searched for and reloaded with auto-run. The program makes use of the 6850 ACIA's ability to generate a parity bit during the save operation and then check this bit during load to test for loading errors.

The program is located to suit an 8K machine and should be loaded from $1EDO to $1FFF. Basic's Memory Size should be answered by 7888 to give 7,119 bytes free. For machines with more than 8K of RAM the program may be relocated to the top of available RAM and Memory Size answered appropriately to protect the machine-code program.

The Pokes will then have to be changed to

(continued on next page)

Area under curve.

```
100 PRINT CHR$(147)
200 PRINT"THIS PROGRAM CALCULATES THE AREA UNDER THE NORMAL CURVE BETWEEN "
300 PRINT"ANY TWO X COORDINATES, USING AN APPROXIMATION DUE TO LEW "
400 PRINT"PLEASE GIVE YOUR TWO X COORDINATES NOW,TYPING RETURN AFTER EACH ONE"
500 INPUT"X(1)";A:INPUT"X(2)";B:
600 X=A
700 GOSUB 10000
800 R=P: X=B
900 GOSUB 10000
950 AR=INT(1000*(R-P))/1000
1000 PRINT CHR$(135),"THE AREA ENCLOSED IS ";AR " OF THE TOTAL"
1100 STOP
10000 TP=8*ATN(1):C=SQR(TP)
10050 Y=ABS(X)
10100 IFY<=1 GOTO20000
10200 P=(1+Y)*EXP(-Y*Y/2)/(C*(1+Y+Y*Y))
10250 GOTO 20100
20000 P=0.5-(Y-Y*Y*Y/7)/C
20100 IF X<0 THENP=1-P
20200 RETURN
READY.
```

Save/Load routine.

```
                ;UK101 PARITY CHECK BASIC SA VE/LOAD
                ;N.V.DAVIES SEPT. 1981
                ES=$A187
                ESH=ES/256
                ESM=ESH*256
                ESL=ES-ESM
                ADDR=$00F0
                SAVEF=$0205
                LOADF=$0203
1EDO            *=$1EDO
1EDO 20A51F     ENTSVE JSR INITP INIT ACIA EVEN PARITY
1ED3 20F7FF            JSR $FFF7 SET SAVE FLAG
1ED6 206CAB            JSR $AB6C OUTPUT CR/LF
1ED9 20BC00     LSTNME JSR $BC   GET NAME
1EDC F024              BEQ SNERR
1EDE 20EEFF            JSR $FFEE AND OUTPUT TO CASS.
1EE1 C95D              CMP #$5D  CHECK FOR END
1EE3 D0F4              BNE LSTNME MORE
1EE5 206CAB            JSR $AB6C OUTPUT CR/LF
1EE8 20051F            JSR LSTART SET UP PROG START-VAR END
1EEB 202F1F            JSR SAVE SAVE POINTERS, PROG & VARIABLES
1EEE 201A1F            JSR LSTR SET UP STRING START-MEM END
1EF1 A000              LDY #0
1EF3 203A1F            JSR SAVE2 SAVE STRINGS
1EF6 206CAB            JSR $AB6C OUTPUT CR/LF
1EF9 8C0502            STY SAVEF CLEAR SAVE FLAG
1EFC 20E91F     RESET  JSR INITN RESET ACIA
1EFF 4CBC00            JMP $00BC INCR MEM SCAN PTR & RTS TO BASIC
1F02 4C0CAC     SNERR  JMP $AC0C SN ERROR
1F05 A47A       LSTART LDY $7A
1F07 A679              LDX $79
1F09 D001              BNE LS2
1F0B 88                DEY
1F0C CA         LS2    DEX
1F0D 86F0              STX ADDR
1F0F 84F1              STY ADDR+1
1F11 A57F              LDA $7F
1F13 A480              LDY $80
1F15 85F2              STA ADDR+2
1F17 84F3              STY ADDR+3
1F19 60                RTS
1F1A A482       LSTR   LDY $82
1F1C A581              LDA $81
1F1E 85F0              STA ADDR
1F20 84F1              STY ADDR+1
1F22 A486              LDY $86
```

(listing continued on next page)

Recursive anagram.

```
10 REM*************************************
20 REM Recursive Anagram Routine  *
30 REM*************************************
40 REM
50 REM A. M. TREDER
60 REM
70 REM
100 CLEAR 100: PRINT CHR$(12)
110 INPUT A$: X=LEN(A$): Y=X
120 DIM A$(X),LE(X),CO(X),R$(X)
130 A$(X)=A$
140 FORI=1 TO X: LE(I)=I: NEXT I
150 GOSUB 200: END
160 REM
170 REM
180 REM Recursive Subroutine
190 REM
200 IF X=0 THEN 290
210 A=CO(X)+1
220 A$(X-1)=LEFT$(A$(X),A-1)
230 A$(X-1)=A$(X-1)+RIGHT$(A$(X),LE(X)-A)
240 R$(X)=MID$(A$(X),A,1)
250 CO(X)=A: X=X-1: GOSUB 200
260 X=X+1: A=CO(X)
270 IF A=LE(X) THEN CO(X)=0: RETURN
280 GOTO 210
290 R$="": FOR I=Y TO 1 STEP -1
300 R$=R$+R$(I)
310 NEXT I
320 PRINT R$
330 RETURN
```

(continued from previous page)

suit the new program location. When loaded at the location shown the entry point for the Save routine is at $1EDO, 7888 decimal, and the Load routine is at $1F45, 8019 decimal.

To save a Basic program start the cassette and enter:

```
POKE11,208:POKE12:30:X = USR(X):[NAM-
E]
```

Name may be any number of characters which will fit the Basic line but must be enclosed in square brackets. To search cassette and load program enter:

```
POKE11,69:POKE12,31:X = USR(X):[NAME]
```

The cassette should then be started, and when Name is located this will be displayed. The program which follows is then loaded and run. If a parity error is detected, the word Error will be displayed. The cassette should then be rewound past the start of the program and a further attempt made at loading.

The first line of all programs must be arranged so that any following lines which dimension arrays or perform any other functions which would destroy the data loaded are skipped. Basic programs are saved in the form: Program "Name", Basic's memory and variable-table pointers from $0079 to $0086, contents of program and variable table RAM, contents of string-store RAM. Reloading is simply a reverse of this procedure.

Because the program is saved as a memory dump rather than lines of text, and is not displayed on the screen, no nulls are required and saving and reloading take less than half the time of the normal List-type Save. The speed at which programs may be saved is limited only by the cassette interface and recorder. With a high-speed interface and high-quality recorder, speeds up to 9,600 baud are possible.

No monitor subroutines, except those called via the indirect vectors, are used so the program should run with all monitors.

DRAGON 32

Simon

THIS PROGRAM by D Hojoff of Stanmore, Middlesex runs on a Dragon 32 home computer with standard 32K RAM. It uses 1.7K of memory. Four boxes are displayed on the screen and numbered 1 to 4. After a brief musical interlude a musical note is given, and at the same time one of the boxes flashes. You have to copy the sequence by pressing the keys 1 to 4 corresponding to the boxes that have flashed.

The sequence gradually becomes longer until a mistake is made, and a raspberry is emitted. You are given a grading at the end according to your ability.

You can continue by either trying the same sequence again, or attempting a new sequence. if you take too long to type your response you also get a raspberry. The sequence goes to a maximum of 32 characters.

(continued on page 178)

(listing continued from previous page)

```
 470 1F24 A685           LDX $85
 480 1F26 D001           BNE LSTR1
 490 1F28 88             DEY
 500 1F29 CA       LSTR1 DEX
 510 1F2A 84F3           STY ADDR+3
 520 1F2C 86F2           STX ADDR+2
 530 1F2E 60             RTS
 540 1F2F A00E     SAVE  LDY #$0E SAVE BASIC'S POINTERS
 550 1F31 B97B00   LP1   LDA $78,Y
 560 1F34 20F41F         JSR CASOUT
 570 1F37 88             DEY
 580 1F38 D0F7           BNE LP1
 590 1F3A B1F0     SAVE2 LDA (ADDR),Y
 600 1F3C 20F41F         JSR CASOUT
 670 1F3F 20D41F         JSR INCAD
 680 1F42 90F6           BCC SAVE2
 690 1F44 60       BTB   RTS
 700 1F45 20A51F   ENTLD JSR INITP INIT ACIA EVEN PARITY
 710 1F4B 20F4FF         JSR $FFF4 SET LOAD FLAG
 720 1F4B 20BC00         JSR $BC
 730 1F4E C95B           CMP #$5B
 740 1F50 D0B0           BNE SNERR SN ERROR IF NO [
 750 1F52 A0FF     LOALP LDY #$FF
 760 1F54 C8       LOALP1 INY
 770 1F55 AD0302         LDA $0203
 780 1F5B F0EA           BEQ BTB ABORT IF L.F. CLEAR
 790 1F5A 20EBFF         JSR $FFEB GET INPUT
 800 1F5D D1C3           CMP ($C3),Y CMP WITH [NAME]
 810 1F5F D0F1           BNE LOALP NOT NAME-TRY AGAIN
 820 1F61 20EEFF         JSR $FFEE DISPLAY TO VDU
 830 1F64 C95D           CMP #$5D END OF NAME?
 840 1F66 D0EC           BNE LOALP1 NO-GET NEXT LETTER
 850 1F6B A00E     RFLD1 LDY #$0E
 860 1F6A 20B01F   LOAD1 JSR GETCAS
 880 1F6D C90A           CMP #$0A  END OF NULLS
 890 1F6F D0F9           BNE LOAD1 SKIP NULLS
 900 1F71 20B01F   LOADA JSR GETCAS GET BASIC'S POINTERS
 910 1F74 997B00         STA $78,Y  AND RE-LOAD
 920 1F77 88             DEY
 930 1F78 D0F7           BNE LOADA
 940 1F7A 20051F         JSR LSTART
 950 1F7D 20981F         JSR LOAD2   LOAD PROG & VARIABLES
 960 1F80 201A1F         JSR LSTR
 970 1F83 20981F         JSR LOAD2  LOAD STRINGS
 980 1F86 8C0302         STY LOADF  CLEAR LOAD FLAG
 990 1F89 20FC1E   RFLD  JSR RESET  RESET ACIA
1000 1F8C 20A7A4         JSR $A4A7  SET MEM SCAN TO PROG START
1010 1F8F A9A5           LDA #$A5
1020 1F91 48             PHA
1030 1F92 A9C1           LDA #$C1
1040 1F94 48             PHA
1050 1F95 4C8EA4         JMP $A48E   RUN BUT NO POINTER RESET
1060 1F98 A000    LOAD2  LDY #0
1070 1F9A 20B01F  LOAD3  JSR GETCAS
1080 1F9D 91F0           STA (ADDR),Y
1090 1F9F 20D41F         JSR INCAD
1100 1FA2 90F6           BCC LOAD3
1110 1FA4 60             RTS
1120 1FA5 A903    INITP  LDA #$3 SET ACIA EVEN PARITY
1130 1FA7 8D00F0         STA $F000
1140 1FAA A919           LDA #$19
1150 1FAC 8D00F0         STA $F000
1160 1FAF 60             RTS
1170 1FB0 AD00F0  GETCAS LDA $F000
1180 1FB3 4A             LSR A
1190 1FB4 90FA           BCC GETCAS
1200 1FB6 AD00F0         LDA $F000
1210 1FB9 2940           AND #$40 CHECK PARITY BIT
1220 1FBB D004           BNE ERR  ERROR IF SET
1230 1FBD AD01F0         LDA $F001
1240 1FC0 60             RTS
1250 1FC1 206CAB  ERR    JSR $AB6C DISPLAY CR/LF ERROR CR/LF
1260 1FC4 A987           LDA #ESL
1270 1FC6 A0A1           LDY #ESH
1280 1FC8 20C3AB         JSR $ABC3
1290 1FCB 206CAB         JSR $AB6C
1300 1FCE A2FE           LDX #$FE RESET STACK POINTER
1310 1FD0 9A             TXS
1320 1FD1 4C521F         JMP LOALP JMP TO REPEAT SEARCH FOR NAME
1330 1FD4 A5F1    INCAD  LDA ADDR+1 RETURN CARRY SET IF DONE
1340 1FD6 C5F3           CMP ADDR+3 OTHERWISE INCR. POINTERS
1350 1FD8 9008           BCC INCAD1
1360 1FDA D00C           BNE RINCAD
1370 1FDC A5F0           LDA ADDR
1380 1FDE C5F2           CMP ADDR+2
1390 1FE0 B006           BCS RINCAD
1400 1FE2 E6F0    INCAD1 INC ADDR
1410 1FE4 D002           BNE RINCAD
1420 1FE6 E6F1           INC ADDR+1
1430 1FE8 60      RINCAD RTS
1440 1FE9 A903    INITN  LDA #$3 RESET ACIA TO NORMAL
1450 1FEB 8D00F0         STA $F000
1460 1FEE A911           LDA #$11
1470 1FF0 8D00F0         STA $F000
1480 1FF3 60             RTS
1490 1FF4 AA      CASOUT TAX
1500 1FF5 AD00F0  CASLP  LDA $F000
1510 1FFB 4A             LSR A
1520 1FF9 4A             LSR A
1530 1FFA 90F9           BCC CASLP
1550 1FFC 8E01F0         STX $F001
1560 1FFF 60             RTS
```

Whatever your system



I promise to tell the truth the whole truth and nothing but the truth time, after time, after time....

DYSAN diskettes, acknowledged to be the industry leader in quality and data integrity, tested on and between the tracks to be 100% error free. When you commit your business to magnetic media, commit to DYSAN and judge the difference for yourself.

- DISC PACKS AND CARTRIDGES ALSO AVAILABLE
- TECHNICAL SUPPORT FROM HAL'S ENGINEERING TEAM
- QUANTITY DISCOUNTS
- FOUR HOUR ORDER TURNROUND
- EX STOCK AVAILABILITY

Ring the Dysan hot line now on Farnborough 517171 or complete the coupon.

Please tell me more about the range of Dysan Media for my system.

Name _____

Address _____

_____

Telephone No. _____

Computer System _____

HAL Computers Limited
Invincible Road, Farnborough
Hants. GU14 7QU
Telephone (0252) 517171

HAL

● Circle No. 192

(continued from page 176)

Simon.

```
10 PLAY"O3T4L4GE,L2G,L4GE,L2G,L4AGFEDEF,L8EF,L4GC:L8CC:L4C,L3CDEF,L2G,L4GDDFED,L2C,L4,"
20 CLS:C$=""
30 PRINT@137,CHR$(49);
40 PRINT@150,CHR$(50);
50 PRINT@361,CHR$(51);
60 PRINT@374,CHR$(52);
70 G$=CHR$(143+48)+CHR$(143+48)+CHR$(143+48)
80 PRINT@104,G$;
90 PRINT@168,G$;
100 PRINT@136,CHR$(143+48);
110 PRINT@138,CHR$(143+48);
120 G$=CHR$(143+32)+CHR$(143+32)+CHR$(143+32)
130 PRINT@117,G$;
140 PRINT@149,CHR$(143+32);
150 PRINT@151,CHR$(143+32);
160 PRINT@181,G$;
170 G$=CHR$(143+16)+CHR$(143+16)+CHR$(143+16)
180 PRINT@328,G$;
190 PRINT@360,CHR$(143+16);
200 PRINT@362,CHR$(143+16);
210 PRINT@392,G$;
220 G$=CHR$(143+64)+CHR$(143+64)+CHR$(143+64)
230 PRINT@341,G$;
240 PRINT@373,CHR$(143+64);
250 PRINT@375,CHR$(143+64);
260 PRINT@405,G$;
270 FORI=1TO32:PRINT@223+I,CHR$(141);:PRINT@255+I,CHR$(139);:NEXTI
280 FORI=0TO15:PRINT@15+32*I,CHR$(139),:PRINT@16+32*I,CHR$(141);:NEXTI
290 PRINT@239,CHR$(137);:PRINT@272,CHR$(137);
300 IFC$="S"THENE=0:GOTO370
310 A$="":E=0
320 FORI=1TO32
330 B$=STR$(RND(4))
340 B$=RIGHT$(B$,1)
350 A$=A$+B$
360 NEXTI
370 FORN=1TO32
380 FORI=1TON
390 GOSUB480
400 NEXTI
410 FORI=1TON
420 GOSUB540
430 NEXTI
440 FORA=1TO1000:NEXTA
450 IFE=1THENN=32
460 NEXTN
470 GOTO610
480 B$=MID$(A$,I,1)
490 IFB$="1"THENPRINT@137,CHR$(143+48);:PLAY"C":PRINT@137,CHR$(49);:GOTO530
500 IFB$="2"THENPRINT@150,CHR$(143+32);:PLAY"E":PRINT@150,CHR$(50);:GOTO530
510 IFB$="3"THENPRINT@361,CHR$(143+16);:PLAY"G":PRINT@361,CHR$(51);:GOTO530
520 IFB$="4"THENPRINT@374,CHR$(143+64);:PLAY"B":PRINT@374,CHR$(52);
530 RETURN
540 TIMER=0
550 B$=INKEY$:IFTIMER>200THEN580
560 IFB$=""THEN550
570 IFB$=MID$(A$,I,1)THEN590
580 E=1:I=N:FORA=1TO32:SOUND85,1:NEXTA:GOTO600
590 GOSUB490
600 RETURN
610 IFI<9THENPRINT@448,"BEGINNER";:GOTO650
620 IFI<23THENPRINT@448,"AMATEUR";:GOTO650
630 IFI<32THENPRINT@448,"EXPERI";:GOTO650
640 IFI=32THENPRINT@448,"CHAMP";
650 PRINT@480,"DO YOU WANT TO CONTINUE (Y/N)?";
660 C$=INKEY$:IFC$=""THEN660
670 CLS
680 IFC$="N"THENEND
690 PRINT@32,"SAME SEQUENCE AGAIN = S"
700 PRINT@64,"PRINT THE LAST SEQUENCE = P"
710 PRINT@96,"TRY A NEW SEQUENCE = T"
720 C$=INKEY$:IFC$=""THEN720
730 IFC$="S"THENCLS:GOTO30
740 IFC$="P"THENCLS:PRINTLEFT$(A$,I-1):GOTO650
750 IFC$="T"THEN20
760 GOTO690
```

WINCHESTER KILLER - £750

The incredible Scorpio 6.2 Mbyte hard disk alternative from HAL Computers annihilates small capacity Winchesters.





DISTINGUISHING CHARACTERISTICS

Hard disk capacity and speed with the capability of interchangeable media. Scorpio 8 eliminates the worries of head crashes, drive alignments, lost data or backup, with a new application of field proven floppy technology.

Fully Apple II compatible – DOS 3.3, Pascal 1.1 and CP/M. Uses all standard Apple DOS commands – appears to Apple as a massive 8 inch floppy.

HOW SCORPIO 8 IS KILLING THE SMALL WINCHESTER

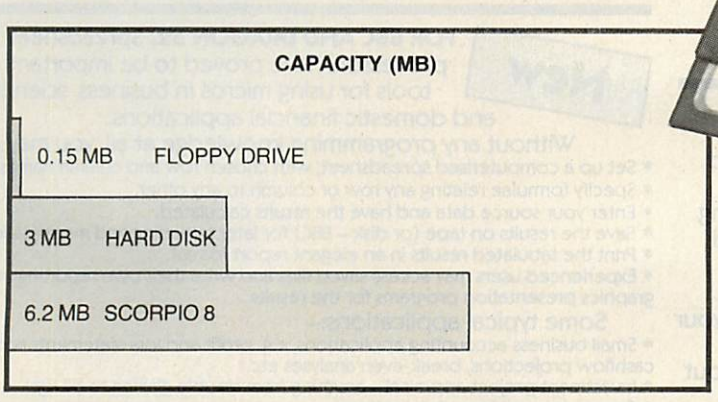

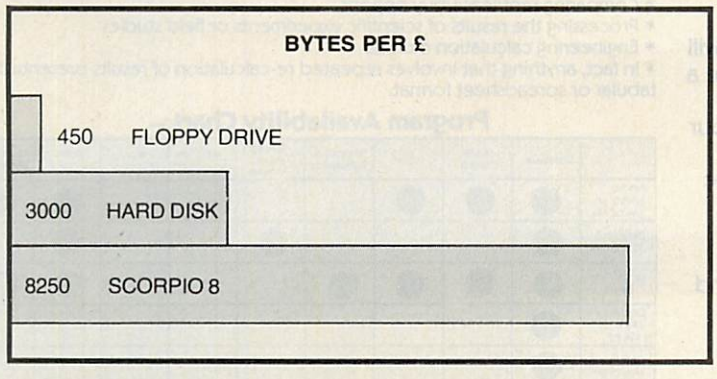

REWARDS

- Winchester capacities on floppy disks.
- Removeable media – a cartridge pack of five 5.25 inch diskettes each of 1.2 Mb capacity.
- High speed DMA data transfer.
- Cost effective and software compatible disk memory expansion.
- Removeable media means separate packs can be kept for different applications.
- All this for £750, complete with power supply, interface, cables and software.

To claim your rewards contact us at the address shown below.

HAL

HAL Computers Limited
Invincible Road, Farnborough
Hants. GU14 7QU
Telephone (0252) 517175
Telesales (0252) 517171

● Circle No. 193

GEMIN

PERFORMAN

It can do a powerful job for y

Here's a range of software for the independent businessman that's designed to harness the power of your micro to deliver the vital information you need in all key areas of your business. A breakthrough on both price and performance, each program is fully tested and comes with all the documentation back up you need.

"Gemini's range of software is in the vanguard of the releases for 'serious' micro users . . ."
(Which Micro and Software Review)

SPECIAL LIMITED OFFER

Buy just any two programs at £19.95 and take one at £19.95 FREE!



CASH BOOK ACCOUNTS PROGRAM FOR BBC MICRO . . .£95.00

New

One of the most innovative business programs on the market. Most serious accountancy packages are written and coded by professional and competent programmers. The Gemini Cashbook Accounting program was written by practising Chartered Accountants and coded by professional and competent programmers. This is a fundamental difference.

This practical program is simple to use and will replace your manual cash and bank records and by giving you instant management information, it may even put your accountant out of job!

With exceptionally exhaustive user documentation, full technical back up and product update policy this program will increase the efficiency and profitability of your business. Take a look at the information this program will provide.

* summary of VAT information to enable you to complete your VAT returns
* cumulative receipts and payments report analysed over the standard profit and loss and balance sheet heading.
* option for departmental analysis of sales and purchases
* print out of all transactions
* journal routine for entering transfers between accounts and year end adjustment for debtors, creditors etc.
* year end trial balance
* profit and loss account and balance sheet.

These statements can be produced at what ever interval you require e.g. monthly, quarterly or annually.

Coming soon:– Integrated Sales + Purchase Ledgers

". . . the systems worked immaculately when tested . . ."
"Mailist is a very professional piece of software . . ."
(Which Micro & Software Review Feb 83)



SPREADSHEET ANALYSIS
BEEBCALC £19.95
DRAGONCALC £19.95

New

FOR BBC AND DRAGON 32. Spreadsheet processors have proved to be important tools for using micros in business, scientific and domestic financial applications.

Without any programming knowledge at all, you may:–

* Set up a computerised spreadsheet, with chosen row and column names.
* Specify formulae relating any row or column to any other.
* Enter your source data and have the results calculated.
* Save the results on tape (or disk – BBC) for later reloading and manipulation.
* Print the tabulated results in an elegant report format.
* Experienced users may access saved files and write their own reporting or graphics presentation programs for the results.

Some typical applications:–

* Small business accounting applications, e.g. profit and loss statements and cashflow projections, break-even analyses etc.
* Investment project appraisal – anything from double glazing to oil rigs!
* Comparing rent/lease/buy options
* Processing the results of scientific experiments or field studies
* Engineering calculation models
* In fact, anything that involves repeated re-calculation of results presented in tabular or spreadsheet format.

Program Availability Chart:–

	Database	Stock Control	Mailist	Invoices & Statements	Spread sheet Analysis	Cashbook Accounting	Word processor	Home Accounts	Commercial Accounts
Sinclair Spectrum 16k or 48k	●	●	●					●	●
Dragon 32k or 64k	●				●			●	
VIC20 (16k+)	●	●	●	●				●	●
Sinclair ZX81 (16k+)	●								
Grundy Newbrain	●								
Texas TI99/4A	●								
Atari 400/800 or Osborne	●								
Sharp MZ80A	●	●	●	●				●	●
Sharp MZ80K	●	●	●	●				●	●
Sharp MZ80B	●	●	●	●				●	●
BBC micro model A or B 32K	●	●	●	●	●	●	●	●	●

'S NEW
SOFTWARE
r business at petty cash prices.



INVOICES AND STATEMENTS . . . £19.95
Compatible with most micros. See table. Ideal for the small business. A complete suite of programs together with generated customer file for producing crisp and efficient business invoices and monthly statements on your line printer. All calculations include VAT automatically, and the program allows your own messages on the form produced. This program gives you superb presentation and saves time on one of the most tedious tasks in the office.



COMMERCIAL ACCOUNTS . . . £19.95
Compatible with most micros. See table. A gem of a program, all for cassette, with the following features:– Daily Journal. Credit Sales. Cash Sales. Credit Purchases. Purchases – other. Sales Ledger. Purchase Ledger. Bank Account. Year to date summary. A fully interactive program suitable for all businesses. Files can be saved and loaded and totals from one file carried forward to another on cassette. Particularly useful from a cash flow point of view, with an immediate accessibility to totals for debtors and creditors. Bank totally supported with entries for cheque numbers, credits and, of course, running balance.



MAILING LIST . . . £19.95
Compatible with most micros. See table. A superb dedicated database to allow for manipulations of names and addresses and other data. Gemini's unique 'searchkey' system gives you a further ten 'user-defined parameters' to make your own selections. Features include the facility to find a name or detail when only part of the detail is known, it will print labels in a variety of user specified formats.



DATABASE . . . £19.95
Compatible with most micros. See table. The program that everyone needs, the most valuable and versatile in your collection. Facilities include sort search, list print if required. Can be used in place of any card index application; once purchased you can write your own dedicated database to suit your particular needs with a limitless number of entries on separate cassettes.



STOCK CONTROL . . . £19.95
Compatible with most micros. See table. Dedicated software with all that's necessary to keep control of stock. This program will take the tedium out of stock control and save time and money. Routines include stock set up, user reference number, minimum stock level, financial summary, line print records, quick stock summary, add stock, delete/change record and more.



HOME ACCOUNTS . . . £19.95
Compatible with most micros. See table. Runs a complete home finance package for you with every facility necessary for keeping a track of regular and other expenses, bank account mortgage, H.P. etc. This program also allows you to plot graphically by Listograms your monthly outgoings.



WORD PROCESSOR . . . £19.95
Compatible with most micros. See table. This program features routines found in much larger and more expensive packages with a typical word length of 5-6 letters it allows for around 1000 words in memory at one time. Ideal for the user who requires a simple program to write letters on his computer. Features include, block delete, block insert, search and replace, edit text, display text and more.

Dealer/Trade enquiries invited – generous trade discounts for quantity
Special ACCESS card instant sales hotline for GUARANTEED despatch within 24 hours . . .
Tel: 03952-5165
24 hr Ansaphone Service.
"All enquiries other than credit card sales to 03952-5832"
Gemini. Functional Software Specialists. 9, Salterton Road, Exmouth, Devon.

Tick the box for Program you require. Prices include V.A.T. and Package and Postage.
Please supply the following cassette software.

Database	£19.95 ☐	ZX81 16K Database	£9.95 ☐
Stock Control	£19.95 ☐	BBC Cash Book disk or tape	£95.00 ☐
Mailing List	£19.95 ☐	BBC Disks – other titles	£23.95 ☐
Invoices and Statements	£19.95 ☐	Osborne Disk Database	£23.95 ☐
Commercial Accounts	£19.95 ☐	Word processor	£19.95 ☐
Home Accounts	£19.95 ☐	Beebcalc	£19.95 ☐
		Dragoncalc	£19.95 ☐

Name_____
Address_____
Machine Type_____ Memory Size_____
I enclose_____
Make cheques and postal orders payable to Gemini Marketing Ltd.
Diners Card Number_____ Access Number_____
Signature_____



Gemini. Functional Software Specialists, 9 Salterton Road, Exmouth, Devon EX8 2QG.

PC4/83

● Circle No. 194

THE STYLIST

a high quality daisywheel printer



£695 +VAT

- V24/RS232 interface
- Proportional spacing
- Bidirectional/logic seeking
- Wide range of type styles and international languages

Trade/OEM Discounts available

Write or call for further information:
Butel-Comco Limited, Garrick Industrial Centre, Garrick Road, London NW9 6AQ. Telephone:01-202 0262.

Technology for business

● Circle No. 196



EXTEND YOUR BASIC WITH THESE NEW COMMANDS

INDEX


- File records by name
- Fast retrieval by key
- Fast sequential retrieval
- Balance Tree files
- Cross reference keys

SORT

- Fast sorting
- Comma delimited files
- Fixed length files
- Sorts INDEX files
- Compatible with Wordstar

SCREEN CONTROL

- On line screen design
- Automatic data validation
- Screen editing features
- Adaptable for any VDU
- Memory mapping



as BASIC as the knife and fork

USE OUR TOOLS FOR NEATER, QUICKER CODE –

All of these tools have been specifically designed for use with Microsoft BASIC (interpretive or compiled) but can be linked for other languages. They will run on any CP/M machine with 8080 or Z80 processor. They are all written in machine code for maximum efficiency and full **source code listings** are given in the manuals, with full instructions on how to implement and install them.

PRICES

INDEX Manual	£9.95
SORT Manual	£13.50
SCREEN Manual	£9.95

Diskettes (Single sided single density 8" IBM standard) £50 each excluding VAT.

PHIPPS ASSOCIATES

Dept E FREEPOST EM463 (No stamp required)
99 East St, Epsom, Surrey KT17 1BR
Telephone 03727-21215 24hr phone service.

Prices include postage but for air mail delivery in Europe add 90p (outside Europe add £2.20) per item.

Access and Barclaycard accepted

● Circle No. 114

Spectrum machine code

Bill Bennett searches for a good book on the subject — does such a thing exist?

WHAT BETTER WAY could there be of learning machine-code programming than on a Spectrum computer? It does not cost much, so if you do find mastering it too difficult then little is lost — you can always give the Spectrum to some kids. Logical deducation might lead you to think that because there are lots of books published about the Spectrum, there should be at least one good one about learning machine-code programming.

Unfortunately classical logic does not apply to the world of microcomputer publishing. We cannot rely on there being a decent microcomputer book on any subject. There are three books on the subject of machine-code programming for the Spectrum. Two of them I would not touch with a moving "professional" keypad.

However, there is one book on the subject that is both informative, enjoyable — yes an enjoyable book on machine code — and pitched at just the right level for programmers moving over from Basic. The book is *Introducing Spectrum Machine Code* by Ian Sinclair.

Ian Sinclair has nothing to do with Sinclair Research or with Clive Sinclair, and should not be confused wth the designer of the same name. He is a prolific writer with over 40 titles to his name; most of them, like this book, are pitched at the informed beginner. The reader is not thrown in at the deep end, but eased through the subject.

The major criticism of the book is that it comes to an end just when it gets interesting — a bit like *War and Peace* ending when the French invade Russia. However it just may be that Ian Sinclair is planning another volume. The book provides an excellent introduction to the topic, but it does need following up.




There are two books from Melbourne House on the subject. It has been a long time since I have seen such awful examples of the publisher's art. How anyone has the nerve to sell a book like *Spectrum Machine Language for the Absolute Beginner* is beyond me. At £6.95 the book is ridiculously over priced, and looks as though the text has been transferred directly from a cheap word-processor on to the page.



About one-third of the book is given over to the development of a machine code program, Freeway Frog, a version of the arcade game Frogger. I was pleased to see such an example of what can be done with machine code, but a few more examples would not have gone amiss. I would be embarrassed to have my name on the cover of this scruffy little item.

To be fair to Melbourne House, the public do not buy microcomputer books because they are well written or interestingly presented. I suppose this is why the publishers think they can get away with such sloppy presentation. But is the public going to pay the high price asked for such badly packaged merchandise?

Dr Ian Logan is well thought of in microcomputing circles. It is a pity that Melbourne House does not think highly enough of him to package his book *Understanding your Spectrum* as well as it deserves. From the design on the cover to the ink on the page, no corner has been left uncut in a sterling effort to minimise the cost of producing this book.

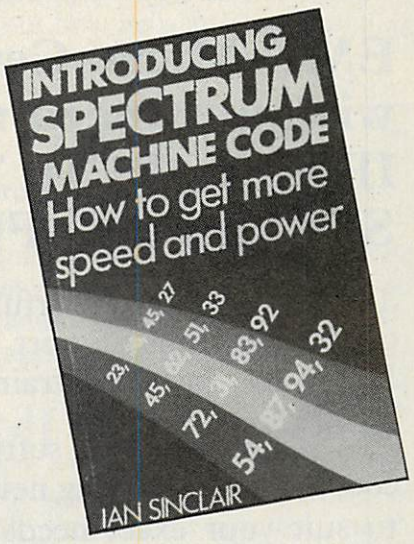

As far as the information inside is concerned it could be pure wisdom, but it is painful to look at. The book costs £7.95, but the extraordinarily high cost is warranted by the sheer amount of useful information within.

Understanding your Spectrum contains all the information an experienced machine-code programmer could need and will also be of great use to Basic programmers. It is in effect a supplement to the Sinclair manual. I cannot recommend the content too highly — it is a shame that a decent publisher has not signed Ian Logan up.

Spectrum Machine Language For the Absolute Beginner Edited by William Tang. Published by Melbourne House, 244 pages paperback, £6.95. ISBN O 86161 110 1

Understanding Your Spectrum by Ian Logan. Published by Melbourne House. 190 pages paperback, £7.95. ISBN 0 86161 111 x

Introducing Spectrum Machine Code by Ian Sinclair. Published by Granada, 151 pages paperback, £7.95. ISBN 0 246 12082 7


THE Midland Computer Fair

Personal computers
Home computing
Small business systems

BINGLEY HALL, BIRMINGHAM
28-30 APRIL
1983
Thurs & Fri 10am – 6pm
Saturday 10am – 5pm

Presented by YOUR COMPUTER / Practical Computing

This event is the first of its kind in the Midlands, and gives you the opportunity to see and compare the enormous range of personal and home computers, small business systems, microcomputers, software packages, cassettes and scores of the very latest computer games – try them for yourself – decide how much, or how little it takes to build up your own personal computer system.

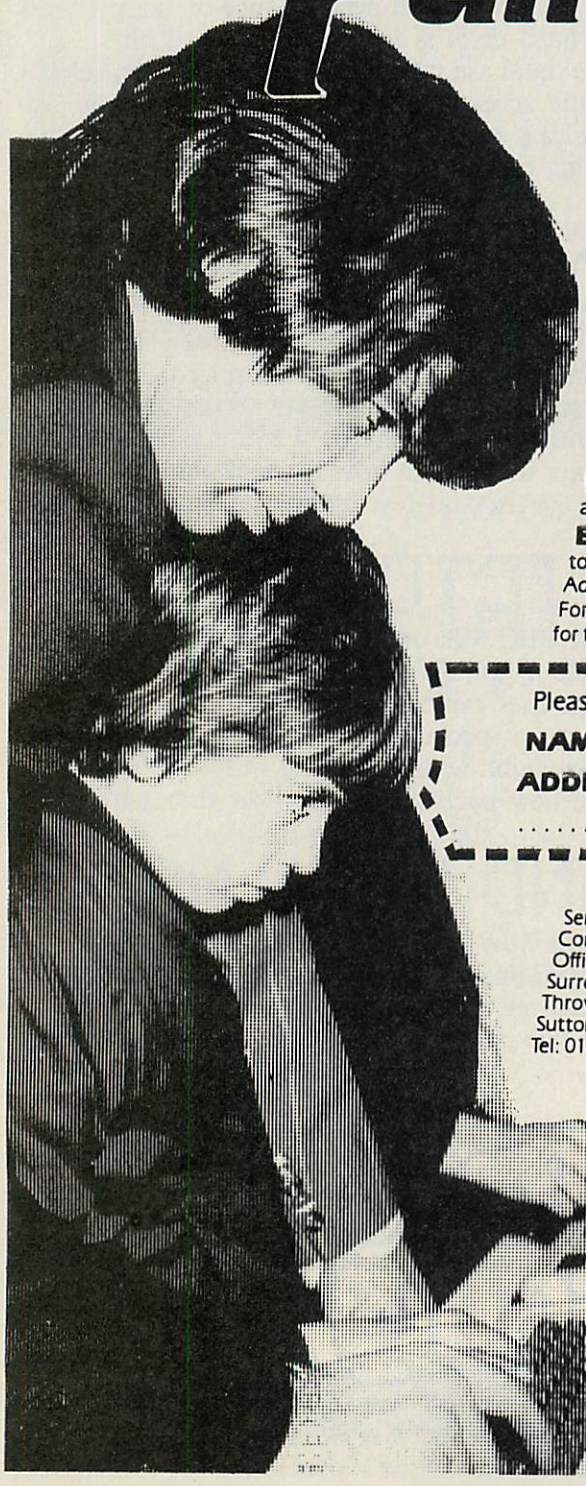

HOW TO GET THERE

BY RAIL Concessionary rail fares are available direct to New Street Station. Further details are available from, British Rail Travel Centre, New Street Station, Birmingham B2 2QA Tel: 021 643 2711.

BY BUS every few minutes from New Street, Corporation Street, Colmore Row and Bull Ring.

BY CAR Bingley Hall is situated close to the city centre and is within easy access to the M1, M5 and M6. Bingley Hall will be road signed by the AA.

Admission prices – Adults £2.00 Children under 16 and O.A.P.'s £1.00. Party Booking: For groups of over 20 people – adults £1.50 children 75p, (plus a free ticket per 20 sold for the organiser or teacher).


Please send .....adult .....child tickets Enclosed remittance £ .....

NAME .....

ADDRESS .....

.....**TELEPHONE NO** .....

Send to Midland Computer Fair Ticket Office, I.P.C. Exhibitions, Surrey House, Throwley Way, Sutton, Surrey Tel: 01-643 8040

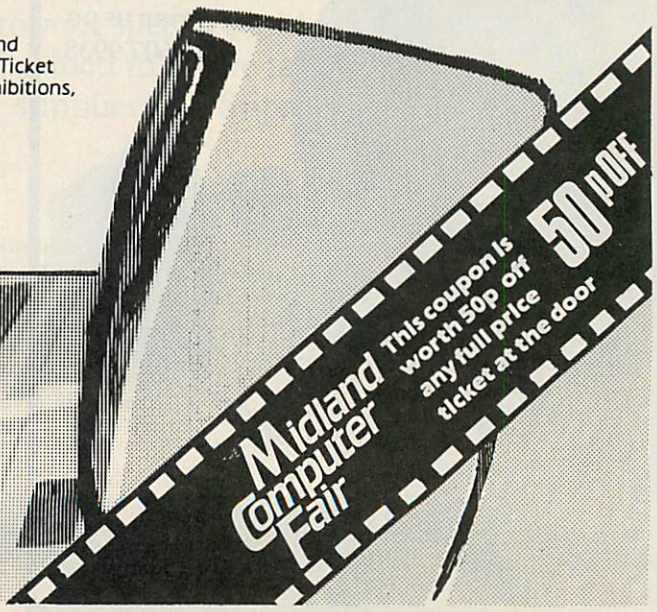

Spectrum machine code

Bill Bennett searches for a good book on the subject — does such a thing exist?

WHAT BETTER WAY could there be of learning machine-code programming than on a Spectrum computer? It does not cost much, so if you do find mastering it too difficult then little is lost — you can always give the Spectrum to some kids. Logical deducation might lead you to think that because there are lots of books published about the Spectrum, there should be at least one good one about learning machine-code programming.

Unfortunately classical logic does not apply to the world of microcomputer publishing. We cannot rely on there being a decent microcomputer book on any subject. There are three books on the subject of machine-code programming for the Spectrum. Two of them I would not touch with a moving "professional" keypad.

However, there is one book on the subject that is both informative, enjoyable — yes an enjoyable book on machine code — and pitched at just the right level for programmers moving over from Basic. The book is *Introducing Spectrum Machine Code* by Ian Sinclair.

Ian Sinclair has nothing to do with Sinclair Research or with Clive Sinclair, and should not be confused wth the designer of the same name. He is a prolific writer with over 40 titles to his name; most of them, like this book, are pitched at the informed beginner. The reader is not thrown in at the deep end, but eased through the subject.

The major criticism of the book is that it comes to an end just when it gets interesting — a bit like *War and Peace* ending when the French invade Russia. However it just may be that Ian Sinclair is planning another volume. The book provides an excellent introduction to the topic, but it does need following up.




There are two books from Melbourne House on the subject. It has been a long time since I have seen such awful examples of the publisher's art. How anyone has the nerve to sell a book like *Spectrum Machine Language for the Absolute Beginner* is beyond me. At £6.95 the book is ridiculously over priced, and looks as though the text has been transferred directly from a cheap word-processor on to the page.



About one-third of the book is given over to the development of a machine code program, Freeway Frog, a version of the arcade game Frogger. I was pleased to see such an example of what can be done with machine code, but a few more examples would not have gone amiss. I would be embarrassed to have my name on the cover of this scruffy little item.

To be fair to Melbourne House, the public do not buy microcomputer books because they are well written or interestingly presented. I suppose this is why the publishers think they can get away with such sloppy presentation. But is the public going to pay the high price asked for such badly packaged merchandise?

Dr Ian Logan is well thought of in microcomputing circles. It is a pity that Melbourne House does not think highly enough of him to package his book *Understanding your Spectrum* as well as it deserves. From the design on the cover to the ink on the page, no corner has been left uncut in a sterling effort to minimise the cost of producing this book.

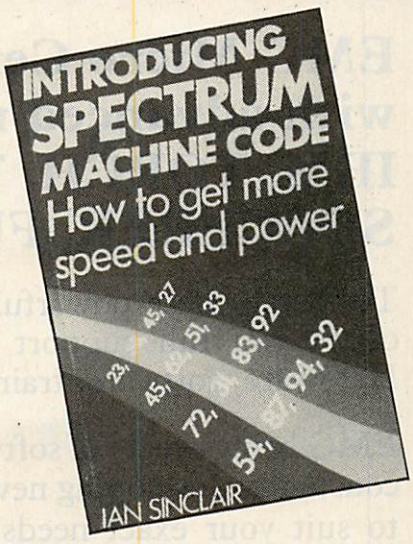

As far as the information inside is concerned it could be pure wisdom, but it is painful to look at. The book costs £7.95, but the extraordinarily high cost is warranted by the sheer amount of useful information within.

Understanding your Spectrum contains all the information an experienced machine-code programmer could need and will also be of great use to Basic programmers. It is in effect a supplement to the Sinclair manual. I cannot recommend the content too highly — it is a shame that a decent publisher has not signed Ian Logan up.

Spectrum Machine Language For the Absolute Beginner Edited by William Tang. Published by Melbourne House, 244 pages paperback, £6.95. ISBN O 86161 110 1

Understanding Your Spectrum by Ian Logan. Published by Melbourne House. 190 pages paperback, £7.95. ISBN 0 86161 111 x

Introducing Spectrum Machine Code by Ian Sinclair. Published by Granada, 151 pages paperback, £7.95. ISBN 0 246 12082 7

COMPUTASOLVE LTD

8 Central Parade, St. Marks Hill, Surbiton, Surrey.
Tel. 01-390 5135
(100 yards from Surbiton station)

YOU KNOW WHAT YOUR BUSINESS PROBLEMS ARE... COME TO COMPUTASOLVE LTD AND LET US HELP YOU TO FIND A SOLUTION

We stock many standard business packages including accounting systems by TABS and PEACHTREE, and record management systems from COMPSOFT.


If there isn't a suitable package available we can develop software to suit your particular needs.

The hardware we can supply ranges from home computers to powerful business micro systems.

Word Processing Software is available on all of our business systems.

● Circle No. 199

EPROM PROGRAMMERS
FOR THE PET AND APPLE COMPUTERS



- All programmers can read/ programme 2716(2K) 2516(4K) EPROMS.
- All you will ever need to make hard copies of your machine code programs.
- Independently powered.

PET £62.00
APPLE £90.00

* PET OWNERS: Free program for making your own character set.
* Including VIA board to plug into slot X.

PET SUPERBOARD 32 £62.00

Select up to 8 ROM/EPROM, RAM/ROM from any available ROM socket under programme control.

- No wires, switches or soldering required.
- Plugs onto expansion port leaving port still available.
- You can run a 32K machine code program from one ROM location.
- Takes any combination of 2K/4K ROM/EPROM, RAM/ROM.
- Can be plugged into the character generator to give up to 8 different on-board character sets.

APPLE VIA BOARDS

The board contains a 6522 VIA, containing 2 programmable timers, a shift register, 4 handshaking lines, 2x8 bit programmable I/O ports. The board can be inserted into any available slot 1 to 7.

SINGLE £32.00 **DOUBLE £42.00**

VIC and ACORN EPROM PROGRAMMERS £62.00
For details see above.

ACORN MONITOR CHIP £20.50

10 commands to simplify machine code programming. Plus full screen editor, repeat key function and flashing cursor.


PET/VIC edge connectors plus covers. £6.50. E/PROMS 2532 £8.50, 2716 £4.50, RAM 6116 P-3 £8.50.

ALL PRICES INCLUDING V.A.T. AND P&P.
OFFICIAL ORDERS WELCOME.

CID COMPUTER INTERFACE DESIGNS.
4, Albert Road, Margate, Kent. CT9 5AN.
Tel: (0843) 294648

● Circle No. 200

EMG Micro Centres supply you with advanced micro computers:— IBM, TORCH, TELEVIDEO, BBC, SORCERER, FUTURE, AES

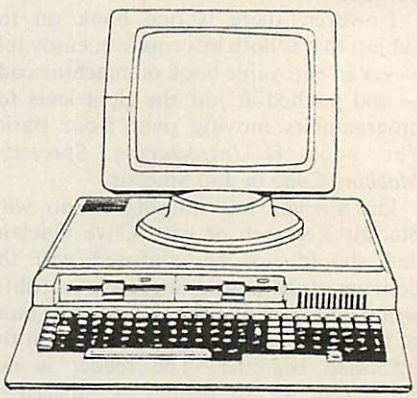

To match these powerful and versatile machines, EMG offers you full support services delivered by experts. Hardware, software, training, supplies? Yes, all!

EMG brings years of software experience to your special problems. An expert team is constantly developing new software and is trained to create tailor-made programmes to suit your exact needs. EMG are also suppliers of Supercalc, Spellbinder and D Base.

CONTACT your nearest EMG Micro Centre at:

London Micro Centre
47 Lower Belgrave St
London SW1
Tel. 01-730 8791

South Western Micro Centre
32 Mount Street
Penzance, Cornwall
Tel. (0736) 66821/34

South London Micro Centre
7 Imperial Way
Croydon, Surrey
Tel. 01-680 6040

West Midland Micro Centre
128a Alcester Road
Moseley
Birmingham B13 8EE
Tel. 021 449 1818

West Sussex Micro Centre
2 Fleming Way
Industrial Centre
Gatwick, Crawley
West Sussex RH10 2JY
Tel. (0293) 519211

Please send me further information. PC1

Name _____

Address _____

_____

_____ *Telephone* _____

Expected application _____

_____

● Circle No. 198

STEMMOS LTD.
ANNOUNCE

THE WORLD'S LEADING AUTOMATIC PROGRAM GENERATOR

AUTOCODE I ™

Automatic development of dBase II™ program code without any programming

- ★ Automatic Menus and Sub-Menus
- ★ Automatic Data Entry Screens
- ★ Automatic Data Entry Routines
- ★ Automatic Edit/Validation
- ★ String, Numeric, Date and calculated fields
- ★ Automatic Multiple Reports
- ★ Automatic Programs in dBase code with interactive screens
- ★ No prior knowledge of dBase II is needed.

AUTOCODE I £120
dBASE II & AUTOCODE I ... £450
(Excluding VAT)

STEMMOS LTD.
World leaders in automatic programming

344 Kensington High Street,
London W.14 8NS
Tel. 01 602 6242 Telex 893003 Stemmos G.

(AUTOCADE ITM STEMMOS LTD.
dBase II TM Ashton-Tate

● Circle No. 201

MAILING FLOPPY DISKS?

The Swan Disc Pack combines great strength with simplicity of use. Made from rigid white corrugated, it is a self assembly package providing high postal security at economical rates.

Free sample ring us on 01-607 9938



sizes:
6 x 6;
8.75 x 8.75

● Circle No. 202

>NEXT MONTH

>MASS STORAGE AND DATABASES

The special section in the May issue is devoted to two of the most important growth areas in microcomputing. Important developments in mass storage include microfloppies of 3 to 3.5 inches, bubble memories, and video tapes and discs. Meanwhile the performance of floppies and hard discs is increasing dramatically.

The database programs needed to store, select, sort and access large amounts of information are making a big impact on the market. We're checking out the main developments in these vital fields

>ORION RISING

A leading office-equipment supplier was confident it could sell a new micro — so it commissioned one. The result is the new 16-bit Orion desk-top micro. We interviewed the designer to find out how he went about building it, and tested the machine.

>PICTURE THIS

The BBC Microcomputer offers exceptional colour-graphics facilities, but how can the average user exploit them to the full? The answer is to use a special graphics program designed to make painting and drawing simple. We tested three new packages to see how they perform.

>AND MUCH MORE!

Plus the May issue will include special articles on programming and using microcomputers, and the usual reviews and departments including the Open File pages of programs for popular micros, news and letters.

Practical Computing

On sale at W H Smith and all leading newsagents after April 13.

THE Midland Computer Fair

Personal computers
Home computing
Small business systems

BINGLEY HALL, BIRMINGHAM
28-30 APRIL 1983
Thurs & Fri 10am – 6pm
Saturday 10am – 5pm

Presented by YOUR COMPUTER Practical Computing



This event is the first of its kind in the Midlands, and gives you the opportunity to see and compare the enormous range of personal and home computers, small business systems, microcomputers, software packages, cassettes and scores of the very latest computer games – try them for yourself – decide how much, or how little it takes to build up your own personal computer system.

HOW TO GET THERE

BY RAIL Concessionary rail fares are available direct to New Street Station. Further details are available from, British Rail Travel Centre, New Street Station, Birmingham B2 2QA Tel: 021 643 2711.

BY BUS every few minutes from New Street, Corporation Street, Colmore Row and Bull Ring.

BY CAR Bingley Hall is situated close to the city centre and is within easy access to the M1, M5 and M6. Bingley Hall will be road signed by the AA.

Admission prices – Adults £2.00 Children under 16 and O.A.P's £1.00. Party Booking: For groups of over 20 people – adults £1.50 children 75p, (plus a free ticket per 20 sold for the organiser or teacher).

Please send . . . . .adult . . . . .child tickets Enclosed remittance £ . . . . . .

NAME . . . . . .

ADDRESS . . . . . .

. . . . . **TELEPHONE NO** . . . . . .

Send to Midland Computer Fair Ticket Office, I.P.C. Exhibitions, Surrey House, Throwley Way, Sutton, Surrey Tel: 01-643 8040



Eltec Computers

HOME & BUSINESS TECHNOLOGY

Probably the widest selection of software available by mail order.

All the top manufacturers including **Acorn Soft**, IJK (Sinclair), Superior Software, Bug Byte, Program Power, Hessel, Procyon.

HERE IS A SELECTION

Peeko Computer	9.95
Junior Maths Pack	6.84
Philosopher's Quest	9.95
Planetoid	9.95
Meteors	9.95
Arcadians	9.95
Swoop	7.99
Chess Model B	7.99
Space Invaders Model B The best	6.95
Atlantis — Superb fast Action 32K	6.95
Hyperdrive 32K	5.95
Stratobomber	6.95

Send SAE for full list.

HARDWARE EXPANSION

Sound pick-off module (simple to fit)	6.95
Amplifier and loudspeaker suitable for above	37.50
Light pen	34.50
X-Y digitiser	80.00

SUPER ACCESSORIES

Cover Polyester Cotton	3.97
Cover Soft PVC	4.45
Carrying Case for Computer, Cables, Cassette/ Disc Drive	55.20
Carrying Case a soft supported nylon version of above	23.00

BBC models A & B in stock:
A – £299 B – £399

DISK DRIVES FOR BBC

BBC 100K Single drive (Requires discs (a))	265.00
TORCH Z80 800K Disc pack includes Z80 proc'r + 64K (b)	897.00
BBC/LVL 200K Twin Drive (a)	397.00
TEAC 200K Single Drive (a)	304.75
TEAC 400K Twin Drive (a)	569.25
TEAC 400K Single Drive (b)	396.75
TEAC 800K Twin Drive (b)	711.85
Connecting cable for TEAC drives	17.25
(a) SCOTCH Single sided discs Box of 10	28.75
(b) SCOTCH Double sided discs Box of 10	39.80

BBC UPGRADES

Full upgrade kit (fitting £31.00)	69.00
Disc interface (fitting £15.00)	109.25

The above prices are VAT inclusive. Add £1.00 p&p for orders below £100.00 and £10.00 (Securicor delivery) for orders above £100.00.
Access and Barclaycard accepted on all items except BBC computers.

ELTEC COMPUTERS
217 Manningham Lane, Bradford, BD8 7HH.
Tel (0274) 722512.

● Circle No. 203

Fylde Computer Show

JOIN US

AT THE

Winter Gardens
Blackpool
JUNE '83

To Book YOUR Space

Contact
PETER WHITEHOUSE
0706 877687

● Circle No. 276

We offer a full range of 8 bit and 16 bit

MICROCOMPUTERS

TO SOLVE THE PROBLEMS OF THE SMALL OR MEDIUM BUSINESS

Contact us for a demonstration particularly if you are in

AVON
GLOS., WILTSHIRE
SOMERSET

To solve the problems of small and medium businesses our applications include: SALES INVOICING, SALES PURCHASE AND NOMINAL LEDGERS, FINANCIAL PLANNING, PAYROLL, COSTING STOCK CONTROL AND WORD PROVESSING, PLUS DEDICATED APPLICATIONS FOR TRADES AND PROFESSIONS. We use a solution orientated approach. We will give your system room to grow and adapt as your business grows and changes.

To see how we can help you write, telephone or use the coupon.

ADVANCED TECHNOLOGY LTD (PRC)
UNIT 16, PUCKLECHURCH TRADING ESTATE,
PUCKLECHURCH, BRISTOL, AVON.
TEL: ABSON (027582) 2054

NAME..... TEL:.....

POSITION..... COMPANY.....

ADDRESS.....


.....

OUR MICROS INCLUDE TOSHIBA, LOGICA, SHELTON SIG/NET AND TELEVIDEO

● Circle No. 277

5MB WINCHESTER

APPLE II
IBM
SIRIUS

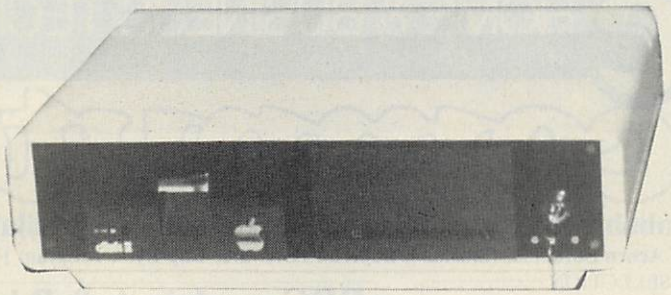

£1,495 + VAT
COMPLETE

£1,195 + VAT
EXCLUDING APPLE DISK

5 MB FORMATED WINCHESTER WITH APPLE FLOPPY DRIVE BACK UP SECURITY KEY PROTECTION — FITTED COOLING FAN UNIT FULLY PLUGGED BACK PLATE HEAVY DUTY SWITCHING POWER SUPPLY — COMPLETE WITH PERSONALITY CARD ALL NECESSARY CABLING AND PLUGS — 12 MONTHS PARTS AND LABOUR WARRANTY.

CAMDEN COMPUTER SYSTEMS LTD

462 COVENTRY ROAD, SMALL HEATH, BIRMINGHAM B10 0UG.
021-771 3636. Telex 335909

NORTHERN BRANCH OFFICE: 95 MEADOW LANE, LEEDS LS11 5DW. 0539 446946


● Circle No. 206

special offer!

from £48

from £48

Computer Table

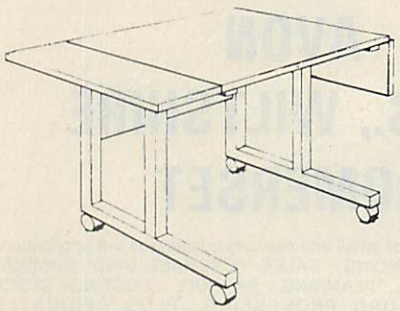

Dimensions
height..... 680mm
table size.. 700mm x 600mm
wing size .. 600mm x 250mm

Rigid steel frame enamelled black.
Twin wheel castors for easy movement.
Wood grain finish melamine surfaces.
Optional hinged wings for extra work area.

TABLE ref. LCT £48 each inc. VAT.
HINGED WING (can be fitted either side) ref. HW £12 each inc. VAT.
carriage (UK) £8.50

Supplied in flat pack form with easy to follow instructions.


Cheques/postal orders to:-

Crowther-Cosine
6, Middleton Road,
Whittington,
Lichfield, STAFFS. WS14 9NB.
Tel: 0543 432376
Please allow 14 days for delivery

● Circle No. 205

MICRO WORK STATIONS

A new concept in work stations designed to solve space and mobility problems.



A compact storage unit able to house a full system yet only occupying a space just larger than a 60cm square. Even packed away the equipment can still be used effectively.



Opening the hinged leaf doubles the work surface area creating an operating position with ample knee and leg room.

Write or phone for full details to:-

Crowther-Cosine,
6, Middleton Road, Whittington,
Lichfield, Staffs. WS14 9NB.
Tel. (0543) 432376

● Circle No. 207

KNIGHTS GUARANTEE LOWEST PRICES ON SHARP AND ATARI

SHARP MZ-80A DEAL A36+2 £149 A real computer with 56K memory, screen & cassette. Supplied with BASIC & PASCAL languages + 36 programs.

DEAL A40+4 £449 MZ80A with 40 programs + BASIC, PASCAL, FORTH & MACHINE CODE.

DEAL A113+4 £475 MZ80A, 113 programs + 4 languages

MZ80A SYSTEM £1575 micro, twin disks, printer, 4 languages & 150 programs.

MZ-80B £747 76K memory, BASIC, MACHINE CODE & ASSEMBLER.

MZ80B SYSTEM £1899 micro, printer, disks, 3 languages + 70 programms.

ATARI 400 £138 16K memory, 128 colours, 2 microprocessors + 63 programs.

ATARI BOO £299 with 63 programs.

ATARI BASIC £33.90 cartridge & manuals.

ATARI DISK UNIT £259 with 63 programs.

Ring or write and we will rush you our newsletter, software catalogue and unbeatable price list. All above prices exclude VAT but include Securicor delivery — we accept VISA or ACCESS.

108 ROSEMOUNT PLACE, ABERDEEN AB24YW
TELEPHONE: 0224 630526

Knights T.V. & COMPUTERS

● Circle No. 208

Executive Software Club

Choose software the easy way — Try it first!

- ★ Try software for two weeks before deciding whether to purchase.
- ★ If you buy, the rental is entirely free of charge — *you can't lose!*
- ★ Huge catalogue of the best software available. Examples include dBase II, Micromodeller, Microplanner, Wordstar, Format 80, Visicalc, Multiplan etc.
- ★ Hardware currently supported: Apple IIe, Apple II, Sirius 1, IBM PC, Victor 9000 and most CP/M Formats.
- ★ Membership of the Executive Software Club costs just £30.00 p.a.
- ★ Large range of hardware also available on short or long-term rent — including the amazing Epson HX20 portable micro.
- ★ Write or telephone for free catalogue.

Call us now — 01-739 5889

The Executive Software Club
350/356 Old Street, London EC1V 9DT

● Circle No. 209

Somewhere handy to put your mini disks



The Willis Mini-Disk file is the idea you hoped someone would come up with. A handsome virtually indestructible file which holds your valuable programs and data files neatly filed and indexed ready for immediate use.

Disks are stored in 10 sections, each with an ingenious lift mechanism, which enables you to fan display them five at a time, using only the thumb and forefinger.

The file holds fifty 5¼" Mini Disks and you'll wonder how you ever did without it.

Just one of the items from the Willis Catalogue.

To order please use coupon. By taking advantage of this cash with order offer, you are saving £5.55 on the normal price. *Virtually indestructible with smart cream plastic base and tinted polycarbonate lid. *Lockable for security and easily transportable with carrying handles. *Each disk neatly filed even if box is not fully loaded.

Just £35.00 (Plus £2 p&p)

To: Willis Computer Supplies Ltd., FREEPOST, PO Box 10, Southmill Road, Bishop's Stortford, Herts CM23 1BR. Telephone: Bishop's Stortford (0279) 506491.
Please send _____ Mini Disk File(s) at £35.00 plus £2.00 p&p and your colour catalogue.
Name _____
Address _____
_____ Post Code _____
I enclose my cheque/PO for £_____ or debit my Access or Barclaycard.
Card Number ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐
Signature _____
PC4/83

WILLIS Computer supplies



● Circle No. 204

Pete & Pa

Dealer enquiries welcome from bona fide computer dealers

WE HAVE THE LARGEST COM FOR APPLE, IBM PC, HX20 AND

Ⓐ

DESKTOP/PLAN II
from Personal Software

A programming language for financial analysis.

£69.00

NEW

THE WORD HANDLER Ⓐ

The only word processor in the world for Apple that gives you full line capability on the screen, no boards necessary. Two character formats to choose from at all times.

£109.00

THE LIST HANDLER Ⓐ

Holds up to 3,000 records so that 24,000 can be kept on-line at the same time with multiple disk-drives. The most simple, versatile filing program available that not only stores and prints lists and labels, but prints letters too!

£79.00

TRIPLE YOUR DISK ACCESS SPEED

No hardware modification required

FastDOS Ⓐ

Fast Disk operating system for Apple II computers

Completely compatible with DOS disks

Loads and saves standard DOS files

Completely compatible with all DOS/APPLESOFT programs that access DOS through standard hooks, including FID and MUFFIN

Executes all standard DOS commands

Comparative timings:	DOS	FDOS
Bloading integer basic	13 sec	3 sec
Cataloging a 12 file disk	2 sec	1 sec
Saving a 10 sector program	6 sec	2 sec
Saving a 100 sector program	34 sec	7 sec
Loading a 100 sector program	24 sec	7 sec

Requires 48K

£19.95


THE WILDCARD Ⓐ

PLUG THIS CARD INTO ANY SLOT AND IT WILL COPY THE PROGRAM RUNNING ONTO A STANDARD DOS DISC

- Works with any RAM card
- Copies any 48K core resident program (6502)
- No parameter list needed – copies without question
- Fast and reliable – any program in less than two minutes
- Copies made with WILDCARD can be copied again and again with standard copy program
- Core program is accessible
- Not slot dependent
- Programs copied can be run without WILDCARD being present
- Copies even the bit map copiers
- Utilities included for the programmer
- Copies most 64K programs

£99.00

FUNCTION STRIP and . . ENHANCER II Ⓐ



The Videx **Function Strip** adds a whole new dimension to your Enhancer II : Apple II Function Keys. Now you can have dedicated keys for your macro definitions. Program often used word processor commands, words or phrases into your **Function Strip**. Programmers will find it a significant aid to be able to define often used commands and statements. VisiCalc users can define often used commands and file names for single keystroke ease of use.

The Videx **Function Strip** is a low cost, versatile strip of pressure sensitive switches. The **Function Strip** adheres to the Apple II's lid – just above the keyboard and connects to the Enhancer II's keypad connector port. The **Function Strip** is completely compatible with keypads connecting to the Apple II motherboard.

Function Strip	£49.50
Enhancer II	£89.00

OR . . . BOTH FOR A SPECIAL PRICE OF:

£135.00

COMMUNICATIONS PACKAGES



CONVERT YOUR APPLE INTO A VT100 TERMINAL USING ASCII EXPRESS "THE PROFESSIONAL"

WE USE IT OURSELVES!

ASC II EXPRESS – THE PROFESSIONAL Ⓐ

The finest, most complete, communication package you can buy! For operation under native Apple DOS 3.3 in 48k and 64k systems.

£99.00

ZENITH 12" GREEN SCREEN MONITORS

Special Offer

NOW ONLY **£85**

THE GIBSON LPS II LIGHT PEN Ⓐ

If you want to create graphics and want to stay away from using paddles, joysticks, the keyboard, or expensive graphics tablets – then the LPS II is for you.

£249

Ⓐ

timekit

The amazingly compact MICROWATCH real time clockcard and ELECTRONIC DIARY software for your APPLE II computer.

£59.00

Ⓐ

SATURN 128K



Now you can get 80 column VisiCalc display on Videoterm, Smarterm and Sup-R-Term

Saturn 128K Card	£359.00
Saturn 32K Card	£149.00
VC Expand	£49.00
VC Expand 80	£59.00
Videx Videoterm	£199.00
Soft 80 Column Switch	£21.95
Hard Switch Plate	£13.50
Inverse ROM (Recommended)	£18.95
Videx Visicalc 80 Column Preboot Disk (no memory expansion)	£34.95

A new utility will be out soon enabling you to run Applesoft programs up to approx 160K in size.

MACHINE CARE DUST COVERS

Apple II	£8.95
Apple & 2 Discs	£8.95
Apple & 12" Monitor	£8.95
Apple 2 KD&12" Monitor	£9.95
Apple 2 DK&9" Monitor	£8.95
Single Disc	£3.45
2 Stacked Discs	£4.45
9" Monitor	£5.95
Epson MX80/70	£5.95
Paper Tiger 445/60	£7.45
MX100	£9.95
Qume 5 W/Tractor	£10.95
Nec 12" Monitor	£7.45
Hitachi 12" Monitor	£7.45
Decca RGB Monitor	£9.95
Sirius Keyboard	£5.95
Sirius Proc & Monitor	£10.95
Prism Printer 560	£8.45
Anadex 9000 Series	£8.95
BBC Computer	£8.95
IBM PC Monitor & Cover	£9.95
IBM PC Keyboard	£4.95
NEC 8023B-C Printer	£6.45
Pet 4023/8023/8096	£9.45
Pet 4040/8050 Disc	£8.95
9060 Hard Disc	£6.95
Pet 4022P Printer	£5.95
Pet 8023P Printer	£7.45
Pet 8300P Printer	£9.45

HEAD CLEANING

Clean read/write heads the way leading manufacturers recommend 5¼" disc head cleaning kit. £15.95

DISCS & DISC BOXES

BASF single sided, single density discs 10 for £17.90 50 for £84.50 100 for £159

Kass-ette storage boxes £1.95

Ⓔ

Pipe Line

Random Access Printing Buffer

For the first time ever, here is a buffer that no only frees your fast computer from your slow printer but also allows you to rearrange, compos and copy your data on its way to the printer.

- Random Access Printing – stores paragraphs or pictures for printing in any order – any number of times.
- FIFO Printing – conventional first-in first-out operation.
- Compression of data for efficient utilisation memory space.
- Ability to interrupt long-term buffer operation for straight-thru short-term printing.
- Simple Erase feature to clear buffer.
- Automatic duplication capability.
- Easily expandable, by you, from 8K Bytes to 128K Bytes.

The IS Pipe Line is Universal – it works with any parallel (Cantronics – style) computer/printe combination. A special version is available for PKASO Printer Interfaces.

8K Buffer £189.00
128K Buffer £359.00

WESPER MICROSYSTEMS
WIZARD Peripheral Cards

Ⓔ

WIZARD-EBI

64K Buffer for Epson Printers

With a WIZARD-EBI, you will never again have to wait for your printer to finish printing a job before you can start your next project. That's because the WIZARD-EBI allows you to use your computer on a new task during the time the printer is printing the previous one. Th WIZARD-EBI can buffer 8K, 16K, 32K, o 64K characters depending on the number RAM chips plugged into the board. The u can be purchased with any buffer size a expanded later by simply plugging RAM chips into the empty sockets on the card

£10



SMITH CORONA TP-I

Electronic Text Printer

- LOW COST DAISY WHEEL PRINTER
- MICROPROCESSOR ELECTRONICS
- SERIAL OF PARALLEL INTERFACES

£48

A/P

ALPHA

The Apple-IBM Connection

Transfers any file back and forth

CONNECT Apples to IBMs, Apples to Apples, o IBMs to IBMs. Transfer information from any f thousands of miles – in minutes.

£14


INDEX :

Ⓐ FOR APPLE COMPUTER

BINED RANGE OF PRODUCTS
C/PM COMPUTERS IN THE UK!

Goods listed in this advertisement are available from our dealers throughout Europe

(E)



IT'S OFTEN BEEN SAID THAT THE SIMPLEST IDEAS ARE THE BEST – AND JUST LOOK AT THIS ONE FOR PAPER STORAGE.

stilts

Pete & Pam Computer's Stilts are four legs which can be installed on to your Epson MX80 in seconds – giving you room for 3 inches of paper.

SPECIALLY REDUCED PRICE **£3.95**

A/PC

d BASE II

The most powerful, easiest to use micro data base management system. Don't just take our word for it – read this review from "Info World". "Overall, I would rank dBASE II as excellent. It is fast, powerful and flexible, and it allows applications to be programmed far more quickly and easily than does BASIC or Pascal. It is hard for me to imagine any kind of small business application for which I would prefer one of the traditional languages over dBASE II."

You'll wonder how you managed without it.

d BASE II **£399.00**
Requires Microsoft Z-80 Softcard **£239.00**

dBASE II Utilities

dUTIL
The dBASE II Utility Program

dUTIL is Fox & Geller's utility program for dBASE II. dUTIL decreases the running time of dBASE II command files. dUTIL combines your command files automatically to produce a faster running time.

£89.00

QUICKCODE
The dBASE II Program Generator

Quickcode writes concise programs to set up and maintain any type of database. Run them as is, or customise them in seconds. You still have all the power of dBASE II and there is no programming required. All you have to do is draw your data entry form on the screen and you're in business.

£249.00

AUTOCODE 1

Autocode 1 – is extremely simple to use, a user with no programming experience and no knowledge of dBase II can produce programs within a hour or so of introduction to the system, since Autocode 1 – sets an automatic file maintenance and a standard reporting facility.

£120.00

dGRAPH
The dBASE II Graphics System

Now you can combine database and graphics. With dGRAPH by far the easiest to use graphics package in existence. Just press one key and you've got your graph.
And what graphs! Sales by month. Expense budget by division. This year versus last year. And each one can be a pie chart bar graph or line graph. It's up to you.
Advanced features make dGRAPH as powerful as it is easy. Features like autoGRAPH which will automatically load dBASE II data, compute scales, draw grid lines, and label charts. Then there's automatic shading and overlay graphs.
dGRAPH draws graphs on Epson, Okidata, and a growing list of other popular printers.

£249.00

ANNOUNCING...

Sprinter

RING US TODAY – GET YOUR PRINTER TOMORROW!

We stock the following printers:

Tec/Itoh F10/40cps . . .	£1,285
Tech/Itoh F10/50cps. . .	£1,675
Epson MX100 F/T III . . .	£499
Epson MX827 Graphics Ptr	£369
Epson MX80 F/T III	£389
Epson MX80 T III	£349
Epson MX82 F/T Graphics Ptr	£409
Epson FX80	£438
NEC 8023B Dot Matrix . .	£399
OKI Microline 80	£199
OKI Microline 82A	£349
OKI Microline 83A	£499
OKI Microline 84 Parallel .	£799
OKI Microline 84 H.S. Serial	£891
Olympia ESW3 with KB .	£1,098
Olympia ESW102 (RO) . .	£836
Smith Corona TP1 D/W Serial	£485
Smith Corona TP1 D/W Parallel	£485

Dealer prices available on request

BOOKS

SEND NOW FOR OUR NEW CATALOGUE OF OVER 600 COMPUTER RELATED BOOKS

Our well equipped SERVICE & REPAIR DEPARTMENTS

IN ROSSENDALE & LONDON ARE NOW AVAILABLE FOR REPAIRS ON ANYONE'S APPLE OR IBM PC

Rates are very reasonable

£10 1st ½ hour, £7.50 per each subsequent ½ hour in Rossendale

£12 per 1st ½ hour, £9 per each subsequent ½ hour in London.

Call
STEVE McCLEAN in Rossendale (0706 227011)
or
DAVE MERCER in London (01-769 1022)

(A)

We distribute
SYMBIOTIC
HARD DISK DRIVES

5MB.	**£1,494**
10.5MB	**£2,130**
21MB.	**£2,800**

Please ring for more information and dealer prices

THE PLUG –
cost effective computer care.

A mains borne noise and transient suppression device incorporated within a modified 13 amp plug.

Helps cure unexplained software errors, and apparently intermittant hardware malfunctions.

£12.95

BIG NEWS

WE ARE PLEASED TO ANNOUNCE THAT OUR LONDON OFFICE IS NOW AN AUTHORISED IBM UK PERSONAL COMPUTER DEALER

LOOK AT THESE ITEMS FROM OUR WIDE RANGE OF PRODUCTS FOR THE IBM PC

80 Col Word Process IBM	
Write On for IBM PC	99.00
Easyspeller For IBM	125.00
Easywriter II For IBM	239.00
Volkswriter IBM PC	159.00
Wordstar For IBM	295.00
Mailmerge For IBM	145.00
Superwriter For IBM (Oct 3/8)	249.00
VisiWord for IBM PC	295.00
Mem Exp Cardsb IBM	
64K RAMcard for IBM PC	245.00
256K RAMcard for IBM PC	495.00
192K Ramcard for IBM	287.00
Apparat 64K expandable RAMcard	119.00
16K upgrade for RAMcard	31.00
Vista 576K Maxicard RAMcard	395.00
Multifunction Cards IBM	
Para/RS232/Clock Card For IBM	249.00
Hercules Graphics Card	495.00
Assembly Language Graphics rtn	39.95
Quadboard 256K,Clock & I/O	695.00
Quadboard 64K,Clock & I/O	395.00
Quadboard 128K,Clock & I/O	525.00
Quadboard 192K,Clock & I/O	595.00
6 Function 576K Board for PC	575.00
I/O IBM-Int (2 Ser Para & GM)	195.00
Graphics Hardware Ibm	
Sweet P Plotter for IBM PC	595.00
Versawriter Graph Tab IBM	199.00
Firmware Devel Equip IBM	
Prom Blaster For IBM	159.00

Financial Modelling IBM	
1-2-3 for IBM PC	349.00
Supercalc For IBM	225.00
Business Forcasting Model IBM	88.00
Visicalc 256K For IBM	187.00
Edu Software IBM	
Question	32.95
ATI Power for IBM PC DOS	59.00
THE WORDprocessor BIBLE Tut PC	149.00
PC Tutor	59.00
The Instructor for IBM PC	29.95
Wordtrix for IBM	22.95
Quotrix	22.95
Story Machine for IBM PC	24.95
Facemaker for IBM PC	24.95
Snooper Troops for IBM PC	32.95
Snooper Troops 2 for IBM PC	32.95
Databases & DB Util IBM	
Versaform for IBM PC	295.00
Qbase for IBM PC	139.00
Dbase II For IBM	375.00
Quickcode for dBase 11 IBM	249.00
dUtil for dBase 11 IBM	69.00
dGraph for dBase 11 IBM	249.00
Easyplanner For IBM	125.00
Easyfiler For IBM	259.00
PFS for IBM	84.00
PFS Report for IBM	64.00
DB Master for IBM PC	349.00
Data Reporter for IBM PC	195.00
Report Writer for IBM PC	79.00
File-Fax for IBM PC	139.00
Visidex For IBM	187.00
Visifile For IBM	230.00

Pete & Pam Computers



forcapple entry

Mail Order & Distribution:
New Hall Hey Road,
Rossendale, Lancs., BB4 6JG
Phones: (0706) 227011 & 212321
Telex: 635740 Petpam G.

Norwegian Agent:
The Norwegian Software House
Address Okernveien 145
Oslo 5
Telephone 47 2 64 55 77

London Retail:
103-5 Blegborough Road,
London, SW16 6DL
Phones: 01 769 1022/3/4
Telex: 923070 PPCOMP G

Prices do not include VAT please add 15% to your remittance
Postage and Packing FREE

● Circle No. 210

The Home of Microcomputer Software

MPI
MICROCOMPUTER PRODUCTS INTERNATIONAL LTD.

	Software & Manual	Manual Only
ANTHONY ASHPITEL TYPING TUTORS		
BASIC VERSION	50	
BUSINESS VERSION	125	25
ASHTON-TATE		
DBASE-II	438	
BYROM SOFTWARE		
BSTAM–Utility to link one micro-computer to another also using BSTM	124	8
BSTMS–Utility to link a micro to a mini or mainframe	147	14
CP/M USER LIBRARY		
51 Volumes–Price per volume		
8" disc (one volume per disc)	5	
5" disc (one volume per 2 discs)	10	
5" disc (one volume per 3 discs)	15	
Index		2
DECISION SYSTEMS		
THE OPERATING GUIDE	45	
DIGITAL RESEARCH		
BT-80	183	26
CBASIC v 2.08	85	18
CB-80 1.3	346	23
CP/M86	190	35
CP/M 2.2	114	26
CP/NET	141	18
DESPOOL	35	8
MAC	69	18
MP/M 1.1	153	24
MP/M 2.0	320	39
PASCAL MT+	229	26
SPEED PROGRAMMING PACKAGE	163	13
PASCAL MT+ WITH SPP	327	39
PASCAL MT+ LIB SOURCES	144	
PL/1-80	350	35
SID 1.4	56	18
TEX 3.0	72	18
XLT86	105	8
ZSID 1.4	72	18
ELECTRONIC ACCOUNTING SERVICES		
LINEAR & GOAL PROGRAMMING	200	10
FOCUS COMPUTER SERVICES LTD.		
PARAGRAB	95	
FOX & GELLER		
QUICKSCREEN FOR DBASE-II	114	16
QUICKSCREEN FOR CBASIC/CB-80	114	16
QUICKSCREEN FOR MBASIC	114	16
QUICKCODE FOR DBASE-II	203	24
INFORMATION UNLIMITED		
WHATSIT (Database Management System)	80	
KLH SYSTEMS		
Spooler for CPM systems v3.0	92	8
MAGIC CIRCLE SOFTWARE		
CPM SIM	157	
MICRO-AP		
SELECTOR-V 1.7	359	33
MPI LTD.		
FORTH	94	26
PAYROLL	500	20
SALES LEDGER	200	15
PURCHASE LEDGER	200	15
NOMINAL LEDGER	200	15
INCOMPLETE RECORDS	1200	20
MATHSPACK	120	
STATSPACK	120	

	Software & Manual	Manual Only
MICROFOCUS		
CIS COBOL v 4.5	425	25
FORMS 2	110	10
ANIMATOR	225	25
FILESHARE	250	20
CORAL-66	825	25
LEVEL-2 COBOL	965	40
LEVEL-2 FORMS-2	110	10
LEVEL-2 ANIMATOR	475	25
MICRO INTEGRATION		
BISYNC-80/3780	525	
BISYNC-80/3780 (ASCII)	525	
BISYNC-80/3270 (BSC)	525	
BISYNC-80/HASP	975	
MICROLOGY		
FTNUMB (FORTRAN-80 RENUMBER & REFORMATTER)	50	
MICROPRO INC.		
WORDSTAR 3.0	327	50
MAIL MERGE 3.0 (requires Wordstar)	98	13
SPELLSTAR 1.2 (requires Wordstar)	163	13
ALL-STAR WORD PACK	471	
WORDSTAR TRAINING MANUAL		24
WORD-MASTER 1.7A	98	29
TEX-WRITER 2.6	48	22
SUPER-SORT 1.6	163	29
DATASTAR 1.4	229	33
CALCSTAR 1.2	196	33
ALL-STAR DATA PACK	471	
APPLE VERSIONS		
WORDSTAR 3.0	246	48
MAILMERGE 3.0 (requires Wordstar)	82	13
SPELLSTAR 1.2 (requires Wordstar)	128	13
DATASTAR 1.101	193	33
SUPERSORT 1.6	131	29
CALCSTAR 1.2	128	33
MICROSOFT INC.		
BASIC-80 5.21	242	
BASIC Compiler 5.3	268	
FORTRAN-80 3.44	340	
COBOL-80 4.60	497	
M/SORT 1.012	98	
EDIT-80 2.02	85	
MACRO-80 3.43	137	
MULISP 2.12	137	
MUMATH 2.12	170	
MICROTECH EXPORTS		
REFORMATTER CPM(-)IBM	163	22
REFORMATTER CPM(-)DEC	163	22
ORGANIC SOFTWARE		
MILESTONE	263	
PEARL INTERNATIONAL		
PERSONAL PEARL	180	
PEARL-3	275	
PHOENIX SOFTWARE ASSOCIATES		
PLINK–Disc to disc link Loader	94	20
PASM–Macro Assembler	94	20
PEDIT–Line editor with Macros	94	20
BUG–Very powerful debug	94	20
PDEVELOP Package with all the above	252	43
PLINK-2 Overlay Link Loader	242	20
SAPPHIRE SYSTEMS LTD.		
MARS	395	25
SLOGGER SOFTWARE		
DISKREV	65	13
DISKLENE	40	6
DISKORG	50	6
DISKED-2	65	8
DISKTOOLS-1 (Diskrev & Diskorg)	90	15
DISKTOOLS-2 (Disktools-1 & Disked-2)	145	19
STRUCTURED SYSTEMS (All converted to UK Standard)		
SALES LEDGER	350	20
PURCHASE LEDGER	350	20
NOMINAL LEDGER	350	20
STOCK CONTROL	350	20
LETTERIGHT	124	14
ANALYST (File management Reporting System)	163	14
NAD (Name and Address selection system)	72	14
QSORT	72	14



As you can see, this set of programs will prove to be a useful and valuable asset to any users range of software.

The CP/M TUTOR is an interactive tutorial designed to teach you all about CP/M and your computer. You need have no previous computer experience or knowledge to use this trainer.

The tutorial will run at your own speed. There are comprehensive help messages if you get stuck, as well as a question and answer session at the end of each section. If you get the answers wrong, the computer will give you a hint.

This tutorial is invaluable for anyone who wishes to understand how to make the best use of CP/M, and thus make the most of their computer.

***HELPFUL BOOKS:**

We have a wide range of books, selected to support our comprehensive list of software. Four books which may interest you are:

- CP/M User Guide £11.10
- The CP/M Handbook with MP/M £12.10
- CP/M Primer £10.95
- Mastering CP/M £12.95

	Software & Manual	Manual Only
SUPERSOFT INC.		
DIAGNOSTICS 1	59	12
TERM	94	9
SYNTAX SOFTWARE LTD.		
CP/M TUTOR	55	
TDL SOFTWARE (Technical Design Labs)		
BUSINESS BASIC	80	
ZTEL (Text Editing Lang.)	35	
LINKER	35	

NEW PRODUCTS

For CP/M-86

ANTHONY ASHPITEL TYPING TUTORS		
BASIC VERSION	50	
BUSINESS VERSION	125	25
MICROFOCUS		
CIS COBOL v 4.5	425	25
FORMS 2	110	10
ANIMATOR	225	25
FILESHARE	250	20
CORAL-66	825	25
LEVEL-2 COBOL	965	40
LEVEL-2 FORMS-2	110	10
LEVEL-2 ANIMATOR	475	25
SAPPHIRE SYSTEMS LTD.		
MARS	395	25

For IBM PC-DOS

MICROPRO INC.		
WORDSTAR 3.0	327	50
MAIL MERGE 3.0 (requires Wordstar)	98	13
SPELLSTAR 1.2 (requires Wordstar)	163	13

ORDER INFORMATION

Most software in this advertisement is available from stock and we pride ourselves on a speedy turn-a-round of orders. All prices are based on an exchange rate of $1.53 to the £1.00 (current in Feb '83). Due to fluctuation in the exchange rate we find we have to bring out a new price list each month. Please telephone at time of ordering to confirm latest details, plus postage costs. Mail Order — Telephone Credit Card Orders — Personal Visits — Retailer and OEM Terms available.

* Free Full Descriptive Catalogue Available *


MICROCOMPUTER PRODUCTS INTERNATIONAL LTD.
ROOM PC . 11 CAMBRIDGE HOUSE, CAMBRIDGE ROAD, BARKING, ESSEX IG11 8NT, ENGLAND Telephone: 01-591 6511 Telex: 892395

MEDIA AND FORMATS


Altos	A1	Cromemco System 2 DD/SS	RX	IMSAI VDP-80	A1	Nascom/Lucas	N1
APPLE CP/M-80 13 Sector	RG	CSSN Backup	T1	Industrial Microsystems 5000	RA	NCR 8140/9010	A1
APPLE CP/M-80 16 Sector	RR	Cyfer 8"	A1	Industrial Microsystems 8000	A1	NNC-80	A1
Blackhawk Micropolis Mod II	Q2	Datapoint 1550/2150	A1	Intel MDS SD	A1	NNC-80W	A1
British Micros Mimi	RK	Dec VT 180 SSDD	RV	Intertec Superbrain SSDD	RK	North Star Advantage	P2
California Computer Sys 8 in	A1	Delta Systems	A1	Intertec Superbrain QD	RS	North Star Horizon SSSD	P1
CDS Versatile 4	Q2	Dynabyte DB8/4	A1	ISC Intercolor 8063/8360/8963	A1	North Star Horizon SSDD	P2
Columbia Data Products 8 in	A1	Exidy Sorcerer - CP/M-80	Q2	ITT 3030 DSDD	R1	North Star Horizon QD (MPI CP/M)	P3
Comart Communicator CP50	P2	Exidy Sorcerer - Exidy CP/M-80	A1	Micromation	A1	North Star Horizon QD	
Comart Communicator CP100	P2	EXO	A1	Micropolis Mod II	Q2	(Other CP/M)	P2
Comart Communicator CP200	P2	Gemini Galaxy I	NI	Morrow Discus	A1	Nylac Micropolis Mod II	Q2
Comart Communicator CP500	P2	Heath H8 - H47	A1	Mostek	A1	Osborne-I	RP
Compal-80	Q2	Hewlett-Packard 125.8in	A1	Multi-Tech 1	Q2	Pertec PCC 2000	A1
CPT 8000	A1	IBM PC-DOS SSDD	C1	Multi-Tech 2	Q2	Rade 1000 SSDD	RL
Cromemco System 3	A1	IBM PC-DOS DSDD	C2	Micromation	A1	Rade 1000 DSDD	RM
Cromemco System 2 SD/SS	R6	IBM CP/M-86 SSDD	C3	Micropolis Mod II	Q2	Rair Black Box	RE
		IBM CP/M-86 DSDD	C4	Morrow Discus	A1	Research Machines 5.25in	RN
		ICL-PC	RE	Mostek	A1	Research Machines 8in	A1
		ICL DRX Series	A1	Nascom (Gemini Drives SSSD)	R3	Robotron 5	N3
		ICOM 3712	A1	Nascom (Gemini Drives DSSD)	R7	Robotron 8	A1

SD Systems 5.25in	R3	Tarbell 8in	A1
SD Systems 8in	A1	TEI 8in	A1
Sharp MZ-80B	R9	Televideo DSDD	S5
Sharp PC-3201	R8	Torch	N2
Shelton Signet	RK	Toshiba T200 DSDD	SF
Spacebyte	A1	TRS-80 Modell - Shuffle-board 8in	A1
Tarbell 8in	A1	TRS-80 Modell II	A1
TEI 8in	A1	Vector MZ	Q2
Televideo DSDD	S5	Vector Systems 2800	A1
Torch	N2	Vector Systems B	Q2
Toshiba T200 DSDD	SF	Vector VIP	Q2
TRS-80 Modell - Shuffle-board 8in	A1	Xerox 820 5.25in	S6
TRS-80 Modell II	A1	Xerox 820 8in	A1
Vector MZ	Q2		
Vector Systems 2800	A1		
Vector Systems B	Q2		
Vector VIP	Q2		
Xerox 820 5.25in	S6		
Xerox 820 8in	A1		

Performance Programming

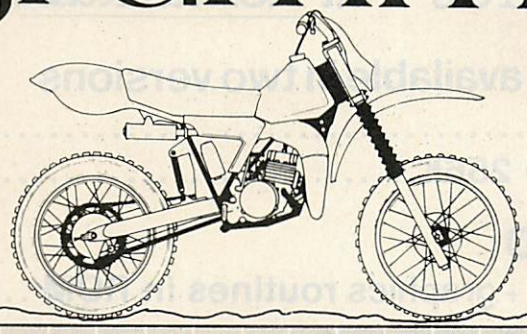

with economy and reliability

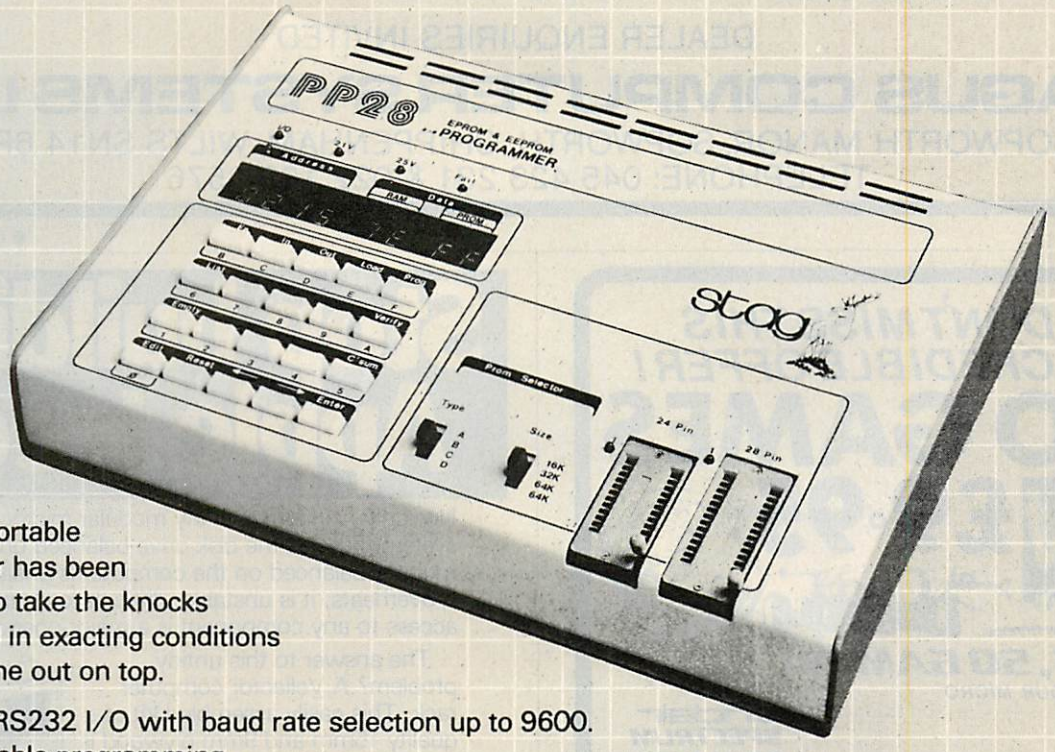

Our PP28 portable programmer has been developed to take the knocks experienced in exacting conditions and still come out on top.

- ☐ Integral RS232 I/O with baud rate selection up to 9600.
- ☐ Ultra reliable programming.
- ☐ Keyboard entry, I/O entry or Master device entry.
- ☐ Intellec, Hex ASCII and other I/O formats to improve the power of your development system.
- ☐ Powerful functions for error free editing to modify PROM data (relocate, split, shuffle, checksum, CRC etc).

Sophisticated systems for the discerning engineer.



stag ELECTRONIC DESIGNS LTD
Stag House, Tewin Court, Welwyn Garden City, Hertfordshire AL7 1AU.
Telephone (07073) 32148. Telex 8953451 STAGWG.

● Circle No. 212

MEMORY & GRAPHICS BOARDS FOR THE ACT SIRIUS 1

Designed & Manufactured in Britain to the Highest Standards – at Remarkably Low Prices

MEMORY BOARD available in two versions

- **256K** ..... (R.R.P. £399) **£279**
- **128K expandable to 256K** ..... (R.R.P. £285) **£199**

GRAPHICS BOARD

- **128K Bytes of RAM + graphics routines in ROM** ..... (R.R.P. £399) **£279**

Graphics Features include:-

ALL PRICES EXCLUSIVE OF VAT

- ☐ *CHARACTER LOAD AND PRINT*
- ☐ *AREA FILL WITH USER DEFINED PATTERNS*
- ☐ *AREA DELETE*
- ☐ *RELOCATABLE SCREEN ORIGIN*
- ☐ *RAPID PLOTTING OF POLYGONS, CIRCLES, ARCS AND ELLIPSES*
- ☐ *CHOICE OF FULL AND BROKEN LINES AND RAY LINES*
- ☐ *ROTATION IN STEPS OF 1°*
- ☐ *FULL SCREEN DUMP*

DEALER ENQUIRIES INVITED

MAGUS COMPUTER SYSTEMS LTD

SOPWORTH MANOR, SOPWORTH, CHIPPENHAM, WILTS SN14 6PS
TELEPHONE: 045 423 231 & 022 122 3576

● Circle No. 214

DON'T MISS THIS INCREDIBLE OFFER!

50 GAMES £9.95



YES, 50 GAMES! on cassette for all the following:

FOR YOUR MICRO

GALACTIC ATTACK, SPACE MISSION, LUNAR LANDER, PLASMA BOLT, STARTREK, RADAR LANDING, ATTACKER, GALACTIC DOGFIGHT, ZION ATTACK, INVASIVE ACTION, OXO, BOGGLES, PONTOON, SKI JUMP, HANGMAN, OLD BONES, THIN ICE, MAZE EATER, ORBITTER, MOTORWAY, FORCE FIELD, NIM, TUNNEL ESCAPE, BARREL JUMP, CANNONBALL BATTLE, OVERTAKE, SITTING TARGET, SMASH THE WINDOWS, SPACE SHIP, JET LIGHT, PHASER, INTRUDER, INFERNO, GHOSTS, SUBMARINES, ROCKET LAUNCH, PLANETS, BLACK HOLE, DYNAMITE, DO YOUR SUMS, DERBY DASH, SPACE SEARCH, UNIVERSE, RATS, TANKER, PARACHUTE, JETMOBILE, HIGH RISE, THE FORCE, EXCHANGE

sinclair SPECTRUM ZX81 LYNX
DRAGON
ATARI VIC-20
apple (ION DISC & CASSETTE)
ACORN ATOM
BBC A/B
SHARP
ORIC-1
NEW BRAIN



CASCADE SOFTWARE
CASCADES HOUSE
BARGAN'S LANE
LLANDOGO
GWENT
S.WALES
NP54PA

SUPPLY CASSETTE 50 FOR _____ COMPUTER
I enclose cheque/P.O.

PC4/83

Name _____
Address _____


ORDER NOW!

● Circle No. 213

Stop building Apple trees.

Not only Apple trees. Any modular microcomputer system that has the disk drive balanced on the monitor balanced on the computer is unsatisfactory. It overheats, it is unstable, difficult to clean, and access to any component is a major operation.

The answer to this untidy problem? A Vellector computer rack. This easily assembled kit of quality 15mm and 9mm plywood is precision machined to fit your individual system. The dovetail joints ensure a strong, elegant structure that can be assembled without special tools. Kit includes all you need except paint.



I enclose a cheque/postal order for £18.50 (including VAT and carriage)

Computer make and model: Width: mm Height: mm

Monitor: Width: Height Disk drive(s): Width: Height:

Name:

Address:

Vellector Ltd. *37 Broughton Street, Manchester 8. 061 832 5660*

● Circle No. 215

SPRING BARGAIN OFFER

PHOENIX, a Leading Supplier of monochrome and colour monitors, offers the following montiros for sale:

SPECIFICATION:

Metal cased units.
9" or 12" BNC i/p Display, P31 (Green) Phosphor.
Digital i/p slicing offering excellent DOT quality.
European design and manufacture.

All product is brand new and is offered with a 30 day return to supplier warranty.

PRICES:

9" Unit – £75.00
12" Unit – £79.00
Inclusive of Delivery and VAT

AVAILABILITY:

Ex stock

PHOENIX

PHOENIX TECHNOLOGY
158 Camberwell Road,
London SE5 0EE
Telephone 01-701 8668,
Telex 892367

● Circle No. 218

LEARN ABOUT LOGO!

LEARNING WITH LOGO

Daniel Watt

This book offers a practical and comfortable introduction to the fascinating uses of this new computer language. Written to be rewarding for children as young as 9 years old but still useful to adults, this book teaches basic Logo programming and activities.

07 068570 3 1982 £15.50

APPLE LOGO

Harold Abelson

Explaining the use of Logo on the Apple II computer this book contains additional references to programming the Texas Instruments 99/4A home computer. It begins with a basic outline of Logo, then covers elementary programming procedures, and readers then learn how to use Logo with some hands-on practice at 'turtle geometry', an introductory programming example. More complex commands, techniques and projects are then introduced.

07 000425 0 1982 £11.50

These books are available from any good bookshop, or direct from the publisher.

McGraw-Hill

McGraw-Hill Book Company (UK) Limited, Shoppenhangers Road, Maidenhead, Berkshire SL6 2QL.

● Circle No. 216

You're just one step away from one-step accounting



Anagram Systems' Integrated Accounts is, simply, the most comprehensive, easiest to understand integrated accounting package available to Commodore users. It is the best reason yet for choosing Commodore.

And now there is Anagram Integrated Accounts with integrated Stock Control – on top of superb Anagram standalone Stock Control and ledger packages. Just look at these features and options.

Full integration: Anagram Integrated Accounts consists of Sales, Purchase and Nominal Ledgers, Cash Book, and functions which permit journal entries, file maintenance and report printing in remarkable detail. All these are automatically updated when you make an entry. In the version with Stock Control, creating an invoice updates the stock as well as the other modules.

Single- or multi-user: Anagram Integrated Accounts, with or without the integrated Stock Control, can be supplied either single-user, or multi-user for up to five machines for only £300 extra per machine. The same goes for Anagram Stock Control.

Hard disk or floppies: Integrated Accounts is on just one floppy disk – compare that to competitive packages – and runs successfully with the Commodore twin disk units. Integrated Accounts with Stock Control and Sales Order Processing ideally requires a hard disk.

Open Item or Balance Forward: Choose which system you want for each account – you can even mix the two.

Extensive analysis: Each sales invoice can be analysed across ten nominal headings; each purchase invoice across eight. You can set up budgets within each nominal heading to get comparisons of 'budget to actual' at any time.

Easy to understand, learn and use: Anagram Accounting and Stock Control packages are designed for busy people who don't want to mess about with computers. They use ordinary book-keeping terms without jargon.



Your Commodore dealer should have these packages ready for demonstration. If not, phone Anagram and we will fix a demonstration for you. Or send the coupon.

ANAGRAM SYSTEMS
60A, Queen Street, Horsham, West Sussex
RH13 5AD. Tel. (0403) 50854/58153

To: Commodore Special Promotions Department, 675 Ajax Avenue, Trading Estate, Slough, Berkshire SL1 4BG.
Telephone: Slough (0753) 79292.

Send me brochures on the Anagram packages I have ticked and tell me where to see them running.

☐ Integrated Accounts with Stock Control ☐ Integrated Accounts
☐ Standalone Stock Control ☐ Standalone Ledgers

Name _____
Position _____
Company _____
Nature of business _____
Address _____
_____
County _____ Postcode _____
Telephone No. _____
Any existing CBM computer _____

commodore COMPUTER

CBM is a trademark of Commodore Business Machines (UK) Ltd

AN/PCO/04

● Circle No. 271

This is what the pros have said about Perfect Writer:™

"Perfect Writer lives up to its name . . . It would be my choice for a word processor in my home."

John Ford, Infoworld

"The company is stamping a giant footprint in the market with an aggressive advertising campaign—and with a program that delivers what the ads promise . . . Perfect Writer will likely be the tool I use to construct future documents."

Dona Z. Meilach, Interface Age

"It does things I've seen nowhere else."

James Fallows, Atlantic Monthly

"Capabilities like those in Wangwriter and other sophisticated systems."

Softalk

Perfect Writer™ **Perfect Speller™** **Perfect Filer™** **Perfect Calc™**

Perfect Software™

The revolution in software.


1400 Shattuck Ave.
Berkeley, CA 94709, USA

DISTRIBUTOR:
Micro Marketing International
5598 Taft Avenue
Oakland, CA 94618 USA
Telephone: (415) 658-5548
Telex: 171 596 AAA COM SUVL


Perfect Writer, Perfect Speller, Perfect Filer, Perfect Calc and Perfect Software are trademarks of Perfect Software, Inc.

● **Circle No. 219**

Performance Programming

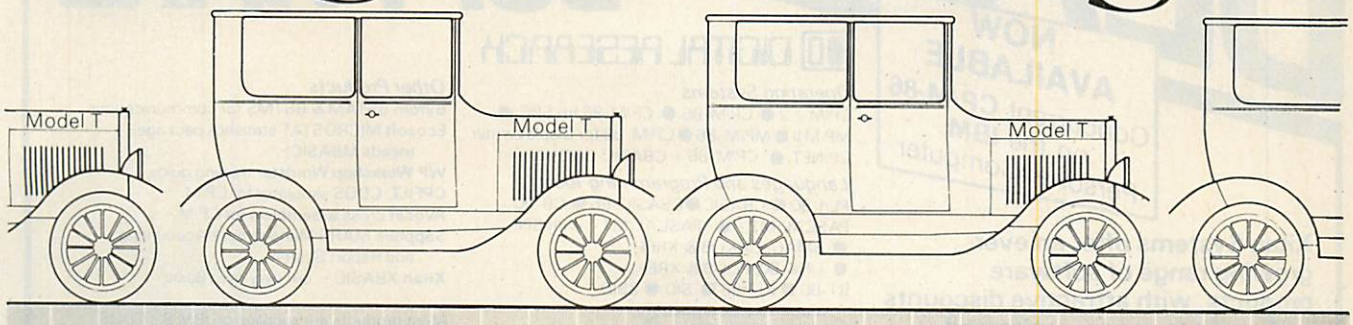

on the Production Line

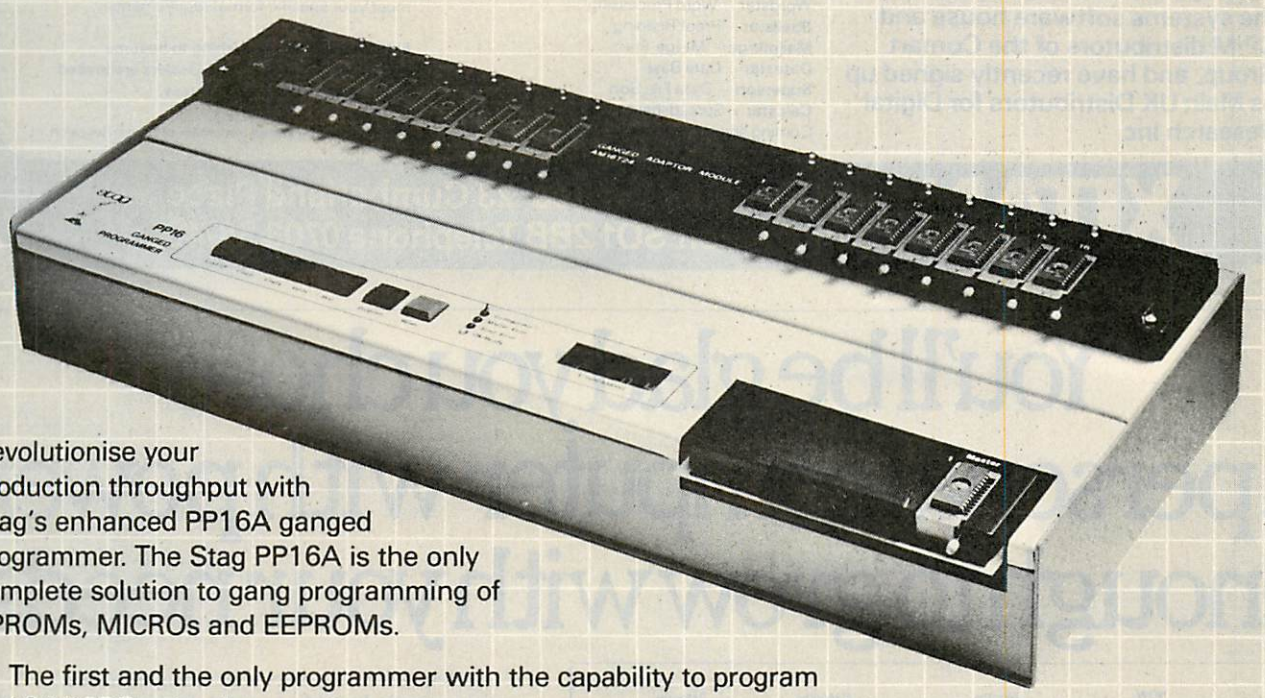

Revolutionise your production throughput with Stag's enhanced PP16A ganged programmer. The Stag PP16A is the only complete solution to gang programming of EPROMs, MICROs and EEPROMs.

- ☐ The first and the only programmer with the capability to program 16 MICROs simultaneously.
- ☐ On-chip programmable MICROs from Intel, Mitsubishi, NEC and Toshiba—including the popular series 8741/48/49, 8748H/49H, 8751 and 8755A.
- ☐ 24-pin and 28-pin EPROMs or EEPROMs.
- ☐ Enhanced to provide fast programming to greatly reduce programming times. For example the 2764—6 sec to 59 sec minimum; and the 27128—11 sec to 116 sec minimum.
- ☐ Approved by Intel and other leading manufacturers.

A versatile RS232C/RAM card option enables the PP16A to be interfaced to Micro Development Systems and other peripherals thereby expanding the system's capability.

Sophisticated systems for the discerning engineer.

stag ELECTRONIC DESIGNS LTD
Stag House, Tewin Court, Welwyn Garden City, Hertfordshire AL7 1AU.
Telephone (07073) 32148. Telex 8953451 STAGWG.



● Circle No. 220

DEALERS CP/M* SOFTWARE

NOW AVAILABLE
Concurrent CP/M-86 on the IBM Personal Computer

Xitan Systems offer an ever-growing range of software products, with attractive discounts and credit terms for registered dealers – backed by prompt and friendly service. Xitan Systems are the systems software house and CP/M distributors of the Comart Group, and have recently signed up as Main UK Distributors for Digital Research Inc.

DIGITAL RESEARCH

Operating Systems
CP/M 2.2 ● CP/M-86 ● CP/M-86 for SBC ● MP/M II ● MP/M-86 ● CP/M-86 for Displaywriter CP/NET ● CP/M-86 + CBASIC-86 DW

Languages and Programming Tools
PL/I-80 ● CBASIC ● CBASIC-86 ● CB-80 PASCAL/MT+ ● PASCAL/MT+ with SPP ● RMAC, LINKLIB & XREF ● LINK-80, PLILIB & XREF BT-80 ● XLT 86 ● SID ● ZSID

MicroPro

Wordstar – Word Processing
Spellstar – Proof Reading
Mailmerge – Merge-Print
Datastar – Data Base
Supersort – Data File Sort
Calcstar – Spreadsheet
Coming shortly: **Infostar**

Other Products
Byrom BSTAM & BSTMS for communications
Ecosoft MICROSTAT statistics package (needs MBASIC)
WP Workshop Wordstar training guide
CPFILT, CDOS simulator for CP/M
Avocet cross-assemblers for CP/M
Sapphire MARS Management Accounting and Report System
Xitan XBASIC – our very own Basic

Most products are supplied on IBM 8", CDOS 5.25", SS/SD, CP/M 5.25", CP 100 and NSDD formats. A wider range will be available in the near future, and every effort will be made to meet your specific format requirements.


Established dealers wishing to become registered Xitan Software Dealers are invited to write or phone for full details.

* CP/M is the registered trademark of Digital Research Inc.

XITAN Xitan Systems Limited 23 Cumberland Place Southampton SO1 2BB Telephone 0703 38740

● Circle No. 157

You'll be glad you chose a personal computer with power enough to grow with your needs.

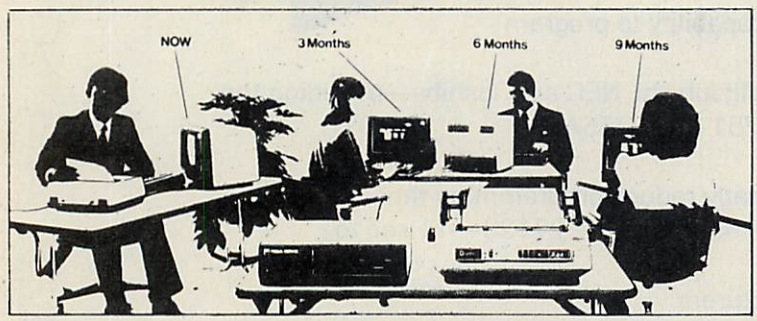

The ICL Personal Computer with power to grow as you need it.

Choosing the wrong personal computer can work out very costly, because though they grow to meet your needs, they just don't grow enough.

The new ICL Personal Computer gives you more.

It's a versatile, professional personal computer. It can start with a single Visual Display Unit, naturally, and it has a wide range of functions to meet your increasing requirements. And it can grow larger than most other personal computer systems, because its capacity for additional hardware is greater.

Starting at £2,300 with one VDU

The ICL Personal Computer provides a range of options enabling you to have a system tailored to meet your changing needs.

For example, by adding a fixed-disc, you can have eight times the original storage capacity, and support up to 4 VDUs. And there is an extensive range of Personal Computer hardware.

Wide range of integrated accounts and other application software available, providing limitless possibilities.

So your secretary can do her word processing, you can do your forecasts, your accountant can do the invoicing, and your programmer can do his own thing, all at the same time.

Thats what makes the ICL Personal Computer more than just a personal computer.

And because ICL is Europe's leading computer company, with thousands of satisfied users in over 80 countries worldwide, **we can offer ICL Trader Point service and maintenance back-up that's second to none.**

What more could you ask for, apart from a demonstration?


ICL trader point

Johnson microcomputers

Johnson House · 75-79 Park Street · Camberley · Surrey
Telephone 0276 20446
Robophone Answering 24 hrs. Prestel page No. *200632
Mailbox No. 027620448
48 Gloucester Road · Bristol · Telephone 0272 422061
113 Stratford Road · Shirley · Birmingham B90 3AY
Telephone (021) 745 3246

● Circle No. 158

new and bestselling books from Prentice-Hall International

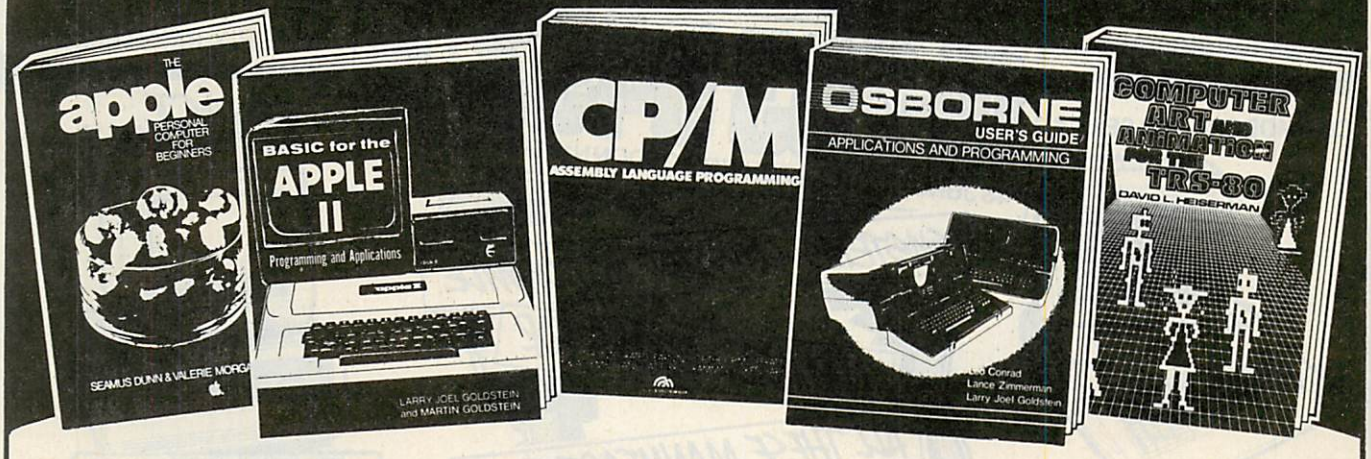

The Apple Personal Computer for Beginners

Seamus Dunn and Valerie Morgan

For the Apple II, this thorough introduction concentrates on Applesoft BASIC and disk-oriented machines. Graphics, colour and sound are stressed, while appendices cover Integer BASIC, Pascal and the use of tape-recorders and cassette storage.

☐ **£9.95 hardback 300 pages 13-039149-2 September 1982**

☐ **£6.95 paperback 13-039131-X**

BASIC for the Apple II

Programming and Applications

Larry Joel Goldstein and Martin Goldstein

BASIC programming, real-life applications, games, graphics, file management and word processing are covered as well as software and current peripheral devices.

☐ **£12.70 paperback 250 pages 89303-189-5 January 1983**

CP/M Assembly Language Programming

Ken Barbier

No previous CP/M or assembly language experience is needed to follow this clearly written book, which covers hardware and software, selecting I/O devices, CP/M's built-in line editing feature, register organization and data paths, disk file access, etc.

☐ **£10.35 paperback 226 pages 13-188250-3 March 1983**

Developing Microcomputer-Based Business Systems

Chris Edwards

Written in a clear, non-technical style, this is a practical introduction to the development of small computer systems for data processing. No prior knowledge of systems design or computing is needed to stand the topics discussed.

☐ **£9.95 hardback 224 pages 13-204560-5 March 1982**

☐ **£5.95 paperback 13-204552-4**

Osborne User's Guide

Applications and Programming

Leo Conrad, Steven Zimmerman and Larry Joel Goldstein

This thorough, practical introduction to the Osborne Personal Computer explains MBASIC language, provides tips to make programming easier and accurate, gives applications for business and graphics, and includes a concise outline explaining how to use the CP/M Operating System on the Osborne.

☐ **£11.95 paperback 256 pages 89303-206-9 March 1983**

VAX BASIC

David Weinman and Barbara Kurshan

Examples and clear descriptions as well as programs are included in this thorough introduction. Among the many topics covered are program control, arrays, numeric functions, simulations and games, and files.

☐ **£12.70 paperback 320 pages 8359-8238-6 March 1983**

Computer Art and Animation for the TRS-80

David Heiserman

The author shows you how to develop BASIC programs that produce interesting graphics for a variety of applications on the TRS-80 Model I and Model III.

☐ **£10.35 paperback 246 pages 13-164731-8 March 1983**

Inside ATARI BASIC

Bill Carris

For the ATARI 800, this straightforward book takes the mystery and confusion out of learning how to operate the computer. BASIC programming, graphics, colour and sound are explained by Bill Carris, Training Director with the Home Computer Division of ATARI.

☐ **£10.35 paperback 184 pages 8359-3082-3 March 1983**

Prices and publication dates are correct at the time of going to press, but may be subject to change.

Book Orders

These books can be ordered from your usual bookseller, or in case of difficulty from:

Department 30,
Prentice-Hall International,
66 Wood Lane End, Hemel Hempstead,
Hertfordshire HP2 4RG, England.

Please mark the number of books you wish to order in the boxes beside each title and return the advertisement to the address above.

Name _____

Address _____

_____

_____

I enclose a cheque/P.O. for £_____
Please add £1.00 per book for postage and packing. Payment should be made out to **INTERNATIONAL BOOK DISTRIBUTORS.** Please allow 28 days for delivery.


Prentice-Hall International

PC4

● **Circle No. 221**

CHROMASONIC
business systems

commodore





EPSON
MX-100
MX-80
MATRIX PRINTERS


01-263 9493/5

48 JUNCTION RD, ARCHWAY, LONDON N19 5RD Telex 22568

COMMODORE 700 SERIES



ACT Sirius 1

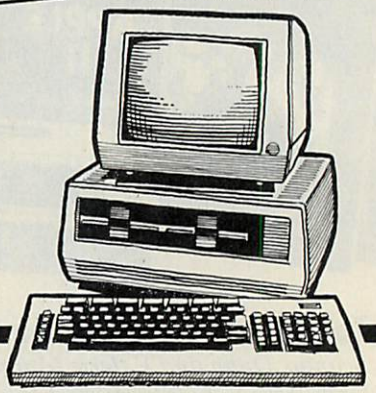

SYSTEMS SUPPLIED NATIONWIDE
APPOINTED DEALER FOR
ALL THESE MANUFACTURERS
FULL SUPPORT ON ALL
PRODUCTS!

SOFTWARE:

PEGASUS
ACCOUNTS
SALES, PURCHASE &
NOMINAL LEDGERS
INVOICING &
STOCK CONTROL

WORD PROCESSING
SUPERSCRIPT (CBM)
WORDSTAR (TRANSTEC)
SELECT (SIRIUS 1)

VISICALC
FINANCIAL PLANNING

D.M.S.
DATA MANAGEMENT
PACKAGE

TEC
DAISY WHEEL
PRINTERS

SCM SMITH-CORONA




Leeds Office

'PHONE FOR ADVICE, PRICE & DEMONSTRATION

Northern Address: 6 WIGTON GROVE,
LEEDS LS17 7D2 Tel: (0532) 688397

SOFTWARE HOTLINE:
01-263 7341

NORTH LONDON SHOWROOM:



Post to **CHROMASONIC Business Systems,** 48 Junction Road, Archway, LONDON N19 5RD

Please send me further details about your business systems. I am particularly interested in:

NAME .....

POSITION: .....

COMPANY: .....

ADDRESS: .....

TELEPHONE: .....

commodore



COMMODORE 500 SERIES

TERMS OF BUSINESS: Please add 15% VAT to all prices. Delivery charged at Cost. Prices valid for cover date of this magazine. Access and Barclaycard orders welcome.

POST YOUR COUPON NOW!

Access Buy it with Access VISA

● Circle No. 273

FREE!
SUPERLUXE DISK LIBRARY AND CALCULATOR OFFER see below...
FREE!

DISKING

THE WORLD'S FINEST DISKETTES
THE UK'S FASTEST SERVICE

DISKING INTERNATIONAL FREEPOST, LIPHOOK, HANTS GU30 7BR, UK
TELEPHONE (0428) 722563 TWX 849131 G

NEW 1983 OFFERS

FREE with **EVERY** TEN-PACK of disks from DISKING:-
1. Plastic Library box value £2.20
2. PVC bound Disk Directory value £1.00
3. The 'soft touch' Diskwriter value 50p
4. Plus a Superluxe Disk Library Gift Voucher value over £2.00

Five vouchers entitle you to a FREE SDL or six entitle you to an SDLX. Instructions and conditions with every Ten-Pack.



MEMOREX PROMOTION

✸ FREE CALCULATOR ✸

In addition to the above we are packing a FREE CREDIT CARD MEMORY CALCULATOR with every two Ten-Packs of ANY MEMOREX disks, provided you mention this ad.



DISKING SUPERLUXE DISK LIBRARY

The SDL keeps your valuable media dust free while at the same time allows instant selection of any disk. The SDL holds 20 disks & the SDLX holds 28 disks. They come boxed with full instructions & labelling.

SDL ...only **£9.95** SDLX ... only **£11.95**
Uprating conversion Kit **£2.00**
QTY SDL Prices EXC VAT add £2.00 for SDLX

1-4	5-8	10-19	20-49	50-99	100+
£9.95	**£9.45**	**£8.95**	**£8.60**	**£7.90**	**£7.15**



maxell

THE GOLD STANDARD

In an age when new standards are constantly emerging, one disk consistently meets or exceeds them all. Maxell have run disks over ten million passes, under conditions designed to find weak points and wear. They couldn't and you won't.

5.25 INCH DISKETTES

Certified for single OR double density and some with hub ring reinforcement.

	EX VAT
MD1-D S/Sided 48 tpi	**£24.90**
MD2-D D/Sided 48 tpi	**£32.90**
MD1-DD S/Sided 96 tpi	**£33.90**
MD2-DD D/Sided 96 tpi	**£43.90**

48 tpi suitable for 35 or 40 track operation.
96 tpi suitable for 77 or 80 track operation.
10 & 16 hard sector available at same prices.

8 INCH DISKETTES

	EXC VAT
FD1-128 S/Sided S/Density	£29.90
FD1-XD S/Sided D/Density	£34.90
FD2-XD D/Sided D/Density	£39.90

32 hard sector available at same prices.



Datalife

NOW WITH 5-YEAR WARRANTY

VERBATIM Datalife are not only the World's favourite media, but now carry an unconditional FIVE-YEAR WARRANTY. Minidisks are all double density with hub ring reinforcement.

5.25 INCH DISKETTES


	EXC VAT
MD525 S/Sided 48 tpi	**£22.90**
MD550 D/Sided 48 tpi	**£29.90**
MD577 S/Sided 96 tpi	**£28.90**
MD557 D/Sided 96 tpi	**£36.90**

48 tpi suitable for 35 or 40 track operation.
96 tpi suitable for 77 or 80 track operation.
10 & 16 Hard Sector available at same prices.

8 INCH DISKETTES

	EXC VAT
FD34-1500 S/Sided S/Density	**£24.90**
FD34-9000 S/Sided S/Density*	**£31.90**
FD34-8000 S/Sided D/Density	**£31.90**
FD34-4001 D/Sided D/Density	**£36.90**

Item 1 is Verbatim VEREX product and supercedes the FD34-1000
*For Critical applications
32 Hard Sector available at same prices



MEMOREX

Memory Excellence

The surface coating of MEMOREX diskettes incorporates a cross-linked binder system which optimises signal output to allow greater read/write accuracy. Protected by a special anti-static lubricant that enhances head performance and extends media life.
Certified for single OR double density and with hub reinforcement.

5.25 INCH DISKETTES

	EXC VAT
3481 S/Sided 48 tpi	**£19.90**
3491 D/Sided 48 tpi	**£25.90**
3504 S/Sided 96 tpi	**£27.90**
3501 D/Sided 96 tpi	**£34.90**

48 tpi suitable for 35 or 40 track operation
96 tpi suitable for 77 or 80 track operation
10 & 16 Hard Sector available at same prices

8 INCH DISKETTES

	EXC VAT
3060 S/Sided S/Density	**£23.90**
3090 S/Sided D/Density	**£26.90**
3102 D/Sided D/Density	**£32.90**

32 hard sector available at same prices

DISK DRIVE HEAD CLEANING KITS

Prevent head crashes and ensure efficient error-free operation. Enough for 26 bi-monthly cleans & a lot cheaper than a service call!

CK5 for 5.25" disk drives **£16.00**
CK8 for 8" disk drives **£16.00**
Prices EXC VAT.

PLASTIC LIBRARY BOXES

Unbeatable value (FREE with every ten disks ordered)

LB5 for minidisks..... £2.20
LB8 for 8" disks £2.30
Prices EXC VAT

TRADE CORNER

FREE CREDIT CARD CALCULATOR AND SDL GIFT VOUCHER

Write to us on your letter headed paper, and ask for our special TRADE PACK. You will receive an SDL Gift Voucher and details of our special prices and offers. Our diskette prices allow you good margins AND their very high quality ensures that you can sell 'em and forget 'em! Furthermore we enclose a FREE CREDIT CARD CALCULATOR and SDL voucher with every 100 disks shipped. Those of you selling Software or Hardware will be interested in our vendor branding brochure, which will also be enclosed.

U.K. P&P RATES INC INS. EXC VAT

Minidisks 1-2 PACKS each pack @ 95p
Minidisks 3-5 PACKS each pack @ 75p
Minidisks 6-9 PACKS each pack @ 60p
Minidisks 10+ PACKS *POST FREE*
8" disks 1-2 PACKS each pack @ £1.50
8" disks 3-5 PACKS each pack @ £1.00
8" disks 6-9 PACKS each pack @ 80p
8" disks 10+ PACKS *POST FREE*
LB5 5.25" Library box 1-4 off @ 40p
LB5 5.25" Library box 5-9 off @ 30p
LB5 5.25" Library box 10+ @ 20p
LB8 8" Library box 1-4 off @ 60p
LB8 8" Library box 5-9 off @ 45p
LB8 8" Library box 10+ off @ 30p
For CK5 5.25" Cleaning kit read Minidisk postal rates 10+ POST FREE. For CK8" Cleaning kit read 8" disks postal rates 10+ POST FREE. For SDL or SDLX (5.25" version only) read Minidisk postal rates.

NORMAL ORDERS

We accept Armed Forces and all Ministry of Defence Establishments orders over £50.00 in value. All other customers cheques with order please payable to DISKING. If you are a large establishment, and cannot raise cheques without an invoice please post or telephone us your order, and we will send a pro-forma invoice by return, for your accounts department to pay against.

CREDIT CARD ORDERS

We welcome Access (Mastercharge), Barclaycard (VISA) and Diners Club International, and there is NO credit card surcharge. You may write your c/card No. on your order or telephone the order day or night, 365 days a year. You may speak for as long as you like, and don't forget to give the following details:
1. The Cardholder Name
2. The Cardholder Address
3. Delivery Address if different
4. Day-time telephone number
5. First Class or ordinary post
6. Your Credit Card Number
7. What you wish to Order

You may leave the rest to US!!

URGENT ORDERS

Either post your cheque not forgetting to stamp it FIRST CLASS, or telephone your order with credit card No., mentioning in either instance that your order is URGENT. You may then pay FIRST CLASS POST for your goods, if required.

FIRST CLASS RATES	EXC VAT
First TEN-PACK (Mini or 8")	£1.80
Second and subsequent	£1.30

Tel (0428) 722563 Telex 849131 Telber G
To: DISKING FREEPOST, Liphook, Hants, GU30 7BR. U.K.

QTY	DESCRIPTION	PRICE EXC VAT
		£
		£
		£
	TOTAL GOODS VALUE EXC. VAT	£
	TOTAL DELIVERY AND INSURANCE	£
	SUB TOTAL EXC. VAT	£
	VAT	£
	VALUE OF CHEQUE PAYABLE TO DISKING	£

Name: .....
Address: .....
.....
..... Tel No: .....
Please charge my credit card No: .....

WELCOME

PC4

VAT invoices always sent with goods. Prices based on U.S. Dollar, correct at time of going to Press.

● Circle No. 222

ATA THE PRICE BEATERS

apple®

A Fresh new 48K Apple

Only £499

(While stocks last)

Software

PFS	£75
PFS Report	£59
DB Master 3	£139
Data Factory 5	£199
Mathemagic	£55
Graphmagic	£55
Locksmith 4.1	£65
Dos Tool Kit	£42
Apple Pascal	£149
Applewriter	£39
Applewriter II	£85
Wordstar 3.0	£155
Mailmerge	£59

Visasc Orbit Accounting Modules: Prices on application - **Please phone for list.**

Visicalc

Latest packaging versions

Visicalc	£121
Visitrend / Plot	£149
Visidex	£149
Visifile	£159
Visischedule	£180

Disk Drives

Apple disk drives at these incredible low prices!

With Controller	£270
Without Controller	£220

Apple III

128K	£1995
256K	£2495
Secondary Disk Drive	£240
Profile Hard Disk	£2095

Please phone for comprehensive list.

APPLE IIe AVAILABLE NOW ONLY £645 phone for details

Hitachi 12" Green Screen Monitors Only £99 FREE Anti-Glare Screen

Interfaces

Parallel Printer Card	£70
Serial Printer Card	£105
Pascal Card	£105
Digitek Colour Card	£99
Z80 System (New version)	£220
80 Col System (Videx)	£200
Soft Switch (Videx)	£25
16K RAM Card	**£48**
128K RAM Card	**£350**

Epson Printers Unbeatable Value!

MX80T (Type 3) £290
MX80F / T (Type 3) .. £315
MX100F / T (Type 3) £420
Other printer prices on application

Accessories

Numeric Keypad	£75
Joystick (TKC)	£29
Paddles	£19
Cooling Fan	£55
10 BASF 5¼" Disks	£20
Listing Paper	£18
Locking Disk Box	£20

IBM

Unbeatable Value

IBM PC 64K UK Spec - 240v power supply £2749

System Expansion

64K Memory Board	£277
128K Memory Board	£382
192K Memory Board	£476
256K Memory Board	£572
512K Memory Board	£980
Baby Blue	£392
Big Blue	£392

Hard Disks

5 mb Winchester	£1648
12 mb Winchester	£2197
20 mb Winchester (with tape backup)	£2699

Other Accessories

Mono Graphics Monitor	£155
Colour Monitor	£625
Colour / Graphics Card	£340
Asynchronous Comms Card	£170
Printer adapter	£63
IBM Joysticks	£42
Light pen	£159

Phone for details

IBM Software

IBM Pascal Compiler	£359
IBM Cobol Compiler	£838
IBM Fortran Compiler	£420
IBM Basic Compiler	£409
IBM Macro Assembler	£119
UCSD P - System Pascal	£749
UCSD P - System Pascal Compiler	£210
UCSD P - System Fortran 77	£749
Fortran Compiler 77	£210
CP / MC86	£287
Visicalc 256K	£159
Supercalc	£175
Time Manager	£108
Volkswriter	£146
Easywriter II	£229
Wordstar	£245
Mailmerge	£89
dBase 2	£329
Desktop Plan	£196
Graph Magic	£99
Visitrend / Plot	£189
Visidex	£166
Visifile	£156
Micro-finesse	£499

Phone us for a Better Deal

All M.P.S.L. Business Accounting Software in stock at unbeatable prices, please phone for list.

While Stocks Last

Games

Championship Black Jack	£28
Microsoft adventure	£42
Deadline	£42
Zorks 1 to 3 (each)	£29

Hewlett Packard 7470A Plotter

RS 232 or HPIB Interfaces

Outstanding Value

@ £975

Complete range of Desktop Computer in stock

SIRIUS 1

ACT Sirius I 128K with 1.2 mb S / S Disks	£2095
ACT Sirius I 128K with 2.4 mb D / S Disks	£2549
ACT Sirius I 128K with 1.2 mb D / S Disks and 10 mb Winchester	£3995
External 10 mb Winchester Hard Disk	£2549
128K Additional Memory	£349
384K Additional Memory	£795

Software

C Basic 86	£159
Level II Cobol with forms 2	£549
Microsoft Basic Compiler	£239
Microsoft Pascal Compiler	£299
Microsoft Fortran Compiler	£299
Microsoft Cobol Compiler	£439
CP / M Programmers Kit	£169
MS 6 Dos Programmers Kit	£169
IEEE 488 Package	£169
Graphix / Bisigraf Graphics Pack	£169

ACT Pulsar Software at unbeatable prices

commodore

COMPUTERS

4016 16K	£495
4032 32K	£625
8032 32K	£799
8096 96K	£1075
Super Pet 9000	£1345

DISK DRIVES

2031 171K Single D / Drive	£349
4040 343K Dual D / Drive	£625
8050 950K Dual D / Drive	£799
8250 2 mb Dual D / Drive	£1195
9060 5 mb Hard Disk	£1795
9090 7.5 mb Hard Disk	£2245
C2N Cassette Unit	£36

Software prices on application

Delivery

Please add 1.5% to your order for UK delivery charge. Payment accepted by cash / bankers draft / building society cheque for immediate despatch.

All goods are normally in stock however, please confirm before collecting.

We are open from 9.30am to 5.00pm Mondays to Saturdays. Credit of 30 days is available on official orders from PLCs, Hospitals and educational establishments, subject to a 5% surcharge.

Otherwise cheque with order. Please allow 10 days for cheque clearance.

Export orders welcome!

Come in & Take Away

Mail Order

We accept both Access and Barclaycard subject to a 5% surcharge. Telephone orders are welcome on 01-833 0044(4 lines)

All prices plus 15% VAT

E. & O.E.

ata systems

4, ALBION HOUSE, 1, BACK HILL LONDON EC1

01-833 0044(4 lines) Telex 25102 Albeta G

● Circle No. 275

Please phone for free price list


A

AT THESE PRICES YOU CAN SWITCH OVER TO A PROFESSIONAL VIDEO MONITOR

The Kaga range of monitors is designed specifically for use with micro-computers, offering flicker-free character and graphic displays. There is a Kaga monitor suitable for use with your system, be it an Apple, Commodore, BBC Acorn, Osborne, Tandy, NEC, Sharp or any other popular micro.

- High-res. 12" B/W inc. Cable £86
- High-res. 12" Green inc. Cable £96
- High-res. 12" Amber inc. Cable £102
- 12" RGB Colour Monitor (med. res.) £225
- 12" RGB Colour Monitor (high res.) £276
- Apple II or IIe RGB Card + Cable £75
- RGB Cable for Apple III £8
- RGB Cable for IBM P/C £8
- RGB Cable for BBC £8

PHONE FOR LATEST LOW PRICES

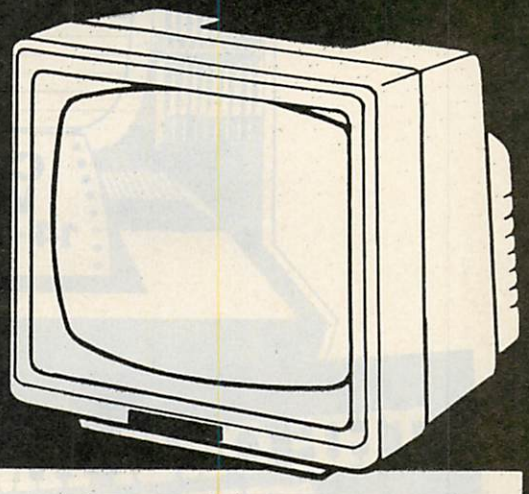

PRINTERS

EPSON PRINTERS	£
MX82	345
MX80 Type III	296
MX80FT Type III	330
RS232 Interface	30
RS232 Interface with 2K Buffer	53
MX100 Type III	420
Serial Interface Type III	60
IEEE – 488 Parallel Interface	37
Apple Interface (Non-Graphics) + Cable	49
Apple Interface (Graphics) + Cable	57
TRS80 Interface	22
Ribbon for MX80/82 Series	5
Ribbon for MX100 Series	9
CENTRONICS PRINTERS	
**********	
*SPECIAL OFFER	*
*737 – 2 Parallel (Brand new, sealed and boxed without	*
*warranty)	215 *
**********	
737 – 2 Parallel (with warranty)	299
1 Cartridge Ribbon for 150/152	4
1 Zippack Ribbon for 737/739	3
ANADEX PRINTERS	
DP9000A Serial/Parallel (Graphics)	945
DP9001 Serial/Parallel	1000
DP9001A Serial/Parallel (Graphics)	945
DP9500L Serial/Parallel	948
DP9500 Serial/Parallel (Graphics)	1024
DP9500A Serial/Parallel (Graphics)	1006
DP9501 Serial/Parallel (Graphics)	1076
DP9501A Serial/Parallel (Graphics)	1006
DP9620A Serial/Parallel (Graphics)	1093
Ribbon for DP9000/9500 Series	11
Apple II Graphics Interface Card	120

WALTERS PRINTER – BRITISH MADE	£
120 – Parallel	310
I.D.S. PRISM PRINTERS	
Prism 80 Full Option inc. Colour	1334
Prism 80 – Graphics/Sprint/Auto Sheet Feed	1092
Prism 80 – Graphics/Sprint	999
Prism 132 Full Option inc. Colour	1514
Prism 132 – Graphics/Sprint/Auto Sheet Feed	1270
Prism 132 – Graphics/Sprint	1043
Black Ribbon for Prism	11
4 Colour Process Ribbon for Prism	22
4 Colour Primary Ribbon for Prism	22
INTEGREX COLOUR PRINTERS	
CX80 Colour – Parallel	707
Apple II Interface Card	88
CX80 Colour – RS232 Serial	767
CX80 Colour – IEEE	755
CX80 Colour – RS232 3.7K Buffer	830
SMITH CORONA DAISY WHEEL PRINTERS	
TP1 Daisy Wheel – Parallel	430
TP1 Daisy Wheel – Serial	430
IEEE Interface Box for TP1	67

PRINTER INTERFACE CARDS FOR APPLE II	
CCS Serial Printer Card	100
CPS Multifunction Card	108
CPS Printer Cable (Please Specify)	10

APPLE INTERFACE CARDS AND ACCESSORIES

MC 8-Slot Expansion Chassis	361	Analog Output Board 4 Channel	167
Clock Calendar Card	149	Analog Output Board 8 Channel	177
Supertalker – for talking programs	151	Digital Interface	173
ROM – Plus Board	80	Analog Input Board 16 chl. 8 bit	150
RAMplus	99	Analog Input Board 16 chl. 12 bit	280
ROMwriter	96	Videx 80 Column Card	180
Copyplus ROM	28	Omnivision 80-col Display Card	168
Ramex 128K	245	SUP'R Terminal Card	170
Ramex 16K	64		

MONITORS

KAGA VIDEO MONITORS	£
High – res. 12" B/W Inc. Cable	86
High – res. 12" Green Inc. Cable	96
High – res. 12" Amber Inc. Cable	102
12" RGB Colour Monitor (med. res.)	225
12" RGB Colour Monitor (hig res.)	276
Apple II or IIe RGB Card + Cable (Please Specify)	75
RGB Cable for Apple III	8
RGB Cable for IBM P/C	8
RGB Cable for BBC	8
APPLEFAN & ACCESSORIES	
Applefan Standard Unit	58
Cassette Connector Set	4
Disc Drive Connector Set	14
Eurocolour TV Output	4
Games Connector Set	9
Monitor 40/80 Char. Display Switch	9
Mains Output Set	7
Printer Connector Set	14
Graphics Tablet Connector	13
DEMONSTRATION/TRANSIT CASE	
For Apple + 2 Disc Drives	41

Terms of business: Cash/cheque/P.O.S. with order.

P & P: Interface cards and ribbons – per unit £1
Printers, monitors, and cases – per unit £6

VAT: All prices are exclusive of VAT. Please add 15% to the total cost including P & P.

Goods damaged in transit will be replaced FOC.

Please send me the following goods:

Total (inc. P&P) _____ 15% VAT _____

I enclose cash/cheques/P.O.S. for sum of _____

Name _____

Address _____


AIMGRAM AIMGRAM LTD 31 Roman Gardens, Kings Langley, Herts WD4 8LG Tel: Kings Langley **(09277) 68211**

● Circle No. 223

THE ASSOCIATION OF LONDON COMPUTER CLUBS PRESENT



THE ONLY AMATEURS' EXHIBITION
THE PROFESSIONALS ENVY

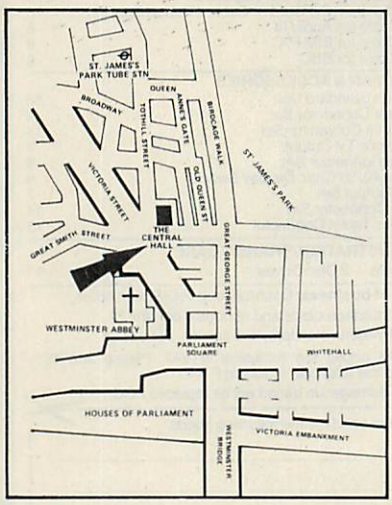

Software, Hardware, Peripherals and bits for all Micros

FREE unbiased advice from the club stands

Robots and other club projects

The popular bring and buy sale will again be held on Saturday (only)
Turn up with what you've got!

A great day out for all the family


PRICE OF ADMISSION £1.50
£1.00 Children

10am–6pm

TO BOOK A STAND
RING 01 360 0021

● Circle No. 274

Which one's for you?

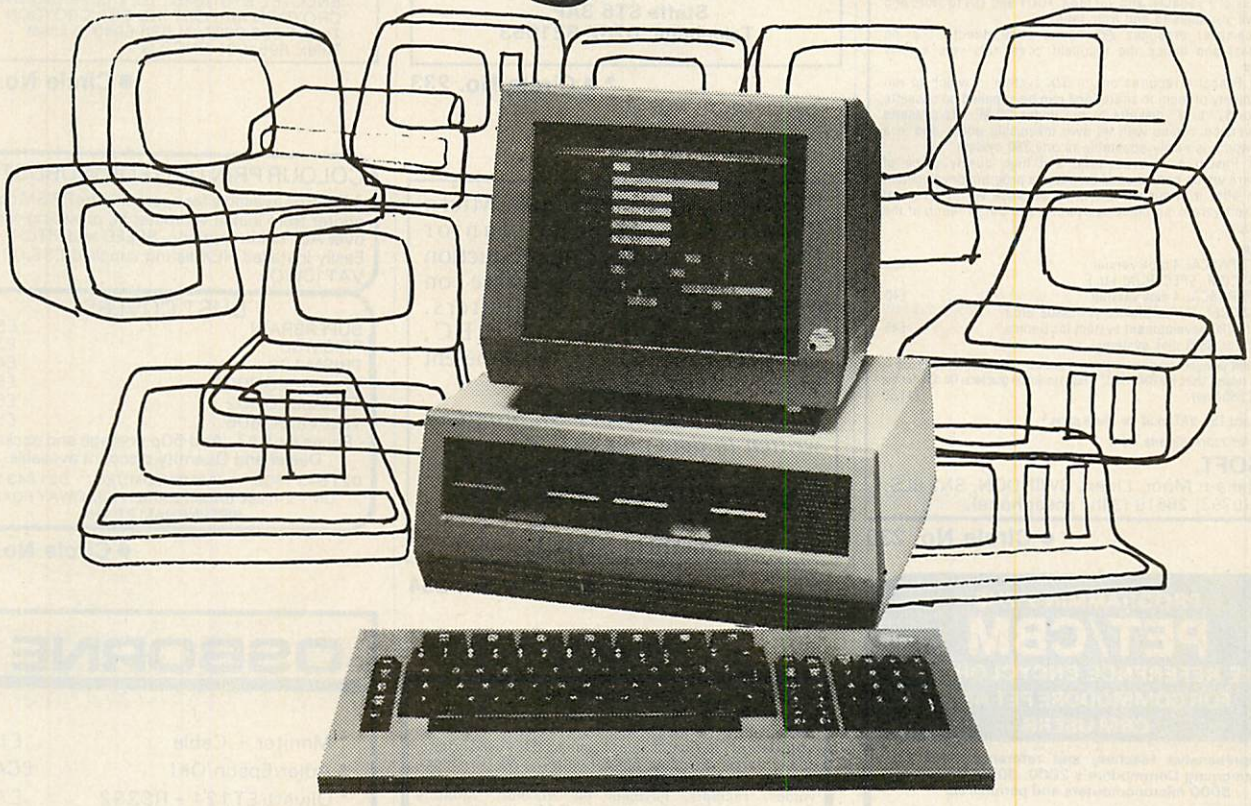

We choose the ACT Sirius 1

. . . and we make it our business to know just what the best options are in the micro jungle.
We specialise in Management Information Systems for large organisations offering a complete and comprehensive service to financial and business managers.

- **We will identify the hardware and software options**
- **We will design and develop systems to meet your needs**
- **We will train you and your staff**
- **And we back you up by giving ongoing support**

With a customer base that reads like the Times Top 1000, you can be sure that our systems specialists speak your language, no matter what the industry.

Applied Micros

Applied Micros Limited, The Genesis Centre, Birchwood Science Park, Warrington.
Tel: (0925) 819939

(SIRIUS is the registered trade mark of Applied Computer Techniques (Holdings) p.l.c.)

So if you want to plan a system, install a system, develop an existing system or just want to know more about Management Information Systems – speak to Applied Micros and find out why we choose the ACT SIRIUS I to give you the full service.

Applied Micros also offer the following technologies and products: dBASE II, MicroModeller, SuperCalc, Multiplan Wordstar . . . Networking, Communications, Hard Disks . . . We are also a PULSAR SOFTWARE CENTRE.

Cut out and post this coupon if you want to find out how your organisation can benefit from our experience in Management Information Systems.

Name _____

Position _____

Name of Company _____

Address _____

_____

Tel. No. _____

● **Circle No. 224**



HISOFT PASCAL 4
INCREDIBLE SPEED
INCREDIBLE PRICE

Hisoft are pleased to announce their latest Pascal compiler, the fastest and most powerful so far, at an amazingly low price.
Hisoft Pascal 4 is an almost complete implementation of the Pascal language as given in the Pascal User Manual and Report (Jensen/Wirth) including POINTERs, RECORDs and (for disk systems) FILEs. All major Pascal statements and data structures are supported together with many useful additions such as PEEK, POKE, USER, ADDR (returns the memory address of a variable) and, for tape, TOUT and TIN to store and retrieve variables to and from tape.
The compiler produces Z80 object code directly (i.e. no P-codes) and hence the resultant code runs very quickly indeed.
Hisoft Pascal 4 requires only a 32K system in which to run (with plenty of room to spare) and can be supplied on cassette tape or 5¼" or 8" diskette to run under CP/M. The cassette tape version comes with its own tokenising editor and in a form which is easily adaptable to any Z80 system.
Hisoft Pascal 4 is a powerful and high quality piece of software which can be used for serious program development — we offer it at such a low price because we believe that such software is normally overpriced and out of reach of the individual.

Prices:

HISOFT PASCAL 4 tape version (NASCOM, SPECTRUM etc.)	£35
HISOFT PASCAL 4 disk version (NASCOM, SUPERBRAIN, RML380Z etc.)	£40
ZDEV (a Z80 development system for Gemini G805 or G809 disk systems)	£45
FUNCTION (a superb program to plot and analyse mathematical functions — very robust. Uses the RML 380Z's high resolution graphics. On disk for the RML 380Z only.	£11.50

Please add 15% VAT to all the above prices.

Send for more details from:

HISOFT,
60 Hallam Moor, Liden, SWINDON, SN3 6LS.
Tel. (0793) 26616 (24hr ansaphone).

● Circle No. 230

PROGRAMMING THE PET/CBM
THE REFERENCE ENCYCLOPEDIA FOR COMMODORE PET AND CBM USERS

Comprehensive teaching and reference book on programming Commodore's 2000, 3000, 4000 and 8000 microcomputers and peripherals

Many programs, charts and diagrams. 17 chapters, appendices and index, iv+504 pages. Paperback, ISBN 0 9507650 0 7. Price on U.K. and Europe **£14.90** each (includes post, packing). **LEVEL LTD., PO Box 438, Hampstead, LONDON NW3 1BH. Tel: 01-794 9848.**
Five or more **£12.90** each;. plastic covers 45p.
From dealers or booksellers, or direct:

Send orders to: **LEVEL LTD., PO Box 438, Hampstead, LONDON NW3 1BH.**
send .....copy/ies Programming the PET/CBM

I enclose cheque/P.O. for £.....

NAME.....

ADDRESS.....

.....

.....

● Circle No. 231

12" GREEN PHOSPHOR MONITORS £42!

+£4 p&p *INCLUDES* VAT
12mHz for 40, 80 column displays

GUARANTEED ORDER DIRECT VIA:

TELETONE LTD., 13 SMALL STREET BRISTOL BS1 1DE (0272) 277462

● Circle No. 232

MAIL ORDER BOOKS
A LARGE SELECTION OF BOOKS AND SOFTWARE FOR MANY MAKES OF COMPUTER
WE ACCEPT GOVERNMENT AND LOCAL AUTHORITY ORDERS
ACCESS — BARCLAY
SEND FOR TITLE LISTS (STATING INTEREST)
PHONE OR CALL IN AT:—
COMPUTER BOOKS
14 William Clowes Street,
Burslem, Stoke on Trent,
Staffs ST6 3AP.
Telephone: 0782-821053

● Circle No. 233

Personal and Business Micro Retailer requires 3 Junior Programmers to work on production of fast arcade type software on popular personal computers. Experts required on BBC, DRAGON, VIC etc. Competent Machine Code essential.

Send details of types of programs written to date plus C.V. to:

Mr. M. J. Mahony
SUPERIOR SYSTEMS LTD.,
178 West Street,
Sheffield SJ 4ET.

● Circle No. 234

SHOP KEEPERS

Our **Mr. Retailer** Programme makes your **cash register** Redundant. In return Mr. Retailer will keep all your books up to date at the Time of Sale of your goods as used in large chain stores. Including Stock Control, VAT, Creditors, Debtors, Salesmans Commission, Trial Balance. Issues invoices, receipts, Payment on Account. Monthly Statements. Invaluable reports available at any time. Untrained shop or office staff can operate. Written for business men not for programmers. CP/M Based.

Superbrain 64K 350K	£1495.00
Shelton Signet 2FS 64K 400K	£1212.00
Epsom MX80/FT-3	£366.00
Mr. Retailer (by mail order only)	£375.00
Mr. Retailer	£975.00

DEMONSTRATION CLEARANCE

Superbrain QD 700K	£1550.00
Epson MX80/FT-2 (with RS232 interface)	£325.00
Paper Tiger 440 (few hours use only)	£245.00

TRS 80 16K LII Software
Original Games. Superb Graphics. 3 on tape £5
Also 16K business software tapes

ACCESS COMPUTERS
2 ROSE YARD MAINSTONE
KENT. TEL (0622) 58356

● Circle No. 235

CHALLENGE.....AND PROFIT

POOLS PREDICTION

"Computer aided forcasting can significantly increase the chance of winning"

THE DATA . . .

* Available for your analysis — the complete record of all English Football League games 1977-82 (20,280 matches).
* Not simply win-lose-draw record, but the *actual scores and dates*, allowing sophisticated analysis.
* Simple numerical array format.
* Full documentation.
* Supplied with starter analysis programs in BASIC and PASCAL.

•TAPES (2 years data) £7.50
•DISCS (5 years data) £15.00
•Apple DOS/Pascal/CPM Superbrain •Rair •Pet •TRS 80 •Dragon •ZX-81 (16K) •Spectrum •most others — please enquire

Selec Software, 37 Councillor Lane, Cheadle, Cheshire, SK8 2HX. 061-428 7425.

● Circle No. 236

STILL the lowest prices anywhere

FLOPPY DISK DRIVES

5¼" TANDON + CDC
Shugart Compatible
SINGLE SIDED–DOUBLE DENSITY **£95**
DOUBLE SIDED–DOUBLE DENSITY **£165**

SYSTEMS ENCOTEL

ENCOTEL SYSTEMS LTD. 7 IMPERIAL WAY
CROYDON AIRPORT IND EST. CROYDON
Tel: 01 686 9687/01 680 6040 (6 lines)
Telex: 8951921 ENCO G.

● Circle No. 237

COLOUR PRINTING FOR WORDSTAR

A Patch is available for operating the PRISM colour printer from inside Wordstar III, providing control over ALL colour options, SPEED and PITCH. Easily installed HEX listing supplied £35.00., + VAT (CWO).

DUST COVERS

SUPERBRAIN	£5.50
PRISM 80	£3.50
PRISM 132	£4.50
TELEVIDEO 800A	£5.50
TELEVIDEO 802	£5.50
TELEVIDEO 806	£5.50

Prices ex-VAT. Add 50p postage and packing.
Dealer and Quantity discount available.
021 643 1609 JAEMMA LIMITED 021 643 1609
UNIT 24, LEE BANK HOUSE, HOLLOWAY ROAD
BIRMINGHAM B1 1HR

● Circle No. 238

OSBORNE 1

* Monitor + Cable	£104
* Adler/Epson/OKI	£CALL
* Olivetti ET121 + RS232	£799
* OSBORNE	£CALL
* Games for Osborne	from £19.95

We specialise in Osborne & hold large stocks of above.

CALL FOR SUPERB PRICES

FRASER ASSOCIATES
Buckingham (02802) 6087

● Circle No. 239

BookKeeper
BUSINESS ACCOUNTING SYSTEM

A simple self-contained accounting system — available now on CP/M-based microcomputers.

BookKeeper will help you to maintain orderly books of account — without the complexities of a fully integrated ledger system.

For further details, contact:

Mike Lewis Consultants Ltd.,
48 Willoughby Road,
London N.W.3
Tel: 01-794 3886

● Circle No. 240

SHOPWINDOW

Every computer needs a

CHATTERBOX!

"OK Spock, you win *this* time....

NEW!

SAVE £££s

ONLY £49

for

ZX81
SPECTRUM

NASCOM, VIC, PET, BBC, APPLE, TRS80, IBM, CRAY, ETC. (Please state)

At last! Genuine phonetic synthesis at a sensible price. Gives your computer an *unlimited* vocabulary (nothing more to buy!). Self contained speaker/amplifier, Sinclair connector etc, **PLUS** Expansion socket for BIG EARS **AND** Monitor socket for Music Board. Full instructions, technical notes and programme examples supplied with this outstanding educational unit.

OR COMPLETE D.I.Y KIT £39

DEALER ENQUIRIES WELCOME

As seen on BBC TV "Computer Programme"

BIG EARS

STOP! GO! LEFT! RIGHT!

SPEECH INPUT FOR ANY COMPUTER



Hugely successful Speech Recognition System. complete with microphone, software and full instructions.

BUILT TESTED & GUARANTEED **ONLY £49**

PLEASE STATE COMPUTER: UK101, SPECTRUM, ATOM, NASCOM2, Vic 20, Micron, ZX80/81, PET, TRS80, MZ80K, APPLE II, BBC MICRO

NEW: FAST MACHINE CODE FOR ZX 81/SPECTRUM £7.40

ZX81/SPECTRUM

MUSIC SYNTHESISER (STEREO)
+ 16 LINE CONTROL PORT

Play 3-part music, sound effects, drums etc. Full control of attack, decay and frequency. Input/Output lines provide control and monitor facility for... Home Security, Robot Control, Model Railway etc. etc. Works with or without 16K RAM.

Add keyboard to make a live performance polyphonic synthesiser! *Full instructions/software included.*

AMAZING VALUE AT ONLY £19.50 (KIT)
Extra 23 way connectors at £2.60
£25.50 (BUILT)

THE COMPOSER
Music Programme for above synthesiser.
Enter and play 3 part harmony.
Includes demonstration tunes. Recommended £7.40

COLOUR MODULATOR KIT £15
RGB in, PAL/UHF out (not for ZX) BUILT £20

SPECIAL OFFER I.C. £18
SPEECH OUTPUT CHIP SX-01
Phoneme Speech Processor DATA £0.60

Please add VAT at 15% to all prices. Barclay/Access orders accepted by telephone

All enquiries S.A.E. please

WILLIAM STUART SYSTEMS Ltd

44 Bedford Gardens
Kensington
London W8 7EH
Telephone 01 221 1131

VISA

● Circle No. 241

---

calcsheet78

financial planning and modelling for the CBM 8032 and CBM 8096

NOT JUST ANOTHER SPREADSHEET PROGRAM BUT A COMPREHENSIVE SUITE OF PROGRAMS

IT WILL sense automatically if you have a 32K or 96K machine
IT WILL create dt (TM) data transfer files which can be accessed directly, via the **calcsheet78(TM)** or word processing programs (eg WordPro)
IT INCLUDES a specimen VAT spreadsheet which will calculate tax paid and received and how much tax due to or from the Customs for each quarter
IT INCLUDES examples of invoicing and book-keeping using the spreadsheet
Concise, comprehensive manual supplied
All this for just £75 inc VAT (plus £1 p&p)
Manual only £5 plus 50p p&p (deductible if **calcsheet 78(TM)** is ordered subsequently)
Also available: **USING VISICALC**, a simple guide to the world's most famous spreadsheet program (£5 plus 50p p&p)
Available soon: **VICtory over B*A*S*I*C**, a programming manual for the VIC20 user
(£2.50 plus 50p p&p if ordered now, £4 plus p&p if ordered after publication)

ESSENTIAL SOFTWARE
4 Fanshaw Avenue, Barking, Essex

● Circle No. 242

INSURE YOUR COMPUTER

Impact damage, Fire & Theft Insurance for your Computer, Equipment:

£1 to £1,500 cover ..... £8.00 p.a.
£10 (excess) x/s

£1,500 to £2,500 ..... £16.00 p.a.
£15 x/s.

For details:

KGJ Insurance Brokers,
6 Hagley Road, Stourbridge,
West Midlands, DY8 1QG
Tel (03843) 5333/2545

● Circle No. 243

VDU DESK

TEAK LAMINATE FINISH

Assembly in seconds without tools

Other sizes

TRADE ENQUIRIES WELCOME



£37.97 + VAT WITHOUT TOP SHELF

FOR 24"x24" size
Details available

OFCO LTD

65 TREDEGAR SQ.
LONDON E3 54E
Tel:01-981 7301

● Circle No. 244

SuperBios

1000 UNITS SHIPPED

Free Upgrades

DURING APRIL

FOR DETAILS:
TEL: 06076 65676
MICROMOPS LTD. · 53 · ACTON RD.
LONG EATON · NOTTINGHAM · NG10 1FR

● Circle No. 245

THE POWER BANK

sealed for life batteries included

system compatible sinc wave output



THE UNINTERRUPTABLE POWER SUPPLY WHICH WILL:-
* Continue to operate your Micro Computer System when the mains electricity supply fails
* Suppress dangerous spikes and surges
*Stabilise voltage and frequency to your sensitive equipment.

Operate your Micro/Disk/Printer System from a Power Bank and forget about a disabling break in the electricity supply

120 VA UNIT £320 250 VA UNIT £450

Please contact: POWER TESTING (SALES) LTD
on 0277 233188 Telex 24224 Monref G (ref 586)
65a Shenfield Rd, Brentwood, Essex CM15 8HA

● Circle No. 246

"ZX GRAPHICS PROGRAMMING MADE EASY"

Full Colour A4 Manual, 24 pages packed with ZX Graphics Programming techniques and ideas for games and 'serious' Programs. Written in 'easy to understand' language and illustrated at every stage.

Ideas include:
Information Graphics
Sketch Pads.
Saving your 'Art'.
Making serious programs interesting.
Graphics Stringing.
ZX Printer Graphics



£1·50
(INCLUDING U.K. POSTAGE)

Print 'n' Plotter Products (PC)
19 Borough High Street,
London SE1 9SE.

● Circle No. 247

SOUTHAMPTON

* SUPERBRAIN * COLUMBIA P.C. *
* SIRIUS * LSI M3 *
* PRINTERS - ALL POPULAR MODELS *

BEST PRICES AVAILABLE

PROFESSIONAL INSTALLATIONS FOR:-
* Small businesses * Accountants * Solicitors *
* Estate Agents * Word processing / mailing - applications * Newsagents *

APPLIED COMPUTERS

14/15 Hanover Buildings, Southampton SO1 1JX
Telephone: (0703) 36936 Telex: 477455

● Circle No. 248

MICROWARE

(London Ltd)

COMPLETE DISC DRIVE SUB SYSTEMS

For Tandy; Video Genie; Nascom

AND ALL POPULAR MICROS

SINGLE UNITS **£175**
DUAL UNITS **£295**

BBC MICRO

SINGLE UNIT FROM £135

Includes PSU and attractive desk top cabinet

- Fully guaranteed CDC disc drives
- Cast aluminium chassis
- 5 mili sec track to track
- 250k; 500k or 1MB
- Industry compatible

Microware

(London Ltd)
637 Holloway Road,
London N19
Tel: 01-272 6237
01-272 6398

● Circle No. 249

SHOPWINDOW

SEARCHING FOR BEST PRICE

FOUND BEST PRICE . . . GO TO ORCHARD

		RRP	
PET			
C2N	CASSETTE	£55	Our own transport delivers nation-wide weekly. All you need is our *Best Price* Quotation. Contact us now! For super service.
4016	16K	£550	
4032	32K	£695	
8032	32K	£895	
8096	96K	£1195	
DISK DRIVES			
2031	170K	£395	
4040	343K	£695	
8050	1M	£895	
8250	2M	£1295	
9060	5M	£1995	
9090	7.5M	£2495	
PRINTERS			
4022P	80COL BIDIR	£395	
8023	136COL	£895	
8300	DAISY	£1395	

Our price is unprintable.
Contact NOW for best price quotation.

If you know what you want why wait?

ORCHARD COMPUTER SERVICES
ORCHARD HOUSE, 21 ST. MARTINS ST., WALLINGFORD, OXON.
TEL: WALLINGFORD (0491) 35529

● Circle No. 250

WORCESTER COLLEGE OF HIGHER EDUCATION
Summer School 1983

USING MICROCOMPUTERS (5th-12th August)

A practical course on using small computers for business, administrative, educational and domestic purposes.

Offers intensive hands-on experience with a wide range of computer systems.

Alternative modules for beginners and those with some experience.

MICRO—ELECTRONICS (29th July-5th August)

The Course aims to provide a wide range of experiments and ideas for school projects. Most of the course time will be spent on experimental and practical work. No previous knowledge of electronics of micro-electronics is assumed but for course members with such expertise there will be the opportunity for more advanced work.

For further information please write to the Director of Summer School, Worcester College of Higher Education, Henwick Grove, Worcester WR2 6AJ. Telephone No. (0905) 428080.

Residential accommodation is available at the College.

● Circle No. 251

OSBORNE 1

* Monitor + Cable	£104
* Adler/Epson/OKI	£CALL
* Olivetti ET121 + RS232	£799
* OSBORNE	£CALL
* Games for Osborne	from £19.95

We specialise in Osborne & hold large stocks of above.

CALL FOR SUPERB PRICES

FRASER ASSOCIATES
Buckingham (02802) 6087

● Circle No. 252

MICROCOMPUTER INSURANCE

Comprehensive cover at a reasonable premium:

- All Risks Cover (incl. Transit) — up to £8,000 for £20
- Increased Cost of Working — to reinstate lost data
- Breakdown & Derangement — alternative to maintenance agreement

Write with details of equipment to:

Geoffrey Hoodless & Associates
Freepost (no stamp required)
Woking
Surrey GU21 3BR
Tel: Woking (04862) 61082 (24 hrs)

● Circle No. 253

DISKS STATIONERY PRINTERS

Special offers on disks, stationery and printers

Floppy diskettes in boxes of 10
5¼" s/s s/density s/sectored only £15.00
8" s/s s/density s/sectored only £15.00
(Add £1.00 box P & P + Vat.)

Continuous stationery-1000 sheets
9½"×11" Plain single part only £4.95
9½"×11" Plain (with ½" margins) only £5.96
14½"×11" Lined or plain single part only £7.00
(Includes delivery, excludes Vat.)

Printers from Newbury Labs
Special Introductory Offer
A free box of 9½"×11" Stationery with every Newbury Printer purchased

The 8510 (11" carriage) only £480.00
The 1550 (15" carriage) only £650.00

For the printer that has everything standard, buy The Newbury 8510 or 1550. Price includes 6' cable

CDP Consultants Limited
WICKEN ROAD CLAVERING
ESSEX CB11 4QT
Ring Clavering (079985) 617

● Circle No. 254

CAN YOUR MICRO READ THIS?

5 000201 460790

Bar-code identification for . . .

PET/CBM APPLE BBC


Bar-codes give a speedy and error free means of data entry and provide a foolproof method of identification for any item or document. Typical uses include stock control, libraries, filing systems, security & checkpoint verification, point of sale terminals, spare parts identification, etc., etc. Already most grocery products are bar-coded at source and many other areas of industry and commerce are following. Bar-codes will soon be commonplace.

Our system contains all the hardware & software needed to implement a bar-code system on your computer now. Software to print bar codes on an Epson printer is included. More information on request . . . please state your micro & area of interest.



Price £199.00 + VAT

EPSON and other well known Printers
... Latest Models at Lowest Prices!!
Also BBC disk drives monitors
etc. etc.



Our prices are as low (or lower!) than any other advertiser in this magazine. EPSONs are always ex-stock & most other printers/monitors etc. can be obtained the same day and delivered to your door, often in 24 hours. We can interface to most computers & knowledgeable advice is free if needed. Remember — many suppliers have limited technical expertise! Phone for a quote or send a SAE for full lists. All items carry the usual warranties.

ALTEK (PC) 1 Green Lane
Walton-on-Thames, Surrey
Please phone before calling (093 22) 44110





POSEIDON COMPUTER SERVICES LTD.

Of Hampton S.W. London Dealer
FOR SIRIUS 1

DEMONSTRATION BY APPOINTMENT

MOST TYPES OF PRINTERS SUPPLIED

BESPOKE SOFTWARE A SPECIALITY

COMPETITIVE PRICES FULL UK DELIVERY

ACT Sirius 1

TELEPHONE: 01-941 1447/5986:
TELEX 8954665 GITS

● Circle No. 255

Fast & Efficient Computer Servicing

For help or information ring our service department (0264) 58933

TABS

Computer Field Maintenance

Specialising in Superbrain, Apple & Sirius computers

Sopers House, Chantry Way, Andover, Hampshire SP10 1PE

Telephone Andover (0264) 58933

● Circle No. 258

SOFTWARE

TRS-80 & VIDEO GENIE:

GENERAL LEDGER. (disk only) £74.75
(Trial balance, profit & loss, balance sheet, VAT report, banking, & print of all records or any A/c number)

SINCLAIR:

ZX81..... £4.00
Spectrum Pools..... £4.95
(All prices inc. VAT and P&P)

Always interested in receiving programs for above machines. 25% Royalties given.

KRICON LTD.
11 Medway, Hailsham, E.Sussex BN27 3HE.
(0323) 846110

● Circle No. 260

USED COMPUTER SYSTEM
01-450 2411 01-450 9763

B80 System Comprising TD830 VDU, B80 Processor, 2 8" floppy disc drives, 150 CPS printer and 20 megabyte hard disc unit £2,750 ono

AI — ABC — 24 System detachable 96 key keyboard, green screen, 2 5¼" floppy disc drives and lots of other interesting features, excellent value £1,650 ono

Zilog MCZ System, Z80A CPU, 64K, SIO/PIO, 3 8" floppy disc drives, CIFER VDU, Tally printer in attractive desk unit £2,200 ono

Many other systems in stock including Burroughs, IBM, Hitachi, AI Electronics. We also have new and used systems and peripherals in stock at fantastic prices.

Prices exclude VAT and delivery. Items offered subject to prior sale.

● Circle No. 261

PURCHASING MANAGERS

Packaged or tailored software available for stock control and ordering. Used by purchasing departments in a number of large companies.

Phone Mike Gardner on
01-421 0266

cats software
96 Grimsdyke Road, Hatch End Pinner Middx HA5 4PW

● Circle No. 256

KENT MICRO COMPUTERS LTD
57 UNION STREET
MAIDSTONE
0622 52784

KODE 43 PRINTER (Teletype) £450.00
8" DRIVE DS/SD with Interface for Apple II £950.00
APPLE III with Extra D/Drive Pascal, Visicalc III & Business Basic £1995.00.
ADLER P2/64 & DRH80 Printer £1950.00

All prices excluding V.A.T. and for collection from our premises.

● Circle No. 257

SCIENTIFIC SUBROUTINE LIBRARY

VOLUME 1 — STATISTICS AND FITTING FUNCTIONS
Mean, SD, normal distribution, partial expectation, Chauvenets criterion, least squares fit to polynomial and arbitrary function, repetitive least squares fits, covariance matrix, chi-squared statistic, matrix inversion, solution of simultaneous equations.

VOLUME 2 — LINEAR PROGRAMMING
Reduction of a Simplex tableau, integer programming, partial integer programming, conversational linear programming system, least cost mix problem.

VOLUME 3 — FURTHER STATISTICS
Ranking, quantiles, frequency, 2-way table, correlation coefficient, T, chi-squared and F distributions and their inverses, T test, chi-squared test, Wilcoxson test, linear and multiple regression, ANOVA 1-way and 2-way.

VOLUME 4 — TRANSFORMATIONS & SORTING ALGORITHMS
Fourier, FFT, Laplace, numerical integration and differentiation. Exchange sort, Quicksort, Shell sort, Tree sort.

Manuals including full source listings with implementation notes and documentation — BASIC £25 per volume. PASCAL £30 per volume. Software in CP/M (8" SSSD) or DEC RT-11 (RX01) formats — £75 + VAT per volume.

CP/M TO DEC FILE TRANSFER
Software to read and write RT-11 format RX01 diskettes under CP/M. Supplied on 8" SSSD diskette — £25 + VAT.

MICRO LOGIC CONSULTANTS LTD.
57, Station Rd., Southwater, Horsham, W.Sussex.
Telephone 0403 731818

● Circle No. 259

BRAIN SURGEON

Anita Electronic Services (London) Ltd are specialists in the repair and service of Superbrain I and II and associated printers including Apple silent type. Centronic. Anadex. NEC. QUME. Ricoh and Empson.

We also specialise in the repair of Commodore and Apple computers.

We offer a fast on-sight service or alternatively repairs can be carried out at our workshops should you wish to bring in your machine.

Maintenance contracts are available at very competitive prices. Trade enquiries welcome.


For further information telephone or write to:

MR D. WILKINSON
Anita Electronic Services Ltd.,
15 Clerkenwell Close,
London E.C.1.
01-253 2444

● Circle No. 262

Due to the pressure on space this month, it has been necessary to hold over MICRO ADS to the May issue. We regret this action and apologise to both our readers and advertisers for any inconvenience caused.

BYTE BACK WITH BFI!

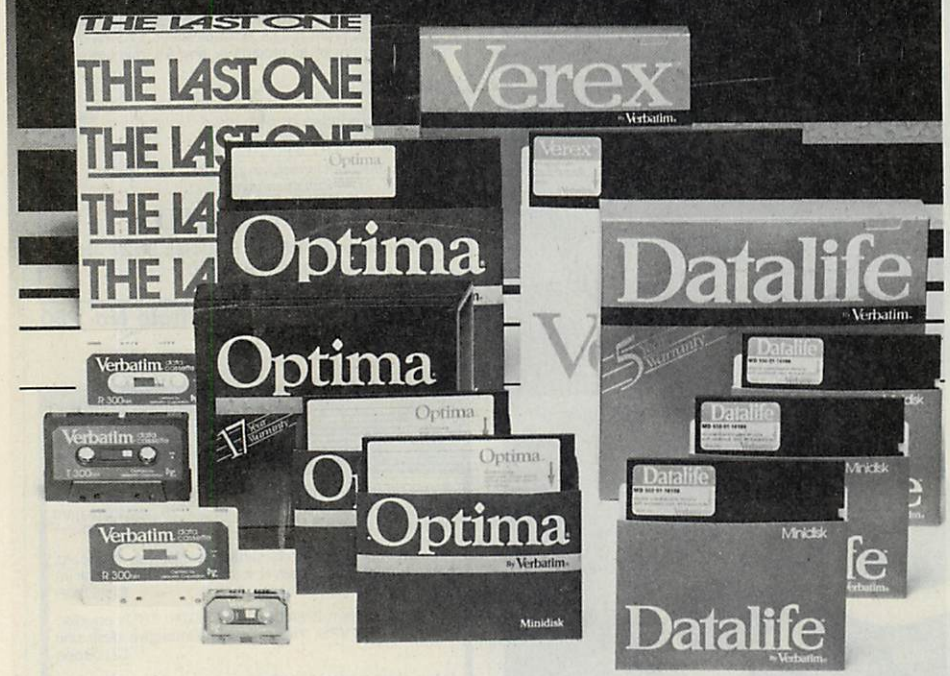

You need all the help you can get when the integrity of your data storage becomes critical. That's where we can help you, with top quality magnetic media, program writing software, disk storage products and disk-drive maintenance products. With BFI products, you'll be able to byte back at the gremlins!

Take a look at these products:

VEREX® A range of quality Verbatim diskettes for all kinds of office and home applications. They are certified to meet or exceed ANSI Standards.

DATALIFE® Manufactured to high quality and reliability standards, the Verbatim Datalife range of cassettes, diskettes and minidisks is second to none. Flexible disks in this range carry a 5 YEAR WARRANTY, five times the industry standard.

OPTIMA® The best 5¼" and 8" flexible disks you can buy, these come with a staggering 17 YEAR WARRANTY yet cost only a little more than standard flexible disks. Superb performance, full inspection and 100% error free certification make Verbatim's OPTIMA series the best possible choice of magnetic media for data-critical applications.

THE LAST ONE The ultimate "program generating program", this superb programming aid can be used by even unskilled operators to produce error-free programs on a wide range of micros in a fraction of the time normally taken.

CALL US NOW FOR FULL DETAILS OF THESE AND OTHER BFI PRODUCTS.

BFI Electronics Ltd.,
516 Walton Road, West Molesey,
Surrey KT8 0QF.
Tel: 01-941 4066. Telex: 261395

WE'LL HELP YOU BYTE BACK!

BFI

● Circle No. 217

Advertisement Index

A
A&G Computerware 24
A.T.A. Services 202
Acorn Computers 10,11
ACT Computers 66,67,74,75
Advanced Technology 187
Aimgram 203
Alan Pearman Inside Back Cover
Amateur Computer Club 204
Anagram Systems 195
Applied Micros 205
Appropriate Technology 59
AutowordServices 140

B
Beebug 56
BFI Electronics 210
Bits & P.C.'s 72
Bristol Software Factory 62,63
Butel Comco 4,182
Byteshop 38,39

C
C/WP 17,143,145
Camden Computer Systems 188
Cascade Software 194
Chromasonic 200
Cogent Systems 116
Comart 22,30
Compsoft 145
Computasolve 184
Computech 20
Computer Interface Design 184
Comshare 70,71
Country Computers 40
C.P.U. Peripherals 149
Crowther Cosine 188
Crystal Research 56
Cumana 51
C.W.P. Services 159,161,163

D
Dams Business Computers 58
Datalink 43
Dataright Terminals 134
Davinci Computers 61
Digital Research 12
Digitek International Ltd 60
Disking 201
DPLC Ltd 36
Dynatec Microsoftware 130

E
Electronicoffice Services 49
Eltec Computers 187
EMG Marketing 184
Epson 153
Equinox 150
Euro-micro Back Cover
Executive Software Club 189

G
Gemini Marketing 180,181
Gemini Microcomputers 169
Gramma Winter 14,15

H
Hal Computers 177,179
Hestair Dataline 57
Hotel Microsystems 170

I
IBM (UK) Ltd 154,155
Information Unlimited 64
Interam 65

J
J J Lloyd Instruments 61
Johnson Micros 198

K
Keele Codes Ltd 120
KGB Micros 97
Knights TV 189

L
L.S.I. 135
Laserbug 24
Lifeboat Associates 41
London Computer Centre 69
Lucas Logic 167

M
Magus Computer Systems 194
Maplin Electronics 54,55
Mcgrawhill Books 195
Mediatech 81
Micro Disk 131
Microbusiness 104
Microcentre Inside Front Cover
Microcomputer Products 192
Microdeal 105
Micronetworks 18,19
Micropute 68,73,76
Microware (Idn) Ltd 52,53
Midland Computer Fair 186
Molimerx 106
Mountaindene 16

N
N.E.C. 33
Northern Exhibitions 187

O
OI Computers 172
Orchard Software 56
Oric Products 82,83

P
Padmede Computers 164
Perfect Software 196
Pete & Pam Computers 190,191
Phipps Associates 182
Phoenix Technology
PMS Developments 130
Prentice Hall International 129
Prospero Software 131
Prototype Development Systems 130

Q
Quantum Computer Systems 148

R
Rair Ltd 9,17
Research Machines 156

S
Sinclair Research 25,26,27,28
Sirton Computers 44
Slogger Software 61
Soft Option 50
Stag Electronics 193,197
Stage One Computers 112
Stemmos 48,13,185
Swan Packaging 185
Symbiotics 101

T
Tabs Ltd 34
Tandy Corporation 139
Technomatic 45
The Microcomputer Club 6
Transam 94

W
Walters Microsystems 47
Watford Electronics 42
Willis Computer Supplies 189

X
Xitan Systems 198

APL





8 bit or 16 bit-
Whichever you go for, you'll need PPL to help you get the most from APL

WHAT IS APL?

APL is a concise programming language which has achieved great success in the larger firms and institutions. They have long discovered that APL is the answer to using the computer as a problem-solving tool with an economy on programing time which programmers in conventional languages do not believe until they've seen for themselves.

WHAT IS PPL?

PPL – *Personal Programming Language* – is a brilliant new package, written in APL, which enables the novice or experienced programmer to quickly exploit the strengths of APL painlessly. PPL is suitable for anyone, and you will never outgrow it.

WHO IS A.P.L.?

A.P.L. (Alan Pearman Limited) is a firm, established in 1977, dedicated to APL, especially on the micro. We were the first firm in the UK to bring APL on the Z80 and thus within the reach of many thousands for whom APL had been inaccessible.

Now we sell APL on many machines, using Z80, 8088 and 68000 processors. As well as hardware, we run APL courses regularly, sell APL books, and do APL consultancy. Our package, PPL, is the latest and most comprehensive of our applications software which has included database, statistics, wordprocessing, and communications, among others.

HOW TO FIND OUT MORE:

A comprehensive and well-written guide is available, price £25.00 plus £1.00 p & p, describing PPL. Send off for it today and be amazed at the power that you can get from this package. Payment by cheque welcome or Visa accepted.

We are uniquely qualified to advise you on the strengths and weaknesses of various APL's (APL/V80, TIS-APL, Viz-APL, Watsoft APL, STSC APL, APL 68000)

Personal COMPUTERS

We have now opened a magnificent new store, allowing you to see business systems in action (Not only APL Systems) and to discuss your business needs with experts. Why not call in and see what we have to offer?

Alan Pearman Limited

96-98 Chester Road, Huntington, Chester CH3 6BT. Telephone: (0244) 46024

Bringing personal computing to all

● Circle No. 272

The 16-bit Micro

EuroMicro™ SYSTEM Z100

with 8-bit compatibility and colour graphics



All-In-One

EuroMicro's new desktop computer system runs CPM-86 and CPM-80/CPM-85 programs. Manufactured for EuroMicro by Heath-Zenith, the Z100 offers:

From **£1,895**

Microprocessors
8088 for 16-bit power
8085 for 8-bit compatibility
Memory
128 Kb expandable to 768 Kb
Storage
320 Kb to 10 Mb (floppy and Winchester disk)
Operating Systems
CP/M-85, CP/M-86, MSDOS
Multi-user
Up to 8/10 terminals
Graphics
High resolution 640 x 500 pixel
Colour
High definition 8 colour pixel
Communications
2 RS 232 ports, expandable to 10, and 1 parallel port. (IEEE 488 available soon)
Signetics 3661 chip ensures hardware compatible communications with most mainframes
Expansion
IEEE S100 BUS/5 Slots
Power supply
300W switched mode; ensures high stability and regulation
Application Software
Word processing, financial modelling, business management, integrated accounting — all from leading software houses, including PEACHTREE

Exceptional desktop computer power with a flexible and expandable system to meet the business needs of today and tomorrow!



Low Profile

EuroMicro's ANSWER TO high performance AND flexibility

EuroMicro™ SYSTEM M8/16

- 8088 8MHz for CPM-86/MPM-86
- 8085 5MHz for CPM-80/CPM-85
- 10 MHz Static Memory
- IEEE S100/20 slots
- MPM-86
- CPM-86
- CPM-80
- Disk options 5" or 8" floppy or winchester
- Options include:
  IEEE488 interface
  ADDA
  EPROM blowing/emulation
  Colour graphics

WE'VE been quietly busy developing a range of computers that will allow rapid development of software for CPM-86. The EuroMicro M8/16 will support up to 7 CPM-86 users in an MPM-86 environment.
AND
For those who have an investment in CPM-80 software, we've thoughtfully provided a second processor to run CPM-80 programs as well.
IN FACT you can run any combination of up to 7 CPM-80 and CPM-86 tasks simultaneously, each user having their own environment.

A true Multi-user Multi-tasking Microcomputer housed in an attractive 20 slot Mainframe with many possible IEEE S100 options.

Ideal for the development of CPM-86 programs for the large number of table top computers based on the 8088/8086 processors.

From **£2,995**



For details call **01-341 2447**

EuroMicro™

EuroMicro Limited
EuroMicro House, Coleridge Lane, London N8 8ED. England
Telephone: 01-341 2447

Prices shown are exclusive of VAT

EuroMicro is the Trademark of EuroMicro Inc.