

POPULAR **Computing** WEEKLY

3 June 1982 Vol 1 No 7

30p

The Black Hole

**Reviewed inside:
Jungle Maths**

Party Tricks

**40 column board
for Vic-20**

**ZX81 character
codes**

Spectrum colour



ANGLO AMERICAN SOFTWARE CO.

SOFTWARE SPECIALISTS

Starfleet Orion	PET 8K TRS-80 Level II 16K TRS-80 32K w/disk	£19.50
Invasion Orion	APPLE Integer BASIC 16K APPLE Integer BASIC w/disk 48K TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£19.50
Temple of Apshai	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk ATARI 32K ATARI 32K w/disk IBM 64K w/disk	£23.50
Hellfire Warrior	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£23.50
Upper Reaches of Apshai	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£15.50
The Keys of Acheron	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£15.50
Curse of Ra	TRS-80 32K — APPLE 48K w/disk TRS-80 Level II 16K 24K PET w/disk TRS-80 32K APPLE 48K w/disk	£15.50 £32.00
Introductory 3-Pack 3-Pack: Morloc's Tower, Rescue at Rigel and Datesones of Ryn	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K 2/disk	£15.50
Datestones of Ryn	PET 24K TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk APPLE 32K	£15.50
Morloc's Tower	32K PET APPLE 48K w/disk	£19.50
Dragon's Eye	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£21.50
Sorcerer of Siva	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£21.50
Rescue at Rigel	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£23.50
Star Warrior	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£21.50
Crush, Crumble and Chomp!	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£21.50
Tuesday Morning Quarterback	TRS-80 48K — APPLE 48K w/disk ATARI 16K — TRS-80 Level II 16K	£19.95
Richochet	TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£21.50
Jabbertalky	TRS-80 32K — APPLE 48K w/disk IBM 64K w/disk	

SEND 75p FOR FULL CATALOGUE
(Refundable against purchase)
DEALER ENQUIRIES WELCOME

ANGLO AMERICAN SOFTWARE

138a Stratford Road, Sparkhill
Birmingham B11 1AG 021-771 2996/2736

ALL PRICES INCLUDE VAT & POSTAGE
24 Hour answering service
on 021-771 2995 for Access orders.



PLEASE SUPPLY

I enclose a cheque/PO for £..... made payable to
ANGLO AMERICAN or debit my

Access and number

Signature

NAME

ADDRESS

POPULAR Computing WEEKLY

The Team

Editor

Duncan Scot

Reporter

David Kelly [01-930 3271]

Sub-editor

Peter Harvey

Designer

Eric Robbie

Editorial Secretary

Fiona McCormick

Advertisement Manager

David Lake [01-839 2846]

Advertisement Executive

Alastair Macintosh [01-930 3840]

Publishing Director

Nick Hampshire

Popular Computing Weekly,
Hobhouse Court, 19 Whitcomb Street,
London WC2
Telephone: 01-839 6835

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by
Chesham Press, Chesham, Bucks

Distributed by S M Distribution
London SW9. 01-274 8611. Telex: 261643

© Sunshine Publications Ltd 1982

Subscriptions

You can have *Popular Computing Weekly* sent
to your home: the subscription rate is £19.95 per
year, for addresses in the UK.

How to submit articles

Articles which are submitted for publication
should not be more than 1000 words long.

All submissions should be typed and a double
space should be left between each line.

Programs should, whenever possible, be
computer printed.

At present we cannot guarantee to return
every submitted article, so please keep a copy.

Accuracy

Popular Computing Weekly cannot accept any
responsibility for any errors in programs we
publish, though we will always try our best to
make sure programs work.

This Week



Cover illustration by Ian Craig

News	5
Clash on Spectrum name, EEC backs tele-text.	
Club Reports	7
David Kelly reports on the Sunbury-on-Thames computer club.	
Black Hole	8
Dave Middleton presents a space game for the ZX81.	
Reviews	10
Missile Command, ZX81 EPROM.	
Open Forum	13
Seven pages of programs.	
Programming	20
ZX81 character codes.	
Spectrum	22
Nick Hampshire looks at Spectrum colour.	
Sound & Vision	23
About computer art and music.	
Peek & Poke	25
Your questions answered.	
Competitions	26
Puzzle, crossword.	

Editorial

Most schools in the country must know by now about the various Government microcomputer support schemes.

The most ambitious of the Government's aims is to see a microcomputer installed in every secondary school by the end of this year.

To this end it has been offering to pay half the cost of each computer bought. But most of the computers approved under the scheme are expensive and, by now, largely obsolete.

The other half of the Government's campaign is Information Technology Year '82, a project supposed to stimulate public awareness. But ITY seems to have died of inertia less than half-way through.

Many teachers must have realised by now that if they want to equip their pupils for a computing future they will have to do it on their own initiative.

The only way to keep up is to go out and buy a computer now. Schools cannot afford to wait for the Government and local education authorities to catch up.

Next Week



It's a drab, drab world till you add a little colour with your BBC Micro. Paint the town red, blue, yellow... the choice is yours!

Other end of the Spectrum?

Micro APL, which launched its Spectrum microcomputer last September, is concerned about possible confusion between its product and the new Sinclair ZX Spectrum.

Micro APL did not register the name because it was advised that the name was too common to be accepted as a registered trade mark.

Now the company is getting enquiries from customers who are confusing the two machines.

The two Spectrums appear to have little in common. Sinclair's ZX Spectrum is, at £125, the lowest priced colour and sound machine. Micro APL's Spectrum is a 16-bit multi-user multi-task APL machine aimed mainly at the business market, with a basic price of around £10,000.

However, Micro APL is considering ways of clarifying the differences between the two micros. One solution would be to publish advertisements highlighting the facilities of the different Spectrums.

Micro APL emphasises that there are no hard feelings, and is in friendly communication with Sinclair Research.

EEC looks for new teletext

Interactive full-channel teletext is now a real possibility following EEC funding for a research study group.

Logica Ltd, of London, together with Italian General Systems, has been given £50,000 to look at the possibilities of an interactive teletext system using cable tv. The group will also investigate the problems involved in the development of a full-channel system.

The advent of satellite and cable tv makes possible the use of complete tv channels for teletext, instead of the eight spare lines of tv signal that are currently used.

In this way a much greater volume of information could be transmitted and, with cable tv, a return signal would be possible, enabling interactive teletext.



Visitors check out the prize-winning ZX81 at the Design Council.

Design Council picks the ZX81 for award

Sinclair's ZX81 is the first micro computer to win a Design Council Award.

Judges for the 1982 awards praised Sinclair for bringing computers within reach of the general public. The panel concluded: "The price and easy-to-follow instructions mean that every member of the family can have the opportunity to learn about computers and how they are programmed."

The award comes as Sinclair Research reports sales of over 20,000 units per week to America.

At the same time an exhibi-

tion of micros and their uses — called 'Inside Information' has been mounted jointly by the Design Council and Information Technology '82. At the Design Centre in London's Haymarket, it features many micros, including the ZX81, BBC Model B and the new Osborne 1. The display concentrates, not only on the hardware, but also on the wide-ranging applications of micros — in the home and at work — and their use in, for example, medicine and telecommunications.

The exhibition runs until June 26 and entry is free.

Now: the fully equipped remote control household

Stripeland Electronic Control Systems have introduced a range of control units enabling micros to program the operation of domestic appliances by remote control.

The system comprises the user's own host-micro, one TX008 interface and up to 32 remote receiver units.

Instead of direct wiring from the TX008 unit to the appliance, which could be a tv, radio, lighting or even motorised curtains, the Stripeland

system uses the existing mains lines.

Richard Last, of Stripeland, told *Popular Computing Weekly* that he will shortly be selling a two-way version of the system with built-in memory at the remote point. The remote device would then be able to store information and send it back to the micro.

Further details from Stripeland, 111 Liverpool Road, Formby, Merseyside L37 6BR.

Scotland gets first micro show

Edinburgh ZX Computer Club is to hold a one-day show on July 24. More than 30 stands are planned for this, the first micro show of its kind in Scotland.

Organiser Gordon Hewit told *Popular Computing*

Weekly that the time was right for such a show.

The ZX fair will be at Meadowbank Stadium, open from 10am to 6pm.

Further details from Gordon Hewit, 3 Baberton Mains View, Edinburgh EH14 3BR.

Commodore show is on

Britain's only consumer weekly for micro owners, *Popular Computing Weekly* will be at the Cunard Hotel from June 3 to 5 for the 3rd International Commodore Computer Show. With twice the space of last year's show — over 30,000 sq ft on both exhibition levels of the hotel — there will be 154 stands on display.

Displays will feature all the new Commodore products, including the Vic-10, Vic-30 and Commodore 64, plus the Vic networking system from Datalect and IT '82.

The show is to be opened by Commodore International's Chief Executive, Jack Tramiel.

The venue is the Cunard International Hotel, Hammersmith, London. Entry is £1 and the opening times are: June 3, 12am to 6pm; June 4, 10am to 6pm; and June 5, 10am to 5 pm.

You can find *Popular Computing Weekly* on Stand 140, on the lower floor.

IBM can't be too Personal

IBM still has no plans to introduce its Personal Computer to the UK.

The company now has an estimated backlog of 40,000 orders in the US and consequently no spare production to contemplate a UK launch.

Meanwhile, Mick Punter, managing director of Microcomputerland, has been importing the IBM micro.

Microcomputerland gets round IBM's export restrictions through its purchasing links with Computerland, an IBM US distributor.

However, Microcomputerland has reportedly been the subject of Fraud Squad enquiries and apparently a number of salesmen have been fired by Punter.

The IBM Personal Computer System is also being imported by KGB micros.

Contact Microcomputerland, 1 Prince's Street, Richmond, Surrey, or KGB Micros, 14 Windsor Road, Slough SL1 2EJ.

**The ultimate in Useful
Sharp MZ80A / Sharp MZ80K
Software by Dale Hubbard**

Fed up with boring games? Make your SHARP work for you!
All program cassettes based and written cleverly in Sharp standard Basic.
All programs are "menu" operated and complete with demonstration files where appropriate. 48K memory required.
All prices include VAT and post and packing. Despatch by return.

DATABASE

The program that everyone needs. Facilities include sort, search, list, delete, change, totals, save file, line print if required, etc. etc. Can be used in place of any card index application. **£19.95**

RUBIK SOLVER

It's not our policy to offer games but we make an exception here for a program to solve the cube from ANY position. Short-hand notation makes learning the solution by heart possible for most active brains. **£12.95**

DECISION MAKER

A serious program that enables the computer to make a sound decision for you based on various criteria.
If you want to buy a car, hi-fi, house, etc., or you don't know which woman to marry then you need this one. **£5.95**

STOCK CONTROL

All the necessary for keeping a small retail inventory. Routines include stock set-up, value totals, locations, minimum stock levels and many more including financial summary and line printer routines, please state machine type. **£19.95**

ACCOUNTS

A gem of a program, all for cassette, with the following features:

- Daily Journal
- Credit Sales
- Cash Sales
- Credit Purchases
- Purchases — other
- Sales Ledger
- Purchase Ledger
- Bank Account
- Year to Date Summary

A fully interactive program suitable for all businesses. Files can be saved and loaded and totals from one file carried forward to another on cassette. Particularly useful from a cash flow point of view, with an immediate accessibility to totals for debtors and creditors. Bank totally supported with entries for cheque numbers, credits and, of course, running balance. **£19.95**

Access cards accepted. Send cheque or PO or credit card number to:
GEMINI MARKETING LTD
Quay House, Quay Road, Newton Abbot, Devon TQ12 2BU.
OR telephone us with your credit card order on Newton Abbot (0626) 62669
Despatch by return

VIC 20 • VIC 20 • VIC 20 • VIC 20 • VIC 20 • VIC 20

LLAMASOFT SOFTWARE!!

ARCADE QUALITY GAMES FOR THE VIC 20 . . .

DEFENDER (M/C)

FULL FEATURE VERSION OF THE POPULAR ARCADE GAME, INCLUDING: SWARMERS, BAITERS, PODS, LANDERS AND HUMANOIDS. CONTROLS: UP, DOWN, THRUST, REVERSE, FIRE AND SMART BOMB. (8K) HIGH RESOLUTION COLOUR GRAPHICS, JOYSTICK CONTROLS.

ONLY £10.00

BOMB BUENOS AIRES

FLATTEN THE ARGENTINE CAPITAL WITH YOUR VULCAN BOMBER, AND THEN LAND IT IN SAFETY. LEVELS OF PLAY, HIGH RESOLUTION COLOUR GRAPHICS, WILL RUN ON THE UNEXPANDED VIC 20.

ONLY £4.95

OR BOTH PROGRAMS ON ONE CASSETTE
FOR ONLY £12.95

AVAILABLE FROM: LLAMASOFT SOFTWARE
LINDON HOUSE, THE GREEN, TADLEY
BASINGSTOKE, HANTS
TEL: (07356) 5038

From Dreams to Reality....

It's here at last!
B.B.C Microcomputer Games Pack 1

GAMES PACK INCLUDES:
STAR WARS — BLACKJACK — SIMON —
FORTUNE — ALIEN INVASION

R.G.B COLOUR MONITORS

£317.50 inc. Lead, V.A.T. and P. & P.

recommended for use with B.B.C Microcomputer

**Now Available B.B.C Microcomputer
Pack 2 3 Great Games**

Star Trek - Puck Chase - Mastermind
Both Packs for B.B.C models A and B

for further information send large S.A.E.

Computers for All

72 NORTH STREET, ROMFORD, ESSEX. TEL 0708 752862



Club Reports

Is your club involved in any special projects? Use this page to tell the world about it.

Three years on and it's still fun in Sunbury

David Kelly visits Sunbury-on-Thames Computer Club and talks to its founder

They're such a casual lot in Sunbury. Not for them the establishment rigours of membership fees, newsletters, and tutorial meetings. Though founder Simon Taylor originally planned that the club should take that sort of direction, the members unanimously decided against such formalities and instead created a regular weekly meet in the pub to offset the 'formality' of their monthly meeting in St Benedict's Church Hall in Ashford.

A lot has happened in the three years since the club was formed and Simon readily points out that it's been a long time in the world of micros.

Nowadays he's making a name for himself as creator of the game *Blitz*, which Commodore have contracted to market, and as a software programmer for Microgen and also writing programs for the new Sharp PC-1500. At 18 he's a budding expert quite naturally at home in one of the oldest computer clubs in Britain.

It all started just after he left school.

First he saved for a Mark 14, Sinclair's first micro, and began learning machine code. Then when a friend bought a Nascom I kit he decided to try to get in touch with other micro enthusiasts in and around Sunbury.

As so often happens, it was a letter in a magazine which really set the ball rolling. Simon got 10 letters and promptly organised meetings. He kept a list of names and addresses and every month someone



Simon Taylor ... a budding expert

would volunteer their house for the meeting. Everyone brought along their machine and exchanged ideas and programs.

They would meet on the first Friday of the month, bringing quite a variety of micros — Mark 14s, Nascoms, a Triton, Psycomp '80s, an Elector Junior and an Aim 65. Most of the machines operated only in machine code and if your micro understood a high-level language then that was really something!

Over the next eight months the club grew rapidly, with new members joining every month.

This arrangement ran into difficulties when more than 50 people, each with their machines turned up to the December 1980 meeting. The problem was no longer how to plug in all the micros but how to get all the members in through the front door! This was to be the last meeting of that type — just meeting in each other's homes was no longer practical.

The three people most involved in the running of the club at this time, Simon Taylor, Andy Lawrie and Stephen Battle, felt the club needed a formal set up — with membership fees, a newsletter and possibly lectures and tutorials.

They set out their ideas in a letter but the response from members suggested the most important feature of the club was its informality. To have a rigidly constituted group would be to destroy what the club stood for — a friendly meeting of people

with a common interest. So it was decided to carry on, but to let the club, as far as possible, govern itself.

Over the next four months they held no meetings at all while Simon searched for a suitable monthly venue. At last he found St Benedict's Church Hall in Ashford and in April 1981 they met again for the first time in the hall.

Since then Sunbury Computer Club has met on the last Tuesday of every month and the air of informality is maintained. Simon keeps no list of names and addresses of those who attend and can only estimate that the membership is stable at somewhere around 60. In his own words "it is just a place where interested individuals can go and talk and exchange ideas."

He reckons that within the membership they now have at least two of every popular computer (except, strangely, the PET), and can provide help and advice on just about any machine.

The club also meets every week in the pub 50 yards from Simon's home — The Grey Horse.

As the club has developed, so has Simon's involvement in micro-computing. Together with Microgen he plans to produce a monthly cassette-based user club magazine, which should appear before the end of the summer.

All this, together with his full-time apprenticeship and his work for Sunbury Computer Club keeps Simon very busy — he admits he doesn't know where he finds the time. Simon's advice is never to forget the Sunbury Club's motto — *Per ardua ad error!*

Sunbury Computer Club meets at 8 pm in St Benedict's Church Hall, Napier Road, Ashford, on the last Tuesday of each month. The next hall meeting will be at 8 pm on June 29. On the other Tuesdays of each month the club meets for a drink and a chat at 8 pm in the Grey Horse, Staines Road East, Sunbury-on-Thames.

Further details from Simon Taylor, 8 Priory Close, Sunbury-on-Thames.

For your diary

Norwich and District BBC Micro-Computer User Group meets twice-monthly, with workshops and talks, in Norwich City College. Contact Paul Beverley, Room B12a, Norwich City College. (Tel: 0603 60011 ext 233).

Mid-Cheshire Computer Club meets on the second Friday of each month in the main Winsford Library (in the Town Centre Precinct) at 7.30 pm. Contact Dave Clare, Providence House, 222 Townsfields Road, Winsford, Cheshire, CW7 4AX. (Tel: Winsford 51374.)

We want to hear from you!

Whether you are starting a new club, holding a special meeting, or just changing the venue, we want to hear from you.

Write to David Kelly, Club News, *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF or call him on 01-930 3271.

Black

Learn to combat the greatest peril of space. By Dave Middleton

You are captain of a small spaceship carrying damaged androids to a repair ship and the quicker you get to the ship the larger your bonus. Your ship is fitted with only crude instruments which give your velocity components in the x and y directions of motion.

Long range scanning has already shown that there is a black hole in the area but because black holes do not emit light you obviously cannot see it. You will have to rely on gravitational effects on your velocity to fix its position on the screen.

Like any true space ship once you have accelerated to a velocity by giving thrust in one direction you have to thrust in the opposite direction to reduce velocity again.

If you move your ship out of the quadrant you are in, your on-board

computer will advise you to use your warp drive and give you your current x,y position relative to the repair ship which is at co-ordinates 1,1; you still have control of your ship however and can manoeuvre using the normal controls. If you use the warp drive you will usually end up in the vicinity of the black hole but at least your ship will be back under control again.

How to get to the repair ship


The easiest way is to move outside quadrant, out of the gravitational effects of the black hole and fly by watching the x,y co-ordinates change. The average time I achieved for this was between 45 and 55 hours.

The more skillful way is to move diagonally across the screen and make use of the whiplash effect. The velocity component added by the black hole is inversely proportional to your distance from it, so if you go too

close you will end up with a velocity which will either destroy your ship or fling you out at an uncontrollable speed. However if you get your approach correct your ship will be accelerated around the black hole into the vicinity of your repair ship. It is than a simple matter of decelerating and docking. The best time I achieved using this method was 20 hours. (You still have to spend some time outside the quadrant).

The game is in real time so you have to make your decisions quickly or another 'hour' will be added to your travel time.

To control your ship use the unshifted cursor keys. Pressing a key adds one velocity component in the direction the arrow is pointing, the key only works while information is being displayed. Positive x-velocity moves the ship to the right and positive y-velocity moves the ship down. Press 'w' if you are either too close to the black hole or you have lost control of your ship.

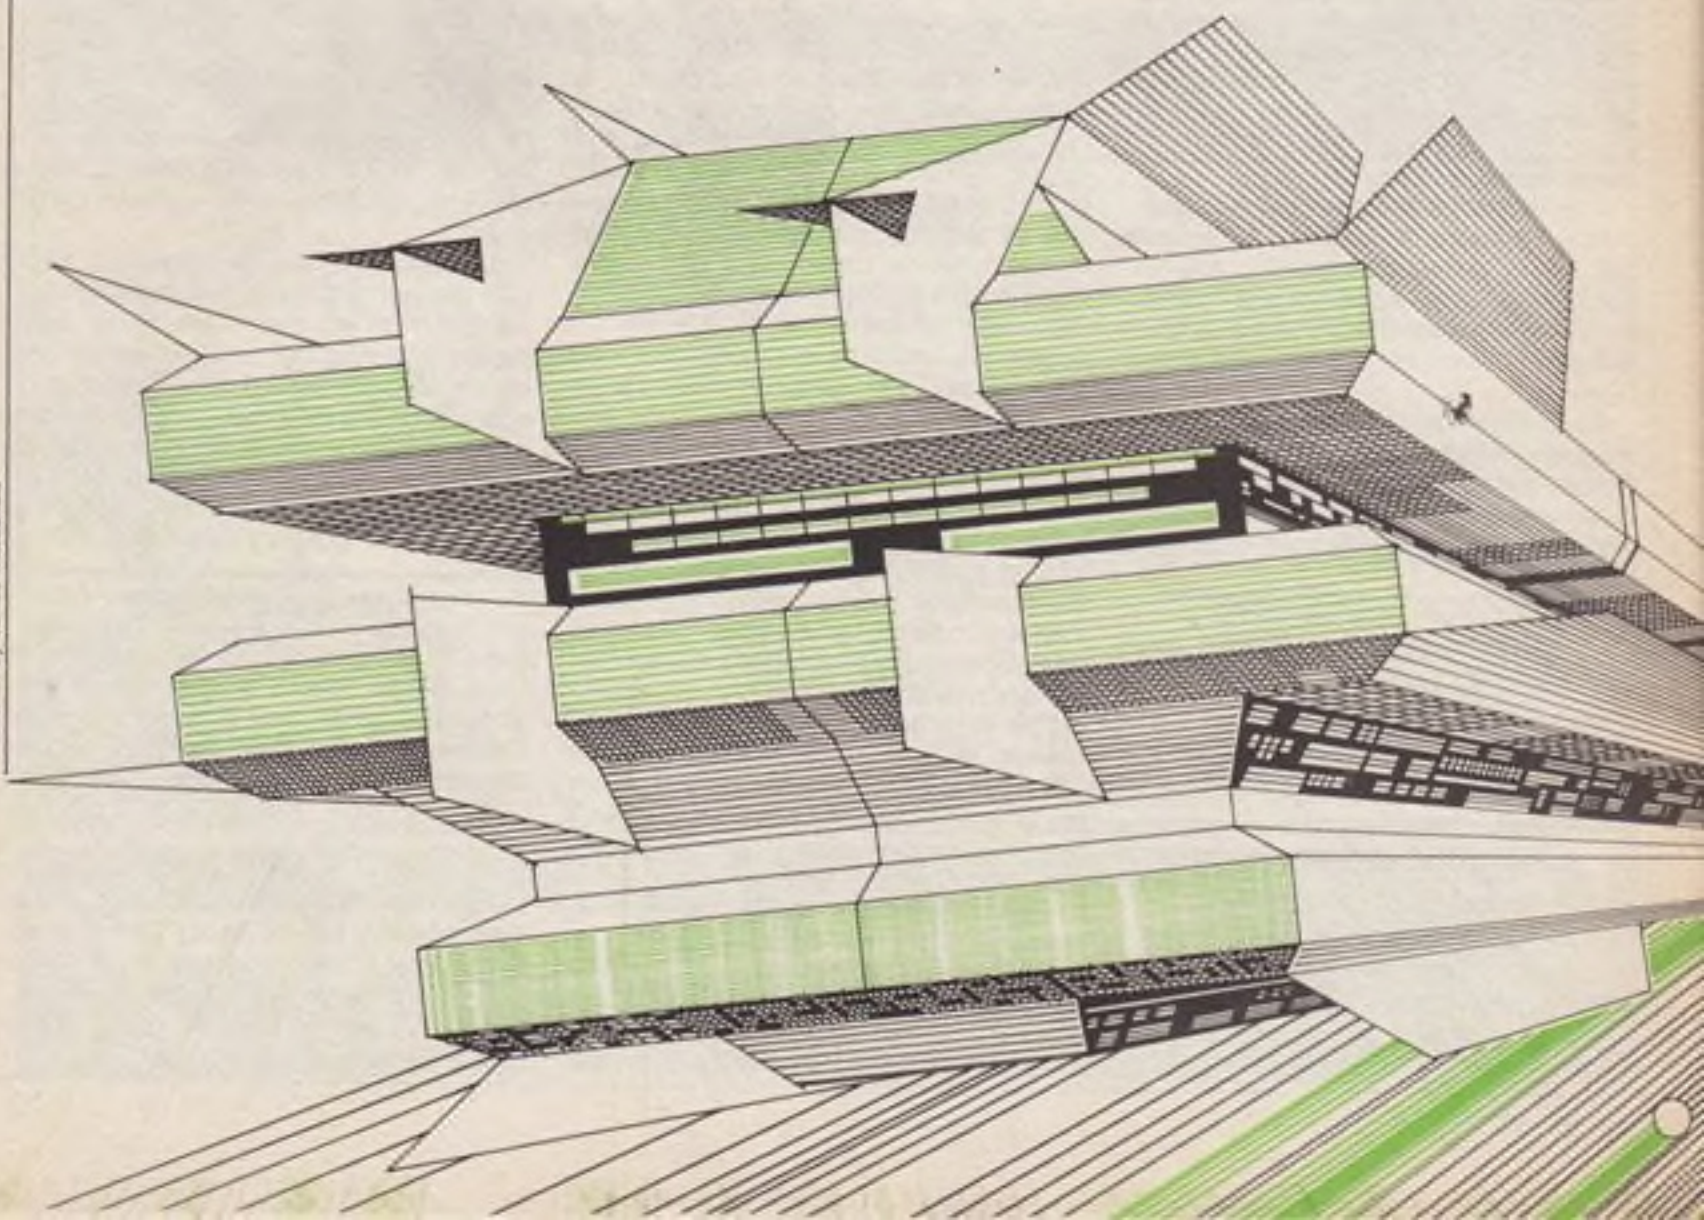

Hole

BLACK HOLE
BY DAVID MIDDLETON

```
1000 PRINT AT 10,11,"BLACK HOLE"  
1010 PRINT AT 11,10,"-----"  
1020 CLS  
1030 X=0  
1040 Y=0  
1050 X1=0  
1060 Y1=0  
1070 T=0  
1080 OR=100  
1090 HOUR=SHIPS  
1100 T=T+1  
1110 IF INKEY$="U" THEN GOSUB 30  
1120 IF INKEY$="S" THEN LET X1=X  
1130 IF INKEY$="D" THEN LET X1=X  
1140 IF INKEY$="A" THEN LET Y1=Y  
1150 IF INKEY$="Z" THEN LET Y1=Y  
1160 GOSUB 2000  
1170 LET V=500*(X1+X1+Y1+Y1)  
1180 IF V>20 THEN GOTO 1500  
1190 LET X=X+X1  
1200 LET Y=Y+Y1  
1210 IF X<0 OR Y<0 OR X>31 OR Y>  
1220 THEN GOTO 1600  
1230 IF X=X5 AND Y=Y5 THEN GOTO  
1240  
1250 IF X=X5 AND Y=Y5 THEN GOTO  
1260  
1270 CLS  
1280 PRINT AT Y,X,"O"  
1290 PRINT AT Y5,X5,"B"  
1300 PRINT AT Y5,X5,"A"  
1310 PRINT AT 21,0,"X",X1," Y",Y1  
1320 PAUSE 100  
1330 GOTO 1600  
1340 PRINT "SHIP EXPLODED DUE TO  
1350 VELOCITY"  
1360 GOTO 9999  
1370 CLS  
1380 PRINT "USE WARP DRIVE TO GE  
1390 T BACK TO"  
1400 PRINT "KNOWN SPACE"  
1410 PRINT "CO-ORDINATES NOW"  
1420 PRINT "X",X1," Y",Y1  
1430 PAUSE 100  
1440 GOTO 1600  
1450 PRINT "YOU JUST FELL INTO T  
1460 HE BLACK"  
1470 PRINT "HOLE...."  
1480 GOTO 9999  
1490 IF U>3 THEN GOTO 1650  
1500 CLS  
1510 PRINT "WELL DONE YOU MANAGE  
1520 O TO DOCK"  
1530 PRINT "WITH THE REPAIR SHIP"  
1540 PRINT "IN ",T," HOURS"  
1550 IF T<=35 AND T>25 THEN PRIN  
1560 T "YOU WILL GET A BONUS"
```

```
1634 IF T<=25 THEN PRINT "YOU WI  
1635 LL GET A HUGE BONUS"  
1636 IF T>50 THEN PRINT "TOO LAT  
1637 E....NO BONUS"  
1638 IF T<50 AND T>35 THEN PRINT  
1639 "YOU GET A SMALL BONUS"  
1640 GOTO 9999  
1650 PRINT "YOU JUST CRASHED INT  
1660 O THE"  
1670 PRINT "REPAIR SHIP, KILLING  
1680 A LOT"  
1690 PRINT "OF PEOPLE"  
1700 GOTO 9999  
2000 REM GRAVITY EFFECT OF BLACK  
2010 HOLE  
2020 LET X3=X  
2030 LET Y3=Y  
2040 GOSUB 2000  
2050 LET X1=X1+X4  
2060 LET Y1=Y1+Y4  
2070 LET X3=X3  
2080 LET Y3=Y3  
2090 GOSUB 2000  
2100 LET X=X+X4  
2110 LET Y=Y+Y4  
2120 RETURN  
2130 LET X4=ABS (X3-X5)  
2140 LET Y4=ABS (Y3-Y5)  
2150 LET D=INT (20/500*(X4+Y4+  
2160 Y4))  
2170 IF X4>0 THEN GOTO 2530  
2180 LET AN=PI/2  
2190 GOTO 2540  
2200 LET AN=ATN (Y4/X4)  
2210 LET X4=INT (.1+D*COS AN)  
2220 LET Y4=INT (.1+D*SIN AN)  
2230 IF X3>X5 THEN LET X4=-X4  
2240 IF Y3>Y5 THEN LET Y4=-Y4  
2250 RETURN  
2260 REM WARP DRIVE  
2270 LET X=INT (5+RND*20)  
2280 LET Y=INT (5+RND*15)  
2290 LET X1=INT (X1/2)  
2300 LET Y1=INT (Y1/2)  
2310 RETURN
```



Reviews

software



Missile Command

Available from Hi-Tech, or any Commodore Vic Dealer. Price £8.75.

All right, I admit it, I'm hooked! Another reproduction of a popular arcade game, this requires an additional 3K of RAM before the action can commence. It can be played using either the keyboard or a joystick, and a joystick is certainly to be preferred. Using the keyboard tends to get your fingers tied up in knots as you desperately try to press nineteen keys at the same time.

The same takes a while to load, as there is one setting up program before the main one comes in. Having selected keyboard or joystick control, sit back and wait for a few minutes while the second program is loaded. Once you've got there, you're in for a frantic time! You are defending five cities, which are under siege by missiles raining down from above. The method of defence is quite ingenious: you control a set of sights, which race about the screen at breakneck speed (they need to). When the sight is in an appropriate position, usually just in front of one of the missiles coming down, pressing the fire button launches a counter missile of your own, aimed at your sights. When it gets there, explosions occur, and the ensuing debris wipes out any enemy missiles which blunder into it.

However, any of the missiles which get through your defences are more than capable of wiping out a city if they score a direct hit, and when all your cities go . . .!

To score, you must demolish the enemy missiles, and use as few of your own missiles as possible, since you get points for any that remain after a particular attack wave is completed. The missiles come down in droves, and every wave gets successively more frantic, with seemingly hundreds pouring down at a time. There is a way of surviving this, which entails setting up a 'line' of your own missiles across the bottom of the screen, and hoping that the enemy missiles run out before your own do.

Summary

An extremely addictive game, and a fairly good reproduction of the existing arcade

game. This is a difficult one for manufacturers to tackle, as the original game had a very novel way of moving your sights across the screen, and one which is not reproducible on any microcomputer. The efforts that Hi-Tech have put into being as faithful to the original as they could, considering the limitations imposed upon them, are commendable. A very good game. **PG**

Party Tricks

Video Software, Stone Lane, Kinver, West Midlands. ZX81 1K cassette, Price: £4.95.

So Video Software, long a supplier of sophisticated up-market 16K software for small businesses and training, is lowering its sights! They have just launched this cassette, containing ten BASIC 1K routines and promise more.

The kind of party they're aiming at is for children, I think. Introducing something different for children's parties is a major cause of ulcers in certain circles — to have a ZX81 play session can't be bad.

However, there are doubtless plenty of adults who will enjoy much of the material here, even if the overall novelty is not in the same league as that of, say, the Orwin packages or the "adult" games from Automata.

Video Software shows rather poor marketing in putting the least exciting programs first. We have *Shoot* — where you are taking a penalty which the goalie has to try to save; *Sketch* — differing from the million other etch-a-sketches only by having a SAVE facility; *Name The Day* — giving weekday for any date; and *Train* — you drive a train, in forward or reverse, along a track.

These are all fairly good, even if hardly world-shattering. Later programs are better. They include *Onger-Wonger* (a picture-drawing routine); *Weather* (a variant on the random poetry genre); *UFO* (shoot down the single space invader); *Who Shot JR?* (ZX81 Cluedo); *Field-Gun* (a nice target practise game); and *Follow* (you must copy the micro's wiggly path across the screen).

Video Software's well-known high-quality of presentation is used with this 1K package.

For your money you get a good cassette, with a set of saves on each side, and an impressive 26-page booklet.

Summary

Near top marks for this collection of 1K ZX81 programs — fun for all, and useful for those struggling to get into Sinclair BASIC. **KJL**

Jungle Maths

Scisoft, 5 Minster Gardens, Newthorpe, Eastwood, Notts.
ZX81 16K cassette.
Price £4.50.

It was with a great thrill of anticipation that I prepared to look at this package. There is not much material yet for ZX81 teaching, and a huge need. Scisoft's material is nicely packaged, not too costly and comes with a separate four-page leaflet.

But the thrill soon died down. The leaflet has been hastily and poorly written — there are ten grammatical errors in the eleven-sentence description of the material, for instance. And the recording quality on the cassette is very reminiscent of what we had to put up with nine months ago — the signal on one side was so weak that loading was impossible; that on the other was not quite as bad, but still bad.

Such lack of attention to detail is bad practice in any kind of software. It is not at all excusable where children's learning is concerned.

The ha'p'orths of tar are missing throughout the program that I loaded as well — slow reaction to key presses, punctuation marks missing, poor screen layout generally, inappropriate language, inadequate mugtrapping.

There are matters too that any competent maths teacher would frown on severely: inadequate restrictions on the questions posed, use of the "less than" symbol, incorrect use of the word "decimal".

All this is a great pity. Scisoft had a lovely idea — why, oh why, didn't they carry it right to the end before rushing to the market place?

The lovely idea is of course to link the educationist's need for drill programs to the child's need for games.

In *Jungle Maths* you must move across the screen avoiding a (rather strange) collection of hazards by answering the posed questions correctly.

Type of question (from the four rules), range and type of numbers involved, and time limit may all be selected during the initial stages.

The hazards involve rather laborious moving graphics, but the children enjoyed them (despite their horrific nature) — they probably can't readily be improved without machine code. All the same, tar needs application to the BASIC coding generally.

Summary

An excellent idea — parents and teachers need this kind of program. It is a great pity that the authors haven't worked a bit longer on the coding: it is to be hoped that a polished version will soon appear. **KJ**

Reviews

hardware

Beebox

Available from Beelines Limited.
Price £220 plus VAT.

This neat, compact unit, which sits underneath your Vic, is designed to give you a 40 column by 25 line display, and increase the amount of available memory from 3K to 32K. It connects up to the expansion socket on the Vic, but has a further socket of its own, so nothing is lost and quite a bit gained.

All this sounds very impressive, but is it as good as it's cracked-up to be? The company's description creates the impression that a true 40 x 25 screen area is available on which you could merrily program impressive graphics for anything from arcade games to word processing packages. Not so.

On connecting up the unit and powering it all up, you have lost the traditional 'window' screen display of the Vic, and the whole screen is there for you to marvel at. This is somewhat reminiscent of the old Commodore Pet 4032 display. The old Vic appearance is not all you've lost however. Also gone are the Vic graphics, and indeed just about everything you've become familiar with. In their place is the Prestel character set, which in its defence is quite impressive, and a variety of other control characters. For some reason best known to Beelines, actioning these involves positioning them on the screen, thus losing some of the much valued 40 x 25 area.

These control characters include a facility to produce double height characters, flashing characters, and so on. What you can't do is alter the background colouring: you start off with white on a black background, and black it will remain, whatever you try and do about it.

One further unfortunate feature is that you cannot revert to the ordinary Vic screen, once that board is wired up. To get back into Vic mode you have to disconnect everything and start again. It would have been nice to be able to swap from one to the other at will.

On the plus side, the colour quality looks distinctly better than on a normal Vic, although there is a slight shimmer when scrolling through a listing.

Summary

It does give you an extra amount of memory, and all told is probably fairly cheap for an additional 29K of RAM and a 40 x 25 display area, even if it is only a display area. At £220 it will probably be of most use to the businessman who wants to use a larger area (for say stock control, or whatever), but for the average hobbyist I would say that it's a waste of time. **PG**



20 Simple Projects

By Stephen Adams, published by Interface, 44-46 Earls Court Road, London W8
Price £6.45.

This is the latest offering from the Interface publishing house that specialises in books for home computer users, in particular Sinclair users.

Author Stephen Adams is well-known in the microcomputer world as the man who knows his way around Sinclair hardware, and who has had much of his work published in the microcomputer press. The idea of this book is a good one, microcomputer hardware projects being a subject not often covered in magazines.

Adams makes no claims about the quality of his projects, each being the cheapest and simplest way of performing a task, not necessarily the best. For this reason the book deserves praise as a source of ideas or questions, rather than answers. Adams has provided you with the route, it's up to you to explore it.

Some of the projects are specific to the ZX81, but not so many that other computer users will feel left out. The circuit diagrams use a non-standard series of symbols, but are clear enough. As in other Interface books, there are a lot of pictures that have no relationship with the text — an interesting quirk. One other point I find most annoying is the liberal use of upper case letters throughout the book.

It should be remembered that books of this nature are not judged by the quality of their production, but by the information they contain, and this book contains a fair amount of that. The construction projects contain a minimum of software, concentrating on the electronics.

Among them are a tape recorder control, which every computer user will find handy, a light pen, which is the ultimate in low-technology, and an analogue to digital converter. **SB**

ZX81 EPROM board

EPROM Services, 3 Wedgewood Drive, Leeds LS8 1EF. Tel: 0532 667183.
Prices: board, £17.50 including p&p; EPROM, £3 each and programming them £2/K.

This printed circuit board comes ready made to connect up to your ZX81 and provide it with your own "commands" stored as subroutines in a ROM.

The type of ROM used is called an EPROM which means it can be erased by ultra violet light and reprogrammed.

The board can take four 2716 (+5 volt type) EPROMs and connect up to the 16K pack as well.

The EPROM can be programmed by you or the company which supplies the board. EPROM Services supply the complete service, erasing the EPROM and reprogramming it from your machine code listing. The advantage of using this method of program storage is that no RAM is used up and the program is still safe in the ROM when the power is switched off.

The space allocated to the EPROMs on the board is 8K to 16K in the memory map, but due to the fact that only one IC is used to decode the address, it also appears in the 40K to 48K section as well. This means that you are limited to 16K of RAM as the Sinclair ROM takes up the space from 32K to 40K.

The instructions for inserting the EPROMs are easy to understand and include instructions on how to alter the board so that it can take 6116 RAMs instead.

The board arrived with an EPROM containing seven machine code routines, in the first 2K socket. They were RENUMBER (in steps of 10, starting from 10, but with no GOSUBs or GOTOs altered), FREE MEMORY, PROGRAM LENGTH, MEMORY LENGTH, FILL (fills the screen with the character selected).

The last two convert decimal numbers POKed into the system variables to hexadecimal numbers printed on the screen. There were a couple of errors in the last two, due to address changes being made but not clearly explained. The address changes were 16514/16515 to 16507/16508.

This EPROM board could be very useful on saving RAM, if you can write your own routines in machine code (EPROM services intend to make more programs available soon).

It does however restrict the amount of RAM you can use and as a number of boards that plug into the same address space, you will be limited as to what sockets you can use. **SA**

Open Forum

Open Forum is for you to publish your programs and ideas.

It is important that your programs are bug free before you send them in. We cannot test all of them.

Contributions should be sent to: Popular Computing Weekly, Hobhouse Court,
19 Whitcomb Street, London WC2H 7HF.

Flashing pound

on Vic-20

This program places the Vic pound sign as a defined character randomly on the screen and then scrolls it in pixel format vertically in its cell space.

Lines 150 to 190 copy the character down, redefine the space character and switch the character sets. Lines 200 to 240 move the bytes through the character cell to perform the scroll.

If the same routine was applied to more characters in machine code it should be possible to move displays on the screen in fine scroll, thus opening up interesting areas in the games and visual presentation fields.

Flashing pound by Chris Palmer

```
10 REM FLOATING POUND
20 REM
30 REM CHRIS PALMER
40 :
50 :
60 SC=7680:CL=38400
70 CH=28*8:CB=7168
80 PRINT"J"
90 POKE 36879,8
100 FORI=1TO10
110 FS=INT(RND(1)*386+1)
120 POKE SC+FS,28
130 POKE CL+FS,7
140 NEXT
150 FORI=0TO7
160 POKECB+I+CH,PEEK(32768+I+CH)
170 POKE CB+32*8+I,8
180 NEXT
190 POKE36863,255
200 TV=PEEK(CT+CH)
210 FORI=0TO6
220 POKECB+CH+I,PEEK(CB+CH+I+1)
230 NEXT
240 POKE CB+7+CH,TV
250 GOTO 200
```

YOUR PROGRAM COULD WIN A PRIZE!

Each week the editor goes through all the programs that you send to Open Forum in order to find the Program of the Week.

The author of that program will qualify for **DOUBLE** the usual fee we pay for published programs (the usual fee is £10).

Programs which are most likely to be considered for the Star Prize will be computer printed and accompanied by a cassette.

The programs will be well documented, the documentation being typed with a double spacing between each line. The documentation should start with a general description of the program and then give some detail of how the program has been constructed and of its special features.

Listings taken from a ZX Printer should be cut into convenient lengths and stuck down on to white paper.

Please enclose a self-addressed envelope.

Cone

by Jeremy Rowntree

```
10 REM 3-D CONES
20 REM BY J.ROWNTREE
30 REM AND B.LINDSAY
40 REM FOR BBC MICRO
50 REM
60 MODE 4
70 REM DEFINE COLOURS
80 V=19:J=2:K=0:O=19:Q=7:R=0:0
90 A=640:B=130
100 MOVE A,B:PLOT 22,A,1024
110 J=RND(180)+220:K=RND(100)+20
120 I=K/J:V=RND(30)+25:Q=50+RND(50)-V
130 MOVE A,B+K
140 FOR X=0 TO 2*PI STEP PI/180
150 BRAY A+J*SIN(X),B+K*COS(X)
160 NEXT X
170 FOR Q=0 TO 2*PI STEP PI/9
180 MOVE A+J*SIN(Q),B+K*COS(Q):DRAW A*(J-2)
  *SIN(Q),B+V+I*(J-5)*COS(Q)
190 NEXT Q
200 B=B+V:J=J-5
210 REM TRY 'V+B' AT LINE 200
220 V=V-B/100
230 K=I*J
240 GOTO 130
```

Cone

on BBC Micro

This program will run on a BBC Micro Model A or B in any available graphics mode. When RUN it will draw a random cone in 3D in the form of a moulded grid.

The screen colours are defined at Line 80; the '2' sets the foreground, ie plotting, colour to green while the '7' sets the background, ie screen, colour to white.

These numbers can be altered to give different colours: 1 — red; 2 — green; 3 — yellow; 4 — blue; etc.

Program notes

Lines 90-120 define a random ellipse, centre A, B; major axis J; minor axis K. This ellipse is then plotted by Lines 130-160.

V and S define how the next ellipse relates to this one — V = vertical distance between them, S = amount by which ellipse shrinks — while I keep the ratio of the axes constant. Lines 170-190 draw lines connecting the ellipses.

Line 220 adjusts the vertical step as the cone is plotted causing the shape to curve — with a '-' sign it curves inwards while with a '+' sign it curves outwards.

The STEP in Line 140 can be altered to give a more rapid plot (try PI/90) at the expense of resolution while altering the STEP in Line 170 will vary the spacing of the vertical lines.

Depth charge

on ZX81

In this program you command a frigate with a substantial supply of depth-charges. You must destroy the submarines, which travel at various depths, before five parts of the dam-wall are destroyed. The deeper the

to next page

Open Forum

could be revised using PEEK and POKE to give a static display.

If line 3050 is deleted, the program will now play the same replies in a new game if the player repeats moves from a previous game. Various strategies can be examined to determine the program's weaknesses.

For an alternative game, reverse the inequality signs in lines 3030 and 3040. The program will now play anti-noughts and crosses, trying to avoid creating lines of four. Remember also to change lines 5000 and 5020. If lines 140-170 are deleted, and this line is substituted:

```
140 GOSUB 3000: PRINT:PRINT"YOUR MOVE IS";PRINT P+1;R+1;C+1
```

The computer will take both sides and play itself. Experimentation is possible with the program playing both parts with different versions of B(n). If the losing values of B(N) are modified while the winning values are retained, the program becomes self-teaching and will eventually improve.

The values of B(0)-B(8) are not optimal and can be varied to change the program's play — the only changes required are in line 20.

With a few extra lines the value can be altered according to who is playing eg low values for XXX* and 0000* when you play and very high when your friends play.

Please remember you input plane, row and column (P,R,C) as 1,1,1 not 111. Good luck!

Message scroller

on ZX81

The program asks you to type in a message. It then scrolls your message four letters at a time up the screen, enlarging each character 64 times; forming an 8 x 8 matrix. A machine code routine is used to help speed the printing up.

Program notes

The program is divided into two sections; the first to enter the machine code (Lines 1-30), when this section of the program has been entered (take care to get line 2 exact) apparent rubbish will appear in line 1 — this is the machine code, lines

to next page

3D noughts and crosses by Martin Burke

```
1 OPEN:4 : CHD 1
5 POKE537,PEEK(537)+3:REM RUN /STOP OFF.
10 REM-SET UP BOARD & INITIALISE VARIABLES.-
20 DATA:10,2,14,9,98,4,100,27,900,8,1000,6,-14,10,-90,12,-100
30 DIM M(3,3,3),N(3,3,3),A(8),B(8)
40 D=1:AE="ROWS"
50 FOR P=0 TO 3:FOR R=0 TO 3:FOR C=0 TO 3
60 IFF=R ANDP=C THEN 110
70 IF P=C AND P=3-R THEN 110
80 IF P=3-C AND R=C THEN 110
90 IF P=R AND P=3-C THEN 110
100 GOTO 120
110 N(P,R,C)=10
120 M(P,R,C)=1:NEXT C:NEXT R:NEXT P
130 FOR N= TO 8:READ A(N),B(N):NEXT N:GOSUB 2000
140 PRINT"INPUT YOUR MOVE"
150 INPUT P,R,C:P=P-1:R=R-1:C=C-1
160 IF P>3 OR R>3 OR C>3 OR P<0 OR R<0 OR C<0 THEN 140
170 IF N(P,R,C)>1 THEN PRINT"CELL OCCUPIED":PRINT GOTO 140
180 M(P,R,C)=3:GOSUB 1000:GOSUB 2000:GOSUB 3000
190 PRINT"MY MOVE IS ":P+1;R+1;C+1:MC=MC+2
200 PRINT:M(P,C,R)=2:GOSUB1000:GOSUB2000
210 IF MC=64 THEN PRINT" GAME DRAW " :END
220 GOTO 140
990 REM** FIND ON WHICH LINES THE MOVE CELL LIES.**
1000 FOR Q=1 TO 3:GOSUB 4000:NEXT Q
1020 IF P<R AND P<C AND R<C THEN 1060
1030 IF P=R THEN Q=4:GOSUB 4000
1040 IF P=C THEN Q=5:GOSUB 4000
1050 IF R=C THEN Q=6:GOSUB 4000
1060 IF P<3-R AND P<3-C AND R<3-C THEN 1130
1070 IF P=3-R THEN Q=7:GOSUB 4000
1080 IF P=3-C THEN Q=8:GOSUB 4000
1090 IF R=3-C THEN Q=9:GOSUB 4000
1100 IF P=R AND P=3-C THEN Q=10:GOSUB 4000
1110 IF P=C AND P=3-R THEN Q=11:GOSUB 4000
1120 IF P=3-C AND R=C THEN Q=12:GOSUB 4000
1130 IF P=R AND R=C THEN Q=13:GOSUB 4000
1140 RETURN
1190 REM*****DRAW BOARD*****
2000 PRINTTAB(10):"COLUMNS" :PRINT
2020 PRINTTAB(4):"1234 1234 1234 1234"
2030 FOR R=0 TO 3:PRINTMID$(AE,R+1,1);R+1;
2040 FOR P= 0 TO 3:FOR C=0 TO 3
2050 ON M(P,R,C) GOTO 2070,2080
2060 PRINT"0":GOTO2090
2070 PRINT"X":GOTO2090
2080 PRINT"N":
2090 NEXT C:PRINT" ":NEXT P:PRINT:NEXT R:PRINT:PRINT:RETURN
2990 REM*****FIND CELL WITH HIGHEST PRIORITY VALUE*****
3000 HV=0:FOR P=0 TO 3:FOR R=0 TO 3:FOR C=0 TO 3
3020 IF M(P,R,C)>1 THEN 3060
3030 IF N(P,R,C) < HV THEN 3060
3040 IF N(P,R,C) > HV THEN HV=N(P,R,C):P1=P:R1=R:C1=C:GOTO 3060
3050 IF AND(B)>0,5 THEN HV=N(P,R,C):P1=P:R1=R:C1=C
3060 NEXT C:NEXT R:NEXT P:P=P+1:R=R+1:C=C+1:RETURN
3990 REM*****ADD PRIORITY VALUES TO TOTAL*****
3995 REM*****FOR CELLS IN LINE WITH MOVE CELL*****
4000 FOR T=0 TO 3:P1=P:R1=R:C1=C
4020 ON Q GOTO 4050,4060,4070
4030 P1=T
4040 ONQ-300TO4050,4070,4100,4110,4120,4130,4140,4150,4160,4170
4050 P1=T:GOTO 4180
4060 R1=T:GOTO 4180
4070 C1=T:GOTO 4180
4100 P1=P:R1=T:C1=T:GOTO 4180
4110 R1=3-T:GOTO 4180
4120 C1=3-T:GOTO 4180
4130 P1=P:R1=T:C1=3-T:GOTO 4180
4140 R1=T:C1=3-T:GOTO 4180
4150 R1=3-T:C1=3-T:GOTO 4180
4160 R1=3-T:C1=3-T:GOTO4180
4170 R1=T:C1=T
4180 IF F=1 THENM(P1,R1,C1)=N(P1,R1,C1)+5:GOTO 4200
4190 D=D+M(P1,R1,C1)
4200 NEXT T:IF F=0 THEN F=1:GOSUB 5000:GOTO 4000
4210 F=0:RETURN
4900 REM*****FIND NEW PRIORITY VALUE TO BE STORED AND ADDED.***
5000 IF D=16 THEN GOSUB 2000:PRINT:PRINT" I WIN !!!" :END
5020 IF D=81 THEN PRINT:PRINT" YOU WIN " :PRINT:END
5030 IF D=6 AND M(P,R,C)=2 THEN S=-10:GOTO 5070
5040 IF D/M(P,R,C)=6 THEN S=0:GOTO 5070
5050 FOR N= 0 TO 8:IF D=A(N) THEN S=B(N):GOTO 5070
5060 NEXT N
5070 D=1:RETURN
```

Open Forum

from previous page

2,5,10,20,25,30 can then be deleted. Lines 40-195 can then be entered — this is the main program. In the program, the two characters used for printing are a space and inverse space. You can change the characters by 'POKE'ing 16529 and 16536 with two new characters.

For example:

```
POKE 16529,128
POKE 16536,0
```

will give inverse video character.

You can use the program to give a continuously repeating message by adding

```
200 GOTO 110
```

Message scroller by Philip Haywood

```
100 REM 32045678901234567890123
110 LET M=1
120 LET L=LEN(M)
130 LET X=0
140 FOR N=1 TO L
150   LET U=ASC(M(N))
160   LET V=ASC(" ")
170   LET W=ASC(" ")
180   LET X=X+1
190   LET Y=Y+1
200   LET Z=0
210   LET A=0
220   LET B=0
230   LET C=0
240   LET D=0
250   LET E=0
260   LET F=0
270   LET G=0
280   LET H=0
290   LET I=0
300   LET J=0
310   LET K=0
320   LET L=0
330   LET M=0
340   LET N=0
350   LET O=0
360   LET P=0
370   LET Q=0
380   LET R=0
390   LET S=0
400   LET T=0
410   LET U=0
420   LET V=0
430   LET W=0
440   LET X=0
450   LET Y=0
460   LET Z=0
470   LET A=0
480   LET B=0
490   LET C=0
500   LET D=0
510   LET E=0
520   LET F=0
530   LET G=0
540   LET H=0
550   LET I=0
560   LET J=0
570   LET K=0
580   LET L=0
590   LET M=0
600   LET N=0
610   LET O=0
620   LET P=0
630   LET Q=0
640   LET R=0
650   LET S=0
660   LET T=0
670   LET U=0
680   LET V=0
690   LET W=0
700   LET X=0
710   LET Y=0
720   LET Z=0
730   LET A=0
740   LET B=0
750   LET C=0
760   LET D=0
770   LET E=0
780   LET F=0
790   LET G=0
800   LET H=0
810   LET I=0
820   LET J=0
830   LET K=0
840   LET L=0
850   LET M=0
860   LET N=0
870   LET O=0
880   LET P=0
890   LET Q=0
900   LET R=0
910   LET S=0
920   LET T=0
930   LET U=0
940   LET V=0
950   LET W=0
960   LET X=0
970   LET Y=0
980   LET Z=0
990   LET A=0
1000  LET B=0
1010  LET C=0
1020  LET D=0
1030  LET E=0
1040  LET F=0
1050  LET G=0
1060  LET H=0
1070  LET I=0
1080  LET J=0
1090  LET K=0
1100  LET L=0
1110  LET M=0
1120  LET N=0
1130  LET O=0
1140  LET P=0
1150  LET Q=0
1160  LET R=0
1170  LET S=0
1180  LET T=0
1190  LET U=0
1200  LET V=0
1210  LET W=0
1220  LET X=0
1230  LET Y=0
1240  LET Z=0
1250  LET A=0
1260  LET B=0
1270  LET C=0
1280  LET D=0
1290  LET E=0
1300  LET F=0
1310  LET G=0
1320  LET H=0
1330  LET I=0
1340  LET J=0
1350  LET K=0
1360  LET L=0
1370  LET M=0
1380  LET N=0
1390  LET O=0
1400  LET P=0
1410  LET Q=0
1420  LET R=0
1430  LET S=0
1440  LET T=0
1450  LET U=0
1460  LET V=0
1470  LET W=0
1480  LET X=0
1490  LET Y=0
1500  LET Z=0
1510  LET A=0
1520  LET B=0
1530  LET C=0
1540  LET D=0
1550  LET E=0
1560  LET F=0
1570  LET G=0
1580  LET H=0
1590  LET I=0
1600  LET J=0
1610  LET K=0
1620  LET L=0
1630  LET M=0
1640  LET N=0
1650  LET O=0
1660  LET P=0
1670  LET Q=0
1680  LET R=0
1690  LET S=0
1700  LET T=0
1710  LET U=0
1720  LET V=0
1730  LET W=0
1740  LET X=0
1750  LET Y=0
1760  LET Z=0
1770  LET A=0
1780  LET B=0
1790  LET C=0
1800  LET D=0
1810  LET E=0
1820  LET F=0
1830  LET G=0
1840  LET H=0
1850  LET I=0
1860  LET J=0
1870  LET K=0
1880  LET L=0
1890  LET M=0
1900  LET N=0
1910  LET O=0
1920  LET P=0
1930  LET Q=0
1940  LET R=0
1950  LET S=0
1960  LET T=0
1970  LET U=0
1980  LET V=0
1990  LET W=0
2000  LET X=0
2010  LET Y=0
2020  LET Z=0
2030  LET A=0
2040  LET B=0
2050  LET C=0
2060  LET D=0
2070  LET E=0
2080  LET F=0
2090  LET G=0
2100  LET H=0
2110  LET I=0
2120  LET J=0
2130  LET K=0
2140  LET L=0
2150  LET M=0
2160  LET N=0
2170  LET O=0
2180  LET P=0
2190  LET Q=0
2200  LET R=0
2210  LET S=0
2220  LET T=0
2230  LET U=0
2240  LET V=0
2250  LET W=0
2260  LET X=0
2270  LET Y=0
2280  LET Z=0
2290  LET A=0
2300  LET B=0
2310  LET C=0
2320  LET D=0
2330  LET E=0
2340  LET F=0
2350  LET G=0
2360  LET H=0
2370  LET I=0
2380  LET J=0
2390  LET K=0
2400  LET L=0
2410  LET M=0
2420  LET N=0
2430  LET O=0
2440  LET P=0
2450  LET Q=0
2460  LET R=0
2470  LET S=0
2480  LET T=0
2490  LET U=0
2500  LET V=0
2510  LET W=0
2520  LET X=0
2530  LET Y=0
2540  LET Z=0
2550  LET A=0
2560  LET B=0
2570  LET C=0
2580  LET D=0
2590  LET E=0
2600  LET F=0
2610  LET G=0
2620  LET H=0
2630  LET I=0
2640  LET J=0
2650  LET K=0
2660  LET L=0
2670  LET M=0
2680  LET N=0
2690  LET O=0
2700  LET P=0
2710  LET Q=0
2720  LET R=0
2730  LET S=0
2740  LET T=0
2750  LET U=0
2760  LET V=0
2770  LET W=0
2780  LET X=0
2790  LET Y=0
2800  LET Z=0
2810  LET A=0
2820  LET B=0
2830  LET C=0
2840  LET D=0
2850  LET E=0
2860  LET F=0
2870  LET G=0
2880  LET H=0
2890  LET I=0
2900  LET J=0
2910  LET K=0
2920  LET L=0
2930  LET M=0
2940  LET N=0
2950  LET O=0
2960  LET P=0
2970  LET Q=0
2980  LET R=0
2990  LET S=0
3000  LET T=0
3010  LET U=0
3020  LET V=0
3030  LET W=0
3040  LET X=0
3050  LET Y=0
3060  LET Z=0
3070  LET A=0
3080  LET B=0
3090  LET C=0
3100  LET D=0
3110  LET E=0
3120  LET F=0
3130  LET G=0
3140  LET H=0
3150  LET I=0
3160  LET J=0
3170  LET K=0
3180  LET L=0
3190  LET M=0
3200  LET N=0
3210  LET O=0
3220  LET P=0
3230  LET Q=0
3240  LET R=0
3250  LET S=0
3260  LET T=0
3270  LET U=0
3280  LET V=0
3290  LET W=0
3300  LET X=0
3310  LET Y=0
3320  LET Z=0
3330  LET A=0
3340  LET B=0
3350  LET C=0
3360  LET D=0
3370  LET E=0
3380  LET F=0
3390  LET G=0
3400  LET H=0
3410  LET I=0
3420  LET J=0
3430  LET K=0
3440  LET L=0
3450  LET M=0
3460  LET N=0
3470  LET O=0
3480  LET P=0
3490  LET Q=0
3500  LET R=0
3510  LET S=0
3520  LET T=0
3530  LET U=0
3540  LET V=0
3550  LET W=0
3560  LET X=0
3570  LET Y=0
3580  LET Z=0
3590  LET A=0
3600  LET B=0
3610  LET C=0
3620  LET D=0
3630  LET E=0
3640  LET F=0
3650  LET G=0
3660  LET H=0
3670  LET I=0
3680  LET J=0
3690  LET K=0
3700  LET L=0
3710  LET M=0
3720  LET N=0
3730  LET O=0
3740  LET P=0
3750  LET Q=0
3760  LET R=0
3770  LET S=0
3780  LET T=0
3790  LET U=0
3800  LET V=0
3810  LET W=0
3820  LET X=0
3830  LET Y=0
3840  LET Z=0
3850  LET A=0
3860  LET B=0
3870  LET C=0
3880  LET D=0
3890  LET E=0
3900  LET F=0
3910  LET G=0
3920  LET H=0
3930  LET I=0
3940  LET J=0
3950  LET K=0
3960  LET L=0
3970  LET M=0
3980  LET N=0
3990  LET O=0
4000  LET P=0
4010  LET Q=0
4020  LET R=0
4030  LET S=0
4040  LET T=0
4050  LET U=0
4060  LET V=0
4070  LET W=0
4080  LET X=0
4090  LET Y=0
4100  LET Z=0
4110  LET A=0
4120  LET B=0
4130  LET C=0
4140  LET D=0
4150  LET E=0
4160  LET F=0
4170  LET G=0
4180  LET H=0
4190  LET I=0
4200  LET J=0
4210  LET K=0
4220  LET L=0
4230  LET M=0
4240  LET N=0
4250  LET O=0
4260  LET P=0
4270  LET Q=0
4280  LET R=0
4290  LET S=0
4300  LET T=0
4310  LET U=0
4320  LET V=0
4330  LET W=0
4340  LET X=0
4350  LET Y=0
4360  LET Z=0
4370  LET A=0
4380  LET B=0
4390  LET C=0
4400  LET D=0
4410  LET E=0
4420  LET F=0
4430  LET G=0
4440  LET H=0
4450  LET I=0
4460  LET J=0
4470  LET K=0
4480  LET L=0
4490  LET M=0
4500  LET N=0
4510  LET O=0
4520  LET P=0
4530  LET Q=0
4540  LET R=0
4550  LET S=0
4560  LET T=0
4570  LET U=0
4580  LET V=0
4590  LET W=0
4600  LET X=0
4610  LET Y=0
4620  LET Z=0
4630  LET A=0
4640  LET B=0
4650  LET C=0
4660  LET D=0
4670  LET E=0
4680  LET F=0
4690  LET G=0
4700  LET H=0
4710  LET I=0
4720  LET J=0
4730  LET K=0
4740  LET L=0
4750  LET M=0
4760  LET N=0
4770  LET O=0
4780  LET P=0
4790  LET Q=0
4800  LET R=0
4810  LET S=0
4820  LET T=0
4830  LET U=0
4840  LET V=0
4850  LET W=0
4860  LET X=0
4870  LET Y=0
4880  LET Z=0
4890  LET A=0
4900  LET B=0
4910  LET C=0
4920  LET D=0
4930  LET E=0
4940  LET F=0
4950  LET G=0
4960  LET H=0
4970  LET I=0
4980  LET J=0
4990  LET K=0
5000  LET L=0
5010  LET M=0
5020  LET N=0
5030  LET O=0
5040  LET P=0
5050  LET Q=0
5060  LET R=0
5070  LET S=0
5080  LET T=0
5090  LET U=0
5100  LET V=0
5110  LET W=0
5120  LET X=0
5130  LET Y=0
5140  LET Z=0
5150  LET A=0
5160  LET B=0
5170  LET C=0
5180  LET D=0
5190  LET E=0
5200  LET F=0
5210  LET G=0
5220  LET H=0
5230  LET I=0
5240  LET J=0
5250  LET K=0
5260  LET L=0
5270  LET M=0
5280  LET N=0
5290  LET O=0
5300  LET P=0
5310  LET Q=0
5320  LET R=0
5330  LET S=0
5340  LET T=0
5350  LET U=0
5360  LET V=0
5370  LET W=0
5380  LET X=0
5390  LET Y=0
5400  LET Z=0
5410  LET A=0
5420  LET B=0
5430  LET C=0
5440  LET D=0
5450  LET E=0
5460  LET F=0
5470  LET G=0
5480  LET H=0
5490  LET I=0
5500  LET J=0
5510  LET K=0
5520  LET L=0
5530  LET M=0
5540  LET N=0
5550  LET O=0
5560  LET P=0
5570  LET Q=0
5580  LET R=0
5590  LET S=0
5600  LET T=0
5610  LET U=0
5620  LET V=0
5630  LET W=0
5640  LET X=0
5650  LET Y=0
5660  LET Z=0
5670  LET A=0
5680  LET B=0
5690  LET C=0
5700  LET D=0
5710  LET E=0
5720  LET F=0
5730  LET G=0
5740  LET H=0
5750  LET I=0
5760  LET J=0
5770  LET K=0
5780  LET L=0
5790  LET M=0
5800  LET N=0
5810  LET O=0
5820  LET P=0
5830  LET Q=0
5840  LET R=0
5850  LET S=0
5860  LET T=0
5870  LET U=0
5880  LET V=0
5890  LET W=0
5900  LET X=0
5910  LET Y=0
5920  LET Z=0
5930  LET A=0
5940  LET B=0
5950  LET C=0
5960  LET D=0
5970  LET E=0
5980  LET F=0
5990  LET G=0
6000  LET H=0
6010  LET I=0
6020  LET J=0
6030  LET K=0
6040  LET L=0
6050  LET M=0
6060  LET N=0
6070  LET O=0
6080  LET P=0
6090  LET Q=0
6100  LET R=0
6110  LET S=0
6120  LET T=0
6130  LET U=0
6140  LET V=0
6150  LET W=0
6160  LET X=0
6170  LET Y=0
6180  LET Z=0
6190  LET A=0
6200  LET B=0
6210  LET C=0
6220  LET D=0
6230  LET E=0
6240  LET F=0
6250  LET G=0
6260  LET H=0
6270  LET I=0
6280  LET J=0
6290  LET K=0
6300  LET L=0
6310  LET M=0
6320  LET N=0
6330  LET O=0
6340  LET P=0
6350  LET Q=0
6360  LET R=0
6370  LET S=0
6380  LET T=0
6390  LET U=0
6400  LET V=0
6410  LET W=0
6420  LET X=0
6430  LET Y=0
6440  LET Z=0
6450  LET A=0
6460  LET B=0
6470  LET C=0
6480  LET D=0
6490  LET E=0
6500  LET F=0
6510  LET G=0
6520  LET H=0
6530  LET I=0
6540  LET J=0
6550  LET K=0
6560  LET L=0
6570  LET M=0
6580  LET N=0
6590  LET O=0
6600  LET P=0
6610  LET Q=0
6620  LET R=0
6630  LET S=0
6640  LET T=0
6650  LET U=0
6660  LET V=0
6670  LET W=0
6680  LET X=0
6690  LET Y=0
6700  LET Z=0
6710  LET A=0
6720  LET B=0
6730  LET C=0
6740  LET D=0
6750  LET E=0
6760  LET F=0
6770  LET G=0
6780  LET H=0
6790  LET I=0
6800  LET J=0
6810  LET K=0
6820  LET L=0
6830  LET M=0
6840  LET N=0
6850  LET O=0
6860  LET P=0
6870  LET Q=0
6880  LET R=0
6890  LET S=0
6900  LET T=0
6910  LET U=0
6920  LET V=0
6930  LET W=0
6940  LET X=0
6950  LET Y=0
6960  LET Z=0
6970  LET A=0
6980  LET B=0
6990  LET C=0
7000  LET D=0
7010  LET E=0
7020  LET F=0
7030  LET G=0
7040  LET H=0
7050  LET I=0
7060  LET J=0
7070  LET K=0
7080  LET L=0
7090  LET M=0
7100  LET N=0
7110  LET O=0
7120  LET P=0
7130  LET Q=0
7140  LET R=0
7150  LET S=0
7160  LET T=0
7170  LET U=0
7180  LET V=0
7190  LET W=0
7200  LET X=0
7210  LET Y=0
7220  LET Z=0
7230  LET A=0
7240  LET B=0
7250  LET C=0
7260  LET D=0
7270  LET E=0
7280  LET F=0
7290  LET G=0
7300  LET H=0
7310  LET I=0
7320  LET J=0
7330  LET K=0
7340  LET L=0
7350  LET M=0
7360  LET N=0
7370  LET O=0
7380  LET P=0
7390  LET Q=0
7400  LET R=0
7410  LET S=0
7420  LET T=0
7430  LET U=0
7440  LET V=0
7450  LET W=0
7460  LET X=0
7470  LET Y=0
7480  LET Z=0
7490  LET A=0
7500  LET B=0
7510  LET C=0
7520  LET D=0
7530  LET E=0
7540  LET F=0
7550  LET G=0
7560  LET H=0
7570  LET I=0
7580  LET J=0
7590  LET K=0
7600  LET L=0
7610  LET M=0
7620  LET N=0
7630  LET O=0
7640  LET P=0
7650  LET Q=0
7660  LET R=0
7670  LET S=0
7680  LET T=0
7690  LET U=0
7700  LET V=0
7710  LET W=0
7720  LET X=0
7730  LET Y=0
7740  LET Z=0
7750  LET A=0
7760  LET B=0
7770  LET C=0
7780  LET D=0
7790  LET E=0
7800  LET F=0
7810  LET G=0
7820  LET H=0
7830  LET I=0
7840  LET J=0
7850  LET K=0
7860  LET L=0
7870  LET M=0
7880  LET N=0
7890  LET O=0
7900  LET P=0
7910  LET Q=0
7920  LET R=0
7930  LET S=0
7940  LET T=0
7950  LET U=0
7960  LET V=0
7970  LET W=0
7980  LET X=0
7990  LET Y=0
8000  LET Z=0
8010  LET A=0
8020  LET B=0
8030  LET C=0
8040  LET D=0
8050  LET E=0
8060  LET F=0
8070  LET G=0
8080  LET H=0
8090  LET I=0
8100  LET J=0
8110  LET K=0
8120  LET L=0
8130  LET M=0
8140  LET N=0
8150  LET O=0
8160  LET P=0
8170  LET Q=0
8180  LET R=0
8190  LET S=0
8200  LET T=0
8210  LET U=0
8220  LET V=0
8230  LET W=0
8240  LET X=0
8250  LET Y=0
8260  LET Z=0
8270  LET A=0
8280  LET B=0
8290  LET C=0
8300  LET D=0
8310  LET E=0
8320  LET F=0
8330  LET G=0
8340  LET H=0
8350  LET I=0
8360  LET J=0
8370  LET K=0
8380  LET L=0
8390  LET M=0
8400  LET N=0
8410  LET O=0
8420  LET P=0
8430  LET Q=0
8440  LET R=0
8450  LET S=0
8460  LET T=0
8470  LET U=0
8480  LET V=0
8490  LET W=0
8500  LET X=0
8510  LET Y=0
8520  LET Z=0
8530  LET A=0
8540  LET B=0
8550  LET C=0
8560  LET D=0
8570  LET E=0
8580  LET F=0
8590  LET G=0
8600  LET H=0
8610  LET I=0
8620  LET J=0
8630  LET K=0
8640  LET L=0
8650  LET M=0
8660  LET N=0
8670  LET O=0
8680  LET P=0
8690  LET Q=0
8700  LET R=0
8710  LET S=0
8720  LET T=0
8730  LET U=0
8740  LET V=0
8750  LET W=0
8760  LET X=0
8770  LET Y=0
8780  LET Z=0
8790  LET A=0
8800  LET B=0
8810  LET C=0
8820  LET D=0
8830  LET E=0
8840  LET F=0
8850  LET G=0
8860  LET H=0
8870  LET I=0
8880  LET J=0
8890  LET K=0
8900  LET L=0
8910  LET M=0
8920  LET N=0
8930  LET O=0
8940  LET P=0
8950  LET Q=0
8960  LET R=0
8970  LET S=0
8980  LET T=0
8990  LET U=0
9000  LET V=0
9010  LET W=0
9020  LET X=0
9030  LET Y=0
9040  LET Z=0
9050  LET A=0
9060  LET B=0
9070  LET C=0
9080  LET D=0
9090  LET E=0
9100  LET F=0
9110  LET G=0
9120  LET H=0
9130  LET I=0
9140  LET J=0
9150  LET K=0
9160  LET L=0
9170  LET M=0
9180  LET N=0
9190  LET O=0
9200  LET P=0
9210  LET Q=0
9220  LET R=0
9230  LET S=0
9240  LET T=0
9250  LET U=0
9260  LET V=0
9270  LET W=0
9280  LET X=0
9290  LET Y=0
9300  LET Z=0
9310  LET A=0
9320  LET B=0
9330  LET C=0
9340  LET D=0
9350  LET E=0
9360  LET F=0
9370  LET G=0
9380  LET H=0
9390  LET I=0
9400  LET J=0
9410  LET K=0
9420  LET L=0
9430  LET M=0
9440  LET N=0
9450  LET O=0
9460  LET P=0
9470  LET Q=0
9480  LET R=0
9490  LET S=0
9500  LET T=0
9510  LET U=0
9520  LET V=0
9530  LET W=0
9540  LET X=0
9550  LET Y=0
9560  LET Z=0
9570  LET A=0
9580  LET B=0
9590  LET C=0
9600  LET D=0
9610  LET E=0
9620  LET F=0
9630  LET G=0
9640  LET H=0
9650  LET I=0
9660  LET J=0
9670  LET K=0
9680  LET L=0
9690  LET M=0
9700  LET N=0
9710  LET O=0
9720  LET P=0
9730  LET Q=0
9740  LET R=0
9750  LET S=0
9760  LET T=0
9770  LET U=0
9780  LET V=0
9790  LET W=0
9800  LET X=0
9810  LET Y=0
9820  LET Z=0
9830  LET A=0
9840  LET B=0
9850  LET C=0
9860  LET D=0
9870  LET E=0
9880  LET F=0
9890  LET G=0
9900  LET H=0
9910  LET I=0
9920  LET J=0
9930  LET K=0
9940  LET L=0
9950  LET M=0
9960  LET N=0
9970  LET O=0
9980  LET P=0
9990  LET Q=0
10000  LET R=0
10010  LET S=0
10020  LET T=0
10030  LET U=0
10040  LET V=0
10050  LET W=0
10060  LET X=0
10070  LET Y=0
10080  LET Z=0
10090  LET A=0
10100  LET B=0
10110  LET C=0
10120  LET D=0
10130  LET E=0
10140  LET F=0
10150  LET G=0
10160  LET H=0
10170  LET I=0
10180  LET J=0
10190  LET K=0
10200  LET L=0
10210  LET M=0
10220  LET N=0
10230  LET O=0
10240  LET P=0
10250  LET Q=0
10260  LET R=0
10270  LET S=0
10280  LET T=0
10290  LET U=0
10300  LET V=0
10310  LET W=0
10320  LET X=0
10330  LET Y=0
10340  LET Z=0
10350  LET A=0
10360  LET B=0
10370  LET C=0
10380  LET D=0
10390  LET E=0
10400  LET F=0
10410  LET G=0
10420  LET H=0
10430  LET I=0
10440  LET J=0
10450  LET K=0
10460  LET L=0
10470  LET M=0
10480  LET N=0
10490  LET O=0
10500  LET P=0
10510  LET Q=0
10520  LET R=0
10530  LET S=0
10540  LET T=0
10550  LET U=0
10560  LET V=0
10570  LET W=0
10580  LET X=0
10590  LET Y=0
10600  LET Z=0
10610  LET A=0
10620  LET B=0
10630  LET C=0
10640  LET D=0
10650  LET E=0
10660  LET F=0
10670  LET G=0
10680  LET H=0
10690  LET I=0
10700  LET J=0
10710  LET K=0
10720  LET L=0
10730  LET M=0
10740  LET N=0
10750  LET O=0
10760  LET P=0
10770  LET Q=0
10780  LET R=0
10790  LET S=0
10800  LET T=0
10810  LET U=0
10820  LET V=0
10830  LET W=0
10840  LET X=0
10850  LET Y=0
10860  LET Z=0
10870  LET A=0
10880  LET B=0
10890  LET C=0
10900  LET D=0
10910  LET E=0
10920  LET F=0
10930  LET G=0
10940  LET H=0
10950  LET I=0
10960  LET J=0
10970  LET K=0
10980  LET L=0
10990  LET M=0
11000  LET N=0
11010  LET O=0
11020  LET P=0
11030  LET Q=0
11040  LET R=0
11050  LET S=0
11060  LET T=0
11070  LET U=0
11080  LET V=0
11090  LET W=0
11100  LET X=0
11110  LET Y=0
11120  LET Z=0
11130  LET A=0
11140  LET B=0
11150  LET C=0
11160  LET D=0
11170  LET E=0
11180  LET F=0
11190  LET G=0
11200  LET H=0
11210  LET I=0
11220  LET J=0
11230  LET K=0
11240  LET L=0
11250  LET M=0
11260  LET N=0
11270  LET O=0
11280  LET P=0
11290  LET Q=0
11300  LET R=0
11310  LET S=0
11320  LET T=0
11330  LET U=0
11340  LET V=0
11350  LET W=0
11360  LET X=0
11370  LET Y=0
11380  LET Z=0
11390  LET A=0
11400  LET B=0
11410  LET C=0
11420  LET D=0
11430  LET E=0
11440  LET F=0
11450  LET G=0
11460  LET H=0
11470  LET I=0
11480  LET J=0
11490  LET K=0
11500  LET L=0
11510  LET M=0
11520  LET N=0
11530  LET O=0
11540  LET P=0
11550  LET Q=0
11560  LET R=0
11570  LET S=0
11580  LET T=0
11590  LET U=0
11600  LET V=0
11610  LET W=0
11620  LET X=0
11630  LET Y=0
11640  LET Z=0
11650  LET A=0
11660  LET B=0
11670  LET C=0
11680  LET D=0
11690  LET E=0
11700  LET F=0
11710  LET G=0
11720  LET H=0
11730  LET I=0
11740  LET J=0
11750  LET K=0
11760  LET L=0
11770  LET M=0
11780  LET N=0
11790  LET O=0
11800  LET P=0
11810  LET Q=0
11820  LET R=0
11830  LET S=0
11840  LET T
```

Open Forum

Space warrior

on Vic-20

The idea is simple but requires some skill to manoeuvre the cross until it is over the centre of an 'alien', when the player must fire and destroy it. The cross can be manoeuvred in both vertical and horizontal directions with a 'repeat' action so to avoid having to keep on pressing the same key to move it a few spaces. The keys I have chosen are:

Z — left
C — right
V — down
G — up
M — fire

They may seem a little 'clustered up' but I assure you after only a few games they become no problem.

There are ten aliens which must be destroyed within the time limit. The player enters his time at the beginning of the program (4-10 min; this can be shortened or lengthened by changing one or two of the lines from 66-72).

The aliens are randomly positioned at the top of the screen and then come down the screen at totally random movements. The reaction from pressing a key to the movement of the cross is very good.

When, or if, the alien reaches a red border line then it disappears and another is generated. Also if the cross touches the border then it marks the end of the game.

The sound generators have been put to good use especially when an explosion occurs.

Car race

on ZX81

The object of this game is to manoeuvre your racing car (shown as a multiplication sign) round the racing circuit in a clockwise direction without crashing into the barriers.

Every time a lap is completed the computer adds to your score and randomly places a number of obstacles on the circuit which you have to avoid.

As well as keeping your score the computer also keeps the highest score.

to next page

Space warrior
by Gerhard Nath

```
10 PRINT "J"
20 PRINT " SPACE WARRIOR!!"
30 PRINT " "
40 PRINT "XOXOX"
50 PRINT "Z-LEFT C-RIGHT V-DOWN"
60 PRINT "G-UP & M-FIRE."
55 PRINT "ENTER YOUR TIME(4-10)" INPUT F
66 IFF=4 THEN S#="000400"
67 IFF=5 THEN S#="000500"
68 IFF=6 THEN S#="000600"
69 IFF=7 THEN S#="000700"
70 IFF=8 THEN S#="000800"
71 IFF=9 THEN S#="000900"
72 IFF=10 THEN S#="001000"
75 PRINT "PRESS A KEY TO START"
90 GET A$: IFA#="" THEN 80
98 TI#="000000"
100 POKE 36879, 14 PRINT "J"
101 L=0
110 FOR I=1 TO 30
120 Q=INT(470*RND(1))+7680
130 POKE Q, 46 NEXT I
140 FOR I=0 TO 20 POKE 7680+I, 160 POKE 38400+I, 2 NEXT I
150 FOR I=0 TO 463 STEP 22
160 POKE 7702+I, 160 POKE 38422+I, 2 NEXT I
170 FOR I=0 TO 20 POKE 8164+I, 160 POKE 38884+I, 2 NEXT I
180 FOR I=0 TO 485 STEP 22
190 POKE 8163-I, 160 POKE 38883-I, 2 NEXT I
300 REM ALIENS
305 GOSUB 2000
410 J=0 Q=INT(18*RND(1))+7703
411 POKE 36876, 0 FORT=1 TO 1000 NEXT T
420 POKE Q+J, 60 POKE Q+J+1, 216 POKE Q+J+2, 62
430 POKE 36878, 3 POKE 36876, 220 GOSUB 2000
435 FORT=1 TO 50 NEXT T GOSUB 2000
440 POKE Q+J, 32 POKE Q+J+1, 32 POKE Q+J+2, 32
450 V=INT(3*RND(1))+1
452 IF V=1 THEN J=J+21
454 IF V=2 THEN J=J+22
456 IF V=3 THEN J=J+23
460 IF PEEK(Q+J+1)=160 THEN 410
462 IF PEEK(Q+J)=160 THEN 410
464 IF PEEK(Q+J+2)=160 THEN 410
467 IF TI#>S# THEN 9000
468 POKE 36876, 0
470 GOTO 420
1000 IF PEEK(Q+J+1)=91 THEN 1150
1020 POKE 36878, 13 POKE 36874, 220
1030 FORT=1 TO 50 NEXT T
1040 POKE 36874, 0
1060 RETURN
1150 REM HIT ALIEN
1151 POKE 36876, 0 FORT=1 TO 60 NEXT T
1160 POKE 36878, 15 FORM=135 TO 239 STEP 2
1170 POKE 36876, M NEXT M
1175 FORT=1 TO 700 NEXT T
1180 POKE 36876, 0 POKE 36877, 220
1181 FORM=15 TO 0 STEP -1
```


Open Forum

Corrections

A number of mistakes have crept into the programs published in the first issues of *Popular Computing Weekly*. We will print corrections as quickly as possible.

Here is a list of the corrections we have to date:

Vol 1 No 1 page 9 Space Amaze

Line 25 should be renumbered line 15.
Line 560 should read IF D5="<" AND X>1 THEN LET X=X+1
Line 2000 should read LET Q(X,Y)=0

Vol 1 No 2 Page 17 Squash

```
80 PROCset-up
130 PRINT CHR$(RND(5)+128);"for";(TIME DIV 10)/10;"seconds"
170 IF AS="Z" OR AS="M" THEN PROCmove-bat
180 PROCmove-ball
260 SOUND T+16,-15,RND(100)+100,255
340 DEF PROCset-up
380 PRINT TAB(10,T+10);STRINGS(20), CHR$(255); TAB(30,T+10);CHR$(255)
460 TIME=0
```

Vol 1 No 2 Page 18 Subchase

```
5 LET TH=5
100 LET BS="TAN (YT/XT)"
355 GOSUB 1000
400 UNPLOT INT (H/(P/64)),30
```

Vol 1 No 3 Page 9 Hell Driver

```
10 GOSUB 1000
80 DIM A(14), B(14), C(14), GS(5), BS(10), MS(14)
930 ML=0: PRINT "36 spaces"
```

Vol 1 No 3 Page 15 Scrabble Scorer

```
1110 PRINT AT 6, J, 10; QS(4,J)
1225 REM C=COUNT OF PLAYERS
1430 LET Z=SUM*(X-28)
1500 LET S(R,N)=Z
1510 LET T(N)=T(N)+Z
1520 IF N<>2 OR P>2 THEN PRINT AT X(N,1),X(N,2);T(N);" "
1530 IF N=2 AND P=2 THEN PRINT AT X(3,1),X(3,2);T(N);" "
1540 NEXT N
1550 LET R=R+1
1560 GOTO 1210
4000 CLS
4010 PRINT QS(1); QS(2);
4020 IF P>2 THEN PRINT QS(3);
4030 IF P>3 THEN PRINT QS(4)
4040 PRINT AT 1,0;"....."
4050 FOR J=1 TO R
4060 PRINT TAB 1;S(J,1); TAB(10); S(J,2);
4070 IF P>2 THEN PRINT TAB 19;S(J,3);
4080 IF P>3 THEN PRINT TAB 28;S(J,4)
4090 PRINT
4100 NEXT J
4110 STOP
8000 CLEAR
8010 SAVE "SCRABBLE"
8020 RUN
```

Vol 1 No 3 Page 21 Programming

```
50 FOR I=CODE"(Graphic 1)" TO CODE "(Graphic A)"
60 IF BS(F1,I)="" THEN GOTO CODE "(Graphic W)"
```

Vol 1 No 4 Page 17 Space Pilot

```
370 LET P1=INT((S3/1000)/2)
730 LET X=10-(INKEYS="3") (the rest of the line remains the same)
```

Vol 1 No 4 P 23 Programming

Some of you noticed that the programs were missing from Barry Cornhill's article on chaining ZX81 programs in the 13 May 1982 issue. To put matters right, here they are:

```
0 REM P1 DRG Y1 DATA
10 DIM B(10)
20 FOR I=3 TO 10
30 LET B(I)=I
40 NEXT I
5401 LET J=PEEK 16400+256+PEEK 1
5380 LET K=PEEK 16386+256+PEEK 1
5380
70 FOR I=0 TO 55
80 POKE K+I,PEEK (J+I)
90 NEXT I
```

```
0 REM P2
10 DIM B(10)
20 LET J=PEEK 16400+256+PEEK 1
5401 LET K=PEEK 16386+256+PEEK 1
5380
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10+B(I)
90 PRINT B(I)
100 NEXT I
```

```
0 REM P3
10 DIM B(10)
20 LET J=PEEK 16400+256+PEEK 1
5401 LET K=PEEK 16386+256+PEEK 1
5380
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10+B(I)
90 PRINT B(I)
100 NEXT I
```

```
0 REM P4
10 DIM B(10)
20 LET J=PEEK 16400+256+PEEK 1
5401 LET K=PEEK 16386+256+PEEK 1
5380
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10+B(I)
90 PRINT B(I)
100 NEXT I
110 FOR I=0 TO 55
120 POKE K+I,PEEK (J+I)
130 NEXT I
```

```
0 REM P5
10 DIM B(10)
20 LET J=PEEK 16400+256+PEEK 1
5401 LET K=PEEK 16386+256+PEEK 1
5380
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10+B(I)
90 PRINT B(I)
100 NEXT I
110 FOR I=0 TO 55
120 POKE K+I,PEEK (J+I)
130 NEXT I
```

```
0 REM P6
10 DIM B(10)
20 LET J=PEEK 16400+256+PEEK 1
5401 LET K=PEEK 16386+256+PEEK 1
5380
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10+B(I)
90 PRINT B(I)
100 NEXT I
110 PRINT "TO SAVE ENTER N/L"
120 INPUT Z$
130 GO SUB 130
140 STOP
150 SAVE "DATAFILE"
160 LET J=PEEK 16400+256+PEEK 1
5401 LET K=PEEK 16386+256+PEEK 1
5380
40 FOR I=0 TO 55
50 POKE K+I,PEEK (J+I)
60 NEXT I
180 RETURN
```

```
1 REM VIC-ORATOR (C)1982 KEN CLARK RUNS ON 3.5K VIC-20
2 REM***LOWER MEMORY TO PROTECT MEMORY @ 5120 ONWARDS***
3 POKE51,255:POKE52,19
4 POKE55,255:POKE56,19
5 CLR
6 REM***BLANK SCREEN WHILE SETTING UP REGISTERS ETC.***
7 POKE36867,128
8 REM***SET UP CHARACTER GENERATOR @ 5120 ONWARDS***
9 I=0:C=0
10 POKE5120+I,PEEK(32768+C)
11 POKE5120+I+1,PEEK(32768+C)
12 C=C+1:I=I+2
13 IF C<1024 THEN10
14 REM***SET REGISTERS FOR USER DEFINED CHAR GENERATOR***
15 POKE36869,253
16 POKE36866,PEEK(36866)OR128
17 REM***AJUST SCREEN SIZE AND SELECT 16 X 8 CHARACTERS***
18 POKE36867,149
19 REM***PUT YOUR MESSAGE/TEXT FROM HERE....***
20 PRINT"78 LARGE CHARACTERS ARE"
21 PRINT
22 PRINT"POSSIBLE ON THE VIC-20"
23 PRINT
24 PRINT"WITH A USER DEFINABLE"
25 PRINT
26 PRINT"CHARACTER SET."
27 PRINT:PRINT:PRINT"8 PRESS ANY KEY"
28 REM***.....TO HERE - THEN RESET VIC WHEN FINISHED***
29 GETA$:IFA$=""THEN29
30 POKE36869,240
31 POKE36866,150
32 POKE36867,174
33 POKE51,255:POKE52,29
34 POKE55,255:POKE56,29
```

Vic-Orator
by Ken Clarke

PROGRAM OF THE WEEK

How long is a piece of string?

David Lawrence explains the use of character codes on the ZX81

Lest ZX-81 owners should ever be tempted to forget the importance of the humble byte, here are three practical and elegant ways of handling strings which depend entirely upon the fact that a single string character can take any one of 256 forms.

First, the formatting of strings which have been stored in dimensioned arrays:

If you were to enter lines 20 to 50 of the demonstration program you would quickly discover that though you had intended to store 'FOX' in line 1 of the array A\$, what is actually stored there is 'FOX' followed by 17 spaces. This is because the ZX-81 fills a dimensioned string array with spaces until the positions are used for something else. This could be overcome by changing A\$(1) in line 50 to A\$(1,1 TO 3) but the array may be intended to hold a large number of strings of different lengths to be fitted into a text at various points. What is needed is a simple method enabling the program to know how much of a dimensioned string is useful information and how much is padding.

An effective answer is illustrated by lines 60-80. Line 60, which could be used with any string up to 254 characters, simply tags a single character on to the front of the string — the CODE value of that character being equal to the length of the string plus the extra character. Line 80 now shows how the useful section of the string can be unerringly identified. A\$(2,2 TO CODE A\$(2,1)) is the original B\$ without its padding — in the case of 'FOX' the character with a CODE value of 4 is tagged on to the front and the complex term boils down to no more than A\$(2,2 to 4).

This technique of adding 'string length indicators' can considerably add to speed and flexibility compared to commonly used methods such as



ZX81 . . . something to byte on

examining the string, character by character, to assess its length.

Our second usage for single character codes is in relation to the storage of data in long strings rather than in multi-dimensioned arrays. Suppose, for instance, that we have a large number of names to store and later access. This can be done by setting up an array with sufficient lines to take all the names. The problem is that if the longest name is likely to be 20 characters long then every line will have to be 20 spaces long, even though most of the other names will only need around 10 characters, a massive waste of memory space.

Using indicators

Alternatively, the names can be stored in one long string, for instance 'Smith, John, Adams, Bill, Brown, Alison. Hence, no space is wasted but there is, equally, no way for the program to know where one name ends and the next begins. We could put a special marker, such as an asterisk, in between the names, but this would entail examining every character in the string whenever individual names had to be identified.

The section of the demonstration program starting at line 100 illustrates how a long string can be made up of individual entries, each with an SLI tacked on to the front. Lines 200 onwards then show how much indicators can be used to retrieve items from

the string. The loop at line 240 simply uses the SLIs to jump from the beginning of one item to the next until the correct item is reached. Line 280 is not more than a slightly more complicated version of line 80, except that instead of starting to print at position 2, we start at C+1, where C is the position of the SLI of the desired entry.

This section can be used with a little adaptation to produce an effective filing system, nor is it limited to single items of information such as names, since within each entry further SLIs can identify sub-divisions such as: name, address, telephone.

Finally, we shall examine how single character codes can aid in the production of well formatted interactive programs. The program section titled 'Typical Input Routine' illustrates some of the functions that have to be performed when requesting information from the program user.

If the program contains many different requests for information, many of these functions can valuably be transferred to a single subroutine such as that from line 400 to line 560. Before this subroutine can be called, however, the string output requesting information will have to be specified (even if the same request has been made elsewhere), together with the position it is to be printed on the screen which, together with the line calling the subroutine, makes four lines for each call.

The effective use of single character codes is illustrated by the section from lines 570 to 780, which works on the assumption that A\$ is a two dimensional array containing the questions to be printed. Each question has an SLI attached, followed by two bytes which indicate the screen position at which the string is to be printed. Further single characters could be included which would allow all the printing, whether or not an input is required, to be performed by the subroutine.

The codes themselves are simply attached by the use of a subroutine such as that found at line 790 (which would only be required during program development) and every code character replaces a line defining a variable in the program.

Perhaps the humble byte is not so humble after all.

Spectrum

In this new slot various contributors explore different aspects of the ZX Spectrum.

This is why they called it Spectrum

Nick Hampshire discusses the colour commands on the ZX Spectrum

The Spectrum screen is organised as 24 lines of 32 characters, and the character and background colour of each one of these 768 character spaces can be individually programmed to one of the eight possible colours which can be displayed by the Spectrum.

The two colours associated with each character space are the foreground or character colour, this is referred to as the ink colour, and the background colour or paper. In the normal power up mode the INK colour is black and the PAPER colour white.

There are eight different colours, including black and white, which can be displayed, they are as follows:


- 0 — black
- 1 — blue
- 2 — red
- 3 — purple or magenta
- 4 — green
- 5 — pale blue or cyan
- 6 — yellow
- 7 — white

These colours are produced on a colour tv by mixing just three primary colours — blue, red and green. Thus magenta, which is colour 3, is produced by mixing colours 1 and 2 — blue and red. Likewise colour 5, cyan, is a mix of colours 1 and 4, and colour 6, yellow is a mix of colours 4 and 2.

From this you can see that the colour number is in fact the sum of the primary colours required to produce that colour. Thus white, which is produced by having all three primary colours mixed, has colour number 7 or colours $1 + 2 + 4$.

The number associated with each colour on the above list is important since it is used in the colour commands to designate that colour.

The INK command is used to set the character or foreground colour of characters subsequently displayed

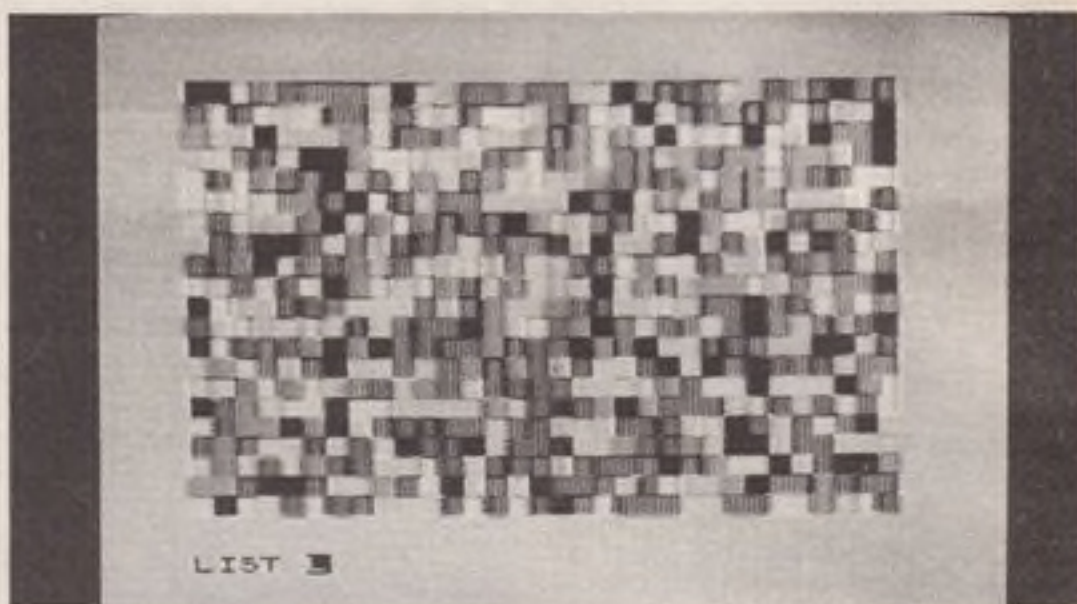

All the fantastic colours; (due to technical reasons, here only in black and white).

using PRINT commands starting at the current cursor position. The command:

```
INK 4 : PRINT "ink colour green"
will print the statement "ink colour green" on the screen starting at the current cursor position in green characters on the existing background colour (normally white) of the screen. To show the range of colours try the following program:
```

```
10 FOR Q = 0 TO 7
20 INK Q
30 PRINT "ink colour number"; Q
40 NEXT Q
```

The PAPER command is identical to the INK command except that it sets the background colour for the printed characters. Thus the command:

```
PAPER 4 : PRINT "paper colour is green"
will display the statement "paper colour is green" starting at the current cursor position and using the existing ink colour (normally black). The following short program shows the 64 different combinations of INK and PAPER colours which can be obtained.
```

```
10 PRINT "01234567 ink colours"
20 FOR Q = 0 TO 7
30 FOR Z = 0 TO 7
40 INK Z: PAPER Q
50 PRINT "+";
60 NEXT Z
70 PRINT "paper colour"; Q
80 NEXT Q
```

Besides the foreground and background colours there is also the colour of the border around the screen display area. This border can have its colour set by use of the BORDER command followed by one of the eight colour code numbers. Thus:

```
BORDER 5
```

will set the border to a cyan colour. The original INK or PAPER colours

can be retained for a character by setting the colour value to 8. This means that the characters printed following the command are "transparent", with the previously defined colours on the screen being used to display the new characters. Thus if the command

```
PAPER 8
```

is executed then the PAPER colour will be left as currently displayed on the text following the cursor. However, the INK colour will be that defined in the previous statement. Similarly the command:

```
INK 8
```

will leave the INK colour unchanged but the PAPER colour changed to that defined in the previous colour definition statement. Both INK 8 and PAPER 8 can be used together to leave all colours unchanged.

There is a very poor contrast between some of the colours. For example it is virtually impossible to read a character which has an INK colour of cyan and a PAPER colour of green.

To overcome this and ensure enhanced character contrast there is an extra character code value. To do this you have to use the colour code number 9 after either the INK or PAPER commands.

These set the colour used with either the defined INK or PAPER colour to a colour with the maximum contrast. Thus if the colour is dark (eg. black, blue, red or magenta), then the complimentary colour will be made white. If light, then the complimentary colour will be black.

Sound & vision



Beep-Beep, Beep Beep, yeah!

Now that the initial excitement of the ZX Spectrum launch is out of the way, and the computers are starting to be used, its functions are beginning to be explored. My first impression was quite good, even though the machines I saw were pre-production models. There are a number of weaknesses but the machine is a vast improvement on its older brother, especially to readers of this column who will be interested to hear that the Spectrum has sound.

Spectrum sound is governed by the BEEP command, which sounds silly but then so do PEEK and POKE. BEEP is used with two parameters, that is the word Beep is followed by two variables, which may be numbers or variable names, separated by a comma. The first one of these parameters governs the duration of the

sound, the second its pitch. Duration is specified in seconds. I didn't have the opportunity to test the duration for accuracy, but at a guess it should be OK for most music. After all, notes don't usually extend beyond a couple of seconds.

The pitch variable is interesting. If it is given the value 0 then the pitch is that of middle C. Add one to get the next semitone, ie C sharp or D flat. Adding one always gives the next semitone up, subtracting gives the one lower.

The pitches are so organised to make an octave rise equal an extra twelve added to the pitch value. This continues to rise all the way up to a pitch value of around 73, way beyond my hearing, where an illegal parameter error message is given. I'm sure people can think up some good uses for the very high frequencies, such as

disturbing bats and opera singers.

Another nice touch is that these pitches don't have to be integers — in other words quarter tones — and smaller pitch variations can be programmed. This gives rise to two more possibilities.

The first is the playing of Arabic, or Chinese music where the scales are organised differently.

The second is tuning of the Spectrum to other musical instruments. This can be done by ear, adding tiny fractions as an increment until two pitches coincide.

It also raises the possibility of portamento between two notes.

It is quite likely that BEEP is not accurate over more than a couple of octaves, so this limitation should be kept in mind. Also I expect BEEP will be affected greatly by dirty power supplies. **Sam Blythe**



The BEEP key on the Spectrum is next to CAPS SHIFT.



The colourful plot thickens

The graphical complexity of the BBC Micro is such as to make it one of the most useful machines around, yet the very wide range of options, permutations and cunning tricks can get rather confusing.

This week, we'll look at one of the most important graphics capabilities and how it can be used.

The feature is called XOR plotting — XOR standing for 'exclusive or'. You probably recognise this as a term from logic, to be grouped with others like AND, OR and NOT. Whilst the latter are fairly easily understood, XOR is more difficult to grasp.

What is easy to appreciate, however, is the fact that it applies to plotting a colour on the screen, and means that the colour you draw with is *modified* by the colour already there, 'underneath it'.

XOR plotting, simply, means that the computer does a quick check on the information already present in the bit of memory looking after each pixel — individual dot — on the screen.

Normal plotting would just replace whatever information was there with new stuff — hence replacing the old colour with the new. Red might be changed to black, or white made yellow, for example.

But XOR plotting implies that if, say, red

is laid over yellow, the result is a new colour altogether. Or — what is even more useful — if a colour is plotted on the screen in XOR mode, then plotted *again*, it disappears. What is more, it vanishes leaving whatever was underneath still intact!

Only a few other machines, such as the RML 38Z, can do this. They let you move shapes (or text) around over an already existing coloured background, leaving the original image just as it was before.

Here's how to use it. Having set up a graphics mode (try MODE 5), you can determine the colour of any plotting commands by the use of GCOL. GCOL needs two numbers following it, separated from each other by a comma. In normal use, the first digit is 0, and the second is 0 to 3, which gives colours black, red, yellow and white (or their monochrome equivalents on a black-and-white tv).

So GCOL 0,3 means 'use colour 3, normally'. But change the 0 to a 3, and you're in XOR mode. GCOL3,3 means 'use colour 3, in XOR mode'.

Next week, I'll be presenting two programs — rather brain-damaging ones — using this and other graphics effects. This week, try the program on the left.

Brian Reffin Smith

```
10 MODE 5
20 CLG : clear graphics area
30 FOR I=1 TO 1000
40 GCOL 3,1 : REM plot in XOR red
50 GOSUB 100
60 GCOL 3,2 : REM XOR yellow
70 GOSUB 100
80 NEXT I
90 END
100 REM plot twice
110 X1=(1239) : Y1=RND(1023)
120 X2=RND(1239) : Y2=RND(1023)
130 FOR J=1 TO 2
140 MOVE X1,Y1 : DRAW X2,Y2
150 NEXT J
160 RETURN
```

Our classifieds are faster.

Do you want to sell your computer and buy a bigger and better one?

Have you ever thought of trying to make some money out of selling tapes of your own programs?

Whatever it is you want to buy or sell why not use our classified pages?

It has to be better than waiting for up to nine weeks to get into one of the old monthly magazines.

Not only that, but our rates are very reasonable.

For private individuals it only costs 20p per word, with a minimum of 10 words.

We can make it so cheap because we charge companies using the classified columns 40p per word.

The classified pages can be used for semi-display advertising.

The cost for this is £10 per single column centimetre, with a minimum charge of £30.

All copy for the classified pages must be pre-paid. (You'll find a handy form on page 22).

Cheques and postal orders should be made out to *Popular Computing Weekly*. Your advertisement should arrive at least two weeks before the publication date.

If you have any queries regarding Classified or semi-display advertising please call Alastair Macintosh on 01-930 3840

Popular Computing Weekly.
The fast one.

Peek & poke

Peek your problems to our address. Ian Beardsmore will poke back an answer.

A QUESTION OF INTERPRETATION

David Geach of Graeme Road, Ross-on-Wye writes:

Q I am fairly new to computing, using a second-hand Atom at the moment. Slowly I am learning the jargon but two things are still confusing me. These are Compiler and Interpreter. I do not seem to understand several descriptions that I have read. If anything it makes things seem more complex. Could you please explain them?

A A compiler de-codes a program in a high level language, such as Basic or Cobol, into machine code or an assembly language. Initially this is comparatively slow, nevertheless once it has been done the program will RUN faster than an interpreter program. This is because the de-coded program will be stored in the memory.

An Interpreter does essentially the same, except that each statement is done individually and not stored. So each statement has to be re-read and re-coded each time it is used. The advantage of the Interpreter is that it uses less memory, as no interim program has to be stored. The disadvantage is that it takes more time. Obviously the continual re-reading needed for the Interpreter, takes more time to RUN, than the stored de-coded program of the compiler.

IT'S ALL PART OF THE EDUCATION

K. Daniels of Poole, Dorset writes:

Q At the recent computer fair in Earls Court, I heard the name MUSE on two different occasions. No one I have asked seems to have heard of them beyond someone who said that they had heard of them and EZUG but did not know what they were. I haven't a clue. Have you?

A Yes. MUSE stands for Micro Users in Secondary Education while EZUG

stands for Educational ZX Users' Group. As you can guess they are both concerned with computers in the school. EZUG was formed out of MUSE, and I gather that both groups are quite active within education, having their own news letters and software libraries.

THIS SHOULD RAM IT ALL HOME

Nick Starking of Caister-on-Sea, Norfolk writes:

Q I am writing to you in the hope that you can answer a question (well two really) for me. I am interested in the Commodore Vic-20, but I feel that the 3.5K RAM is too small. I hear that extra RAM is available, but my query is this: Do the 3K, 8K, and 16K RAM cartridges for the Vic-20 fit inside the computer, or is an expansion unit (like the Afron Expansion Unit) necessary?

Also, I have read about the introduction either later this year, or early next year of the Vic-20/16, a 40-column 16K RAM computer which is a big brother to the Vic-20, and the Commodore 64/40, a 40-column, 64K RAM computer which will sell for about £395. Is there an approximate price available for the Vic-20/16?

A The extra RAM cartridges for the Vic-20 are external, however, a memory expansion port is already supplied, so an expansion unit is not needed unless you want to add other peripherals as well. As for the new Vics, if you look at your third issue of *Popular Computing Weekly* you will find your question answered on page 5. The Vic-20/16, is in fact the Vic-30. Cost will be about £250, and it is due to be launched in January next year.

PUT MORE POKE IN YOUR RACER

J. R. Johnson of Tottenham, London writes:

Q I have had a BBC model B micro since early this month and now I'm writing a

Grand Prix game. I have tried tabbing the cars on to the screen, but this slows the game down. I would prefer to PEEK and POKE to and from a screen location. Could you tell me and many other BBC owners how to use PEEK and POKE to and from a screen location?

A The first thing that has to be done is that the SCROLL function has to be stopped, or at least controlled by setting up a text window. This still scrolls the screen, but the VDU RAM locations do not change. Enter this:

VDU 28,0,24,0,39,0

This sets up a screen window for the entire screen. To POKE use the following:

?(HIMAN x+y+40) ASC" character you want "

Here x and y are the co-ordinates that you want. To PEEK use the following:

CH=(HIMAN+x+y+40)

This makes CH equal to whatever is at x,y. When you want to bring the character on to the screen just enter the line:

CH\$=CHR\$ "CH"

STRICTLY FOR THE KNOB TWIDDLER

B. W. Bailey of Hampstead, London NW3 writes:

Q As a display for my ZX81 I am using a Toshiba model 10TB battery/mains portable with a 9in screen. It has an integral loop antenna marked, and a coaxial socket marked, into which I plug my ZX81. My problem is that no amount of tuning or setting of the contrast or brilliance controls gives me a clear background but a pattern of alternating light and dark lines persists over the usable area. Can you help me?

A Several things could be the cause of the trouble but no one factor presents itself as the most likely cause of the problem. There are two important things that you do not say in your letter. Have you tried your ZX81 with

another television, or another ZX81 on your portable? Also I would guess that when you say background that you are at least getting a cursor. If the tuning is all right, then two possible causes are the power lead, and the coax aerial lead.

The power supply jack can be very fickle on both the ZX80 and 81, try twiddling this in and out. The smallest increment in the right direction can make a vast difference. In the same way check your video lead. When I first got mine the two wires inside one of the plugs were so badly wired that the slightest pressure would cause them to touch, with all the attendant screen decay.

I would have thought that the internal antenna would be cut out as soon as an external lead was connected, but my hardware knowledge, particularly of televisions, is not all it might be. Try using another television, or computer, this will help reduce the number of possible causes of your troubles. Then try checking all the leads, making sure the power lead does not cross the signal lead, if you are using a RAM Pack, try it without the Pack as they usually add to problems like this.

If you still do not get any luck, then all I can suggest is that you go to your local electrical shop and ask their advice, and possibly if you might try out your computer on one or two other models.

If you still get the same sort of problem, then it would seem that the frequency modulator in the ZX81 is at fault, which will mean a return to Sinclair Research. If it works with other televisions then your Toshiba is the cause, and I could not tell you how to rectify that.

● Stop agonising over that problem. Write to Ian Beardsmore, Peek & Poke, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

Competitions

Puzzle No 7

One of the side-stalls at our summer fete was attracting some attention. Called *Lucky Seven*, it was the simplest of games, requiring only nine wooden discs — plain on one side, numbered on the other from 1 to 9.

The nine discs were placed face down on a table and were mixed up. For the payment of a 10p stake you could pick up four of the discs at random, which were then turned over to reveal the digits painted on the reverse. The person in charge would then arrange these four digits to form one four-digit number. If this number was divisible by seven then you lost 10p. If, however, it was impossible for a multiple of seven to be formed then you would win £1.

How would you assess the odds against winning this game? (Of course, such 'tricks' as inverting the six and nine are not allowed.)

Solution for June 4

In order for a man to divide the pile of coconuts into equal fifths and have one left over for the monkey the formula is:

$$A = 4/5 (B - 1)$$

where B equals the number the pile originally contained and A those remaining after the division. A and B, of course, must be integers. By rearranging this equation we get:

$$B = (5A/4) + 1$$

In order for the second man to be able to divide these remaining nuts equally (and have one left over for the monkey), B - 1 must also be exactly divisible by five. If it is, we can repeat the procedure, and so on.

As the final number of nuts must be a multiple of five we start with this number and increase by

five each time. (To find the answer to part (b) of the question then we must start with a minimum of six to have one left over.)

```

10 LET N = 5
20 LET M = 0
30 LET A = N
40 LET B = 5*A/4 + 1
50 IF (B - 1)/5 = INT ((B - 1)/5) THEN GOTO 100
60 LET N = N + 5
70 GOTO 20
100 LET M = M + 1
110 IF M = 5 THEN PRINT B
120 IF M = 5 THEN STOP
130 LET A = B
140 GOTO 40
    
```

Run this and you get (a) 3121 coconuts, (b) 15,621 coconuts.

Winner of Puzzle No 3

The winner is: David Robinson, Montgomery Hill, Frankby, Wirral, who receives £10.

Solution to Crossword No 3

Across: 3 CPU, 6 Adder, 9 Shampoo, 10 Chop, 11 Gridiron, 13 Lie low, 14 Duplex, 17 Tropical, 19 Anal, 21 Real Ale, 22 Metro, 23 Lip.
Down: 1 Calculators, 2 Odd ode, 3 Cry, 4 Users, 5 Eardrum, 6 Spar, 7 For next loop, 12 Nominal, 15 Length, 16 Panel, 18 Opal, 20 Amp.

Winner of Crossword No 3


The winner is: D D R Sibbald, St. George's Road, Ilford, Essex, who receives £10.

Rules

The winner for the crossword and the winner of the puzzle will be the first name out of the hat (in each case).

Closing date for both the crossword and the puzzle is the Monday, three weeks after the cover date.

Crossword No 7

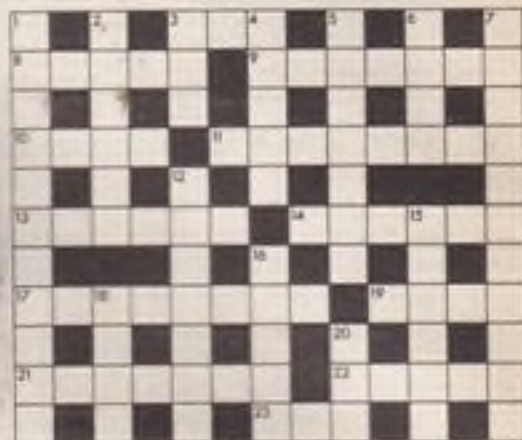

ACROSS

- Program modules that agree with directions (5).
- Program the company to come back and press around (7).
- Program to change source of specified item (4).
- Program to translate ROM chip, with some help (8).
- Program bit swapping and calling (8).
- Three, to start with, in endlessly nice acid (6).
- Replace a switching centre (8).
- Program switch may go through 17A (4).
- Program running order — put to death! (7).
- Disable short record in a week (5).
- Slippery when caught on the lee shore (3).


DOWN

- Program to translate, table and reprint (11).
- Computing sum of a penny ring (6).
- A quiet tree (3).
- Program storage raises more page inserts (1.1.1.1.1.1).
- Food container, shaken, inputs nothing (4.3).
- Storage unit for church students (4).
- Head underground to avoid the facts (7-4).
- Hi-speak versions get closer without being observed (5.2).
- Student of an input device (6).
- Say yes to nuclear reactor, electrical engineer (5).
- Credit opposite points of the workers (4).
- Tool amends law (3).

CITIZEN PAIN

BY DAVID IRELAND and JAMES MACDONALD



 **commodore**

COMPUTING

Own or use a Pet or a Vic? Fed up with being ignored by all the traditional monthly magazines? Fed up with listings which are too simple or simply do not work?

You need Commodore computing, the new monthly magazine. It is published by Nick Hampshire, author of *The Pet Revealed*, *Pet Graphics*, *A Library Subroutines* and *the Vic Revealed*. Each issue is packed with advanced advice on how to make the most of your computer, whether you use a Pet or a Vic, and whatever your application. Software, hardware, machine code, games, business use — it is all covered in every issue.

If you want to learn more about your computer, take out a subscription to *Commodore Computing*. It is the only way to get it, and get it straight.

**Send £12.50 for a subscription
for 1 year (10 issues) to:**

**COMMODORE COMPUTING, MAGSUB,
OAKFIELD HOUSE, PERRYMOUNT ROAD,
HAYWARDS HEATH, SUSSEX RH16 3DH**

MORE FUN WITH YOUR ZX81!



16K RAM PACK

PUSH-ON PLUG-COMPATIBLE MEMORY

The addition of our fully-compatible, assembled, tested and guaranteed 16K Ram Pack means more memory for better games and programs

ORDER YOURS TODAY FROM:

CAPS LTD. Dept. E, 28 The Spain, Petersfield, Hants GU32 3LA

Please send me my Byg Byte 16K Ram Pack. I enclose cheque/postal order for £34.95 (includes VAT, Postage & Packing)

Name

Address

Dept. E

Allow 28 days for delivery

Fully **£34.95** inclusive

WE CHALLENGE YOU, EARTHLING.

Load this COSMOS program in your ZX81 16K and see if you can defend your despicable Earth convoys against our supreme attack ships and warp mines.

A totally new space game concept written in machine code to produce fiendishly clever effects and deadly results.

You poor Earthlings have no chance.

£5.99 ON CASSETTE.

PLUS OTHER 16K PROGRAMS ALSO ON CASSETTE

TRIAD Three new puzzles to perplex and frustrate even the Rubik Cube expert. All with SAVE facility **£3.99**

QUARTET An exciting compendium of crosswords, puzzles and memory tests with up to 10 grades of difficulty **£3.99**

TABLE TUTOR Using concepts within a schoolchild's experience, this menu-driven tutor includes instruction, table lists, speed tests, homework and answer service. **£3.99**

PET LISTINGS

Black Box; Mastermind; Pontoon
£1.60 each or 3 for £4.00

Only high quality cassettes used
Send cheque or p/o to:

VORTEX SOFTWARE (DEPT POP)
26 CRAWFORD ROAD,
HATFIELD, HERTFORDSHIRE, AL10 0PG.



MAIL ORDER ONLY PLEASE. SEND SAE FOR CATALOGUE.

NEW

ZX 81 16K
SOFTWARE

DIGGLES KITCHEN



SIMPLE SUPPERS
TO
CELEBRATION DINNERS
VOLUME 1

50 PAGES OF WORLDWIDE RECIPES
£4.99 (inc. P&P and VAT)

VOLUME 2

50 PAGES EUROPEAN RECIPES
£4.99 (inc. P&P and VAT)

Special price for two volumes
£9 (inc. P&P and VAT)

More volumes to follow

Please specify
which volume(s) -
Mail order only

Send remittance
to:-



MICRO COMPUTER SOFTWARE

Unit D6, Pear Industrial Estate, Stockport Road, Lower Bredbury,
Stockport SK6 2BP. Tel: 061-494 2441